


[TestMode: TX BLE2M low channel]; [Polarity: Horizontal]

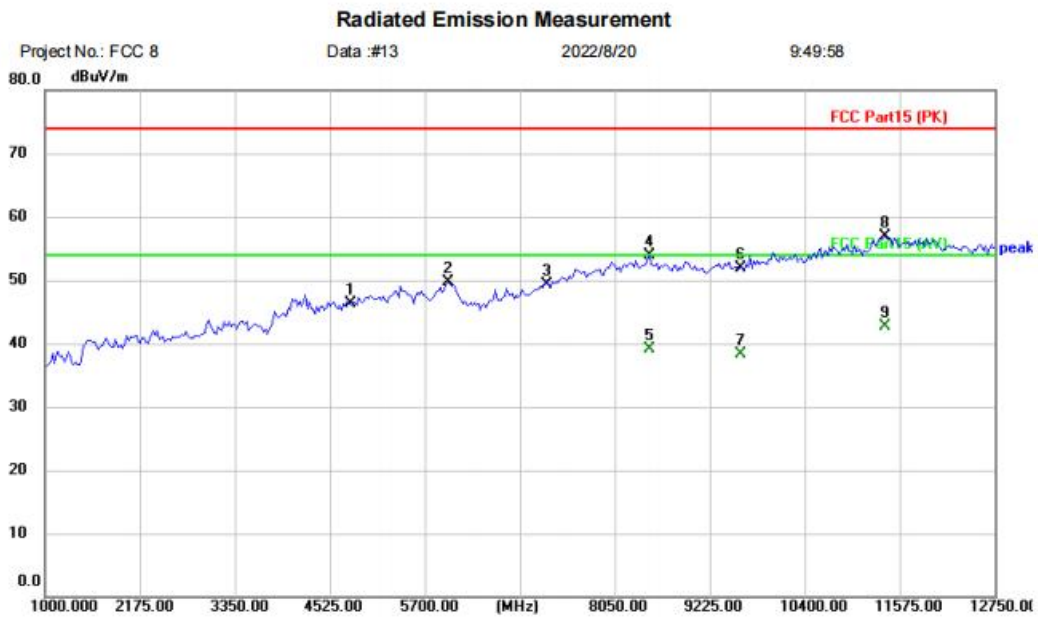

Site: \_\_\_\_\_      Polarization: **Horizontal**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power: \_\_\_\_\_      Humidity: %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 2M TX-L  
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	40.87	5.53	46.40	74.00	-27.60	peak	
2		5982.000	39.91	9.70	49.61	74.00	-24.39	peak	
3		7206.000	39.73	9.60	49.33	74.00	-24.67	peak	
4		8473.000	40.91	12.92	53.83	74.00	-20.17	peak	
5		8473.000	26.27	12.92	39.19	54.00	-14.81	AVG	
6		9608.000	39.06	12.75	51.81	74.00	-22.19	peak	
7		9608.000	25.46	12.75	38.21	54.00	-15.79	AVG	
8		11387.000	39.38	17.43	56.81	74.00	-17.19	peak	
9	*	11387.000	25.20	17.43	42.63	54.00	-11.37	AVG	

\*:Maximum data    x:Over limit    l:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX BLE2M low channel]; [Polarity: Vertical]

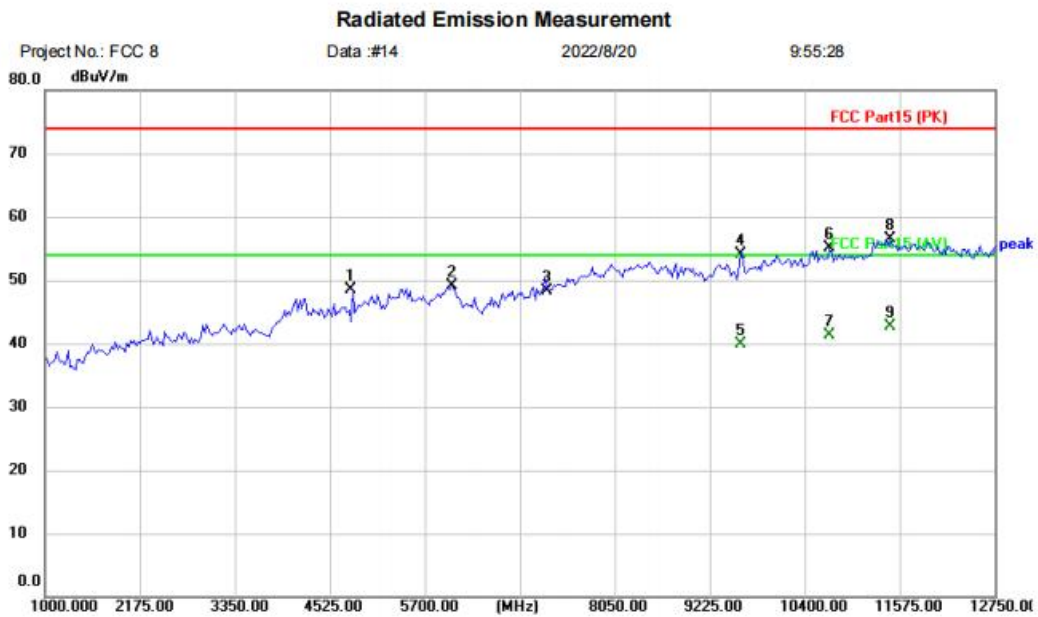

Site:      Polarization: **Vertical**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 2M TX-L  
 Note:


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4804.000	42.94	5.53	48.47	74.00	-25.53	peak	
2	6029.000	42.27	6.80	49.07	74.00	-24.93	peak	
3	7206.000	38.65	9.60	48.25	74.00	-25.75	peak	
4	9608.000	41.26	12.75	54.01	74.00	-19.99	peak	
5	9608.000	27.22	12.75	39.97	54.00	-14.03	AVG	
6	10705.500	38.91	16.17	55.08	74.00	-18.92	peak	
7	10705.500	25.06	16.17	41.23	54.00	-12.77	AVG	
8	11457.500	39.04	17.50	56.54	74.00	-17.46	peak	
9 *	11457.500	25.18	17.50	42.68	54.00	-11.32	AVG	

\*:Maximum data    x:Over limit    l:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX BLE2M mid channel]; [Polarity: Horizontal]

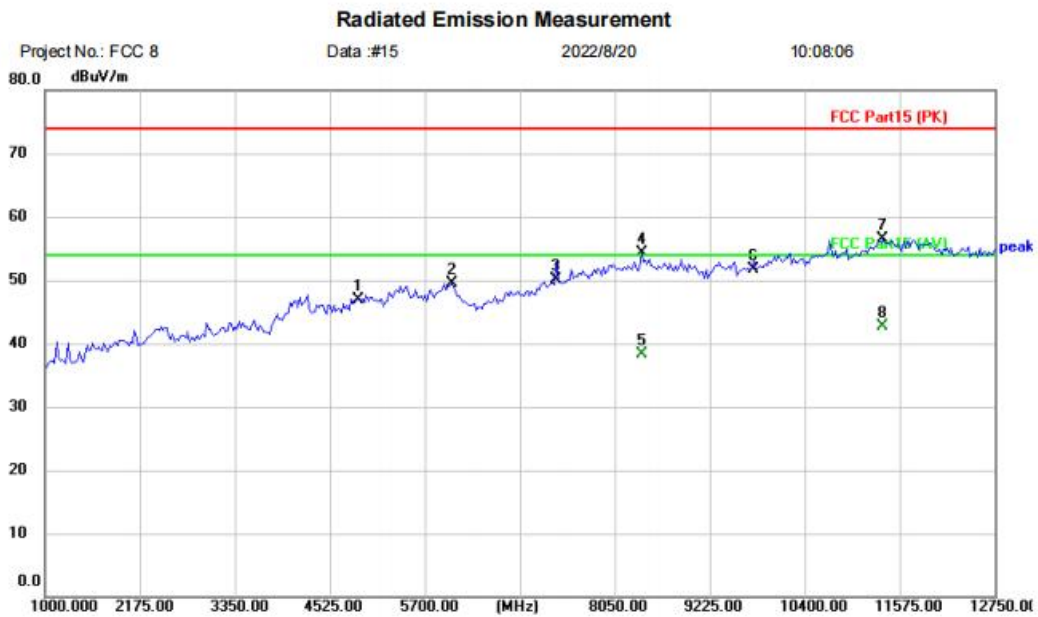

Site: \_\_\_\_\_      Polarization: **Horizontal**      Temperature: \_\_\_\_\_ (C)  
 Limit: FCC Part15 (PK)      Power: \_\_\_\_\_      Humidity: \_\_\_\_\_ %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 2M TX-M  
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4884.000	41.17	5.81	46.98	74.00	-27.02	peak	
2		6029.000	42.65	6.80	49.45	74.00	-24.55	peak	
3		7326.000	40.04	10.03	50.07	74.00	-23.93	peak	
4		8379.000	41.52	12.71	54.23	74.00	-19.77	peak	
5		8379.000	25.57	12.71	38.28	54.00	-15.72	AVG	
6		9768.000	37.52	14.20	51.72	74.00	-22.28	peak	
7		11363.500	39.13	17.34	56.47	74.00	-17.53	peak	
8	*	11363.500	25.46	17.34	42.80	54.00	-11.20	AVG	

\*:Maximum data    x:Over limit    l:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX BLE2M mid channel]; [Polarity: Vertical]

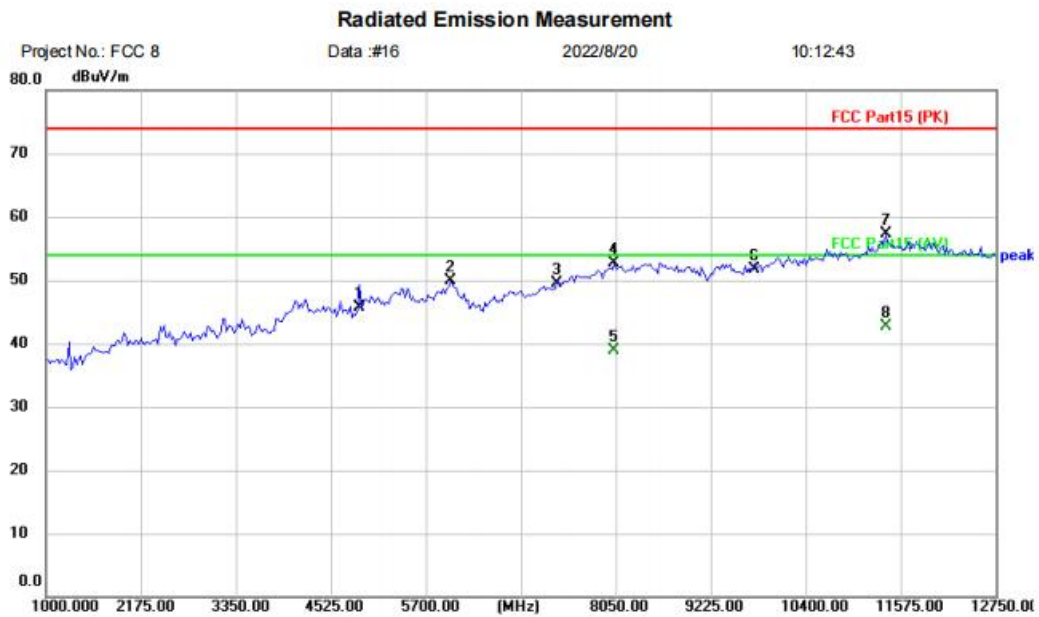

Site: \_\_\_\_\_ Polarization: **Vertical** Temperature: \_\_\_\_\_ (C)  
 Limit: FCC Part15 (PK) Power: \_\_\_\_\_ Humidity: \_\_\_\_\_ %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 2M TX-M  
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4884.000	39.95	5.81	45.76	74.00	-28.24	peak	
2		6005.500	43.19	6.76	49.95	74.00	-24.05	peak	
3		7326.000	39.57	10.03	49.60	74.00	-24.40	peak	
4		8026.500	40.55	12.14	52.69	74.00	-21.31	peak	
5		8026.500	26.85	12.14	38.99	54.00	-15.01	AVG	
6		9768.000	37.51	14.20	51.71	74.00	-22.29	peak	
7		11387.000	39.79	17.43	57.22	74.00	-16.78	peak	
8	*	11387.000	25.25	17.43	42.68	54.00	-11.32	AVG	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX BLE2M high channel]; [Polarity: Horizontal]

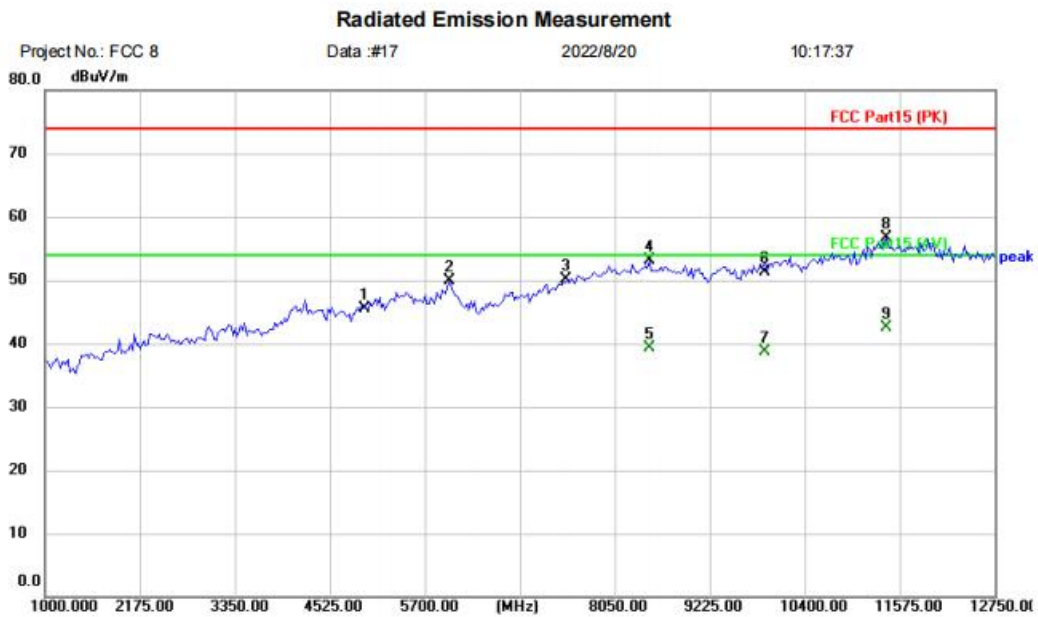

Site	Polarization: <b>Horizontal</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: TLSR9218 Development Board		
M/N: TLSR9218MD48D		
Mode: BLE 2M TX-H		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	38.67	6.84	45.51	74.00	-28.49	peak	
2		6005.500	43.14	6.76	49.90	74.00	-24.10	peak	
3		7440.000	39.58	10.46	50.04	74.00	-23.96	peak	
4		8473.000	40.23	12.92	53.15	74.00	-20.85	peak	
5		8473.000	26.31	12.92	39.23	54.00	-14.77	AVG	
6		9920.000	36.43	14.94	51.37	74.00	-22.63	peak	
7		9920.000	23.72	14.94	38.66	54.00	-15.34	AVG	
8		11410.500	39.20	17.48	56.68	74.00	-17.32	peak	
9	*	11410.500	25.08	17.48	42.56	54.00	-11.44	AVG	

\*:Maximum data    x:Over limit    l:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX BLE2M high channel]; [Polarity: Vertical]

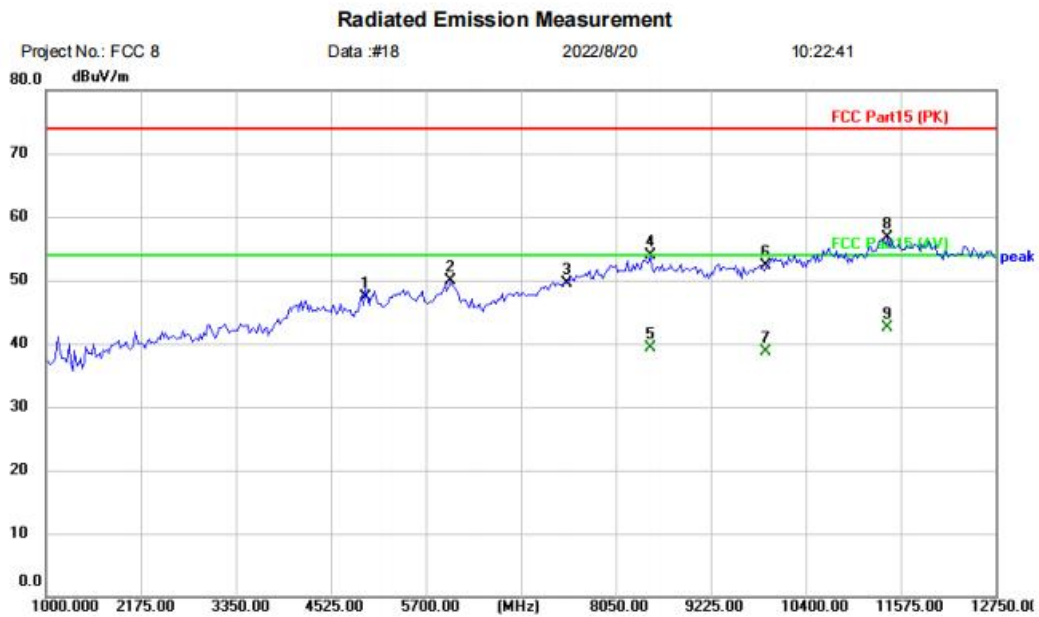

Site: \_\_\_\_\_ Polarization: **Vertical** Temperature: \_\_\_\_\_ (C)  
 Limit: FCC Part15 (PK) Power: \_\_\_\_\_ Humidity: \_\_\_\_\_ %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 2M TX-H  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	40.56	6.84	47.40	74.00	-26.60	peak	
2		6005.500	43.18	6.76	49.94	74.00	-24.06	peak	
3		7440.000	38.95	10.46	49.41	74.00	-24.59	peak	
4		8473.000	40.98	12.92	53.90	74.00	-20.10	peak	
5		8473.000	26.38	12.92	39.30	54.00	-14.70	AVG	
6		9920.000	37.46	14.94	52.40	74.00	-21.60	peak	
7		9920.000	23.85	14.94	38.79	54.00	-15.21	AVG	
8		11410.500	39.23	17.48	56.71	74.00	-17.29	peak	
9	*	11410.500	24.96	17.48	42.44	54.00	-11.56	AVG	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

### 13 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

#### 13.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 13.2 BLOCK DIAGRAM OF TEST SETUP

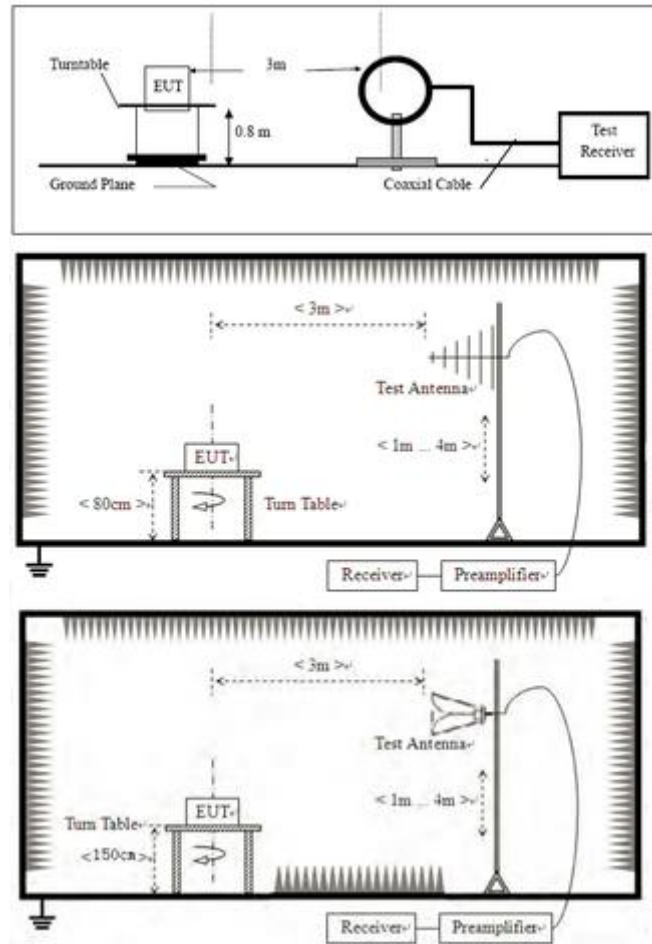

### 13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.



- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1:  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

### 13.4 TEST DATA

[TestMode: TX BLE1M low channel]; [Polarity: Horizontal]

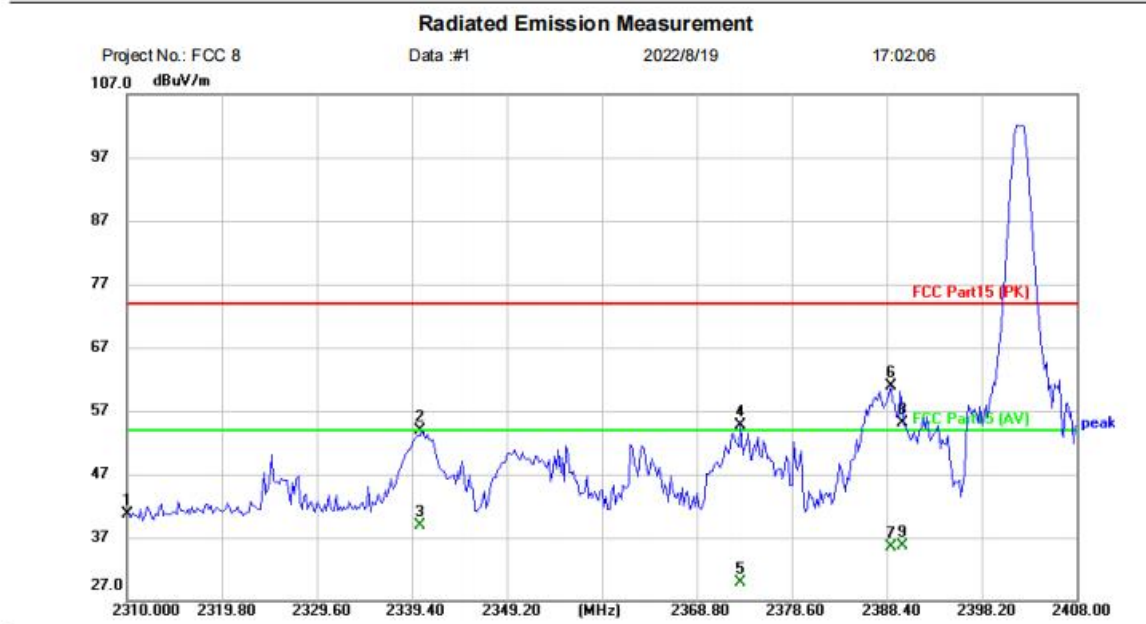

Site: Polarization: **Horizontal** Temperature: (C)  
 Limit: FCC Part15 (PK) Power: Humidity: %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 1M TX-L  
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.68	-3.02	40.66	74.00	-33.34	peak	
2		2340.380	56.65	-2.82	53.83	74.00	-20.17	peak	
3		2340.380	41.63	-2.82	38.81	54.00	-15.19	AVG	
4		2373.308	57.34	-2.60	54.74	74.00	-19.26	peak	
5		2373.308	32.60	-2.60	30.00	54.00	-24.00	AVG	
6	*	2388.792	63.35	-2.51	60.84	74.00	-13.16	peak	
7		2388.792	38.04	-2.51	35.53	54.00	-18.47	AVG	
8		2390.000	57.54	-2.50	55.04	74.00	-18.96	peak	
9		2390.000	38.13	-2.50	35.63	54.00	-18.37	AVG	

\*:Maximum data x:Over limit !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX BLE1M low channel]; [Polarity: Vertical]

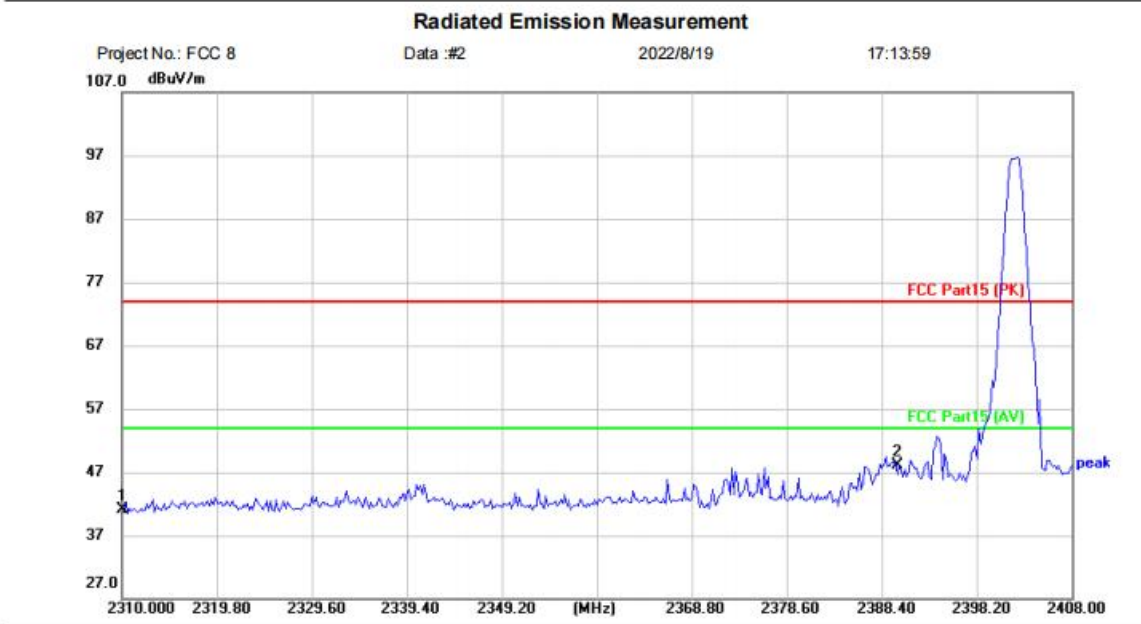


Site	Polarization: <b>Vertical</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: TLSR9218 Development Board		
M/N: TLSR9218MD48D		
Mode: BLE 1M TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	44.08	-3.02	41.06	74.00	-32.94	peak	
2	*	2390.000	50.52	-2.50	48.02	74.00	-25.98	peak	

\*:Maximum data    x:Over limit    l:over margin      (Reference Only)

**Test Result: Pass**

[TestMode: TX BLE1M high channel]; [Polarity: Horizontal]

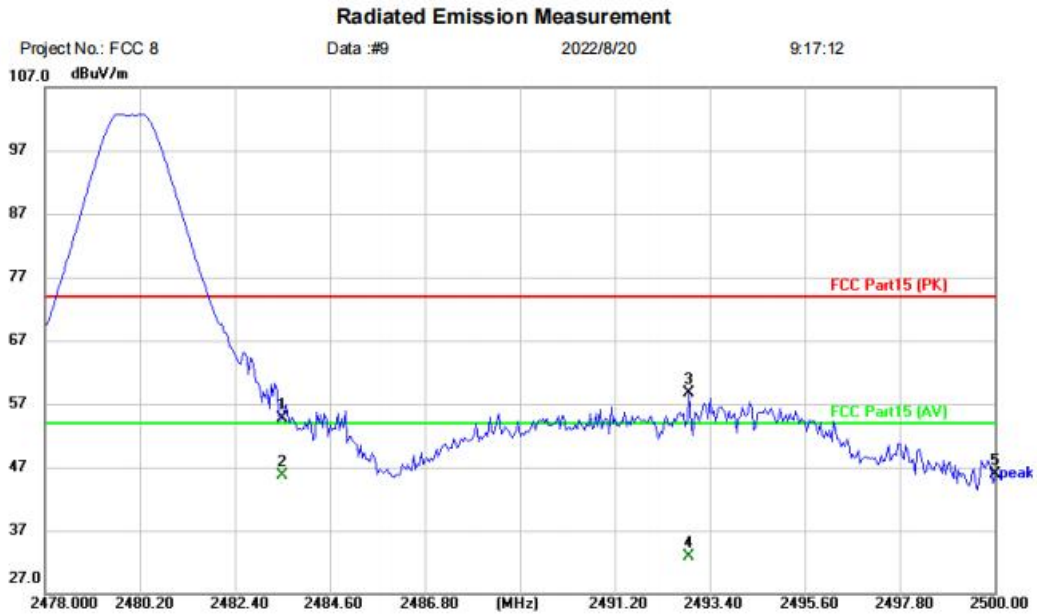

Site: \_\_\_\_\_ Polarization: **Horizontal** Temperature: \_\_\_\_\_ (C)  
 Limit: FCC Part15 (PK) Power: \_\_\_\_\_ Humidity: \_\_\_\_\_ %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 1M TX-H  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	57.16	-2.52	54.64	74.00	-19.36	peak	
2	*	2483.500	48.19	-2.52	45.67	54.00	-8.33	AVG	
3		2492.916	61.24	-2.54	58.70	74.00	-15.30	peak	
4		2492.916	35.54	-2.54	33.00	54.00	-21.00	AVG	
5		2500.000	48.50	-2.55	45.95	74.00	-28.05	peak	


\*:Maximum data    x:Over limit    l:over margin

(Reference Only)

**Test Result: Pass**



[TestMode: TX BLE2M low channel]; [Polarity: Horizontal]

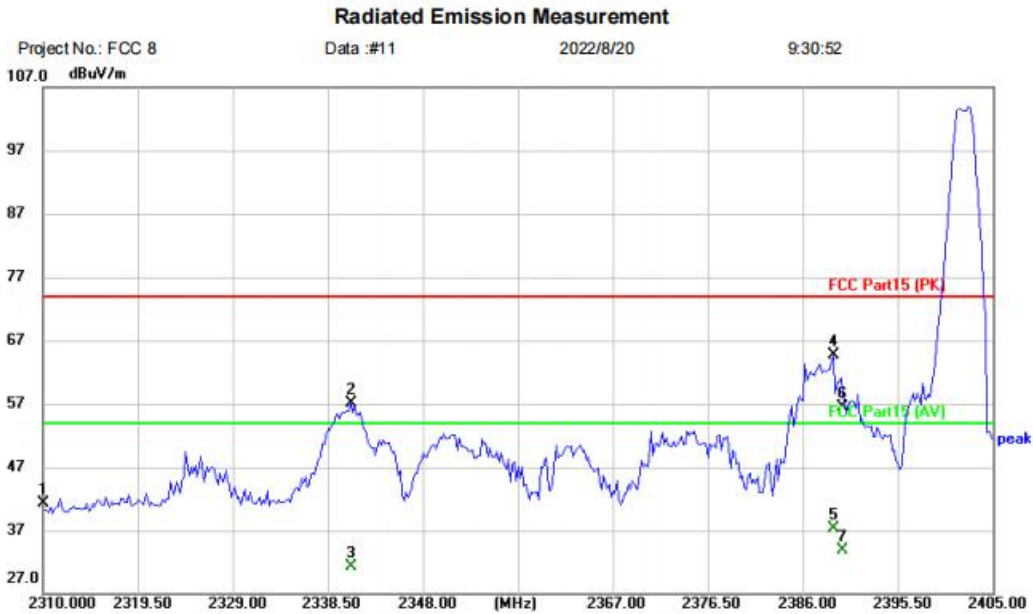

Site      Polarization: **Horizontal**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 2M TX-L  
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	44.35	-3.02	41.33	74.00	-32.67	peak	
2		2340.780	60.02	-2.82	57.20	74.00	-16.80	peak	
3		2340.780	34.08	-2.82	31.26	54.00	-22.74	AVG	
4	*	2389.040	67.15	-2.51	64.64	74.00	-9.36	peak	
5		2389.040	39.80	-2.51	37.29	54.00	-16.71	AVG	
6		2390.000	58.96	-2.50	56.46	74.00	-17.54	peak	
7		2390.000	36.33	-2.50	33.83	54.00	-20.17	AVG	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX BLE2M low channel]; [Polarity: Vertical]

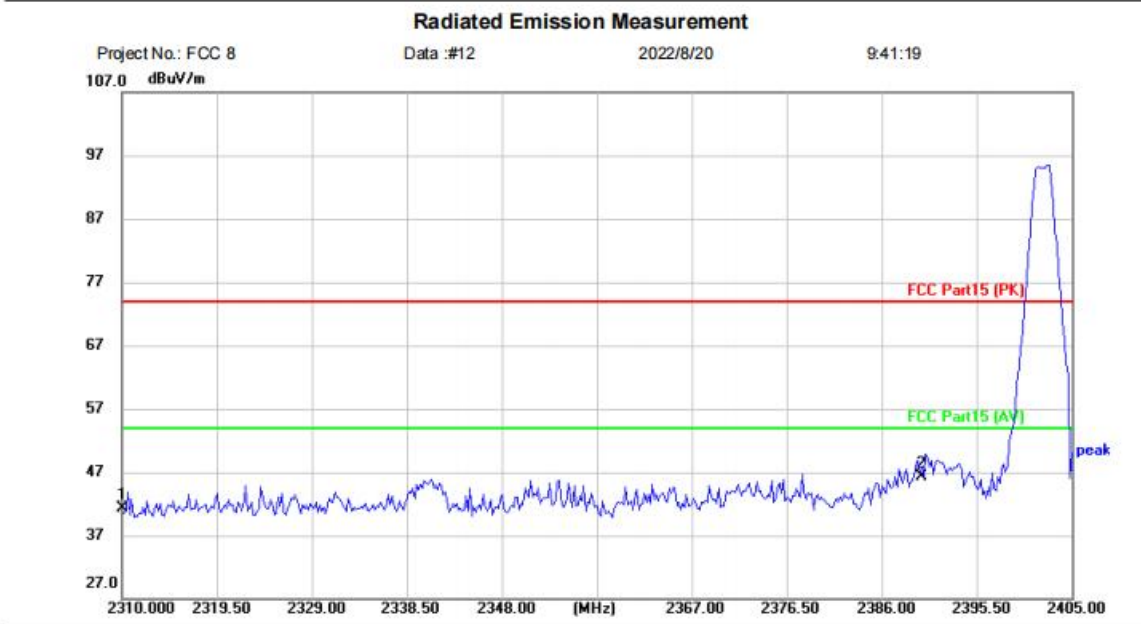


Site:      Polarization: **Vertical**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 2M TX-L  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	44.26	-3.02	41.24	74.00	-32.76	peak	
2	*	2390.000	48.83	-2.50	46.33	74.00	-27.67	peak	

\*:Maximum data    x:Over limit    l:over margin      (Reference Only)

**Test Result: Pass**

[TestMode: TX BLE2M high channel]; [Polarity: Horizontal]

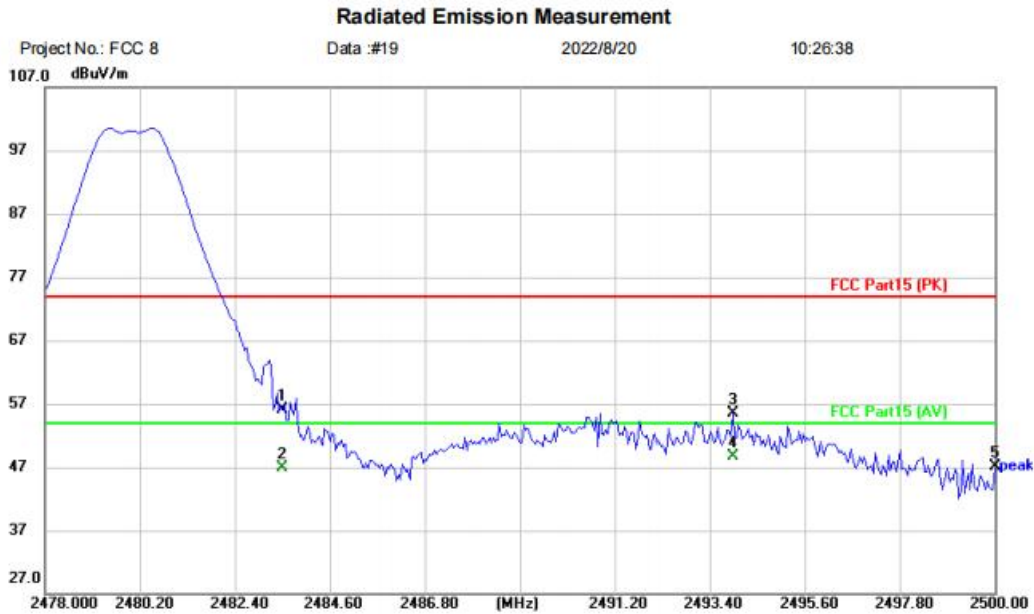

Site: \_\_\_\_\_      Polarization: **Horizontal**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power: \_\_\_\_\_      Humidity: %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 2M TX-H  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	58.64	-2.52	56.12	74.00	-17.88	peak	
2		2483.500	49.42	-2.52	46.90	54.00	-7.10	AVG	
3		2493.928	58.01	-2.54	55.47	74.00	-18.53	peak	
4	*	2493.928	51.28	-2.54	48.74	54.00	-5.26	AVG	
5		2500.000	49.73	-2.55	47.18	74.00	-26.82	peak	


\*:Maximum data    x:Over limit    l:over margin

(Reference Only)

**Test Result: Pass**



[TestMode: TX BLE2M high channel]; [Polarity: Vertical]

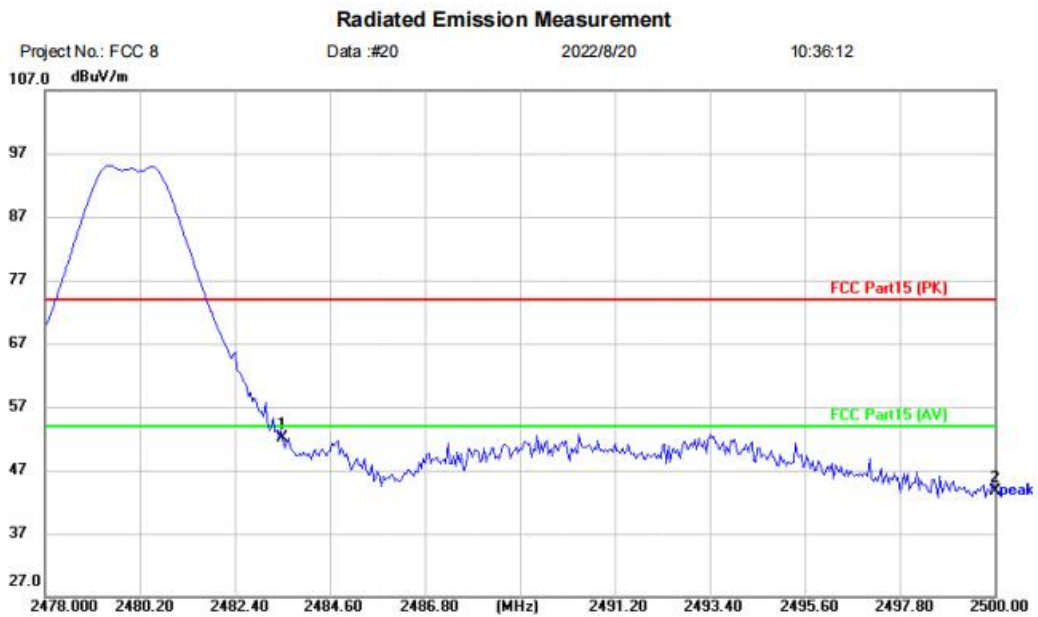

Site:      Polarization: **Vertical**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: TLSR9218 Development Board  
 M/N: TLSR9218MD48D  
 Mode: BLE 2M TX-H  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	54.55	-2.52	52.03	74.00	-21.97	peak	
2		2500.000	46.22	-2.55	43.67	74.00	-30.33	peak	

\*:Maximum data    x:Over limit    l:over margin

(Reference Only)

**Test Result: Pass**


## 14 CONDUCTED SPURIOUS EMISSIONS

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 14.1 LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

### 14.2 BLOCK DIAGRAM OF TEST SETUP

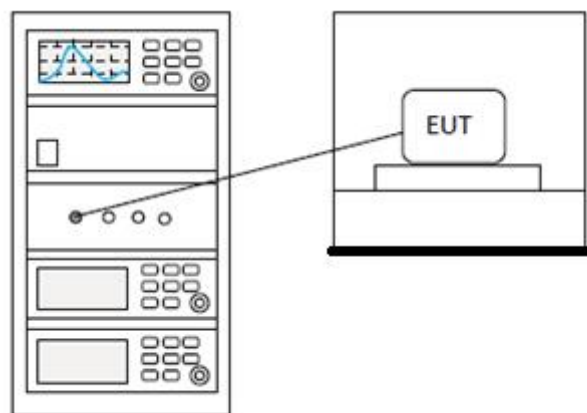

### 14.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


## 15 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	
Tester	Jozu
Temperature	25°C
Humidity	60%

### 15.1 LIMITS

**Limit:**  $\leq 8\text{dBm}$  in any 3 kHz band during any time interval of continuous transmission

### 15.2 BLOCK DIAGRAM OF TEST SETUP

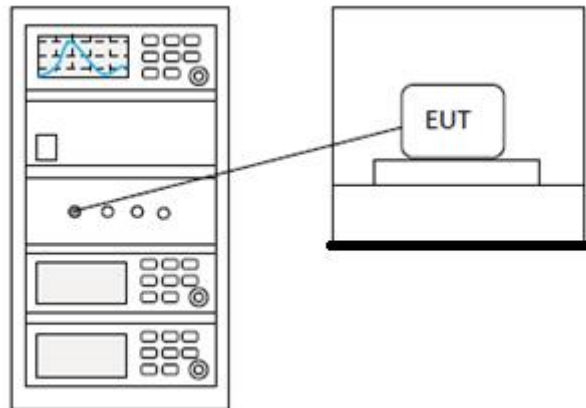

### 15.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**