

FCC TEST REPORT

Product : Tour Guide System
Trade mark : QUIETVOX
Model/Type reference : QV-7T Series
Serial Number : N/A
Ratings : DC 3V
FCC ID : OFHQV-7T-TX
Report Number : EESZE06210019-2
Date : Jul. 20, 2012
Regulations : See below

Test Standards	Results
<input checked="" type="checkbox"/> 47 CFR FCC Part 15 Subpart C 15.249: 2011	PASS

Prepared for
QUIETVOX AG
 Sagereistrasse 20 CH-8152 Glattbrugg Switzerland

Prepared by
Centre Testing International
 Hongwei Industrial Zone, Bao'an 70 District,
 Shenzhen, Guangdong, China
 TEL: +86-755-3368 3919
 FAX: +86-755-3368 3385

Tested by: 
 Approved by: 
 Jimmy Li
 Lab manager

Reviewed by: 
 Date: Jul. 20, 2012


TABLE OF CONTENTS

1. GENERAL INFORMATION	3
2. TEST SUMMARY	3
3. MEASUREMENT UNCERTAINTY	3
4. TEST EQUIPMENT LIST	4
5. SUPPORT EQUIPMENT LIST	4
6. PRODUCT INFORMATION	4
7. 20DB BANDWIDTH MEASUREMENT	5
7.1 LIMITS	5
7.2 BLOCK DIAGRAM OF TEST SETUP	5
7.3 TEST PROCEDURE	5
7.4 TEST RESULT	5
9. RADIATED EMISSIONS MEASUREMENT	8
9.1 LIMITS	8
9.2 BLOCK DIAGRAM OF TEST SETUP	8
9.4 TEST RESULT	10
10. BAND EDGE EMISSION MEASUREMENT	20
10.1 LIMITS	20
10.2 BLOCK DIAGRAM OF TEST SETUP	20
10.3 TEST PROCEDURE	20
10.4 TEST RESULT	20
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	22
APPENDIX 2 PHOTOGRAPHS OF EUT	23

(Note: N/A means not applicable)

1. GENERAL INFORMATION

Applicant: QUIETVOX AG
 Sagereistrasse 20 CH-8152 Glattbrugg Switzerland

Manufacturer: QUIITVOX
 Suite 2116, Block C, Huang Du plaza 3008, Yitian Road, Fu Tian District, Shenzhen

Equipment Authorization: FCC Part 15 Certification

FCC ID: OFHQV-7T-TX

Product: Tour Guide System

Trade mark: QUIETVOX

Model/Type reference: QV-7T Series

Serial Number: N/A

Report Number: EESZE06210019-2

Date of Test: Jun. 25, 2012 to Jul. 20, 2012

The above equipment was tested by Centre Testing International for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart C and the measurement procedure according to ANSI C63.4:2003.

2. TEST SUMMARY

The complete list of measurements is given below:

No.	Test Item	Rule	Result
1	20dB Bandwidth	FCC 15.215(c)	PASS
2	Radiated Emission	FCC 15.209 FCC 15.249(a) (d)	PASS
3	Out of Band Emission	FCC 15.249 (d)	PASS
4	Antenna Requirements *	FCC 15.203	PASS

*: According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The EUT has a built in antenna which is a short wire solder on the PCB, this is permanently attached antenna and meets the requirements of this section.

3. MEASUREMENT UNCERTAINTY

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement items	Uncertainty
Radiated Emissions	4.5 dB

4. TEST EQUIPMENT LIST

Equipment	Manufacturer	Model Number	Serial Number	Due Date
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	07/09/2013
Spectrum Analyzer	Agilent	E4440A	MY46185649	03/07/2013
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	401	07/06/2013
Multi device Controller	ETS-LINGREN	2090	00057230	N/A
Horn Antenna	ETS-LINGREN	3117	00057407	07/06/2013
Microwave Preamplifier	Agilent	8449B	3008A02425	03/29/2013
Loop Antenna	ETS-LINDGERN	6502	71730	07/06/2013

5. SUPPORT EQUIPMENT LIST

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
----	----	----	----	----	----	----

6. PRODUCT INFORMATION


Operating frequency	925.025MHz – 926.975MHz
Type of Modulation (ITU designation)	50KF3E
Channel separation	50kHz
Number of channels	40
Frequency stability	5ppm
Antenna type and length	Tx Micro strip integrated antenna, 1/4 Wave, Unity Gain.
FM Deviation (Normal)	2.5kHz
FM Deviation (Maximum)	5.0kHz
Microphone (Internal and External)	Electret Condenser Microphone, Impedance: <2.2kΩ Sensitivity: -55dB ± 3dB
Transmitter control	Up down directional on/off switch and Voice operated
Duty Cycle - Class	Continuous transmission possible
Power supply	Tx : 2 x AAA battery (1.5V Each)

7. 20DB BANDWIDTH MEASUREMENT

7.1 LIMITS

None

7.2 BLOCK DIAGRAM OF TEST SETUP

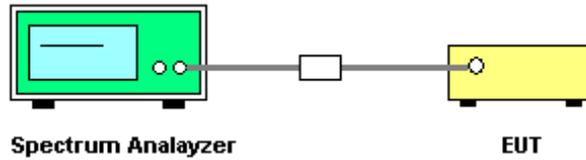


7.3 TEST PROCEDURE


1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
3. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level.
4. The 20dB bandwidth was determined from where the channel output spectrum intersected the display line.

7.4 TEST RESULT


Channel	Frequency (MHz)	20 dB BW (kHz)	Result (kHz)
Low	925.025	270	270
Middle	925.975	263	
High	926.975	263	

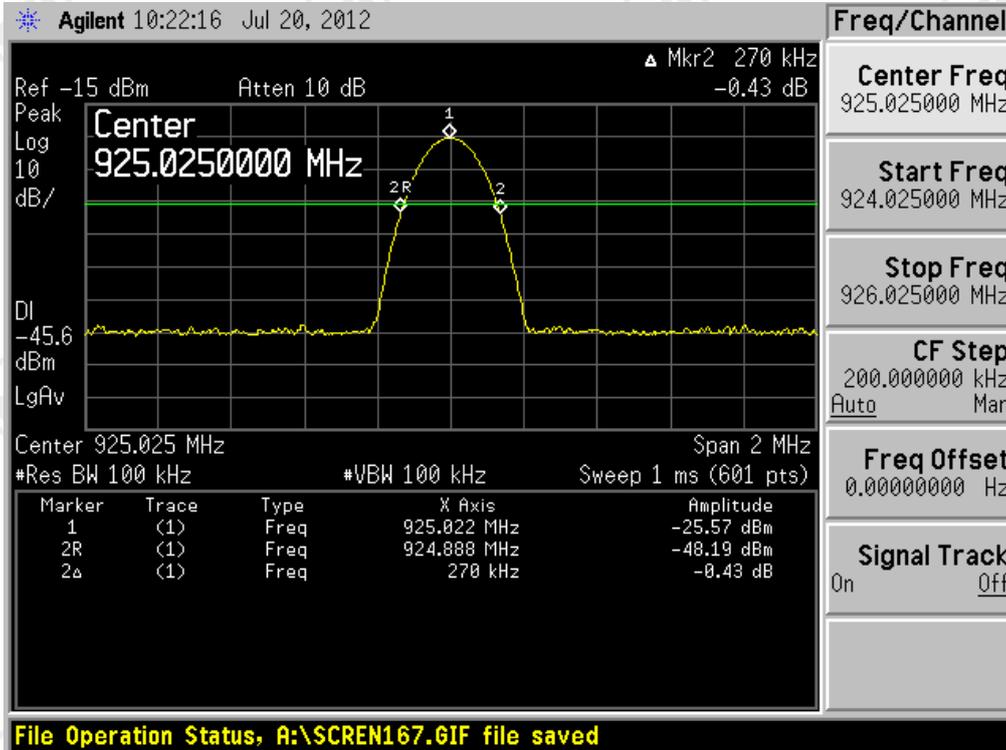

Channel low

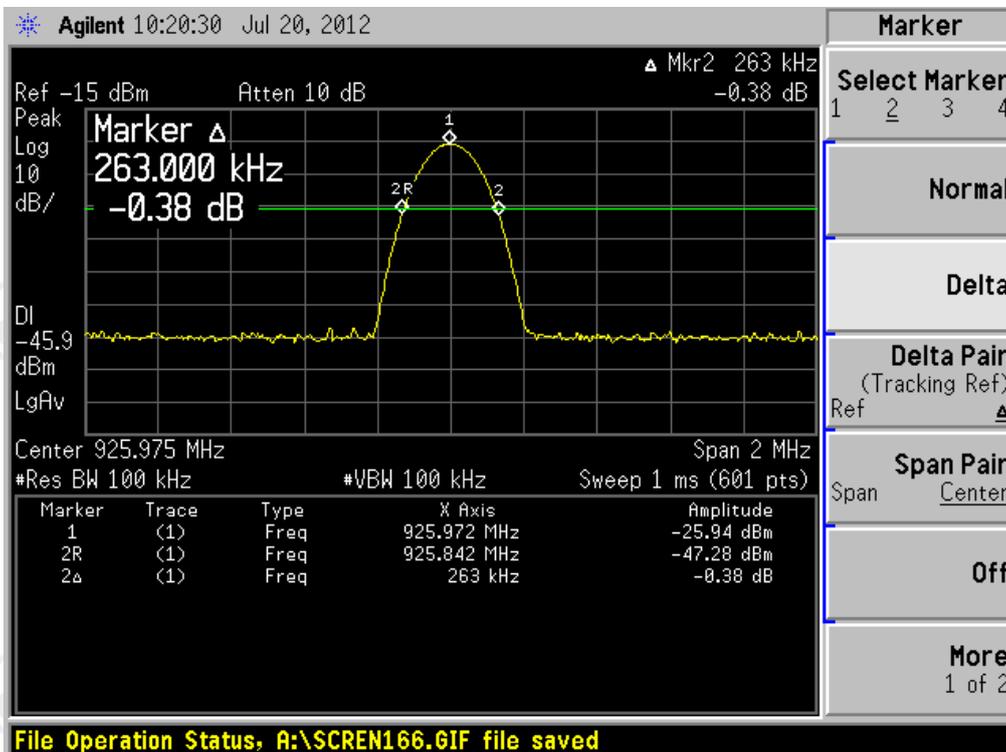

Channel middle

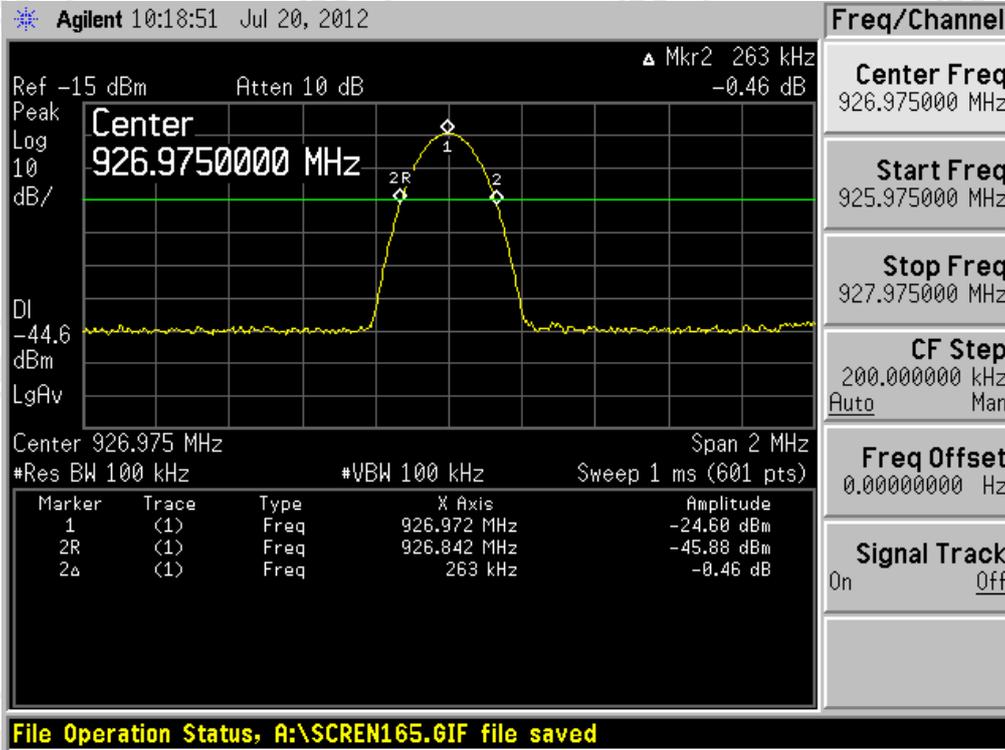

Channel high

9. RADIATED EMISSIONS MEASUREMENT

9.1 LIMITS

(1) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/ meter)	Field strength of harmonics (microvolts/ meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500


(2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209 as the following , whichever is the lesser attenuation.

Frequency (MHz)	Field strength (mV/m)	Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Note: the tighter limit applies at the band edges.

9.2 BLOCK DIAGRAM OF TEST SETUP


For radiated emissions from 9kHz to 30MHz

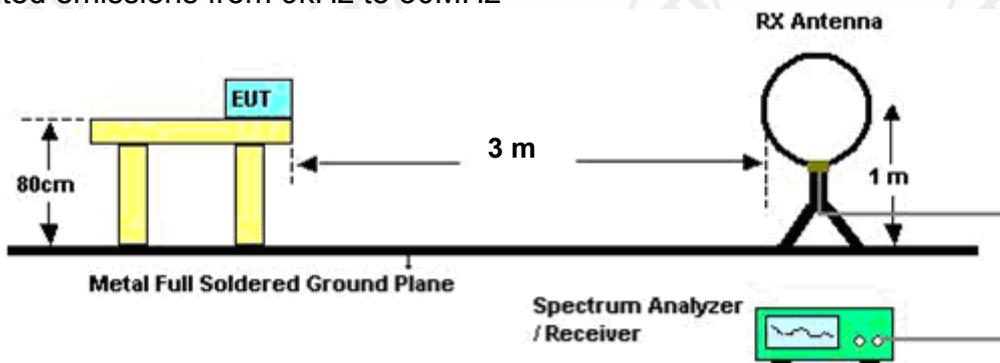

For radiated emissions from 30 - 1000MHz

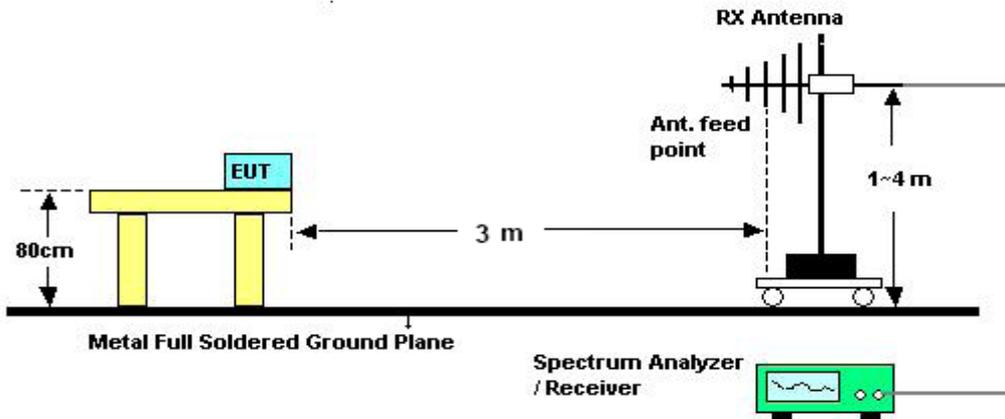

For radiated emissions from 1GHz to 25GHz

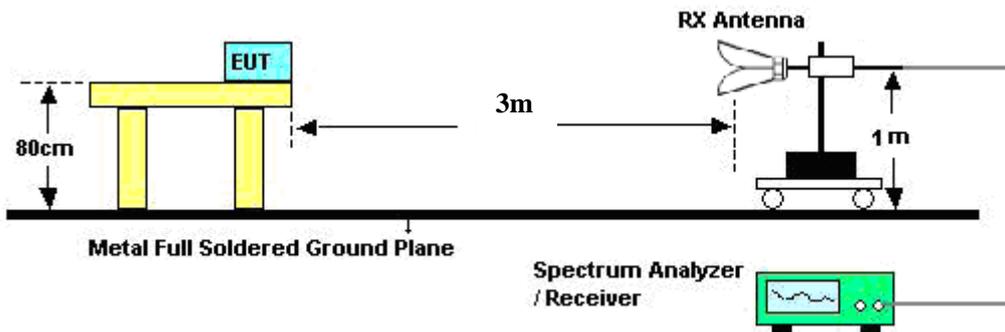

9.3 TEST PROCEDURE

Below 30MHz

- The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 1 meter away from the antenna (loop antenna). The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- For each suspected emission, the EUT was arranged to its worst case and then turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test frequency analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

30MHz ~ 1GHz:

- The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.

c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Above 1GHz:

a. The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.

b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.

c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

9.4 TEST RESULT

Note: Limit dB μ V/m @3m = Limit dB μ V/m @300m+ 80

Limit dB μ V/m @3m = Limit dB μ V/m @30m + 40

A. Below 30MHz:

The test data below 30MHz are very low, so they are not recorded.


B. 30MHz ~ 1GHz:

Test Results-(Measurement Distance: 3m)_Channel low							
Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)	(H/V)	(P/F)
925.025*	89.38	---	---	114	94	H	P
925.025*	92.69	---	---	114	94	V	P
Test Results-(Measurement Distance: 3m)_Channel middle							
Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)	(H/V)	(P/F)
925.975*	89.13	---	---	114	94	H	P
925.975*	92.78	---	---	114	94	V	P
Test Results-(Measurement Distance: 3m)_Channel high							
Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)	(H/V)	(P/F)
926.975*	90.12	---	---	114	94	H	P
926.975*	92.88	---	---	114	94	V	P

*: fundamental frequency

Operated frequency: 925.025MHz


H:

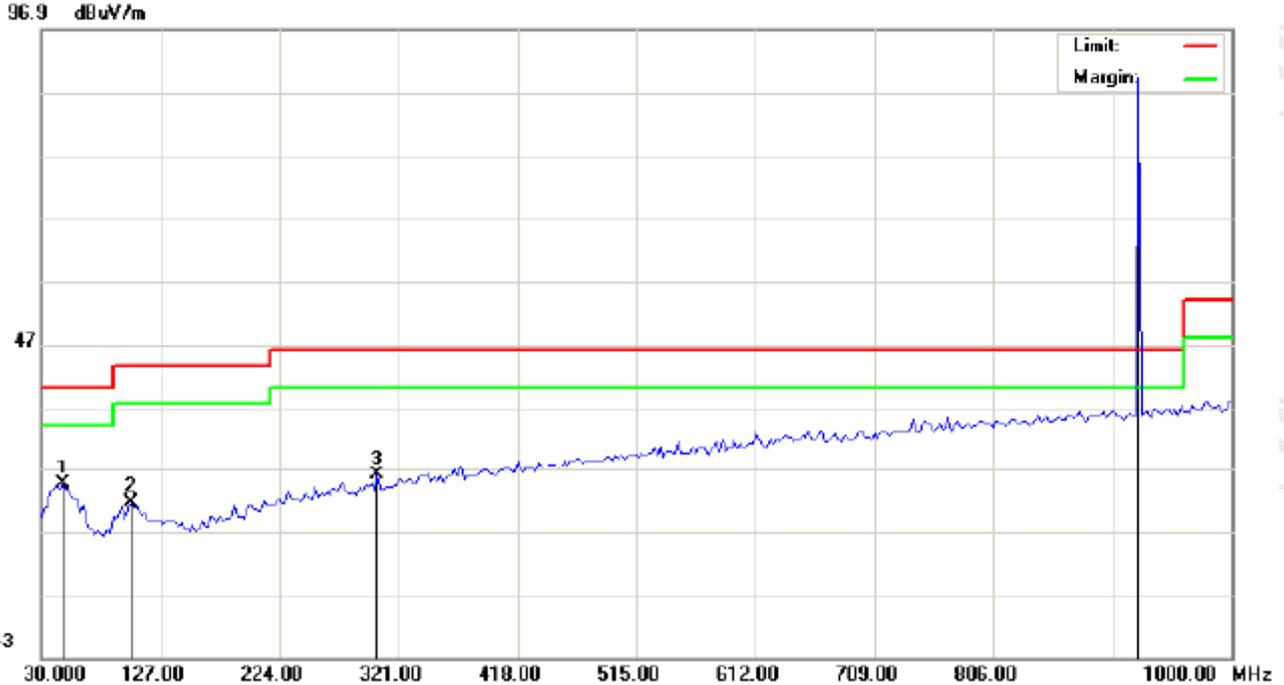

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	46.9750	8.00			16.63	24.63			40.00		-15.37		P	
2	102.7500	8.85			12.80	21.65			43.50		-21.85		P	
3	304.0250	9.67			16.34	26.01			46.00		-19.99		P	

V:


106.0 dBuV/m

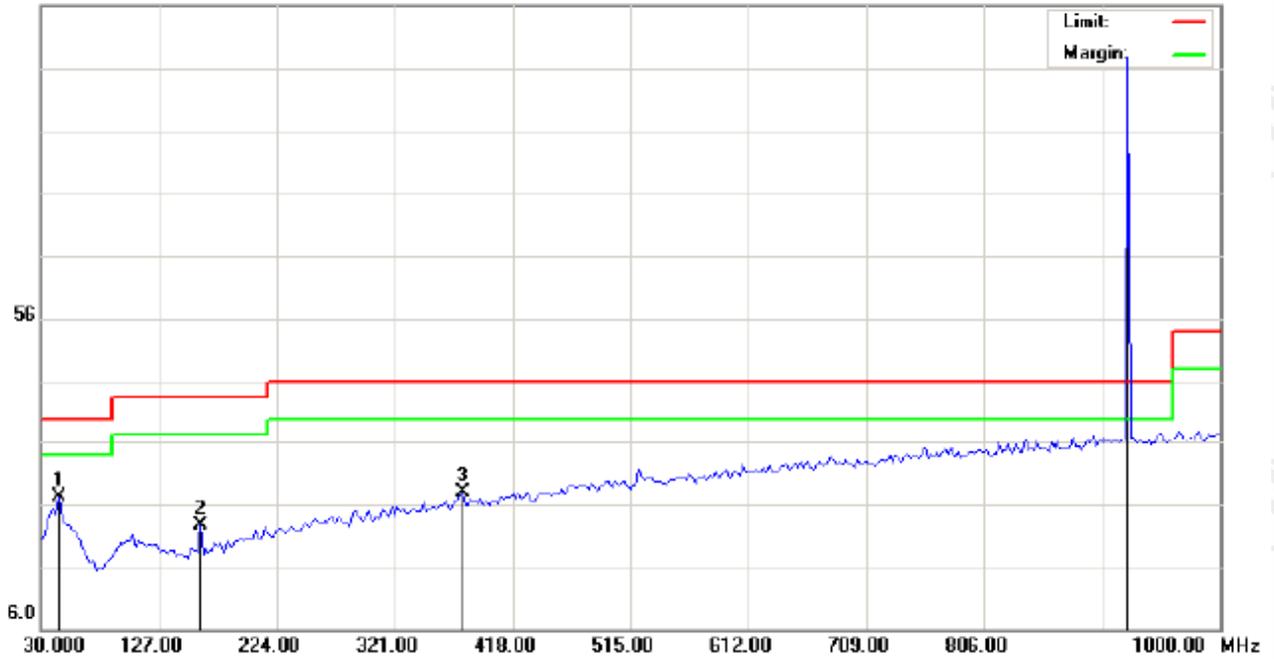

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	44.5500	10.21			16.86	27.07			40.00		-12.93		P	
2	160.9500	11.94			10.61	22.55			43.50		-20.95		P	
3	376.7750	9.55			18.31	27.86			46.00		-18.14		P	

Operated frequency: 925.975MHz


H:

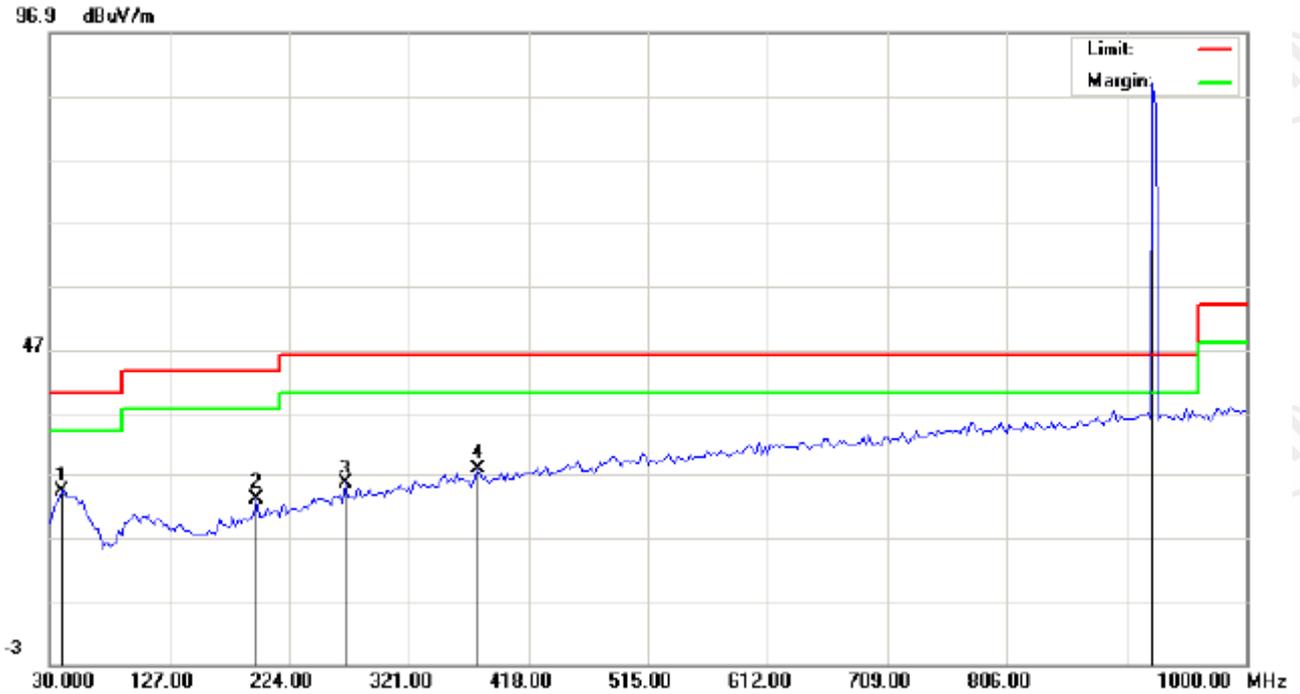

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	39.7000	7.19			17.12	24.31			40.00			-15.69		P
2	197.3250	10.36			12.59	22.95			43.50			-20.55		P
3	270.0750	10.11			15.48	25.59			46.00			-20.41		P
4	376.7750	9.82			18.31	28.13			46.00			-17.87		P

V:


106.0 dBuV/m

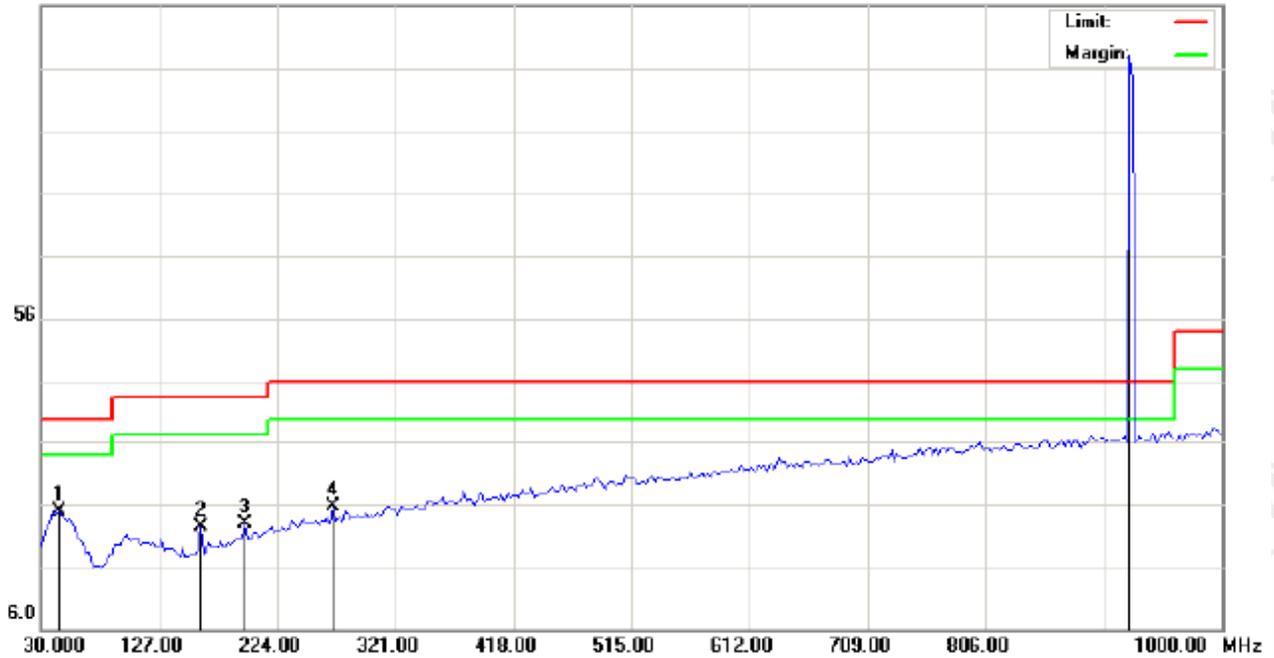

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	44.5500	8.08			16.86	24.94			40.00		-15.06		P	
2	160.9500	11.78			10.61	22.39			43.50		-21.11		P	
3	197.3250	10.36			12.59	22.95			43.50		-20.55		P	
4	270.0750	10.11			15.48	25.59			46.00		-20.41		P	

Operated frequency: 926.975MHz


H:

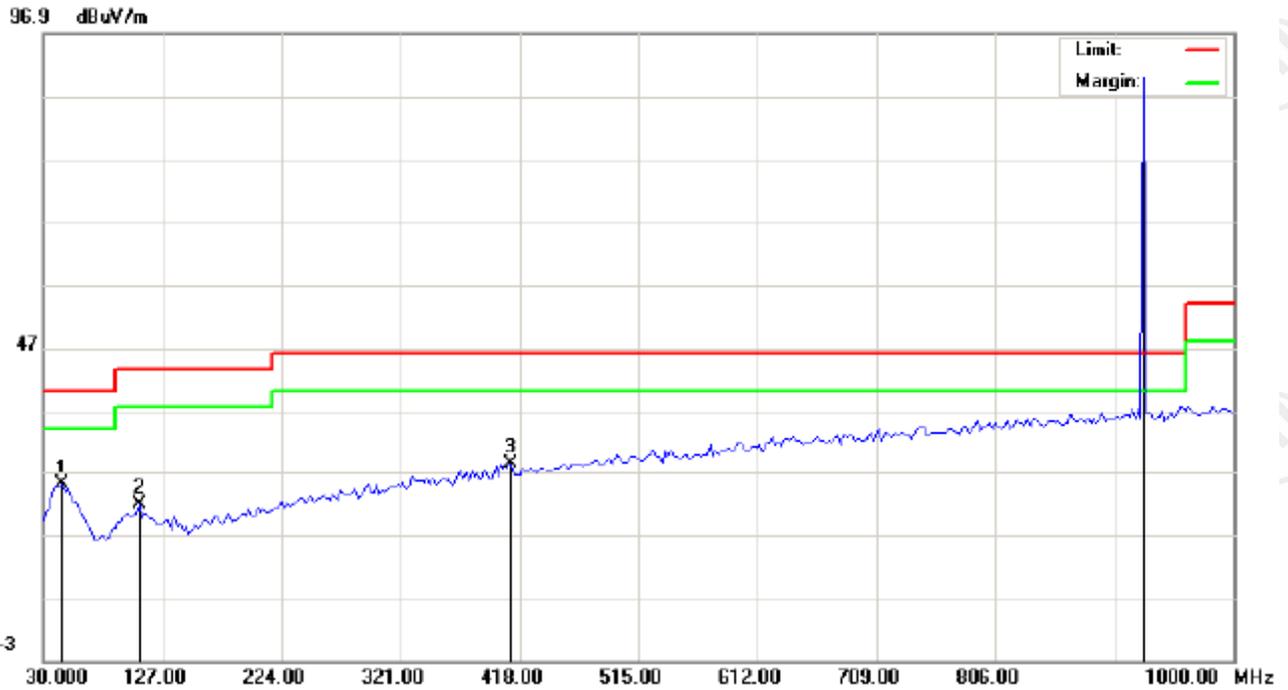

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	44.5500	8.07			16.86	24.93			40.00			-15.07		P
2	107.6000	9.19			12.51	21.70			43.50			-21.80		P
3	410.7250	9.60			19.01	28.61			46.00			-17.39		P

V:

106.0 dBuV/m

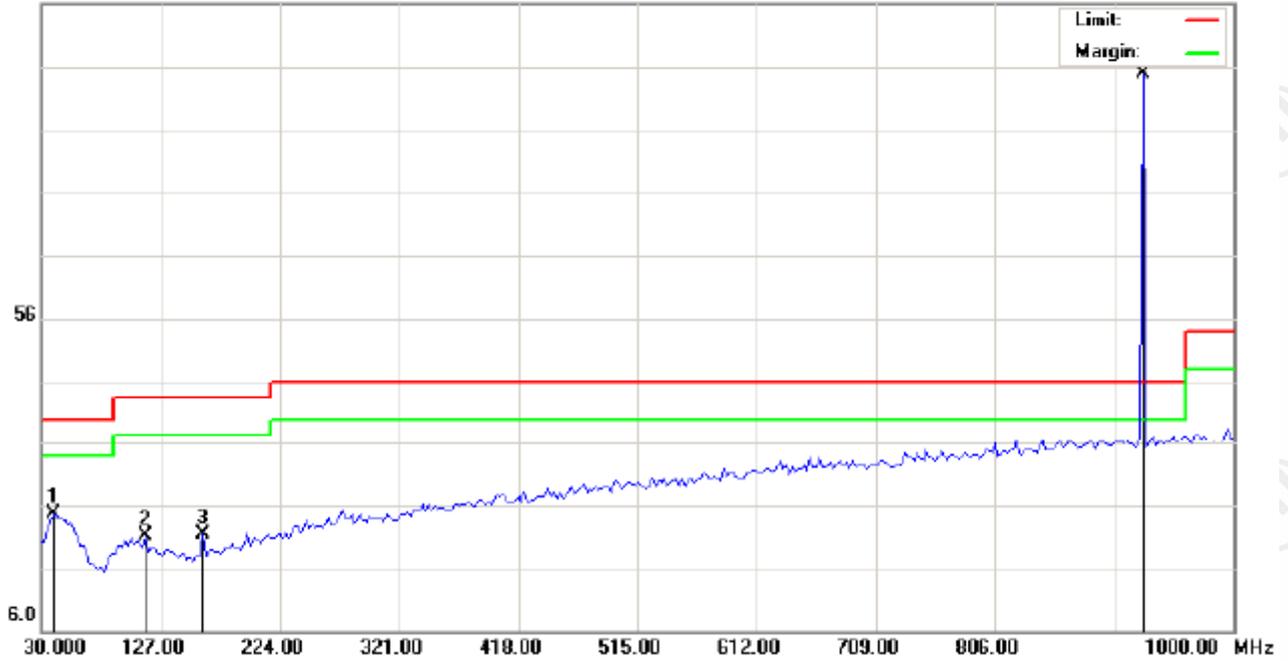

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	39.7000	7.45			17.12	24.57			40.00		-15.43		P	
2	114.8750	9.00			12.08	21.08			43.50		-22.42		P	
3	160.9500	10.68			10.61	21.29			43.50		-22.21		P	

C. Above 1GHz:

Test Results-(Measurement Distance: 3m)_Channel low							
Frequency (MHz)	Measurement value			Limit		Antenna (H/V)	Result (P/F)
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)		
1850.050	52.39	---	---	74	54	H	P
2775.075	46.38	---	---	74	54	H	P
3700.100	41.31	---	---	74	54	H	P
4625.125	30.95	---	---	74	54	H	P
5550.150	25.23	---	---	74	54	H	P
1850.050	51.02	---	---	74	54	V	P
2775.075	43.20	---	---	74	54	V	P
3700.100	42.36	---	---	74	54	V	P
4625.125	28.12	---	---	74	54	V	P
5550.150	20.12	---	---	74	54	V	P

Test Results-(Measurement Distance: 3m)_Channel middle							
Frequency (MHz)	Measurement value			Limit		Antenna (H/V)	Result (P/F)
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)		
1851.950	42.37	---	---	74	54	H	P
2777.925	40.86	---	---	74	54	H	P
3703.900	31.57	---	---	74	54	H	P
4629.875	32.06	---	---	74	54	H	P
5555.850	26.32	---	---	74	54	H	P
1851.950	40.32	---	---	74	54	V	P
2777.925	35.23	---	---	74	54	V	P
3703.900	25.63	---	---	74	54	V	P
4629.875	22.23	---	---	74	54	V	P
5555.850	18.02	---	---	74	54	V	P

Test Results-(Measurement Distance: 3m)_Channel high							
Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)	(H/V)	(P/F)
1853.950	48.10	---	---	74	54	H	P
2780.925	46.07	---	---	74	54	H	P
3707.900	36.54	---	---	74	54	H	P
4634.875	36.22	---	---	74	54	H	P
5561.850	26.23	---	---	74	54	H	P
1853.950	45.26	---	---	74	54	V	P
2780.925	40.12	---	---	74	54	V	P
3707.900	30.21	---	---	74	54	V	P
4634.875	25.23	---	---	74	54	V	P
5561.850	19.36	---	---	74	54	V	P

Remark:


According to the emissions below 10GHz, the data curve for other emissions are lower than the limit, and they are not recorded in the report.

10. BAND EDGE EMISSION MEASUREMENT

10.1 LIMITS

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

10.2 BLOCK DIAGRAM OF TEST SETUP

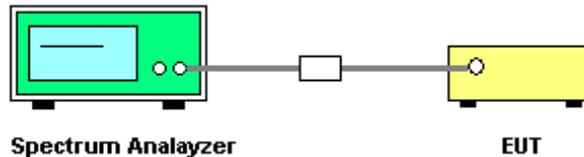


10.3 TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
3. Record the emission drops at the band-edge relative to the highest fundamental emission level.
4. Use the marker-delta method to determine band-edge compliance as required.


10.4 TEST RESULT

Worst case-- Modulation Type: GFSK

Channel Frequency (MHz)	Fundamental Emission (dB μ V/m)	Delta (dB)	Final Emission (dB μ V/m)	Limit (dB μ V/m)		Result (Pass / Fail)
	PK		PK	PK	AV	
925.025	92.69	---	---	---	---	---
902.000	---	61.37	31.32	74	54	Pass
909.210	---	50.16	42.53	74	54	Pass
926.975	92.88	---	---	---	---	---
927.572	---	56.98	35.90	74	54	Pass
928.000	---	56.10	36.78	74	54	Pass

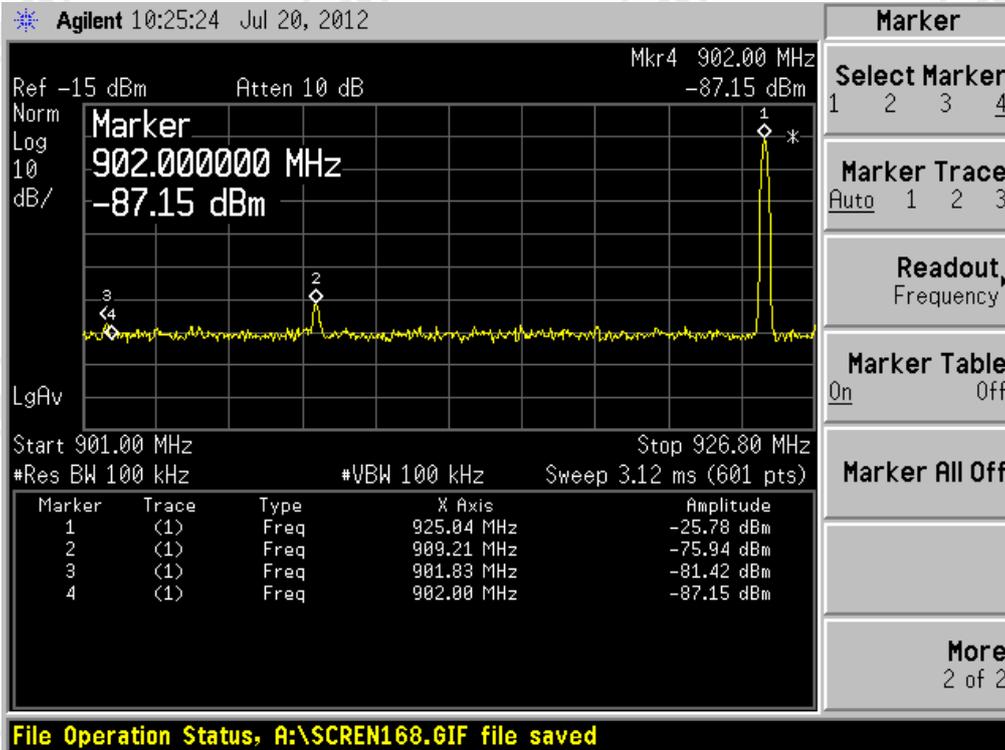

925.025MHz

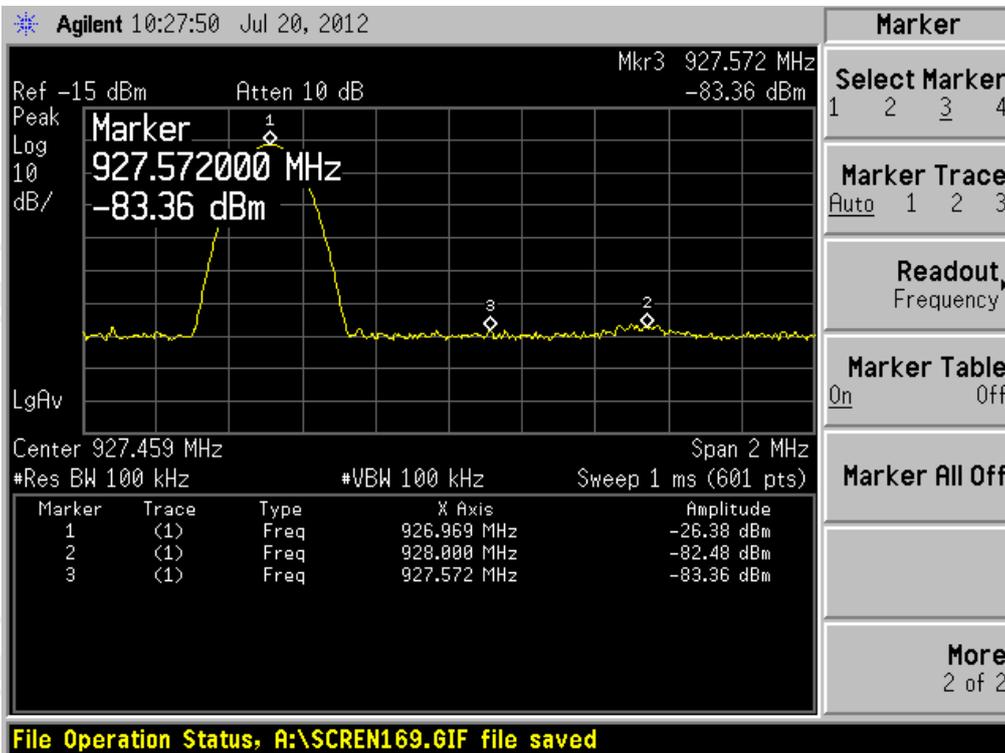

926.975MHz

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP



TEST SETUP OF RADIATED EMISSION (30MHz~1GHz)



TEST SETUP OF RADIATED EMISSION (Above 1GHz)


APPENDIX 2 PHOTOGRAPHS OF EUT




View of external EUT-1




View of external EUT-2

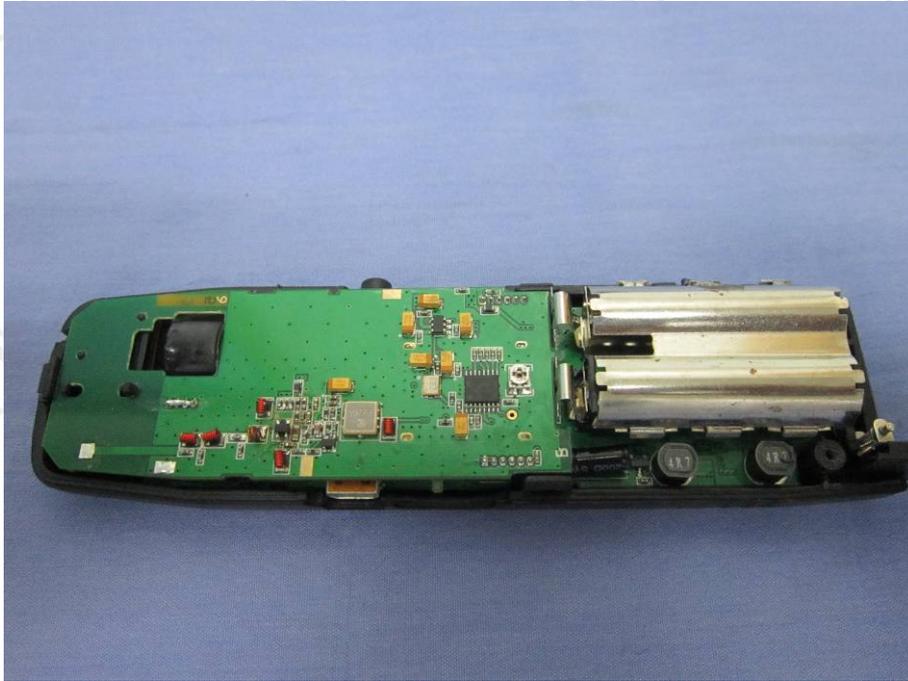

View of internal EUT-1

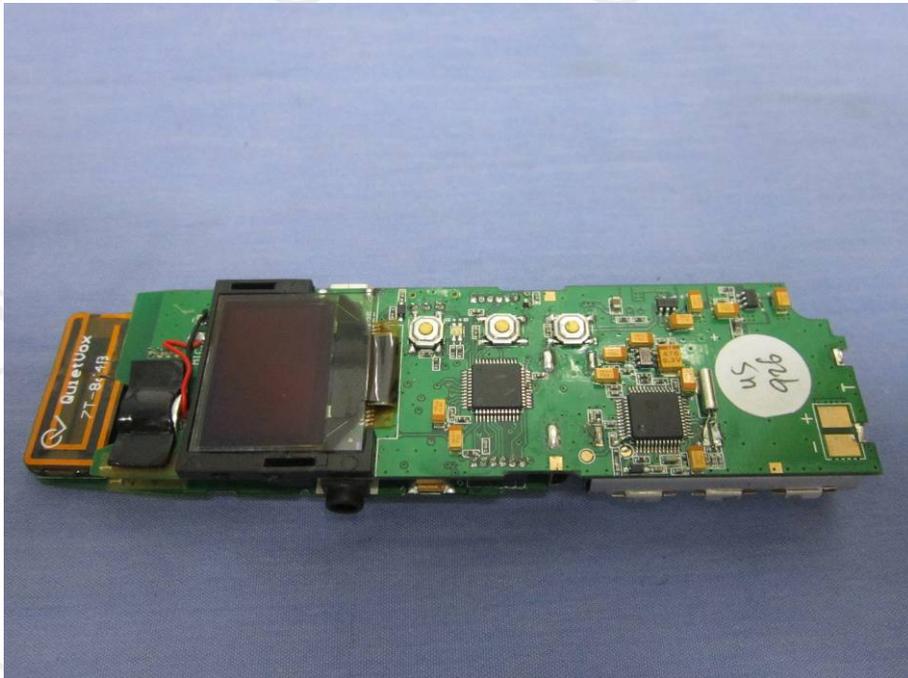

View of internal EUT-2

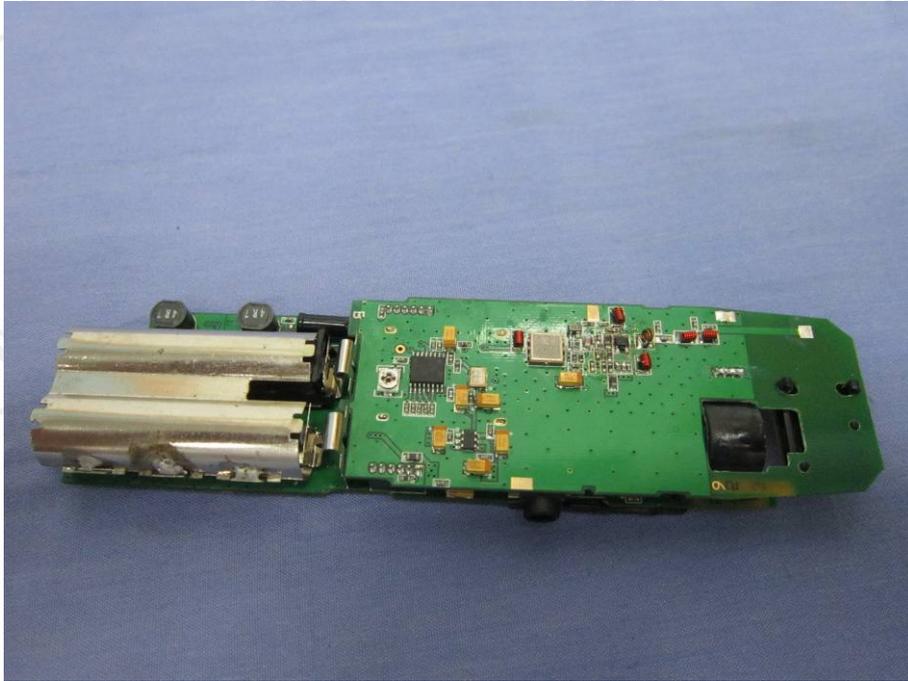

View of internal EUT-3

*** End of report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.