

FCC PART 15 SUBPART B
MEASUREMENT AND TEST REPORT
For
SOUNDWORKS, INC

Product description: The Ultra Portable Wireless Bluetooth Speaker
Model No.: Oontz
Supplementary Model: N/A
FCC ID: OFIOONTZ

Prepared for: SoundWorks, Inc

2995 Woodside Road Suite 400 Woodside Ca. 94062

Prepared by: Bontek Compliance Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road,
Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028

Report No.: BCT12FR-0893E-2
Issue Date: June 29, 2012
Test Date: June 26 ~29, 2012

Test by: **Reviewed By:**

Nie Quan

Nie Quan

kevin chi

Kevin Chi

TABLE OF CONTENTS

| | |
|---|-----------|
| 1 - GENERAL INFORMATION | 3 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 3 |
| 1.2 TEST STANDARDS | 3 |
| 1.3 TEST SUMMARY | 4 |
| 1.4 TEST METHODOLOGY | 4 |
| 1.5 TEST FACILITY | 5 |
| 1.6 TEST EQUIPMENT LIST AND DETAILS | 6 |
| 2 - SYSTEM TEST CONFIGURATION | 8 |
| 2.1 JUSTIFICATION | 8 |
| 2.2 EUT EXERCISE SOFTWARE | 8 |
| 2.3 SPECIAL ACCESSORIES | 8 |
| 2.4 EQUIPMENT MODIFICATIONS | 8 |
| 2.5 CONFIGURATION OF TEST SYSTEM | 8 |
| 2.6 TEST SETUP DIAGRAM | 8 |
| 3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS | 9 |
| 3.1 MEASUREMENT UNCERTAINTY | 9 |
| 3.2 LIMIT OF DISTURBANCE VOLTAGE AT THE MAINS TERMINALS | 9 |
| 3.3 EUT SETUP | 9 |
| 3.4 INSTRUMENT SETUP | 10 |
| 3.5 TEST PROCEDURE | 10 |
| 3.6 SUMMARY OF TEST RESULTS | 10 |
| 3.7 DISTURBANCE VOLTAGE TEST DATA | 10 |
| 3.8 TEST RESULT | 10 |
| 4 - RADIATED DISTURBANCES | 13 |
| 4.1 MEASUREMENT UNCERTAINTY | 13 |
| 4.2 LIMIT OF RADIATED DISTURBANCES | 13 |
| 4.3 EUT SETUP | 13 |
| 4.4 TEST RECEIVER SETUP | 14 |
| 4.5 TEST PROCEDURE | 14 |
| 4.6 CORRECTED AMPLITUDE & MARGIN CALCULATION | 14 |
| 4.7 RADIATED EMISSIONS TEST RESULT | 14 |
| 4.8 TEST RESULT | 14 |

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **SoundWorks, Inc.**
Address of applicant: 2995 Woodside Road Suite 400 Woodside Ca. 94062
Manufacturer: **Shenzhen 3nod Electronics Co.,Ltd**
Address of manufacturer: 3NOD High-Tech Park 15# Zhongfu Road Tangxiayong Village, Industrial Zone Songgang Town, Baoan District, Shenzhen City, China

General Description of E.U.T

EUT Description: The Ultra Portable Wireless Bluetooth Speaker
Model No.: Oontz
Supplementary Model: N/A
Trade Mark: 
Rated Voltage: AC 120V60Hz for PC

1.2 Test Standards

The following Declaration of Conformity report of EUT is prepared in accordance with
FCC Rules and Regulations Part 15 Subpart B 2006

The objective of the manufacturer is to demonstrate compliance with the described above standards.

1.3 Test Summary

For the EUT described above. The standards used were FCC Part 15 Subpart B for Emissions

Table 1 : Tests Carried Out Under FCC Part 15 Subpart B

| Standard | Test Items | Status |
|-----------------------|---------------------------------------|--------|
| FCC Part 15 Subpart B | Conduction Emission, 0.15MHz to 30MHz | ✓ |
| FCC Part 15 Subpart B | Radiation Emission, 30MHz to 1000MHz | ✓ |

✓ Indicates that the test is applicable
✗ Indicates that the test is not applicable

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

The maximum emission levels emanating from the device are compared to the FCC Part 15 Subpart B limits for radiation emissions and the measurement results contained in this test report show that EUT is to be technically compliant with FCC requirements.

All measurement required was performed at Shenzhen Bontek Compliance Testing Laboratory Co., Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd , EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25,2011.

CNAS - Registration No.: L3923

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

The acceptance letter from the CNAS is maintained in our files: Registration:L3923, March 22, 2012.

TUV - Registration No.: UA 50203122-0001

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. An assessment of the laboratory was conducted according to the"Procedures and Conditions for EMC Test Laboratories"with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

1.6 Test Equipment List and Details

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd .

| No. | Equipment | Manufacturer | Model No. | S/N | Calculator date | Calculator due date |
|-----|--|-----------------|----------------------------|------------|-----------------|---------------------|
| 1 | EMI Test Receiver | R&S | ESCI | 100687 | 2012-4-6 | 2013-4-5 |
| 2 | EMI Test Receiver | R&S | ESPI | 100097 | 2011-7-25 | 2012-7-24 |
| 3 | Amplifier | HP | 8447D | 1937A02492 | 2012-4-6 | 2013-4-5 |
| 4 | Single Power Conductor Module | FCC | FCC-LISN-5-50-1-01-CISPR25 | 07101 | 2012-4-6 | 2013-4-5 |
| 5 | Single Power Conductor Module | FCC | FCC-LISN-5-50-1-01-CISPR25 | 07102 | 2012-4-6 | 2013-4-5 |
| 6 | Power Clamp | SCHWARZBECK | MDS-21 | 3812 | 2012-4-6 | 2013-4-5 |
| 7 | Positioning Controller | C&C | CC-C-1F | MF7802113 | N/A | N/A |
| 8 | Electrostatic Discharge Simulator | TESEQ | NSG437 | 125 | 2011-4-11 | 2012-4-10 |
| 9 | Fast Transient Burst Generator | SCHAFFNER | MODULA6150 | 34572 | 2012-4-6 | 2013-4-5 |
| 10 | Fast Transient Noise Simulator | Noiseken | FNS-105AX | 10501 | 2011-6-16 | 2012-6-15 |
| 11 | Color TV Pattern Generator | PHILIPS | PM5418 | TM209947 | N/A | N/A |
| 12 | Power Frequency Magnetic Field Generator | EVERFINE | EMS61000-8K | 608002 | 2012-4-6 | 2013-4-5 |
| 14 | Capacitive Coupling Clamp | TESEQ | CDN8014 | 25096 | 2012-4-6 | 2013-4-5 |
| 15 | High Field Biconical Antenna | ELECTRO-METRICS | EM-6913 | 166 | 2011-11-28 | 2012-11-27 |
| 16 | Log Periodic Antenna | ELECTRO-METRICS | EM-6950 | 811 | 2011-11-28 | 2012-11-27 |
| 17 | Remote Active Vertical Antenna | ELECTRO-METRICS | EM-6892 | 304 | 2011-11-28 | 2012-11-27 |
| 18 | TRILOG Broadband Test-Antenna | SCHWARZBECK | VULB9163 | 9163-324 | N/A | N/A |
| 19 | Horn Antenna | SCHWARZBECK | BBHA9120A | 0499 | 2011-11-28 | 2012-11-27 |
| 20 | Teo Line Single Phase Module | SCHWARZBECK | NSLK8128 | 8128247 | 2011-10-24 | 2012-10-23 |
| 21 | Triple-Loop Antenna | EVERFINE | LLA-2 | 711002 | 2012-4-6 | 2013-4-5 |
| 22 | Electric bridge | Jhai | JK2812C | 803024 | N/A | N/A |
| 23 | RF POWER AMPLIFIER | FRANKONIA | FLL-75 | 1020A1109 | 2012-4-6 | 2013-4-5 |
| 24 | CDN | FRANKONIA | CDN M2+M3 | A3027019 | 2012-4-6 | 2013-4-5 |
| 25 | 6DB Attenuator | FRANKONIA | N/A | 1001698 | 2012-4-6 | 2013-4-5 |
| 26 | EM Injection clamp | FCC | F-203I-23mm | 091536 | 2012-4-6 | 2013-4-5 |
| 27 | 9kHz-2.4GHz signal generator 2024 | MARCONI | 10S/6625-99-457-8730 | 112260/042 | 2012-4-6 | 2013-4-5 |
| 28 | 10dB attenuator | ELECTRO- | EM-7600 | 836 | 2012-4-6 | 2013-4-5 |

| | | METRICS | | | | |
|----|--------------------------------|--------------|-----------|-------------------|------------|------------|
| 29 | ISN | TESEQ | ISN-T800 | 30301 | 2011-6-23 | 2012-6-22 |
| 30 | 10KV surge generator | SANKI | SKS-0510M | 048110003E 321 | 2011-11-14 | 2012-11-13 |
| 31 | HRMONICS&FLICK RE ANALYSER | VOLTECH | PM6000 | 200006700433 | 2011-6-27 | 2012-6-26 |
| 32 | Spectrum Analyzer | R&S | FSP | 100397 | 2011-11-2 | 2012-11-1 |
| 33 | Broadband preamplifier | SCH WARZBECK | BBV9718 | 9718-182 | 2012-4-6 | 2013-4-5 |
| 34 | Temperature & Humidity Chamber | TOPSTAT | TOS-831A | 3438A05208 | 2012-4-6 | 2013-4-5 |

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as only used by a typical user).

2.2 EUT Exercise Software

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software offered by manufacture, can let the EUT being ON operation.


2.3 Special Accessories

As shown in section 2.5, interface cable used for compliance testing is shielded as normally supplied by **Shenzhen YIDONG Technology Co., Ltd** and its respective support equipment manufacturers.

2.4 Equipment Modifications


The EUT tested was not modified by BCT.

2.5 Configuration of Test System



EUT

2.6 Test Setup Diagram

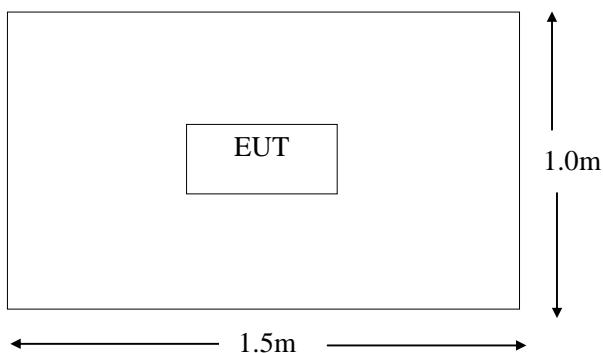

3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS

3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is 3.4 dB.

3.2 Limit of Disturbance Voltage at The Mains Terminals

| Frequency Range (MHz) | Limits (dBuV) | |
|-----------------------|----------------|---------|
| | Quasi-Peak | Average |
| 0.150~0.500 | 66~56 | 56~46 |
| 0.500~5.000 | 56 | 46 |
| 5.000~30.00 | 60 | 50 |

Note: (1)The tighter limit shall apply at the edge between two frequency bands.

3.3 EUT Setup


The setup of EUT is according with ANSI C63.4-2009 measurement procedure. The specification used was the FCC Rules and Regulations Part 15 Subpart B limits.

The EUT was placed center and the back edge of the test table.

The AV cables were draped along the test table and bundled to 30-40cm in the middle.

The spacing between the peripherals was 10 cm.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

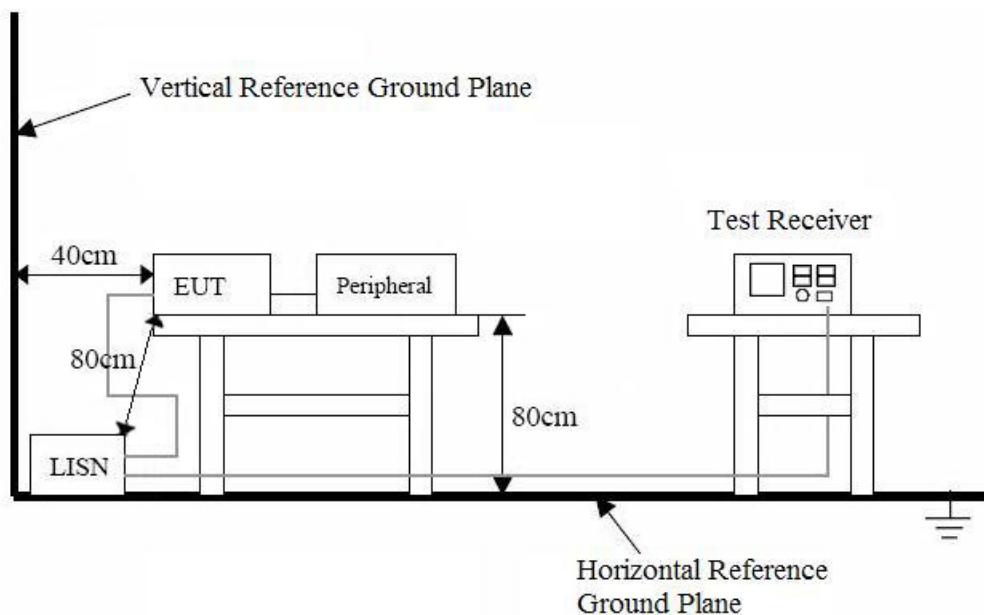

3.4 Instrument Setup

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz
Detector.....Peak & Quasi-Peak & Average
Sweep Speed.....Auto
IF Band Width.....9 KHz

3.5 Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first Artificial Mains.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak and Average readings were only performed when an emission was found to be marginal (within -10 dB μ V of specification limits). Quasi-peak readings are distinguished with a "QP". Average readings are distinguished with a "AV".

3.6 Summary of Test Results

According to the data in section 3.6, the EUT complied with the FCC Part 15 B Conducted margin, with the worst margin reading of:

3.7 Disturbance Voltage Test Data

| | |
|------------------------------|---|
| Temperature (°C) | 22~25 |
| Humidity (%RH) | 50~55 |
| Barometric Pressure (mbar) | 950~1000 |
| EUT | The Ultra Portable Wireless Bluetooth Speaker |
| M/N | Oontz |
| Operating Mode | Normal Operation |

Test data see following pages

Remark: (1) When PK reading is less than relevant limit 20dB, the QP reading and AV reading will not be recorded.

(2) Where QP reading is less than relevant AV limit, the AV reading will not be measured


3.8 Test Result

PASS

Conducted Emission Test Data

EUT: The Ultra Portable Wireless Bluetooth Speaker
 M/N: Oontz
 Operating Condition: Normal Operation
 Test Site: Cheng
 Operator: Yang
 Test Specification: AC 120V/60Hz for PC
 Comment: N Line
 Start of Test: 6/28/12/16: 39 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

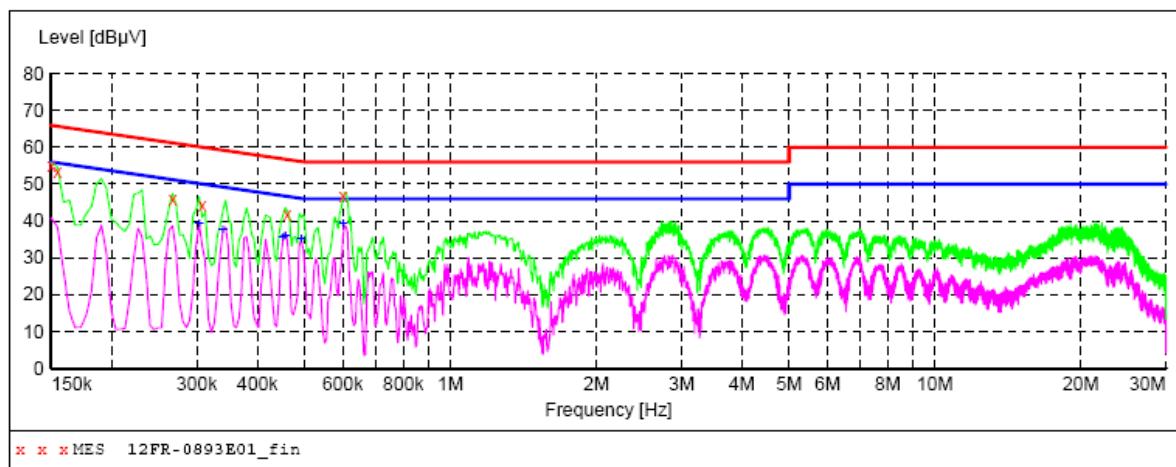

MEASUREMENT RESULT: "12FR-0893E01_fin"

| 6/28/2012 4:39PM | Frequency | Level | Transd | Limit | Margin | Detector | Line | PE |
|------------------|-----------|------------|--------|------------|--------|----------|------|-----|
| | MHz | dB μ V | dB | dB μ V | dB | | | |
| | 0.150000 | 54.90 | 11.4 | 66 | 11.1 | QP | N | GND |
| | 0.154500 | 53.60 | 11.4 | 66 | 12.2 | QP | N | GND |
| | 0.267000 | 45.80 | 10.6 | 61 | 15.4 | QP | N | GND |
| | 0.307500 | 44.10 | 10.5 | 60 | 15.9 | QP | N | GND |
| | 0.460500 | 42.00 | 10.3 | 57 | 14.7 | QP | N | GND |
| | 0.600000 | 47.00 | 10.2 | 56 | 9.0 | QP | N | GND |


MEASUREMENT RESULT: "12FR-0893E01_fin2"

| 6/28/2012 4:39PM | Frequency | Level | Transd | Limit | Margin | Detector | Line | PE |
|------------------|-----------|------------|--------|------------|--------|----------|------|-----|
| | MHz | dB μ V | dB | dB μ V | dB | | | |
| | 0.303000 | 39.50 | 10.6 | 50 | 10.7 | AV | N | GND |
| | 0.339000 | 37.50 | 10.5 | 49 | 11.7 | AV | N | GND |
| | 0.451500 | 35.50 | 10.3 | 47 | 11.3 | AV | N | GND |
| | 0.456000 | 36.20 | 10.3 | 47 | 10.6 | AV | N | GND |
| | 0.492000 | 35.10 | 10.3 | 46 | 11.0 | AV | N | GND |
| | 0.600000 | 39.30 | 10.2 | 46 | 6.7 | AV | N | GND |

Conducted Emission Test Data

EUT: The Ultra Portable Wireless Bluetooth Speaker
 M/N: Oontz
 Operating Condition: Normal Operation
 Test Site: Cheng
 Operator: Yang
 Test Specification: AC 120V/60Hz for PC
 Comment: L Line
 Start of Test: 6/28/12/16: 39 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

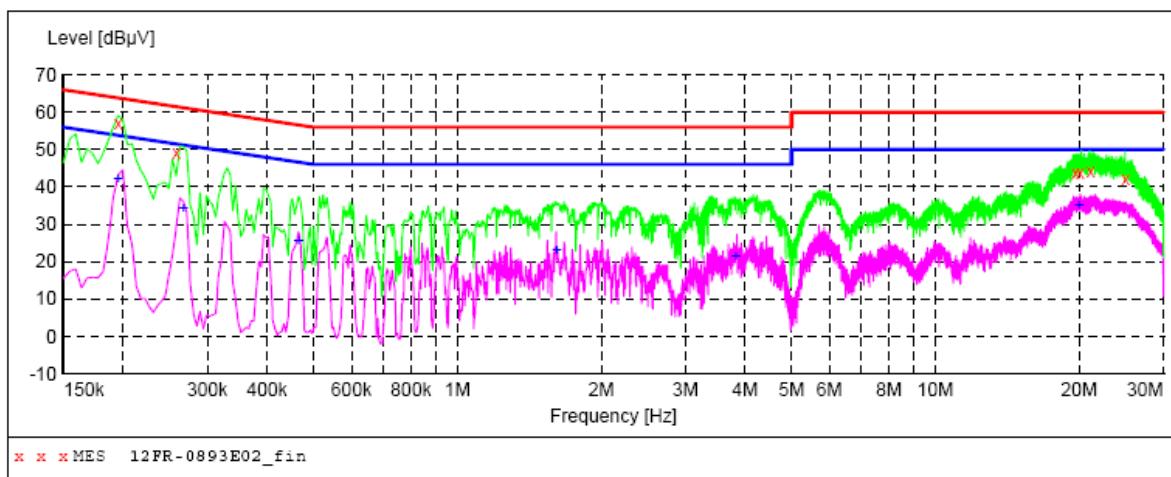

MEASUREMENT RESULT: "12FR-0893E02_fin"

| Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Detector | Line | PE |
|------------------|---------------------|--------------|---------------------|--------------|----------|------|-----|
| 0.195000 | 56.90 | 10.9 | 64 | 6.9 | QP | L1 | GND |
| 0.258000 | 49.20 | 10.7 | 62 | 12.3 | QP | L1 | GND |
| 19.635000 | 44.00 | 10.6 | 60 | 16.0 | QP | L1 | GND |
| 20.071500 | 43.90 | 10.6 | 60 | 16.1 | QP | L1 | GND |
| 21.124500 | 44.20 | 10.7 | 60 | 15.8 | QP | L1 | GND |
| 24.972000 | 42.20 | 10.9 | 60 | 17.8 | QP | L1 | GND |

MEASUREMENT RESULT: "12FR-0893E02_fin2"

| Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Detector | Line | PE |
|------------------|---------------------|--------------|---------------------|--------------|----------|------|-----|
| 0.195000 | 42.30 | 10.9 | 54 | 11.5 | AV | L1 | GND |
| 0.267000 | 34.30 | 10.6 | 51 | 16.9 | AV | L1 | GND |
| 0.465000 | 25.40 | 10.3 | 47 | 21.2 | AV | L1 | GND |
| 1.612500 | 22.90 | 10.2 | 46 | 23.1 | AV | L1 | GND |
| 3.822000 | 21.60 | 10.3 | 46 | 24.4 | AV | L1 | GND |
| 19.954500 | 35.30 | 10.6 | 50 | 14.7 | AV | L1 | GND |

4 - RADIATED DISTURBANCES

4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is 4.0 dB.

4.2 Limit of Radiated Disturbances

| Frequency (MHz) | Distance (Meters) | Field Strengths Limits (dB μ V/m) |
|-----------------|-------------------|---------------------------------------|
| 30 ~ 88 | 3 | 40 |
| 88~216 | 3 | 43.5 |
| 216 ~ 960 | 3 | 46 |
| 960 ~ 1000 | 3 | 54 |

Note: (1) The tighter limit shall apply at the edge between two frequency bands.
(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

4.3 EUT Setup


The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15 Subpart B limits.

The EUT was placed on the center of the test table.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

Block diagram of test setup (In chamber)

Below 1 GHz

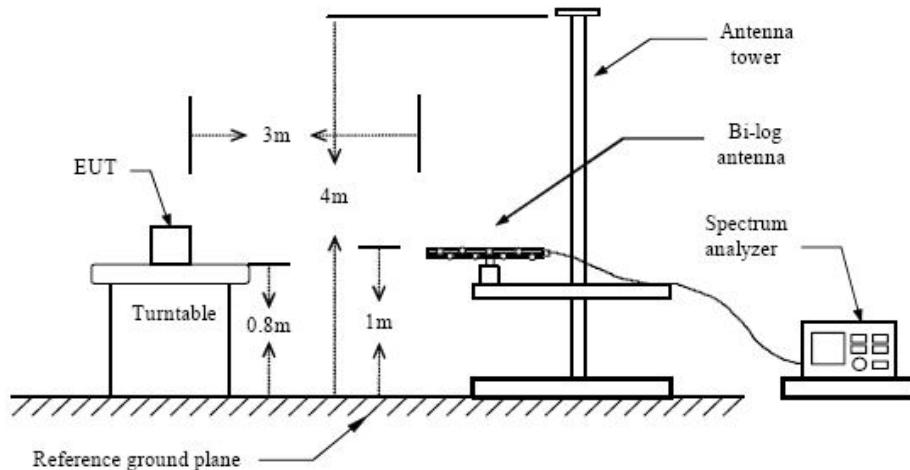

4.4 Test Receiver Setup

According to FCC Part 15 rule, the frequency was investigated from 30 to 1000 MHz. During the radiated emission test, the test receiver was set with the following configurations:

Test Receiver Setting:

Detector.....Peak & Quasi-Peak
IF Band Width.....120KHz
Frequency Range.....30MHz to 1000MHz
Turntable Rotated.....0 to 360 degrees

Antenna Position:

Height.....1m to 4m
Polarity.....Horizontal and Vertical

4.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -10 dB μ V of specification limits), and are distinguished with a "QP" in the data table.

4.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Subpart B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

4.7 Radiated Emissions Test Result

| | |
|------------------------------|---|
| Temperature (°C) | 22~25 |
| Humidity (%RH) | 50~54 |
| Barometric Pressure (mbar) | 950~1000 |
| EUT | The Ultra Portable Wireless Bluetooth Speaker |
| M/N | Oontz |
| Operating Mode | Charging, playing |

Test data see following pages

Remark: (1) When PK reading is less than relevant limit 20dB, the QP reading and AV reading will not be recorded.
(2) Where QP reading is less than relevant AV limit, the AV reading will not be measured

4.8 Test Result


PASS

Radiated Emission Test Data:

EUT: The Ultra Portable Wireless Bluetooth Speaker
M/N: Oontz
Operating Condition: Charging
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for PC
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

| Short Description: | | Field Strength | | |
|--------------------|-----------|----------------|---------|--------------|
| Start | Stop | Detector | Meas. | IF |
| Frequency | Frequency | | Time | Bandw. |
| 30.0 MHz | 1.0 GHz | MaxPeak | Coupled | 100 kHz |
| | | | | VULB9163 NEW |

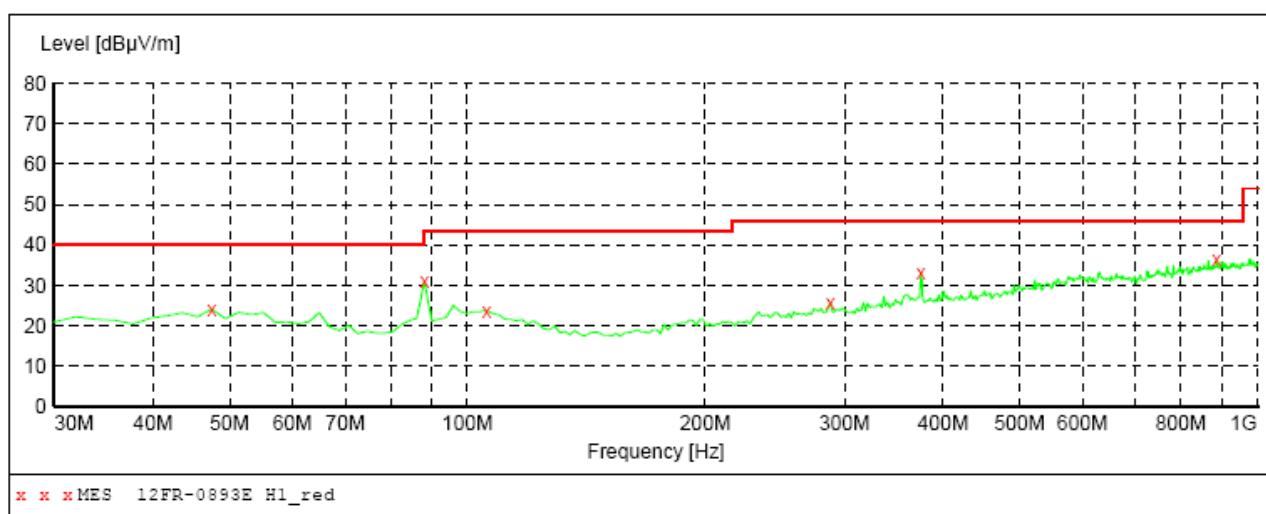***MEASUREMENT RESULT: "12FR-0893E H1_red"***

6/27/2012 00:22


| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Det. QP | Height cm | Azimuth deg | Polarization |
|------------------|-----------------------|--------------|-----------------------|--------------|------------|--------------|----------------|--------------|
| 47.460000 | 24.10 | 15.8 | 40.0 | 15.9 | QP | 100.0 | 0.00 | HORIZONTAL |
| 88.200000 | 30.90 | 15.5 | 43.5 | 12.6 | QP | 100.0 | 0.00 | HORIZONTAL |
| 105.660000 | 23.80 | 16.9 | 43.5 | 19.7 | QP | 100.0 | 0.00 | HORIZONTAL |
| 288.020000 | 25.60 | 18.4 | 46.0 | 20.4 | QP | 100.0 | 0.00 | HORIZONTAL |
| 375.320000 | 33.30 | 20.8 | 46.0 | 12.7 | QP | 100.0 | 0.00 | HORIZONTAL |
| 887.480000 | 36.30 | 29.1 | 46.0 | 9.7 | QP | 100.0 | 0.00 | HORIZONTAL |

Radiated Emission Test Data:

EUT: The Ultra Portable Wireless Bluetooth Speaker
 M/N: Oontz
 Operating Condition: Charging
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: AC 120V/60Hz for PC
 Comment: Polarization: Vertical

SWEET TABLE: "test (30M-1G)"

| Short Description: | | | Field Strength | | |
|--------------------|----------------|----------|----------------|---------|--------------|
| Start Frequency | Stop Frequency | Detector | Meas. | IF Time | Transducer |
| 30.0 MHz | 1.0 GHz | MaxPeak | Coupled | 100 kHz | VULB9163 NEW |

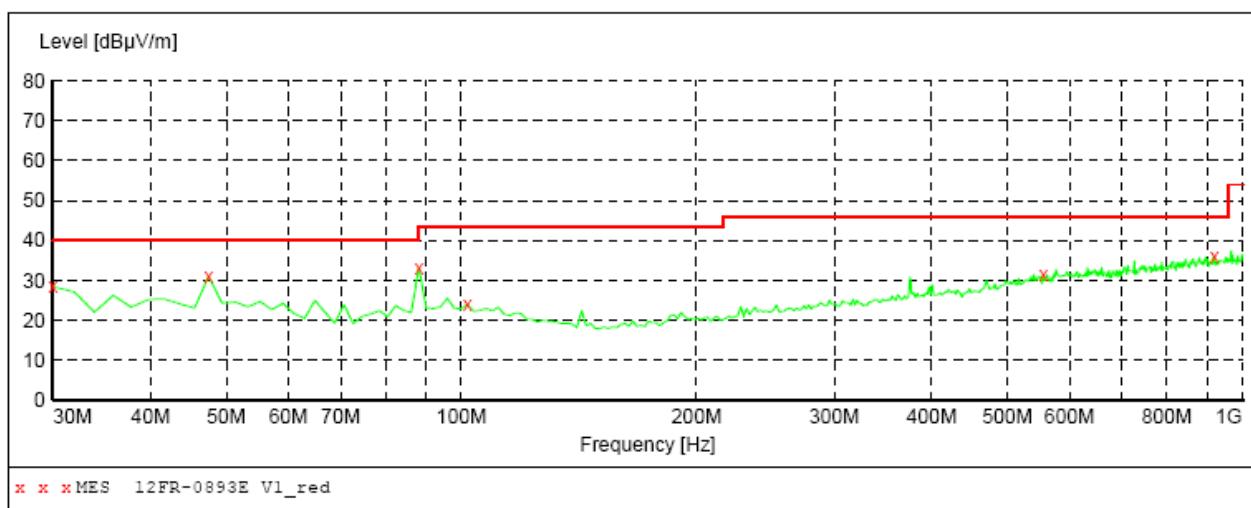

MEASUREMENT RESULT: "12FR-0893E V1_red"

6/27/2012 00:20


| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Det. QP | Height cm | Azimuth deg | Polarization |
|------------------|-----------------------|--------------|-----------------------|--------------|------------|--------------|----------------|--------------|
| 30.000000 | 28.40 | 14.3 | 40.0 | 11.6 | QP | 100.0 | 0.00 | VERTICAL |
| 47.460000 | 31.00 | 15.8 | 40.0 | 9.0 | QP | 100.0 | 0.00 | VERTICAL |
| 88.200000 | 33.30 | 15.5 | 43.5 | 10.2 | QP | 100.0 | 0.00 | VERTICAL |
| 101.780000 | 24.00 | 17.3 | 43.5 | 19.5 | QP | 100.0 | 0.00 | VERTICAL |
| 555.740000 | 31.50 | 25.1 | 46.0 | 14.5 | QP | 100.0 | 0.00 | VERTICAL |
| 920.460000 | 36.00 | 29.3 | 46.0 | 10.0 | QP | 100.0 | 0.00 | VERTICAL |

Radiated Emission Test Data:

EUT: The Ultra Portable Wireless Bluetooth Speaker
 M/N: Oontz
 Operating Condition: Playing
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: AC 120V/60Hz for PC
 Comment: Polarization: Horizontal

SWEET TABLE: "test (30M-1G)"

| Short Description: | | Field Strength | | |
|-------------------------|----------------|----------------|---------|---------|
| Start Frequency | Stop Frequency | Detector | Meas. | IF |
| 30.0 MHz | 1.0 GHz | MaxPeak | Coupled | 100 kHz |
| Transducer VULB9163 NEW | | | | |

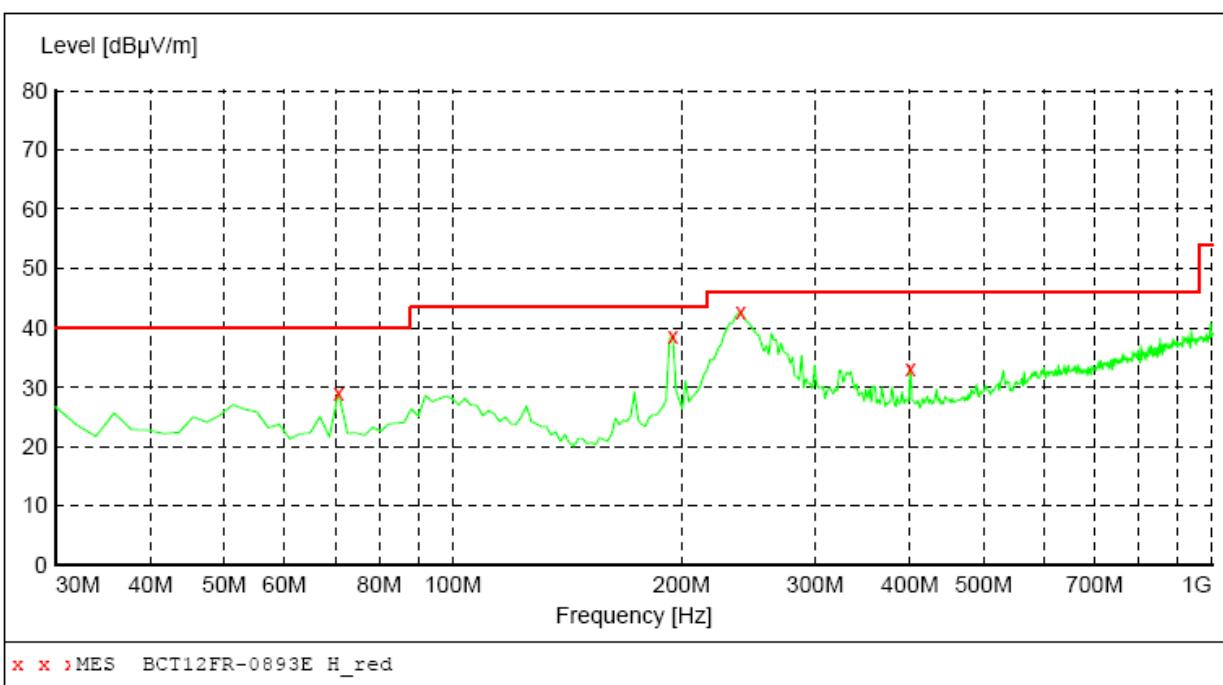

MEASUREMENT RESULT: "BCT12FR-0893E H_red"


| Frequency | Level | Transd | Limit | Margin | Det. | Height | Azimuth | Polarization |
|------------|--------------|--------|--------------|--------|------|--------|---------|--------------|
| MHz | dB μ V/m | dB | dB μ V/m | dB | | cm | deg | |
| 70.740000 | 29.10 | 12.4 | 40.0 | 10.9 | QP | 300.0 | 0.00 | HORIZONTAL |
| 194.900000 | 38.70 | 16.1 | 43.5 | 4.8 | QP | 100.0 | 0.00 | HORIZONTAL |
| 239.520000 | 42.70 | 17.1 | 46.0 | 3.3 | QP | 100.0 | 0.00 | HORIZONTAL |
| 400.540000 | 33.20 | 21.5 | 46.0 | 12.8 | QP | 100.0 | 0.00 | HORIZONTAL |

Radiated Emission Test Data:

EUT: The Ultra Portable Wireless Bluetooth Speaker
 M/N: Oontz
 Operating Condition: Playing
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: AC 120V/60Hz for PC
 Comment: Polarization: Vertical

SWEET TABLE: "test (30M-1G)"

| Short Description: | | Field Strength | | | |
|--------------------|----------------|----------------|--------------|---------|--------------|
| Start Frequency | Stop Frequency | Detector | Meas. | IF | Transducer |
| 30.0 MHz | 1.0 GHz | MaxPeak | Time Coupled | 100 kHz | VULB9163 NEW |

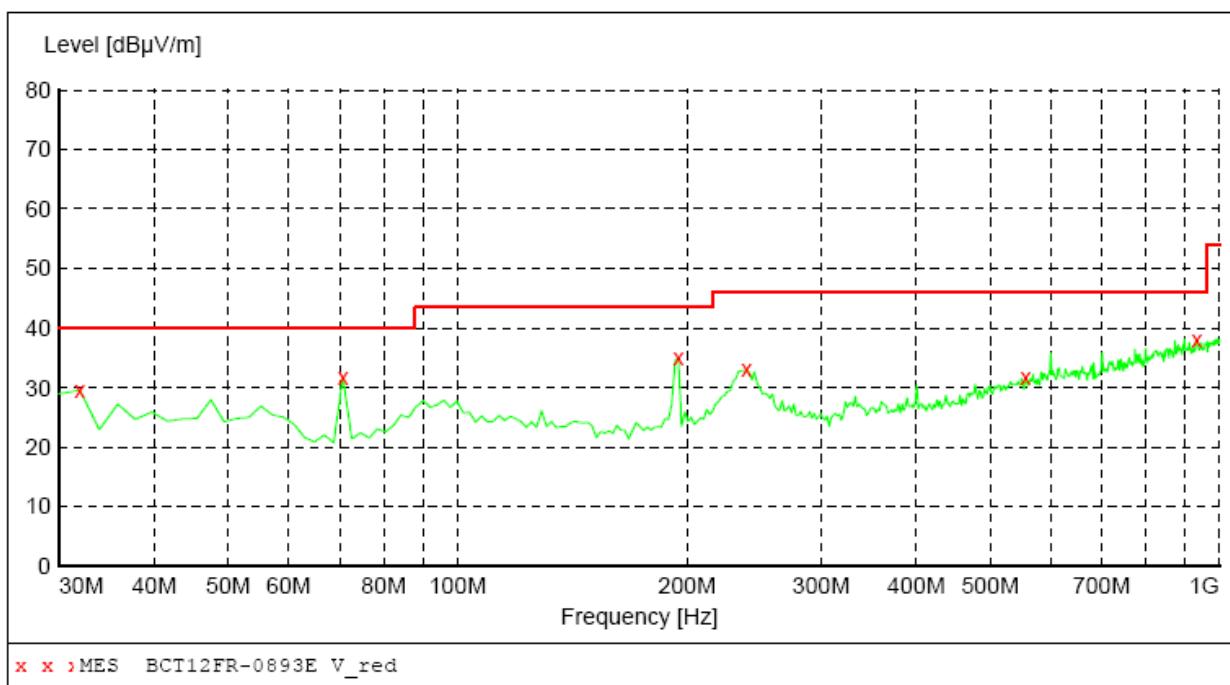

MEASUREMENT RESULT: "BCT12FR-0893E V_red"

6/27/2012 00:04

| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Det. QP | Height cm | Azimuth deg | Polarization |
|------------------|-----------------------|--------------|-----------------------|--------------|------------|--------------|----------------|--------------|
| 31.940000 | 29.60 | 14.4 | 40.0 | 10.4 | QP | 100.0 | 0.00 | VERTICAL |
| 70.740000 | 31.80 | 12.4 | 40.0 | 8.2 | QP | 100.0 | 0.00 | VERTICAL |
| 194.900000 | 35.00 | 16.1 | 43.5 | 8.5 | QP | 100.0 | 0.00 | VERTICAL |
| 239.520000 | 33.00 | 17.1 | 46.0 | 13.0 | QP | 100.0 | 0.00 | VERTICAL |
| 555.740000 | 31.70 | 25.3 | 46.0 | 14.3 | QP | 100.0 | 0.00 | VERTICAL |
| 932.100000 | 38.20 | 31.6 | 46.0 | 7.8 | QP | 100.0 | 0.00 | VERTICAL |

RADIATED EMISSION BELOW 30 MHz

| Frequency | Meter Reading | Antenna Factor | Cable Loss | Emission Levels | Limits | Margin | Detector Mode |
|------------------|------------------------------|-----------------------|-------------------|--------------------------------|--------------------------------|---------------|----------------------|
| (MHz) | (dBμV) | (dB/M) | (dB) | (dBμV/M) | (dBμV/M) | (dB) | PK/QP |
| 0.530 | 19.30 | 7.89 | 1.02 | 28.21 | 65.3 | -37.09 | QP |
| 14.90 | 18.87 | 8.76 | 1.21 | 28.84 | 49.5 | -20.66 | QP |
| 18.70 | 17.90 | 8.63 | 1.14 | 27.67 | 49.5 | -21.83 | QP |
| 21.50 | 19.90 | 8.06 | 1.67 | 29.63 | 49.5 | -19.87 | QP |