

CW-3

CAM ~ WAVE

Wireless HD Video Transmission System

Instruction Manual

Thank you for choosing the CW-3. The CW-3 is a wireless transmission device which transmits video and audio with 5GHz band radio frequencies. Please read this instruction manual to best maximize performance and safely use your CW-3.

SAFETY INSTRUCTIONS

To use this product safely and correctly, please follow the safety precautions set out below. Product misuse may cause fire, shock, injury, product failure or other hazards. Please read this manual before using your CW-3 and retain for future reference.

CAUTION

Fire or electric shock may cause injury or other accidents.

- Before using an external power supply, always check that the voltage is within the specified range and that the polarity of the connector is correct, to prevent smoke or fire.
- Do not attempt to disassemble, modify or repair this product by yourself. It may cause fire or electric shock. Please consult your dealer or local IDX office for inspection and repair services.
- Do not use this product near water or in high humidity environments. It may cause fire or electric shock.
- In case of damage, smoke, unusual smell or other unusual/unexpected situations, stop use immediately and consult your dealer or local IDX office.
- If ventilation openings are blocked, this may cause excessive heat or damage.
- After long periods of continuous use, please be cautious of touching the case of the unit as it may become overheated.
- Using the CW-3 in an environment with a lot of moisture, soot or dust may cause excessive heat or electric shock.
- Do not place this product on an uneven or a vibrating surface. It may cause failure or damage.

Warning

- This product can be used in indoor only, it is recommended to keep it at least 20cm away from user to ensure safety.
- To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example use only shielded interface cables when connecting to computer or peripheral device).

Caution on the use of this product and radio waves

- This product has been approved for technical standard compliance certification as a wireless device of radio stations with low antenna power specified under the FCC (in US) / ETSI (in Europe) Radio wave regulation. Thereby a license for radio station use is not required for operation.
- This product is allowed to be used only in designated region by IDX.
- This product is pursuant to the appropriate regulations and can be used outdoors as well.
- CW-3 uses 5GHz band radio frequencies and will not interfere with medical devices. However, when in use, it is recommended to keep the CW-3 at least 30cm (12in.) away from medical devices to ensure safety.

Features

- Supported 3G-SDI/HD-SDI/SD-SDI input and output.
- Transmitter provides SDI buffered output.
- Enable to transmit uncompressed video wirelessly about 50m/150ft LOS.
- Transmission delay is less than 1msec.
- Signal is encoded by 128bit AES encryption.
- DFS functionality allows for both indoor and outdoor use.

FOR US version

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions; (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Packing list


- CW-3 TX (Transmitter)
- CW-3 RX (Receiver)
- Antenna x2 (for Transmitter)
- AC adapter for Receiver

Accessory kit

- D-Tap to Pin cable
- Mounting adopter


Switches and connectors

TX

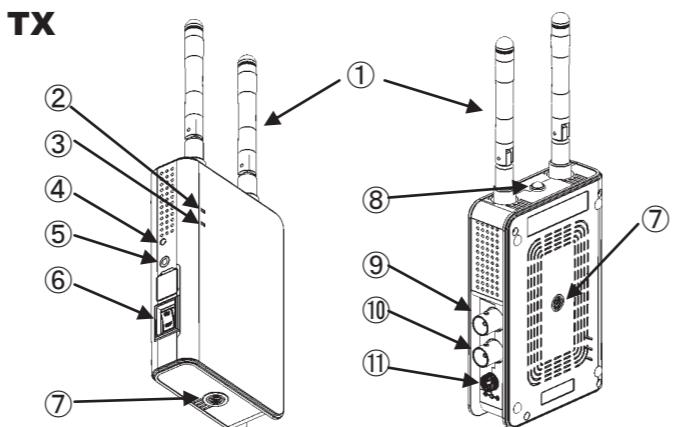

① Antenna ② VIDEO LED ③ POWER LED ④ Push button (service use) ⑤ GPI out ⑥ Power switch ⑦ 1/4inch screw hole ⑧ LINK LED ⑨ SDI buffered out ⑩ SDI input ⑪ DC input (12V)

RX

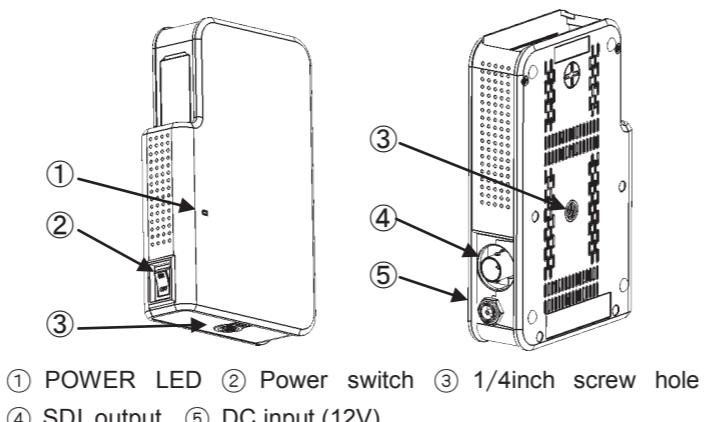

① POWER LED ② Power switch ③ 1/4inch screw hole ④ SDI output ⑤ DC input (12V)

FOR EU version

CE This equipment is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. In order to obtain the declaration of conformity statement for the European Union countries, please contact the appropriate IDX office.

Setup and Operation

- Mount the TX onto camera by using mounting adaptor then attach the supplied antenna to TX. Connect the SDI cable between camera and TX then connect the supplied DC cable between the DC IN of TX and D-TAP connector on battery or P-V plate.
- Plug in an AC adapter to RX and, then, connect between SDI out of RX and monitor.
- Turn ON the power switch of both TX and RX then CW-3 will automatically starts searching for available frequency.
- A LINK LED flashes when the system is in search mode and then turns SOLID as soon as system links firmly.
- A VIDEO LED turns off when video signal is in lost or failed.

Note


- The feature as wireless transmitting and receiving can only be activated when the CW-3 connects to other related wireless receiver. * see page 2
- In the areas where other 5GHz wireless devices are in operation, transmission may be interrupted.
- CW-3 is programmed region code accordingly so that the transhipment and use in the unspecified region may violate local law.
- The maximum transmission range varies depending on the surrounding environment such as radio wave conditions, composition of the wall, weathering, etc.. therefore the specification of the transmission range is not a definite range.
- And unstable signal reception may be caused by the height, angle and distance between TX and RX.
- Please do not press the button on the TX and RX. Please turn the power off if the system stop working after accidentally pressed these buttons.

DFS Functions

DFS is the abbreviation of "Dynamic Frequency Selection". DFS detects the radio waves of weather radar and the CW-3 automatically searches for an available frequency to avoid interference. LINK TIME takes approximately one minute.

Using GPI output

A TX provides GPI output. GPI output is an open collector output in synchronization with the status of wireless link. Thus, now it is possible to interface with an external tally device for better viewing. Please note that the external tally device should be VCC 24V/40mA or less.

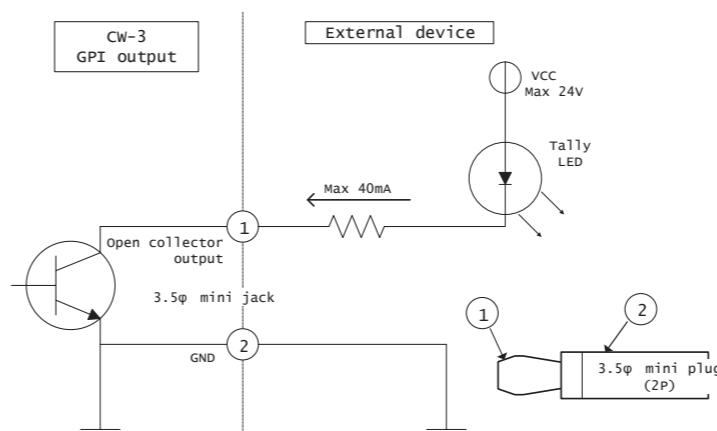

Design and specification are subject to change without notice.

IDX Company, Ltd. : 6-28-11 Shukugawara, Tamaku, Kawasaki-shi, Kanagawa-ken 214-0021 Japan
Tel : +81-44-850-8801 Fax : +81-44-850-8838 E-mail : idx.japan@idx.tv
IDX System Technology, Inc. : 19001 Harbortage Way, Suite 105, Torrance, CA 90501 USA
Tel : +1-310-328-2850 Fax : +1-310-328-8202 E-mail : idx.usa@idx.tv
IDX Technology Europe, Ltd. : Unit 9, Langley Park, Waterside Drive, Langley, Berkshire SL3 6EZ England
Tel : +44-1753-547692 Fax : +44-1753-546660 E-mail : idx.europe@idx.tv

Specifications

Video	
Signal standard	SMPTE 424M Level A SMPTE 292M, SMPTE 259M
Video format	3G: YCbCr 4:2:2 10bit 1080p 60/59.94/50Hz HD: YCbCr 4:2:2 10bit 1080i 60/59.94/50Hz 1080p 30/29.97/25/24/23.98Hz 720p 59.94/50Hz SD: 525i/59.94Hz, 625i/50Hz
Audio	SDI Embedded Audio
Wireless transmission (Transmitter)	
Frequencies	US: 5270, 5310, 5510, 5550, 5670MHz EU: 5510, 5550, 5670MHz
Channe bandw idth	40MHz
Transmission distance	50m / 150ft (outdoor LOS)
Transmission format	MIMO/OFDM/JSCC
Antenna	External x2
Coding	AES 128bit encryption
Link mode	UNICAST
Indication and Operation	
LINK LED	Search Blink Linked Light on
VIDEO LED	Video valid Light on Viode fail Light off
POWER LED	Power on Light on Power off Light off
Connectors	
Video input/output	Transmitter BNC x1 (SDI input) BNC x1 (SDI buffered output) Dock BNC x1 (SDI output)
GPI output	Transmitter only 3.5φ mini jack Open collector output MAX 24V 40mA
DC input	Pinjack 5.5φ x 2.1φ
Product specification	
Dimensions	Transmitter 109.2(W)x68.8(D)x25.4(H)mm Antenna 108.0(W)x10.0(D)x10.0(H)mm Dock 119.0(W)x73.5(D)x25.0(H)mm
Weight	Transmitter 150g Dock 115g
Input voltage	DC 12V
Power consumption	Transmitter 8W (MAX) Dock 10W (MAX/Include a CW-1 RX)
Operating temperature	0~40°C
Regulation / Certification	Transmitter FCC: Part 15 subpart E (15.407) CE: EN 62311:2008 EN 301 893, EN 301 489-1, EN 301 489-17 EN 65950-1:2006+A11:2009+A1:2010+A12:2011 RoHS compliant

Warranty & Service

- Warranty period of the CW-3 is two years after purchase.
- Warranty may be voided even within the warranty period when IDX noticed followings:
 - Improper use of CW-3 / Malfunction due to excess or deficiency of power / Malfunction due to power short circuit / Physical damages caused by dropping or vibration / Malfunction due to water / Unauthorized used and/or modification done by customer
- When any assistance is needed, please contact your local IDX dealer or appropriate IDX office below.



201304
ENVIRONMENTALLY FRIENDLY
GLOBAL ENVIRONMENTAL
AWARENESS
RoHS Compliant