

Straubing, 31 March 2004

**TEST - REPORT**

**No. 56502-40187**

**for**

**Remotus MC 8318**

**UHF Handheld Transmitter**

Applicant: Akerströms Björbo AB

Test Specification: FCC Code of Federal Regulations,  
Part 15 Subpart C, Section 15.231

---

Note:

The test data of this report relate only to the individual item which has been tested.  
This report shall not be reproduced except in full extent without the written approval of  
the testing laboratory.

---

## Table of Contents


|      |                                                                     |    |
|------|---------------------------------------------------------------------|----|
| 1.   | Administrative Data.....                                            | 3  |
| 2.   | Identification of Test Laboratory.....                              | 4  |
| 3.   | Operation Mode of EUT .....                                         | 6  |
| 4.   | Configuration.....                                                  | 7  |
| 5.   | Measuring Methods .....                                             | 8  |
| 5.1. | Conducted powerline emissions.....                                  | 9  |
| 5.2. | Field Strength of Emissions, Prescans in a fully-anechoic Room..... | 10 |
| 5.3. | Radiated Emission Measurement at Open Area Test Site .....          | 12 |
| 6.   | Photographs Taken During Testing .....                              | 13 |
| 7.   | List of Measurements.....                                           | 18 |
| 8.   | Referenced Regulations .....                                        | 22 |
|      | Charts taken during testing.....                                    | 23 |

**1. Administrative Data**

|                                     |                                         |
|-------------------------------------|-----------------------------------------|
| <b>Test item (EUT)</b>              |                                         |
| Type designation                    | Remotus MC 8318                         |
| Serial number(s):                   | 92 1732-0304                            |
| Type of equipment:                  | UHF Handheld Transmitter                |
| Parts/accessories:                  |                                         |
| FCC-ID:                             | OG4MC8318                               |
| <b>Technical data</b>               |                                         |
| Frequency range                     | 433.050 MHz - 434.790 MHz               |
| Operational frequency               | 434.650 MHz                             |
| Type of modulation                  | 10K0F1D                                 |
| Pulse frequency                     | N/A                                     |
| Pulse width                         | N/A                                     |
| Antenna                             | Integrated                              |
| Power supply                        | Battery 7.2 V                           |
| <b>Applicant:</b><br>(full address) | Akerströms Björbo AB<br>S-780 45 Björbo |
| Contract identification:            | ---                                     |
| Contact person:                     | Mr. Bernt Eriksson                      |
| Manufacturer:                       | Akerströms Björbo AB                    |
| <b>Application details</b>          |                                         |
| Receipt of EUT:                     | 22.March 2004                           |
| Date of test:                       | 22 - 26 March 2004                      |
| Note:                               |                                         |
| Responsible for testing:            | Thomas Eberl                            |
| Responsible for test report:        | Thomas Eberl                            |

## 2. Identification of Test Laboratory

| DETAILS OF THE TEST LABORATORY            |                                                               |
|-------------------------------------------|---------------------------------------------------------------|
| COMPANY NAME:                             | Senton GmbH EMI/EMC Test Center                               |
| ADDRESS:                                  | Aeussere Fruehlingsstrasse 45<br>D-94315 Straubing<br>Germany |
| LABORATORY ACCREDITATION:                 | DAR-Registration No. TTI-P-G 062/94-01                        |
| FCC TEST SITE LISTING                     | 90926                                                         |
| INDUSTRY CANADA TEST SITE<br>REGISTRATION | IC 3050                                                       |
| NAME FOR CONTACT PURPOSES:                | Mr. Johann Roidt                                              |
| TELEPHONE: (+49) (0)9421 5522-0           | FAX: (+49) (0)9421 5522-99                                    |

| PERSONNEL INVOLVED IN THIS TEST REPORT |                                                                                                          |
|----------------------------------------|----------------------------------------------------------------------------------------------------------|
| LABORATORY MANAGER:                    | <br>Mr. Johann Roidt |
| RESPONSIBLE FOR TESTING:               | <br>Mr. Thomas Eberl |
| RESPONSIBLE FOR TEST REPORT:           | Mr. Thomas Eberl                                                                                         |

**SUMMARY OF TEST RESULTS**

The tested sample complies with the requirements set forth in the  
**FCC Code of Federal Regulations**  
**Part 15, Subpart C, Section 15.231**

### 3. Operation Mode of EUT

While one button is pressed, the transmitter continuously sends the corresponding datagram. When the button is released, the transmitter stops working instantly.

#### 4. Configuration

| Configuration of the EUT |
|--------------------------|
| Not applicable           |

| Cables connected to the EUT |
|-----------------------------|
| Not applicable              |

| Peripheral devices connected to the EUT |
|-----------------------------------------|
| Not applicable                          |


## 5. Measuring Methods

## 5.1. Conducted powerline emissions

|                           |                          |
|---------------------------|--------------------------|
| Rules and Specifications: | Sections 15.107 & 15.207 |
| Guide:                    | CISPR 22                 |

### Measurement Procedure:

In general conducted emission tests in the frequency range 0.15 - 30 MHz are required to be performed with quasi-peak and average detector. To simplify testing the following procedure is used: First the whole spectrum of emission caused by equipment under test (EUT) is recorded with detector set to peak. After that all emission levels having less margin than 20 dB to or exceeding the appropriate limit (in general average limit is 10 dB lower than quasi-peak limit) are retested with detector set to quasi-peak. If average limit is kept no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average has to be recorded.

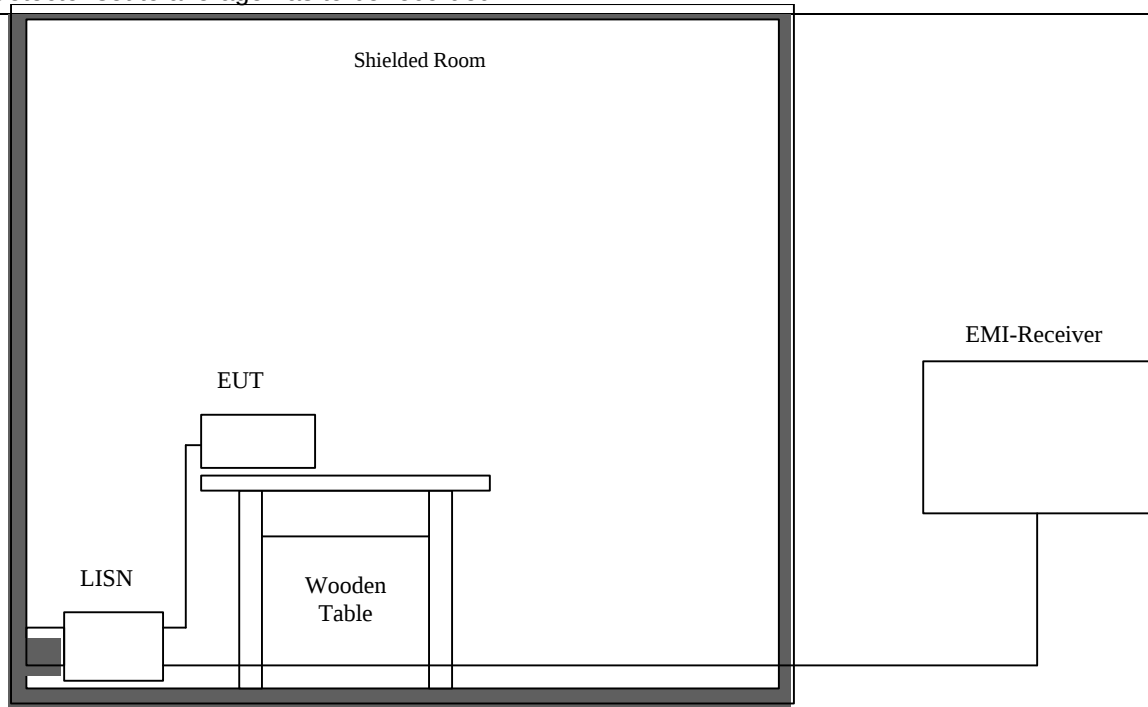

Test instruments used:

| No. | Type                | Model    | Serial Number | Manufacturer    |
|-----|---------------------|----------|---------------|-----------------|
| 01  | EMI Receiver        | ESHS 10  | 860043/016    | Rohde & Schwarz |
| 02  | LISN                | ESH3-Z5  | 862770/021    | Rohde & Schwarz |
| 03  | LISN                | ESH-3-Z5 | 830952/025    | Rohde & Schwarz |
| 04  | Shielded Room No. 4 | ---      | 3FD-100 544   | Euroshield      |


## 5.2. Field Strength of Emissions, Prescans in a fully-anechoic room (30 MHz – 1 GHz)

|                           |                          |
|---------------------------|--------------------------|
| Rules and Specifications: | Sections 15.109 & 15.231 |
| Guide:                    | ANSI C63.4 1997          |

### Measurement Procedure:

Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz.

Measurements were made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 100 kHz. All tests were performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

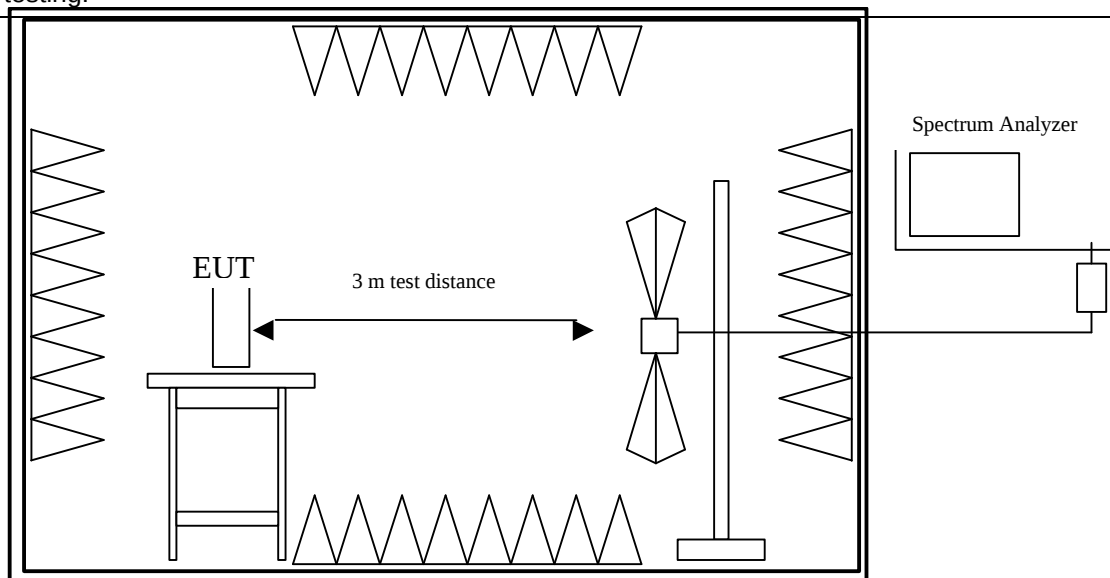

Fully anechoic chamber

### Test instruments used:

| No. | Type                  | Model    | Serial Number | Manufacturer       |
|-----|-----------------------|----------|---------------|--------------------|
| 01  | Spectrum Analyzer     | FSP 30   | 100063        | Rohde & Schwarz    |
| 113 | Preamplifier          | CPA9231A | 3393          | Schaffner          |
| 141 | Biconical antenna     | HK 116   | 829708/006    | Rohde & Schwarz    |
| 143 | Log. periodic antenna | 3147     | 9112-1054     | EMCO               |
| 003 | Fully anechoic room   | No. 2    | 1452          | Albatross Projects |

## 5.3. Fieldstrength of Emissions, Measurement at Open Area Test Site (30 MHz – 1 GHz)


|                           |                          |
|---------------------------|--------------------------|
| Rules and Specifications: | Sections 15.109 & 15.231 |
| Guide:                    | ANSI C63.4 1997          |

### Measurement Procedure:

#### Measurement Procedure:

For final testing an open-area test-site was used. Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz.

Measurements were made in both the horizontal and vertical planes of polarisation at a open area test site using a spectrum analyser with the detector function set to CISPR. All test were performed at a test distance of 3 meters. During the tests the EUT is rotated all around, and the receiving-antenna is raised and lowered from 1m to 4m to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

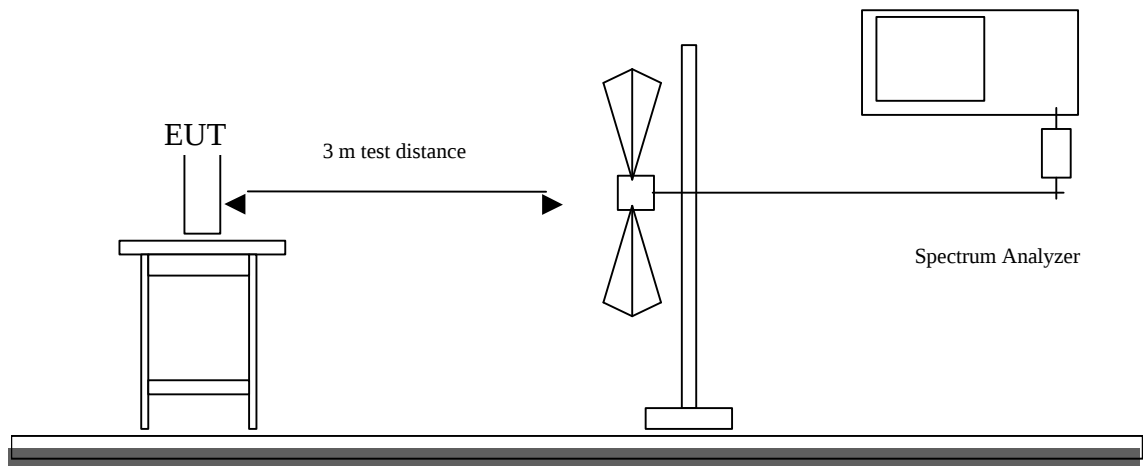

#### Test instruments used:

| No. | Type                  | Model  | Serial Number | Manufacturer    |
|-----|-----------------------|--------|---------------|-----------------|
| 01  | EMI Receiver          | ESVP   | 881414/009    | Rohde & Schwarz |
| 141 | Biconical antenna     | HK 116 | 829708/006    | Rohde & Schwarz |
| 143 | Log. periodic antenna | 3147   | 9112-1054     | EMCO            |
| 003 | Open Field Test Site  | No. 1  | N/A           | Senton          |

## 5.4. Fieldstrength of Emissions above 1 GHz

|                           |                          |
|---------------------------|--------------------------|
| Rules and Specifications: | Sections 15.109 & 15.209 |
| Guide:                    | ANSI C63.4 1997          |

### Measurement Procedure:


Radiated emissions are measured in the frequency range 1 GHz to the 10<sup>th</sup> harmonic of the maximum frequency of the EUT.

Resolution and video bandwidth of the spectrum analyzer are set to 1 MHz. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. Additional measurements are performed at critical frequencies with reduced span.

EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.

All tests are performed in a fully-anechoic chamber with a test-distance of 3 meters.

If required preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators and filters if necessary).

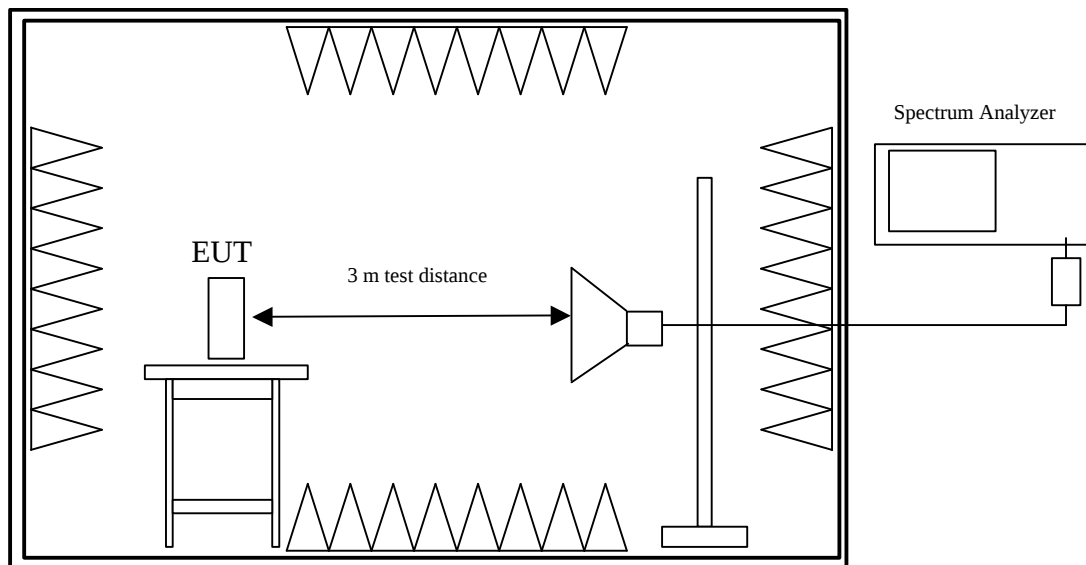

Fully anechoic

### Test instruments used:

| No. | Type                  | Model               | Serial Number | Manufacturer       |
|-----|-----------------------|---------------------|---------------|--------------------|
| 01  | Spectrum Analyzer     | FSP 30              | 100063        | Rohde & Schwarz    |
| 143 | Log. periodic antenna | 3147                | 9112-1054     | EMCO               |
| 145 | Horn antenna          | 3115                | 9508-4553     | EMCO               |
| 146 | Horn antenna set      | 3160-03/-09         | 9112-1003     | EMCO               |
| 114 | Preamplifier 1-8 GHz  | AFS3-00100800-32-LN | 847743        | Miteq              |
| 115 | Preamplifier 8-18 GHz | ACO/180-3530        | 32641         | CTT                |
| 003 | Fully anechoic room   | No. 2               | 1452          | Albatross Projects |

## 6. Photographs Taken During Testing

## Test setup for radiated emission measurement (fully anechoic room)




**Test setup for radiated emission measurement  
(fully anechoic room)**



## Test setup for radiated emission measurement (open-area test-side)



**Test setup for radiated emission measurement  
(open-area test-side)**

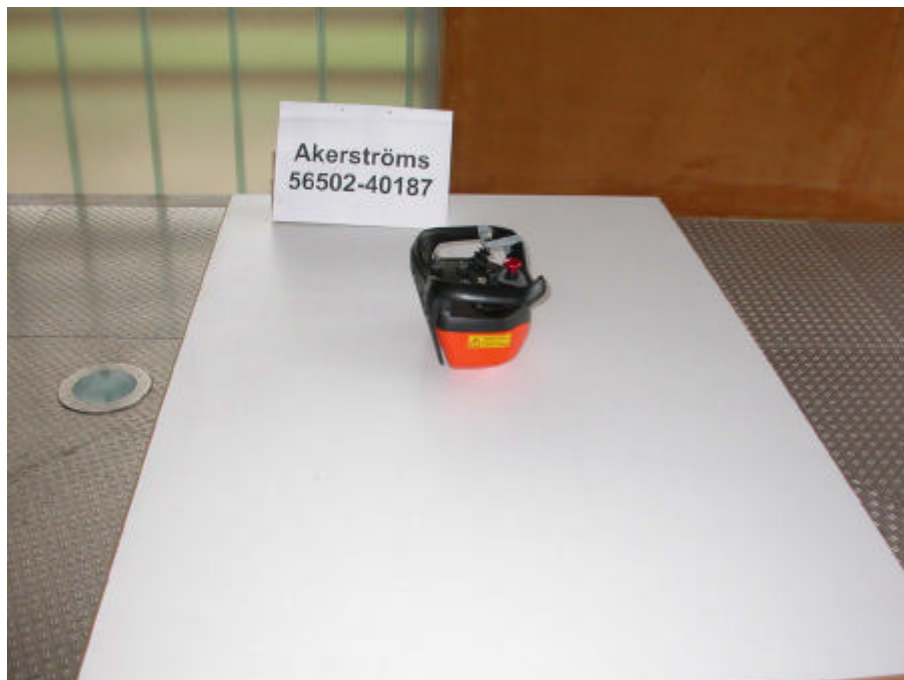

**7. List of Measurements**

| FCC Part 15    |                             |  |               |
|----------------|-----------------------------|--|---------------|
| Section(s):    | Test                        |  | Result        |
| 15.205         |                             |  |               |
|                |                             |  |               |
| 15.207         | Restricted Bands            |  | Pass          |
| 15.231 (a) (1) | AC powerline emissions      |  | Not aplicable |
| 15.231 (b)     | Periodic operation          |  | Pass          |
| 15.231 (b)     | Duty Cycle Correction       |  | Not aplicable |
| 15.231 (b)     | Field strength of emissions |  | Pass          |
| 15.231 (c)     | Bandwidth of emissions      |  | Pass          |
|                |                             |  |               |

## Field strength of emissions

|                           |                                                                                                                                                                           |                                                  |                                                         |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|---------------------------------------------------------|
| Rules and Specifications: | 15.231 (b) Radiated Emission Limits                                                                                                                                       |                                                  |                                                         |
| Guide:                    | ANSI C63.4                                                                                                                                                                |                                                  |                                                         |
| Limit:                    | In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under Section 15.231 shall not exceed the following: |                                                  |                                                         |
|                           | Fundamental Frequency (MHz)                                                                                                                                               | Field Strength of Fundamental (microvolts/meter) | Field Strength of Spurious Emissions (microvolts/meter) |
|                           | 40.66 – 40.70                                                                                                                                                             | 2.250                                            | 225                                                     |
|                           | 70 – 130                                                                                                                                                                  | 1.250                                            | 125                                                     |
|                           | 130 - 174                                                                                                                                                                 | 1.250 to 3.750**                                 | 125 to 375 **                                           |
|                           | 174 - 260                                                                                                                                                                 | 3.750                                            | 375                                                     |
|                           | 260 – 470                                                                                                                                                                 | 3750 to 12.500**                                 | 375 to 1250 **                                          |
|                           | above 470                                                                                                                                                                 | 12.500                                           | 1250                                                    |

\*\* linear interpolations

|            |                                                                 |
|------------|-----------------------------------------------------------------|
| Test Site: | Open Area Test Site (< 1 GHz), Fully anechoic chamber (> 1 GHz) |
| Distance:  | 3 Meter                                                         |

| Frequency (MHz) | Detector | Antenna Polarization | Analyzer Reading (dBμV) | Antenna Correction (dB/m) | Duty Cycle Correction (dB/m) | Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|----------------------|-------------------------|---------------------------|------------------------------|-------------------------|----------------|-------------|
| 434.65          | PK       | horizontal           | 60.6                    | 19.50                     | 0                            | 80.10                   | 80.85          | -0.8        |
| 869.30          | QP       | horizontal           | 18.20                   | 27.30                     | 0                            | 45.50                   | 60.85          | -15.4       |
| 1301.00         | PK       | horizontal           | 14.8                    | 27.82                     | 0                            | 42.62                   | 60.85          | -18.2       |
| 1735.00         | PK       | horizontal           | 6.06                    | 29.68                     | 0                            | 35.74                   | 60.85          | -25.1       |
| 3478.00         | PK       | horizontal           | 11.98                   | 35.86                     | 0                            | 47.84                   | 60.85          | -13.0       |
| 3912.00         | PK       | vertical             | 13.39                   | 37.11                     | 0                            | 50.50                   | 60.85          | -10.4       |

\*\*\* = All emissions showed more than 20 dB margin to the limit

A negative value for Margin indicates, that the limit is kept.

### Sample calculation of erp values:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Analyzer Reading (dB}\mu\text{V)} + \text{Antenna Correction (dB/m)} + \text{Duty Cycle Correction (dB)}$$

|               |      |
|---------------|------|
| Test Results: | Pass |
|---------------|------|

### Duty Cycle Correction

|                           |                                                                                                                                                                                                                                                                   |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rules and Specifications: | 15.231 (b) (2) Limits on the Field Strength of Emissions                                                                                                                                                                                                          |
| Guide:                    | ANSI C63.4                                                                                                                                                                                                                                                        |
| ANSI C63.4                | When average detector function limits are specified for a pulse modulated transmitter, the average level of emissions may be found by measuring the peak levels of the emissions and correcting them with the duty cycle according to ANSI C64.4, section I4 (10) |

$$Duty\ Cycle\ Correction[dB] = 20 \cdot \log\left(\frac{Sum of the Pulse Widths}{100ms}\right) = -dB$$

## Bandwidth of Emission

|                           |                                                                                                                                                                                                                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rules and Specifications: | 15.231 c                                                                                                                                                                                                                                                                                                               |
| Guide:                    | ANSI C63.4                                                                                                                                                                                                                                                                                                             |
| Limit:                    | The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB from the modulated carrier |

|               |      |
|---------------|------|
| Test Results: | Pass |
|---------------|------|



Comment A: Ak40187 OBW  
Date: 1.APR.2004 16:33:42

## 8. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

|                                     |                          |                                                                                                                                                                             |                  |
|-------------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <input checked="" type="checkbox"/> | FCC Part 2               | Code of Federal Regulations Part 2<br>Frequency allocation and radio treaty matters;<br>General rules and regulations                                                       | October 01, 1999 |
| <input type="checkbox"/>            | FCC Part 15<br>Subpart A | Code of Regulations Part 15 (Radio Frequency<br>Devices), Subpart A (General) of the Federal<br>Communication Commission (FCC)                                              | May 30, 2002     |
| <input type="checkbox"/>            | FCC Part 15<br>Subpart B | Code of Regulations Part 15 (Radio Frequency<br>Devices), Subpart B (Unintentional Radiators) of<br>the Federal Communication Commission (FCC)                              | May 30, 2002     |
| <input checked="" type="checkbox"/> | FCC Part 15<br>Subpart C | Code of Regulations Part 15 (Radio Frequency<br>Devices), Subpart C (Intentional Radiators) of the<br>Federal Communication Commission (FCC)                                | May 30, 2002     |
| <input type="checkbox"/>            | FCC Part 74<br>Subpart H | Code of Regulations Part 15 (Radio Frequency<br>Devices), Subpart H (Low Power Auxiliary<br>Stations) of the Federal Communication<br>Commission (FCC)                      | October 20, 1997 |
| <input checked="" type="checkbox"/> | ANSI C63.4               | American National Standard for Methods of<br>Measurement of Radio-Noise Emissions from<br>Low-Voltage Electrical and Electronic Equipment<br>in the Range of 9 kHz - 40 GHz | October, 1992    |
| <input type="checkbox"/>            | RSS-210                  | Radio Standards Specification RSS-210 Issue 5<br>for Low Power Licence-Exempt<br>Radiocommunication Devices of Industry Canada                                              | November, 2001   |


## Charts taken during testing

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|                                                                         |                                                                                |
|-------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                                 | Comment:<br>- TX mode<br>- EUT in horizontal position - rear side on table (1) |
| Serial no.:<br><b>#1</b>                                                |                                                                                |
| Applicant:<br><b>Akerströms Björbo AB</b>                               |                                                                                |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                   |                                                                                |
| Tested on:<br><b>Test distance 3 metres<br/>Horizontal Polarization</b> |                                                                                |
| Date of test:<br><b>03/23/2004</b>                                      | Operator:<br><b>T. Eberl</b>                                                   |
| Test performed:<br><b>automatically</b>                                 | File name:<br><b>default.emi</b>                                               |

|                          |                                            |
|--------------------------|--------------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>Selected by hand</b> |
|--------------------------|--------------------------------------------|

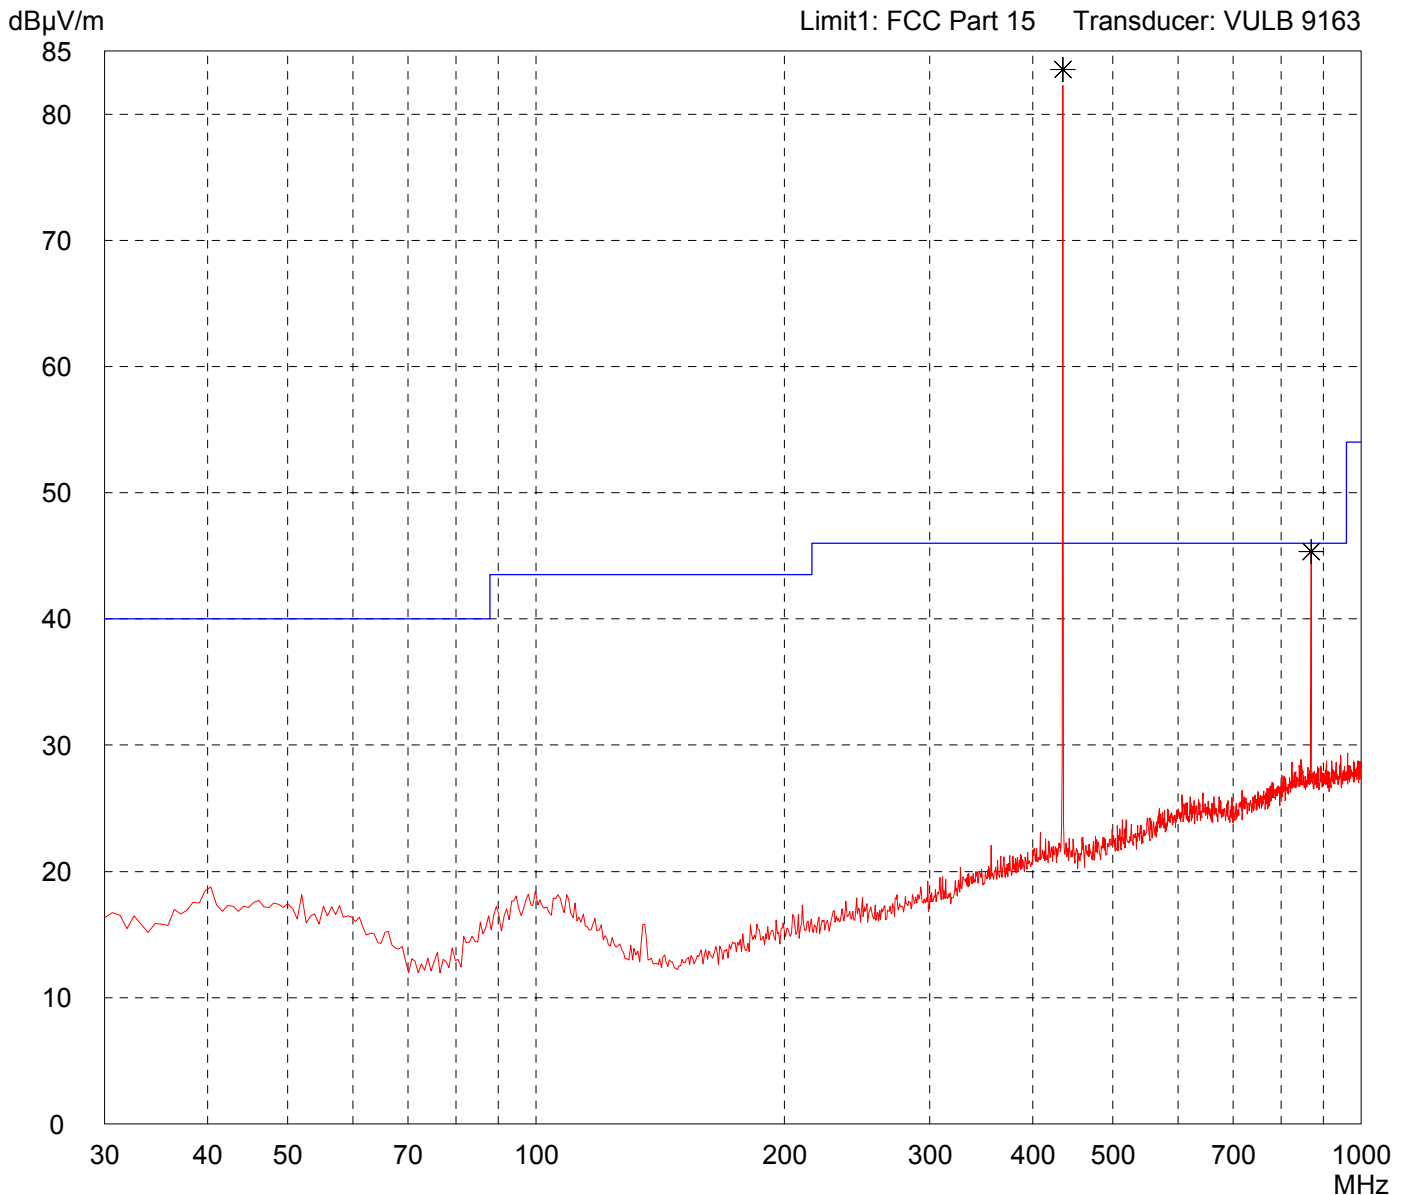


|                           |                                     |
|---------------------------|-------------------------------------|
| Result:<br><b>Prescan</b> | Project file:<br><b>56502-40187</b> |
|                           | Page    of    Pages                 |

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|                                                                         |                                                                                 |
|-------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                                 | Comment:<br>- TX mode<br>- EUT in horizontal position - right side on table (2) |
| Serial no.:<br><b>#1</b>                                                |                                                                                 |
| Applicant:<br><b>Akerströms Björbo AB</b>                               |                                                                                 |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                   |                                                                                 |
| Tested on:<br><b>Test distance 3 metres<br/>Horizontal Polarization</b> |                                                                                 |
| Date of test:<br><b>03/23/2004</b>                                      | Operator:<br><b>T. Eberl</b>                                                    |
| Test performed:<br><b>automatically</b>                                 | File name:<br><b>default.emi</b>                                                |

|                          |                                        |
|--------------------------|----------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>10 dB Margin</b> |
|                          | <b>8 Subranges</b>                     |

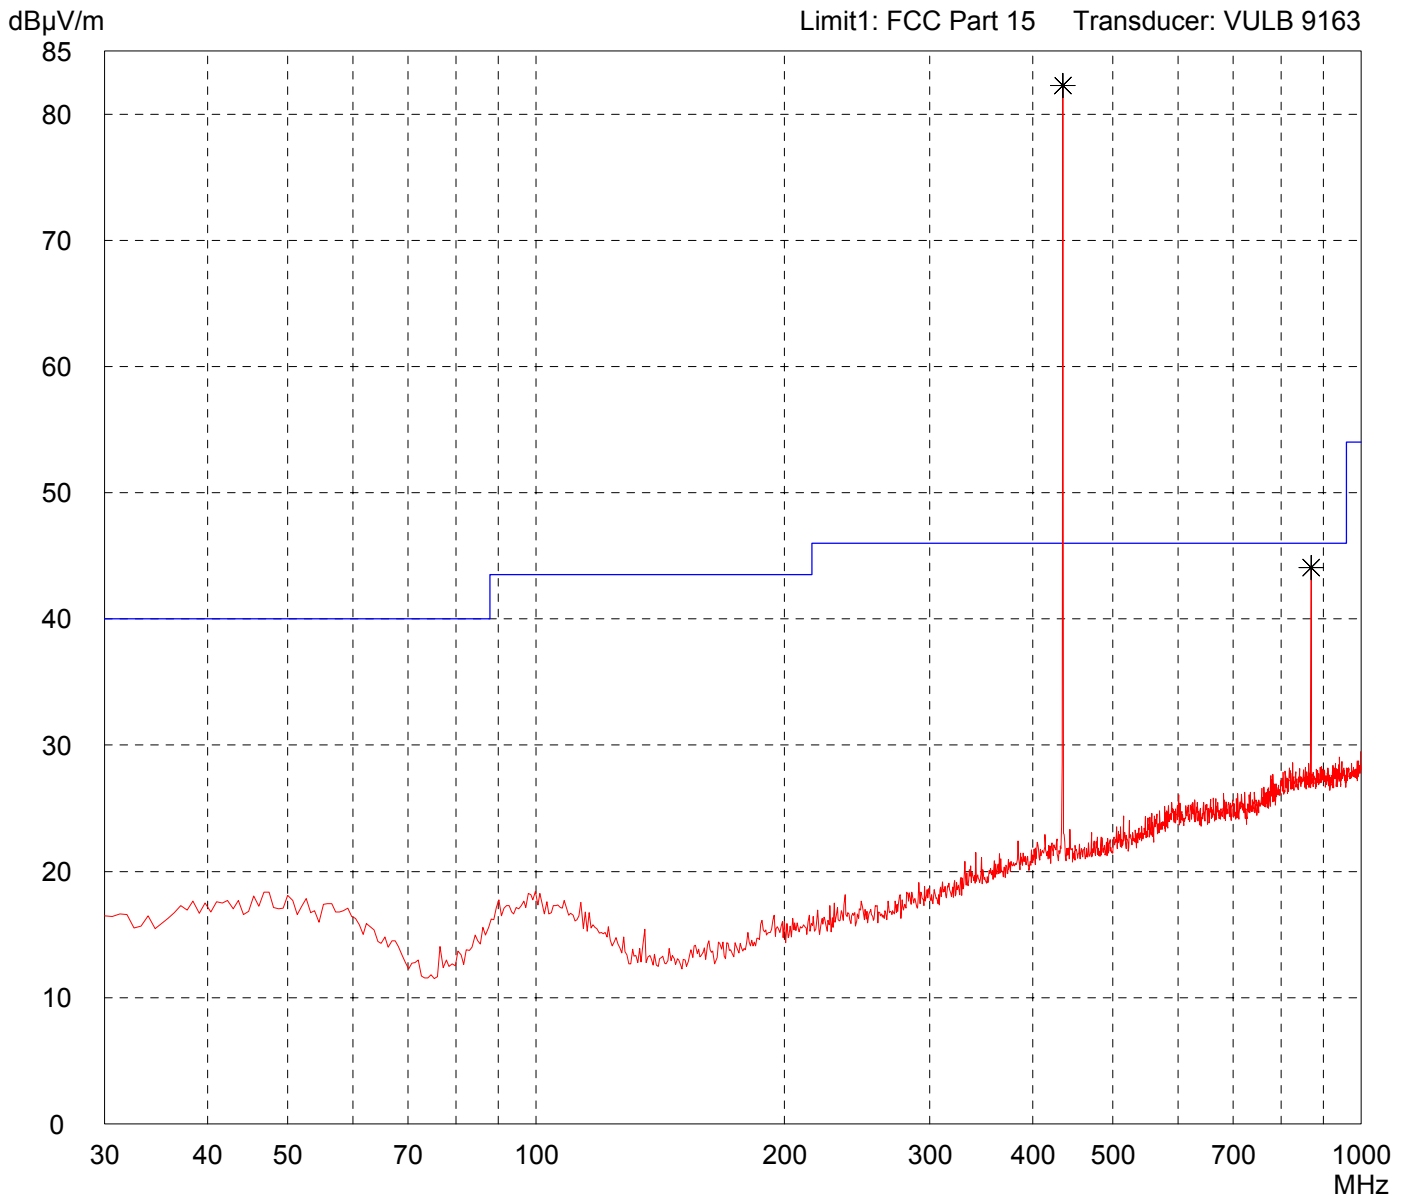


|                           |                                     |
|---------------------------|-------------------------------------|
| Result:<br><b>Prescan</b> | Project file:<br><b>56502-40187</b> |
|                           | Page    of    Pages                 |

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|                                                                         |                                                         |
|-------------------------------------------------------------------------|---------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                                 | Comment:<br>- TX mode<br>- EUT in vertical position (3) |
| Serial no.:<br><b>#1</b>                                                |                                                         |
| Applicant:<br><b>Akerströms Björbo AB</b>                               |                                                         |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                   |                                                         |
| Tested on:<br><b>Test distance 3 metres<br/>Horizontal Polarization</b> |                                                         |
| Date of test:<br><b>03/23/2004</b>                                      | Operator:<br><b>T. Eberl</b>                            |
| Test performed:<br><b>automatically</b>                                 | File name:<br><b>default.emi</b>                        |

|                          |                                        |
|--------------------------|----------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>10 dB Margin</b> |
|                          | <b>8 Subranges</b>                     |

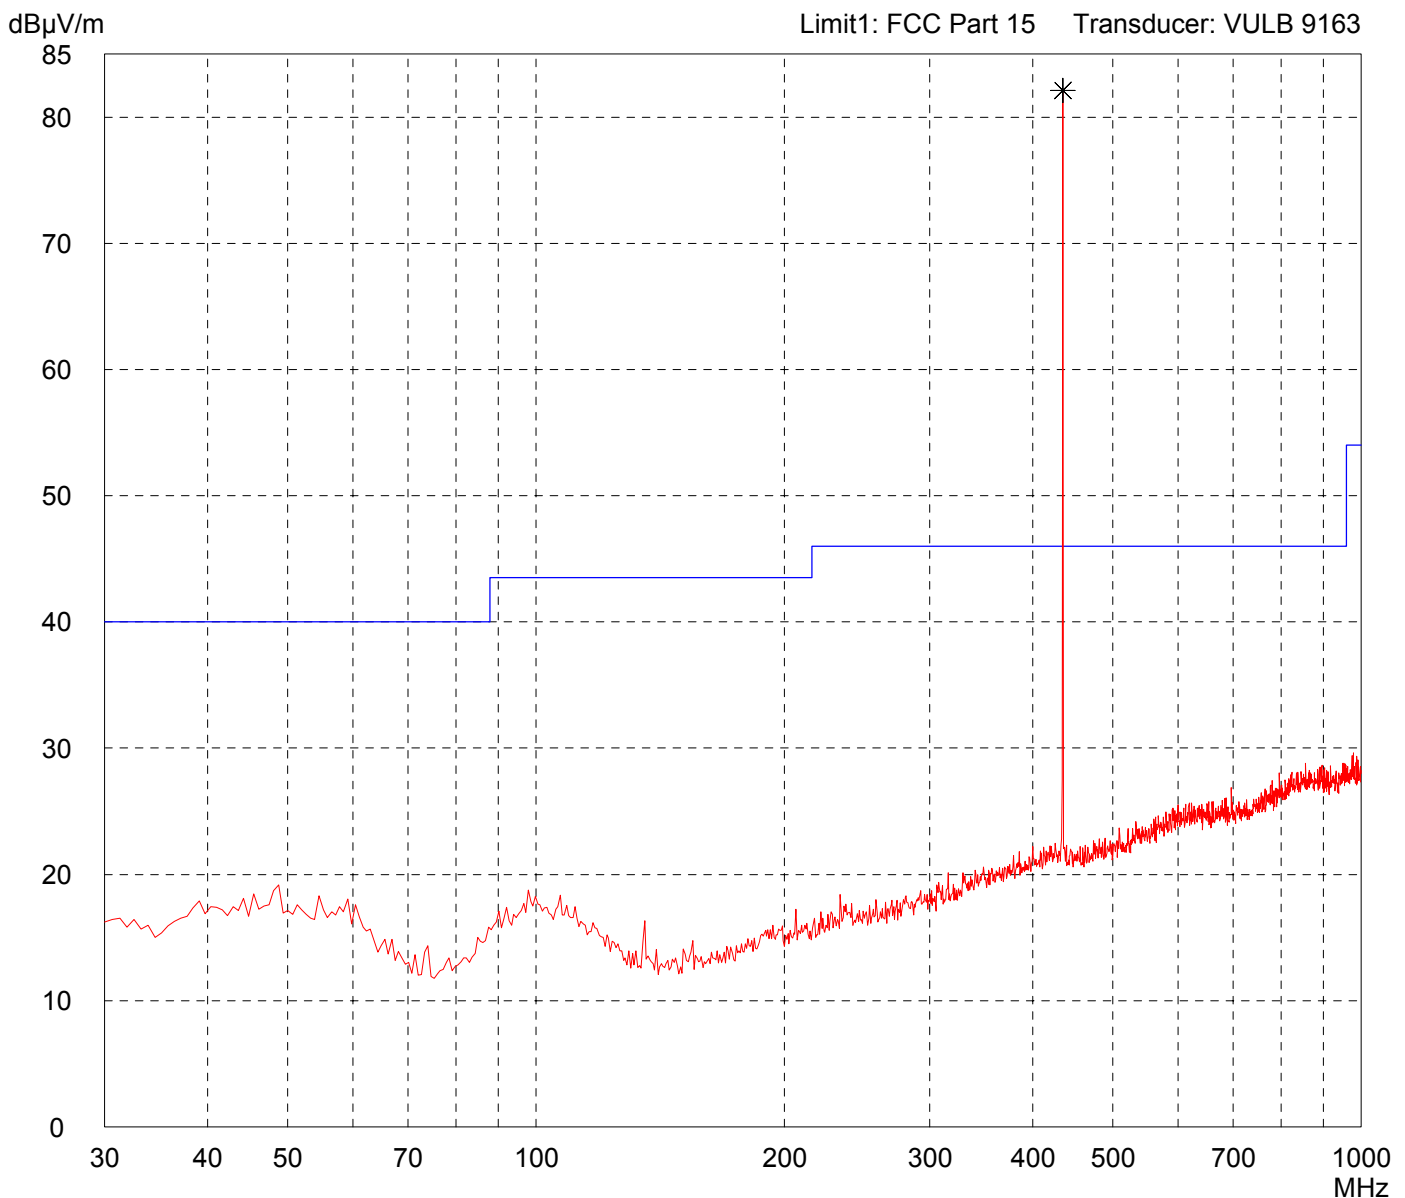


|                           |                                     |
|---------------------------|-------------------------------------|
| Result:<br><b>Prescan</b> | Project file:<br><b>56502-40187</b> |
|                           | Page    of    Pages                 |

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|                                                                       |                                                                                |
|-----------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                               | Comment:<br>- TX mode<br>- EUT in horizontal position - rear side on table (1) |
| Serial no.:<br><b>#1</b>                                              |                                                                                |
| Applicant:<br><b>Akerströms Björbo AB</b>                             |                                                                                |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                 |                                                                                |
| Tested on:<br><b>Test distance 3 metres<br/>Vertical Polarization</b> |                                                                                |
| Date of test:<br><b>03/23/2004</b>                                    | Operator:<br><b>T. Eberl</b>                                                   |
| Test performed:<br><b>automatically</b>                               | File name:<br><b>default.emi</b>                                               |

|                          |                                        |
|--------------------------|----------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>10 dB Margin</b> |
|                          | <b>8 Subranges</b>                     |

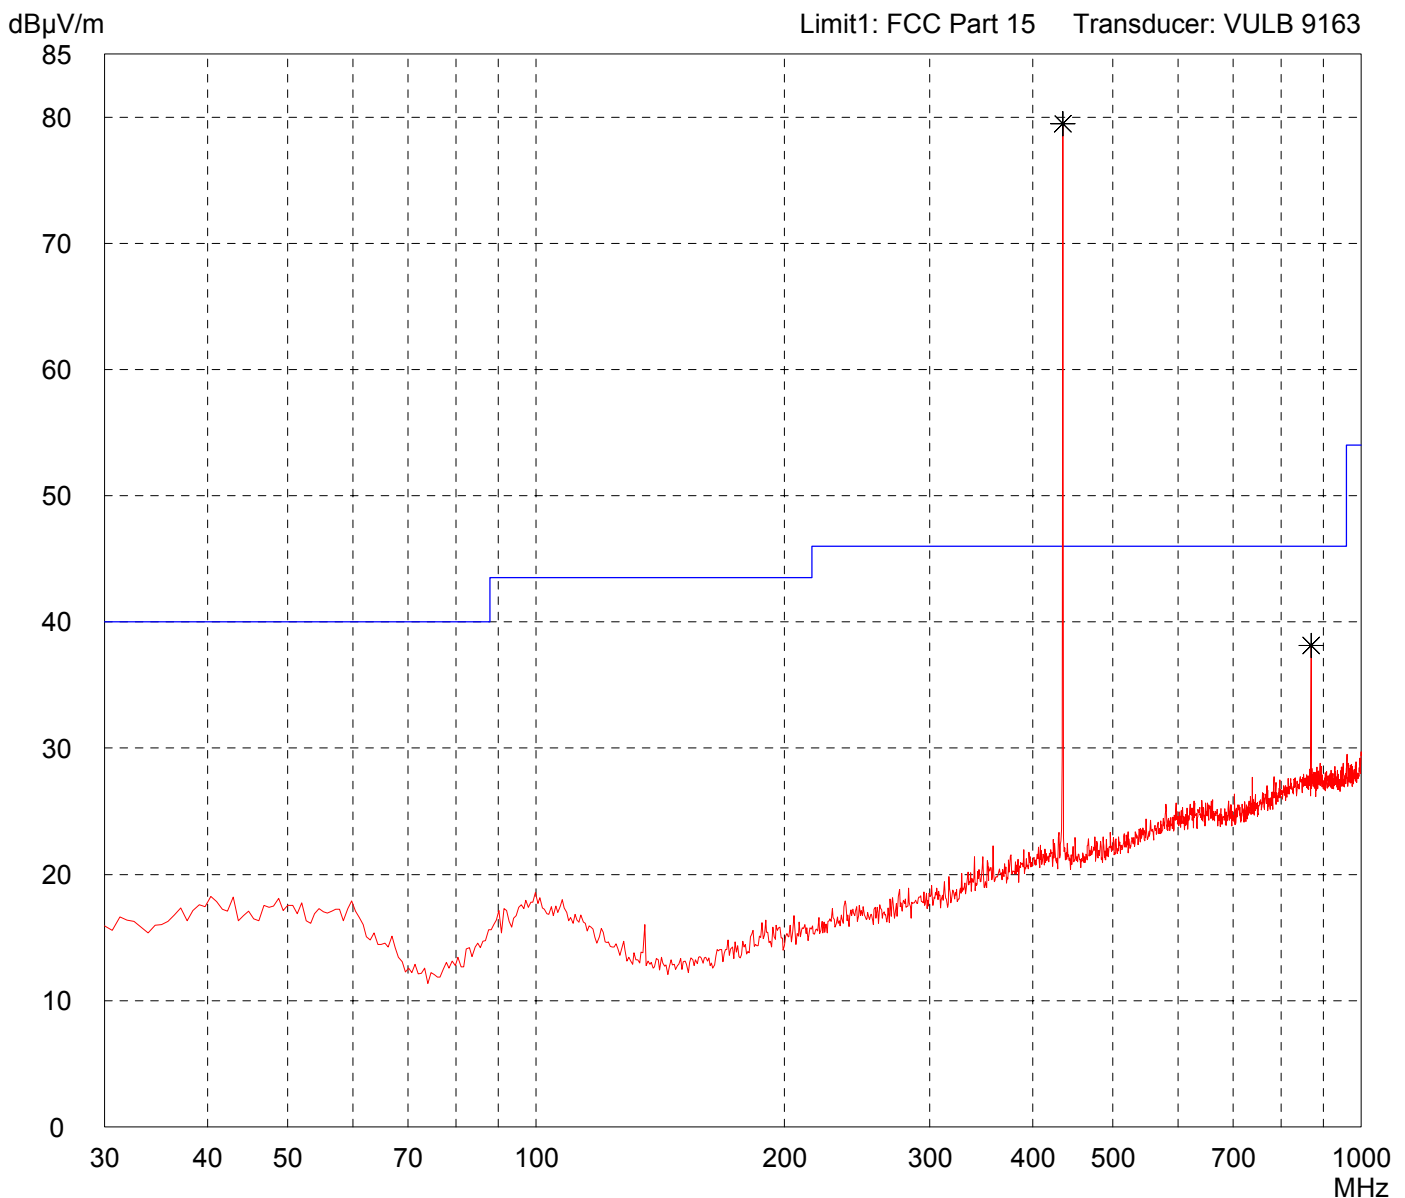


|                           |                                     |
|---------------------------|-------------------------------------|
| Result:<br><b>Prescan</b> | Project file:<br><b>56502-40187</b> |
|                           | Page    of    Pages                 |

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|                                                                       |                                                                                 |
|-----------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                               | Comment:<br>- TX mode<br>- EUT in horizontal position - right side on table (2) |
| Serial no.:<br><b>#1</b>                                              |                                                                                 |
| Applicant:<br><b>Akerströms Björbo AB</b>                             |                                                                                 |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                 |                                                                                 |
| Tested on:<br><b>Test distance 3 metres<br/>Vertical Polarization</b> |                                                                                 |
| Date of test:<br><b>03/23/2004</b>                                    | Operator:<br><b>T. Eberl</b>                                                    |
| Test performed:<br><b>automatically</b>                               | File name:<br><b>default.emi</b>                                                |

|                          |                                        |
|--------------------------|----------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>10 dB Margin</b> |
|                          | <b>8 Subranges</b>                     |

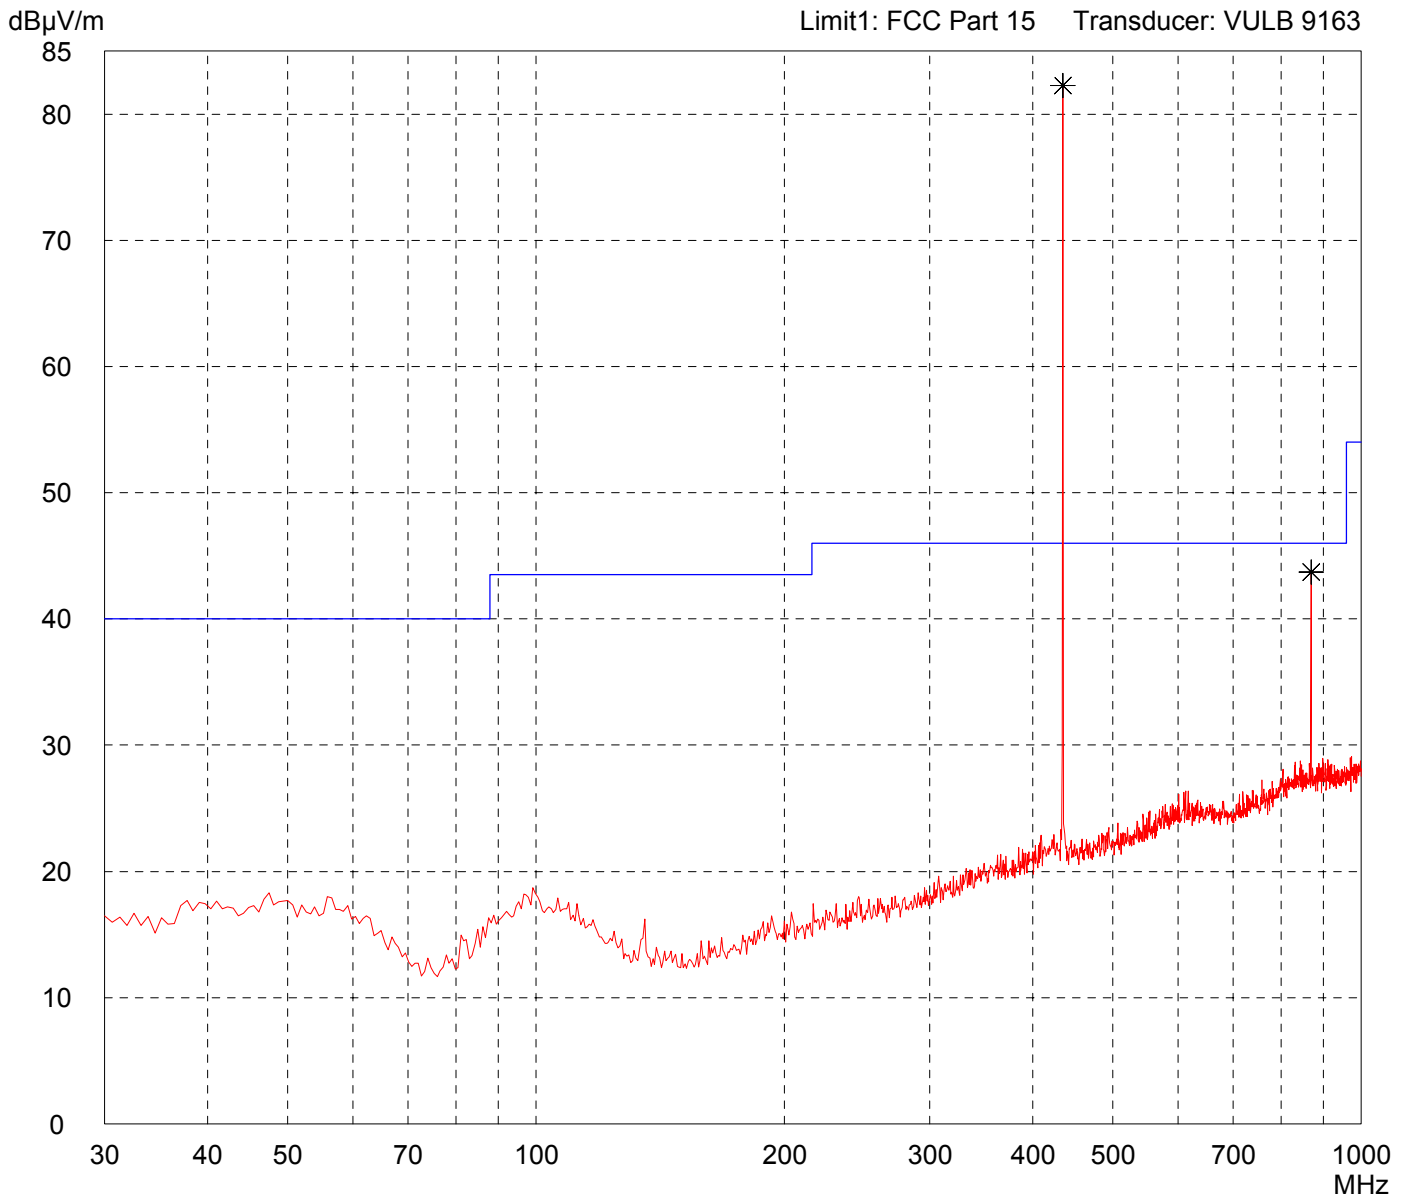


|                           |                                     |
|---------------------------|-------------------------------------|
| Result:<br><b>Prescan</b> | Project file:<br><b>56502-40187</b> |
|                           | Page    of    Pages                 |

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|                                                                       |                                                         |
|-----------------------------------------------------------------------|---------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                               | Comment:<br>- TX mode<br>- EUT in vertical position (3) |
| Serial no.:<br><b>#1</b>                                              |                                                         |
| Applicant:<br><b>Akerströms Björbo AB</b>                             |                                                         |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                 |                                                         |
| Tested on:<br><b>Test distance 3 metres<br/>Vertical Polarization</b> |                                                         |
| Date of test:<br><b>03/23/2004</b>                                    | Operator:<br><b>T. Eberl</b>                            |
| Test performed:<br><b>automatically</b>                               | File name:<br><b>default.emi</b>                        |

|                          |                                        |
|--------------------------|----------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>10 dB Margin</b> |
|                          | <b>8 Subranges</b>                     |

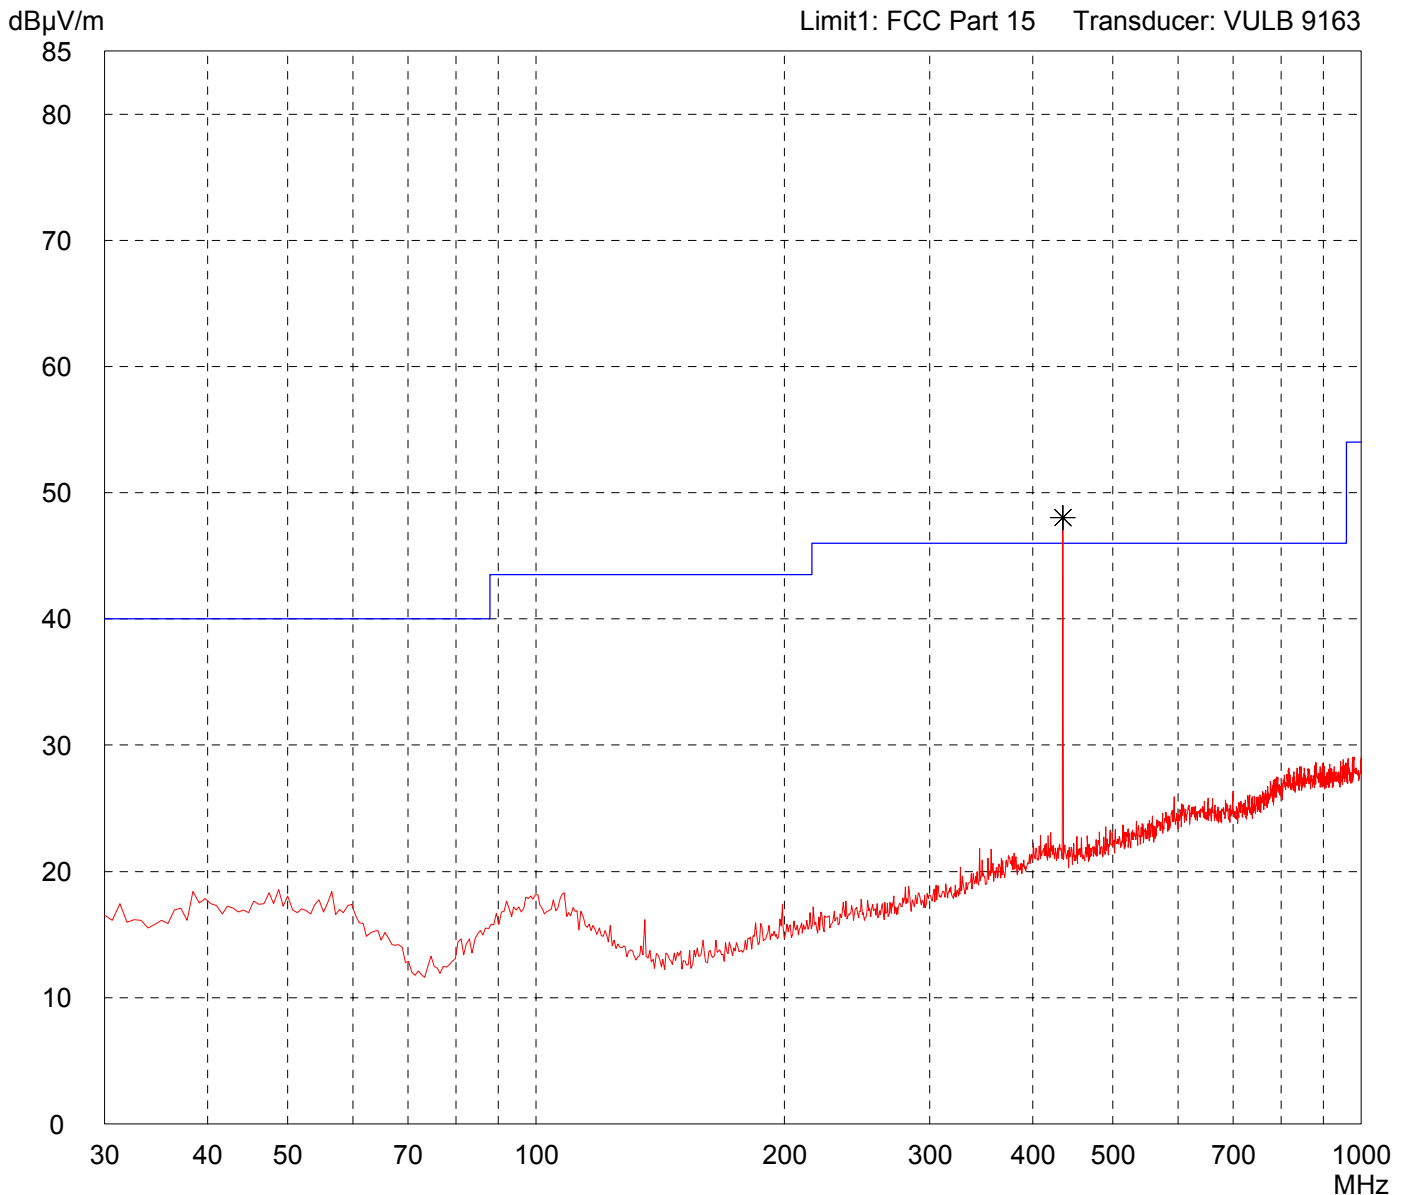


|                           |                                     |
|---------------------------|-------------------------------------|
| Result:<br><b>Prescan</b> | Project file:<br><b>56502-40187</b> |
|                           | Page    of    Pages                 |

# Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

|                                                                         |                                                                                |
|-------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                                 | Comment:<br>- TX mode<br>- EUT in horizontal position - rear side on table (1) |
| Serial no.:<br><b>#1</b>                                                |                                                                                |
| Applicant:<br><b>Akerströms Björbo AB</b>                               |                                                                                |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                   |                                                                                |
| Tested on:<br><b>Test distance 3 metres<br/>Horizontal Polarization</b> |                                                                                |
| Date of test:<br><b>03/23/2004</b>                                      | Operator:<br><b>T. Eberl</b>                                                   |
| Test performed:<br><b>automatically</b>                                 | File name:<br><b>default.emi</b>                                               |

|                          |                                            |
|--------------------------|--------------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>Selected by hand</b> |
|--------------------------|--------------------------------------------|

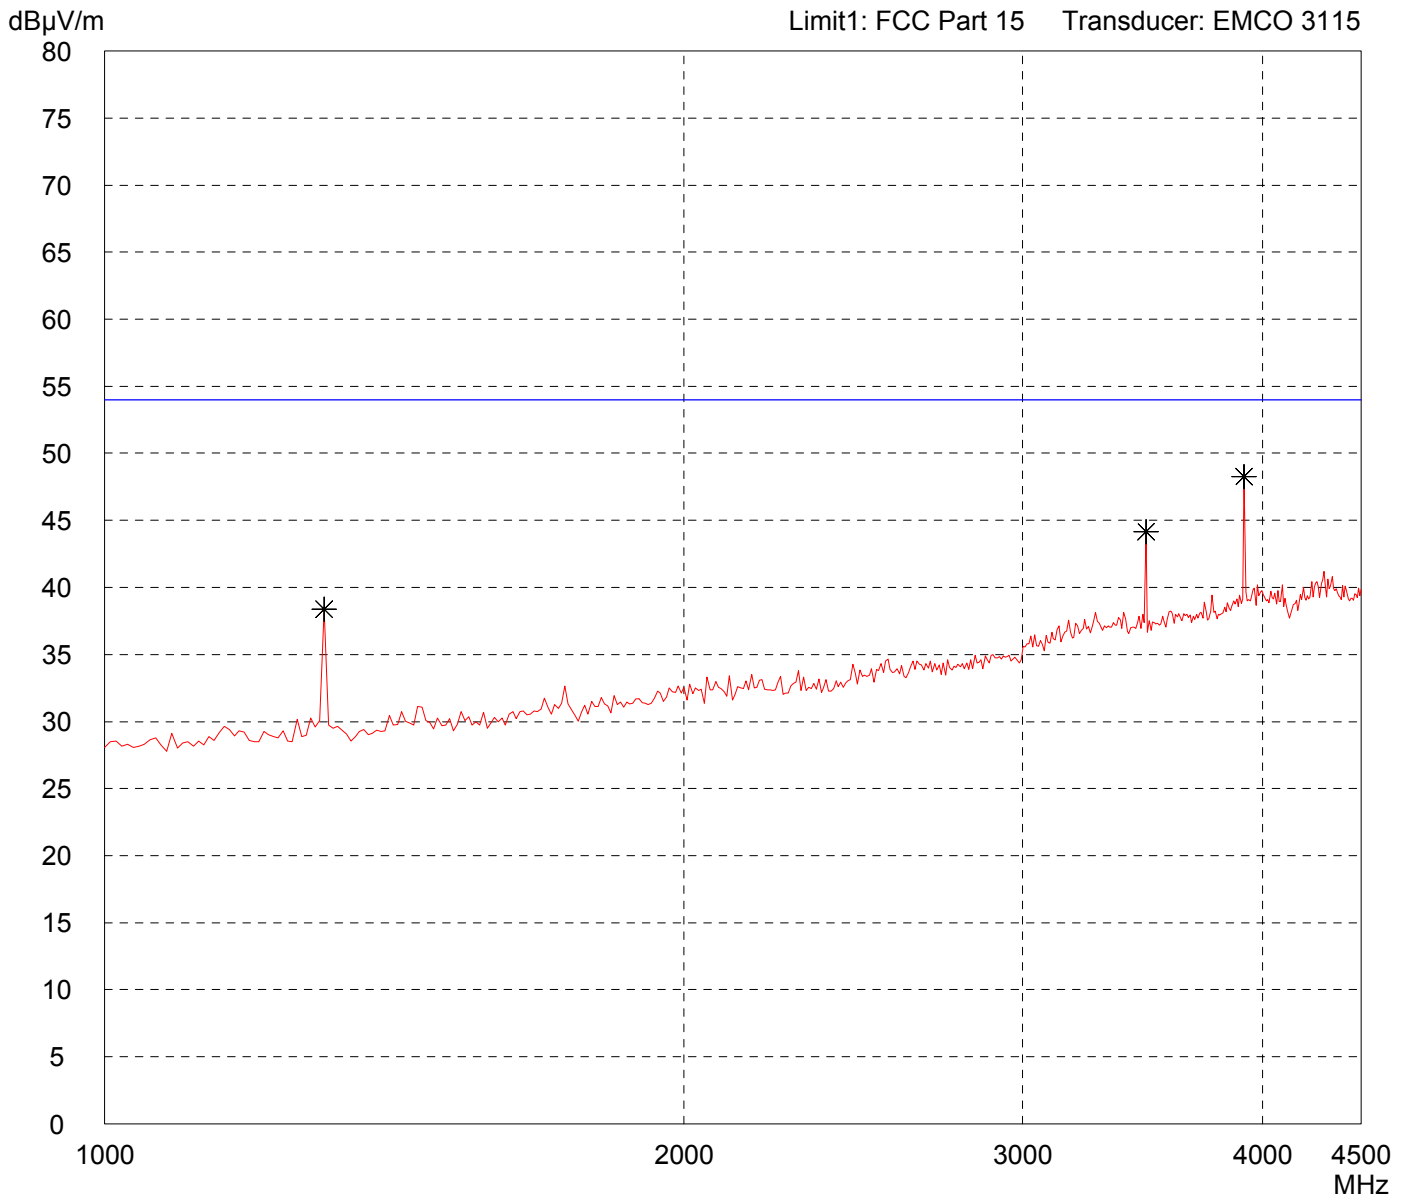


|                              |                                     |
|------------------------------|-------------------------------------|
| Result:<br><b>Limit kept</b> | Project file:<br><b>56502-40187</b> |
|                              | Page    of    Pages                 |

# Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

|                                                                         |                                                                                 |
|-------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                                 | Comment:<br>- TX mode<br>- EUT in horizontal position - right side on table (2) |
| Serial no.:<br><b>#1</b>                                                |                                                                                 |
| Applicant:<br><b>Akerströms Björbo AB</b>                               |                                                                                 |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                   |                                                                                 |
| Tested on:<br><b>Test distance 3 metres<br/>Horizontal Polarization</b> |                                                                                 |
| Date of test:<br><b>03/23/2004</b>                                      | Operator:<br><b>T. Eberl</b>                                                    |
| Test performed:<br><b>automatically</b>                                 | File name:<br><b>default.emi</b>                                                |

|                          |                                            |
|--------------------------|--------------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>Selected by hand</b> |
|--------------------------|--------------------------------------------|

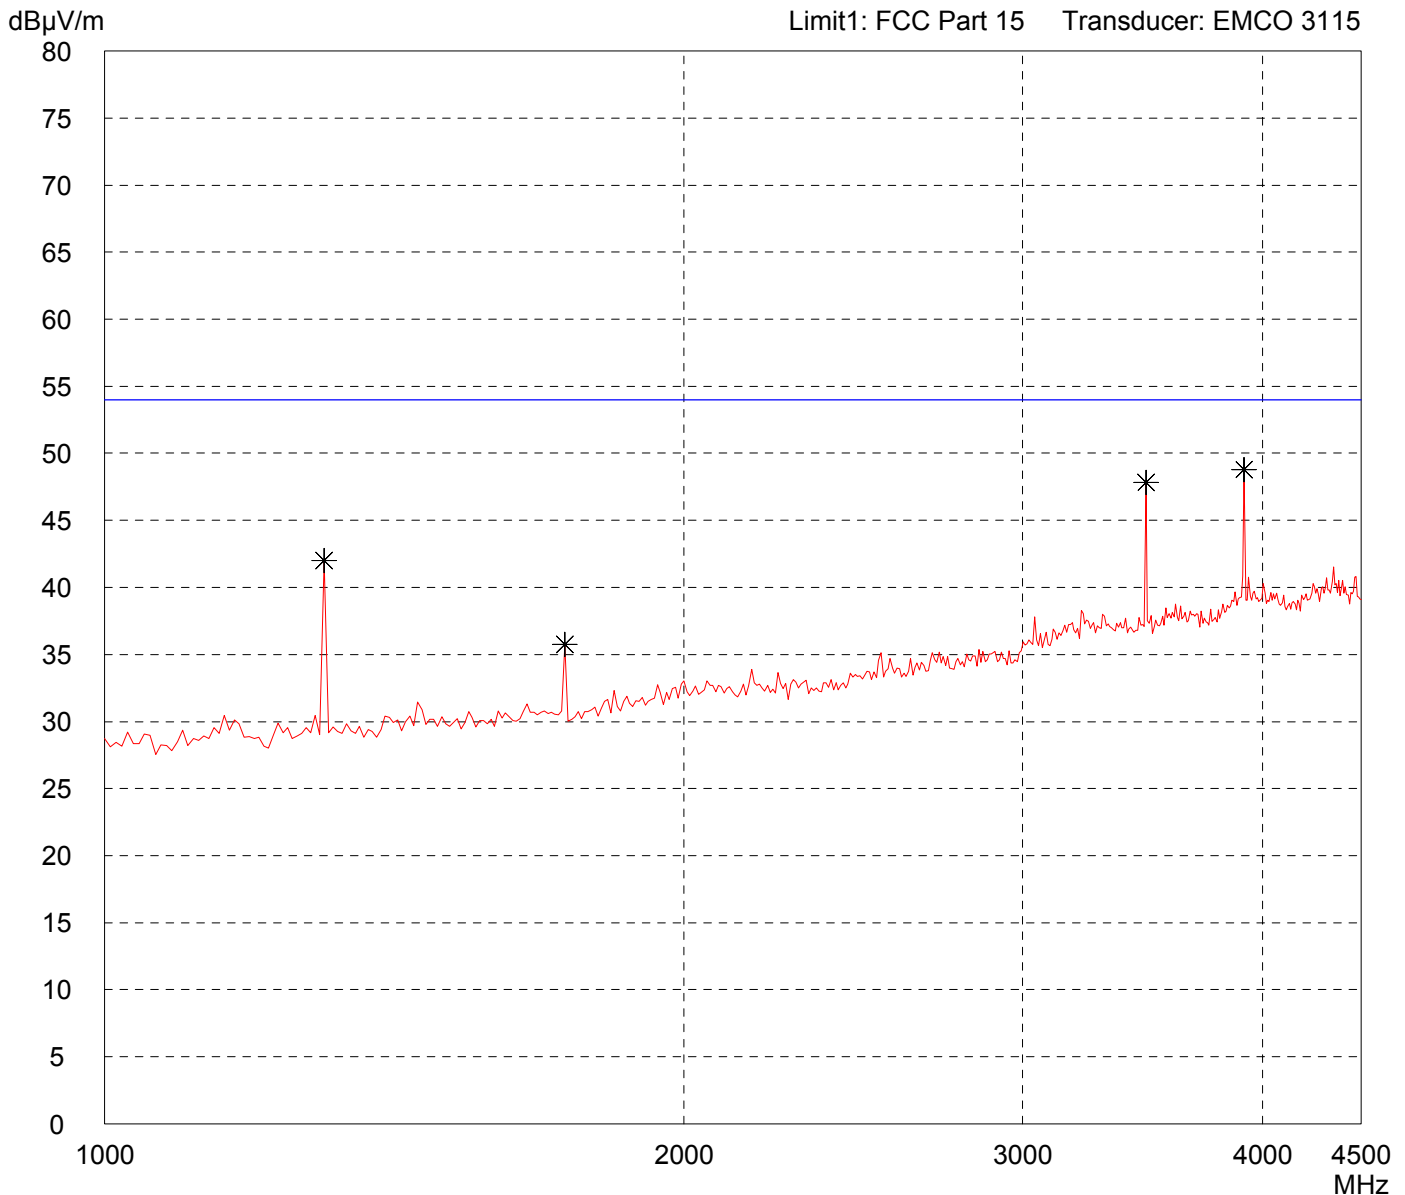


|                              |                                     |
|------------------------------|-------------------------------------|
| Result:<br><b>Limit kept</b> | Project file:<br><b>56502-40187</b> |
|                              | Page    of    Pages                 |

# Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

|                                                                         |                                                         |
|-------------------------------------------------------------------------|---------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                                 | Comment:<br>- TX mode<br>- EUT in vertical position (3) |
| Serial no.:<br><b>#1</b>                                                |                                                         |
| Applicant:<br><b>Akerströms Björbo AB</b>                               |                                                         |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                   |                                                         |
| Tested on:<br><b>Test distance 3 metres<br/>Horizontal Polarization</b> |                                                         |
| Date of test:<br><b>03/23/2004</b>                                      | Operator:<br><b>T. Eberl</b>                            |
| Test performed:<br><b>automatically</b>                                 | File name:<br><b>default.emi</b>                        |

|                          |                                            |
|--------------------------|--------------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>Selected by hand</b> |
|--------------------------|--------------------------------------------|

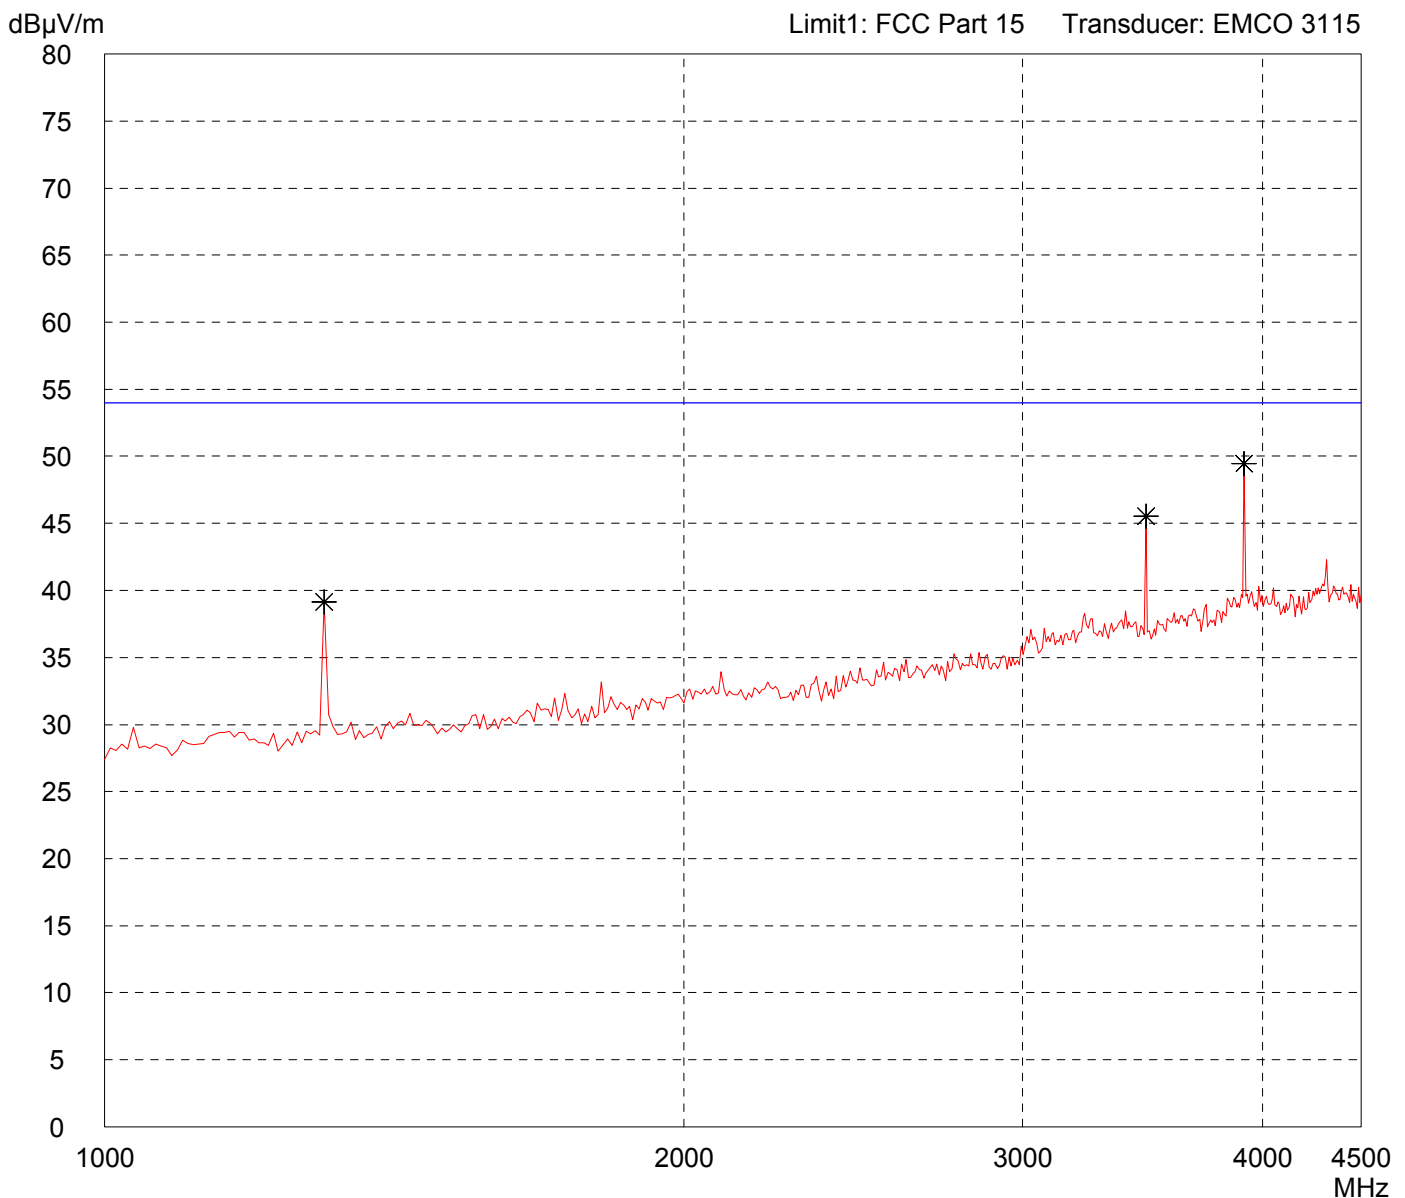


|                              |                                     |
|------------------------------|-------------------------------------|
| Result:<br><b>Limit kept</b> | Project file:<br><b>56502-40187</b> |
|                              | Page    of    Pages                 |

# Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

|                                                                       |                                                                                |
|-----------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                               | Comment:<br>- TX mode<br>- EUT in horizontal position - rear side on table (1) |
| Serial no.:<br><b>#1</b>                                              |                                                                                |
| Applicant:<br><b>Akerströms Björbo AB</b>                             |                                                                                |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                 |                                                                                |
| Tested on:<br><b>Test distance 3 metres<br/>Vertical Polarization</b> |                                                                                |
| Date of test:<br><b>03/23/2004</b>                                    | Operator:<br><b>T. Eberl</b>                                                   |
| Test performed:<br><b>automatically</b>                               | File name:<br><b>default.emi</b>                                               |

|                          |                                            |
|--------------------------|--------------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>Selected by hand</b> |
|--------------------------|--------------------------------------------|

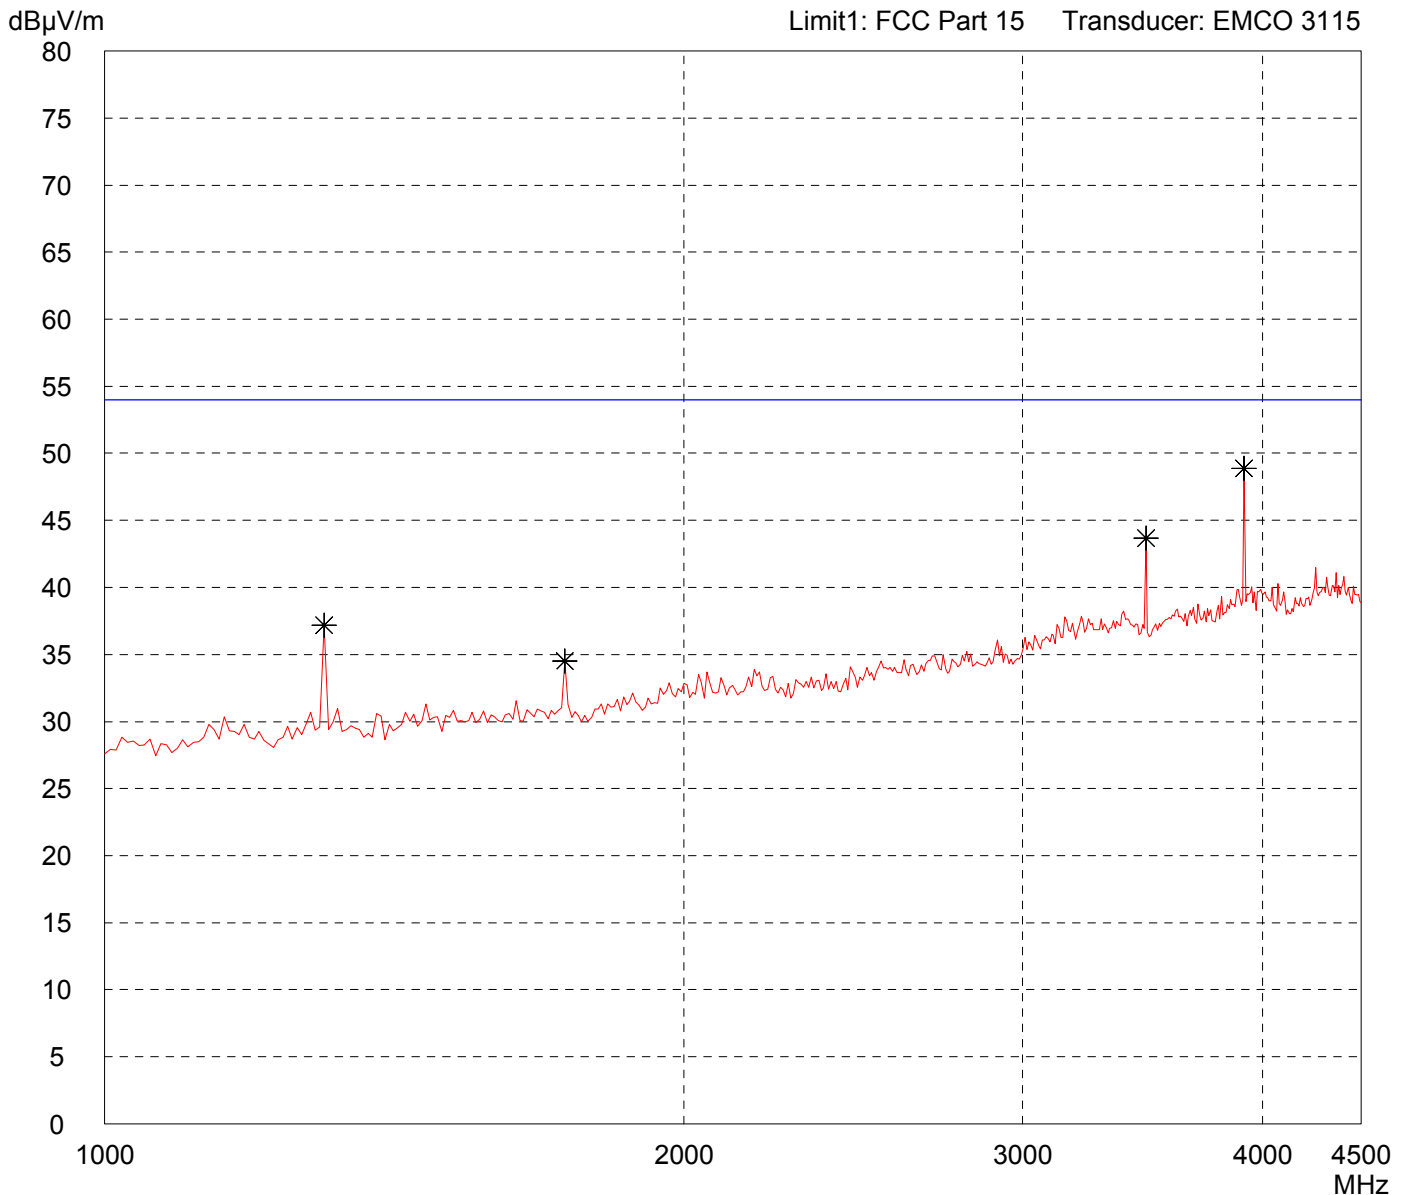


|                              |                                     |
|------------------------------|-------------------------------------|
| Result:<br><b>Limit kept</b> | Project file:<br><b>56502-40187</b> |
|                              | Page    of    Pages                 |

# Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

|                                                                       |                                                                                 |
|-----------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                               | Comment:<br>- TX mode<br>- EUT in horizontal position - right side on table (2) |
| Serial no.:<br><b>#1</b>                                              |                                                                                 |
| Applicant:<br><b>Akerströms Björbo AB</b>                             |                                                                                 |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                 |                                                                                 |
| Tested on:<br><b>Test distance 3 metres<br/>Vertical Polarization</b> |                                                                                 |
| Date of test:<br><b>03/23/2004</b>                                    | Operator:<br><b>T. Eberl</b>                                                    |
| Test performed:<br><b>automatically</b>                               | File name:<br><b>default.emi</b>                                                |

|                          |                                            |
|--------------------------|--------------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>Selected by hand</b> |
|--------------------------|--------------------------------------------|

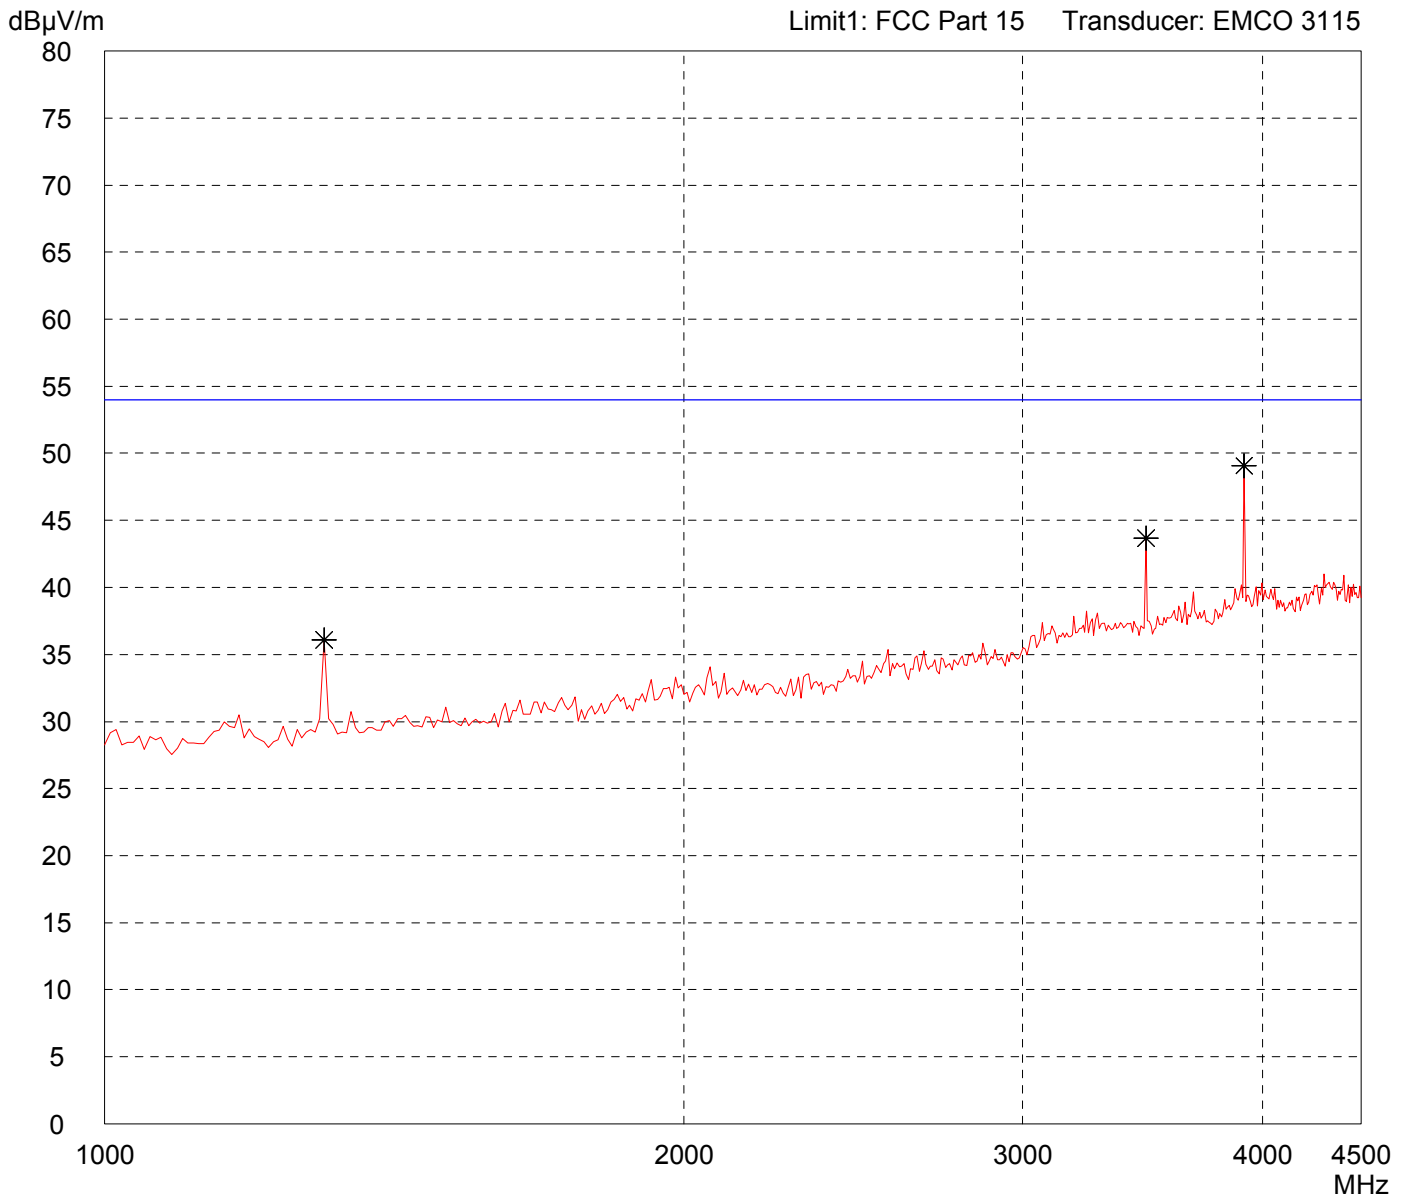


|                              |                                     |
|------------------------------|-------------------------------------|
| Result:<br><b>Limit kept</b> | Project file:<br><b>56502-40187</b> |
|                              | Page    of    Pages                 |

# Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

|                                                                       |                                                         |
|-----------------------------------------------------------------------|---------------------------------------------------------|
| Model:<br><b>MC83XX</b>                                               | Comment:<br>- TX mode<br>- EUT in vertical position (3) |
| Serial no.:<br><b>#1</b>                                              |                                                         |
| Applicant:<br><b>Akerströms Björbo AB</b>                             |                                                         |
| Test site:<br><b>Fully anechoic room, cabin no. 2</b>                 |                                                         |
| Tested on:<br><b>Test distance 3 metres<br/>Vertical Polarization</b> |                                                         |
| Date of test:<br><b>03/23/2004</b>                                    | Operator:<br><b>T. Eberl</b>                            |
| Test performed:<br><b>automatically</b>                               | File name:<br><b>default.emi</b>                        |

|                          |                                            |
|--------------------------|--------------------------------------------|
| Detector:<br><b>Peak</b> | List of values:<br><b>Selected by hand</b> |
|--------------------------|--------------------------------------------|

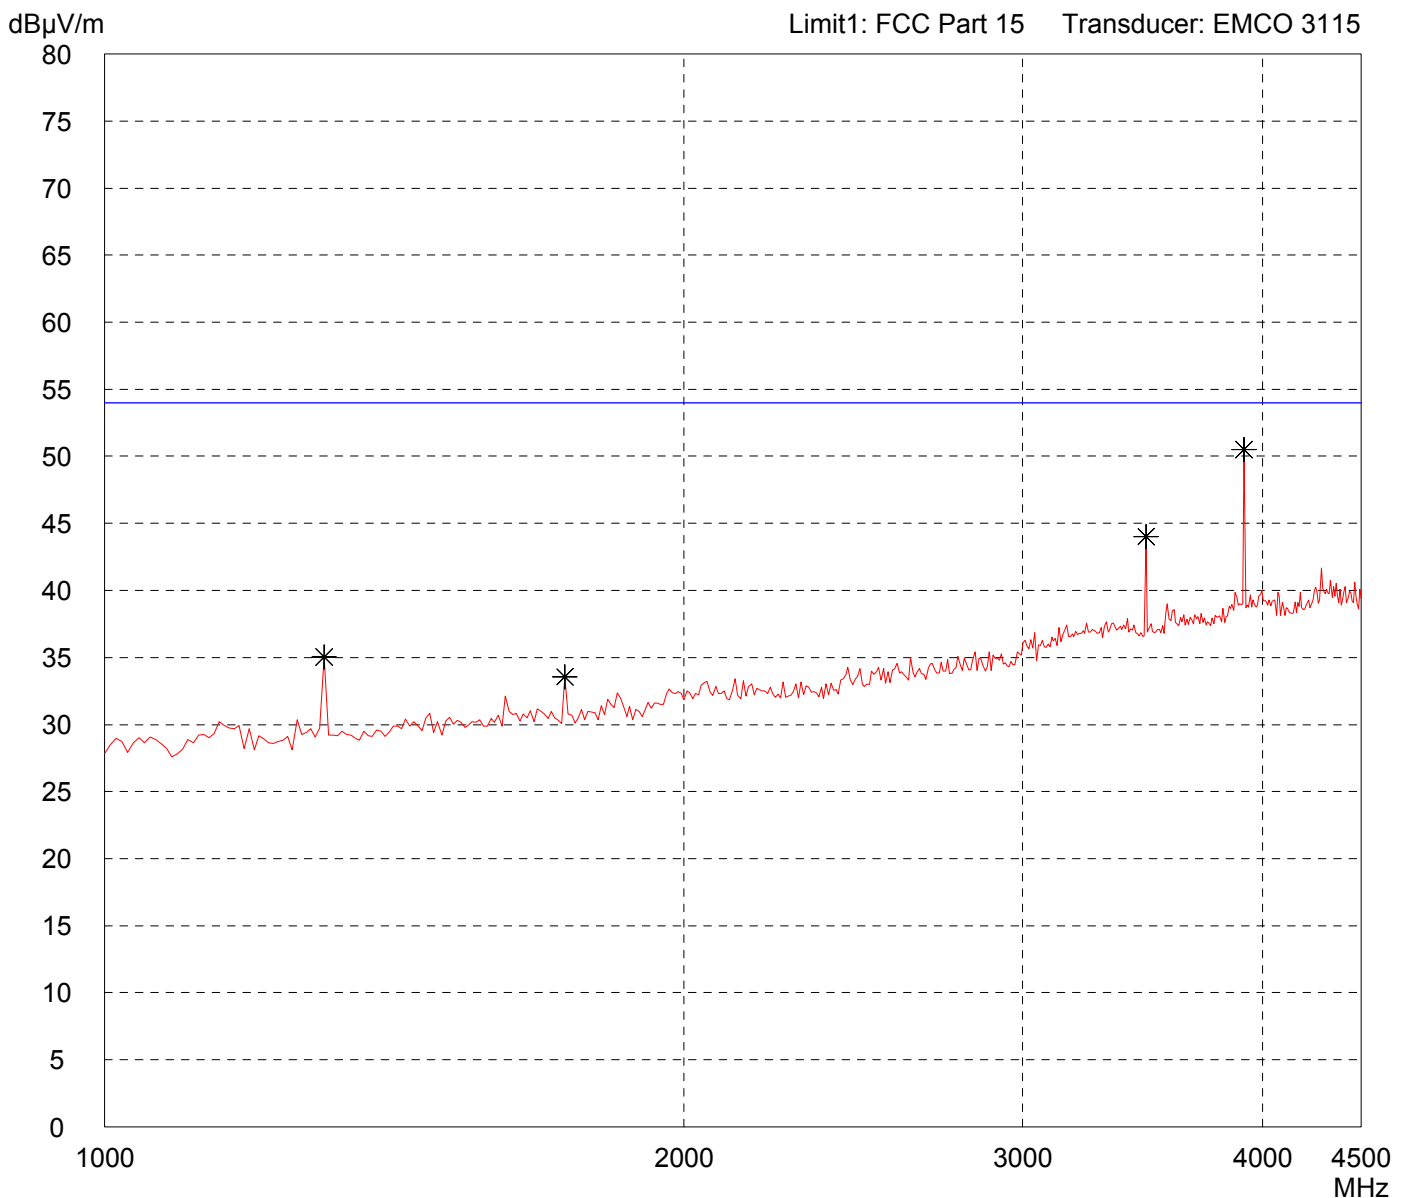

|                              |                                     |
|------------------------------|-------------------------------------|
| Result:<br><b>Limit kept</b> | Project file:<br><b>56502-40187</b> |
|                              | Page    of    Pages                 |