

## EMC Test Report

**#0300644FECB**

**Issued 11/07/03**

### **REGARDING THE FCC PART 15, SUBPART C [15.231E]**



### **CALLBUTTON MODEL VER-4054**

Prepared for:

Mr. Bob Wiser  
VERSUS Technology  
2600 Miller Creek Rd.  
Traverse City, MI 49684

Test Date(s):

October 13, November 4, 2003

data recorded by

witnessed by

\_\_\_\_\_  
Ted Chaffee, NCE

\_\_\_\_\_  
Bob Wiser

This report prepared by:

\_\_\_\_\_  
Ted Chaffee, NCE  
Lab Manager/Test Engineer, AHD

## **TABLE OF CONTENTS**

TABLE OF CONTENTS .....	2
Statements Concerning this Report .....	3
Statement Attesting to the Accuracy of the Data.....	4
Statement relating to FCC Public Notice 22504 .....	4
Measurement/Test Site Facility & Equipment .....	5
Test Site [2.948, 2.1033(b6)] .....	5
Measurement Equipment Used [2.947(d), 15.31(b)] .....	5
Environment.....	5
EUT Description .....	6
EUT Pictures.....	6
Tested Configuration /Setup: [2.1033(b8)] .....	10
Support Equipment & Cabling .....	10
Setup Pictures .....	10
Test Methodology: [2.1033(b6)] .....	13
Standards Applied to Test: [2.1033(b6)] .....	13
Variance from Test Procedure .....	14
Formulas and Sample Calculations:.....	15
Measurement Results.....	16
Summary:.....	16
Changes made to achieve compliance.....	16
Test Data [2.1033(b6)].....	17
Occupied Bandwidth [15.231(c)].....	17
Restricted Bands: [15.205] .....	18
Field Strength Measurements .....	19
Radiated Field Strength Measurements: [15.231(b), 15.205] .....	19
Radiated Field Strength Measurements .....	20
Modulation Characteristics and Duty Cycle Calculations .....	20
APPENDIX A .....	23
General Measurement Procedures .....	23
Line Conducted .....	23
Radiated.....	24
Cable Loss .....	25
Antenna Factors .....	26
AHD Endorsements .....	27

## **STATEMENTS CONCERNING THIS REPORT**

### **NVLAP Accreditation: NVLAP Lab Code 200129-0**

The scope of AHD accreditation is the test methods of:

- IEC/CISPR 22: Limits and methods measurement of radio disturbance characteristics of information technology equipment.
- FCC Method – 47 CFT Part 15: Digital Devices.
- AS/NZS 3548: Electromagnetic Interference – Limits and Methods of Measurement of Information Technology Equipment.
- IEC61000-4-2 and Amend.1: ElectroStatic Discharge Immunity

### **Test Data:**

This test report contains data covered by the scope of NVLAP accreditation.

### **Subcontracted Testing:**

This report does not contain data produced under subcontract.

### **Test Traceability:**

The calibration of all measuring and test equipment and the measured data using this equipment are traceable to the National Institute for Standards and Technology (NIST).

### **Limitations on results:**

The test results contained in this report relate only to the Item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require an evaluation to verify continued compliance.

### **Limitations on copying:**

This report shall not be reproduced, except in full, without the written approval of AHD.

### **Limitations of the report:**

This report shall not be used to claim product endorsement by NVLAP, FCC, or any agency of the US Government.

### **Statement of Test Results Uncertainty:**

Following the guidelines of NAMAS publication NIS81 and NIST Technical Note 1297, the Measurement Uncertainty at a 95% confidence level is determined to be:  $\pm 1.4$  dB

### **Retention of Records:**

For equipment verified to comply with FCC regulations, the manufacturer is obliged to retain the following records for two years following the manufacture of the equipment model tested.

1. This test report.
2. Design drawings/schematics of the equipment.
3. Record of design changes that may impact the compliance of the equipment.
4. A record of the procedures used to assure production compliance [audits].

## Statement Attesting to the Accuracy of the Data

The measurements declared in this report were made in accordance with the procedures indicated and the energy levels emitted by this equipment were found to be within the limits applicable.

The technical test data reported herein was performed or supervised by a NARTE Certified Engineer at a NVLAP accredited facility who attests to the accuracy of the data presented and whose signature appears below.

On the basis of the measurements made, the equipment tested is capable of operation in compliance with the requirements of Part 15 of the FCC Rules under normal use and maintenance.

signed \_\_\_\_\_  
Ted Chaffee, NCE  
Technical Mgr. / Test Eng., AHD

## Statement relating to FCC Public Notice 22504

This is to certify that no party to an application and/or filing is subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug abuse act of 1988, 21 U.S.C. 853.

Regards,

Ted Chaffee, NCE  
EMC Test Engineer/Technical Manager  
AHD  
tchaffee@ahde.com  
Tel/Fax: (616) 424-7014

## **MEASUREMENT/TEST SITE FACILITY & EQUIPMENT**

### **Test Site [2.948, 2.1033(b6)]**

The AHD test facility is centered on 9 acres of rural property near Sister Lakes, Michigan. The mailing address is 92723 M-152, Dowagiac, Michigan 49047. This test facility is NVLAP accredited (LabCode 200129-0). It has been fully described in a report filed with the FCC and Industry Canada. The report filed with the FCC is, dated November 5, 1996, was accepted by the FCC in a letter dated January 15, 1997, (31040/SIT 1300F2). The report filed with Industry Canada, dated August 11, 1998, was accepted via a letter dated September 1, 1998, (file:IC3161).

### **Measurement Equipment Used [2.947(d), 15.31(b)]**

Equipment Calibration	Model	S/N	Last Cal Date	Interval
HP EMI Receiver system	HP 8546A			
RF Filter Section	HP-85460A	3448A00283	27-Aug-03	12 months
RF Receiver Section	HP-85462A	3625A00342	27-Aug-03	12 months
EMCO BiconiLog Antenna	3142	1077	26-Aug-03	12 months
Solar LISN	8012-50-R-24-BNC	962137	25-Aug-03	12 months
Solar LISN	8012-50-R-24-BNC	962138	25-Aug-03	12 months
(LCI) Double shielded 50ohm Coax	RG58/U	920809	16-Sep-02	12 months
(3-M) Type 129FF Ultra Flex LowLoss	RG58/U	9910-12	23-May-03	6 months
(3-M) LMR-400 Ultra Flex	LMR400	9812-11	23-May-03	6 months
(10-M) Amelco 50ohm Coax	RG213/U	9903-10ab	23-May-03	6 months
50ohm Coax	RG223/U	9802302	16-Sep-02	12 months
Double Ridged Horn	ONO91202-2	A00329	17-Apr-01	36 months

### **Environment**

The test was performed with the equipment under test, and measurement equipment inside the all-weather enclosure. Ambient temperature was 22deg.C., the relative humidity 35%.

## **EUT DESCRIPTION**

**Description:** 434MHz low power transmitter. Wall mounted Call Button.

**Model:** VER-4054

**Serial/ID No.:** ---

**Manufacturer:** VERSUS Technology

**Details:** A pre-production unit  
EUT is secured to a plastic wall mount cover which will be installed into a blank wall utility box.

Small PCB- TX board.

2-layer printed circuit board

3.58 MHz Oscillator

433.9 MHz Resonator circuit

operating frequency is approximately 434MHz

Large PCB – Antenna board.

2-layer printed circuit board.

Antenna trace is 'L' pattern

Connector

¼" phone jack. Connects cable to a momentary contact switch


3-volt Lithium battery is power source


## **EUT Pictures**

VER-4054 -- Cover view	page	7
VER-4054 -- Battery box view	page	8
VER-4054 -- Transmit Board uncovered	page	9

**VER-4054 - COVER VIEW**

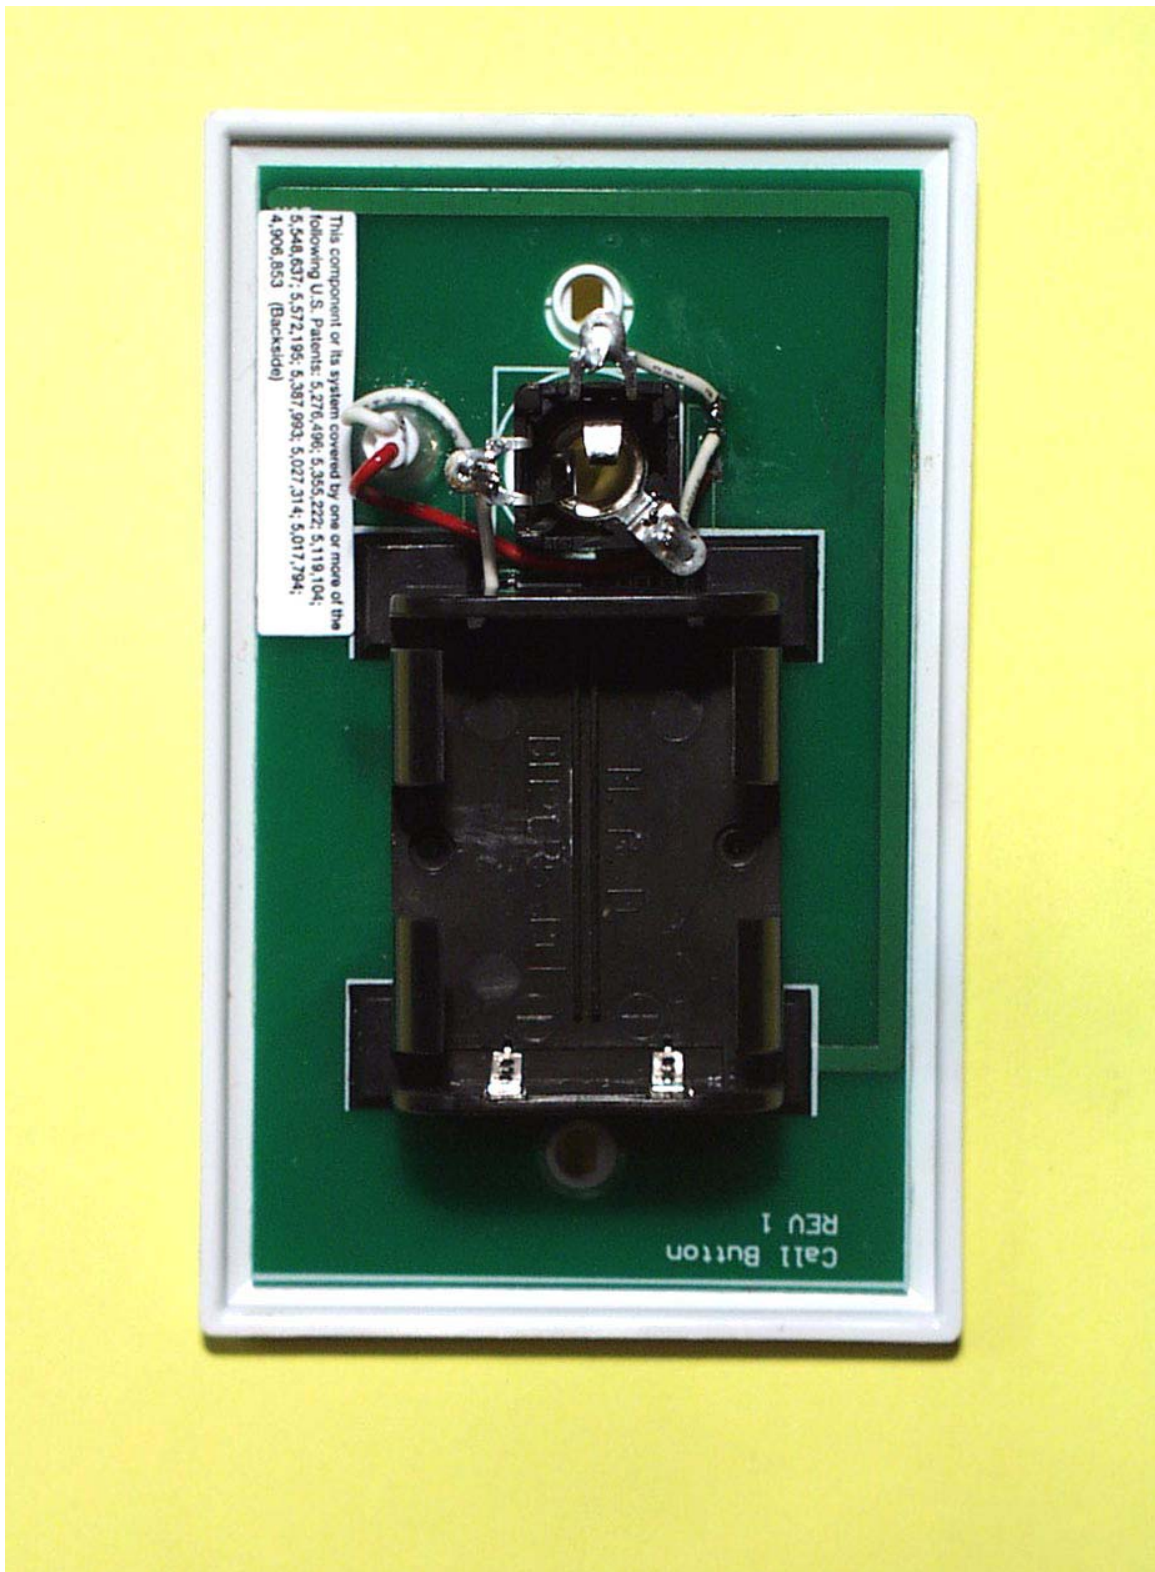


**VER-4054 - BATTERY BOX VIEW**

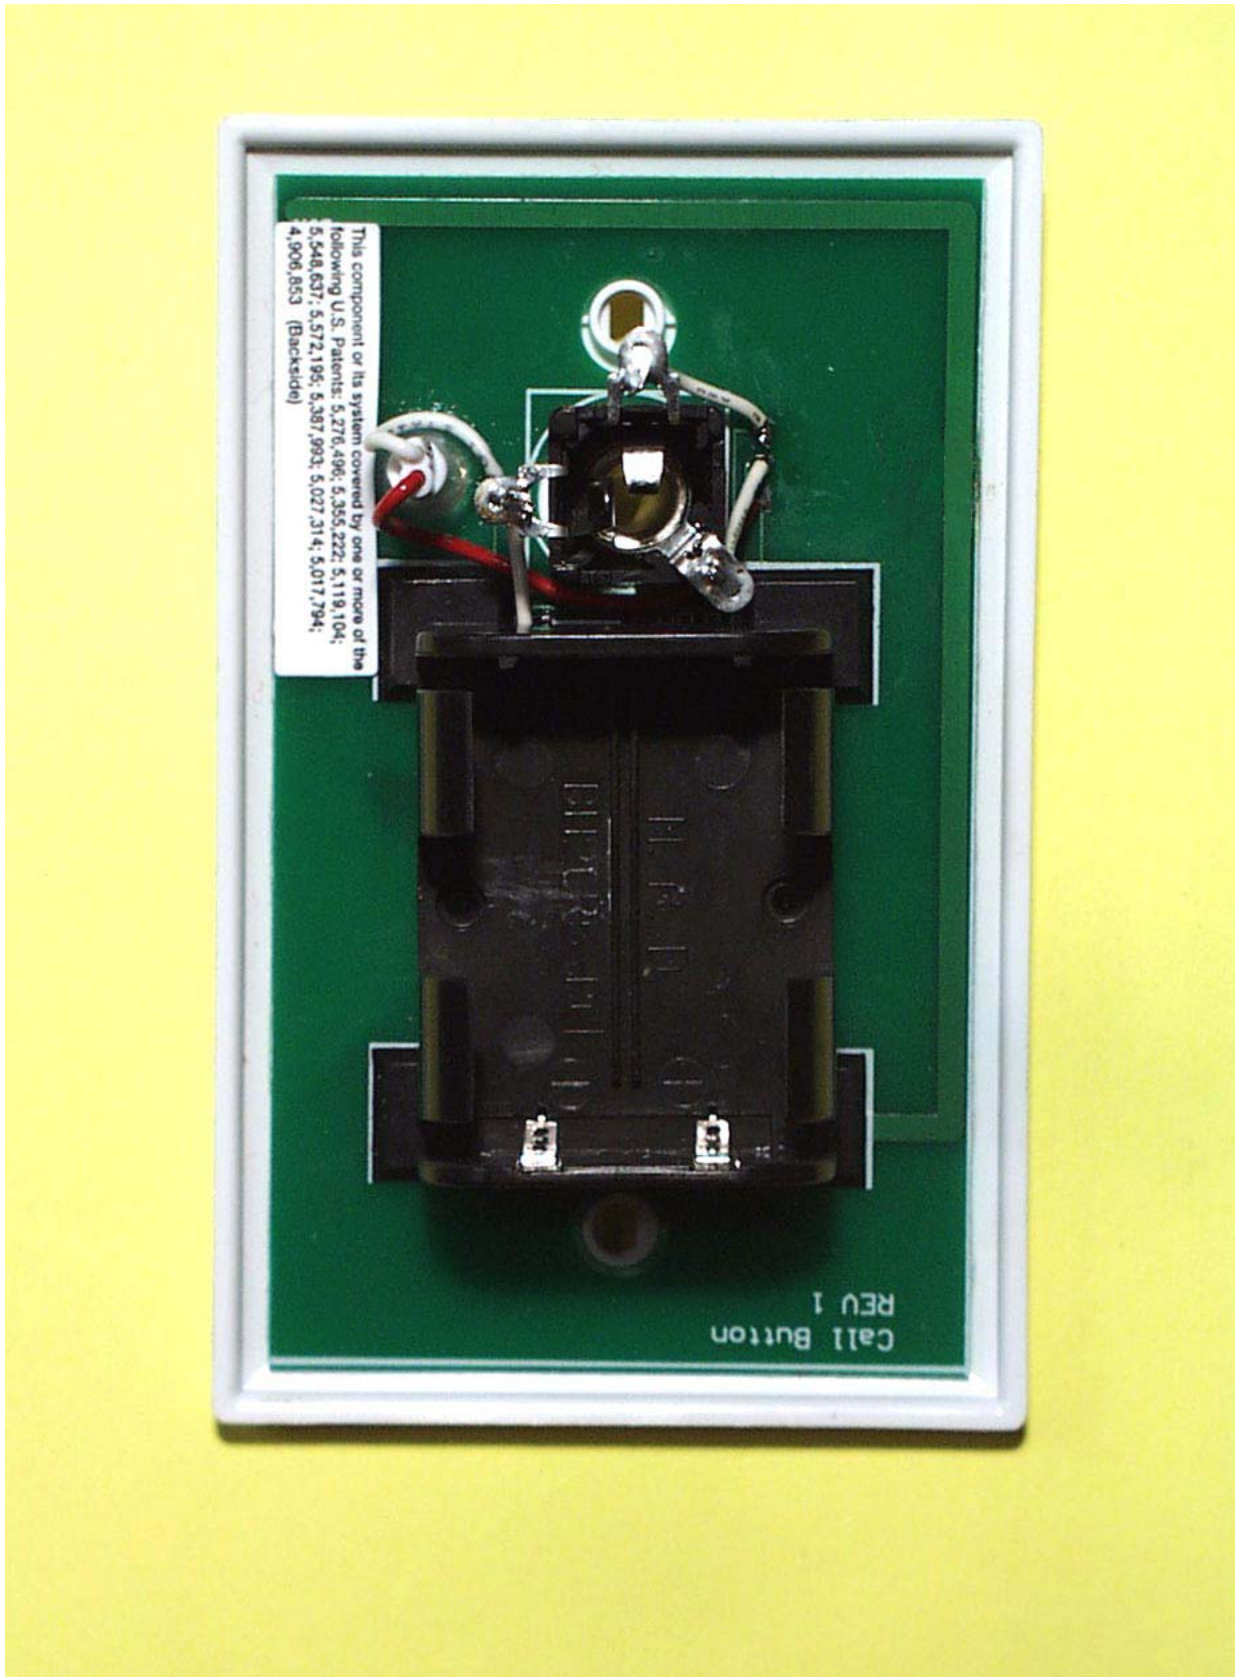**VER-4054 - TRANSMIT BOARD UNCOVERED**

**TESTED CONFIGURATION /SETUP: [2.1033(B8)]****Support Equipment & Cabling**

Setup Diagram Legend	Description	Model	Serial No. / Part No.	EMC Consideration
A	[EUT] Wall Mount	VER-4054	Preproduction	
1	Switch cable	-	Preproduction	2 meters length. Shielded

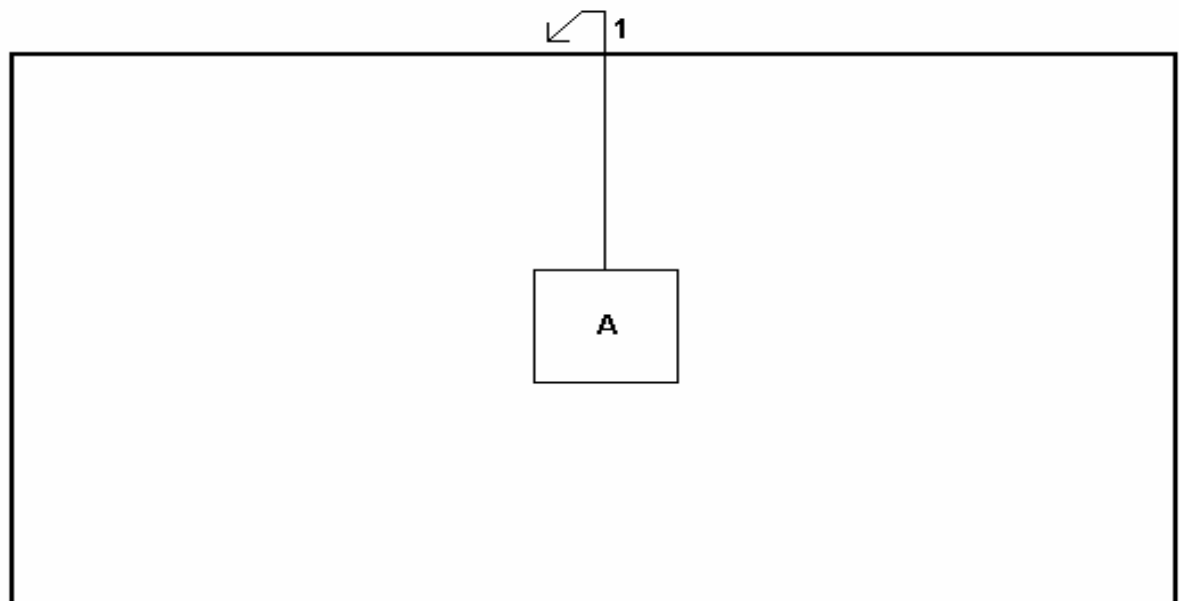


**BASIC EUT SETUP**  
(Legend designation is above)

**Setup Pictures**

Block Setup Diagram  
Radiated Setup – end & flat positions  
Radiated Setup – side position

this page  
page 11  
page 12

**RADIATED SETUP  
END POSITION**

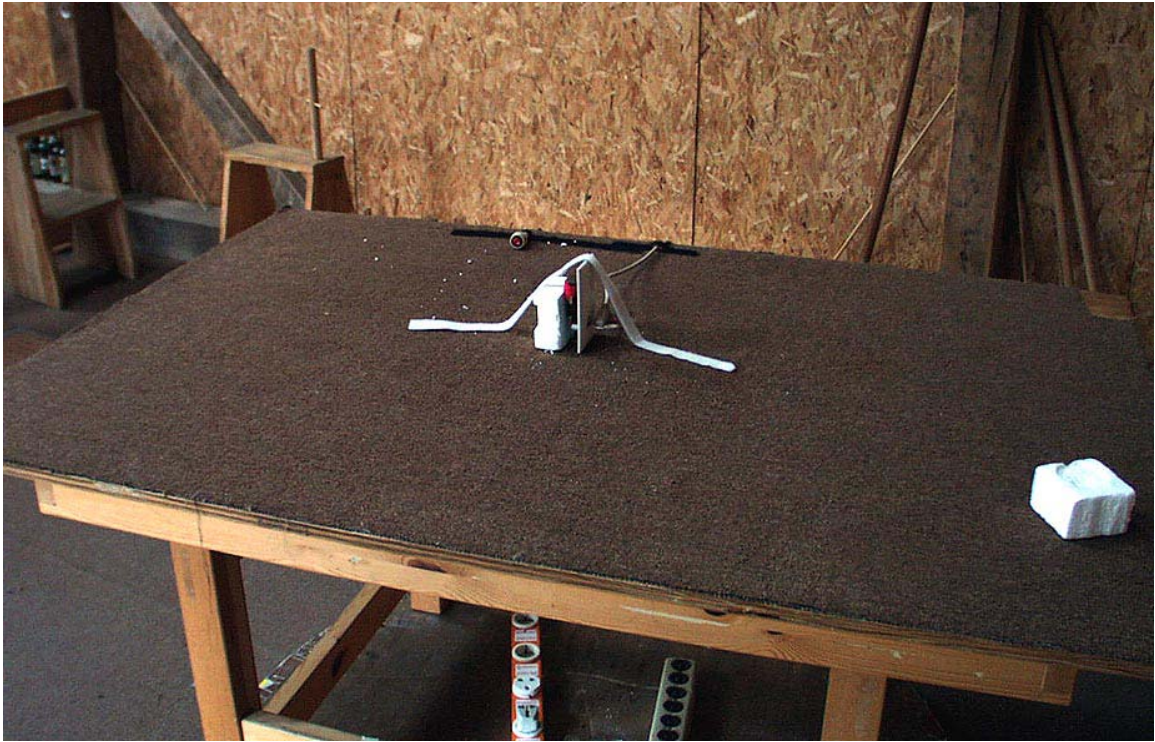

**FLAT POSITION**



### **SIDE POSITION**



**TEST METHODOLOGY: [2.1033(B6)]****Standards Applied to Test: [2.1033(b6)]**

ANSI C63.4 - 1992, Appendix I

CFR47 FCC Part 2, Part 15, SubPart C, 15.231e Intentional Radiator; SubPart B, Digital Device

**Methodology**

The pictures in this report, showing test setups, indicate the agreed upon configuration of testing for this product-type.

For the testing, the EUT was placed at the center of the table 80cm above the ground plane pursuant to ANSI C63.4 for stand-alone equipment.

The internal lithium battery was replaced periodically throughout the testing to ensure that the greatest available battery power was available to the transmitter.

The line conducted emission testing was not performed on this product. In its final configuration the product is powered from an internal lithium battery only.

**Radiated**

The system was placed upon a 1 x 1.5 meter non-metallic table 80cm above the open field site ground plane in the prescribed setup per ANSI C63.4.

The table sits upon a remote controlled turntable. The receiving antenna, located at the appropriate standards distance of 3 or 10 meters from the table center, is also remote controlled.

The principle settings of the EMI Receiver for radiated testing include:

IF Bandwidth:       120KHz   for frequencies less than 1GHz.  
                          1 MHz     for frequencies greater than 1GHz.  
Detector Function:   Peak Mode

At frequencies up to 1000MHz a BiconiLog broadband antenna was used for measurements.

At frequencies above 1000MHz a double-ridge Horn broadband antenna was used for measurements.

During the evaluation the EUT was transmitting continuously.

The turntable was rotated 360 degrees and the receiving antenna height varied from 1 to 4 meters to search out the highest emissions.

The EUT was placed in three orthogonal positions. At each position measurements were taken with the receive antenna in vertical and horizontal positions. Refer to photographs on preceding pages to view these three positions.

The unit was evaluated up to the tenth harmonic of the fundamental as an intentional radiator, and up to 1000MHz as a digital device.

The unit was re-evaluated using different lengths of switch cabling connected at the ¼" phone jack.

#### **Variance from Test Procedure**

The EUT was tested with the transmitter in CW mode and measurements taken using the Peak detector of the EMI receiver. The CW mode allowed continuous transmission that expedited the testing. Peak detection also expedited the testing and Peak and Quasi-Peak detectors will measure a CW signal as the same value.

This variance from the test procedure represents a 'worst-case' for the EUT

## Formulas and Sample Calculations:

THE HP8546A EMI Receiver has stored in memory the antenna and coax correction factors used in this test. The resultant Field Strength (FS) in dBuV/m presented by the HP8546A is the summation in decibels (dB) of the Received Level (RF), the Antenna Correction Factor (AF), and the Cable Loss Factor (CF).

$$\text{Formula 1: } FS(\text{dBuV/m}) = RF(\text{dBuV}) + AF(\text{dB/m}) + CF(\text{dB})$$

The resultant Field Strength measurement is recorded using the peak hold detector of the HP8546A.

The allowed occupied bandwidth of the fundamental is calculated as

$$\begin{aligned} \text{Formula 2: } BW(\text{KHz}) &= F_o(\text{KHz}) * .0025 \\ BW &= 434000 * .0025 = 1085\text{KHz} \end{aligned}$$

Calculation of FCC limits Part 15.231e

For the frequency range 260MHz - 470MHz, the limit is a linear interpolation between 1500uV/m and 5000uV/m where the limit at 260MHz is 1500uV/m and the limit at 470MHz is 5000uV/m.

A formula to calculate the limit is established with a ratio linearly equating the frequency range to the limit range.

$$(F_o - F_L) / (F_H - F_L) = (L_o - L_L) / (L_H - L_L)$$

where  $F_o$  and  $L_o$  represent the frequency in question and its limit

where  $F_L$  and  $L_L$  represent the lower frequency ( 260MHz ) and its limit ( 1500uV/m ).

Where  $F_H$  and  $L_H$  represent the higher frequency ( 470MHz ) and its limit ( 5000uV/m ).

The calculations for the frequencies included in the application are:

$$\begin{aligned} 434\text{MHz} \quad & (434 - 260) / (470 - 260) = (L_o - 1500) / (5000 - 1500) \\ & (174 / 210) * (3500) = L_o - 1500 \\ & L_o = 2900 + 1500 \\ & L_o = 4400 \text{ uV/m is LIMIT at 434MHz} \end{aligned}$$

The limit in dB terms is calculated as the result of 20 times the log of the uV/m limit.

$$434\text{MHz} \quad \text{dB limit is } 20 * \text{LOG}(4400 \text{ uV/m}) = 72.9 \text{ dBuV/m}$$

DutyCycle Averaging.

The peak measurement is reduced in level by the Calculated Duty Cycle factor.

Refer to page 20 for the calculation of duty cycle factor.

## **MEASUREMENT RESULTS**

### **Summary:**

1. This test series evaluated the Equipment Under Test to FCC Part 15, SubPart C, section 15.231(e).
2. The system tested is compliant to the requirement of CFR 47, FCC Part 15, SubPart C, section 15.231e for Low Power Transmitters.
3. The equipment under test was received on October 13, 2003 and this test series commenced on October 13, 2003.
4. The line conducted emission testing does not apply to this product. The device is powered from a 3 volt Lithium battery.
5. Occupied Band Width of the transmitted signal, at the 20dB point, was measured to be 415KHz. This measurement is within the allowed 1085KHz bandwidth.
6. The average field strength level of the fundamental was calculated to be 2.3dB below the limit of 72.9dBuV/m (4400uV/m).
7. The evaluation of the field strength levels of the harmonics showed the emission nearest the limit occurred at 2604MHz. This average field strength level was calculated to be 2.8dB below the limit of 54.0dBuV/m (500uV/m).
8. The evaluation of the spurious emissions, other than transmitter harmonics, demonstrated the spurious levels were too low to be observed.

### **Changes made to achieve compliance**

1. C11 changed to 22pF

## Test Data [2.1033(b6)]


### Occupied Bandwidth [15.231(c)]

The maximum allowed 20dB bandwidth is determined pursuant to 15.23(c). For fundamental signals between 70MHz and 900MHz the bandwidth allowed is 0.25% of the fundamental.

Formula 2: Allowed bandwidth = [ Fundamental ] x [ .0025 ]

Fundamental (MHz)	Measured 20dB Bandwidth	LIMIT Fundamental * .0025
434	415 KHz	1085 KHz

This chart shows the measured bandwidth signal.

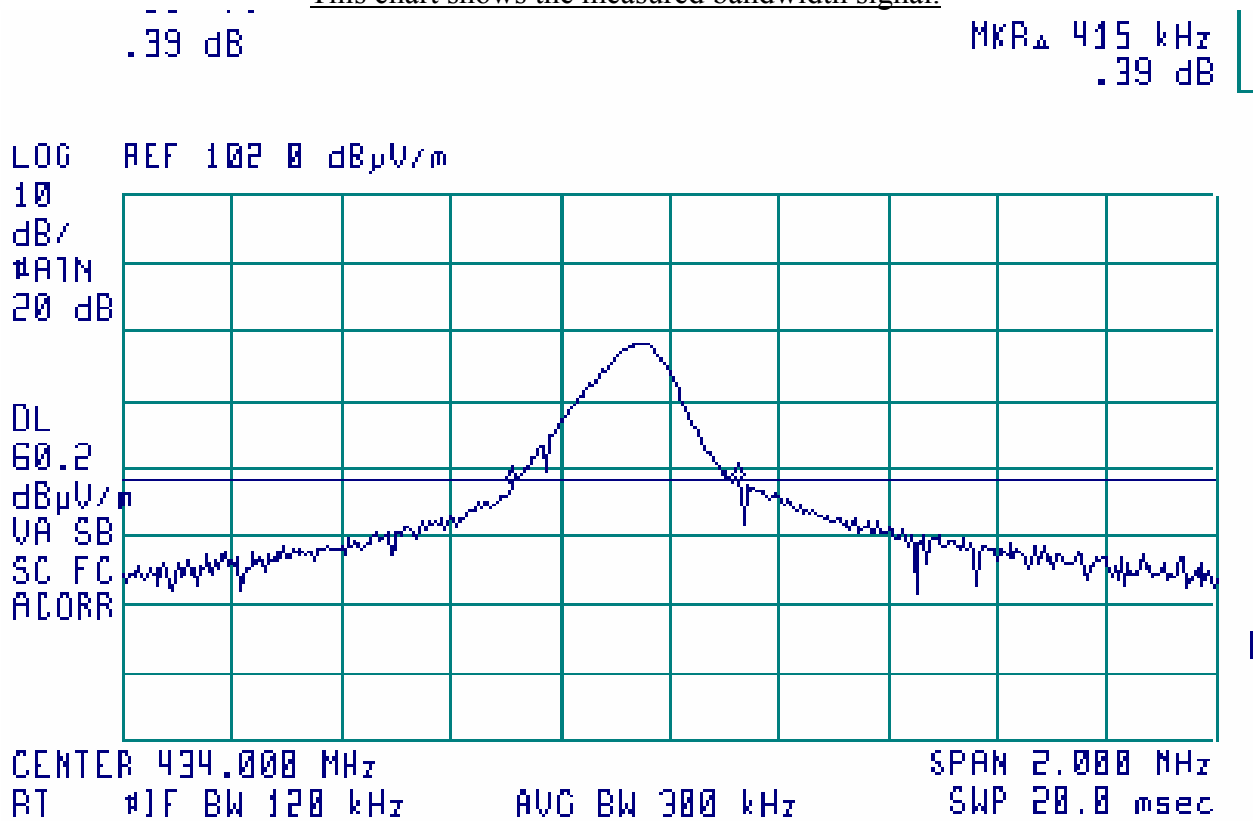

**Restricted Bands: [15.205]**

The following frequency bands are restricted. Only spurious emissions are permitted at levels limited by 15.209:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.25
0.490-0.510	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

**GENERAL LIMIT @ 3meter: [15.209(a)]**


30-88MHz	100uV/m	40dBuV/m
88-216MHz	150uV/m	43.5dBuV/m
216-960MHz	200uV/m	46dBuV/m
above 960MHz	500uV/m	54dBuV/m

## Field Strength Measurements

### Radiated Field Strength Measurements: [15.231(b), 15.205]

A scan of the unit was made in a shielded room to study the emission profile of the EUT. These scans indicate no emissions other than the transmitted fundamental and its harmonics.

The chart shows the spectrum pattern of the EUT emissions. Note, the levels indicated are not calibrated levels. The marker is at the intentional transmitted 434MHz signal.

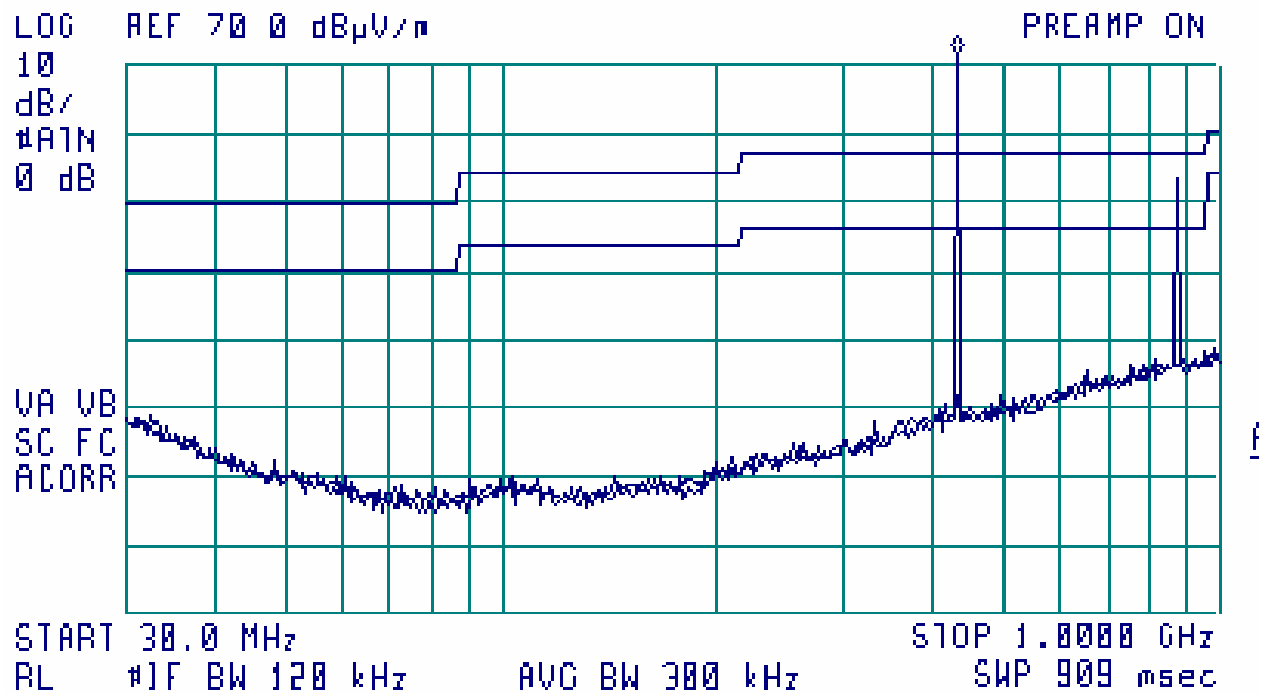

## Radiated Field Strength Measurements

### Modulation Characteristics and Duty Cycle Calculations

An encoded transmission consists of defined train of Forty-Six 225uSec pulses.

The encoding of the logical 1's and 0's is determined by the space (off time) between the pulses.

The off time of approximately 1.2mSec determines the logical "0"(zero).

The off time of approximately 1.9mSec determines the logical "1"(one).

The pulse train consists of

1. Four Preamble pulses separated by approximately 1.24mSec off time
2. An 'off' time of approximately 6.75mSec.
3. Forty-Two pulses separated by 'off' time of either 1.24mSec or 1.91mS.

If all forty-two encoding pulses are separated by 1.24mS, then the average value of the emission is calculated as follows:

Pulse on time:

1. Total pulses on time  $46 \times 0.225\text{mS}$  10.35 mS

Pulse train length:

1. Preamble on time  $4 \times 0.225\text{mS}$  0.90 mS
2. Preamble off time  $3 \times 1.24\text{mS}$  3.72 mS
3. Preamble space time 6.75mS 6.75 mS
4. Encoded pulses  $42 \times 0.225\text{mS}$  9.45 mS
5. Encoded off time  $41 \times 1.24\text{mS}$  50.84 mS
- TOTAL pulse train length 71.66 mS

Duty cycle factor (average time on) is:

1. Numeric factor:  $(10.35\text{mS} / 71.66\text{mS}) = 0.144$
2. dB factor:  $20 * \text{LOG}(0.144) = -16.8\text{dB}$

If all forty-two encoding pulses are separated by 1.91mS, then the average value of the emission is calculated as follows:

Pulse on time:

1. Total pulses on time  $46 \times 0.225\text{mS}$  10.35 mS

Pulse train length:


1. Preamble on time  $4 \times 0.225\text{mS}$  0.90 mS
2. Preamble off time  $3 \times 1.24\text{mS}$  3.72 mS
3. Preamble space time 6.75mS 6.75 mS
4. Encoded pulses  $42 \times 0.225\text{mS}$  9.45 mS
5. Encoded off time  $41 \times 1.91\text{mS}$  78.31 mS
- TOTAL pulse train length 99.13 mS

Duty cycle factor (average time on) is:


1. Numeric factor:  $(10.35\text{mS} / 99.13\text{mS}) = 0.104$
2. dB factor:  $20 * \text{LOG}(0.104) = -19.6\text{dB}$

The following page shows captured views of typical encoded transmissions.

Typical encoding packet for 100mSec:

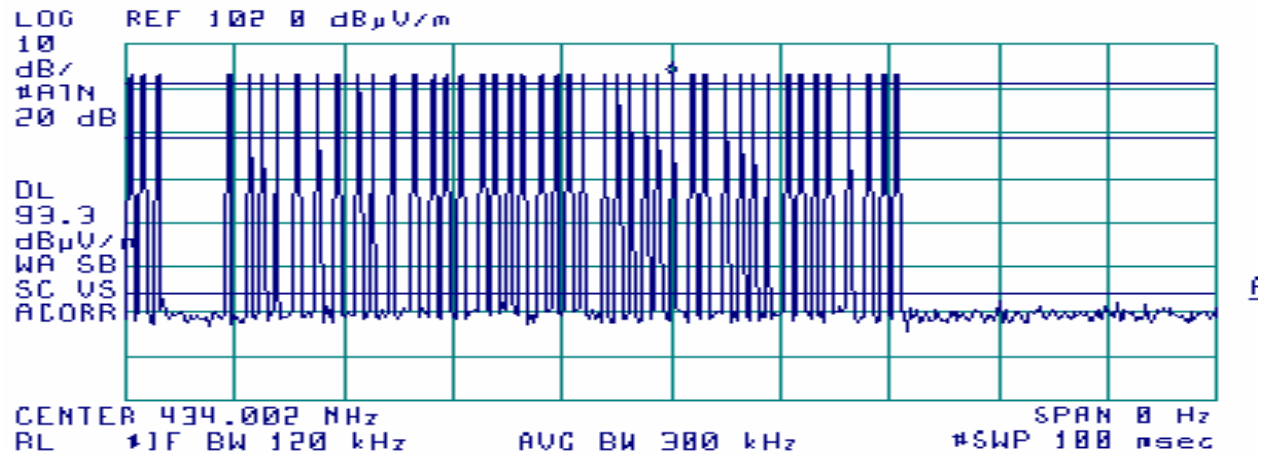

Typical encoding showing spaces between the pulses:

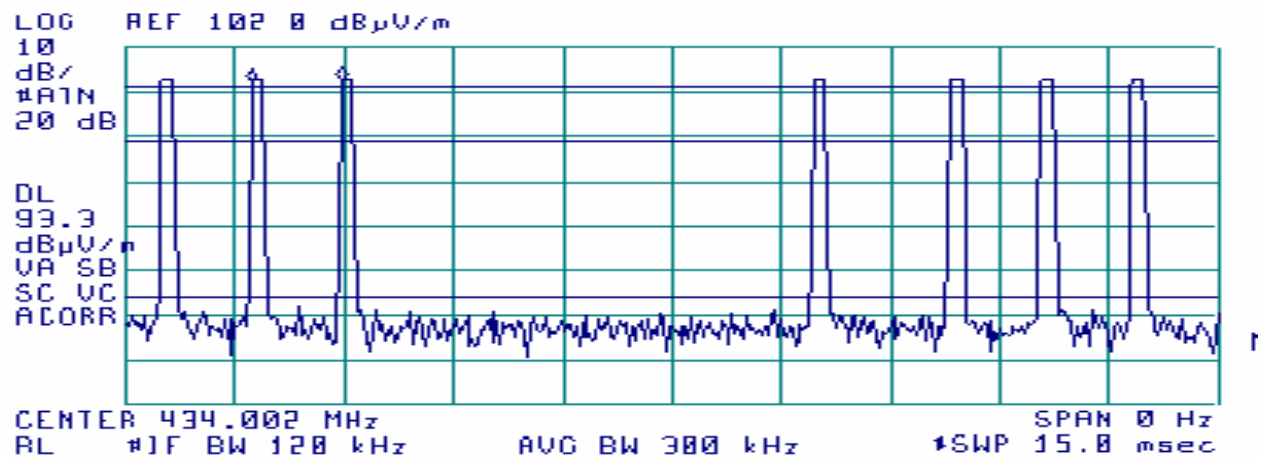

## MEASUREMENT PROCEDURE:

1. The EUT was setup to one of the three orthogonal positions.
2. The measurement antenna was positioned in vertical and horizontal polarities.
3. Steps 1-2 were repeated to cover all positions, and polarities.
4. Two lengths/types of switch cabling was evaluated.

DUT transmitting at 434MHz.

Freq. MHz	DUT position	Ant. Pol.	Corrected Data Peak Detector dBuV/m	**Duty Cycle Factor dB	Calculated Average Level dBuV/m	FCC Limit 15.231e dBuV/m	Margin dB	Cable +Ant. Factor dB+dB/m
434	end	H	87.4	16.8	<b>70.6</b>	72.9	<b>-2.3</b>	19.1
868	"	V	59.6	16.8	<b>42.8</b>	52.9	<b>-10.1</b>	26.0
1302	side	V	63.6	16.8	<b>46.8</b>	54.0	<b>-7.2</b>	29.9
1736	end	V	67.5	16.8	<b>50.7</b>	54.0	<b>-3.3</b>	31.4
2170	side	H	66.5	16.8	<b>49.7</b>	54.0	<b>-4.3</b>	33.3
2604	flat	V	68.0	16.8	<b>51.2</b>	54.0	<b>-2.8</b>	35.0
3038	end	V	58.7	16.8	<b>41.9</b>	54.0	<b>-12.1</b>	36.1
3472	side	V	58.4	16.8	<b>41.6</b>	54.0	<b>-12.4</b>	37.6
3906	end	V	63.8	16.8	<b>47.0</b>	54.0	<b>-7.0</b>	38.0
4340	-	-	54.8	16.8	<b>38.0</b>	54.0	<b>-16.0</b>	38.7

\*\*Duty Cycle factor can vary from approximately 16.8dB to 19.6dB and is the dB term derived on page 20. 16.8dB is used in the table above because it determines the highest possible calculated level of the RF emission from the unit under test.

## **APPENDIX A**

### **General Measurement Procedures**

#### **Line Conducted**

When applicable, the system is placed upon a 1 x 1.5 meter non-metallic table 80cm from the ground floor and 40cm from the vertical conducting plane in the prescribed setup per ANSI C63.4. This table is housed in a shielded enclosure to prevent the detection of unwanted ambients.

The EUT, or host unit if applicable, was connected to the LISN being monitored by the EMI Receiver. The remaining support devices requiring mains power were connected to a second LISN.

The EUT was continuously exercised by methods (i.e. software) supplied by the manufacturer.

While monitoring the display of the EMI Receiver, via remote video monitor, the cables were manipulated to determine a position that maximized the emissions being observed. Once the highest amplitude relative to the limit was determined for the Phase current carrying line the procedure was repeated for the Neutral current carrying line.

The configuration that created an emission closest to the limit was used during the course of taking final measurements. Pictures of this final configuration are recorded in this report.

The principal settings of the EMI Receiver for line conducted testing include:

Bandwidth = 9KHz

Detector Function: scanning and signal search = Peak Detection Mode  
measurements = Quasi Peak Detection

The cable losses of the coax used in line conducted testing is charted in this appendix.

## Radiated

The system was placed upon a 1 x 1.5 meter non-metallic table 80cm from the open field site ground plane in the prescribed setup per ANSI C63.4.

The table sits upon a remote controlled turntable. The receiving antenna, located at the appropriate standards distance of 3 or 10 meters from the table center, is also remote controlled.

The EUT was continuously exercised by methods (i.e. software) supplied by the manufacturer.

Preliminary tests were done at the 3 meter open field test site. The final tests are done at the appropriate standards distance of 3 or 10 meters. The "Biconical/Log Periodic" broadband antenna connected to an EMI Receiver, meeting CISPR 16, is used throughout the testing.

During the preliminary scans and while monitoring the display of the EMI Receiver, the turntable was rotated 360 degrees and the receiving antenna height varied from 1 to 4 meters to search out the highest emissions. At the significant emissions, the cables were manipulated to determine a position that maximized the emissions being observed. Once the cable position was determined that presented the highest amplitude relative to the limit for Vertical polarized emissions the procedure was repeated for the Horizontal polarization.

The configuration that created an emission closest to the limit was used during the course of taking final measurements. Pictures of this final configuration are recorded in this report.

The principal settings of the EMI Receiver for radiated testing include:

Bandwidth: 120KHz  
Detector Function: scanning and signal search = Peak Mode  
measurements = Quasi Peak Mode.  
Search Range: 30MHz to 1000MHz or 2000MHz

The cable loss of the coax used in radiated scanning is charted in this appendix.

The antenna factors, for the test distance used, are charted in this appendix.

The resultant Field Strength (FS) is a summation in decibels (dB) of the Indicated Receiver Level (RF), the Antenna Correction Factor (AF), and the Cable Loss Factor (CF). If a PreAmplifier (PA) is used, its gain (dB) is subtracted from the above sum.

Formula 1:  $FS(dBuV/m) = RF(dBuV) + AF(dB/m) + CF(dB) - PA(dB)$


To convert the Field Strength dBuV/m term to uV/m, the dBuV/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in uV/m terms.

Formula 2:  $FS(uV/m) = \text{AntiLog}[(FS(dBuV/m))/20]$


## Cable Loss

Attenuation of coax cables used during this test.

Line Conducted 150KHz through 30MHz  
Coax #920809  
between LISN and EMI Receiver  
Last Calibration date: September 16, 2002

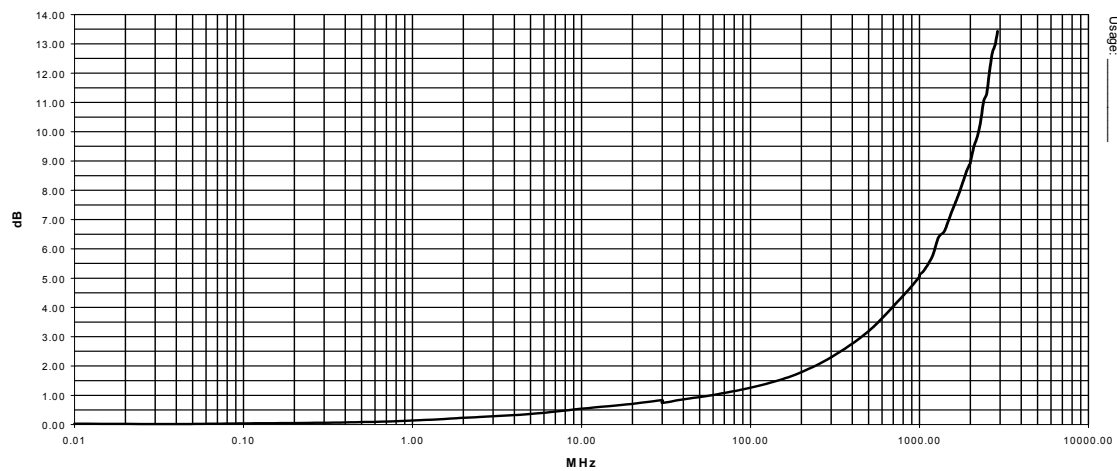


Radiated at 3 meters; 30MHz through 2000MHz  
Coax #9812\_11  
between Antenna and EMI Receiver  
Last Calibration date: May 23, 2003

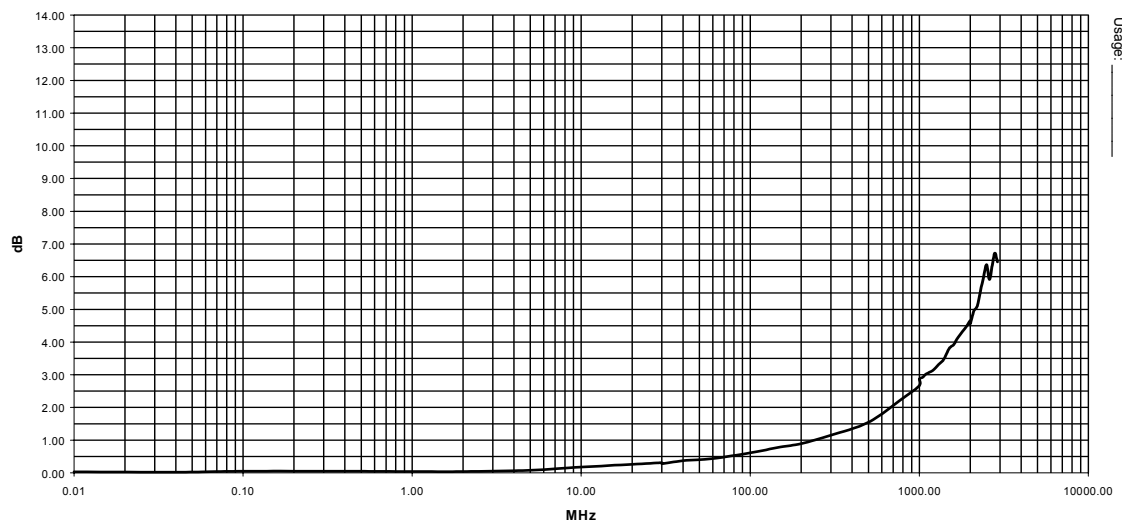


## Antenna Factors

EMCO Model 3142 Antenna #9608-1077  
Last Calibration Date; August 26, 2003  
3 Meter Distance Factors

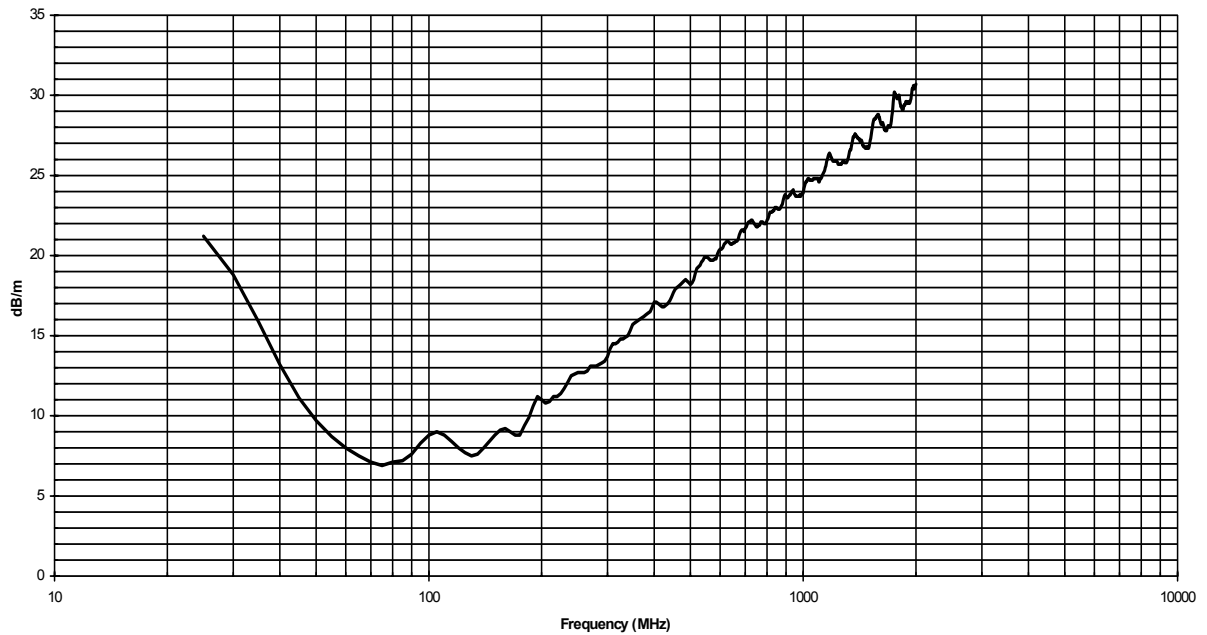


### 10 Meter Distance Factors

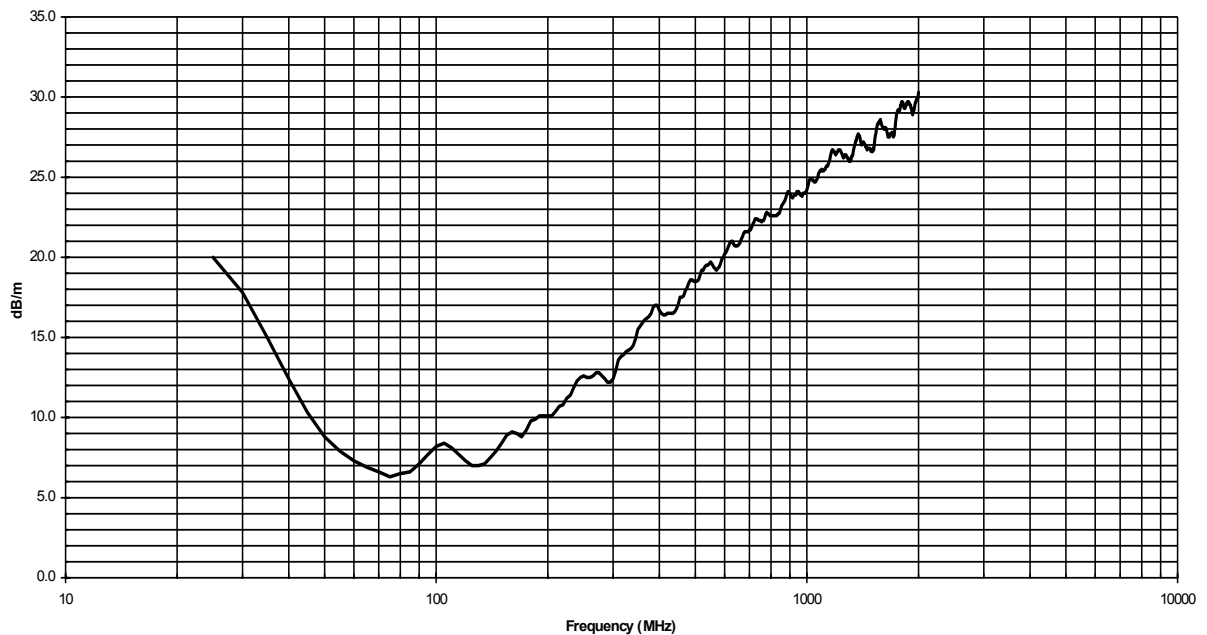

**AHD Endorsements**

United States Department of Commerce  
National Institute of Standards and Technology

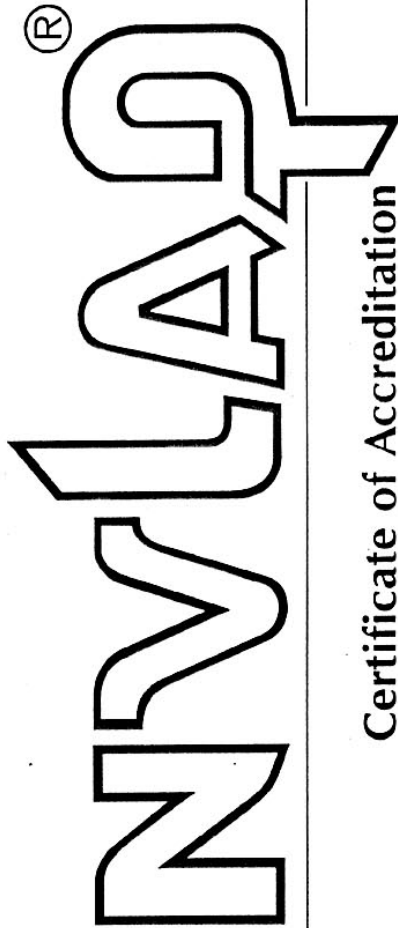

ISO/IEC 17025:1999  
ISO 9002:1994



**AHD (AMBER HELM DEVELOPMENT, L.C.)**  
DOWAGIAC, MI

is recognized by the National Voluntary Laboratory Accreditation Program  
for satisfactory compliance with criteria set forth in NIST Handbook 150:2001,  
all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994.  
Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

June 30, 2004

Effective through

For the National Institute of Standards and Technology  
NVLAP Lab Code: 200129-0

NVLAP-01C (06-01)

FEDERAL COMMUNICATIONS COMMISSION  
Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD. 21046

July 14, 2000

Registration Number: 90413

AHD EMC Laboratory  
92723 M-152  
Dowagiac, MI 49047

Attention: Ted Chaffee


Re: Measurement facility located at Sister Lakes  
3 & 10 meter site  
Date of Listing: February 02, 2000

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, E-Filing, OET Equipment Authorization Electronic Filing.

Sincerely,



Thomas W Phillips  
Electronics Engineer