



Measurement of RF Interference from a  
Remote Station  
Model VER-4065 Rev. 2 Transmitter

For : Versus Technology, Inc.  
2600 Miller Creek Rd.  
Traverse City, MI 49684

P.O. No. : RLW01212  
Date Received: November 9, 2006  
Date Tested : November 9 and 10, 2006  
Test Personnel: Richard E. King  
Specification : FCC "Code of Federal Regulations" Title 47  
Part 15, Subpart C

Test Report By : *Richard E. King*  
Richard E. King  
EMC Engineer

Approved By : *Raymond J. Klouda*  
Raymond J. Klouda  
Registered Professional Engineer of  
Illinois – 44894



## TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1.0 INTRODUCTION .....		4
1.1 Description of Test Item .....		4
1.2 Purpose .....		4
1.3 Deviations, Additions and Exclusions .....		4
1.4 Applicable Documents .....		4
1.5 EMC Laboratory Identification .....		4
1.6 Laboratory Conditions .....		4
2.0 TEST ITEM SETUP AND OPERATION .....		4
2.1 Power Input .....		4
2.2 Grounding .....		5
2.3 Peripheral Equipment .....		5
2.4 Interconnect Cables .....		5
2.5 Operational Mode .....		5
2.6 Test Item Modifications .....		5
3.0 TEST EQUIPMENT .....		5
3.1 Test Equipment List .....		5
3.2 Calibration Traceability .....		5
3.3 Measurement Uncertainty .....		5
4.0 REQUIREMENTS, PROCEDURES AND RESULTS .....		5
4.1 Powerline Conducted Emissions .....		5
4.1.1 Requirements .....		5
4.2 Duty Cycle Factor Measurements .....		5
4.2.1 Procedures .....		5
4.2.2 Results .....		6
4.3 Radiated Measurements .....		7
4.3.1 Requirements .....		7
4.3.2 Procedures .....		7
4.3.3 Results .....		8
4.4 Occupied Bandwidth Measurements .....		8
4.4.1 Requirement .....		8
4.4.2 Procedures .....		8
4.4.3 Results .....		8
5.0 CONCLUSIONS .....		9
6.0 CERTIFICATION .....		9
7.0 ENDORSEMENT DISCLAIMER .....		9
TABLE I - EQUIPMENT LIST .....		10



**REVISION HISTORY**

Revision	Date	Description
—	11/20/2006	Initial release

## Measurement of RF Emissions from a Remote Station Model VER-4065 REV. 2 Transmitter

### **1.0 INTRODUCTION:**

**1.1 Description of Test Item** - This document represents the results of the series of radio interference measurements performed on a Remote Station Model VER-4065 REV. 2 Transmitter, serial number 3, (hereinafter referred to as the test item). The test item was designed to transmit at approximately 433.9MHz using an internal antenna. The test item was manufactured and submitted for testing by Versus Technology, Inc. located in Traverse City, MI.

**1.2 Purpose** - The test series was performed to determine if the test item meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.231 for Intentional Radiators. Testing was performed in accordance with ANSI C63.4-2004.

**1.3 Deviations, Additions and Exclusions** - There were no deviations, additions to, or exclusions from the test specification during this test series.

**1.4 Applicable Documents** - The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2005
- ANSI C63.4-2004, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

**1.5 EMC Laboratory Identification** - This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

**1.6 Laboratory Conditions** The temperature at the time of the test was 22°C and the relative humidity was 23%.

### **2.0 TEST ITEM SET-UP AND OPERATION:**

The test item is a Remote Station Model VER-4065 REV. 2. A block diagram of the test item setup is shown as Figure 1.

**2.1 Power Input** - The test item obtained 6VDC from four 1.5VDC "AAA" batteries.

**2.2 Grounding** - Since the test item was powered with 6VDC from internal batteries, it was ungrounded during the tests.

**2.3 Peripheral Equipment** - The test item has no peripheral equipment.

**2.4 Interconnect Cables** - The test item has no interconnect cables or ports.

**2.5 Operational Mode** - For all tests the test item was placed on an 80cm high non-conductive stand. The test item begins transmitting once the battery is placed in the test item powering the test item. For typical operation the test item will transmit a single packet of information a minimum of every 12 seconds. For testing purposes the test item was modified to transmit continuously. The battery voltage was periodically checked to ensure proper operation. The test was performed with the test item transmitting at 433.9MHz.

**2.6 Test Item Modifications** - No modifications were required for compliance to the FCC Part 15C requirements.

### **3.0 TEST EQUIPMENT:**

**3.1 Test Equipment List** - A list of the test equipment used can be found on Table I. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

**3.2 Calibration Traceability** - Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

**3.3 Measurement Uncertainty** - All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

### **4.0 REQUIREMENTS, PROCEDURES AND RESULTS:**

#### **4.1 Powerline Conducted Emissions -**

**4.1.1 Requirements** - Since the test item was powered by internal batteries, no conducted emissions tests were performed.

#### **4.2 Duty Cycle Factor Measurements -**

**4.2.1 Procedures** - The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal.

With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero span width with 10msec/div. The amplitude settings are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at

the beginning and end of a word period. If the word period exceeds 100 msec the word period is set to 100 msec. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/ word period) where the word period = (On-time + Off-time).

**4.2.2 Results** - A representative plot of the duty cycle is shown on data page 13 Since the transmitter uses a rolling code, the duty cycle correction factor used was calculated based on the maximum case. The following maximum case information was supplied by Versus Technology:

An encoded transmission consists of defined train of Forty-Six 225uSec pulses.

The encoding of the logical 1's and 0's is determined by the space (off time) between the pulses.

The off time of approximately 1.2mSec determines the logical "0"(zero).

The off time of approximately 1.9mSec determines the logical "1"(one).

The pulse train consists of

1. Four Preamble pulses separated by approximately 1.24mSec off time
2. An 'off' time of approximately 6.75mSec.
3. Forty-Two pulses separated by 'off' time of either 1.24mSec or 1.91mS.

If all forty-two encoding pulses are separated by 1.24mS, then the maximum value of the emission is calculated as follows:

Pulse on time:

- |                               |          |
|-------------------------------|----------|
| 1. Total on time 46 x 0.225mS | 10.35 mS |
|-------------------------------|----------|

Pulse word period:

- |                                 |          |
|---------------------------------|----------|
| 1. Preamble on time 4 x .225mS  | 0.90 mS  |
| 2. Preamble off time 3 x 1.24mS | 3.72 mS  |
| 3. Preamble space time 6.75mS   | 6.75 mS  |
| 4. Encoded pulses 42 x 0.225mS  | 9.45 mS  |
| 5. Encoded off time 41 x 1.24mS | 50.84 mS |

TOTAL pulse word period	71.66 mS
-------------------------	----------

Duty cycle factor (maximum time on) is:

- |  |            |
|--|------------|
| 1. Numeric factor: ( 10.35mS / 71.66mS ) | = 0.144    |
| 2. dB factor: 20 * LOG(0.144)            | = -16.88dB |

With the test item transmitting at 433.9MHz, the maximum case duty cycle correction factor was calculated to be -16.88dB.

### 4.3 Radiated Measurements -

**4.3.1 Requirements** - The test item must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.205 et seq.

Paragraph 15.231(e) has the following radiated emission limits:

Fundamental Frequency MHz	Field Intensity uV/m @ 3 meters	Field Strength Harmonics and Spurious @ 3 meters
260 to 470	1,500 to 5000*	150 to 500*

\* - Linear Interpolation

For 433.9MHz, the limit at the fundamental is 4400 uV/m @ 3m and the limit on the harmonics is 440 uV/m @ 3m.

In addition, emissions appearing in the Restricted Bands of Operation listed in paragraph 15.205(a) shall not exceed the general requirements shown in paragraph 15.209.

Devices operated under the provisions of paragraph 15.231(e) shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

**4.3.2 Procedures** - Open field measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

A preliminary radiated emissions test was performed to determine the emission characteristics of the test item. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the test item. The entire frequency range from 30MHz to 5.0GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 5.0GHz. Between 30MHz and 1000MHz, a bilog antenna was used as the pick-up device. A broadband double ridged waveguide antenna was used as the pick-up device for all frequencies above 1GHz. All significant broadband and narrowband signals were measured and recorded. The peak detected levels were converted to average levels using a duty cycle factor which was computed from the



pulse train.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- (1) The test item was rotated so that all of its sides were exposed to the receiving antenna.
- (2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- (3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- (4) For hand-held or body-worn devices, the test item was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

**4.3.3 Results** - The preliminary plots, with the test item transmitting at 433.9MHz, are presented on data pages 14 through 17 plots are presented for a reference only, and are not used to determine compliance.

The final open area radiated levels, with the test item transmitting at 433.9MHz, are presented on data page 18.

As can be seen from the data, all emissions measured from the test item were within the specification limits. Photographs of the test configuration which yielded the highest fundamental radiated emission levels are shown on Figure 2.

In addition the transmitter under normal operating conditions has an RF packet length of 99mS and has a silent period of 12 seconds +/- .5 seconds. The silent period is greater than 30 times the RF packet length and exceeds the 10 second requirement.

#### **4.4 Occupied Bandwidth Measurements -**

**4.4.1 Requirement** - In accordance with paragraph 15.231(c), all emissions within 20dB of the peak amplitude level of the center frequency are required to be within a band less than 0.25% of the center frequency wide.

**4.4.2 Procedures** - The test item was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 30 kHz and span was set to 2 MHz. The frequency spectrum near the fundamental was plotted. In addition, the 99% emission bandwidth measured 175 kHz when using the analyzer's special function key with the measurement BW set to 30 kHz.



**4.4.3 Results** - The plot of the emissions near the fundamental frequency are presented on data page 19. As can be seen from this data page, the transmitter met the occupied bandwidth requirements.

**5.0 CONCLUSIONS:**

It was determined that the Versus Technology, Inc Remote Station Model VER-4065 REV. 2, serial number 3, did fully meet the radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.205 et seq. for Intentional Radiators, when tested per ANSI C63.4-2004.

**6.0 CERTIFICATION:**

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the test item at the test date. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

**7.0 ENDORSEMENT DISCLAIMER:**


This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.



TABLE I: TEST EQUIPMENT LIST


ELITE ELECTRONIC ENG. INC.								Page: 1
Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Cal Inv	Due Date
Equipment Type: ACCESSORIES, MISCELLANEOUS								
XZG4	ATTENUATOR/SWITCH DRIVER	HEWLETT PACKARD	11713A	2223A01683	---		N/A	
Equipment Type: AMPLIFIERS								
APK4	PREAMPLIFIER OPT H02	HEWLETT PACKARD	8449B	3008A00329	1-26.5GHZ	01/31/06 12		01/31/07
Equipment Type: ANTENNAS								
NDQ1	TUNED DIPOLE ANTENNA	EMCO	3121C-DB4	313	400-1000MHZ	03/10/06 12		03/10/07
NTA0	BILOG ANTENNA	CHASE EMC LTD.	BILOG CBL611	2057	0.03-2GHZ	08/21/06 12		08/21/07
NWF0	RIDGED WAVE GUIDE	EMCO	3105	2035	1-12.4GHZ	10/09/06 12		10/09/07
Equipment Type: CONTROLLERS								
CMA0	MULTI-DEVICE CONTROLLER	EMCO	2090	9701-1213	---		N/A	
Equipment Type: RECEIVERS								
RACA	RF PRESELECTOR	HEWLETT PACKARD	85685A	2926A00980	20HZ-2GHZ	02/11/06 12		02/11/07
RAEC	SPECTRUM ANALYZER	HEWLETT PACKARD	8566B	3014A06690	100HZ-22GHZ	02/10/06 12		02/10/07
RAF5	QUASIPeAK ADAPTOR W/ RECEI	HEWLETT PACKARD	85650A	2043A00151	0.01-1000MHZ	02/11/06 12		02/11/07
RAF6	QUASIPeAK ADAPTOR W/ RECEI	HEWLETT PACKARD	85650A	2412A00403	0.01-1000MHZ	08/17/06 12		08/17/07
RAKG	RF SECTION	HEWLETT PACKARD	85462A	3549A00284	0.009-6500MHZ	11/22/05 12		11/22/06
RAKH	RF FILTER SECTION	HEWLETT PACKARD	85460A	3448A00324	---	11/22/05 12		11/22/06

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable  
Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

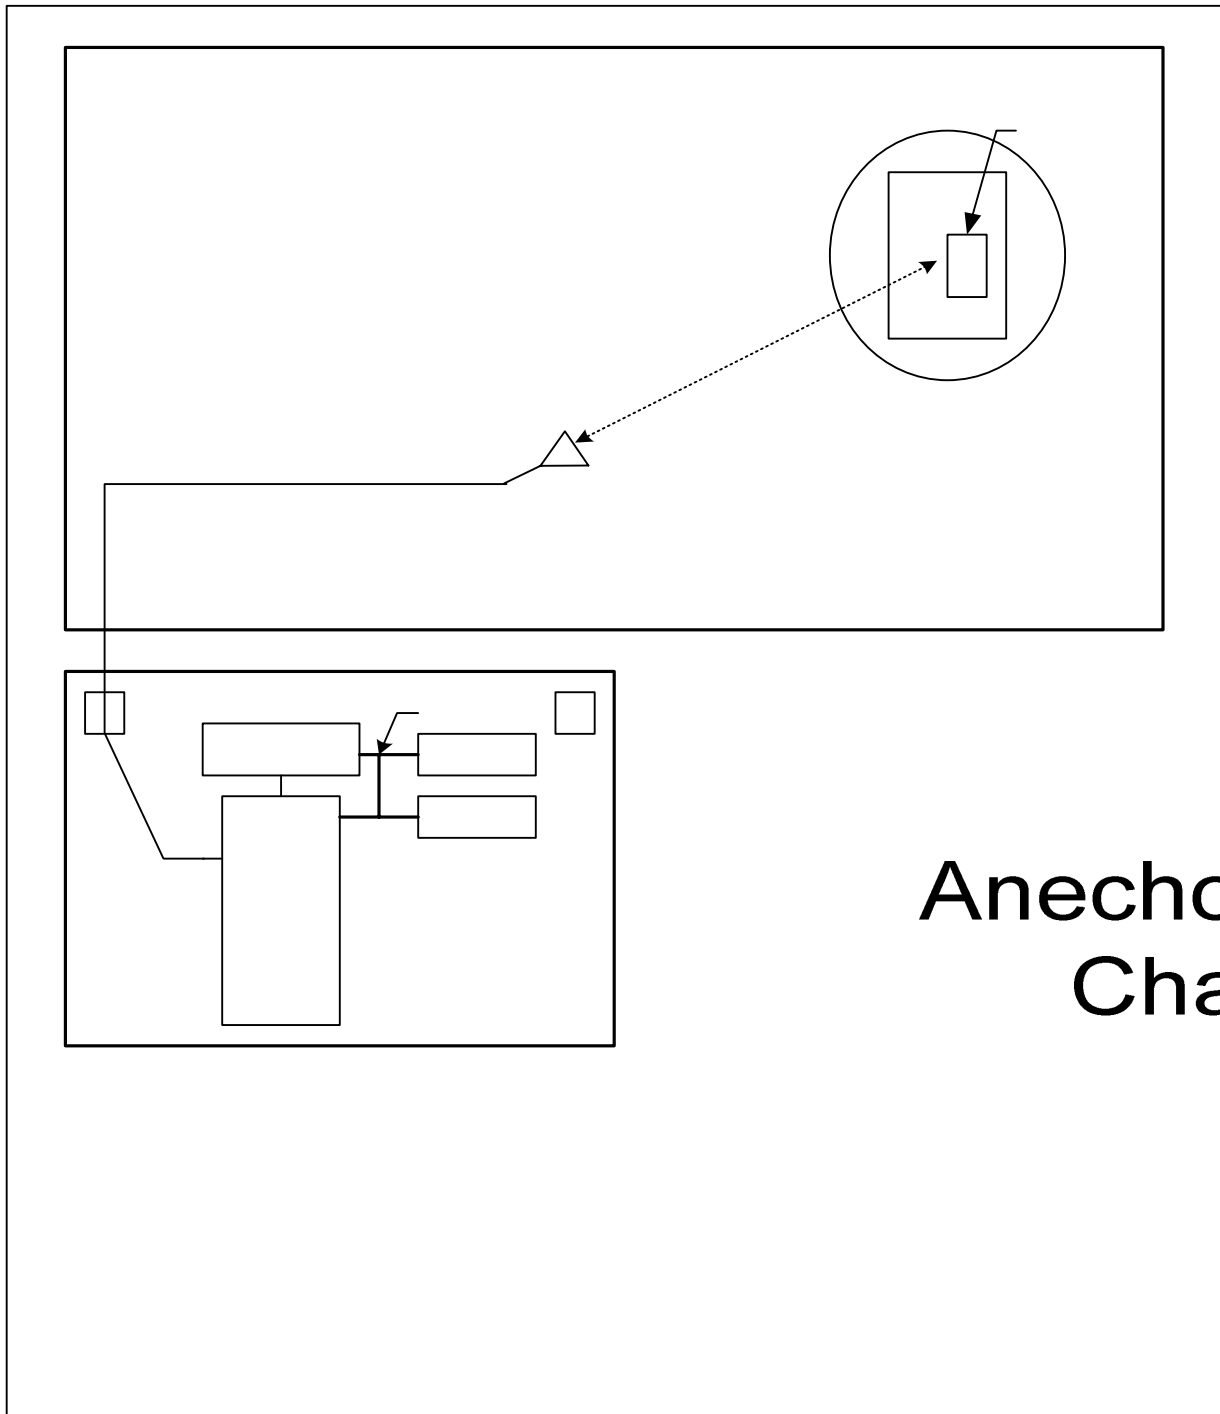


Anechoic F  
Chamb

Figure 2

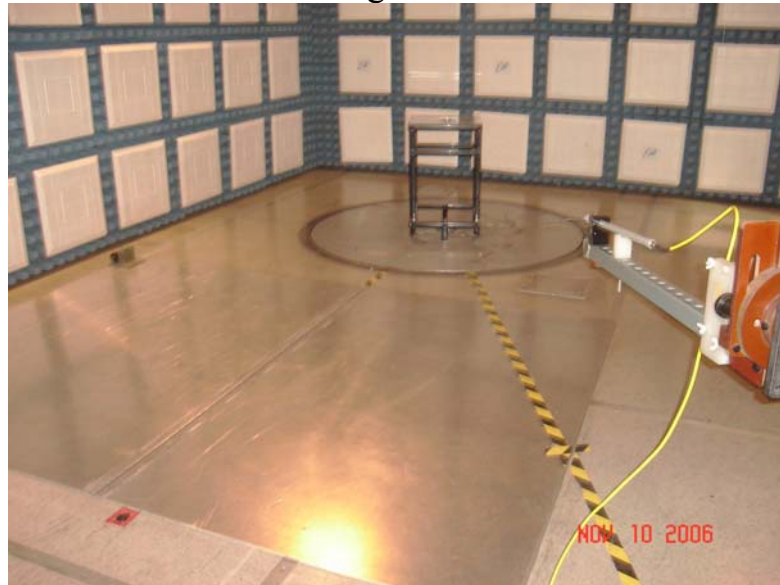


Test Set-up for Radiated Emissions Horizontal Polarity

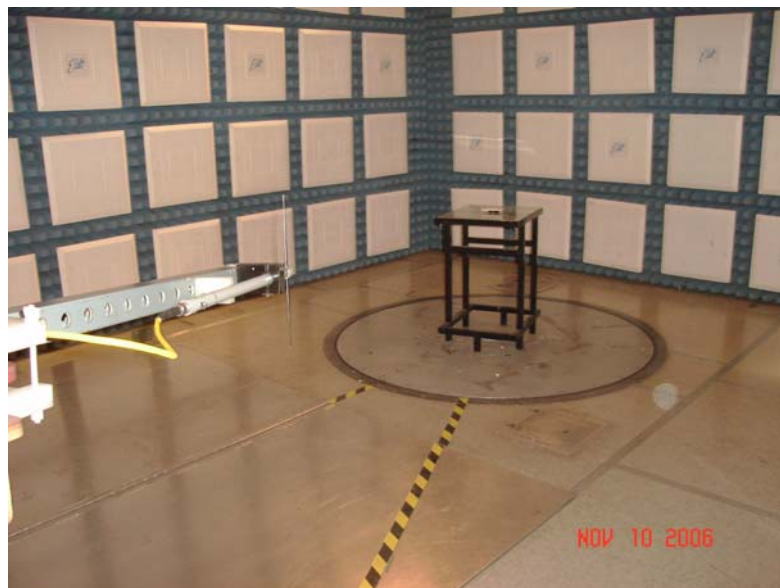


Test Set-up for Radiated Emissions Vertical Polarity


ELITE ELECTRONIC ENGINEERING Co.  
Downers Grove, IL 60515

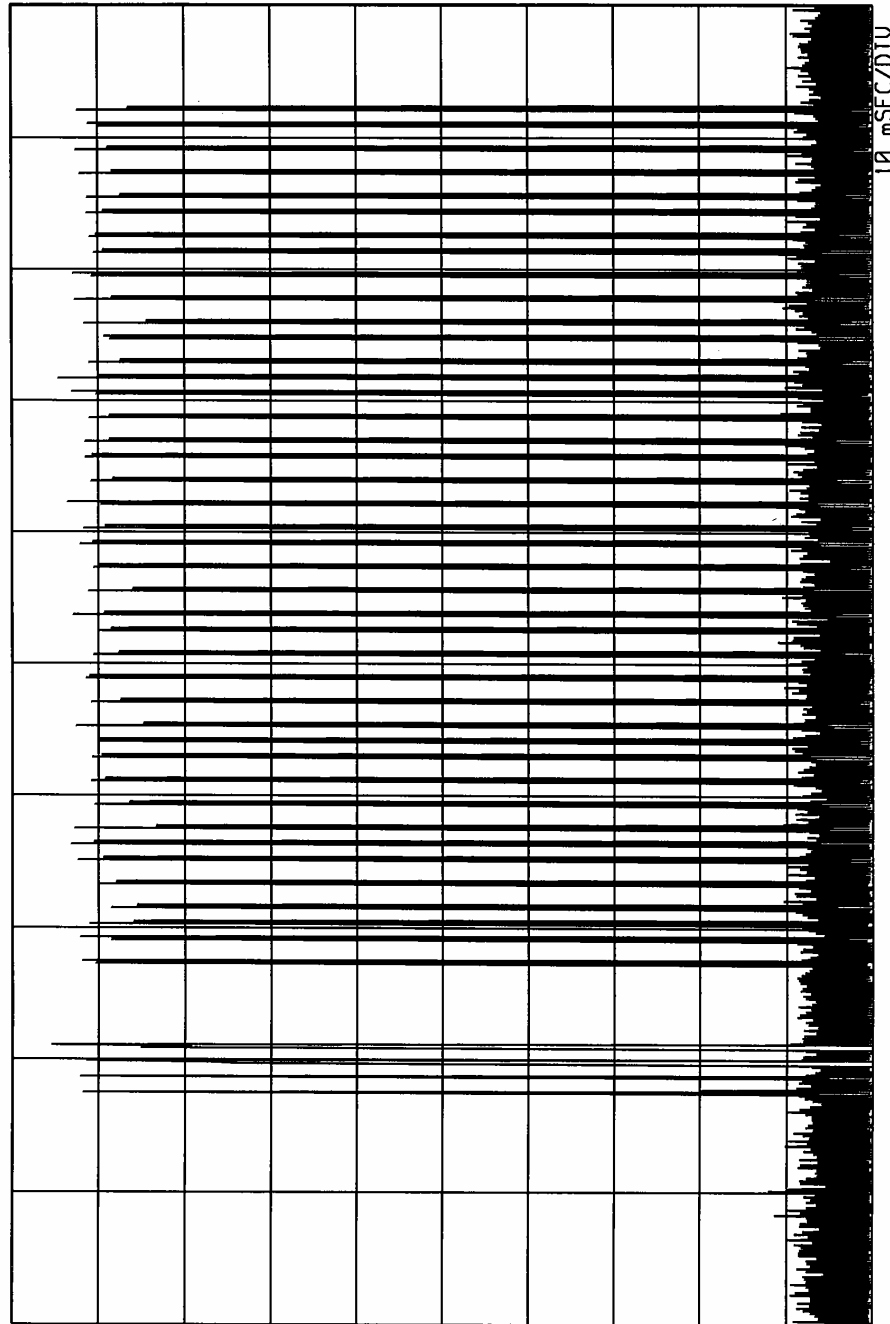


TRANSMITTER DUTY CYCLE  
FREQUENCY: 433.9703 MHz  
ON TIME : 9.191 mSEC  
OFF TIME : 90.809 mSEC  
DUTY CYCLE = .09 or -20.92 dB  
COMPUTED OVER 100 mSEC


MANUFACTURER : VERSUS TECHNOLOGY  
MODEL : UER-4065REV.2  
S/N : 3  
TEST DATE : 10 Nov 2006  
NOTES :

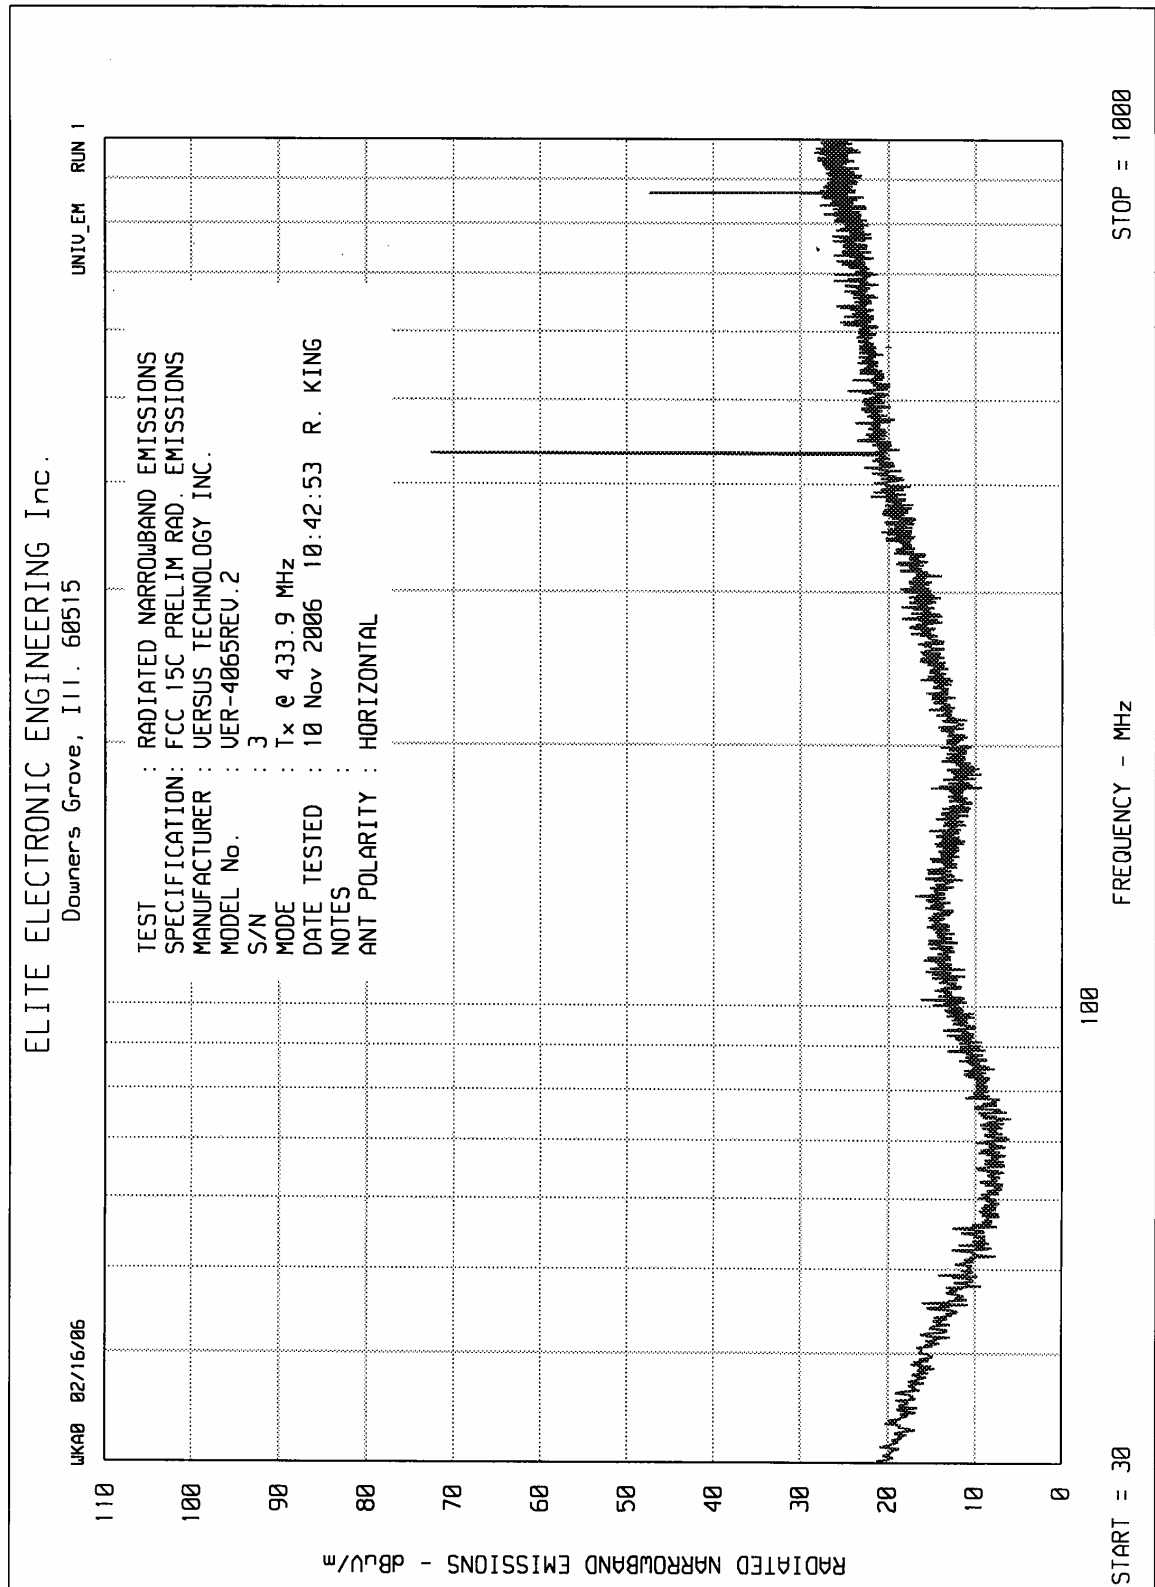

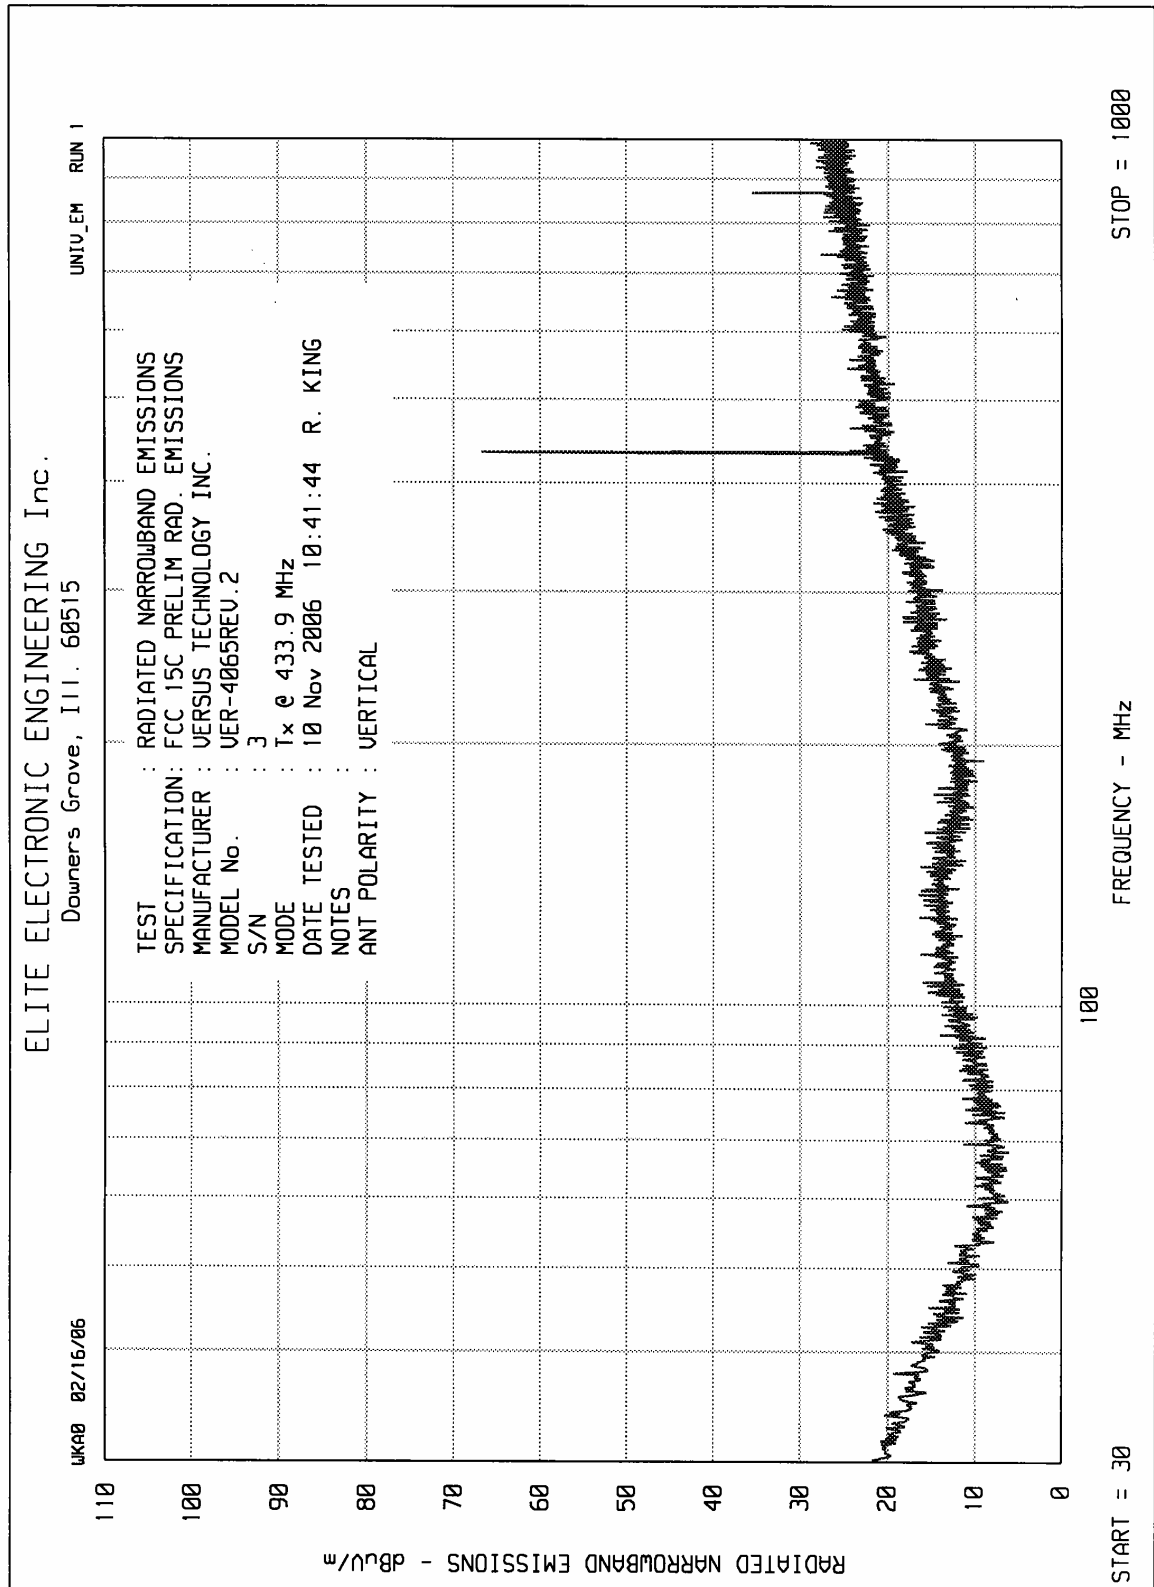



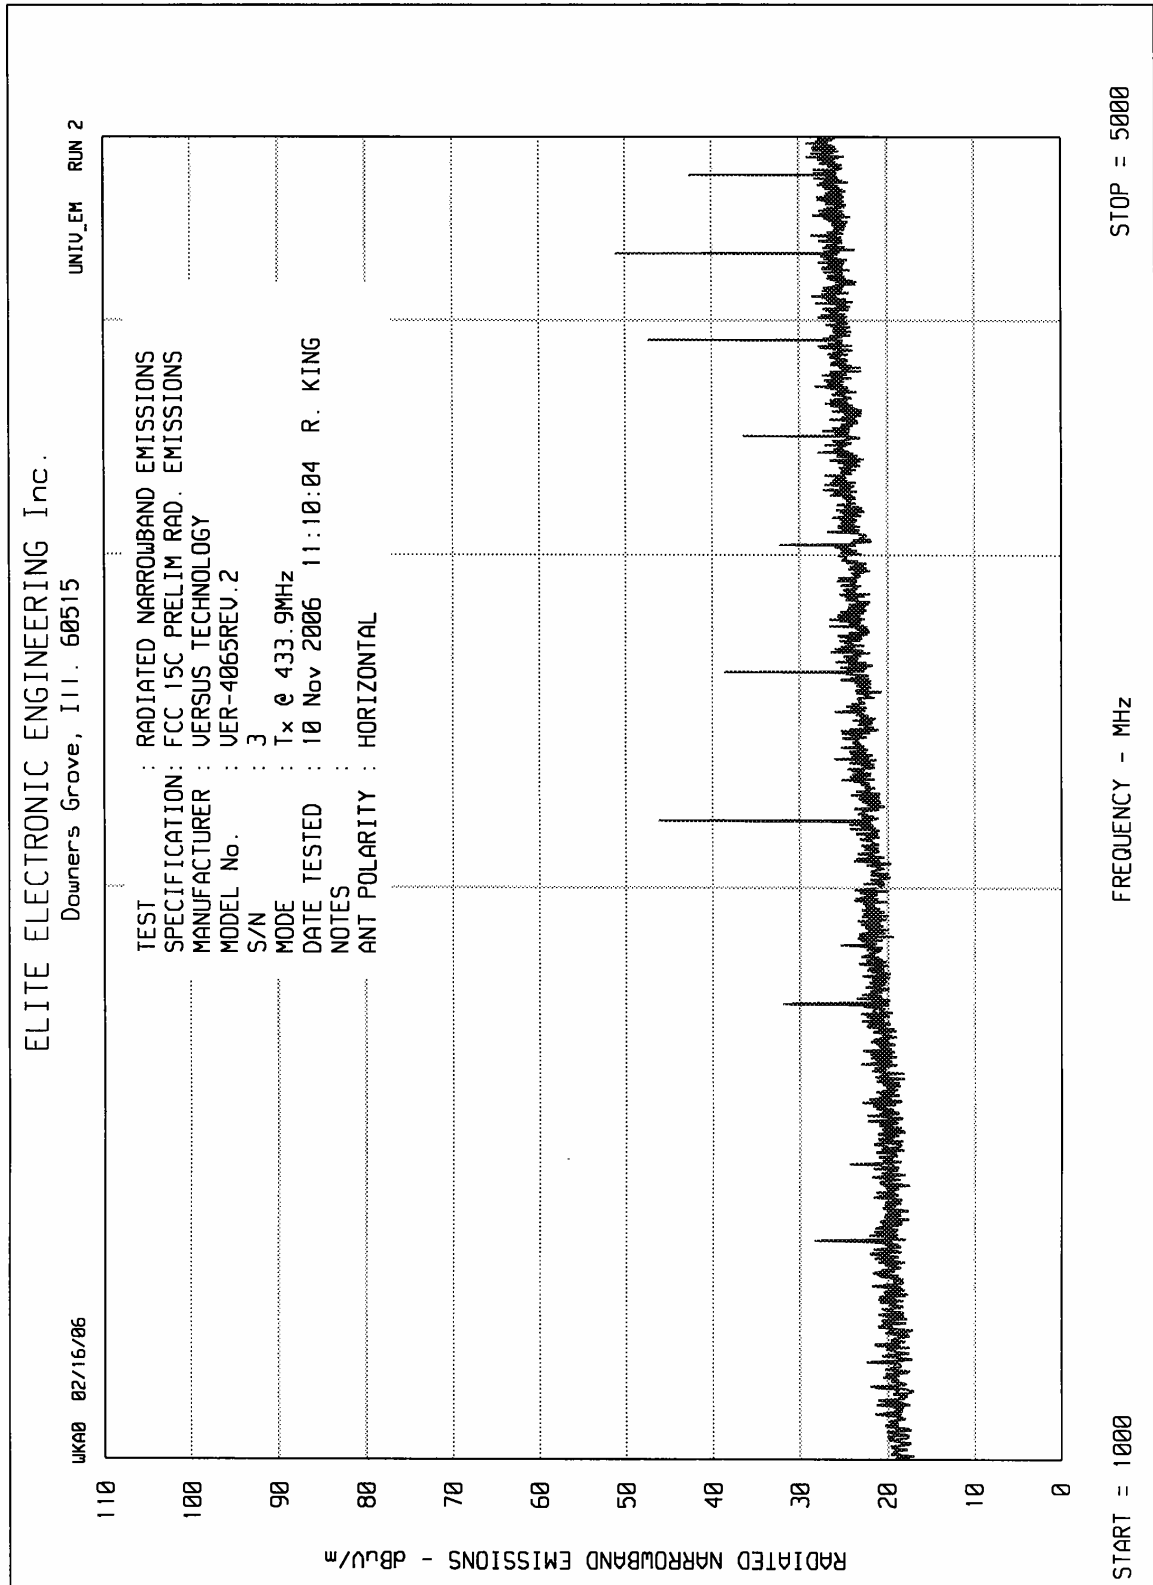

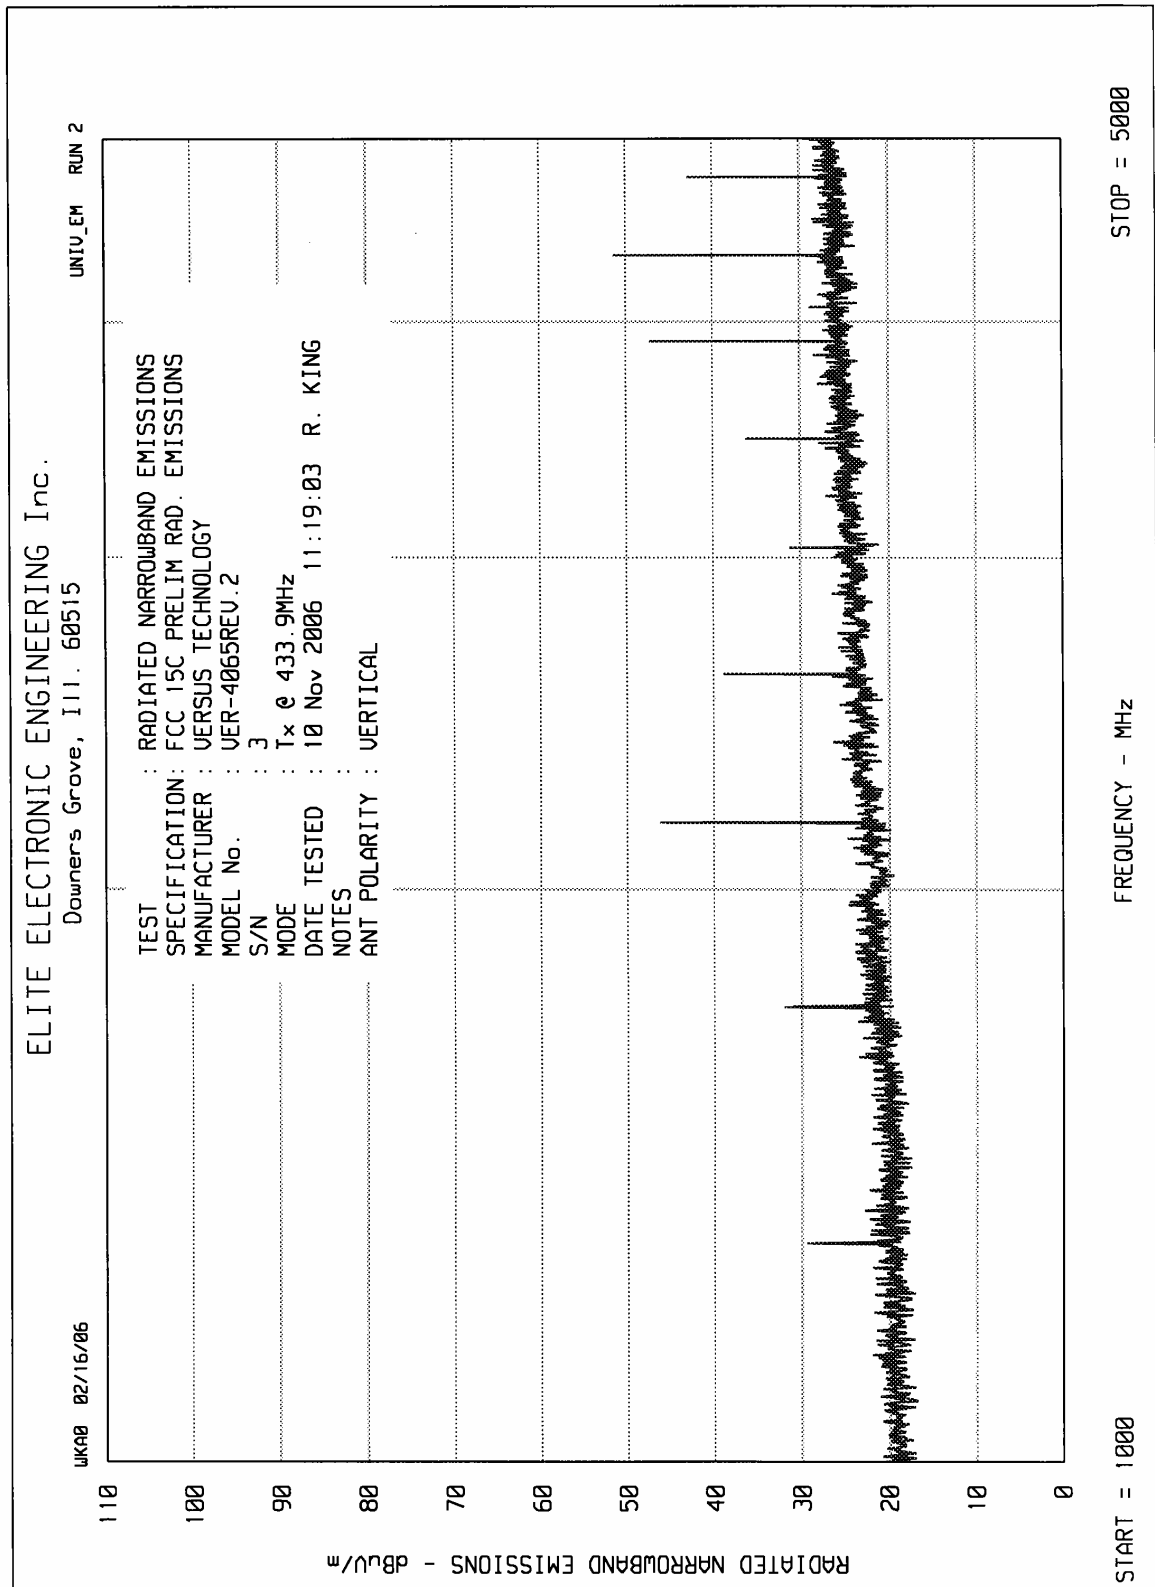



**MANUFACTURER** : Versus Technology, Inc.  
**TEST ITEM** : Remote Station  
**MODEL NO.** : VER-4065 REV. 2  
**SERIAL NO.** : 3  
**SPECIFICATION** : FCC- 15C Transmitter Open Field Data  
**DATE** : November 10, 2006  
**NOTES** : Test Distance is 3 Meters

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)	
433.9	H	60.78		1.5	21.1	0.0	-16.9	66.5	2114.9	4398.3	-6.4
433.9	V	52.02		1.5	21.1	0.0	-16.9	57.7	771.4	4398.3	-15.1
867.8	H	24.7		1.9	27.1	0.0	-16.9	36.9	69.6	440.0	-16.0
867.8	V	21.8		1.9	27.1	0.0	-16.9	33.9	49.7	440.0	-18.9
1301.7	H	18.6		2.4	26.4	0.0	-16.9	30.5	33.6	500.0	-23.4
1301.7	V	22.3		2.4	26.4	0.0	-16.9	34.2	51.1	500.0	-19.8
1735.6	H	17.0		2.8	27.7	0.0	-16.9	30.6	34.0	500.0	-23.3
1735.6	V	20.2		2.8	27.7	0.0	-16.9	33.9	49.4	500.0	-20.1
2169.5	H	27.6		3.2	29.4	0.0	-16.9	43.3	146.9	500.0	-10.6
2169.5	V	30.8		3.2	29.4	0.0	-16.9	46.5	212.2	500.0	-7.4
2603.4	H	19.5		3.7	31.0	0.0	-16.9	37.3	73.1	500.0	-16.7
2603.4	V	30.6		3.7	31.0	0.0	-16.9	48.3	260.6	500.0	-5.7
3037.3	H	20.4		4.0	32.3	0.0	-16.9	39.8	97.8	500.0	-14.2
3037.3	V	22.2		4.0	32.3	0.0	-16.9	41.6	120.4	500.0	-12.4
3471.2	H	27.0		4.3	32.3	0.0	-16.9	46.8	217.9	500.0	-7.2
3471.2	V	25.9		4.3	32.3	0.0	-16.9	45.6	190.2	500.0	-8.4
3905.1	H	24.89		4.5	32.9	0.0	-16.9	45.4	185.9	500.0	-8.6
3905.1	V	24.78		4.5	32.9	0.0	-16.9	45.3	183.5	500.0	-8.7
4339.0	H	26.9		4.7	32.9	0.0	-16.9	47.6	239.3	500.0	-6.4
4339.0	V	25.6		4.7	32.9	0.0	-16.9	46.3	206.7	500.0	-7.7

Checked BY : Richard E. King

---

Richard E. King

ELITE ELECTRONIC ENGINEERING Inc.

