


MMT-503 REMOTE PROGRAMMER

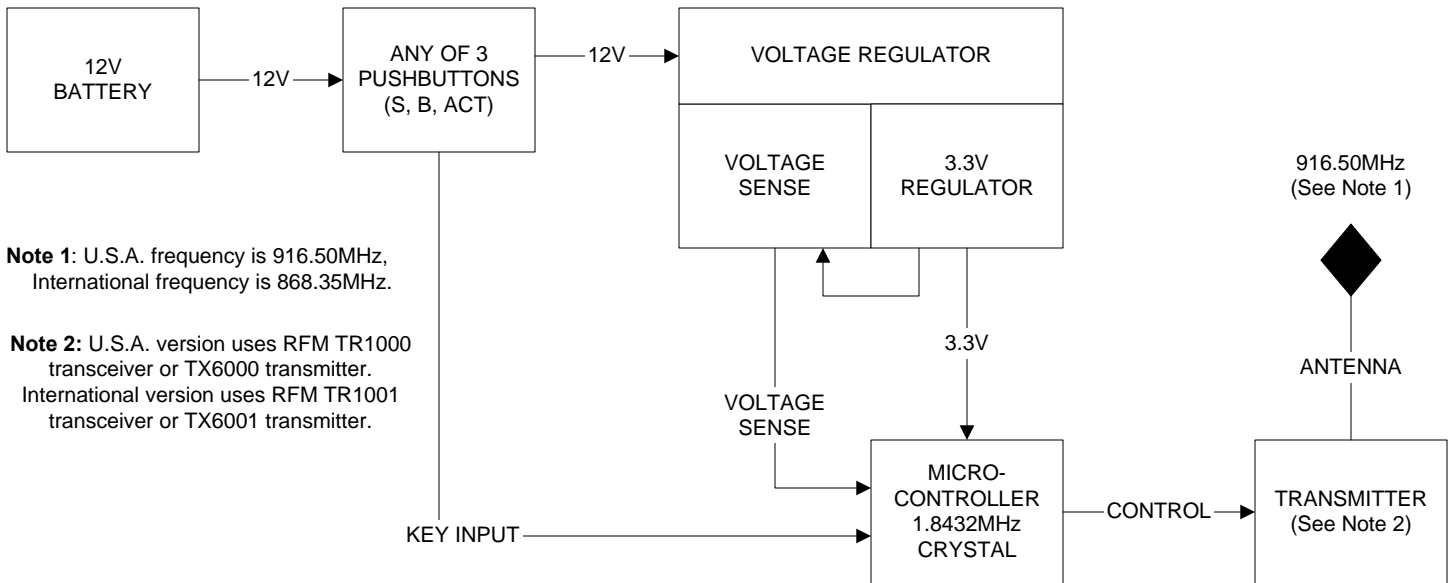

Note 1: U.S.A. frequency is 916.50MHz,
International frequency is 868.35MHz.

Note 2: U.S.A. version uses RFM TR1000
transceiver or TX6000 transmitter.
International version uses RFM TR1001
transceiver or TX6001 transmitter.