



# FCC Part 15.247

## TEST REPORT

For

### AAEON Technology Inc.

5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien Dist., New Taipei City 23145, Taiwan, R.O.C

**FCC ID: OHBFWS2275WB**

<b>Report Type</b>	<b>Original Report</b>
<b>Product Name:</b>	Desktop Network Appliance
<b>Model Name:</b>	FWS-2275E3-A10-00
<b>Serial Model Name:</b>	<b>xFWS-2275x</b> (x - Where x may be any combination of alphanumeric characters or "-" or blank.)
<b>Report Number :</b>	RLK191018001-00B
<b>Report Date :</b>	2019/11/26
<b>Reviewed By :</b>	Zeus Chen <i>Zeus Chen</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp.(Linkou Laboratory) No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.) Tel: +886 (3)3961072; Fax: +886 (3) 3961027 www.bacl.com.tw	

*Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)*

### Revision History

Revision	Report Number	Issue Date	Description
1.0	RLK191018001-00B	2019/11/26	Original Report

**TABLE OF CONTENTS**

**1 GENERAL INFORMATION .....5**

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....5

1.2 OPERATION CONDITION OF EUT.....6

1.3 OBJECTIVE AND TEST METHODOLOGY.....6

1.4 MEASUREMENT UNCERTAINTY .....6

1.5 ENVIRONMENTAL CONDITIONS AND TEST DATE .....6

1.6 TEST FACILITY.....7

**2 SYSTEM TEST CONFIGURATION.....8**

2.1 TEST CHANNELS AND DESCRIPTION OF WORST TEST CONFIGURATION.....8

2.2 SUPPORT EQUIPMENT LIST AND EXTERNAL CABLE LIST .....9

2.3 BLOCK DIAGRAM OF TEST SETUP .....9

2.4 DUTY CYCLE.....10

**3 SUMMARY OF TEST RESULTS.....11**

**4 FCC§15.247(I), §1.1307, § 2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....12**

4.1 APPLICABLE STANDARD.....12

4.2 RF EXPOSURE EVALUATION RESULT.....12

**5 FCC §15.203 - ANTENNA REQUIREMENTS.....13**

5.1 APPLICABLE STANDARD.....13

5.2 ANTENNA LIST AND DETAILS .....13

**6 FCC §15.207 - AC LINE CONDUCTED EMISSIONS .....14**

6.1 APPLICABLE STANDARD.....14

6.2 EUT SETUP AND TEST PROCEDURE.....14

6.3 TEST EQUIPMENT LIST AND DETAILS .....15

6.4 TEST RESULT .....16

**7 FCC §15.209, §15.205, §15.247(D) – SPURIOUS EMISSIONS.....17**

7.1 APPLICABLE STANDARD.....17

7.2 EUT SETUP AND TEST PROCEDURE.....19

7.3 TEST EQUIPMENT LIST AND DETAILS .....20

7.4 TEST RESULT .....21

**8 FCC §15.247(A)(2) – 6 DB EMISSION BANDWIDTH .....37**

8.1 APPLICABLE STANDARD.....37

8.2 TEST PROCEDURE.....37

8.3 TEST EQUIPMENT LIST AND DETAILS .....37

8.4 TEST RESULTS .....38

**9 FCC §15.247(B) (3) – MAXIMUM OUTPUT POWER .....43**

9.1 APPLICABLE STANDARD.....43

9.2 TEST PROCEDURE.....43

9.3 TEST EQUIPMENT LIST AND DETAILS .....43

9.4 TEST RESULTS .....44

**10 FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....45**

10.1 APPLICABLE STANDARD.....45

10.2 TEST PROCEDURE.....45

10.3 TEST EQUIPMENT LIST AND DETAILS .....46

10.4 TEST RESULTS .....46

**11 FCC §15.247(E) – POWER SPECTRAL DENSITY .....51**

11.1 APPLICABLE STANDARD.....51

11.2 TEST PROCEDURE.....51

11.3 TEST EQUIPMENT LIST AND DETAILS .....51

11.4 TEST RESULTS ..... 52

## 1 General Information

### 1.1 Product Description for Equipment under Test (EUT)

<b>Applicant</b>	<b>AAEON Technology Inc.</b> 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien Dist., New Taipei City 23145, Taiwan, R.O.C
<b>Manufacturer</b>	<b>AAEON Technology Inc.</b> 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien Dist., New Taipei City 23145, Taiwan, R.O.C
<b>Brand Name</b>	AAEON
<b>Product (Equipment)</b>	Desktop Network Appliance
<b>Model Name</b>	FWS-2275E3-A10-00
<b>Serial Model Name</b>	xFWS-2275x (x - Where x may be any combination of alphanumeric characters or "-" or blank.)
<b>Model Discrepancy</b>	For marketing purpose.
<b>Frequency Range</b>	IEEE 802.11b/g/n HT20: 2412 - 2462 MHz BLE: 2402 - 2480 MHz
<b>Number of Channels</b>	IEEE 802.11 b/g/n HT20: 11 Channels BLE: 40 Channels
<b>Output Power</b>	IEEE 802.11b: 21.19 dBm (0.1315 W) IEEE 802.11g: 24.02 dBm (0.2523 W) IEEE 802.11n HT20: 23.81 dBm (0.2404 W) BLE: 7.12 dBm (0.0051 W)
<b>Modulation Type</b>	IEEE 802.11b: DSSS IEEE 802.11g/n HT 20: OFDM BLE: GFSK
<b>Related Submittal(s)/Grant(s)</b>	<b>FCC Part 15.247 DSS with FCC ID: OHBFWS2275WB</b>
<b>Received Date</b>	Oct. 18, 2019
<b>Date of Test</b>	Oct. 30, 2019 ~ Nov. 19, 2019

*\*All measurement and test data in this report was gathered from production sample serial number: 191018001 Assigned by BAEL, Linkou Laboratory).*

**1.2 Operation Condition of EUT**

<b>Power Operation (Voltage Range)</b>	<input checked="" type="checkbox"/> AC 120 V/60 Hz <input checked="" type="checkbox"/> Adapter <i>Brand Name: AOEM</i> <i>Model: A0403TD-120033</i> <i>I/P: 100-240Vac, 1.2A</i> <i>O/P: 12Vdc, 3.34A</i> <input type="checkbox"/> By Power Cord.
	<input checked="" type="checkbox"/> DC Type <input checked="" type="checkbox"/> DC Power: 9-32Vdc <input type="checkbox"/> Battery: <input type="checkbox"/> External from USB Cable <input type="checkbox"/> External DC Adapter

**1.3 Objective and Test Methodology**

*The Objective of this Test Report was to document the compliance of the AAEON Technology Inc.. Appliance (Model: FWS-2275E3-A10-00, xFWS-2275x (x - Where x may be any combination of alphanumeric characters or "-" or blank.)) to the requirements of the following Standards:*

- Part 2, Subpart J, Part 15, Subparts A and C, section 15.247 of the Federal Communication Commission’s rules.
- ANSI C63.10-2013 of t American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

**1.4 Measurement Uncertainty**

Parameter	Expanded Measurement uncertainty
RF output power	± 1.488 dB
Occupied Channel Bandwidth	± 453.927 Hz
RF Conducted Emission test	± 2.77 dB
AC Power Line Conducted Emission	± 2.66 dB
Radiated Below 1G	± 3.57 dB
Radiated Above 1G	± 5.32 dB

**1.5 Environmental Conditions and Test Date**

Test Site	Test Date	Temperature (°C)	Relative Humidity (% RH)	Test Engineer
Conduction (CON-01)	2019-10-30	23.2	46	Leo Cheng
Radiated (966A)	2019-11-12 - 2019-11-19	20.6-23	46-51	Leo Cheng
Conducted (TH-02)	2019-11-18 - 2019-11-19	21.9-22.2	59-60	Ethan Shao

## 1.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) by Mutual Recognition Agreement (MRA). The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 0027578244. Designation No.: TW3546. The Test Firm Registration No.: 181430.

## 2 System Test Configuration

### 2.1 Test Channels and Description of Worst Test Configuration

The system was configured for testing in testing mode which was provided by manufacturer.

No special accessory, No modification was made to the EUT and No special equipment used during test.

**For Wi-Fi 2.4G mode, there are totally 11 channels.**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	-	-

For 802.11b/g/n HT20: Channel **1, 6** and **11** were tested.

**For BLE, there are totally 40 channels.**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	--	--
2	2406	--	--
3	2408	37	2476
--	--	38	2478
19	2440	39	2480

For BLE: Channel **0, 19** and **39** were tested.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the Peak power and PSD across all data rates bandwidths, and modulations. Radiated below 1G were tested worst output power.

Modulation Used for Conformance Test			
Configuration	NTX	Data Rate	Worst Data Rate
802.11b	2	1-11 Mbps	1 Mbps
802.11g	2	6-54 Mbps	6 Mbps
802.11n HT 20	2	MCS 0-7	MCS 0
BLE	1	125 kbps-1 Mbps	1 Mbps




Worst Case of Power Setting				
EUT Exercise Software		Command		
Configuration	NTX	Low CH	Mid CH	High CH
802.11b	2	84	84	84
802.11g	2	56	84	54
802.11n HT 20	2	54	84	52
BLE	1	Default	Default	Default

**2.2 Support Equipment List and External Cable List**

No.	Description	Manufacturer	Model Number
A	Monitor	DELL	P2415Qb
B	Monitor(Remote)	ViewSonic	VX2475Smhl-4K/VS16024
C	Keyboard	ASUS	AW211
D	Mouse	ASUS	MOBTU0A
E	Mouse (Remote)	Aibo	8733(KX5)
F	Laptop(Remote)	DELL	E6410
G	Laptop Adapter(Remote)	DELL	LA130PM121


**2.3 Block Diagram of Test Setup**

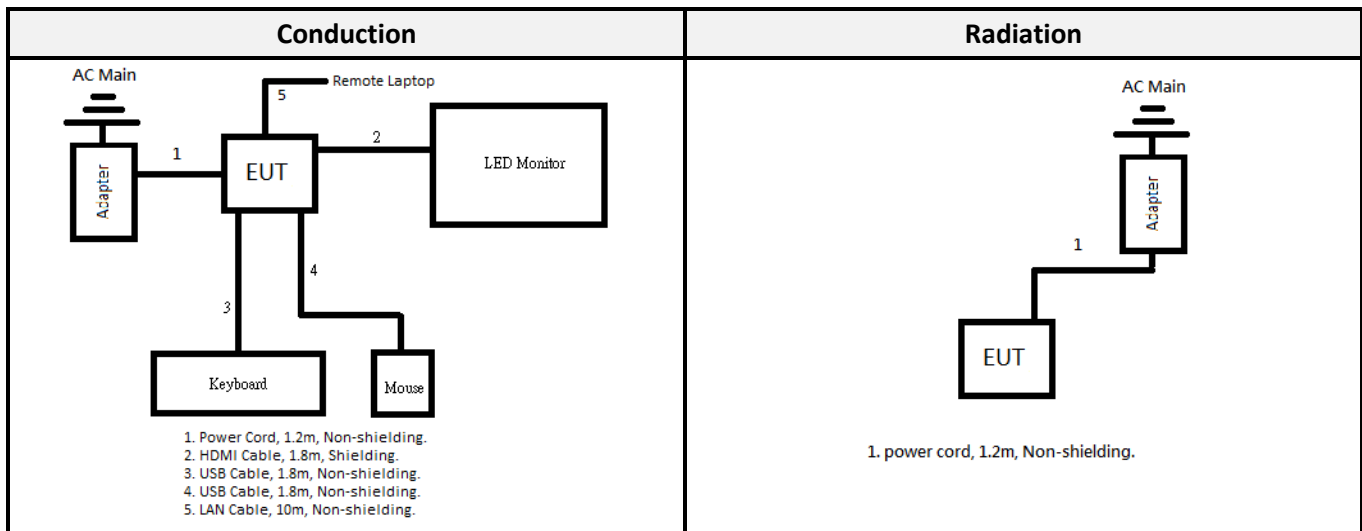

## 2.4 Duty Cycle

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum power transmission duration, T, are required for each tested mode of operation.

Configuration	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	100.00	100.00	100.00	0.00
802.11g	1.42	1.49	95.14	0.22
802.11n HT20	100.00	100.00	100.00	0.00
BLE	0.43	0.62	69.77	1.56

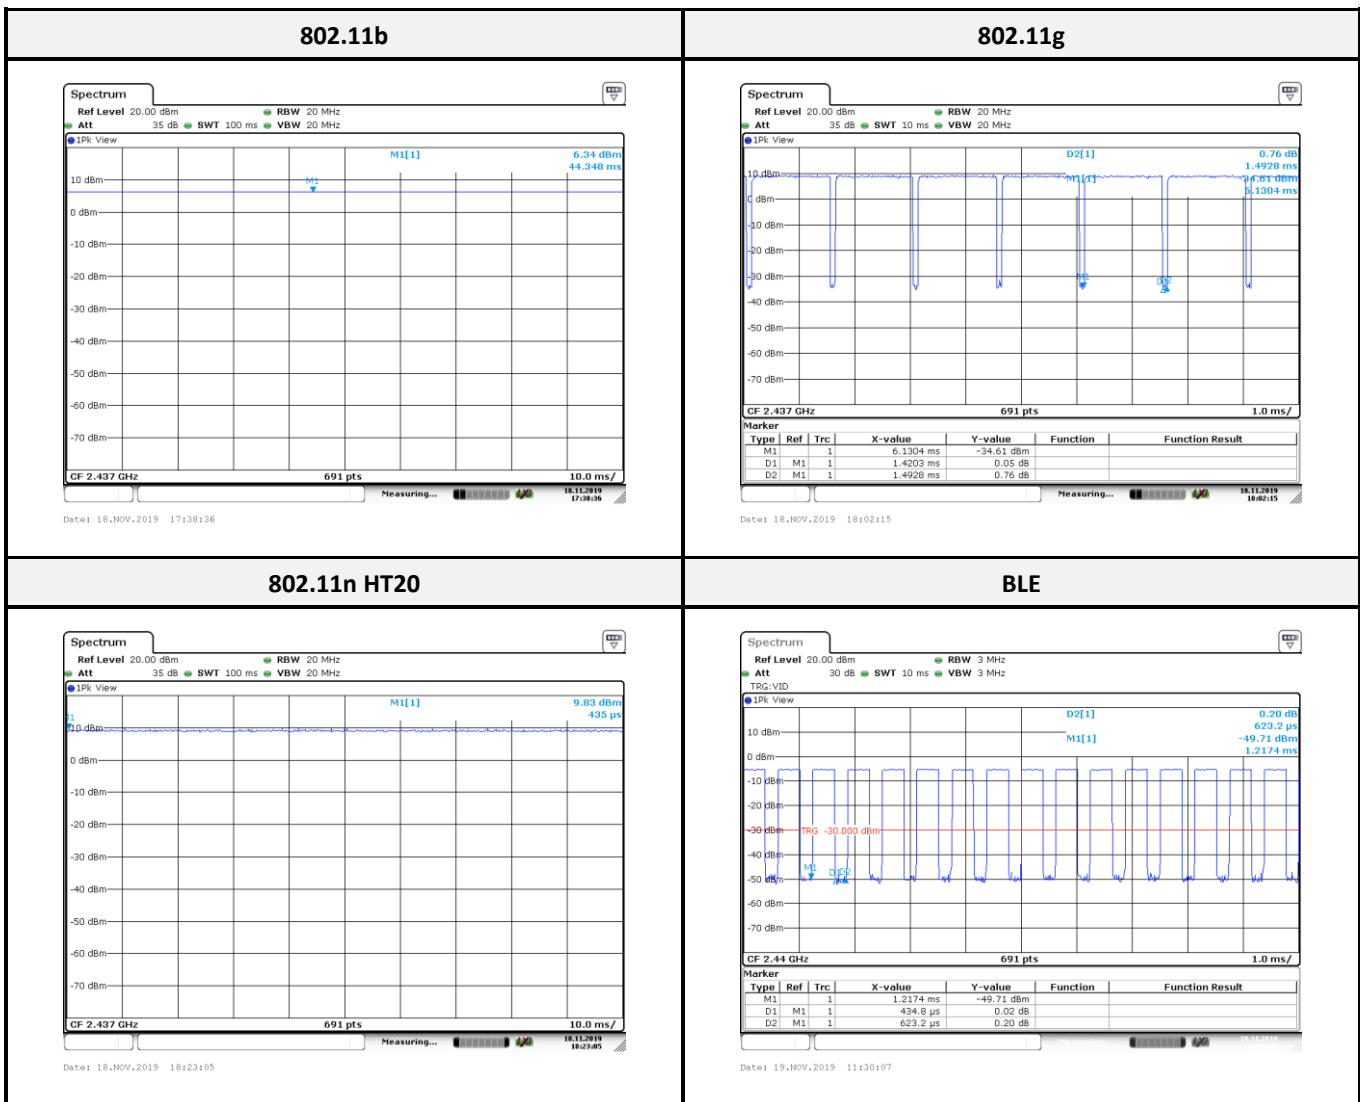

\*Note: Duty Factor = 10\*log (1/Duty cycle)

### 3 Summary of Test Results

FCC Rules	Description of Test	Result
§15.247(i), §1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

## 4 FCC§15.247(i), §1.1307, § 2.1091 – Maximum Permissible Exposure (MPE)

### 4.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

#### Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

**Calculated Formulary:** Predication of MPE limit at a given distance

S = PG/4πR<sup>2</sup> = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

### 4.2 RF Exposure Evaluation Result

#### MPE Evaluation:

Mode	Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi 2.4G	2412-2462	2.00	1.5849	24.50	281.8383	20	0.0889	1.0
BLE	2402-2480	2.00	1.5849	8.00	6.3096	20	0.0020	1.0
BR+EDR	2402-2480	2.00	1.5849	3.00	1.9953	20	0.0006	1.0

Note: Wi-Fi and BT can't simultaneously.

**Result:** MPE evaluation of single and simultaneous transmission meet the requirement of standard.

## 5 FCC §15.203 - Antenna Requirements

### 5.1 Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi

### 5.2 Antenna List and Details

Model	Antenna Type	Antenna Gain	Result
RFA-25-C52M3-B70	Dipole Antenna	2.00 dBi	Compliance

*The EUT has an external dedicated antennas arrangement and the connector type is RP-SMA Male, fulfill the requirement of this section.*

## 6 FCC §15.207 - AC Line Conducted Emissions

### 6.1 Applicable Standard


According to FCC §15.207,

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 2</sup>
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency. Note 2: A linear average detector is required

### 6.2 EUT Setup and Test Procedure

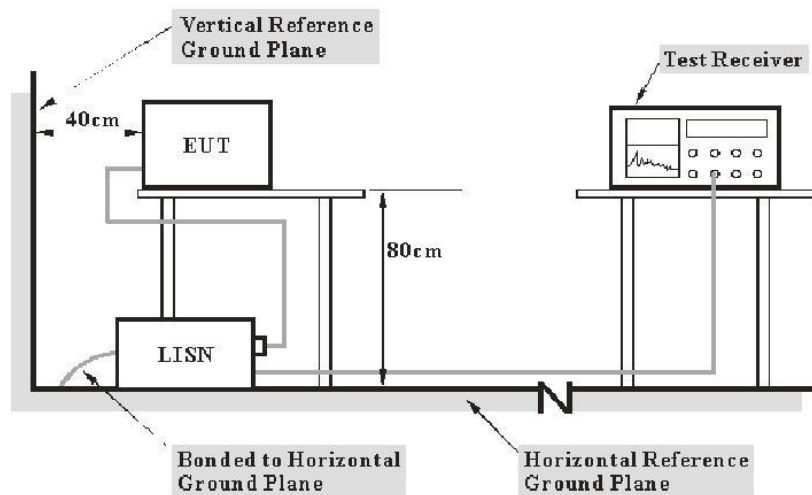

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz. During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	Receiver RBW
150 kHz - 30 MHz	9 kHz



During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

### 6.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>AC Line Conduction Room (CON-01)</b>					
Two-Line V- Network	Rohde & Schwarz	ENV216	100010	2019/09/02	2020/09/01
Pulse Limiter	SCHWARZBECK	VSTD 9561-F	00432	2019/08/28	2020/08/27
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102430	2019/03/27	2020/03/26
RF Cable	EMCI	EMCCFD300-BM- BM-8000	180526	2019/08/08	2020/08/07
Software	Audix	e3 v9	E3LK-03	N.C.R	N.C.R

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

### 6.4 Test Result

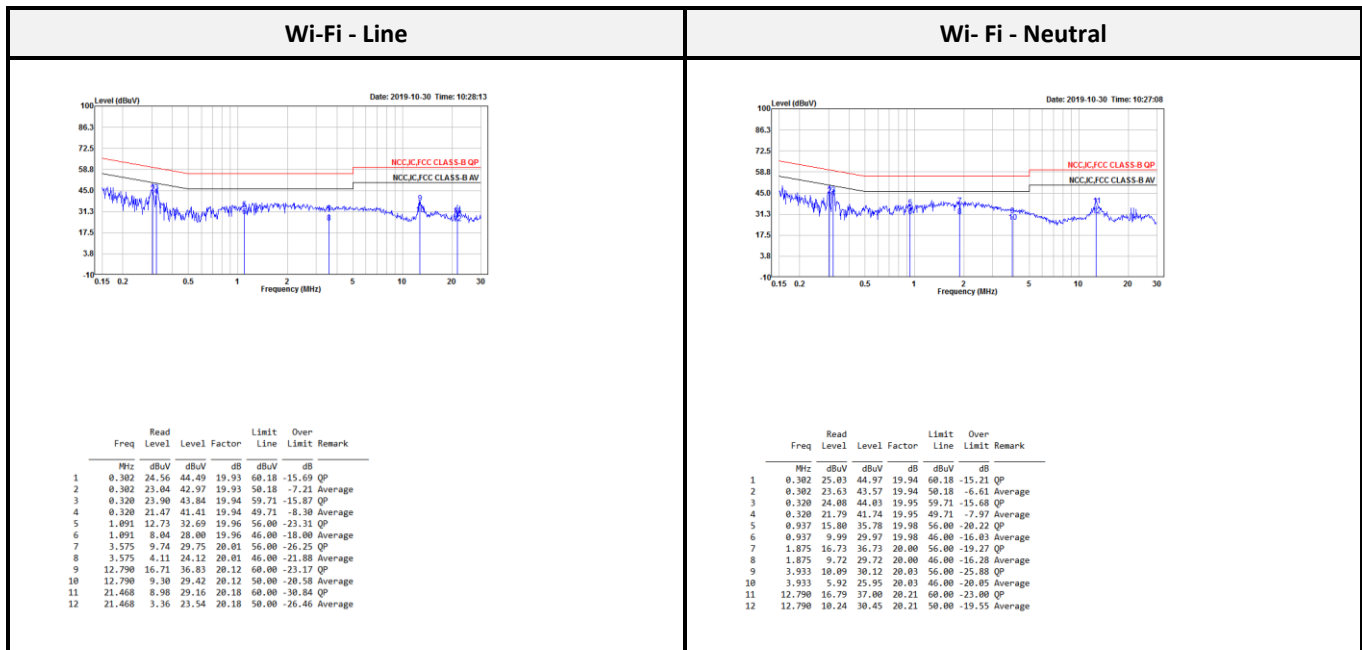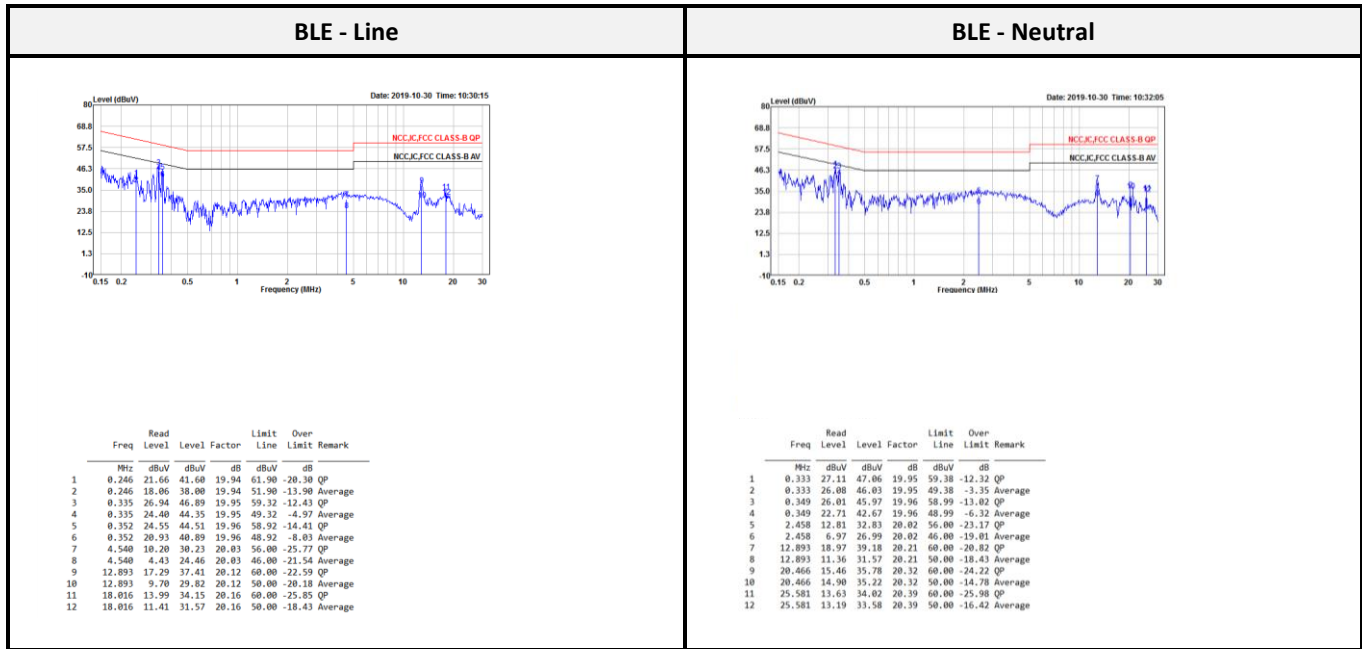

Note1: Transmit mode

Note2:

Level = Read Level + Factor

Over Limit (Margin) = Level - Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator



## 7 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

### 7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	399.9-410	4.5-5.15
0.495-0.505	16.42-16.423	608-614	5.35-5.46
2.1735-2.1905	16.69475-16.69525	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6



As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.2 EUT Setup and Test Procedure

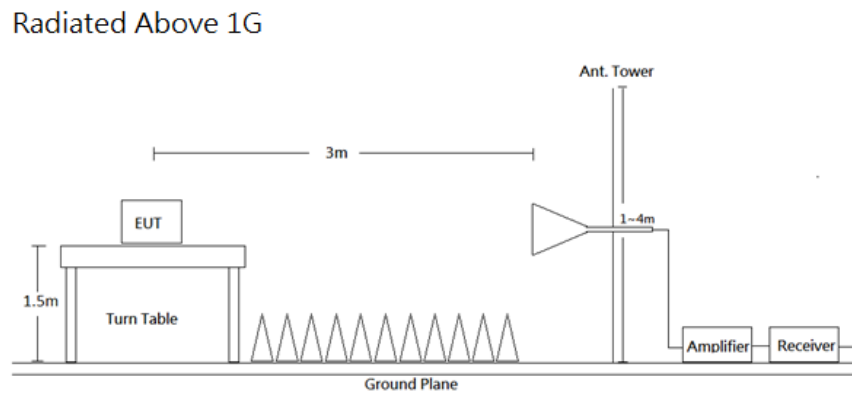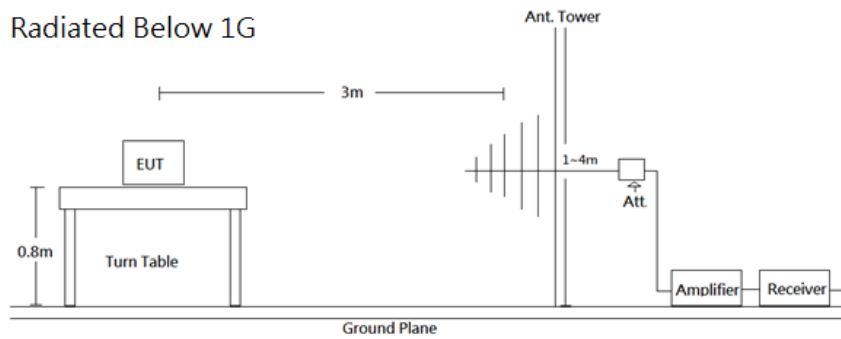

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	-	QP
Above 1 GHz	1 MHz	3 MHz	-	PK
	1 MHz	10 Hz	>98%	Ave
	1 MHz	1/T	<98%	Ave

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

### 7.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Radiation 3M Room (966A)</b>					
Active Loop	EMCO	6502	0001-3322	2019/03/15	2020/03/14
Bilog Antenna/6 dB Attenuator	SUNOL SCIENCES & EMEC /EMCI	JB3/N-6-06	A111513/AT-N0668	2019/03/29	2020/03/28
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2019/04/17	2020/04/16
Horn Antenna	ETS-Lindgren	3115	00109141	2019/07/05	2020/07/04
Horn Antenna	ETS-Lindgren	3160-09	00123852	2019/07/11	2020/07/10
Preamplifier	A.H. Systems	PAM-1840VH	174	2019/02/18	2020/02/17
Preamplifier	A.H. Systems	PAM-0118	478	2019/03/28	2020/03/27
Microflex Cable (1m)	EMCI	EMC106-SM-SM-2000	180515	2019/08/07	2020/08/06
Microflex Cable (2m)	MTJ	H0919	00000-MT28A-100	2019/08/07	2020/08/06
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-001	2019/08/07	2020/08/06
Turn Table	Chaintek	T-200-S-1	003501	N.C.R	N.C.R
Antenna Tower	Chaintek	MBD-400-1	003504	N.C.R	N.C.R
Controller	Chaintek	3000-1	003507	N.C.R	N.C.R
Software	Audix	e3 v9	E3LK-01	N.C.R	N.C.R
<b>Conducted Room(TH-02)</b>					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27


**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

### 7.4 Test Result

Wi-Fi Mode:

Transmitting mode (Pre-scan with three orthogonal axis, and worse case as Y axis)

Below 1G (30 MHz-1 GHz) test the output power worst mode

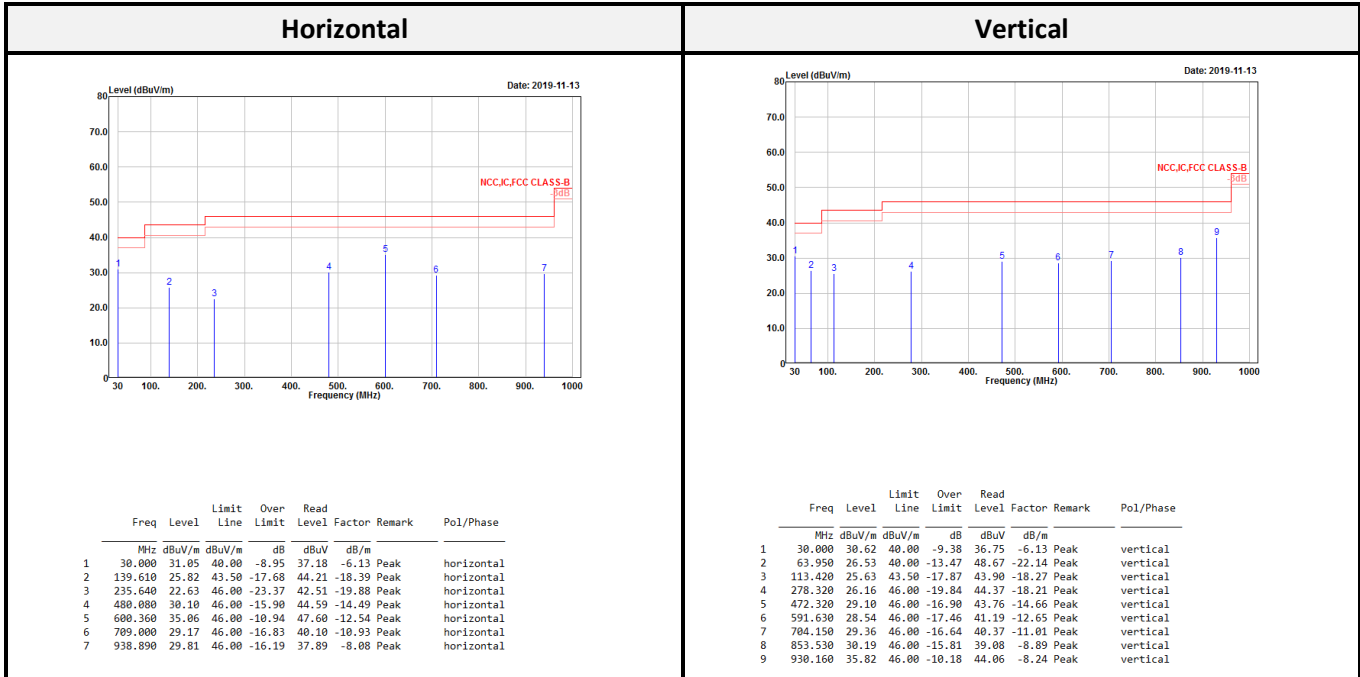

Note1: Transmit with MIMO mode

Note2:

Level = Read Level + Factor

Over Limit = Level – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

**Above 1G (1 GHz-26.5 GHz)**

**802.11b mode:**

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.072	45.44	54.00	-8.56	53.07	-7.63	Average	2361.744	37.94	54.00	-16.06	45.64	-7.70	Average
2389.072	58.93	74.00	-15.07	66.56	-7.63	Peak	2361.744	51.23	74.00	-22.77	58.93	-7.70	Peak
2411.248	102.75			110.35	-7.60	Average	2413.040	91.27			98.86	-7.59	Average
2411.248	105.35			112.95	-7.60	Peak	2413.040	93.86			101.45	-7.59	Peak
4824.000	53.27	54.00	-0.73	52.63	0.64	Average	4824.000	43.43	54.00	-10.57	42.79	0.64	Average
4824.000	58.43	74.00	-15.57	57.79	0.64	Peak	4824.000	53.80	74.00	-20.20	53.16	0.64	Peak
7236.000	41.76	54.00	-12.24	36.38	5.38	Average	7236.000	41.83	54.00	-12.17	36.45	5.38	Average
7236.000	52.00	74.00	-22.00	46.62	5.38	Peak	7236.000	52.00	74.00	-22.00	46.62	5.38	Peak

Middle CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2386.956	41.24	54.00	-12.76	48.88	-7.64	Average	2376.550	37.73	54.00	-16.27	45.39	-7.66	Average
2386.956	52.86	74.00	-21.14	60.50	-7.64	Peak	2376.550	51.59	74.00	-22.41	59.25	-7.66	Peak
2436.324	102.84			110.38	-7.54	Average	2436.324	91.74			99.28	-7.54	Average
2436.324	105.47			113.01	-7.54	Peak	2436.324	94.34			101.88	-7.54	Peak
2484.240	46.15	54.00	-7.85	53.49	-7.34	Average	2490.774	38.24	54.00	-15.76	45.57	-7.33	Average
2484.240	54.50	74.00	-19.50	61.84	-7.34	Peak	2490.774	52.44	74.00	-21.56	59.77	-7.33	Peak
4874.000	53.01	54.00	-0.99	52.22	0.79	Average	4874.000	46.57	54.00	-7.43	45.78	0.79	Average
4874.000	58.30	74.00	-15.70	57.51	0.79	Peak	4874.000	54.26	74.00	-19.74	53.47	0.79	Peak
7311.000	41.85	54.00	-12.15	36.21	5.64	Average	7311.000	41.91	54.00	-12.09	36.27	5.64	Average
7311.000	54.93	74.00	-19.07	49.29	5.64	Peak	7311.000	55.42	74.00	-18.58	49.78	5.64	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2463.000	103.20			110.62	-7.42	Average	2461.100	92.50			99.93	-7.43	Average
2463.000	105.80			113.22	-7.42	Peak	2461.100	95.10			102.53	-7.43	Peak
2484.700	47.07	54.00	-6.93	54.41	-7.34	Average	2484.400	40.68	54.00	-13.32	48.02	-7.34	Average
2484.700	59.96	74.00	-14.04	67.30	-7.34	Peak	2484.400	51.51	74.00	-22.49	58.85	-7.34	Peak
4924.000	51.05	54.00	-2.95	50.21	0.84	Average	4924.000	45.67	54.00	-8.33	44.83	0.84	Average
4924.000	56.87	74.00	-17.13	56.03	0.84	Peak	4924.000	54.83	74.00	-19.17	53.99	0.84	Peak
7386.000	43.05	54.00	-10.95	37.13	5.92	Average	7386.000	43.03	54.00	-10.97	37.11	5.92	Average
7386.000	52.62	74.00	-21.38	46.70	5.92	Peak	7386.000	52.76	74.00	-21.24	46.84	5.92	Peak

**802.11g mode:**

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2388.624	51.51	54.00	-2.49	59.14	-7.63	Average	2389.632	41.19	54.00	-12.81	48.82	-7.63	Average
2388.624	67.01	74.00	-6.99	74.64	-7.63	Peak	2389.632	54.54	74.00	-19.46	62.17	-7.63	Peak
2418.752	96.85			104.43	-7.58	Average	2410.352	87.17			94.77	-7.60	Average
2418.752	106.68			114.26	-7.58	Peak	2410.352	97.31			104.91	-7.60	Peak
4824.000	41.22	54.00	-12.78	40.58	0.64	Average	4824.000	39.19	54.00	-14.81	38.55	0.64	Average
4824.000	51.80	74.00	-22.20	51.16	0.64	Peak	4824.000	49.60	74.00	-24.40	48.96	0.64	Peak
7236.000	42.20	54.00	-11.80	36.82	5.38	Average	7236.000	42.25	54.00	-11.75	36.87	5.38	Average
7236.000	52.37	74.00	-21.63	46.99	5.38	Peak	7236.000	51.73	74.00	-22.27	46.35	5.38	Peak

Middle CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2386.956	41.87	54.00	-12.13	49.51	-7.64	Average	2385.504	37.92	54.00	-16.08	45.56	-7.64	Average
2386.956	54.36	74.00	-19.64	62.00	-7.64	Peak	2385.504	50.95	74.00	-23.05	58.59	-7.64	Peak
2435.356	98.54			106.08	-7.54	Average	2435.356	85.98			93.52	-7.54	Average
2435.356	108.46			116.00	-7.54	Peak	2435.356	96.01			103.55	-7.54	Peak
2487.144	46.81	54.00	-7.19	54.15	-7.34	Average	2494.404	40.64	54.00	-13.36	47.97	-7.33	Average
2487.144	57.45	74.00	-16.55	64.79	-7.34	Peak	2494.404	51.21	74.00	-22.79	58.54	-7.33	Peak
4874.000	42.75	54.00	-11.25	41.96	0.79	Average	4874.000	39.36	54.00	-14.64	38.57	0.79	Average
4874.000	51.31	74.00	-22.69	50.52	0.79	Peak	4874.000	49.59	74.00	-24.41	48.80	0.79	Peak
7311.000	42.39	54.00	-11.61	36.75	5.64	Average	7311.000	42.62	54.00	-11.38	36.98	5.64	Average
7311.000	52.52	74.00	-21.48	46.88	5.64	Peak	7311.000	51.42	74.00	-22.58	45.78	5.64	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2460.300	96.47			103.90	-7.43	Average	2457.100	84.17			91.62	-7.45	Average
2460.300	106.34			113.77	-7.43	Peak	2457.100	94.29			101.74	-7.45	Peak
2483.700	52.16	54.00	-1.84	59.50	-7.34	Average	2484.400	40.73	54.00	-13.27	48.07	-7.34	Average
2483.700	67.75	74.00	-6.25	75.09	-7.34	Peak	2484.400	52.38	74.00	-21.62	59.72	-7.34	Peak
4924.000	40.95	54.00	-13.05	40.11	0.84	Average	4924.000	39.31	54.00	-14.69	38.47	0.84	Average
4924.000	49.88	74.00	-24.12	49.04	0.84	Peak	4924.000	49.68	74.00	-24.32	48.84	0.84	Peak
7386.000	42.76	54.00	-11.24	36.84	5.92	Average	7386.000	42.14	54.00	-11.86	36.22	5.92	Average
7386.000	53.79	74.00	-20.21	47.87	5.92	Peak	7386.000	52.54	74.00	-21.46	46.62	5.92	Peak

**802.11n HT20 mode:**


Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.968	52.62	54.00	-1.38	60.25	-7.63	Average	2388.848	39.91	54.00	-14.09	47.54	-7.63	Average
2389.968	72.17	74.00	-1.83	79.80	-7.63	Peak	2388.848	53.94	74.00	-20.06	61.57	-7.63	Peak
2417.968	96.11			103.69	-7.58	Average	2410.128	86.66			94.26	-7.60	Average
2417.968	106.40			113.98	-7.58	Peak	2410.128	97.75			105.35	-7.60	Peak
4824.000	37.17	54.00	-16.83	36.53	0.64	Average	4824.000	37.03	54.00	-16.97	36.39	0.64	Average
4824.000	52.61	74.00	-21.39	51.97	0.64	Peak	4824.000	50.79	74.00	-23.21	50.15	0.64	Peak
7236.000	39.70	54.00	-14.30	34.32	5.38	Average	7236.000	39.75	54.00	-14.25	34.37	5.38	Average
7236.000	54.28	74.00	-19.72	48.90	5.38	Peak	7236.000	53.72	74.00	-20.28	48.34	5.38	Peak

Middle CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.618	44.50	54.00	-9.50	52.13	-7.63	Average	2385.262	40.14	54.00	-13.86	47.78	-7.64	Average
2389.618	57.36	74.00	-16.64	64.99	-7.63	Peak	2385.262	52.66	74.00	-21.34	60.30	-7.64	Peak
2434.630	98.82			106.36	-7.54	Average	2439.712	89.64			97.16	-7.52	Average
2434.630	109.20			116.74	-7.54	Peak	2439.712	100.73			108.25	-7.52	Peak
2485.450	45.39	54.00	-8.61	52.73	-7.34	Average	2493.436	39.81	54.00	-14.19	47.14	-7.33	Average
2485.450	58.41	74.00	-15.59	65.75	-7.34	Peak	2493.436	52.31	74.00	-21.69	59.64	-7.33	Peak
4874.000	37.33	54.00	-16.67	36.53	0.80	Average	4874.000	37.30	54.00	-16.70	36.50	0.80	Average
4874.000	51.98	74.00	-22.02	51.18	0.80	Peak	4874.000	51.41	74.00	-22.59	50.61	0.80	Peak
7311.000	40.28	54.00	-13.72	34.64	5.64	Average	7311.000	40.24	54.00	-13.76	34.60	5.64	Average
7311.000	54.68	74.00	-19.32	49.04	5.64	Peak	7311.000	53.85	74.00	-20.15	48.21	5.64	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2466.300	95.73			103.14	-7.41	Average	2464.200	83.07			90.48	-7.41	Average
2466.300	106.60			114.01	-7.41	Peak	2464.200	94.49			101.90	-7.41	Peak
2483.700	52.52	54.00	-1.48	59.86	-7.34	Average	2550.500	39.33	54.00	-14.67	46.47	-7.14	Average
2483.700	68.82	74.00	-5.18	76.16	-7.34	Peak	2550.500	52.87	74.00	-21.13	60.01	-7.14	Peak
4924.000	37.32	54.00	-16.68	36.49	0.83	Average	4924.000	37.29	54.00	-16.71	36.46	0.83	Average
4924.000	51.13	74.00	-22.87	50.30	0.83	Peak	4924.000	51.39	74.00	-22.61	50.56	0.83	Peak
7386.000	40.34	54.00	-13.66	34.42	5.92	Average	7386.000	40.27	54.00	-13.73	34.35	5.92	Average
7386.000	55.49	74.00	-18.51	49.57	5.92	Peak	7386.000	54.28	74.00	-19.72	48.36	5.92	Peak



**Above 1G (1 GHz-26.5 GHz): The worst mode:**

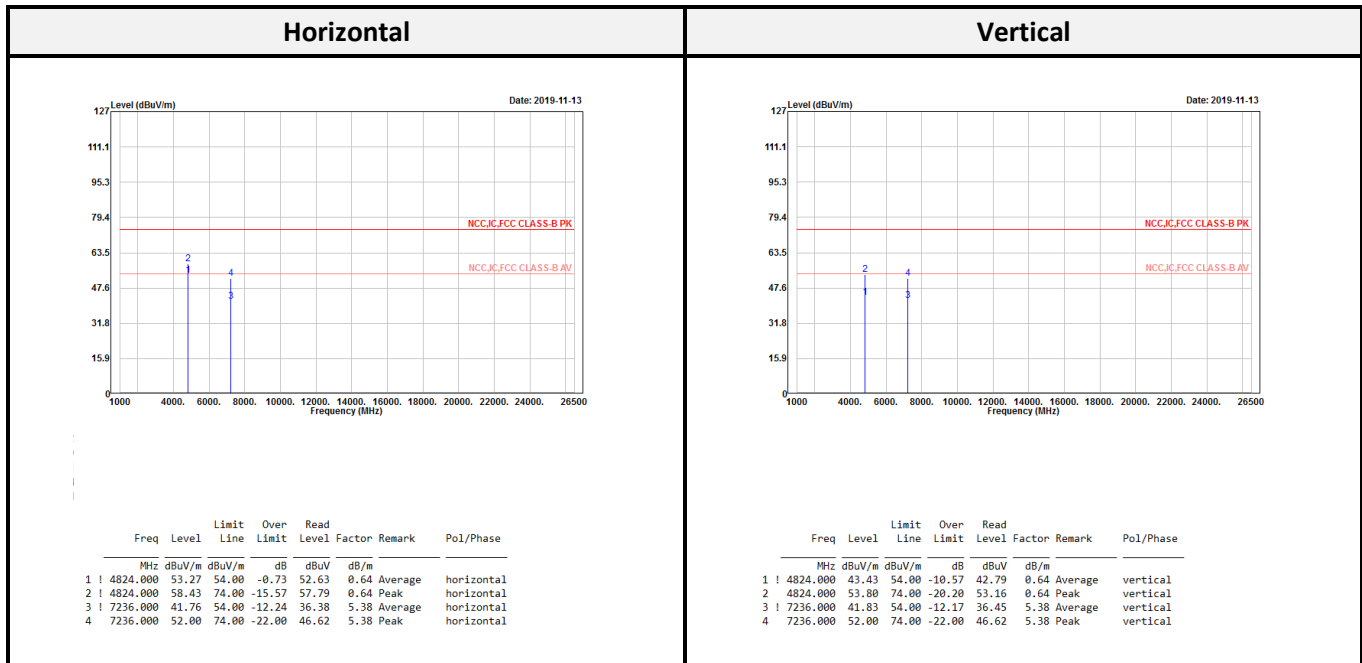

Note1: Transmit with MIMO mode

Note2:

Level = Read Level + Factor

Over Limit = Level – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

**BLE Mode:**

**Transmitting mode** (Pre-scan with three orthogonal axis, and worse case as Y axis)

**Below 1G (30 MHz-1 GHz) test the worst mode**

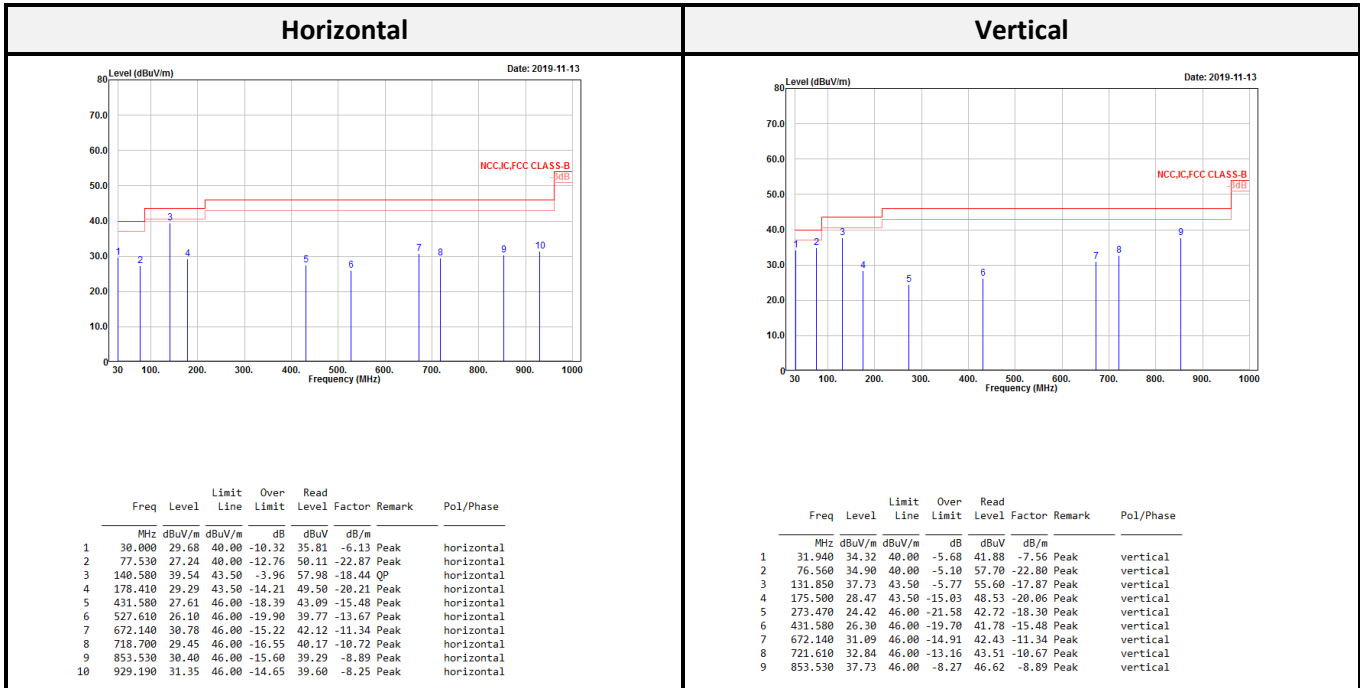

*Result = Reading + Correct Factor*

*Margin = Result – Limit*

*Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain*

*Spurious emissions more than 20 dB below the limit were not reported*

**Above 1G (1 GHz-26.5 GHz)**


**BLE mode:**

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2349.500	32.24	54.00	-21.76	39.97	-7.73	Average	2345.400	32.17	54.00	-21.83	39.92	-7.75	Average
2349.500	45.02	74.00	-28.98	52.75	-7.73	Peak	2345.400	45.51	74.00	-28.49	53.26	-7.75	Peak
2402.300	90.64			98.26	-7.62	Average	2401.800	80.64			88.26	-7.62	Average
2402.300	91.75			99.37	-7.62	Peak	2401.800	81.78			89.40	-7.62	Peak
4804.000	30.96	54.00	-23.04	30.34	0.62	Average	4804.000	30.99	54.00	-23.01	30.37	0.62	Average
4804.000	43.76	74.00	-30.24	43.14	0.62	Peak	4804.000	42.94	74.00	-31.06	42.32	0.62	Peak
7206.000	33.68	54.00	-20.32	28.43	5.25	Average	7206.000	33.73	54.00	-20.27	28.48	5.25	Average
7206.000	45.54	74.00	-28.46	40.29	5.25	Peak	7206.000	46.25	74.00	-27.75	41.00	5.25	Peak

Middle CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2355.012	33.13	54.00	-20.87	40.85	-7.72	Average	2355.012	33.13	54.00	-20.87	40.85	-7.72	Average
2355.012	46.04	74.00	-27.96	53.76	-7.72	Peak	2355.012	46.04	74.00	-27.96	53.76	-7.72	Peak
2439.954	92.90			100.42	-7.52	Average	2439.954	92.90			100.42	-7.52	Average
2439.954	94.04			101.56	-7.52	Peak	2439.954	94.04			101.56	-7.52	Peak
2485.934	33.83	54.00	-20.17	41.17	-7.34	Average	2485.934	33.83	54.00	-20.17	41.17	-7.34	Average
2485.934	46.17	74.00	-27.83	53.51	-7.34	Peak	2485.934	46.17	74.00	-27.83	53.51	-7.34	Peak
4880.000	31.22	54.00	-22.78	30.42	0.80	Average	4876.000	44.32	74.00	-29.68	43.52	0.80	Peak
4880.000	44.99	74.00	-29.01	44.19	0.80	Peak	4880.000	31.68	54.00	-22.32	30.88	0.80	Average
7320.000	35.18	54.00	-18.82	29.48	5.70	Average	7320.000	35.75	54.00	-18.25	30.05	5.70	Average
7320.000	48.04	74.00	-25.96	42.34	5.70	Peak	7320.000	47.75	74.00	-26.25	42.05	5.70	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2479.758	93.20			100.55	-7.35	Average	2479.758	82.23			89.58	-7.35	Average
2479.758	94.35			101.70	-7.35	Peak	2479.758	83.38			90.73	-7.35	Peak
2504.522	33.00	54.00	-21.00	40.30	-7.30	Average	2516.822	33.60	54.00	-20.40	40.86	-7.26	Average
2504.522	45.90	74.00	-28.10	53.20	-7.30	Peak	2516.822	46.06	74.00	-27.94	53.32	-7.26	Peak
4960.000	32.64	54.00	-21.36	31.82	0.82	Average	4960.000	31.46	54.00	-22.54	30.64	0.82	Average
4961.000	45.88	74.00	-28.12	45.06	0.82	Peak	4961.000	44.09	74.00	-29.91	43.27	0.82	Peak
7440.000	36.07	54.00	-17.93	30.01	6.06	Average	7440.000	35.85	54.00	-18.15	29.79	6.06	Average
7440.000	48.07	74.00	-25.93	42.01	6.06	Peak	7440.000	47.80	74.00	-26.20	41.74	6.06	Peak

**Above 1G (1 GHz-26.5 GHz): The worst mode**

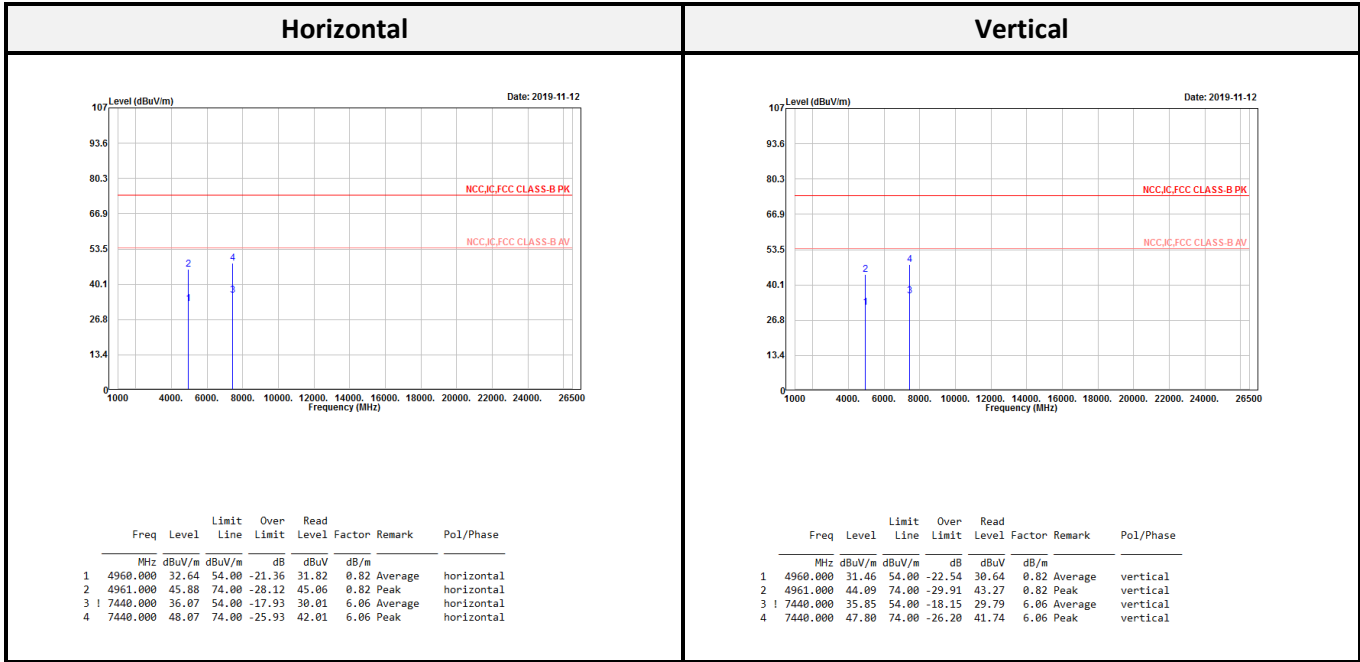

*Level = Read Level + Factor*

*Over Limit = Level – Limit*


*Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain*

*Spurious emissions more than 20 dB below the limit were not reported*

**Conducted Spurious Emissions:**


Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
<b>802.11b mode-Chain 0</b>				
Low	2412	54.42	≥ 20	Compliance
Mid	2437	54.64	≥ 20	Compliance
High	2462	55.75	≥ 20	Compliance
<b>802.11b mode-Chain 1</b>				
Low	2412	52.09	≥ 20	Compliance
Mid	2437	49.95	≥ 20	Compliance
High	2462	50.72	≥ 20	Compliance
<b>802.11g mode-Chain 0</b>				
Low	2412	49.18	≥ 20	Compliance
Mid	2437	50.89	≥ 20	Compliance
High	2462	52.62	≥ 20	Compliance
<b>802.11g mode-Chain 1</b>				
Low	2412	48.00	≥ 20	Compliance
Mid	2437	51.22	≥ 20	Compliance
High	2462	50.37	≥ 20	Compliance
<b>802.11n HT20 mode-Chain 0</b>				
Low	2412	51.86	≥ 20	Compliance
Mid	2437	55.66	≥ 20	Compliance
High	2462	47.49	≥ 20	Compliance
<b>802.11n HT20 mode-Chain 1</b>				
Low	2412	48.62	≥ 20	Compliance
Mid	2437	50.97	≥ 20	Compliance
High	2462	49.16	≥ 20	Compliance
<b>BLE-1Mbps mode</b>				
Low	2402	43.66	≥ 20	Compliance
Mid	2440	45.97	≥ 20	Compliance
High	2480	46.28	≥ 20	Compliance

802.11b mode

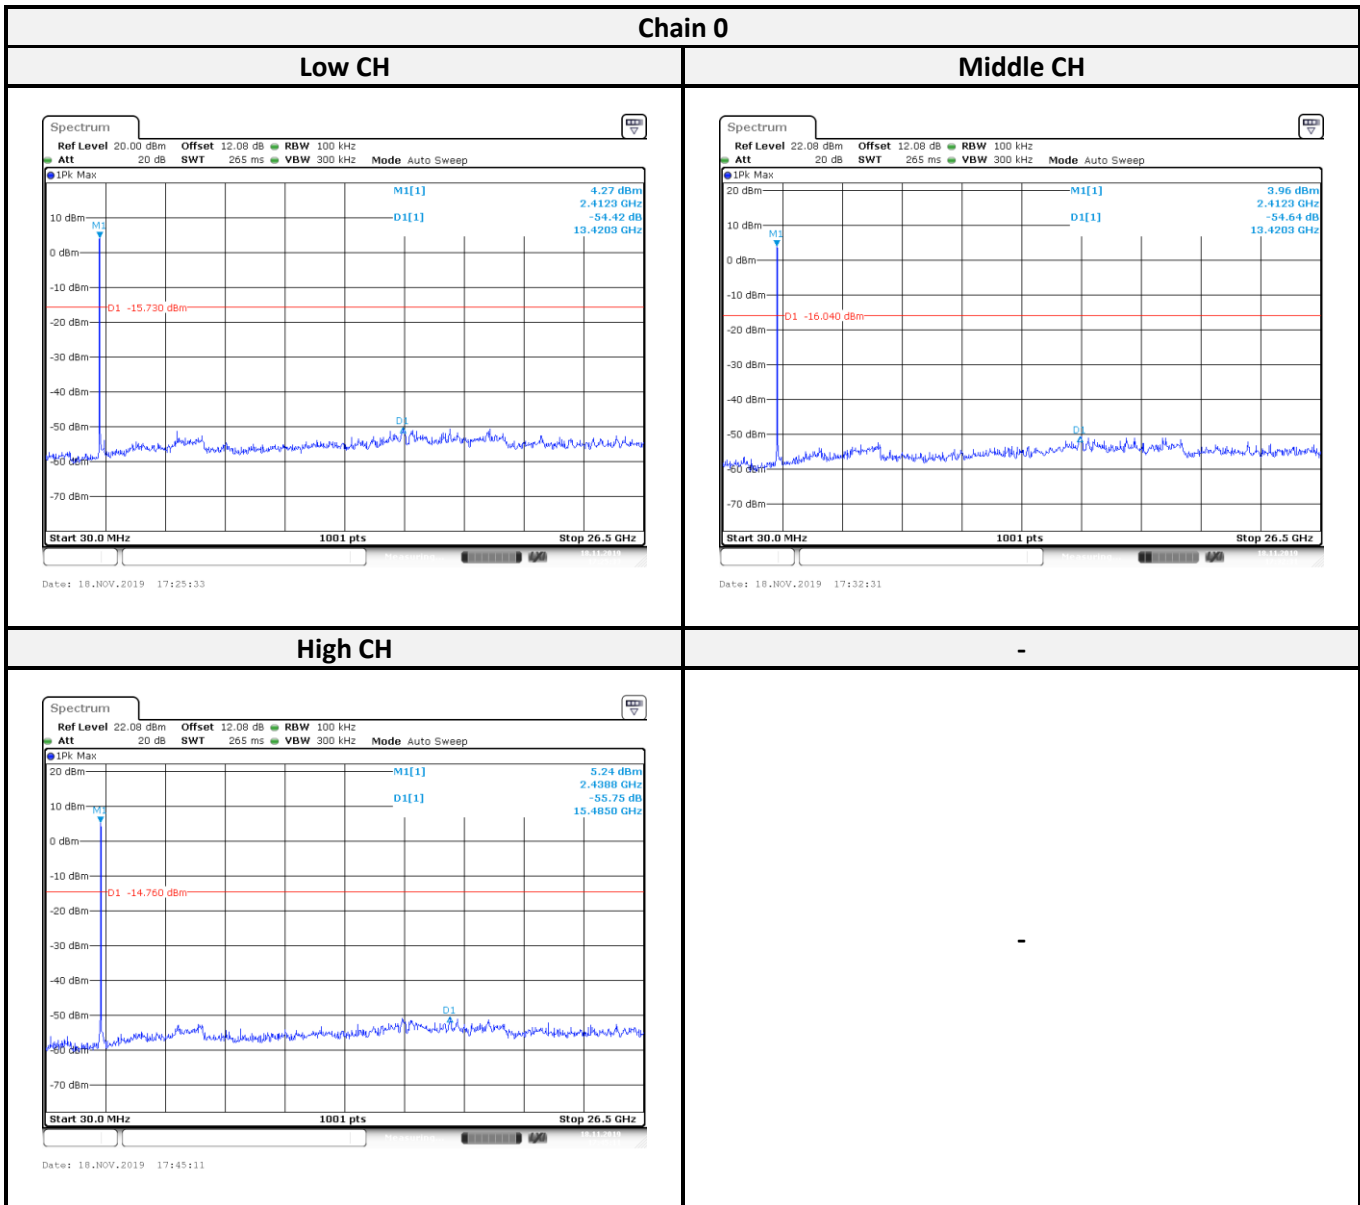


Chain 1


Low CH

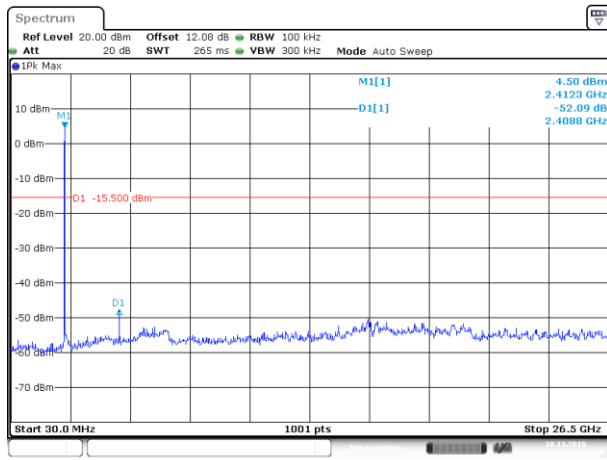

Middle CH

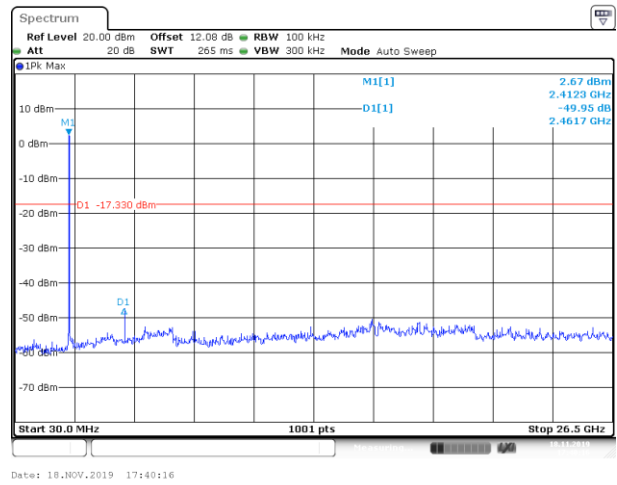

High CH

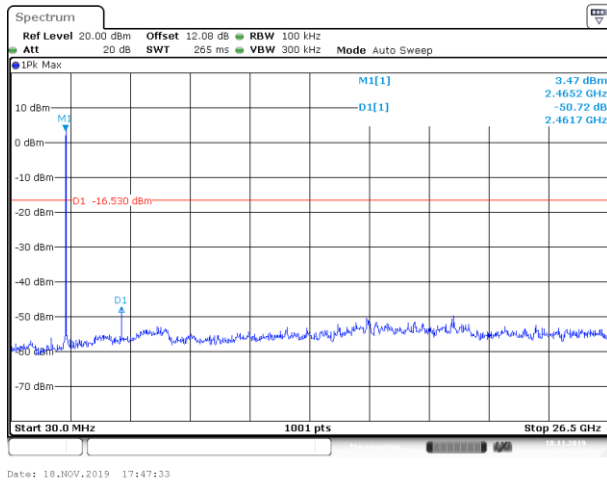


-

802.11g mode


Chain 0

Low CH

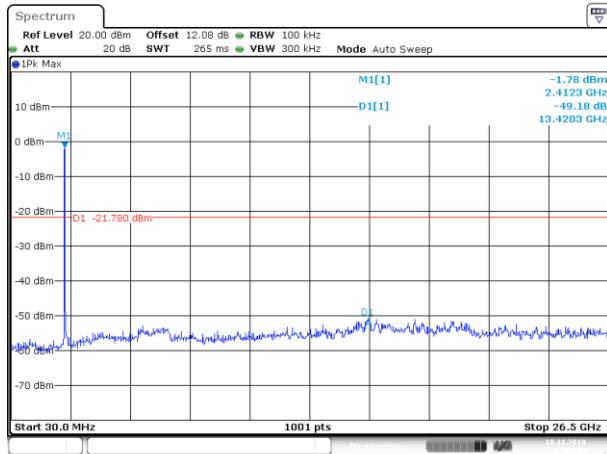


Date: 18.NOV.2019 17:53:05

Middle CH

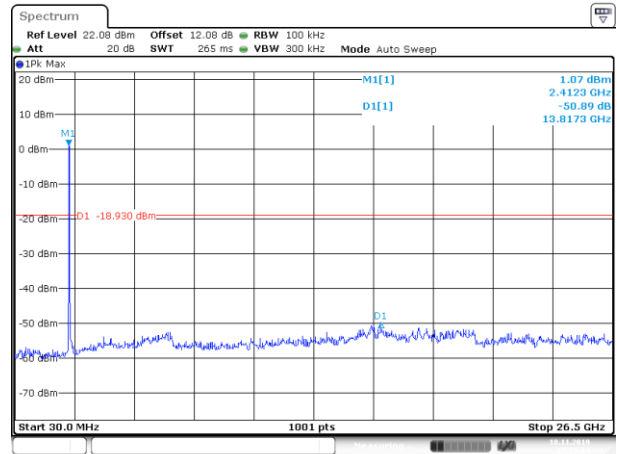

Date: 18.NOV.2019 17:59:14

High CH

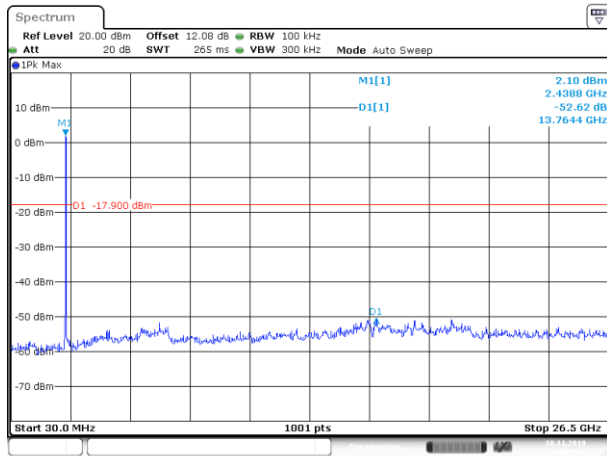


Date: 18.NOV.2019 18:09:22

-




Chain 1

Low CH

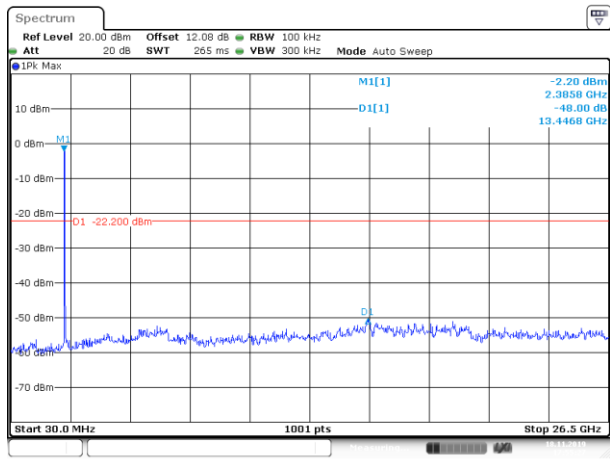


Date: 18.NOV.2019 17:55:27

Middle CH

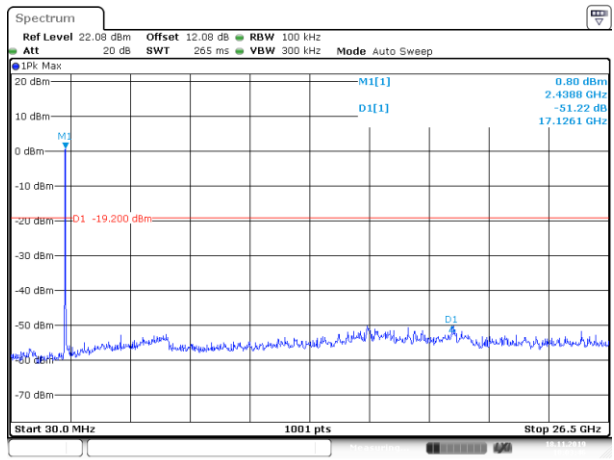


Date: 18.NOV.2019 10:03:46

High CH

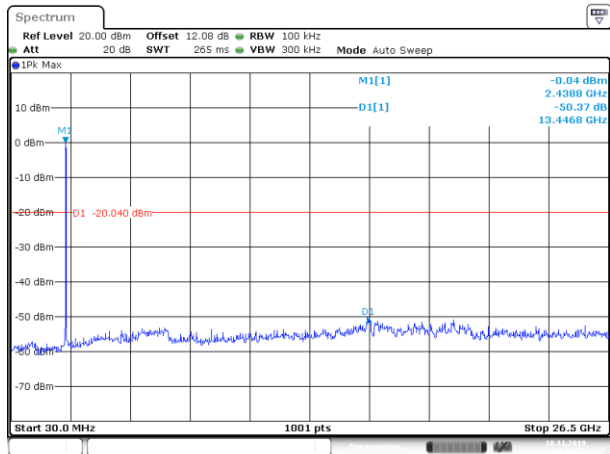


Date: 18.NOV.2019 10:11:31

802.11n HT20 mode:

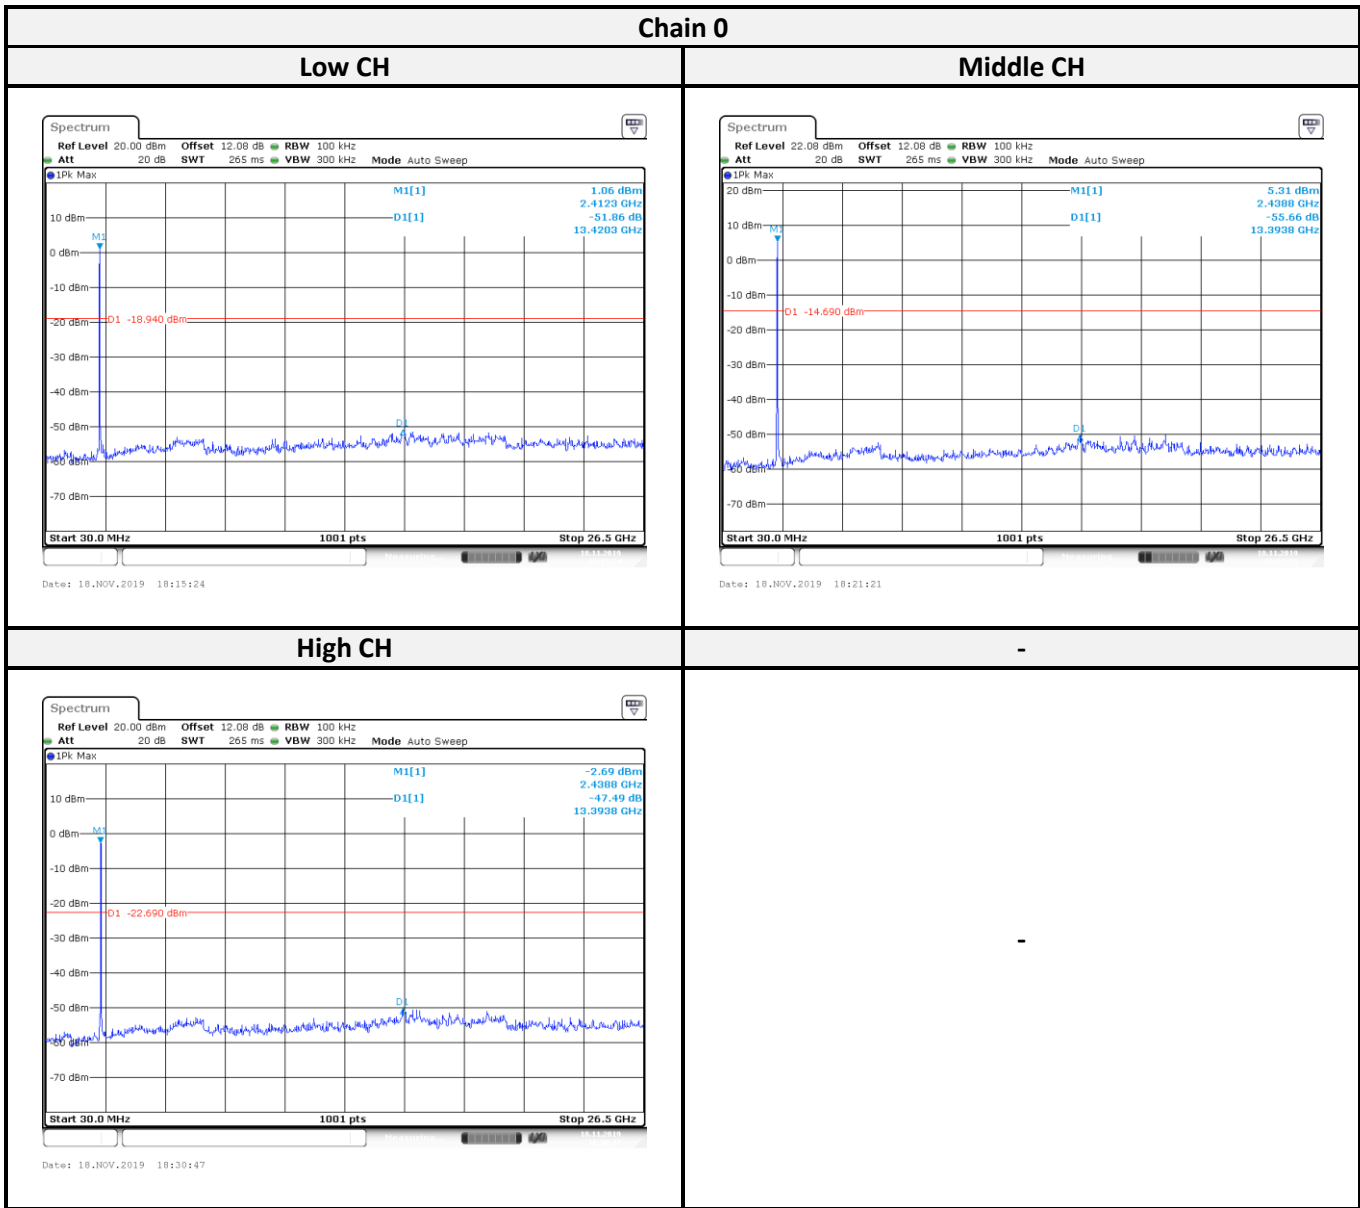


Chain 1

Low CH

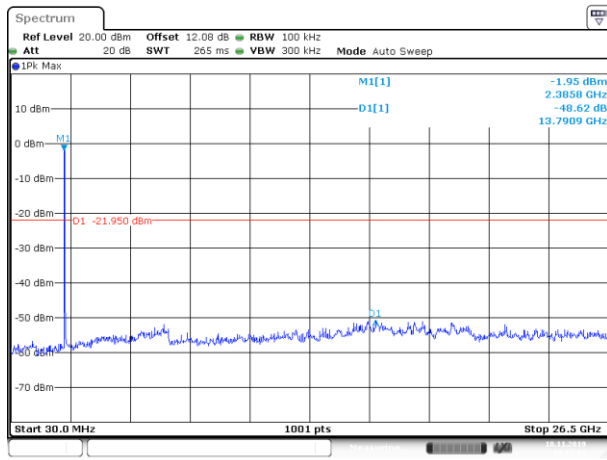


Date: 18.NOV.2019 10:17:31

Middle CH

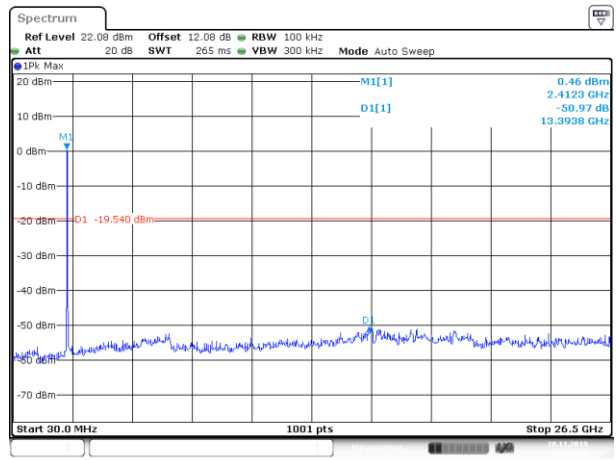

Date: 18.NOV.2019 10:26:36


High CH

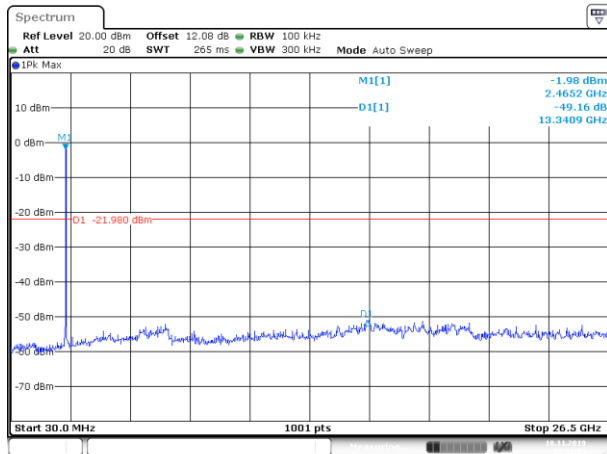

Date: 18.NOV.2019 10:33:03

-

BLE Mode

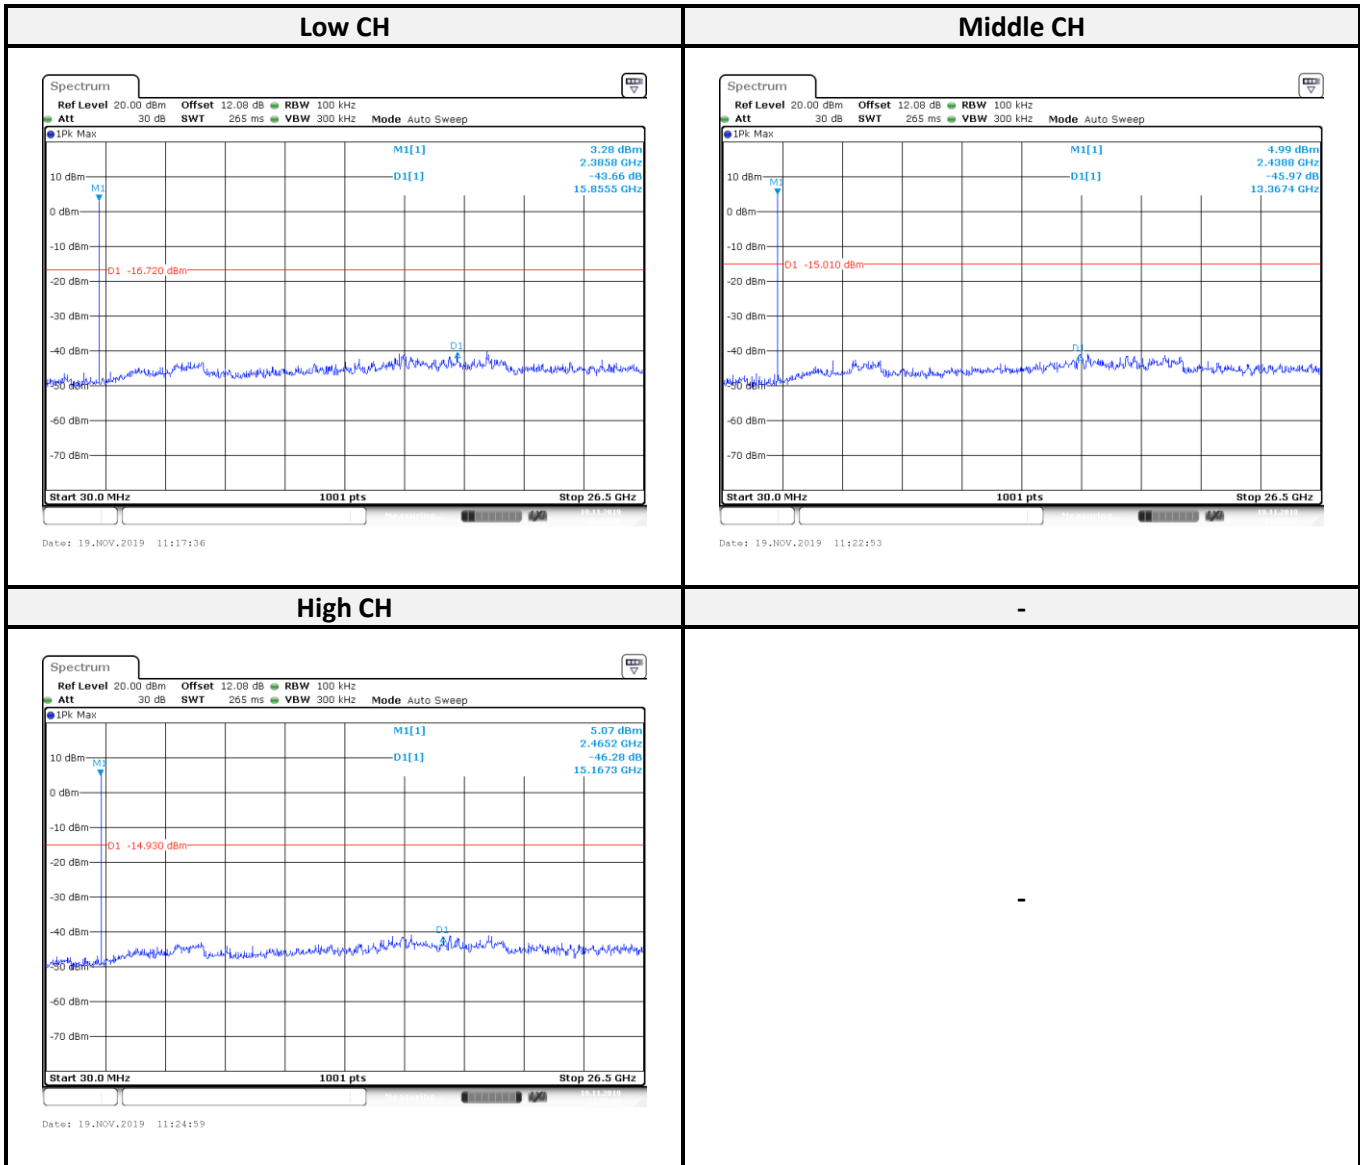

## 8 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

### 8.1 Applicable Standard

According to FCC §15.247(a) (2),

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.2 Test Procedure

According to ANSI C63.10-2013, the steps for the first option are as follows:

- (1) Set RBW = 100 kHz. (2) Set the VBW  $\geq$  [3  $\times$  RBW]. (3) Detector = peak. (4) Trace mode = max hold.
- (5) Sweep = auto couple. (6) Allow the trace to stabilize. (7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 8.3 Test Equipment List and Details


Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room(TH-02)</b>					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


**8.4 Test Results**

Channel	Frequency (MHz)	6 dB BW (MHz)	6dB Limit (MHz)	Result
<b>802.11b mode-Chain 0</b>				
Low	2412	9.04	> 0.5	Compliance
Middle	2437	9.04	> 0.5	Compliance
High	2462	9.04	> 0.5	Compliance
<b>802.11b mode-Chain 1</b>				
Low	2412	9.04	> 0.5	Compliance
Middle	2437	9.04	> 0.5	Compliance
High	2462	9.04	> 0.5	Compliance
<b>802.11g mode-Chain 0</b>				
Low	2412	16.32	> 0.5	Compliance
Middle	2437	16.32	> 0.5	Compliance
High	2462	16.32	> 0.5	Compliance
<b>802.11g mode-Chain 1</b>				
Low	2412	16.36	> 0.5	Compliance
Middle	2437	16.36	> 0.5	Compliance
High	2462	16.36	> 0.5	Compliance
<b>802.11n HT20 mode-Chain 0</b>				
Low	2412	17.60	> 0.5	Compliance
Middle	2437	17.60	> 0.5	Compliance
High	2462	17.60	> 0.5	Compliance
<b>802.11n HT20 mode-Chain 1</b>				
Low	2412	17.60	> 0.5	Compliance
Middle	2437	17.60	> 0.5	Compliance
High	2462	17.60	> 0.5	Compliance
<b>BLE mode</b>				
Low	2402	0.735	> 0.5	Compliance
Middle	2440	0.735	> 0.5	Compliance
High	2480	0.735	> 0.5	Compliance

802.11b mode:

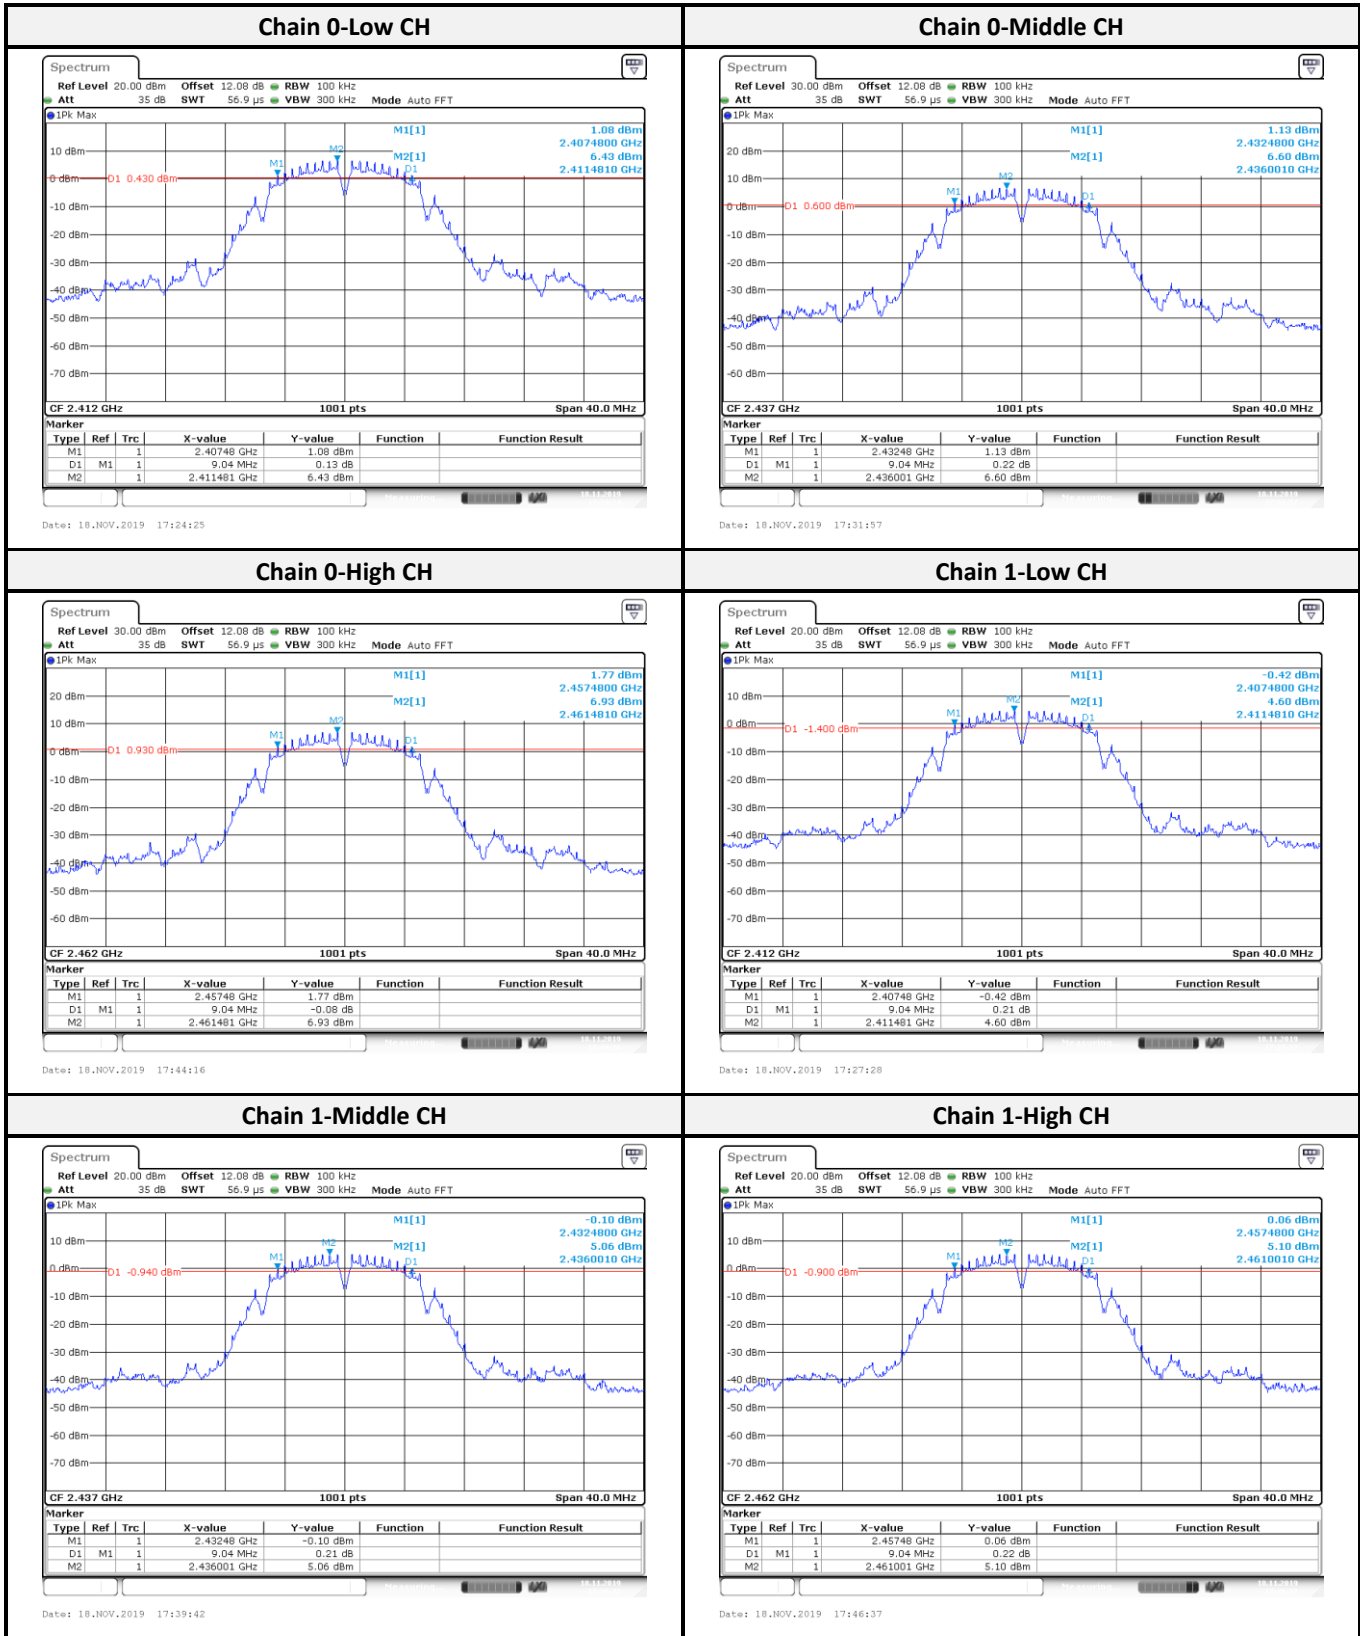


802.11g mode:

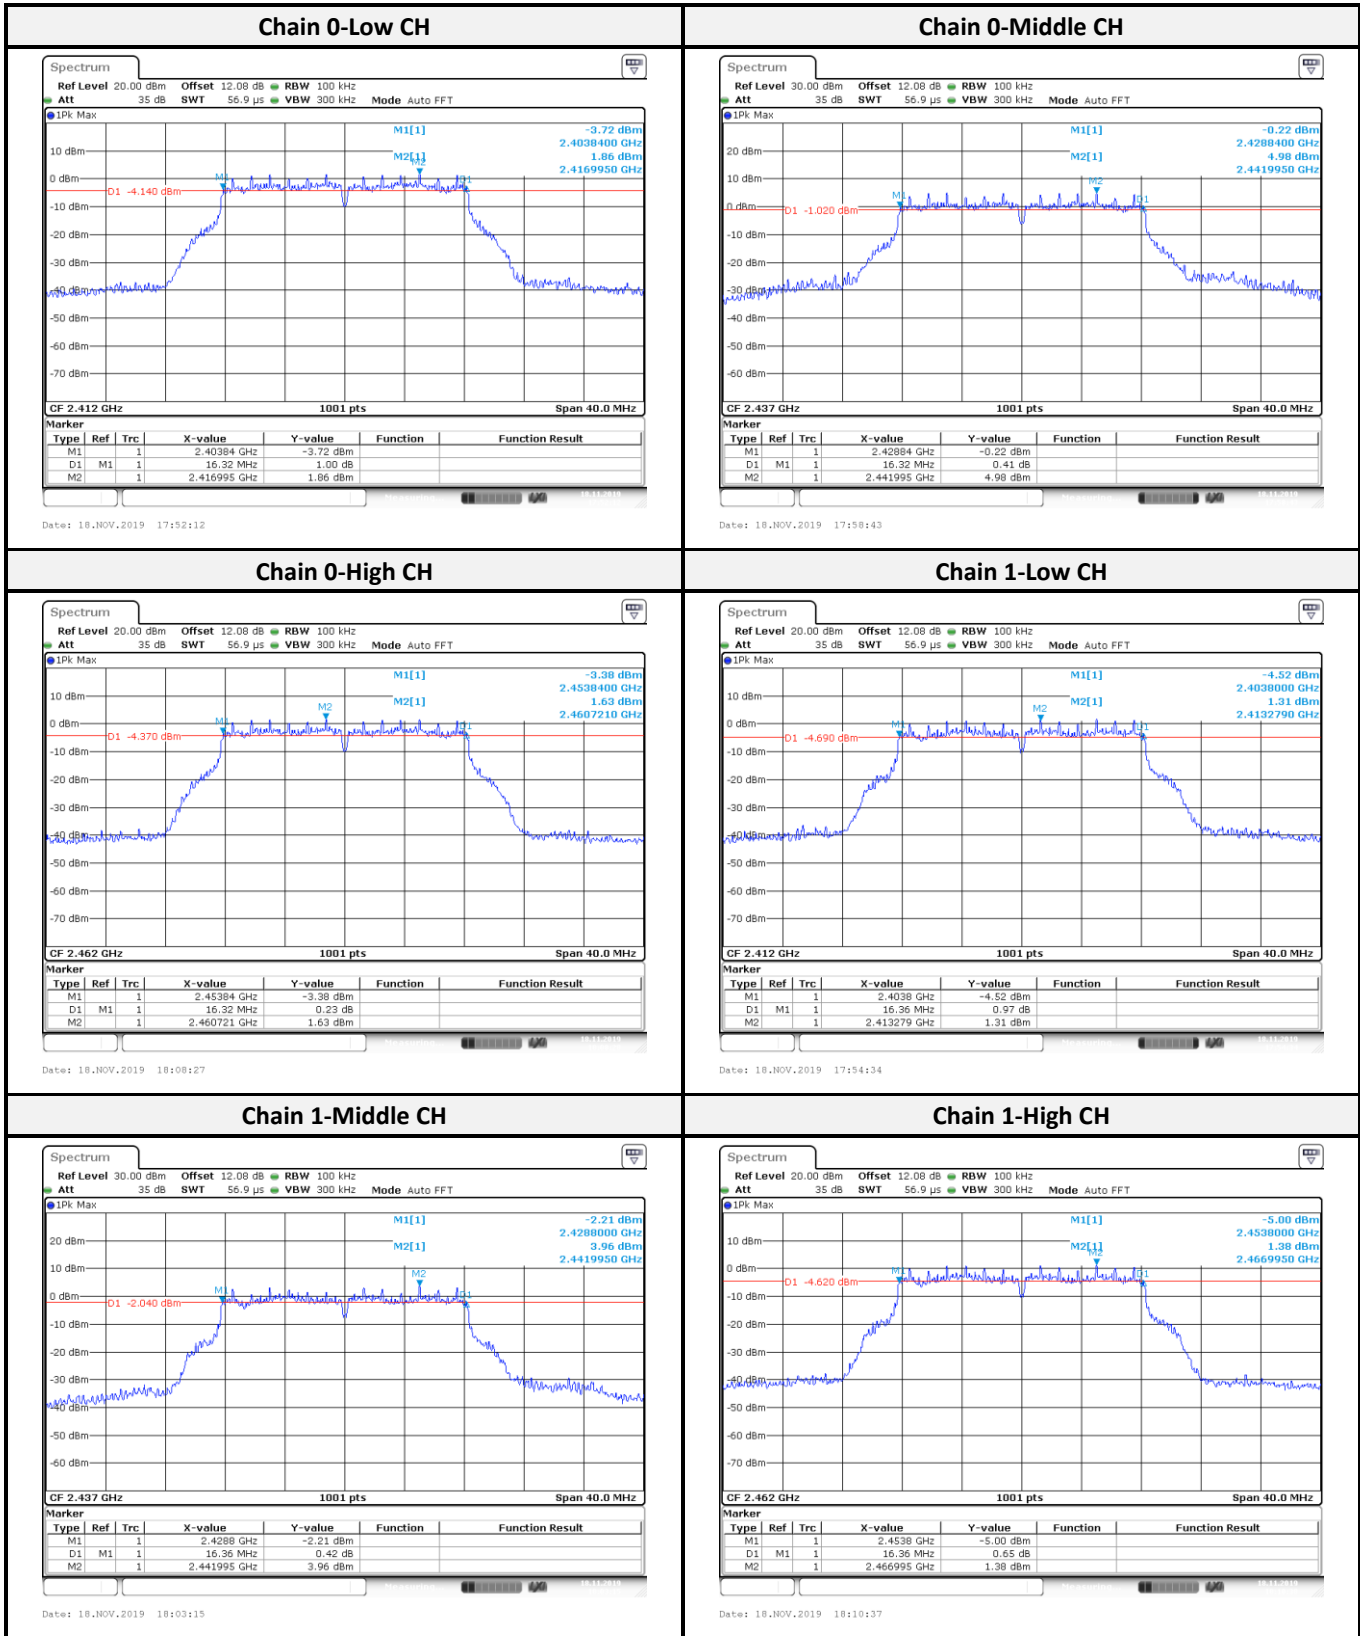




802.11n HT20 mode:

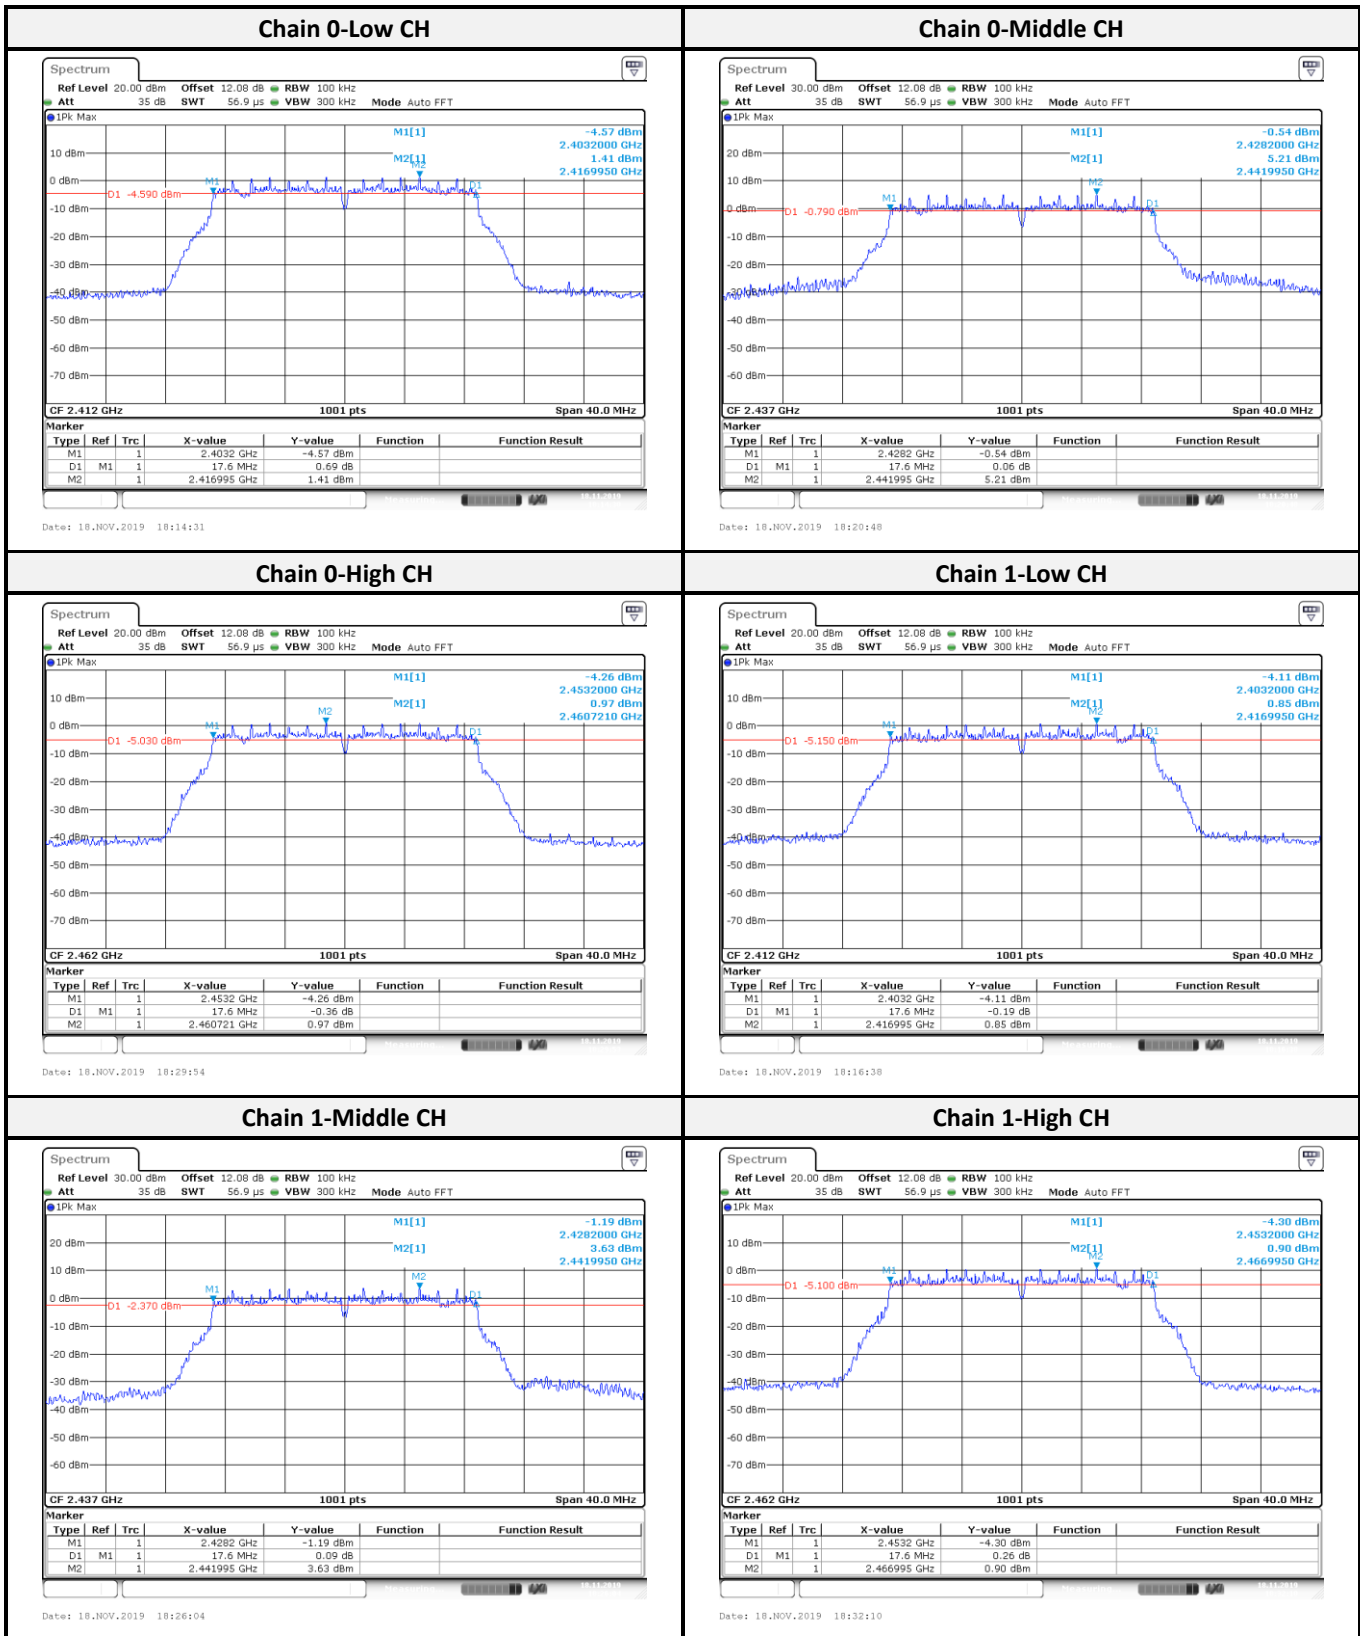

BLE

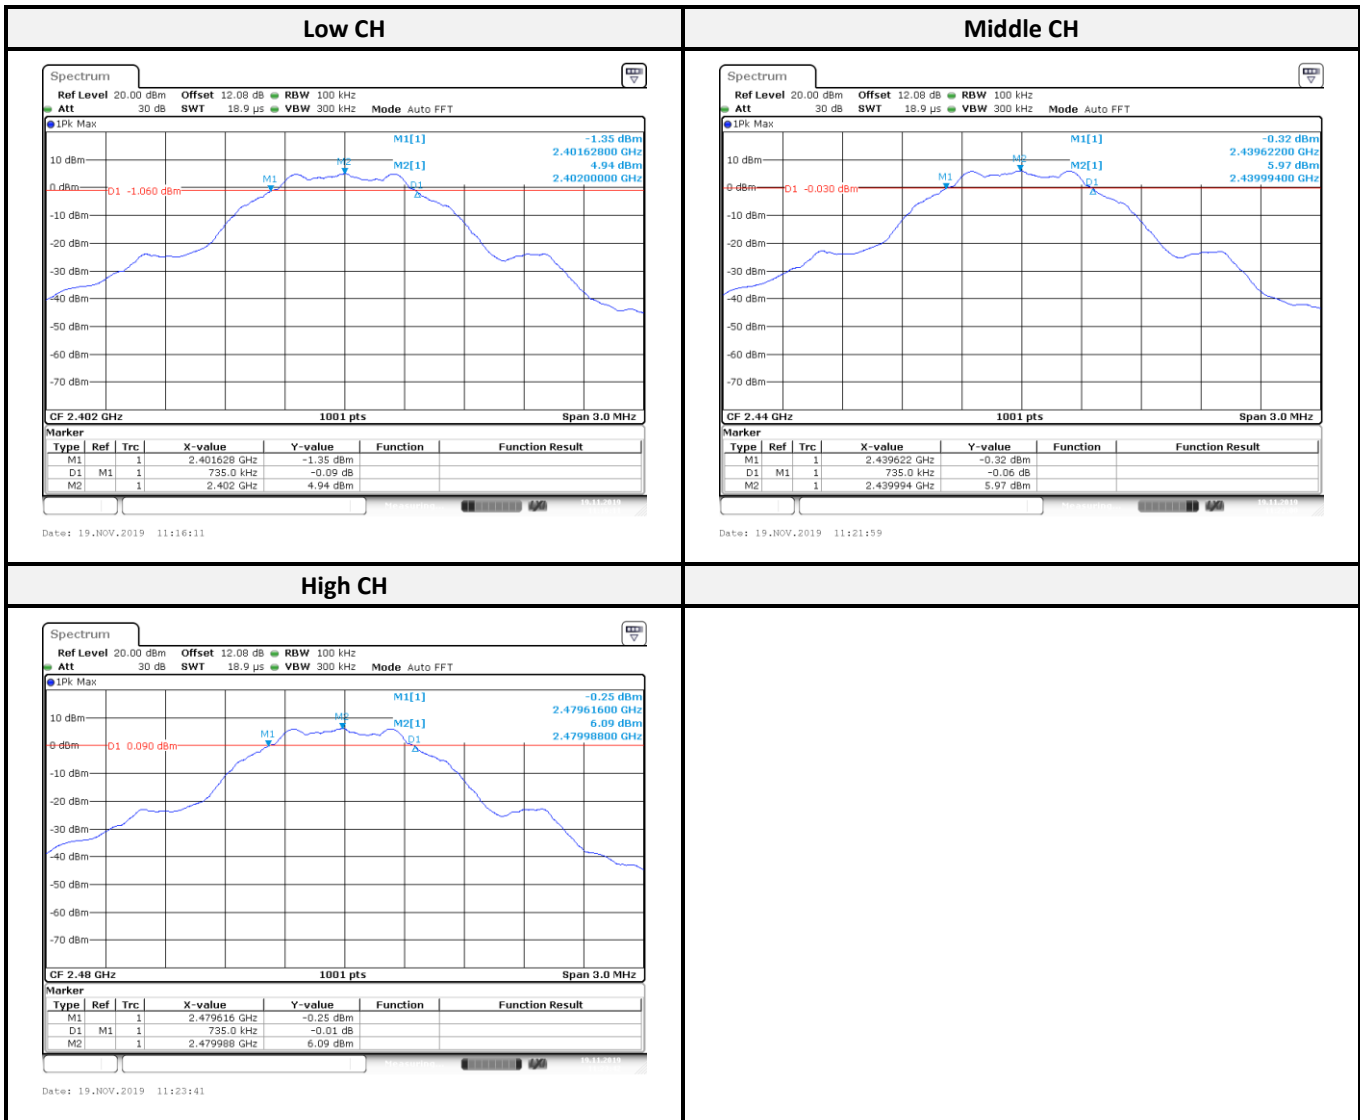

## 9 FCC §15.247(b) (3) – Maximum Output Power

### 9.1 Applicable Standard

According to FCC §15.247(b) (3),

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 9.2 Test Procedure

- (1) Place the EUT on a bench and set it in transmitting mode.
- (2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.
- (3). Add a correction factor to the display.

### 9.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room(TH-02)</b>					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
USB Wideband Power Sensor	Agilent	U2021XA	MY54250014	2018/11/22	2019/11/21
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

**9.4 Test Results**

Channel	Frequency (MHz)	Maximum Peak Output Power (dBm)			Maximum Peak Output Power (W)	Limit (dBm)	Result
		Chain 0	Chain 1	Sum			
<b>802.11b mode:</b>							
Low	2412	18.33	16.83	20.65	0.1161	30	Compliance
Middle	2437	18.51	17.15	20.89	0.1227	30	Compliance
High	2462	18.79	17.48	21.19	0.1315	30	Compliance
<b>802.11g mode:</b>							
Low	2412	18.71	18.86	21.80	0.1513	30	Compliance
Middle	2437	21.18	20.84	24.02	0.2523	30	Compliance
High	2462	18.46	18.51	21.50	0.1412	30	Compliance
<b>802.11n HT20 mode:</b>							
Low	2412	18.21	18.24	21.24	0.1330	30	Compliance
Middle	2437	21.16	20.41	23.81	0.2404	30	Compliance
High	2462	18.24	18.17	21.22	0.1324	30	Compliance
<b>BLE mode:</b>							
Low	2402	5.97	-	5.97	0.0039	30	Compliance
Middle	2440	7.01	-	7.01	0.0050	30	Compliance
High	2480	7.12	-	7.12	0.0051	30	Compliance

---

## 10 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

---

### 10.1 Applicable Standard

According to FCC §15.247(d),

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 10.2 Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- (3) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- (4) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

**10.3 Test Equipment List and Details**



Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room(TH-02)</b>					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

*\*Statement of Traceability: The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).*

**10.4 Test Results**

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
<b>802.11b mode-Chain 0</b>				
Low	2412	40.82	≥ 20	Compliance
High	2462	46.99	≥ 20	Compliance
<b>802.11b mode-Chain 1</b>				
Low	2412	40.50	≥ 20	Compliance
High	2462	45.85	≥ 20	Compliance
<b>802.11g mode Chain 0</b>				
Low	2412	38.59	≥ 20	Compliance
High	2462	43.01	≥ 20	Compliance
<b>802.11g mode Chain 1</b>				
Low	2412	37.35	≥ 20	Compliance
High	2462	41.23	≥ 20	Compliance
<b>802.11n HT20 mode Chain 0</b>				
Low	2412	39.70	≥ 20	Compliance
High	2462	40.33	≥ 20	Compliance
<b>802.11n HT20 mode Chain 1</b>				
Low	2412	39.85	≥ 20	Compliance
High	2462	41.80	≥ 20	Compliance
<b>BLE mode</b>				
Low	2402	53.07	≥ 20	Compliance
High	2480	53.54	≥ 20	Compliance


802.11b mode:

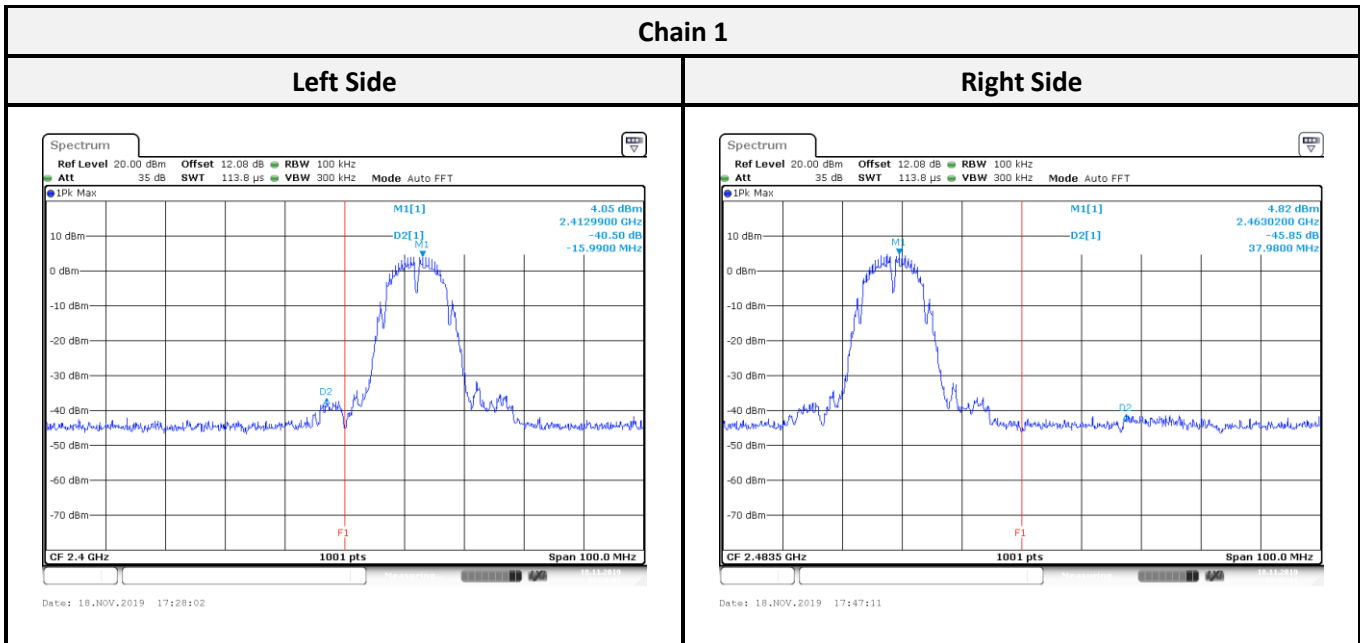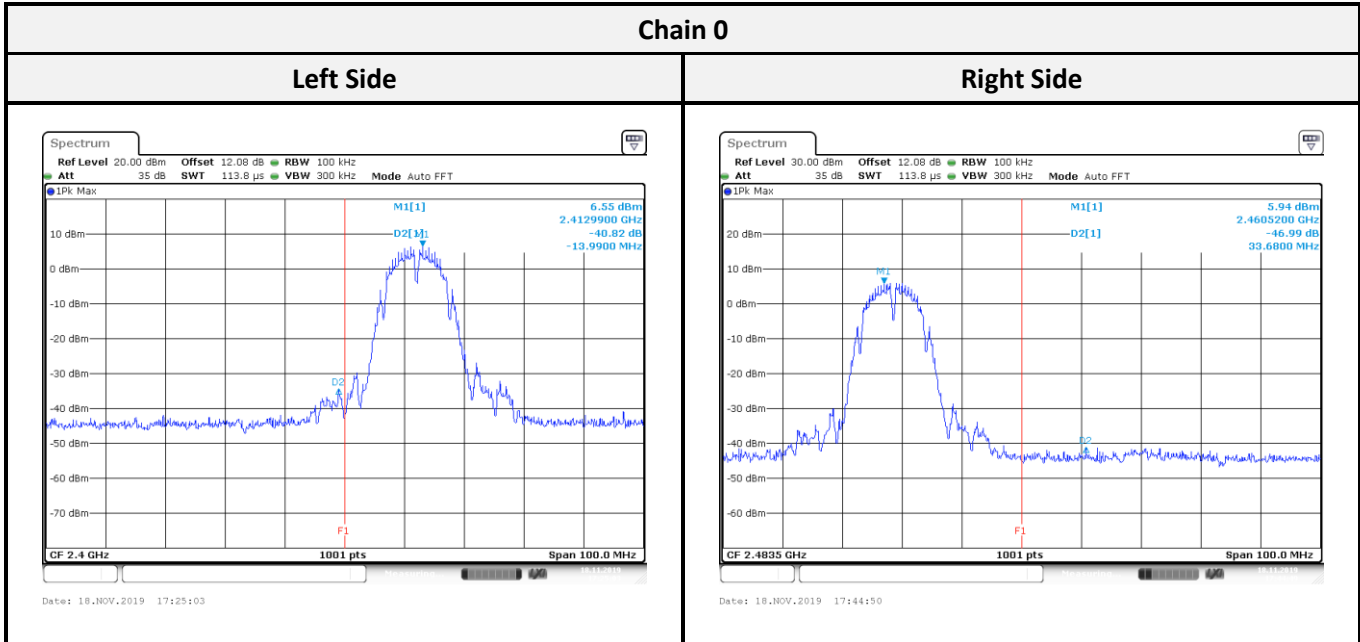


802.11g mode:

Chain 0

Left Side

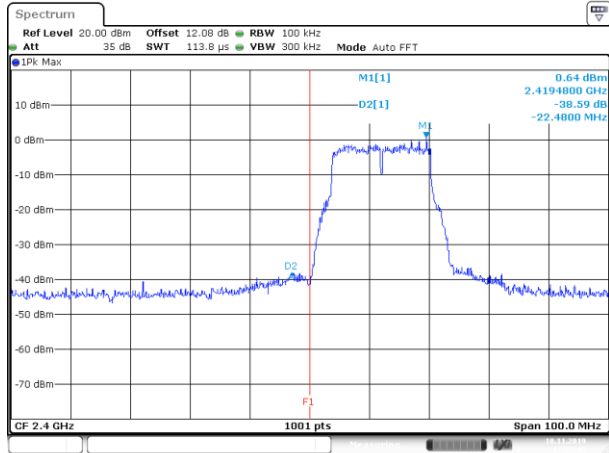


Right Side

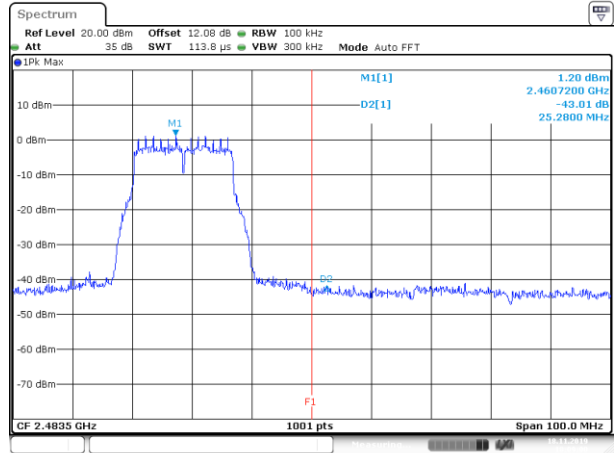


Chain 1

Left Side


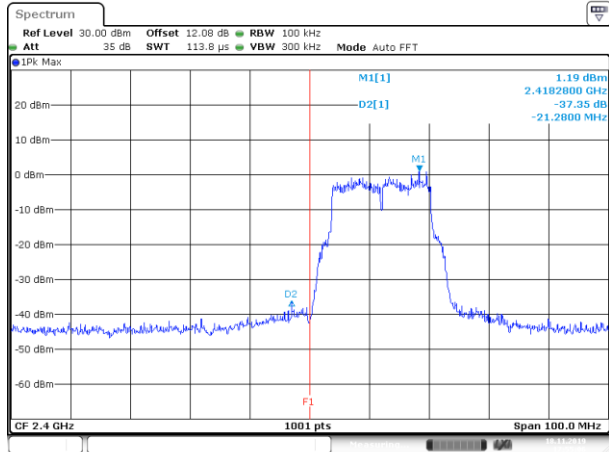


Right Side

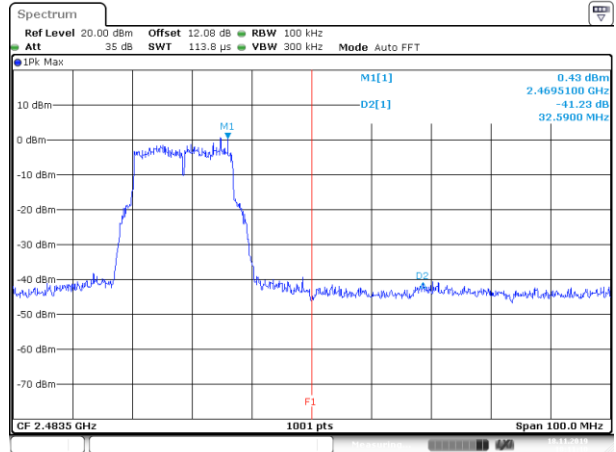




802.11n HT20 mode:

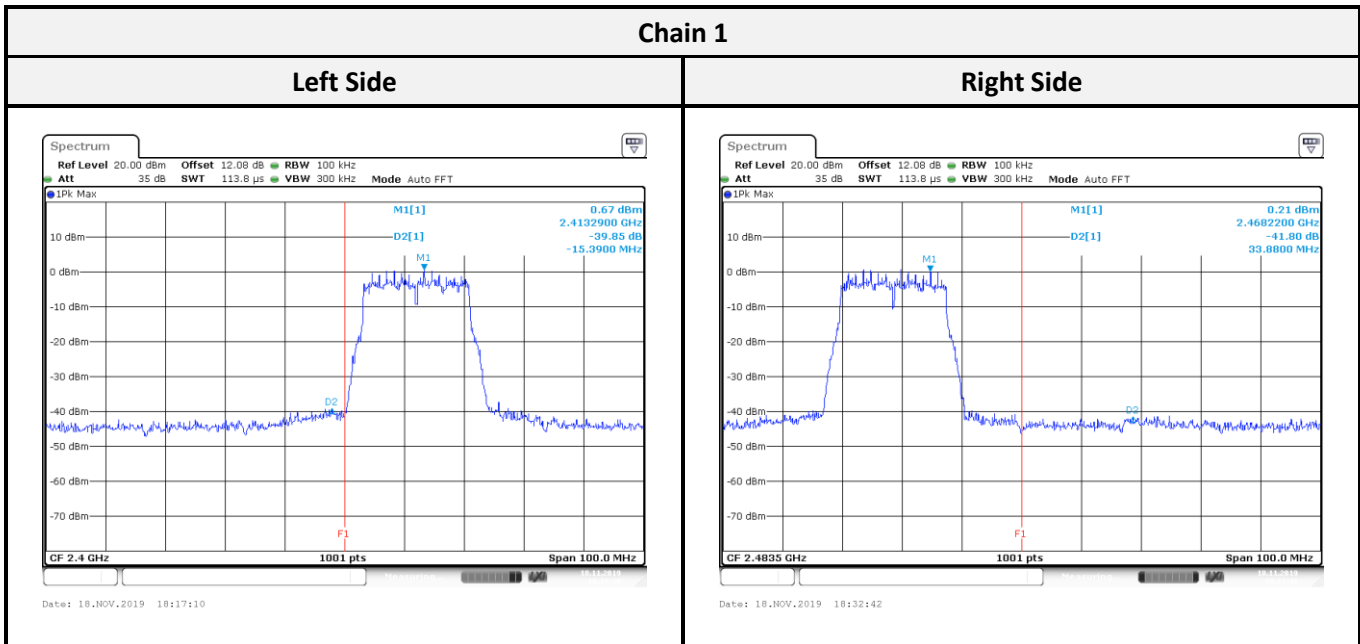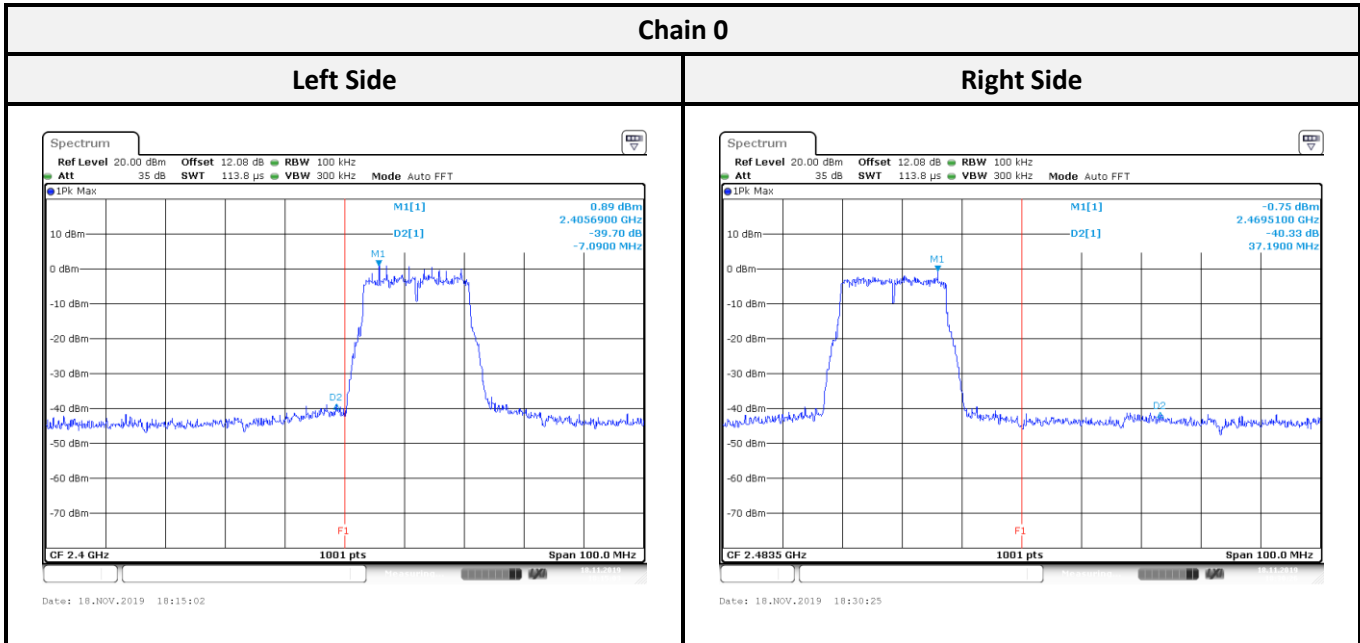

BLE

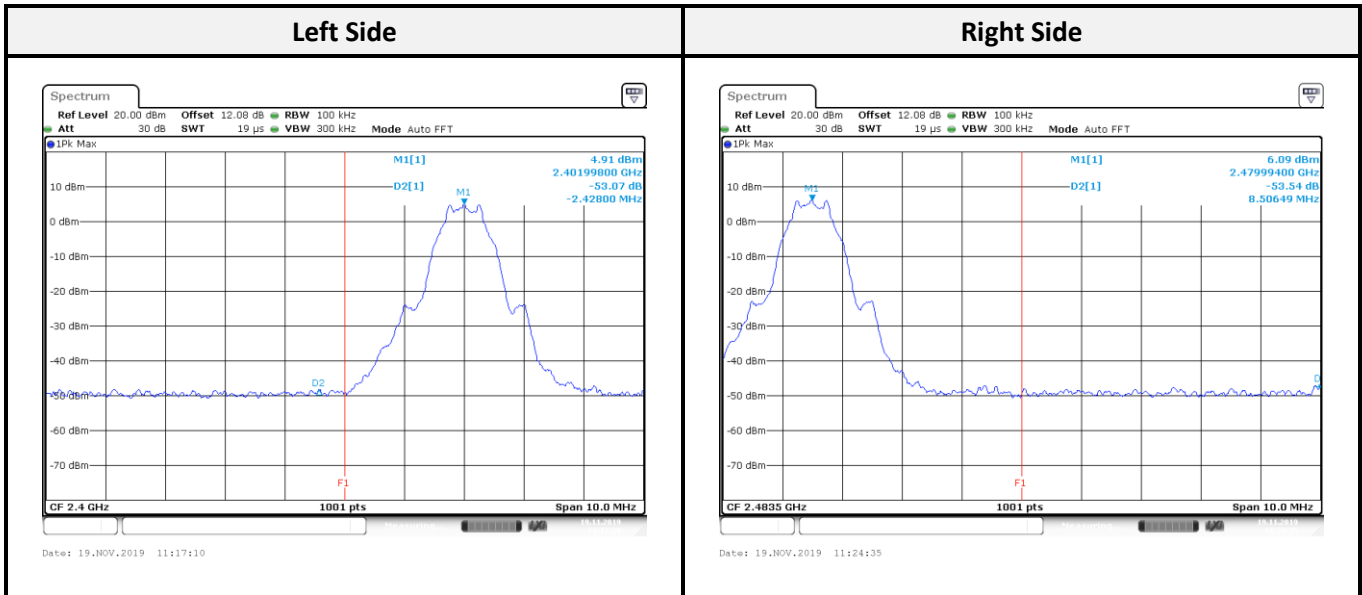

## 11 FCC §15.247(e) – Power Spectral Density

### 11.1 Applicable Standard

According to FCC §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 11.2 Test Procedure

According to ANSI C63.10-2013,

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth. (3) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- (4) Set the VBW  $\geq [3 \times \text{RBW}]$ . (5) Detector = peak. (6) Sweep time = auto couple.
- (7) Trace mode = max hold. (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- (10) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 11.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room (TH-02)</b>					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


**11.4 Test Results**

Channel	Frequency (MHz)	PSD (dBm/3 kHz)			Limit (dBm/3 kHz)	Result
		Chain 0	Chain 1	Sum		
<b>802.11b mode</b>						
Low	2412	-4.20	-7.52	-2.54	8	Compliance
Middle	2437	-5.33	-8.53	-3.63	8	Compliance
High	2462	-6.11	-8.18	-4.01	8	Compliance
<b>802.11g mode</b>						
Low	2412	-11.66	-12.61	-9.10	8	Compliance
Middle	2437	-8.62	-10.40	-6.41	8	Compliance
High	2462	-11.54	-12.86	-9.14	8	Compliance
<b>802.11n HT20 mode</b>						
Low	2412	-12.58	-12.32	-9.44	8	Compliance
Middle	2437	-8.46	-9.46	-5.92	8	Compliance
High	2462	-11.43	-12.84	-9.07	8	Compliance
<b>BLE mode</b>						
Low	2402	-8.7	-	-8.7	8	Compliance
Middle	2440	-7.69	-	-7.69	8	Compliance
High	2480	-7.57	-	-7.57	8	Compliance


802.11b mode:

Chain 0


Low CH

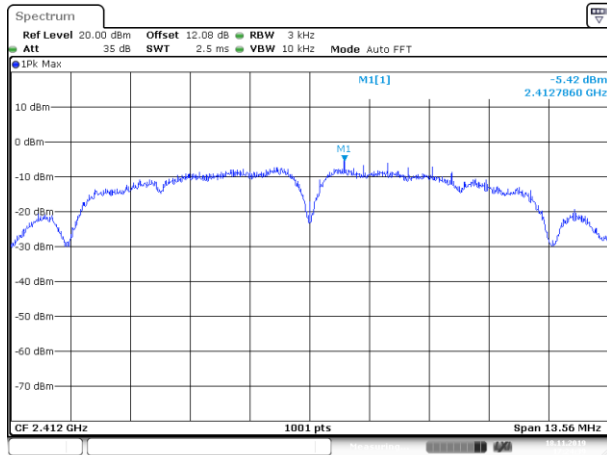

Middle CH

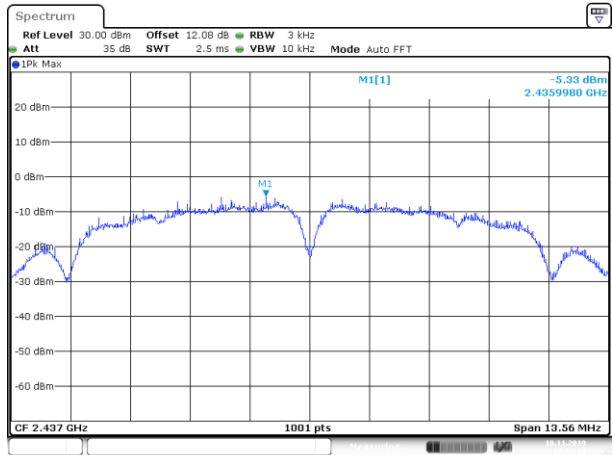


High CH

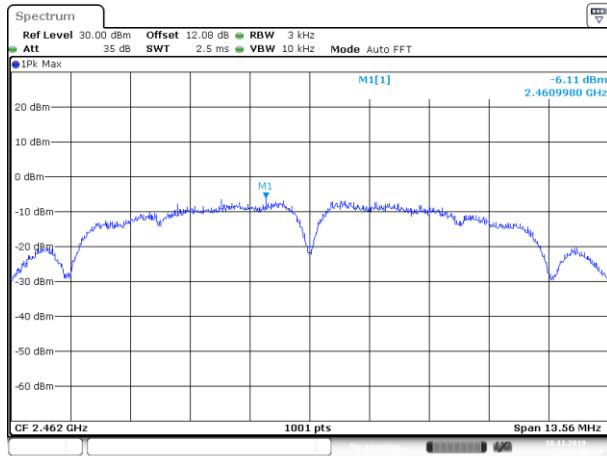


Chain 1

Low CH

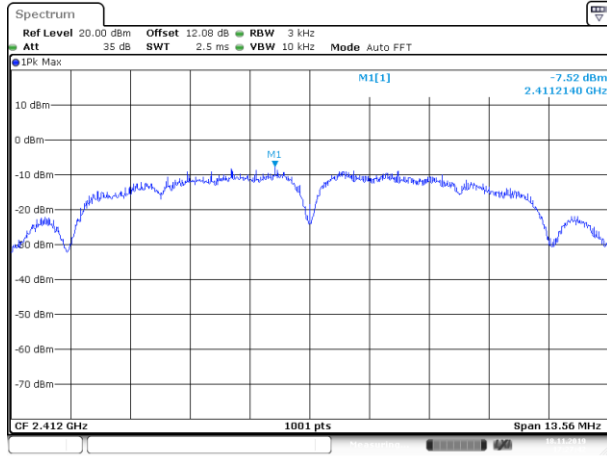


Date: 18.NOV.2019 17:27:42

Middle CH

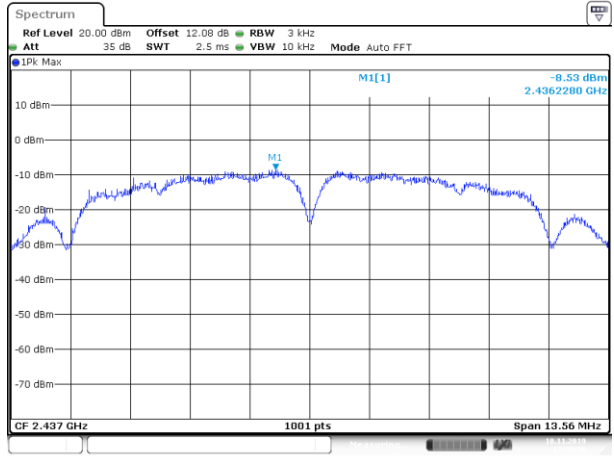

Date: 18.NOV.2019 17:39:56

High CH

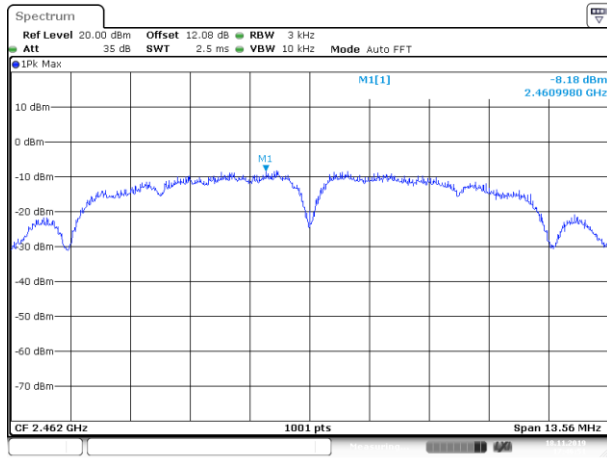

Date: 18.NOV.2019 17:46:51


-

-

802.11g mode:


Chain 0

Low CH

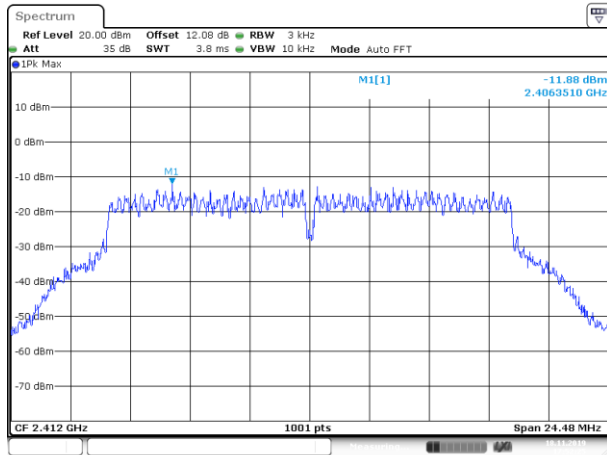


Date: 18.NOV.2019 17:52:25

Middle CH

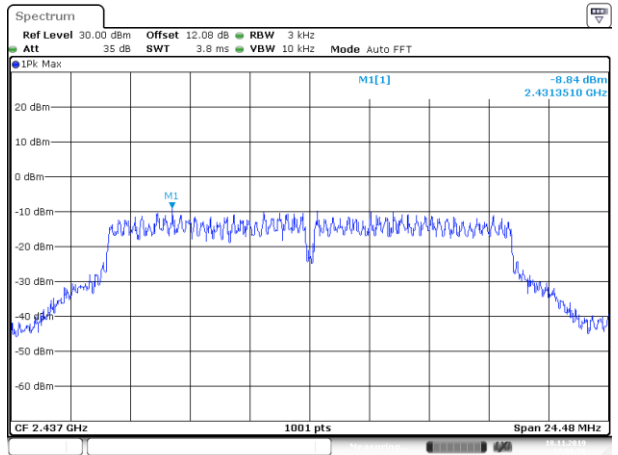

Date: 18.NOV.2019 17:58:56


High CH

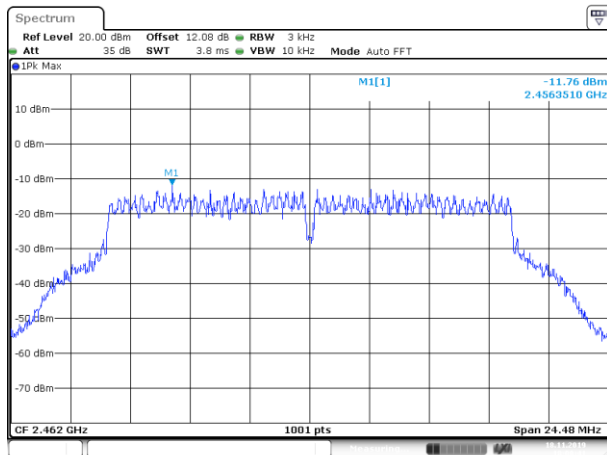


Date: 18.NOV.2019 18:08:41

Chain 1


Low CH

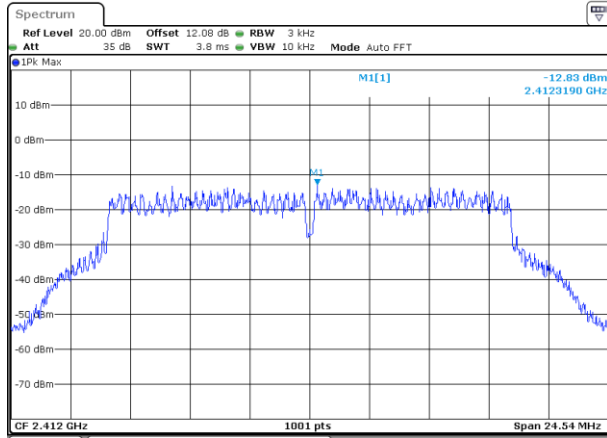

Middle CH

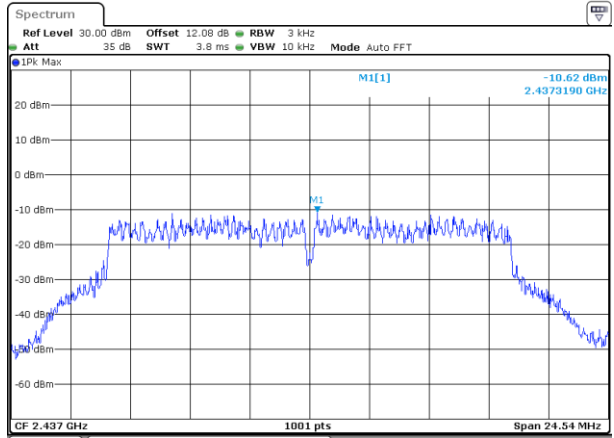


High CH

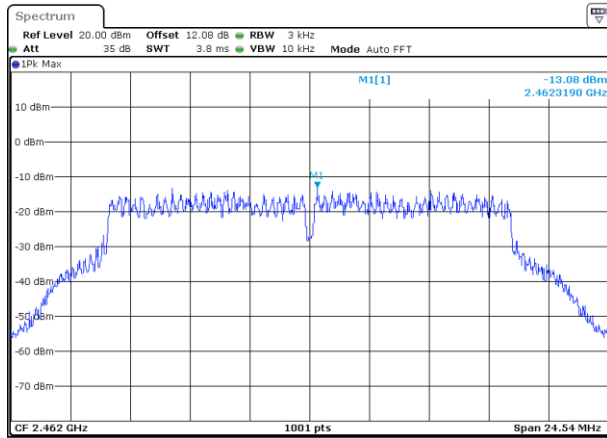




802.11n HT20 mode:

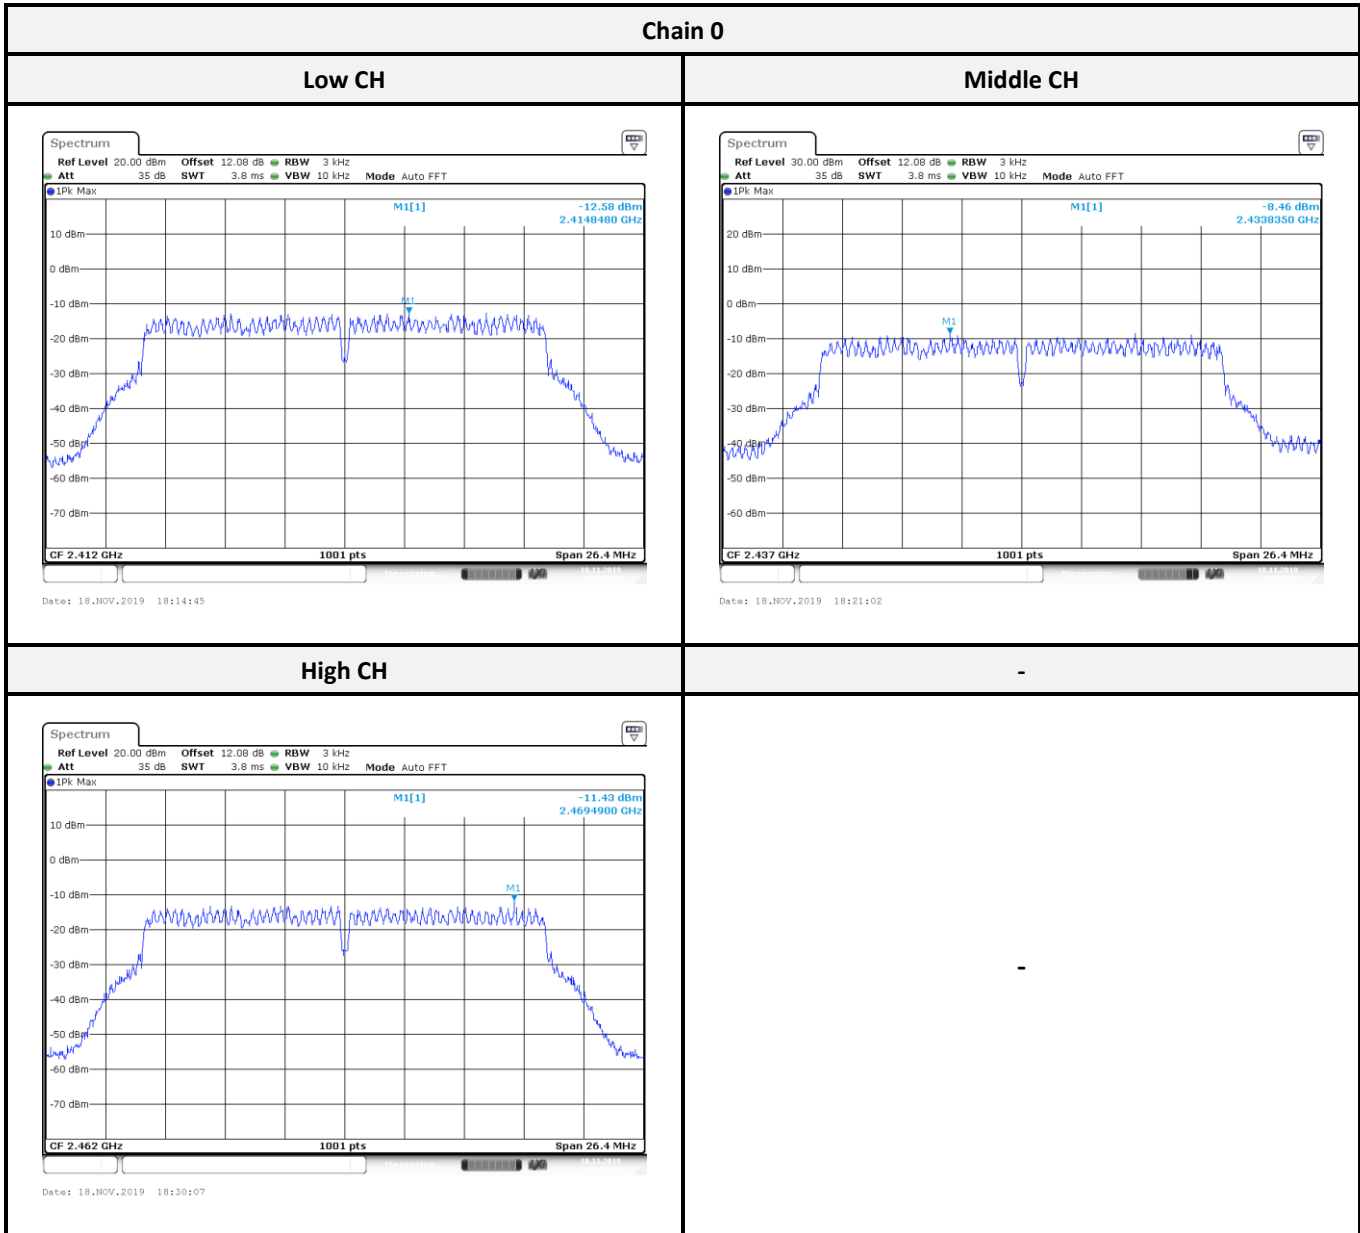

Chain 1


Low CH

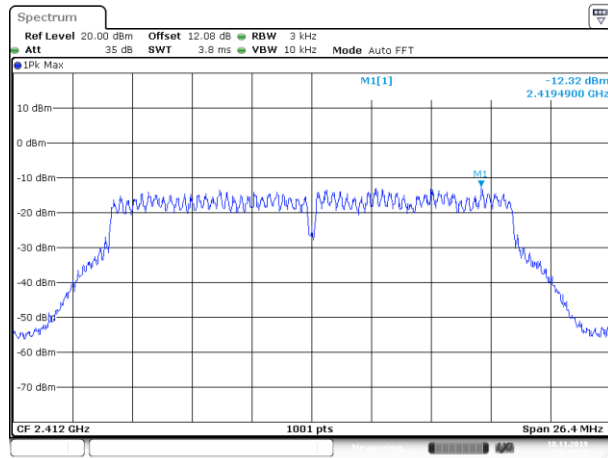

Date: 18.NOV.2019 18:16:52


Z

Middle CH

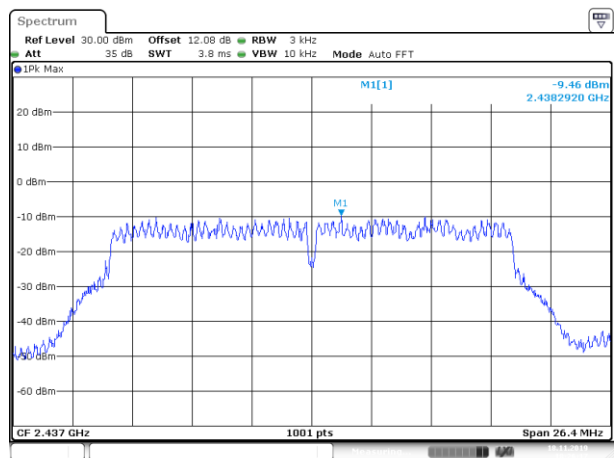


Date: 18.NOV.2019 18:26:18

High CH

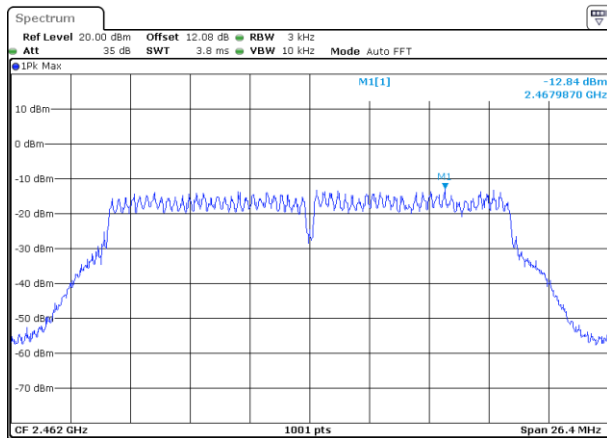

Date: 18.NOV.2019 18:32:24

BLE

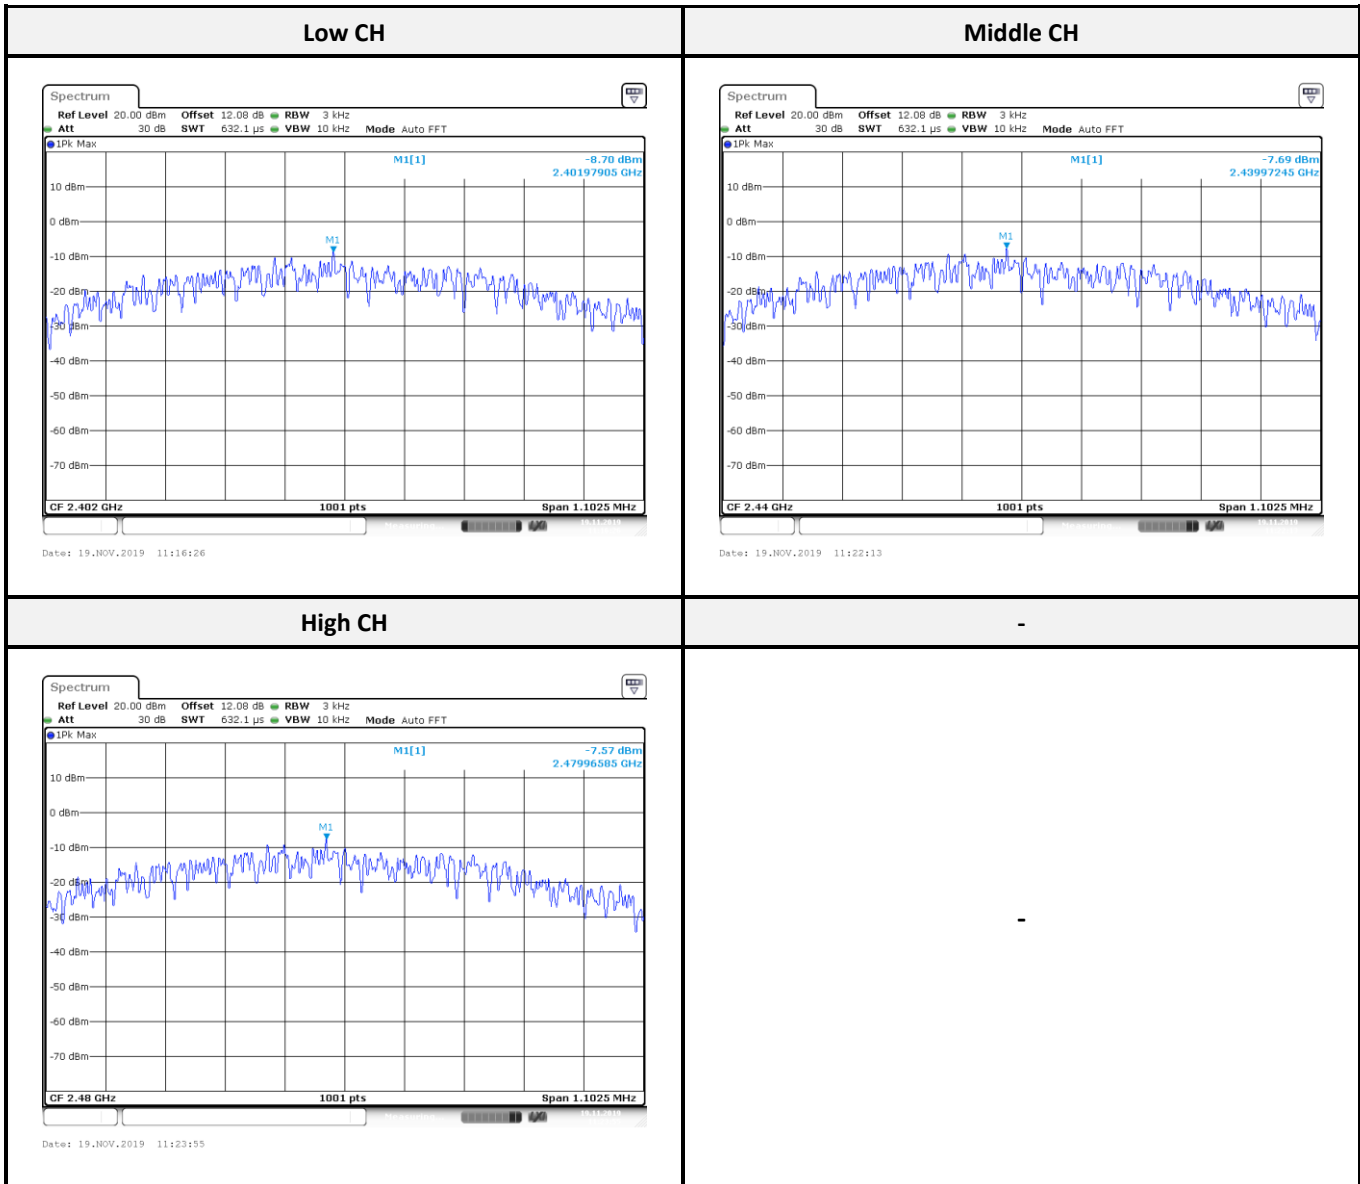

----- END OF REPORT -----