


*EXHIBIT B*

BLOCK DIAGRAM / EXPOSITORY STATEMENT

*(Additional Block Diagram at  
back of manual in Section E)*

# FMT - 301

**SINGLE CHANNEL HAND TRANSMITTER TO MEET EUROPEAN AND USA APPROVALS**  
PCB: B31B

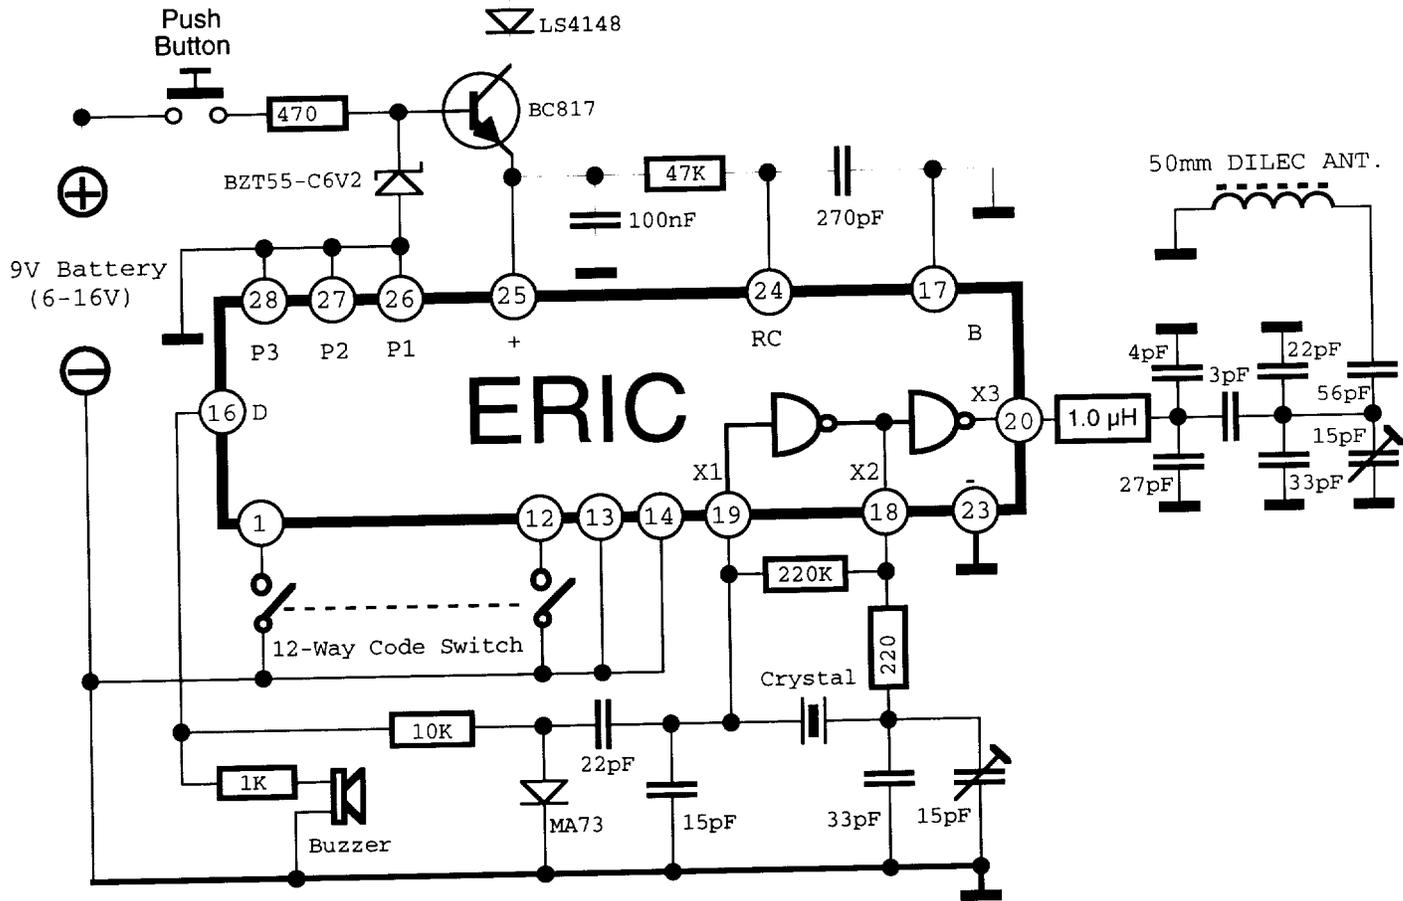

**NOTES:**

1. Tune Trimmer for DILEC Antenna to min. DC current consumption, at 8VDC supply.
2. Tune Trimmer for Oszillator to 27.145 MHz Transmit Frequency.
3. FM-Frequency Deviation is preset to approximately 1600 Hz.
4. Transmitter works with approx. constant RF-Power Output between 6-16 VDC Supply.
5. Transmitter works on as low as 5V Supply, however, with reduced power output.
6. Reverse Battery Voltage will not damage the device.
7. The 12-Way Code Switch facilitates 4096 different codes.
8. Choke, use only Murata LQH1N1R0K04