ERICSSON	1
----------	---

# MARKING DRAWING

1 (1)

		MARKINGL	RAVING	I (4)
Uppgjord (även faktaansvarig om annan) - Prepared (also subject n	esponsible if other)	Nr - <i>No</i> .		
BA/EML/AH/F Andy Guiver		151 86 - KR	C 118 12 Ue	n
Dokansv/Godk - Doc respons/Approved	Kontr - Checked	Datum - Date	Rev	File
(BA/EML/BP/T S. Chander)		2000-02-09	С	marking_drawing_151_86_
		Title		
		R290 Satell	ite	

# GODKAND ENLIGT / APPROVED ACCORDING TO: 1776 - KRC 118 12 - 20 UEN

## <u>TYPE - 1180101-BV.</u>


### <u>LABEL</u>

The label used for marking is defined in the Manufacturing Specification 131 32 for the KRC.

#### **PLACING**

The label shall be placed on the back of the telephone according to the Assembly Drawing (151 88) for KRC.

### PRINT LAYOUT

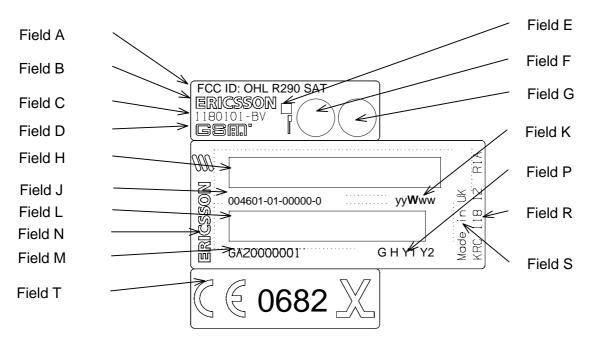

### DEFINITIONS:

Field 'A'	FCC Approval Mark. – The text 'FCC ID: OHL R290 SAT'.
Field 'B'	Ericsson shall be according to the corporate standard EN/LZT 109 502/2.
Field 'C'	Type number - The type number is 1180101-BV.
Field 'D'	GSM logotype - According to 1424 - SVF 930 38.

ERICSSON 📕	MARKING DRAWING 2 (4)	
Uppgjord (även faktaansvarig om annan) - Prepared (also subject responsible if other) BA/EML/AH/F Andy Guiver	MARKING DRAWING 2 (4)	
Dokansv/Godk - Doc respons/Approved Kontr - Checked	Datum - Date Rev File	
(BA/EML/BP/T S. Chander)	2000-02-09 C marking_drawing_151_86_   Title	
	R290 Satellite	
Field 'E'	"Invatron logotype " according to 1424-SVF 93037	
Field 'F'	Approval Mark - TBD	
Field 'G'	Approval Mark - TBD	
Field 'H'	IMEI number as bar code - See below for definition of IMEI-numbers. The bar code shall only contain the digits of the IMEI numbers (no -).	
Field 'J'	IMEI numbers as characters - The IMEI numbers has format:	
	TAC - FAC - SNR - CD.	
	TAC = 004601 (for the Test IMEI prior to product approval)	
	= nnnnnn (issued after product approvals)	
	FAC = 01 for the Test IMEI.	
	FAC = 19 for the Carlton factory, used after product approvals.	
	SNR = A serial number from 000 001 to 999 999.	
	CD = This is a check digit calculated according to the Luhn formula (ISO/IEC 7812), GSM 02.16. For Test IMEI, this is 0.	
Field 'K'	Production week - The production week shall be given as yyWww (yy = Year, W, ww = week).	
Field 'L'	Serial number as bar code - According to Ericsson corporate standard 102 01-109.	
Field 'M'	Serial number as characters - According to Ericsson corporate standard 0012 -101. A61 is the Linkoping factory code, GA2 is the Carlton factory in the Ericsson group factory number system according to Ericsson corporate standard 1129 - 101.	
Field 'N'	Ericsson trademark - Ericsson and the Ericsson trademark shall be according to the corporate standard EN/LZT 109 502/2. Printed vertically.	

ERICSSON 📕	MARKING DRAWING 3 (4)	
Uppgjord (även faktaansvarig om annan) - Prepared (also subject responsible if other) BA/EML/AH/F Andy Guiver	Nr - No. 151 86 - KRC 118 12 Uen	
Dokansv/Godk - Doc respons/Approved Kontr - Checked   (BA/EML/BP/T S. Chander)	Datum - Date Rev File   2000-02-09 C marking_drawing_151_86_	
	Title     0	
	N250 Satemite	
Field 'P'	G-field - R- state identification of the CXC-module according to the marking data 1/151 86 for KRC.	
	H-field - R- state identification of the hardware according to the marking data 1/151 86 for KRC.	
	Y1-field - ROA for the GSM RF Board structure identification according to the marking data 1/151 86 for KRC.	
	Y2-field - ROA for the GS RF Board structure identification according to the marking data 1/151 86 for KRC.	
Field 'R'	KRC number & 'R' State –	
	The KRC number for the product. Printed vertically.	
	The R-state for the KRC according to the 1095 for the KRC. Printed vertically.	
Field 'S'	The text "Made in UK" printed vertically for phones produced in Carlton.	
Field 'T'	CE Approval Mark-	
	'CE' - according to 1424 - SVF 930 52.	
	'0682' – the Notified Body number as digits with a printing size corresponding to the Approval marks for the notified body.	
	'X' - according to 1424 - SVF 930 53.	
PRINTING REGULATIONS		
The printing shall be well	readable and permanent.	
Typeface	OCR-B	
Type size	min 1.1 mm	
Line spacing	min 1.5 mm	
Trademark	min 1.5 mm	

Uppgjord (även faktaansvarig om annan) - Prepared (also subject responsible if other) BA/EML/AH/F Andy Guiver	MARKING DRAWING	4 (4)
Dokansv/Godk - Doc respons/Approved Kontr - Checked (BA/EML/BP/T S. Chander)	Datum - Date Rev File   2000-02-09 C mark   Title R290 Satellite	ing_drawing_151_86_
Approval mark	min 5.0 mm high or min 5.0 mm dia.	
Barcodes	min 4.0 mm (Allow min 1mm Spacing Top and	

min 4.0 mm high

Invatron logo

Bottom and min 2mm Spacing Left and Right).

H:\PROJECTS\GASK\_DUMP\marking\_drawing\_151\_86\_C\_EDT47.doc