

## FCC Test Report

**Report No.:** RF170821D08

**FCC ID:** OHQ-IRSRF08

**Test Model:** RF-08A

**Series Model:** RF-08B, RF-08T

**Received Date:** Aug. 21, 2017

**Test Date:** Sep. 11 ~ Oct. 12, 2017

**Issued Date:** Oct. 13, 2017

**Applicant:** HABOOK Information Technology Inc.

**Address:** 8F., No.149, Sec. 3, Xinyi Rd., Da'an Dist., Taipei City 106, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT.....	6
3.2 Description of Test Modes.....	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Description of Support Units.....	10
3.3.1 Configuration of System under Test.....	10
3.4 General Description of Applied Standards.....	10
<b>4 Test Types and Results</b> .....	<b>11</b>
4.1 Radiated Emission and Bandedge Measurement.....	11
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	11
4.1.2 Test Instruments.....	12
4.1.3 Test Procedures.....	13
4.1.4 Deviation from Test Standard.....	13
4.1.5 Test Setup.....	14
4.1.6 EUT Operating Conditions.....	15
4.1.7 Test Results.....	16
4.2 Channel Bandwidth.....	20
4.2.1 Test Setup.....	20
4.2.2 Test Instruments.....	20
4.2.3 Test Procedure.....	20
4.2.4 Deviation from Test Standard.....	20
4.2.5 EUT Operating Condition.....	20
4.2.6 Test Results.....	21
<b>5 Pictures of Test Arrangements</b> .....	<b>22</b>
<b>Appendix – Information on the Testing Laboratories</b> .....	<b>23</b>

### Release Control Record

Issue No.	Description	Date Issued
RF170821D08	Original release.	Oct. 13, 2017

## 1 Certificate of Conformity

**Product:** IRS – Interactive Response System

**Brand:** IRS

**Test Model:** RF-08A

**Series Model:** RF-08B, RF-08T

**Sample Status:** Engineering sample


**Applicant:** HABOOK Information Technology Inc.

**Test Date:** Sep. 11 ~ Oct. 12, 2017

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.249)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**



**Date:** Oct. 13, 2017

Jessica Cheng / Senior Specialist

**Approved by :**



**Date:** Oct. 13, 2017

Rex Lai / Assistant Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.249)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	N/A	Power supply is 3Vdc from battery
15.215	Channel Bandwidth Measurement	PASS	Meet the requirement.
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.30dB at 2481.78MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.38 dB
	30MHz ~ 1000MHz	5.54 dB
Radiated Emissions above 1 GHz	Above 1GHz	5.48 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	IRS – Interactive Response System
Brand	IRS
Test Model	RF-08A
Series Model	RF-08B, RF-08T
Model Difference	Refer to note as below
Status of EUT	Engineering sample
Power Supply Rating	3Vdc from battery
Modulation Type	GFSK
Operating Frequency	2432.999908MHz ~2481.787995MHz
Number of Channel	245
Antenna Type	PCB IFA antenna with 3.3dBi gain
Antenna Connector	N/A
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. All models are listed as below:

Brand	Model	Difference	
IRS	RF-08A	Black	15 Key
	RF-08B		6 Key
	RF-08T	Gray	15 Key

2. The EUT uses following battery.

Brand	MATSUSHITA
Model	CR 2032L
Rating	3V, 225mAh

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

245 channels are provided to this EUT:

CH	FREQ. (MHz)	CH	FREQ. (MHz)	CH	FREQ. (MHz)	CH	FREQ. (MHz)
0	2432.999908	38	2440.598053	76	2448.196198	114	2455.794342
1	2433.199860	39	2440.798005	77	2448.396149	115	2455.994294
2	2433.399811	40	2440.997956	78	2448.596100	116	2456.194245
3	2433.599762	41	2441.197907	79	2448.796051	117	2456.394196
4	2433.799714	42	2441.397858	80	2448.996003	118	2456.594147
5	2433.999665	43	2441.597809	81	2449.195954	119	2456.794098
6	2434.199616	44	2441.797760	82	2449.395905	120	2456.994049
7	2434.399567	45	2441.997712	83	2449.595856	121	2457.194001
8	2434.599518	46	2442.197663	84	2449.795807	122	2457.393952
9	2434.799469	47	2442.397614	85	2449.995758	123	2457.593903
10	2434.999421	48	2442.597565	86	2450.195710	124	2457.793854
11	2435.199372	49	2442.797516	87	2450.395661	125	2457.993805
12	2435.399323	50	2442.997467	88	2450.595612	126	2458.193757
13	2435.599274	51	2443.197419	89	2450.795563	127	2458.393708
14	2435.799225	52	2443.397370	90	2450.995514	128	2458.593659
15	2435.999176	53	2443.597321	91	2451.195465	129	2458.793610
16	2436.199128	54	2443.797272	92	2451.395417	130	2458.993561
17	2436.399079	55	2443.997223	93	2451.595368	131	2459.193512
18	2436.599030	56	2444.197174	94	2451.795319	132	2459.393464
19	2436.798981	57	2444.397126	95	2451.995270	133	2459.593415
20	2436.998932	58	2444.597077	96	2452.195221	134	2459.793366
21	2437.198883	59	2444.797028	97	2452.395173	135	2459.993317
22	2437.398835	60	2444.996979	98	2452.595124	136	2460.193268
23	2437.598786	61	2445.196930	99	2452.795075	137	2460.393219
24	2437.798737	62	2445.396881	100	2452.995026	138	2460.593171
25	2437.998688	63	2445.596833	101	2453.194977	139	2460.793122
26	2438.198639	64	2445.796784	102	2453.394928	140	2460.993073
27	2438.398590	65	2445.996735	103	2453.594880	141	2461.193024
28	2438.598542	66	2446.196686	104	2453.794831	142	2461.392975
29	2438.798493	67	2446.396637	105	2453.994782	143	2461.592926
30	2438.998444	68	2446.596589	106	2454.194733	144	2461.792878
31	2439.198395	69	2446.796540	107	2454.394684	145	2461.992829
32	2439.398346	70	2446.996491	108	2454.594635	146	2462.192780
33	2439.598298	71	2447.196442	109	2454.794587	147	2462.392731
34	2439.798249	72	2447.396393	110	2454.994538	148	2462.592682
35	2439.998200	73	2447.596344	111	2455.194489	149	2462.792633
36	2440.198151	74	2447.796296	112	2455.394440	150	2462.992585
37	2440.398102	75	2447.996247	113	2455.594391	151	2463.192536

CH	FREQ. (MHz)	CH	FREQ. (MHz)	CH	FREQ. (MHz)	CH	FREQ. (MHz)
152	2463.392487	177	2468.391266	202	2473.390046	227	2478.388825
153	2463.592438	178	2468.591217	203	2473.589997	228	2478.588776
154	2463.792389	179	2468.791169	204	2473.789948	229	2478.788727
155	2463.992340	180	2468.991120	205	2473.989899	230	2478.988678
156	2464.192292	181	2469.191071	206	2474.189850	231	2479.188630
157	2464.392243	182	2469.391022	207	2474.389801	232	2479.388581
158	2464.592194	183	2469.590973	208	2474.589753	233	2479.588532
159	2464.792145	184	2469.790924	209	2474.789704	234	2479.788483
160	2464.992096	185	2469.990876	210	2474.989655	235	2479.988434
161	2465.192048	186	2470.190827	211	2475.189606	236	2480.188385
162	2465.391999	187	2470.390778	212	2475.389557	237	2480.388337
163	2465.591950	188	2470.590729	213	2475.589508	238	2480.588288
164	2465.791901	189	2470.790680	214	2475.789460	239	2480.788239
165	2465.991852	190	2470.990632	215	2475.989411	240	2480.988190
166	2466.191803	191	2471.190583	216	2476.189362	241	2481.188141
167	2466.391755	192	2471.390534	217	2476.389313	242	2481.388092
168	2466.591706	193	2471.590485	218	2476.589264	243	2481.588044
169	2466.791657	194	2471.790436	219	2476.789215	244	2481.787995
170	2466.991608	195	2471.990387	220	2476.989167		
171	2467.191559	196	2472.190339	221	2477.189118		
172	2467.391510	197	2472.390290	222	2477.389069		
173	2467.591462	198	2472.590241	223	2477.589020		
174	2467.791413	199	2472.790192	224	2477.788971		
175	2467.991364	200	2472.990143	225	2477.988923		
176	2468.191315	201	2473.190094	226	2478.188874		



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE <sup>≥</sup> 1G	RE<1G	PLC	APCM	
-	√	√	Note 1	√	-

Where RE<sup>≥</sup>1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

**NOTE 1** : No need to concern of Conducted Emission due to the EUT is powered by battery

**NOTE 2** : The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	0 to 244	0, 122, 244	GFSK

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	0 to 244	0	GFSK

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	0 to 244	0	GFSK

#### **Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	0 to 244	0, 122, 244	GFSK

#### **Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE <sup>≥</sup> 1G	29deg. C, 65%RH	3Vdc	James Wei
RE<1G	29deg. C, 65%RH	3Vdc	James Wei
APCM	25deg. C, 76%RH	3Vdc	Saxon Lee

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together without any necessary accessory or support unit.

#### 3.3.1 Configuration of System under Test



(Powered from battery)

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### **FCC Part 15, Subpart C (15.249)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 21, 2017	Feb. 20, 2018
HP Preamplifier	8449B	3008A01201	Feb. 22, 2017	Feb. 21, 2018
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 21, 2017	Feb. 20, 2018
Agilent TEST RECEIVER	N9038A	MY51210129	Feb. 8, 2017	Feb. 7, 2018
Schwarzbeck Antenna	VULB 9168	139	Dec. 13, 2016	Dec. 12, 2017
Schwarzbeck Antenna	VHBA 9123	480	May 19, 2017	May 18, 2019
Schwarzbeck Horn Antenna	BBHA-9170	212	Dec. 30, 2016	Dec. 29, 2017
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Dec. 27, 2016	Dec. 26, 2017
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF104	CABLE-CH6	Aug. 14, 2017	Aug. 13, 2018
SUHNER RF cable With 3dB PAD	SF102	Cable-CH8-3.6m	Aug. 14, 2017	Aug. 13, 2018
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	May 31,2017	May 30,2018
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 26, 2017	Jul. 25, 2018
Loop Antenna TESEQ	HLA 6121	45745	May 19, 2017	May 18, 2018
EMCO Horn Antenna	3115	00028257	Dec. 15, 2016	Dec. 14, 2017
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
Anritsu Power Sensor	MA2411B	0738404	Apr. 24, 2017	Apr. 23, 2018
Anritsu Power Meter	ML2495A	0842014	Apr. 24, 2017	Apr. 23, 2018

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  3. The test was performed in Chamber No. 6.
  4. The Industry Canada Reference No. IC 7450E-6.
  5. The FCC Designation Number is TW2021.

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

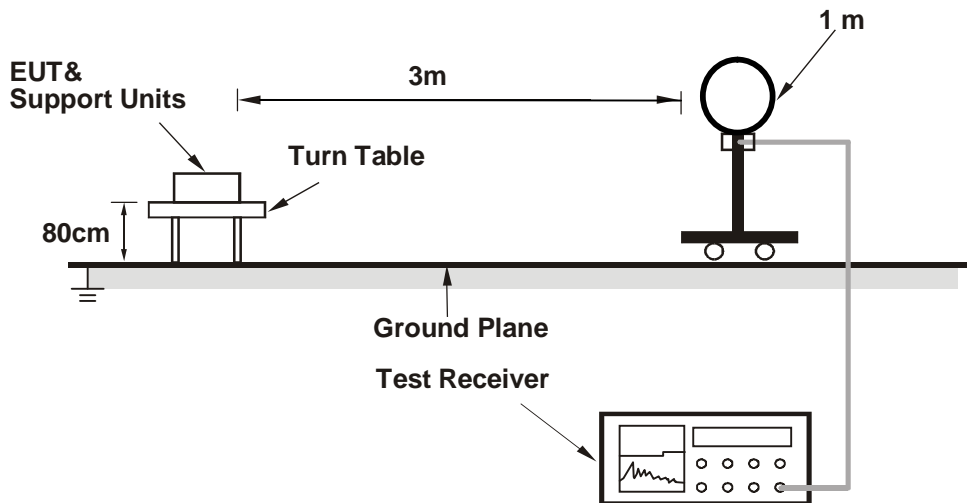

##### For Radiated emission 30MHz to 1GHz

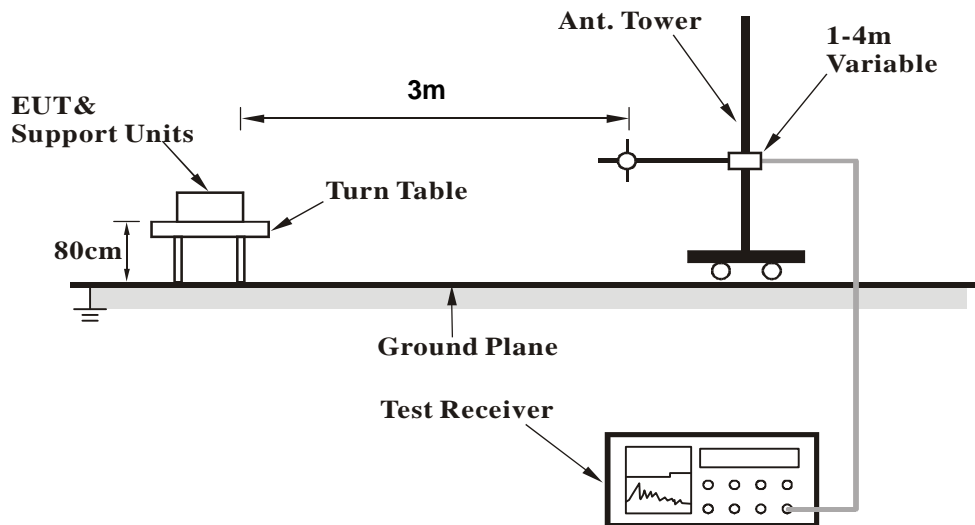

### For Radiated emission above 1GHz

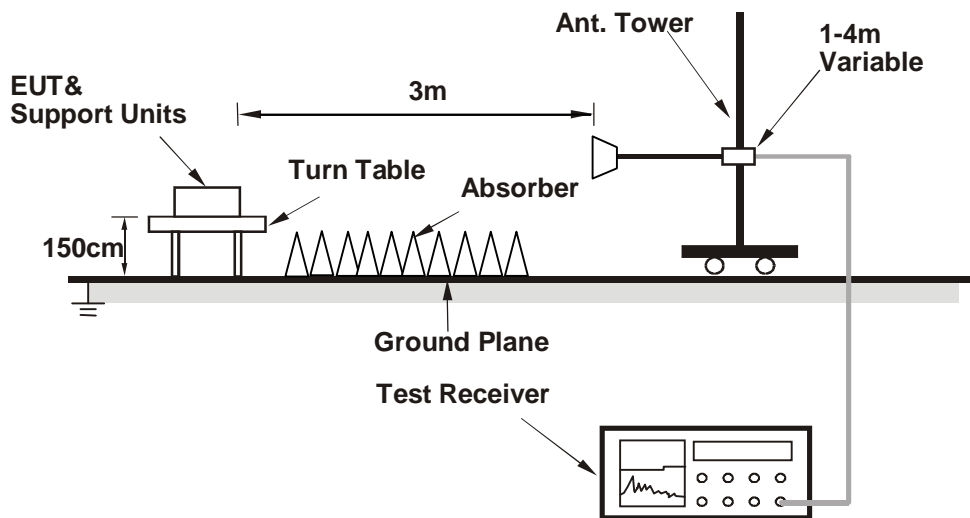

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

#### ABOVE 1GHz DATA

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.37 PK	74.00	-21.63	1.80 H	236	54.68	-2.31
2	2390.00	38.32 AV	54.00	-15.68	1.80 H	236	40.63	-2.31
3	2400.00	53.96 PK	74.00	-20.04	1.80 H	236	56.21	-2.25
4	2400.00	38.75 AV	54.00	-15.25	1.80 H	236	41.00	-2.25
5	*2432.99	92.15 PK	114.00	-21.85	1.80 H	236	94.18	-2.03
6	*2432.99	91.85 AV	94.00	-2.15	1.80 H	236	93.88	-2.03
7	4865.98	51.09 PK	74.00	-22.91	1.00 H	81	46.86	4.23
8	4865.98	44.38 AV	54.00	-9.62	1.00 H	81	40.15	4.23

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.02 PK	74.00	-23.98	1.71 V	211	52.33	-2.31
2	2390.00	37.67 AV	54.00	-16.33	1.71 V	211	39.98	-2.31
3	2400.00	51.87 PK	74.00	-22.13	1.71 V	211	54.12	-2.25
4	2400.00	38.28 AV	54.00	-15.72	1.71 V	211	40.53	-2.25
5	*2432.99	91.22 PK	114.00	-22.78	1.71 V	211	93.25	-2.03
6	*2432.99	90.94 AV	94.00	-3.06	1.71 V	211	92.97	-2.03
7	4865.98	52.88 PK	74.00	-21.12	2.70 V	80	48.65	4.23
8	4865.98	46.17 AV	54.00	-7.83	2.70 V	80	41.94	4.23

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 122	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.39	92.14 PK	114.00	-21.86	2.61 H	233	94.01	-1.87
2	*2457.39	91.74 AV	94.00	-2.26	2.61 H	233	93.61	-1.87
3	4914.78	49.41 PK	74.00	-24.59	1.81 H	232	45.12	4.29
4	4914.78	43.97 AV	54.00	-10.03	1.81 H	232	39.68	4.29

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.39	91.74 PK	114.00	-22.26	1.55 V	21	93.61	-1.87
2	*2457.39	91.02 AV	94.00	-2.98	1.55 V	21	92.89	-1.87
3	4914.78	52.51 PK	74.00	-21.49	2.66 V	93	48.22	4.29
4	4914.78	45.41 AV	54.00	-8.59	2.66 V	93	41.12	4.29

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 244	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2481.78	92.99 PK	114.00	-21.01	1.94 H	239	94.71	-1.72
2	*2481.78	<b>92.70 AV</b>	<b>94.00</b>	<b>-1.30</b>	<b>1.94 H</b>	<b>239</b>	<b>94.42</b>	<b>-1.72</b>
3	2483.50	62.46 PK	74.00	-11.54	1.94 H	239	64.17	-1.71
4	2483.50	48.81 AV	54.00	-5.19	1.94 H	239	50.52	-1.71
5	4963.56	51.21 PK	74.00	-22.79	1.54 H	31	46.88	4.33
6	4963.56	44.58 AV	54.00	-9.42	1.54 H	31	40.25	4.33

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2481.78	91.76 PK	114.00	-22.24	1.67 V	88	93.48	-1.72
2	*2481.78	91.25 AV	94.00	-2.75	1.67 V	88	92.97	-1.72
3	2483.50	61.44 PK	74.00	-12.56	1.67 V	88	63.15	-1.71
4	2483.50	48.40 AV	54.00	-5.60	1.67 V	88	50.11	-1.71
5	4963.56	52.92 PK	74.00	-21.08	3.07 V	176	48.59	4.33
6	4963.56	46.46 AV	54.00	-7.54	3.07 V	176	42.13	4.33

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

### BELOW 1GHz WORST-CASE DATA

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.92	18.88 QP	40.00	-21.12	1.11 H	21	28.54	-9.66
2	163.71	19.35 QP	43.50	-24.15	1.21 H	38	28.33	-8.98
3	323.13	21.01 QP	46.00	-24.99	2.44 H	210	27.64	-6.63
4	525.57	26.56 QP	46.00	-19.44	2.12 H	124	28.99	-2.43
5	742.71	30.75 QP	46.00	-15.25	2.87 H	351	29.08	1.67
6	872.01	32.67 QP	46.00	-13.33	1.82 H	25	28.67	4.00

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.63	24.82 QP	40.00	-15.18	1.21 V	17	35.48	-10.66
2	106.68	24.56 QP	43.50	-18.94	2.84 V	19	37.56	-13.00
3	213.33	16.03 QP	43.50	-27.47	2.24 V	73	27.26	-11.23
4	452.97	23.69 QP	46.00	-22.31	2.46 V	124	27.64	-3.95
5	723.36	29.37 QP	46.00	-16.63	1.82 V	227	27.77	1.60
6	849.36	31.58 QP	46.00	-14.42	1.48 V	75	27.81	3.77

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz.

## 4.2 Channel Bandwidth

### 4.2.1 Test Setup



### 4.2.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.2.3 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 4.2.4 Deviation from Test Standard


No deviation.

### 4.2.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.2.6 Test Results

CHANNEL	FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2432.999908	0.752
122	2457.393952	0.777
244	2481.787995	0.769

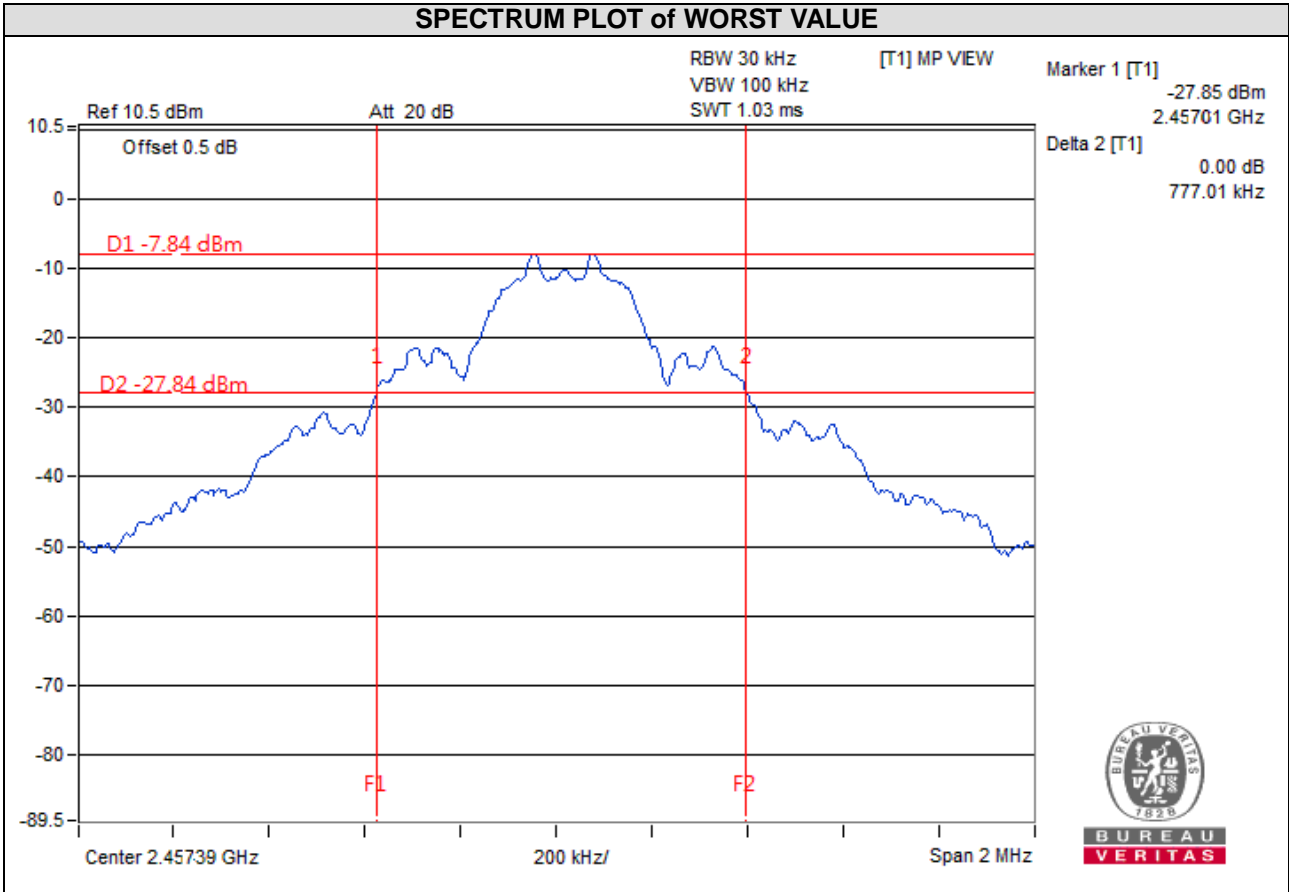

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---