



www.nemko.com



Test Report: 91505TRFWL

Applicant: Dekolink Wireless Ltd.
16 Bazel St. Qiryat Arie
Petah-Tikva, 49510
Israel

Apparatus: MW-DCSA-U470-20W90

FCC ID: OIWDCSAU47020W90

In Accordance With: FCC Part 90, Boosters
Private Land Mobile Radio Services

Tested By: Nemko Canada Inc.
303 River Road
Ottawa, Ontario
K1V 1H2

Authorized By: 
Jason Nixon, Telecom Specialist

Date: October 16, 2007

Total Number of Pages: 34

Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 90. Conducted measurements were performed in accordance with ANSI TIA-603-B-2002. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

Apparatus Assessed:	MW-DCSA-U470-20W90
Specification:	FCC Part 90 Private Land Mobile Radio Services
Compliance Status:	Complies
Exclusions:	None
Non-compliances:	None
Report Release History:	Original Release

Author: Heng Lin EMC/Wireless Specialist

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

TABLE OF CONTENTS

Report Summary.....	2
Section 1 : Equipment Under Test.....	4
1.1 Product Identification	4
1.2 Samples Submitted for Assessment.....	4
1.3 Theory of Operation	4
1.4 Technical Specifications of the EUT	5
Section 2 : Test Conditions.....	6
2.1 Specifications	6
2.2 Deviations From Laboratory Test Procedures	6
2.3 Test Environment	6
2.4 Test Equipment.....	6
Section 3 : Observations	7
3.1 Modifications Performed During Assessment	7
3.2 Record Of Technical Judgements	7
3.3 EUT Parameters Affecting Compliance	7
3.4 Test Deleted.....	7
3.5 Additional Observations	7
Section 4 : Results Summary	8
4.1 FCC Part 90 : Test Results	9
Appendix A : Test Results.....	10
Clause 90.205 Output Power	10
Clause 90.210 Conducted Spurious Emissions.....	11
Clause 90.210 Radiated Spurious Emissions	25
Clause 90.213 Frequency Stability	26
Clause 2-11-04/EAB/RF Occupied Bandwidth	27
Clause 2-11-04/EAB/RF Out of Band Rejection.....	31
Appendix B : Setup Photographs	33
Appendix C : Block Diagram of Test Setups.....	34

Section 1 : Equipment Under Test

1.1 Product Identification

The Equipment Under Test was identified as follows:

Digital Channel Selective Amplifier DCSA UHF (470-488MHz)
MW-DCSA-U470-20W90

1.2 Samples Submitted for Assessment

The following samples of the apparatus have been submitted for type assessment:

Sample No.	Description	Serial No.
1	Digital Channel Selective Amplifier (MN# MW-DCSA-U470-20W90)	07073102

The first samples were received on: August 27, 2007

1.3 Theory of Operation

The Digital Channel Selective Amplifier – UHF (DCSA-UHF) serves as an outstanding sub-module for UHF bi-directional amplifier system. The unit allows extending radio/wireless communication coverage area into buildings, basements, tunnels and other RF shadowed or shielded areas, where high gain and high selectivity are mandatory.

The DCSA-UHF is set to serves either as a Downlink or an Uplink path amplifier. Its functional mode is determined by the rack where it is installed (either UL-Rack A or DL-Rack B).

1.4 Technical Specifications of the EUT

Operating Frequency:	470-488MHz
Emission Designator:	F1D
Rated Power:	Downlink: 32 dBm Uplink: 32 dBm
Measured Power:	Downlink: 32.10 dBm Uplink: 32.05 dBm
Modulation:	FM, C4FM, CQPSK
Power Source:	+28VDC

Section 2 : Test Conditions

2.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 2 Subpart J, Equipment Authorization Procedures
FCC Part 90 Private Land Mobile Radio Services
FCC 2-11-04/EAB/RF Amplifier, Booster, and Repeater Reminder Sheet

2.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

2.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	:	15 – 30 °C
Humidity range	:	20 - 75 %
Pressure range	:	86 - 106 kPa
Power supply range	:	+/- 5% of rated voltages

2.4 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSP	FA001920	March 19/08
Spectrum Analyzer	Rohde & Schwarz	FSU	FA001877	Jan. 16/08
Power Meter	Agilent	E4418B	FA001678	Jun. 12/08
Power Sensor	Agilent	8487A	FA001741	Jun. 12/08
Biconical (2) Antenna	EMCO	3109	FA000904	Sept. 26/08
Log Periodic Antenna #1	EMCO	LPA-25	FA000477	Sept. 27/08
Horn Antenna #1	EMCO	3115	FA000649	Feb. 26/08
1.0 – 2.0 GHz Amplifier	JCA	12-400	FA001498	Aug. 21/08
2.0 – 4.0 GHz Amplifier	JCA	24-600	FA001496	Aug. 21/08
4.0 – 8.0 GHz Amplifier	JCA	48-600	FA001497	Aug. 21/08
5.0 – 18.0 GHz Amplifier	NARDA	DWT-186N23U40	FA001409	COU

COU – Calibrate on Use

NCR – No Calibration Required

Section 3 : Observations

3.1 Modifications Performed During Assessment

No modifications were performed during assessment.

3.2 Record Of Technical Judgements

No technical judgements were made during the assessment.

3.3 EUT Parameters Affecting Compliance

The user of the apparatus could not alter parameters that would affect compliance.

3.4 Test Deleted

No Tests were deleted from this assessment.

3.5 Additional Observations

There were no additional observations made during this assessment.

Section 4 : Results Summary

This section contains the following:

FCC Part 90 : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

- N No : not applicable / not relevant.
- Y Yes : Mandatory i.e. the apparatus shall conform to these tests.
- N/T Not Tested, mandatory but not assessed. (See section 3.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

4.1 FCC Part 90 : Test Results

Clause	Test Method	Test Description	Required	Result
90.205	2.1046	Output power	Y	PASS
90.210	2.1051	Conducted spurious emissions	Y	PASS
90.210	2.1053	Radiated spurious emissions	Y	PASS
90.213	2.1055	Frequency stability	Y	PASS
90.214	—	Transient Behavior	N	
90.219	—	Use of boosters	N	
2-11-04/EAB/RF	2.1049	Occupied bandwidth	Y	PASS
2-11-04/EAB/RF	—	Out of band rejection	Y	PASS

Notes:

Appendix A : Test Results

Clause 90.205 Output Power

Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation. Except where otherwise specifically provided for, the maximum power that will be authorized for new stations authorized after August 16, 1995 is as follows in FCC Part 90.205(a) through (r).

Test Conditions:

Sample Number:	1	Temperature:	24.3 °C
Date:	September 12, 2007	Humidity:	45.9 %
Modification State:	0	Tester:	Heng Lin
		Laboratory:	Ottawa

Test Results:

See Attached Table.

Additional Observations:

The output power was measured by using a Peak Detector with a 3MHz RBW/VBW.

Single Channel Power:

Modulation	Downlink (dBm)		
	Low	Mid	High
FM	31.95	32.1	32.0
C4FM	30.62	30.59	30.64
CQPSK	31.22	31	30.95

Modulation	Uplink (dBm)		
	Low	Mid	High
FM	31.98	31.7	31.65
C4FM	30.23	30.34	30.54
CQPSK	32.14	32.05	32.25

Clause 90.210 Conducted Spurious Emissions

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere, the Table below specifies the emission masks for equipment operating in the frequency bands governed under this part.

Test Conditions:

Sample Number:	1	Temperature:	24.3 °C
Date:	September 12, 2007	Humidity:	45.9 %
Modification State:	0	Tester:	Heng Lin
		Laboratory:	Ottawa

Test Results:


See Attached Plots.

Additional Observations:

Conducted emissions were performed on a low, middle and high channel for each modulation.


3rd order Intermodulation

Downlink – Low Bandedge
CW

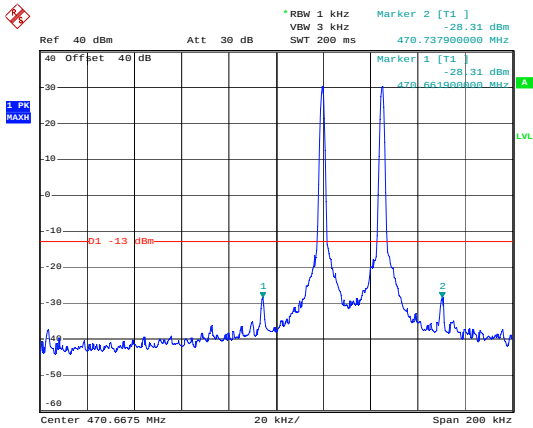


Date: 16.OCT.2007 16:09:33

C4FM

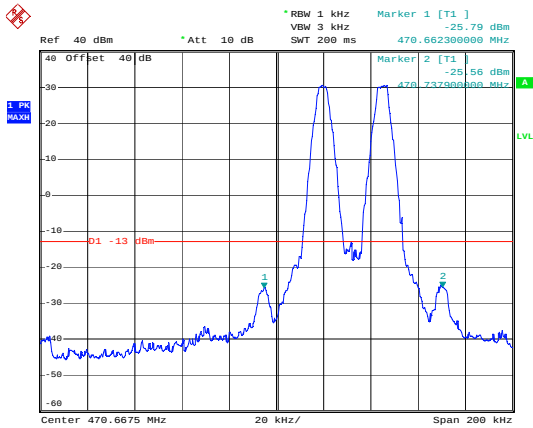


Date: 28.SEP.2007 10:01:18

CQPSK

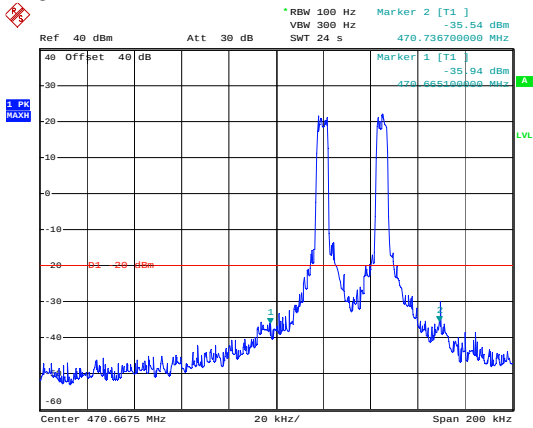


Date: 16.OCT.2007 16:08:32

Downlink – High Bandedge
CW

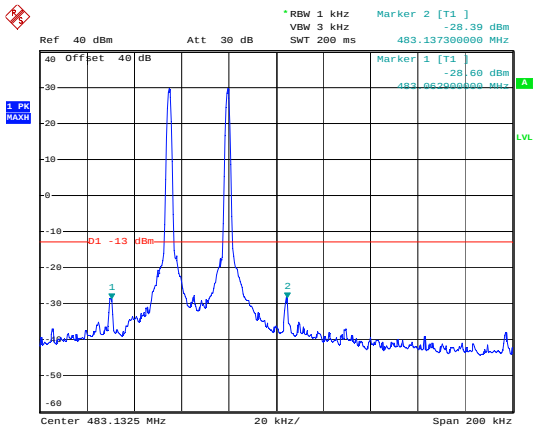


Date: 16.OCT.2007 15:59:48

C4FM

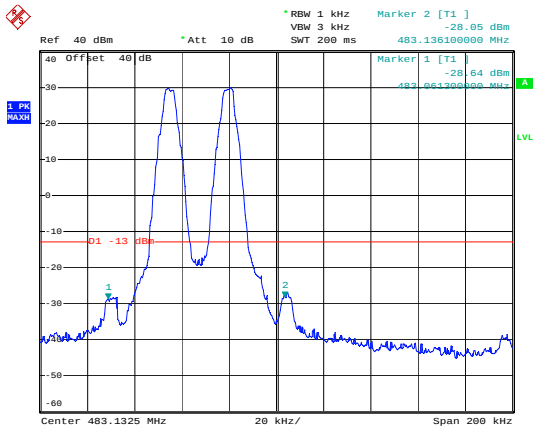


Date: 28.SEP.2007 10:14:44

CQPSK

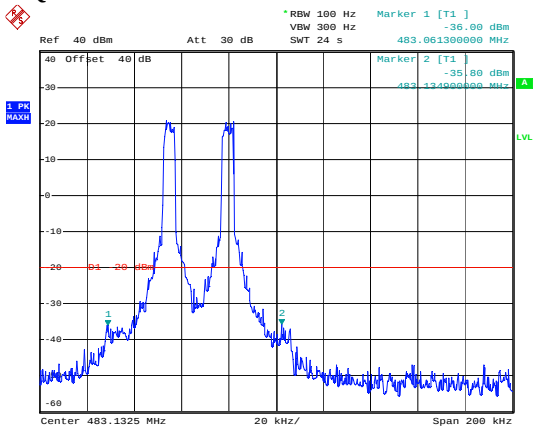


Date: 16.OCT.2007 16:03:52

Uplink – Low Bandedge
CW

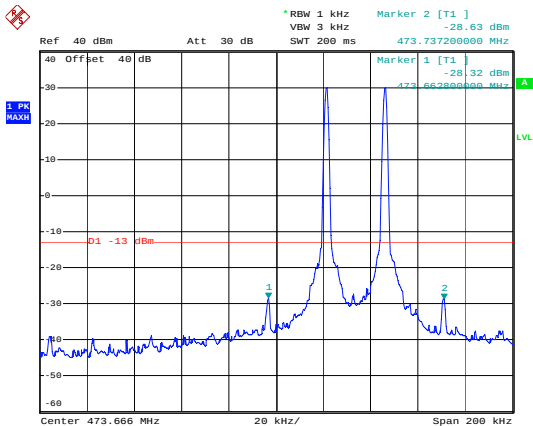


Date: 16.OCT.2007 16:11:54

C4FM

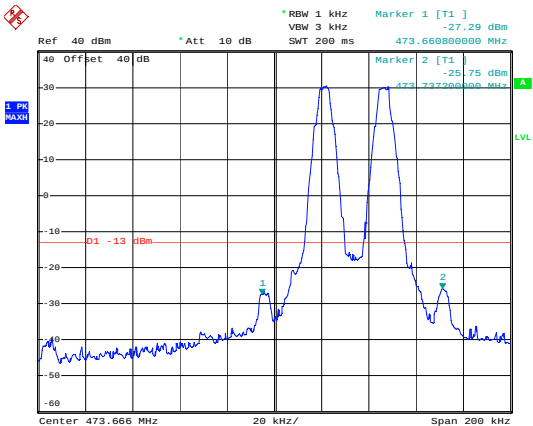

Date: 28.SEP.2007 09:58:17


CQPSK

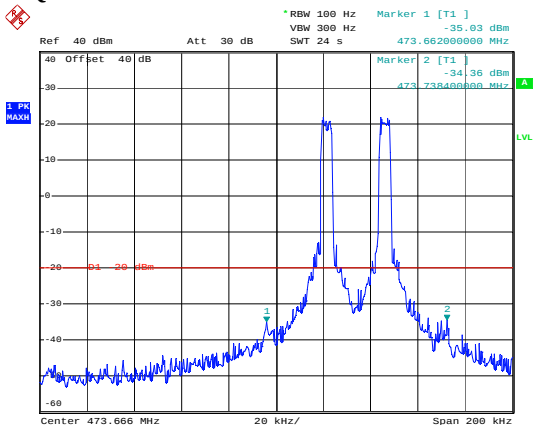

Date: 16.OCT.2007 16:14:55


Uplink – High Bandedge

CW

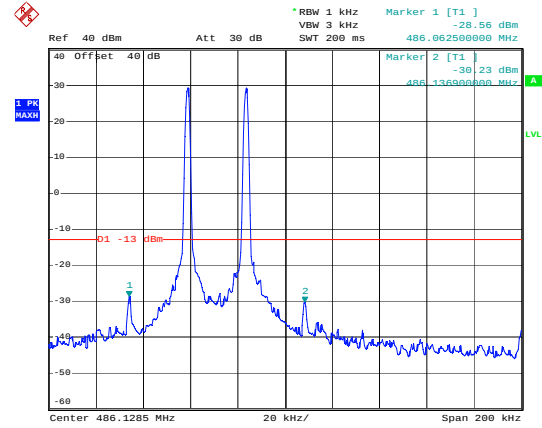


Date: 16.OCT.2007 15:44:51

C4FM

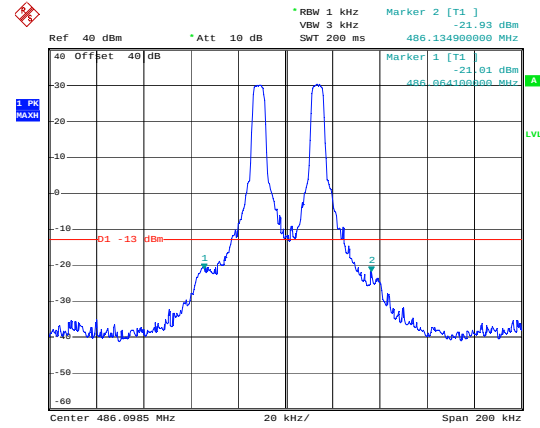

Date: 28.SEP.2007 09:43:47

CQPSK

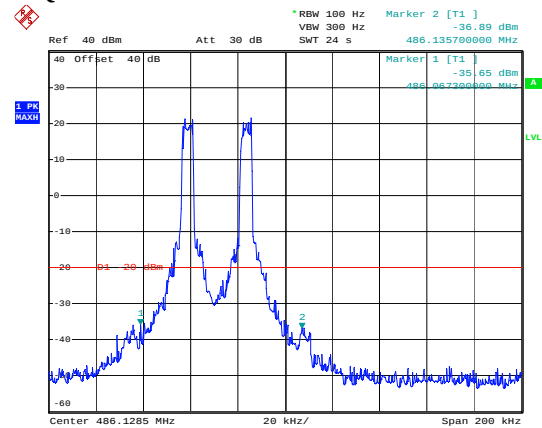


Date: 16.OCT.2007 15:48:42


Conducted Emission

Downlink - FM

Low Channel

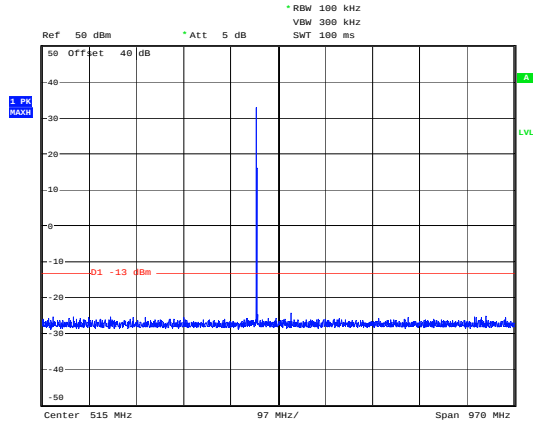


Date: 12.SEP.2007 16:52:05

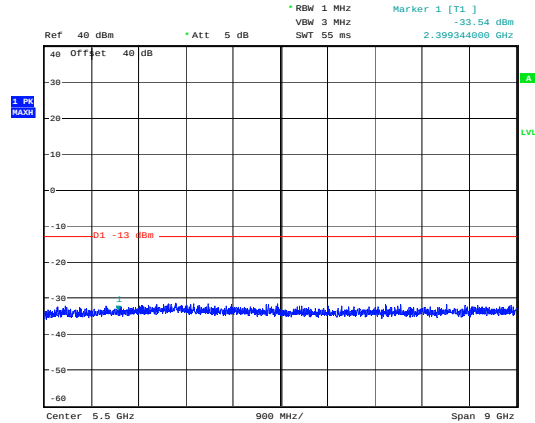


Date: 12.SEP.2007 16:59:35

Mid Channel

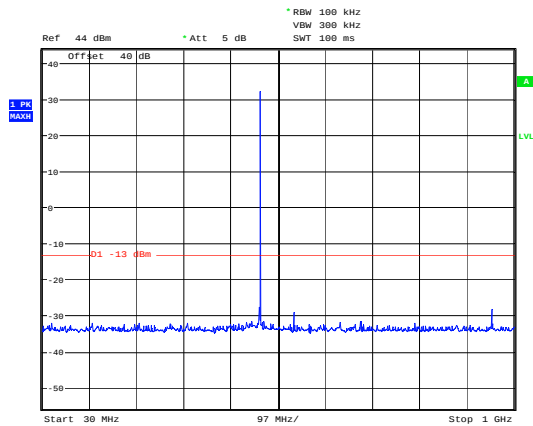


Date: 12.SEP.2007 17:49:50

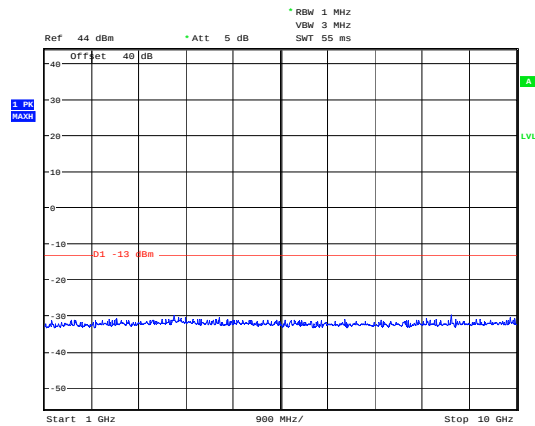


Date: 12.SEP.2007 17:50:31

High Channel

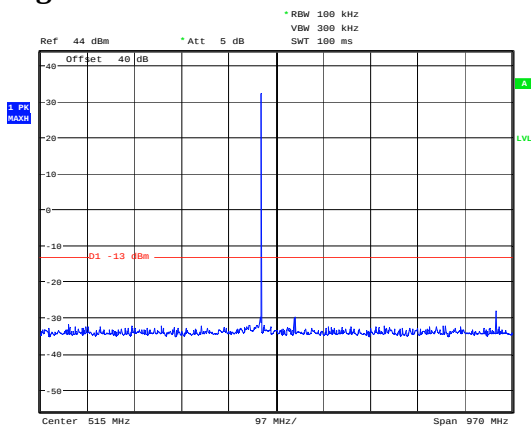


Date: 12_SEP.2007 17:20:13

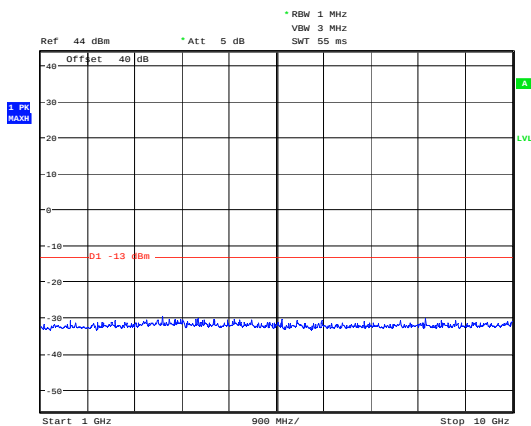


Date: 12_SEP.2007 17:21:04

Downlink – C4FM
Low Channel

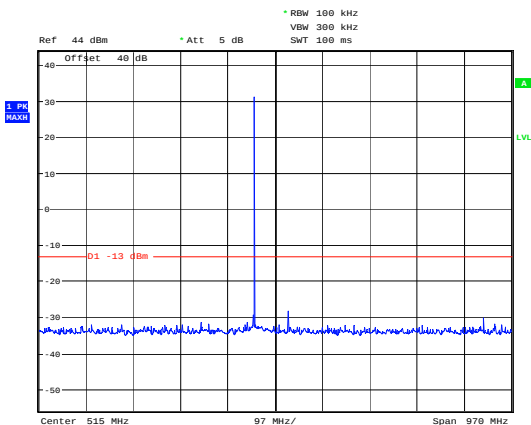


Date: 12_SEP.2007 17:03:15

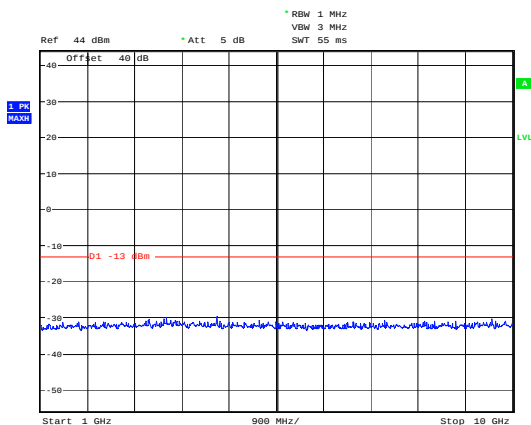


Date: 12_SEP.2007 17:03:46

Mid Channel

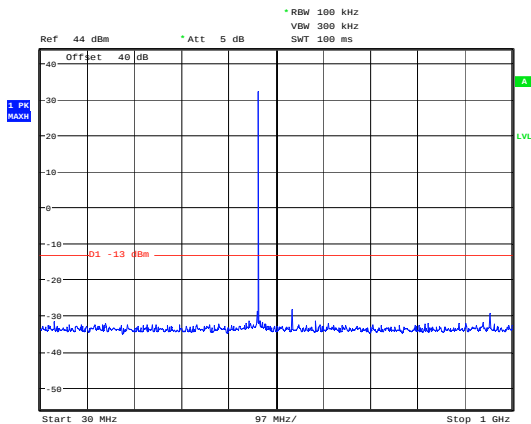


Date: 12.SEP.2007 17:48:16

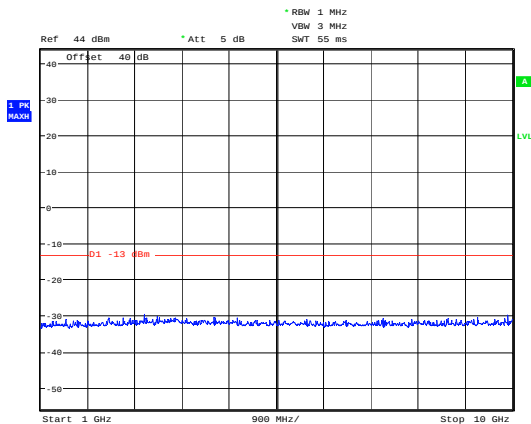


Date: 12.SEP.2007 17:47:27

High Channel

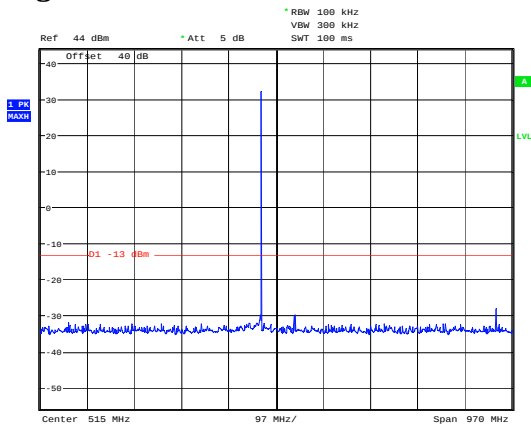


Date: 12.SEP.2007 17:20:13

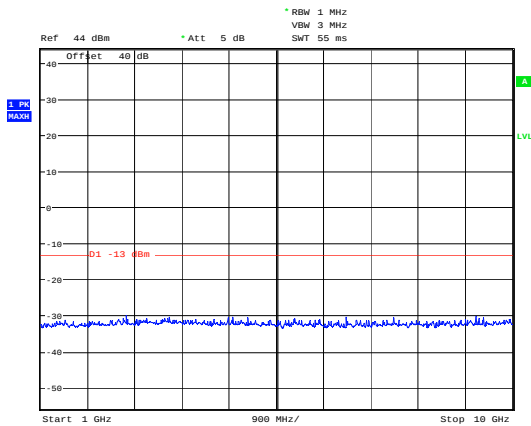


Date: 12.SEP.2007 17:22:30

Downlink - CQPSK
Low Channel

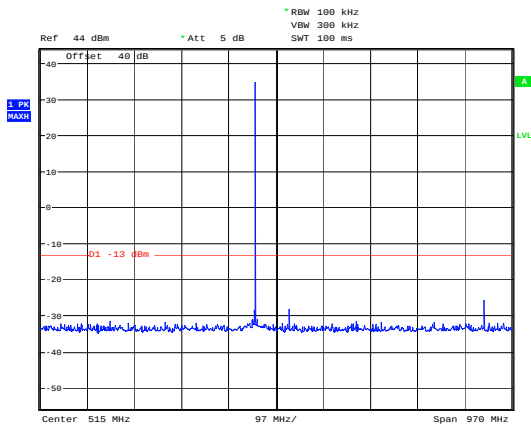


Date: 12.SEP.2007 17:02:17

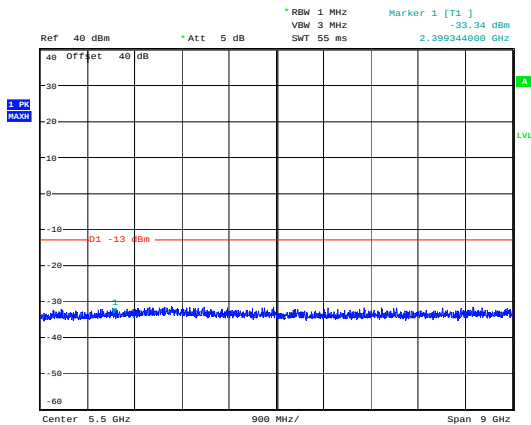


Date: 12.SEP.2007 16:59:49

Mid Channel

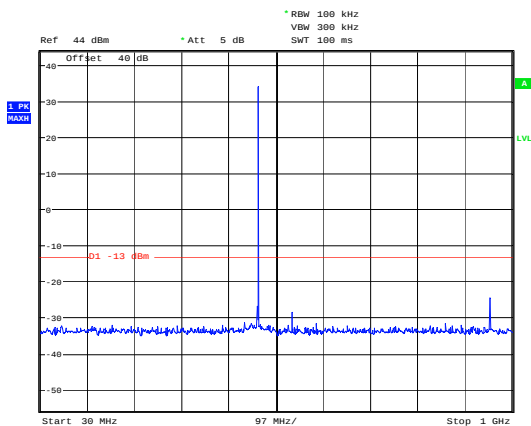


Date: 12.SEP.2007 17:49:05

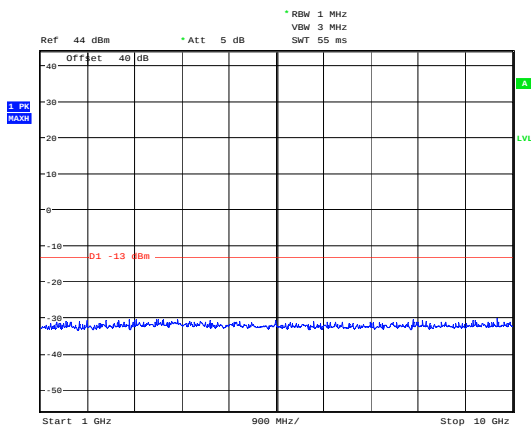


Date: 12.SEP.2007 17:46:50

High Channel

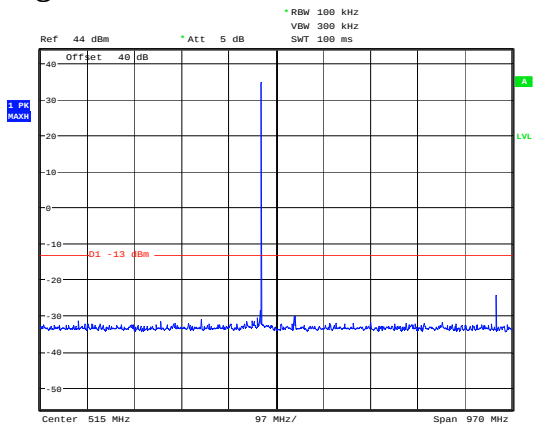


Date: 12.SEP.2007 17:18:32

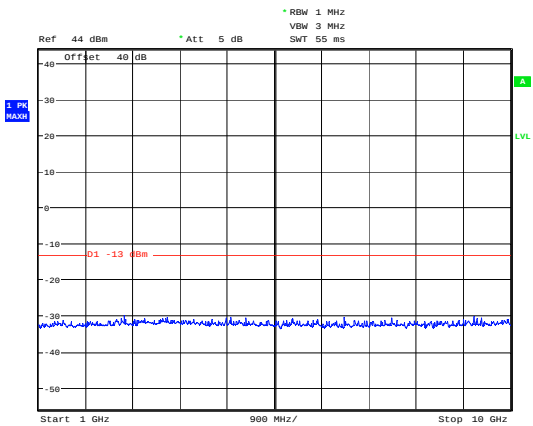


Date: 12.SEP.2007 17:22:30

Uplink – FM
Low Channel

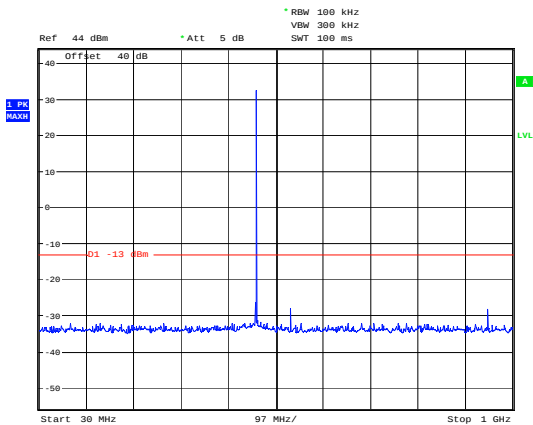


Date: 12.SEP.2007 17:13:24

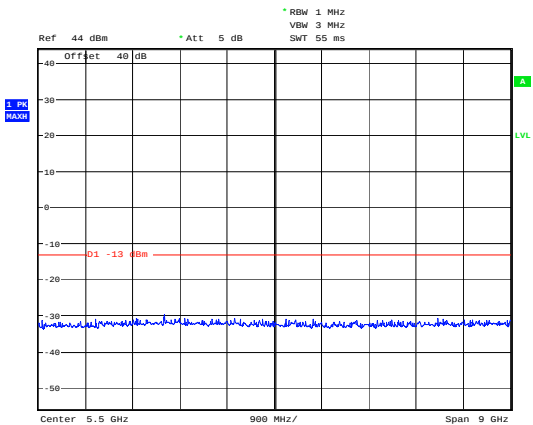


Date: 12.SEP.2007 17:12:50

Mid Channel

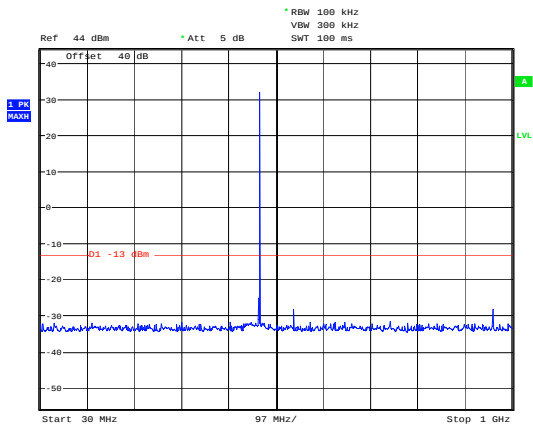


Date: 12.SEP.2007 17:37:28

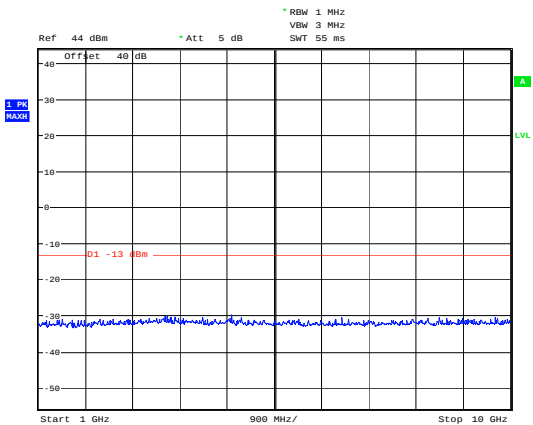


Date: 12.SEP.2007 17:36:28

High Channel

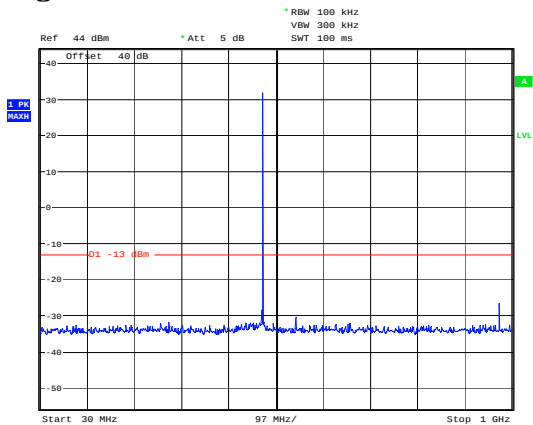


Date: 12.SEP.2007 17:28:46

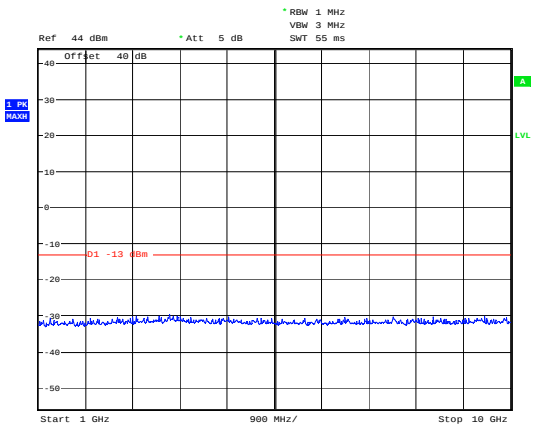


Date: 12.SEP.2007 17:29:59

Uplink – C4FM
Low Channel

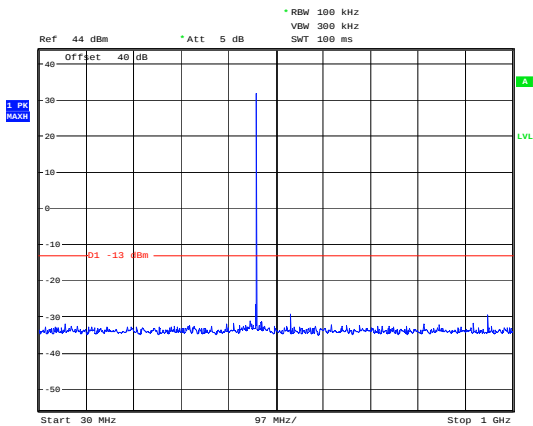


Date: 12.SEP.2007 17:09:02

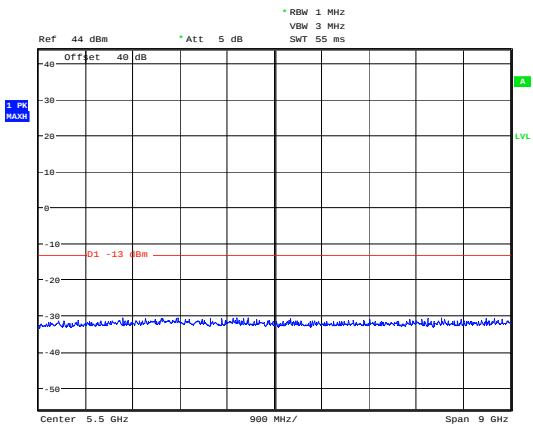


Date: 12.SEP.2007 17:08:04

Mid Channel

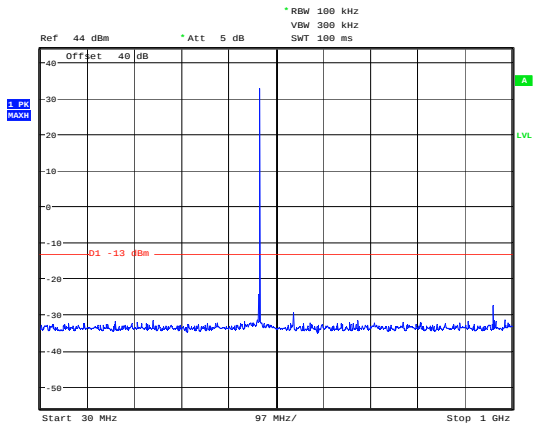


Date: 12.SEP.2007 17:38:54

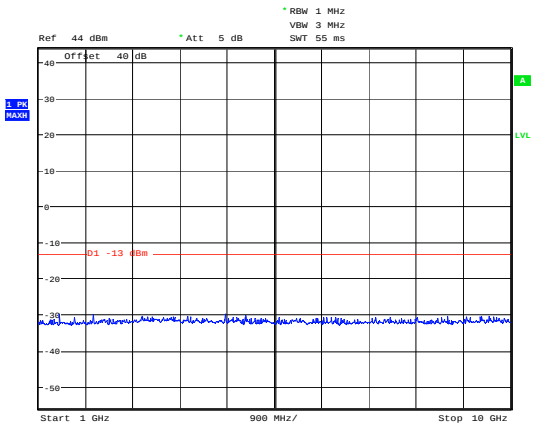


Date: 12.SEP.2007 17:40:06

High Channel

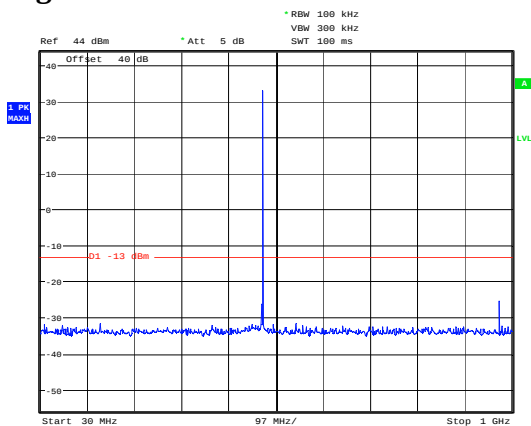


Date: 12_SEP.2007 17:27:34

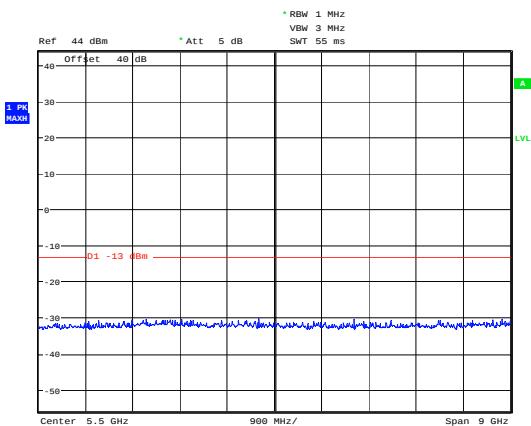


Date: 12_SEP.2007 17:26:51

Uplink – CQPSK
Low Channel

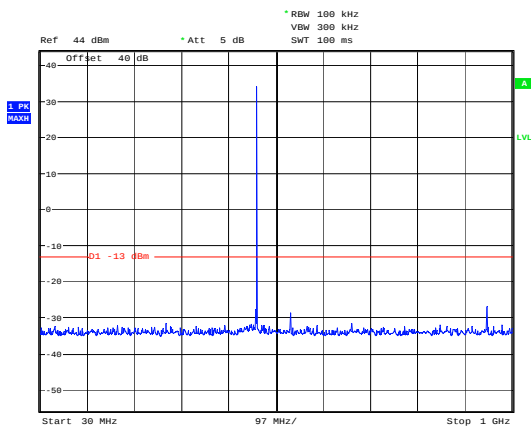


Date: 12_SEP.2007 17:09:55

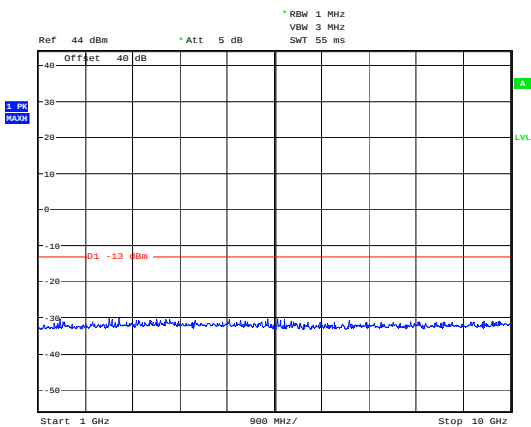


Date: 12_SEP.2007 17:10:31

Mid Channel

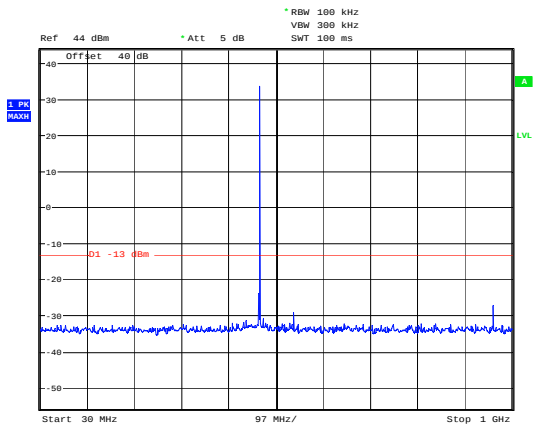


Date: 12.SEP.2007 17:38:03

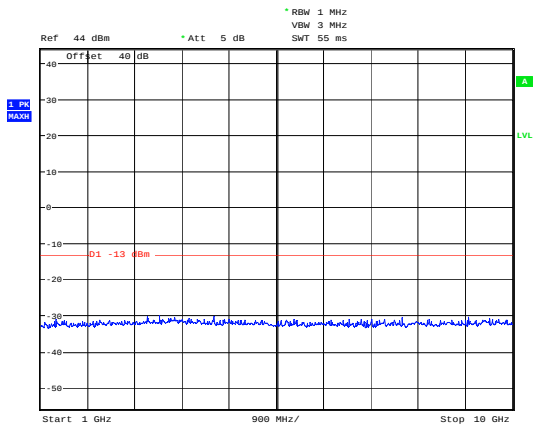


Date: 12.SEP.2007 17:40:35

High Channel

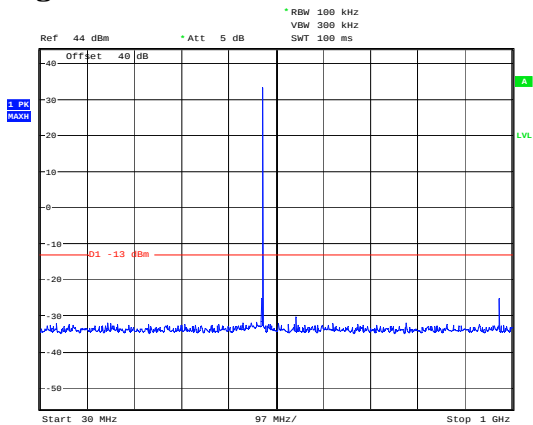

Date: 12.SEP.2007 17:28:11

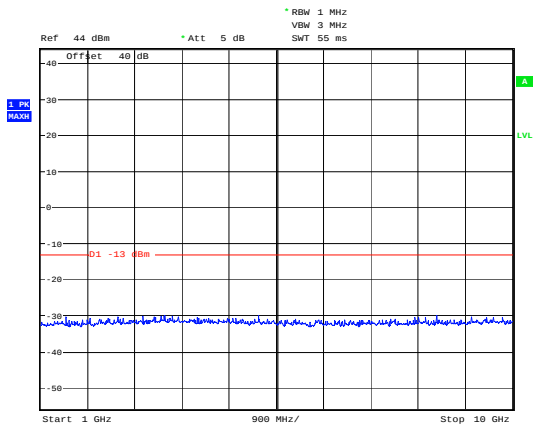

Date: 12.SEP.2007 17:30:42

Clause 90.210 Radiated Spurious Emissions

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere, the Table below specifies the emission masks for equipment operating in the frequency bands governed under this part.

Test Conditions:

Sample Number:	1	Temperature:	24.8 °C
Date:	September 05, 2007	Humidity:	46.5 %
Modification State:	0	Tester:	Heng Lin
		Laboratory:	Ottawa

Test Results:

No emission was detected within 20dB below the limit.

Additional Observations:

The Spectrum was searched from 30MHz to the 10th Harmonic.

All measurements were performed using a Peak Detector with 100kHz RBW below 1GHz and a 1MHz RBW above 1GHz at a distance of 3 meters.

Clause 90.213 Frequency Stability

- a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following Table.

Minimum Frequency Stability in parts per million (ppm):

Frequency range (MHz)	Fixed and base stations	Mobile stations - Over 2 watts output power	Mobile stations - 2 watts or less output power
Below 25	100	100	200
25-50	20	20	50
72-76	5	---	50
150-174	50	5	50
216-220	1.0	---	1.0
220-222	0.1	1.5	1.5
421-512	2.5	5	5
806-809	1.0	1.5	1.5
809-824	1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	0.1	1.5	1.5
902-928	2.5	2.5	2.5
929-930	1.5	---	---
935-940	0.1	1.5	1.5
1427-1435	300	300	300
Above 2450	---	---	---

Test Conditions:

Sample Number:	1	Temperature:	23 °C
Date:	October 16, 2007	Humidity:	36 %
Modification State:	0	Tester:	Heng Lin
		Laboratory:	Ottawa

Test Results: Complies.

Additional Observations:

The tested repeater uses the same LO for down- and up-frequency conversion in the signal-processing chain; therefore the transmitted signal is identical in frequency to the received signal. This was verified by measuring the transmitted (output) signal frequency with a frequency counter that was phase-locked to a signal generator used to generate input RF signal. Measured frequency deviation was 0 Hz and the DUT was deemed to comply with frequency stability requirement.

Clause 2-11-04/EAB/RF Occupied Bandwidth

Using an RBW of 300Hz or 1% of the emission bandwidth, The spectral shape of the output should look similar to the input for all modulations.

Test Conditions:


Sample Number:	1	Temperature:	24.8 °C
Date:	September 17, 2007	Humidity:	46.5 %
Modification State:	0	Tester:	Heng Lin
		Laboratory:	Ottawa

Test Results:

See Attached Plots.


Downlink – FM

Input

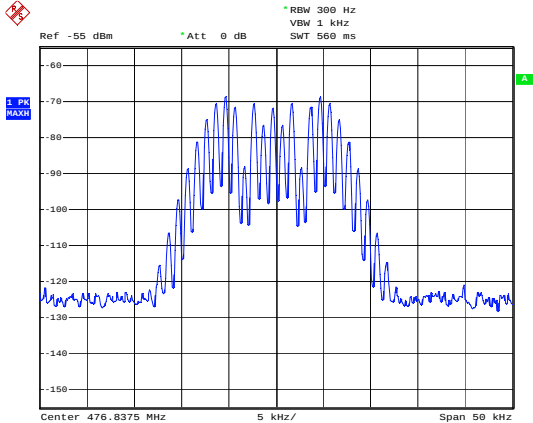

Date: 27.SEP.2007 14:47:53


Output

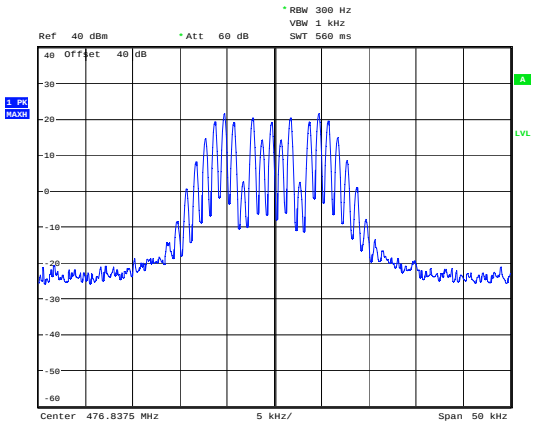

Date: 17.SEP.2007 11:37:50


Downlink – C4FM

Input

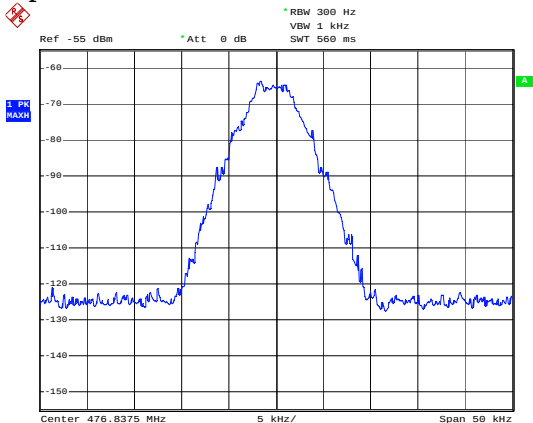

Date: 27.SEP.2007 14:46:00


Output

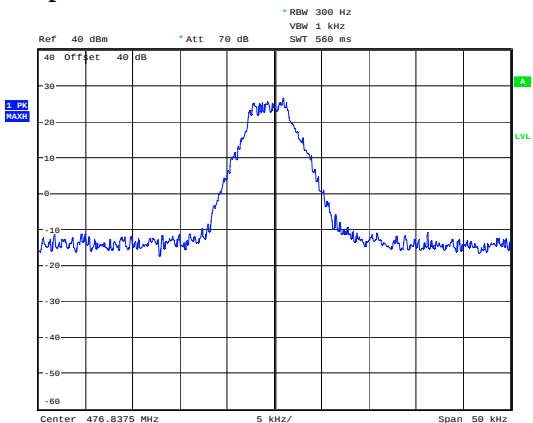

Date: 17.SEP.2007 11:39:43


Downlink - CQPSK

Input

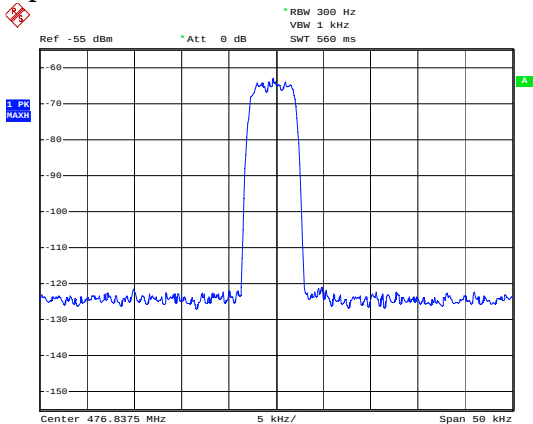

Date: 27.SEP.2007 14:46:54


Output

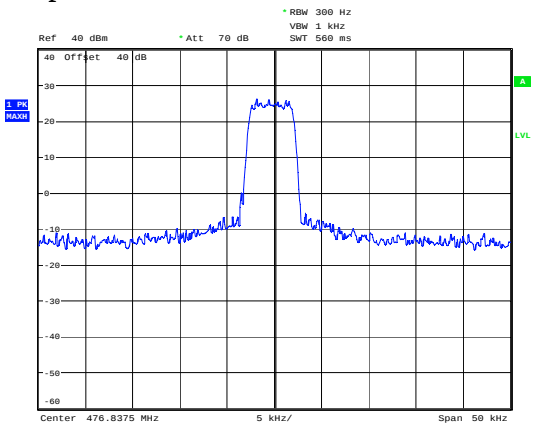

Date: 17.SEP.2007 11:39:08


Uplink - FM

Input

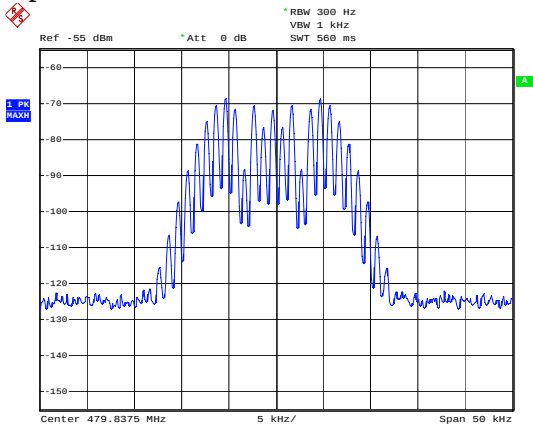

Date: 27.SEP.2007 14:48:53


Output

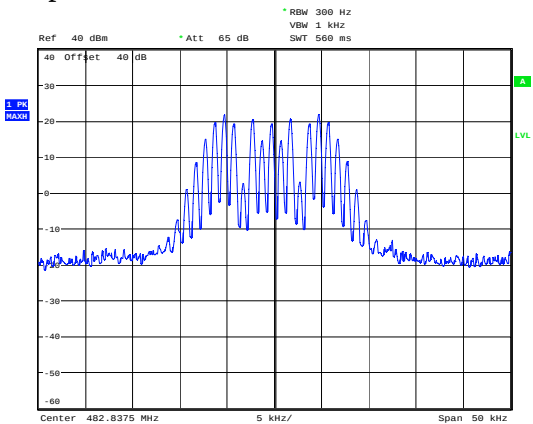

Date: 17.SEP.2007 11:44:48


Uplink – C4FM

Input

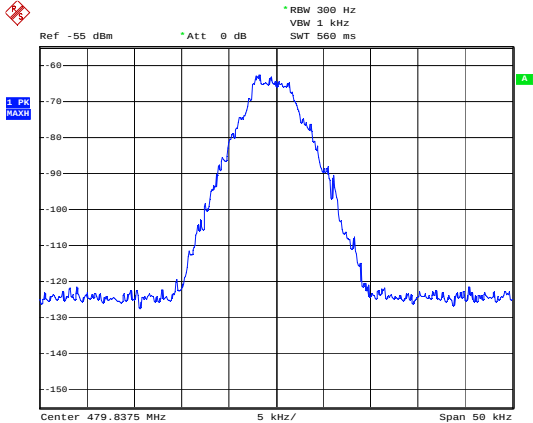

Date: 27.SEP.2007 14:50:37


Output

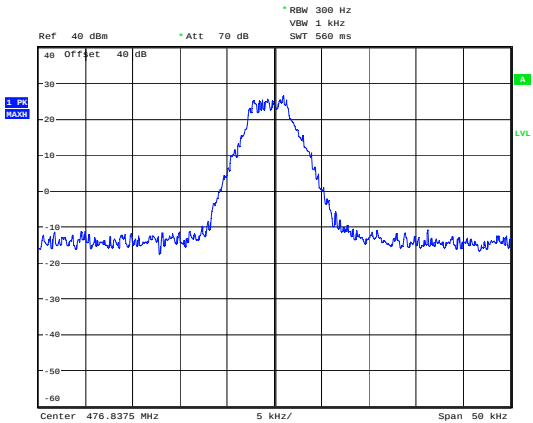

Date: 17.SEP.2007 11:39:43


Uplink – CQPSK

Input

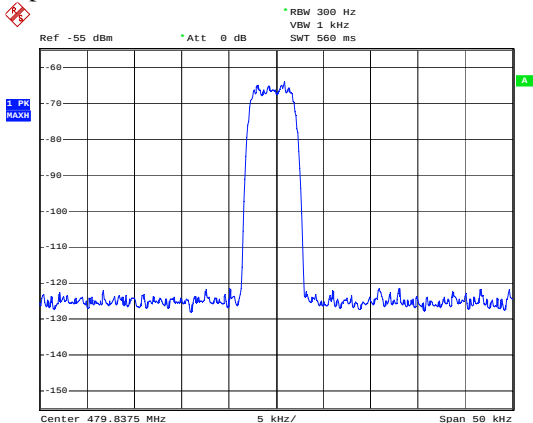

Date: 27.SEP.2007 14:49:33

Output

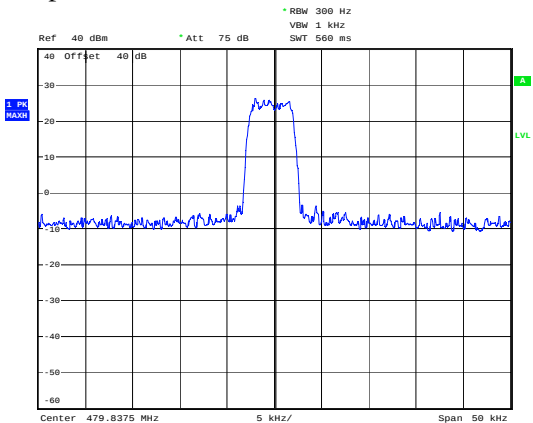

Date: 17.SEP.2007 11:58:57

Clause 2-11-04/EAB/RF Out of Band Rejection

Plots showing the filter frequency response.


Test Conditions:

Sample Number:	1	Temperature:	23
Date:	September 28, 2007	Humidity:	47
Modification State:	0	Tester:	Heng Lin
		Laboratory:	Ottawa

Test Results:


See Attached Plots.

Low Channel:
Downlink

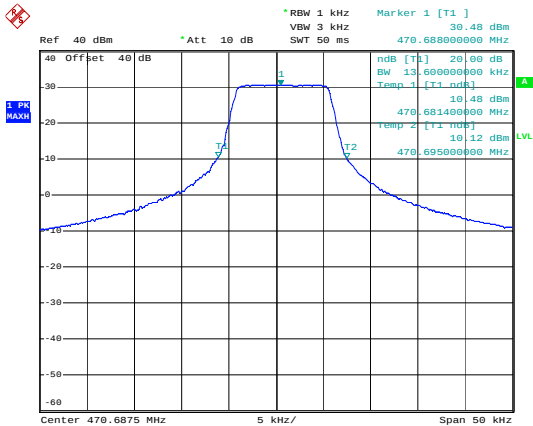


Date: 28.SEP.2007 10:54:11

Uplink

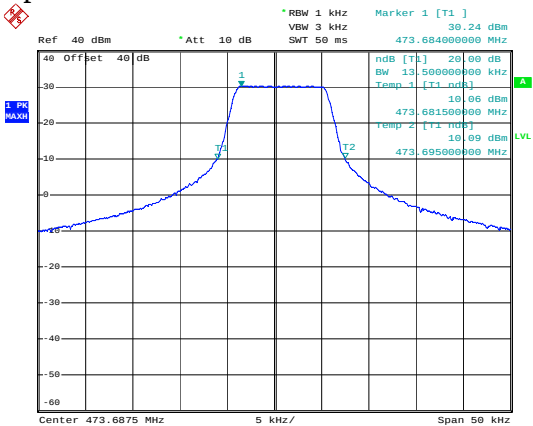


Date: 28.SEP.2007 10:59:04

Mid Channel
Downlink

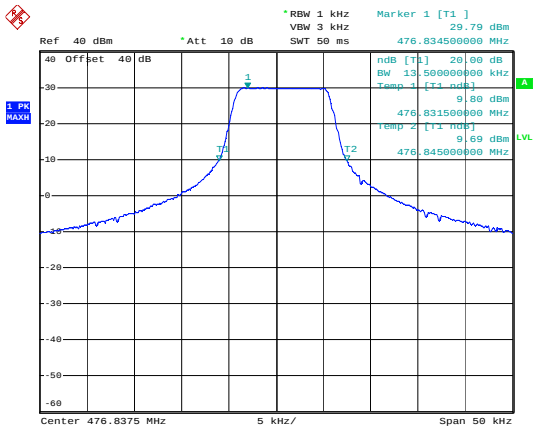


Date: 28.SEP.2007 10:49:10

Uplink

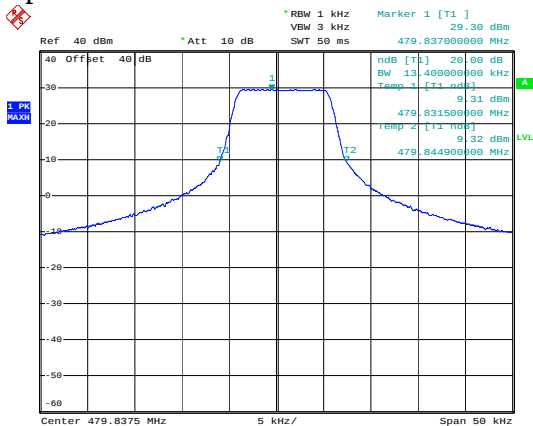


Date: 28.SEP.2007 11:03:31

High Channel
Downlink

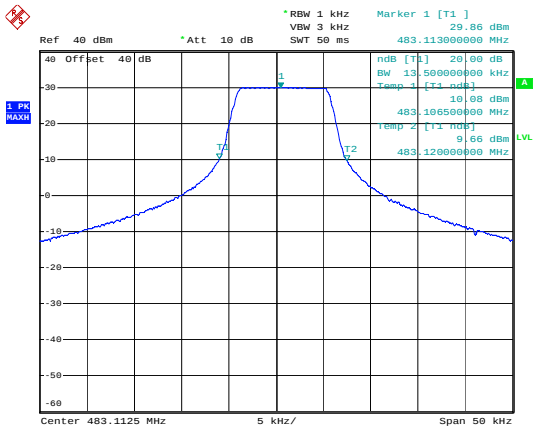

Date: 28.SEP.2007 10:44:03

Uplink

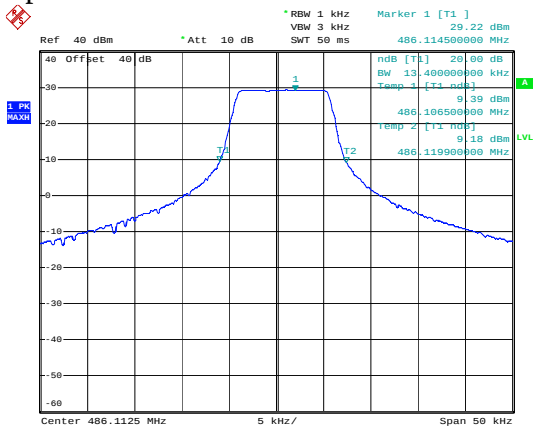

Date: 28.SEP.2007 11:06:04


Appendix B : Setup Photographs

Radiated Spurious Emissions Setup:



Appendix C : Block Diagram of Test Setups

Test Site For Radiated Emissions

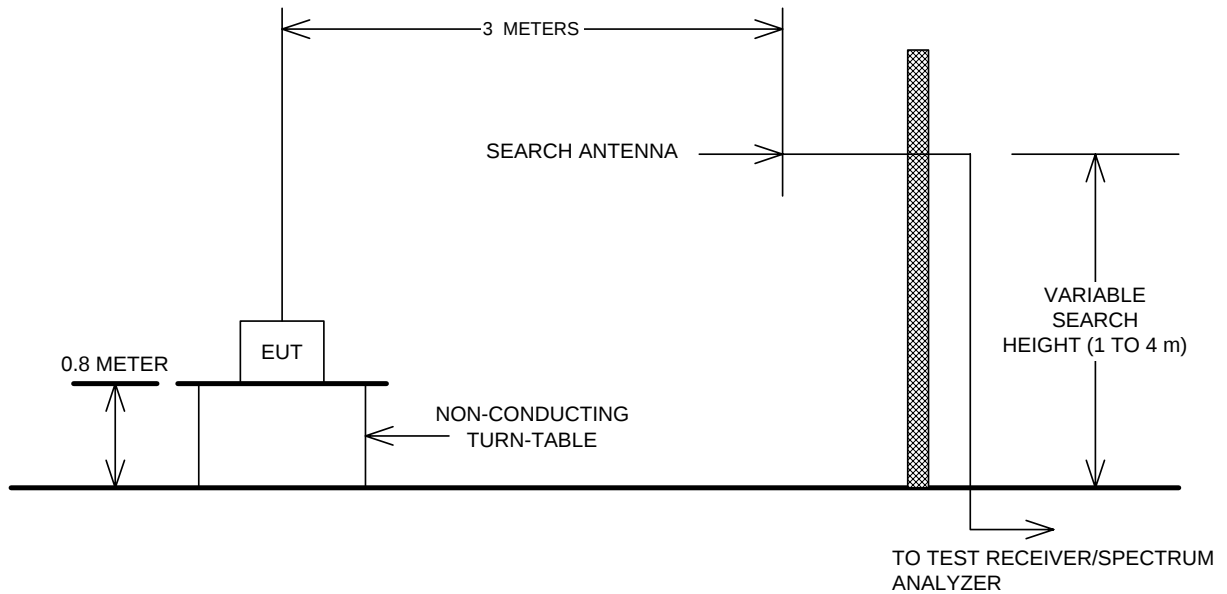

Conducted Emissions, Output power, Occupied Bandwidth and Out of Band Rejection

