

Test of Axxcelera AB-MAX CPE

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: AXXC02-A3b Rev A



**TEST REPORT**  
FROM  
**MiCOM Labs**

Test of Axxcelera AB-MAX CPE  
to  
To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: AXXC02-A3b Rev A

Note: this report only contains data with regard to the 5,600 to 5,725 MHz operational modes of the Axxcelera AB-MAX Customer Premise Equipment. 5.8 GHz test data is reported in MiCOM Labs test report AXXC02-A8b

This report supersedes None

**Manufacturer:** Axxcelera Broadband Wireless, Inc  
1600 E. Parham Road  
Richmond  
Virginia 23228 USA

**Product Function:** 802.16 Wireless Customer Premise Equipment (CPE)

**Copy No:** pdf **Issue Date:** 6th November 2007

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
440 Boulder Court, Suite 200  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 3 of 113

---

This page has been left intentionally blank

## TABLE OF CONTENTS

<b>COVER PAGE .....</b>	<b>1</b>
<b>TITLE PAGE .....</b>	<b>2</b>
<b>ACCREDITATION &amp; LISTINGS.....</b>	<b>6</b>
<b>1. TEST RESULT CERTIFICATE .....</b>	<b>9</b>
<b>2. REFERENCES AND MEASUREMENT UNCERTAINTY.....</b>	<b>10</b>
2.1. Normative References .....	10
2.2. Test and Uncertainty Procedures .....	11
<b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>12</b>
3.1. Technical Details .....	12
3.2. Scope of Test Program.....	13
3.3. Equipment Model(s) and Serial Number(s) .....	15
3.4. Antenna Details .....	15
3.5. Cabling and I/O Ports .....	15
3.6. Test Configurations.....	16
3.7. Equipment Modifications.....	16
3.8. Deviations from the Test Standard .....	16
<b>4. TEST SUMMARY .....</b>	<b>17</b>
<b>5. TEST RESULTS .....</b>	<b>20</b>
5.1. Device Characteristics .....	20
5.1.1. 26 dB and 99 % Bandwidth .....	20
5.1.2. Transmit Output Power.....	31
5.1.3. Peak Power Spectral Density .....	35
5.1.4. Peak Excursion Ratio .....	46
5.1.5. Frequency Stability.....	51
5.1.6. Maximum Permissible Exposure .....	52
5.1.7. Radiated Emissions .....	53
5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz) .....	76
<b>6. Dynamic Frequency Selection (DFS).....</b>	<b>79</b>
6.1. Test Procedure and Setup .....	79
6.1.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring.....	79
6.1.2. DFS Response requirement values.....	79
6.1.3. Radar Test Waveforms.....	80
6.1.4. Frequency Hopping Radar Test Waveform .....	83
6.1.5. Radar Waveform Calibration .....	83
6.1.6. Radar Waveform Calibration Plots .....	84
6.1.7. Test Set Up:.....	90
6.2. Dynamic Frequency Selection (DFS) Test Results .....	92
6.2.1. UNII Detection Bandwidth: .....	92
6.2.2. Initial Channel Availability Check Time.....	94
6.2.3. Radar Burst at the Beginning of the Channel Availability Check Time: .....	94
6.2.4. Radar Burst at the End of the Channel Availability Check Time: .....	94

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 5 of 113

---

6.2.5. <i>In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period</i> .....	95
6.2.6. <i>Statistical Performance Check</i> .....	102
<b>7. PHOTOGRAPHS.....</b>	<b>107</b>
7.1. Radiated Spurious Emissions >1 GHz.....	107
7.2. Conducted Emissions (150 kHz - 30 MHz).....	108
7.3. General Measurement Test Set-Up .....	109
7.4. Dynamic Frequency Selection Test Set-Up .....	110
<b>8. TEST EQUIPMENT DETAILS.....</b>	<b>112</b>

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 6 of 113

## ACCREDITATION & LISTINGS

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>

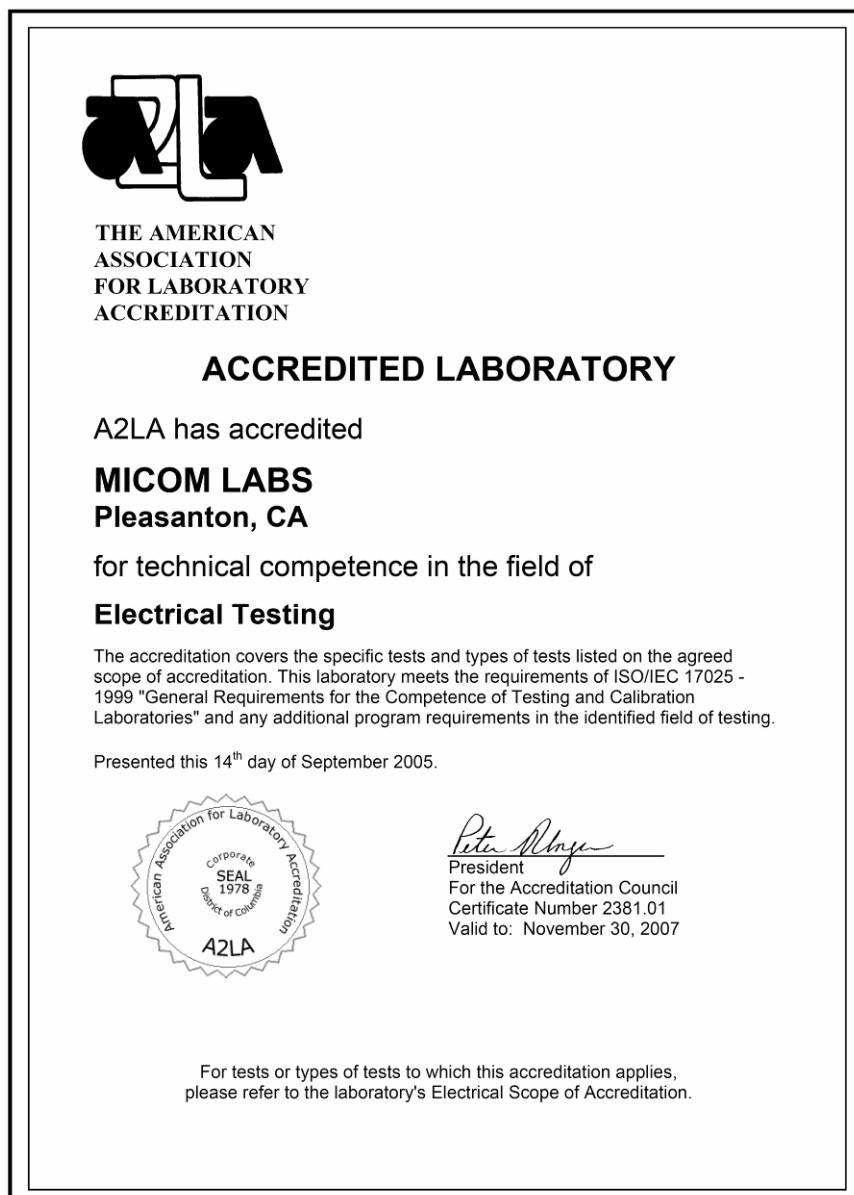

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 7 of 113

## LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

### North America

#### **United States of America**

Federal Communications Commission (FCC) Listing #: 102167

#### **Canada**

Industry Canada: 4143A

## RECOGNITION

### **APEC MRA (Asia-Pacific Economic Community Mutual Recognition Agreement)**

#### **Conformity Assessment Body (CAB) – MiCOM Labs**

Test data generated by MiCOM Labs is accepted in the following countries under the APEC MRA.

Country	Recognition Body	Phase	CAB Identification No.
Australia	Australian Communications and Media Authority (ACMA)	I	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	I	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	I	
Singapore	Infocomm Development Authority (IDA)	I	
Taiwan	Directorate General of Telecommunications (DGT) Bureau of Standards, Metrology and Inspection (BSMI)	I	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 8 of 113

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	6 <sup>th</sup> November 2007	First issue.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 9 of 113

## 1. TEST RESULT CERTIFICATE

Manufacturer:	Axxcelera Broadband Wireless, Inc 1600 E. Parham Road Richmond Virginia 23228 USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	Wireless Customer Premise Equipment (CPE)	Telephone:	+1 925 462 0304
Model:	AB-MAX CPE	Fax:	+1 925 462 0306
S/N:	CPE 001		
Test Date(s):	20th Aug to 27th Sept 2007	Website:	<a href="http://www.micomlabs.com">www.micomlabs.com</a>

### STANDARD(S)

FCC 47 CFR Part 15.407 & IC RSS-210

### TEST RESULTS

EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

#### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:

  
Graeme Grieve

Quality Manager MiCOM Labs,



CERTIFICATE #2381.01

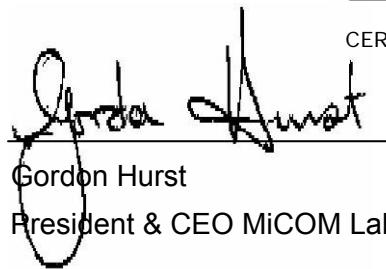  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 10 of 113

## **2. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **2.1. Normative References**

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.407	2007	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	Industry Canada RSS-210	Issue 7 June 2007	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(iv)	Industry Canada RSS-Gen	Issue 2 June 2007	General Requirements and Information for the Certification of Radiocommunication Equipment
(v)	ANSI C63.4	2003	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vi)	CISPR 22/ EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(vii)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(viii)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(ix)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(x)	A2LA	14 <sup>th</sup> September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(xi)	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 11 of 113

---

## 2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 12 of 113

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

Details	Description
Purpose:	Test of the Axxcelera AB-MAX CPE in the frequency range 5470 to 5,725 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations.
Applicant:	As manufacturer
Manufacturer:	Axxcelera Broadband Wireless, Inc 1600 E. Parham Road Richmond Virginia 23228 USA
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	AXXC02-A3b Rev A
Date EUT received:	12 <sup>TH</sup> September 2007
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	12 <sup>th</sup> September to 8 <sup>th</sup> October 2007
No of Units Tested:	1
Type of Equipment:	802.16 Wireless Customer Premise Equipment (CPE)
Manufacturers Trade Name:	AB-MAX Customer Premise Equipment (CPE)
Model:	AB-MAX CPE
Location for use:	Outdoor
Declared Nominal Output Power: (Average Power)	5,600-5,725 MHz: +18 dBm
Declared Frequency Range(s):	5,600 to 5,725 MHz
Type of Modulation:	BPSK, QPSK, 16QAM, 64QAM
EUT Modes of Operation:	Bandwidths: 5, 10 & 15 MHz
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	48 Vdc, 250 mA
Operating Temperature Range:	Declared range -33 to +55°C
ITU Emission Designator:	5 MHz BW – 4M7W7D 10 MHz BW – 9M1W7D 15 MHz BW – 13M5W7D
Microprocessor(s) Model:	Sequans Semiconductor 1010 SC
Clock/Oscillator(s):	18 MHz, 198 MHz,
Frequency Stability:	±20 ppm max
Equipment Dimensions:	10" X 10" X 3"
Weight:	3 lbs
Primary function of equipment:	Client device for wireless PMP cellular coverage.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 13 of 113

---

### 3.2. Scope of Test Program

#### RF Testing

The scope of the test program was to test the Axxcelera AB-MAX CPE wireless Customer Premise Equipment in the frequency range 5470 – 5725 MHz for compliance against FCC 47 CFR Part 15.407, Industry Canada RSS-210 specifications including Dynamic Frequency Selection (DFS) requirements. The CPE covers a limited number of channels 5610 – 5715 MHz.

#### Dynamic Frequency Selection

The scope of the test program was to test the Axxcelera AB-MAX CPE wireless Customer Premise Equipment in the frequency range 5,470 to 5,725 MHz as a Master device for compliance against DFS requirements of FCC 47 CFR Part 15.407 and the FCC specification Memorandum Opinion and Order FCC 06-96.

One frequency was chosen (5,620 MHz) from the operating channels of the UUT within the 5,470 – 5,725 MHz band for DFS testing per the requirements of FCC specification "Memorandum Opinion and Order FCC 06-96", Section 7.8 "DFS Conformance Test Procedures".

U-NII devices operating in the 5,470 - 5,725 MHz band shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.


The Axxcelera AB-MAX CPE product operates as a Master device with full radar detection and Dynamic Frequency Selection (DFS) capability.

The Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Axxcelera AB-MAX CPE  
Wireless Customer Premise Equipment**

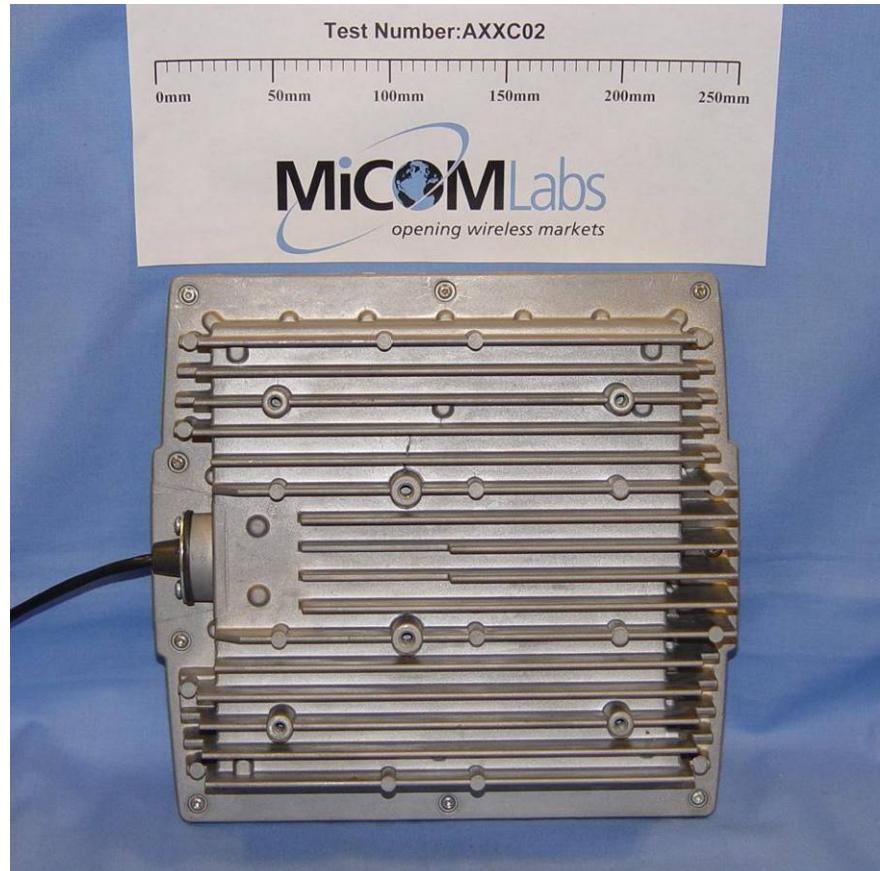

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 15 of 113

### 3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/ Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless CPE	Axxcelera	AB-MAX CPE	CPE 001
EUT	Power Supply	Cincon Electronics Co, Ltd	TR36A-POE-480	36480- 007281
Support	Laptop PC	Dell	Inspiron	None

### 3.4. Antenna Details

1. Maximum Antenna Gain = +16.0 dBi

### 3.5. Cabling and I/O Ports

Number and type of I/O ports

1. POE 10/100 Ethernet

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### **3.6. Test Configurations**

Testing was performed to determine the worst case test scenario. It was found through exercising each modulation with each bandwidth that there was no difference. Test data is available and held on file by the laboratory identifying cross checks performed.

Matrix of test configurations

Operational Mode	Frequencies (MHz)
	5,610
802.16	5,660
	5,715

Plots not included are held on file by the test laboratory and available upon request with client permission.

### **3.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

### **3.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 17 of 113

## 4. TEST SUMMARY

### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.407(a) A9.2(2) 4.4</b>	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted	Complies	5.1.1
<b>15.407(a) A9.2(2) 4.6</b>	Transmit Output Power	Power Measurement	Conducted	Complies	5.1.2
<b>15.407(a) A9.2(2)</b>	Peak Power Spectral Density	PPSD	Conducted	Complies	5.1.3
<b>15.407(a)(6)</b>	Peak Excursion Ratio	<13dB in any 1MHz bandwidth	Conducted	Complies	5.1.4
<b>15.407(g) 15.31 2.1 4.5</b>	Frequency Stability	Limits: contained within band of operation at all times.	Manufacturer declaration	Complies	5.1.5
<b>15.407(f) 5.5</b>	Radio Frequency Radiation Exposure	Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE)	SAR testing performed	Complies	5.1.6

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 18 of 113

### List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.407(b)(2)</b> <b>15.205(a)</b> <b>15.209(a)</b> <b>2.2</b> <b>2.6</b> <b>A9.3(2)</b> <b>4.7</b>	Radiated Emissions  Transmitter Radiated Spurious Emissions  Radiated Band Edge	Emissions above 1 GHz  Band edge results	Radiated		5.1.7
<b>RSS-GEN</b> <b>6</b>	Receiver Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.7.1
<b>15.407(b)(6)</b> <b>15.205(a)</b> <b>15.209(a)</b> <b>2.2</b>	Radiated Emissions	Emissions <1 GHz (30M-1 GHz)		Complies	5.1.7.2
<b>15.407(b)(6)</b> <b>15.207</b> <b>7.2.2</b>	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	5.1.7.3
					5.1.7.4
					5.1.8

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## List of Measurements (cont'd)

### Dynamic Frequency Selection (DFS)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407(h)(2)** and **FCC Memorandum Opinion and Order FCC 06-96 (Compliance Measurement procedures for unlicensed national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection)**.

### Tests performed on Master Device

Section	Test Items	Description	Condition	Result	Test Report Section
<b>7.8.1</b>	Detection Bandwidth	UNII Detection Bandwidth	Conducted	Complies	6.2.1
<b>7.8.2.1</b>	Performance Requirements Check	Initial Channel Availability Check Time	Conducted	Complies	6.2.2
<b>7.8.2.2</b>		Radar Burst at the Beginning of the Channel Availability Check Time	Conducted	Complies	6.2.3
<b>7.8.2.3</b>		Radar Burst at the End of the Channel Availability Check Time	Conducted	Complies	6.2.4
<b>7.8.3</b>	In-Service Monitoring	In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Conducted	Complies	6.2.5
<b>7.8.4</b>	Radar Detection	Statistical Performance Check	Conducted	Complies	6.2.6

**Note 1:** Test results reported in this document relate only to the items tested

**Note 2:** The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

**Note 3:** Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

## 5. TEST RESULTS

### 5.1. Device Characteristics


#### 5.1.1. 26 dB and 99 % Bandwidth

**FCC, Part 15 Subpart C §15.407(a)**  
**Industry Canada RSS-210 § A9.2(2)**  
**Industry Canada RSS-Gen 4.4**

#### Test Procedure

The bandwidth at 26 dB and 99 % is measured with a spectrum analyser connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The spectrum analyzer utilized the 6 dB resolution bandwidth filter for all measurements.

#### Test Measurement Set up

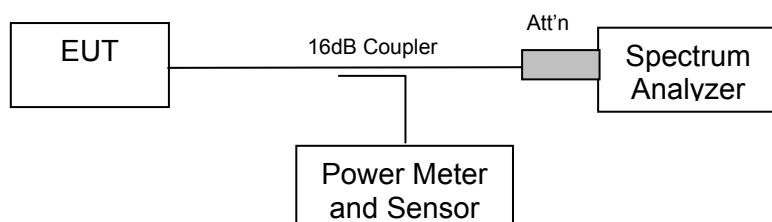

Measurement set up for 26 dB and 99 % bandwidth test

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Measurement Results for 26 dB and 99 % Operational Bandwidth(s)


Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

#### TABLE OF RESULTS – - 64 QAM 5 MHz BW

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,610	5.59118236	4.62925852
5,660	5.62124248	4.65931864
5,715	5.53106212	4.65931864


#### 5,610 MHz 64 QAM 5 MHz BW 26 dB and 99 % Bandwidth

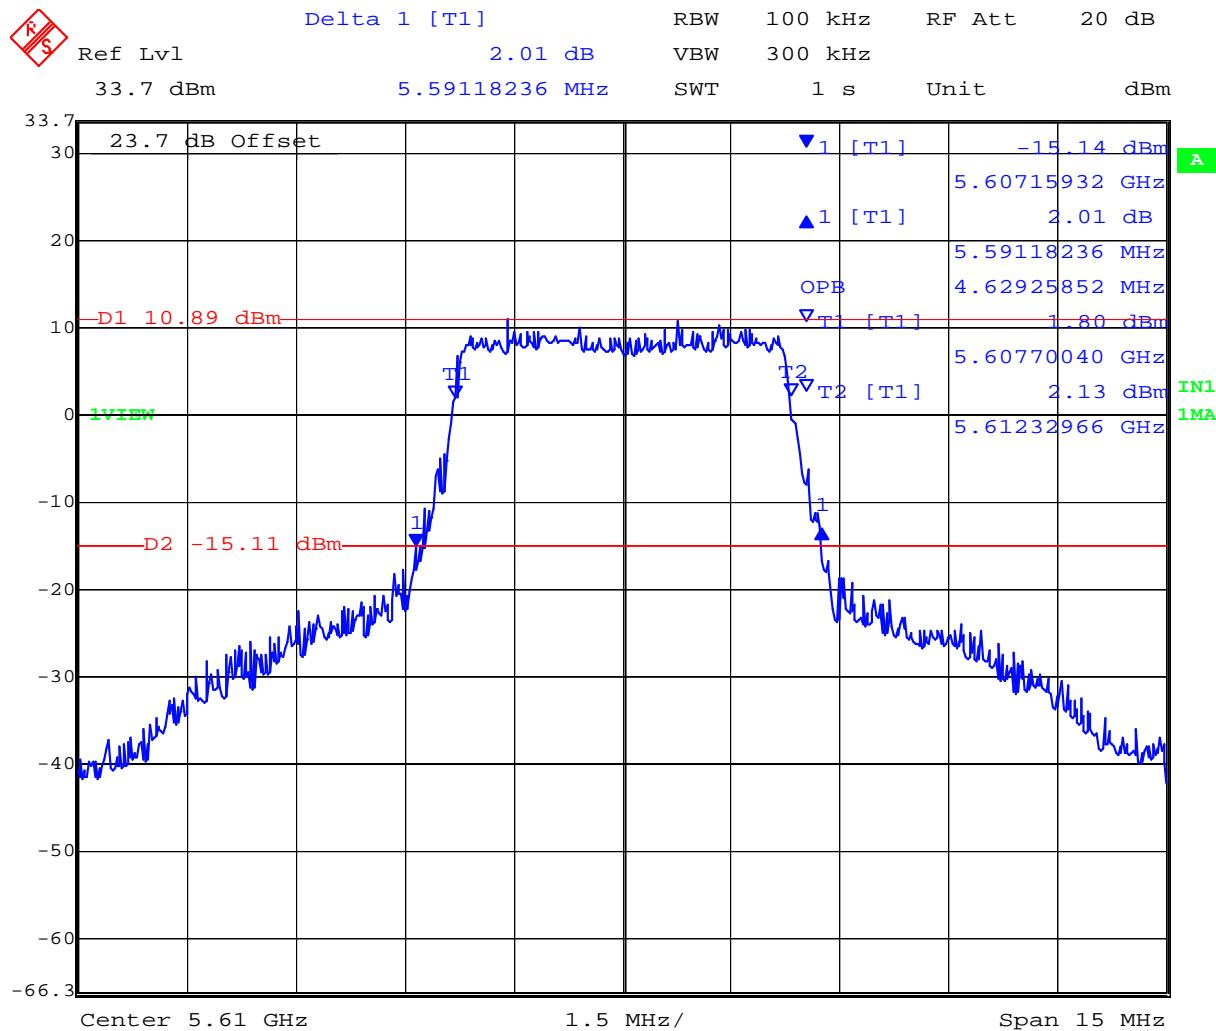

Date: 27.SEP.2007 17:12:13

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


**5,660 MHz 64 QAM 5 MHz BW 26 dB and 99 % Bandwidth**

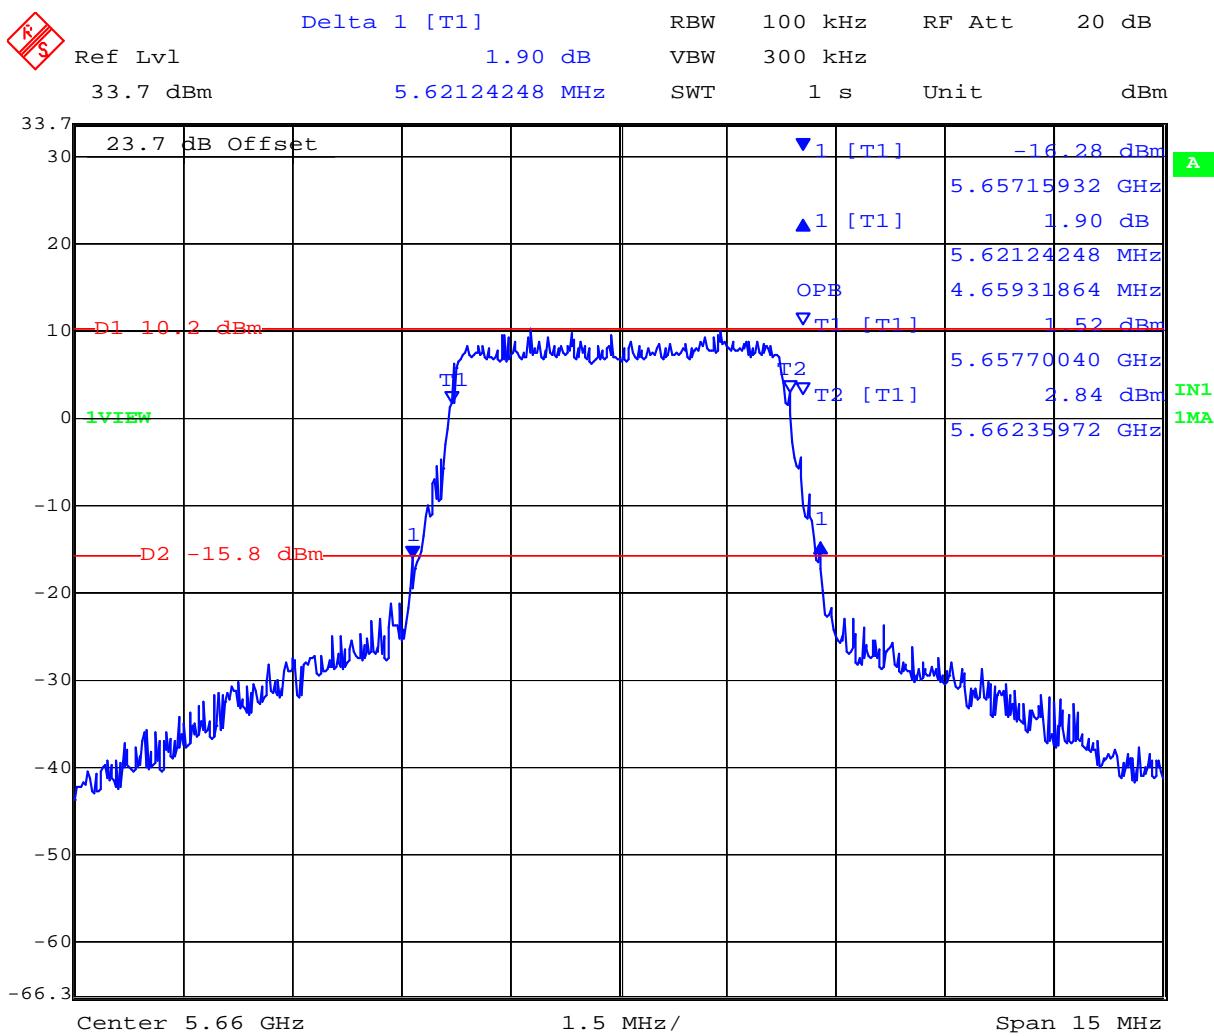

Date: 27.SEP.2007 17:16:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**5,715 MHz 64 QAM 5 MHz BW 26 dB and 99 % Bandwidth**

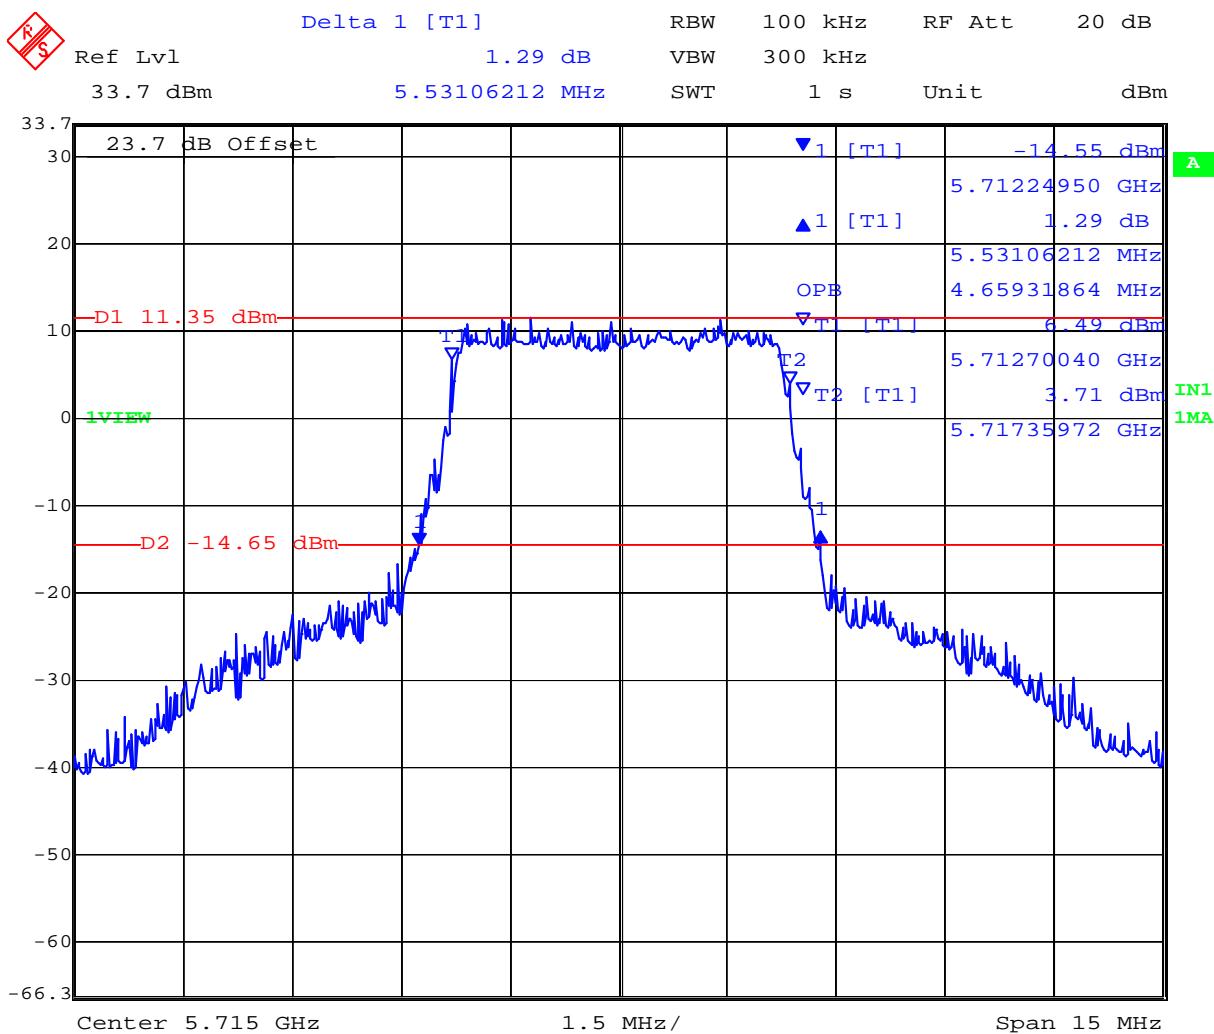


Date: 27.SEP.2007 17:19:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – - 64 QAM 10 MHz BW

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,610	10.58116232	9.01803607
5,660	10.46092184	9.01803607
5,715	10.52104208	9.01803607

5,610 MHz 64 QAM 10 MHz BW 26 dB and 99 % Bandwidth

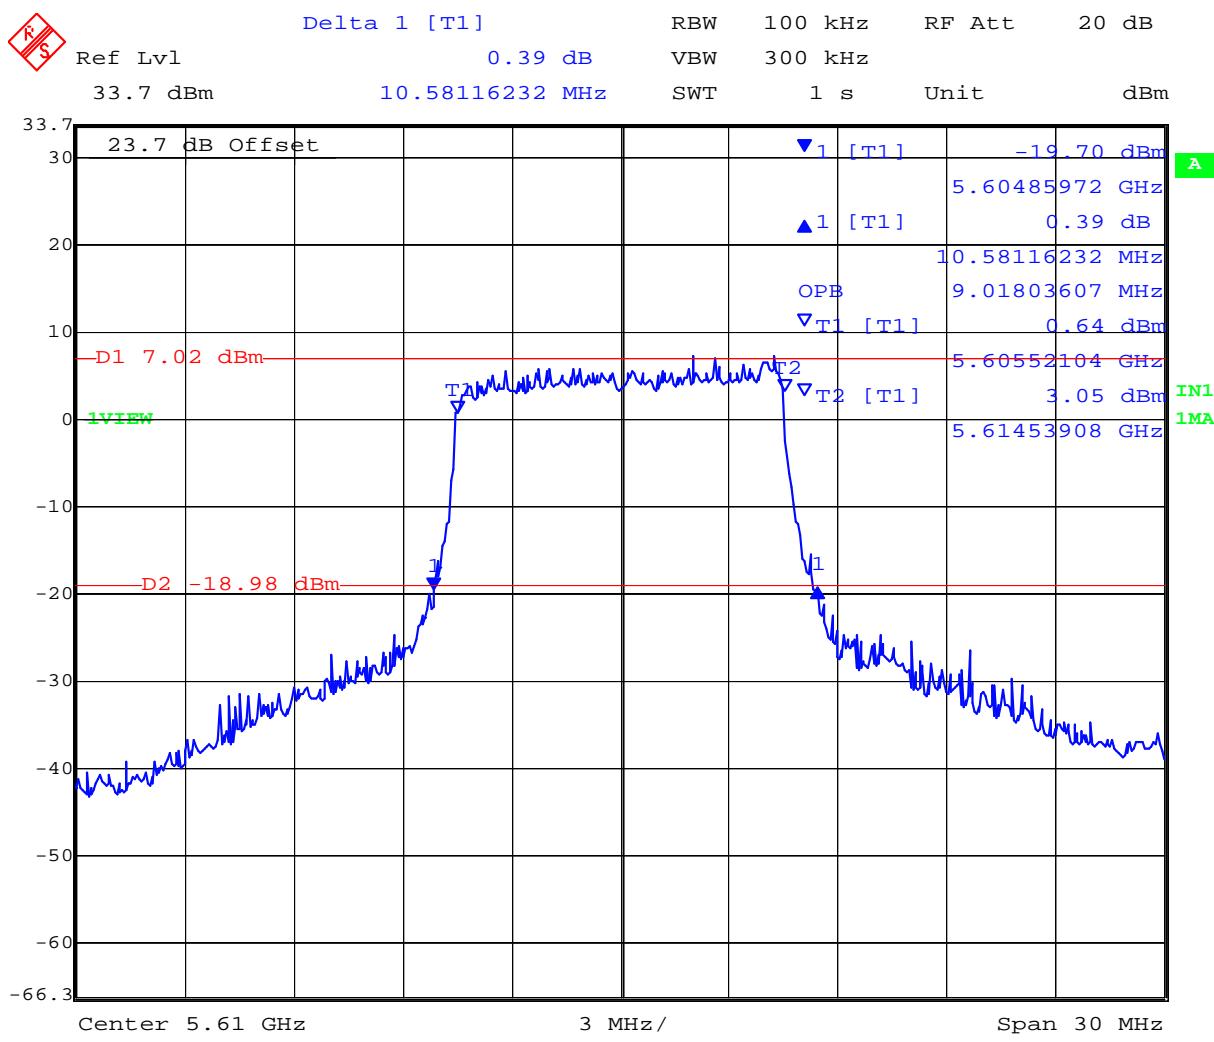


Date: 27.SEP.2007 17:45:04

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 25 of 113

**5,660 MHz 64 QAM 10 MHz BW 26 dB and 99 % Bandwidth**

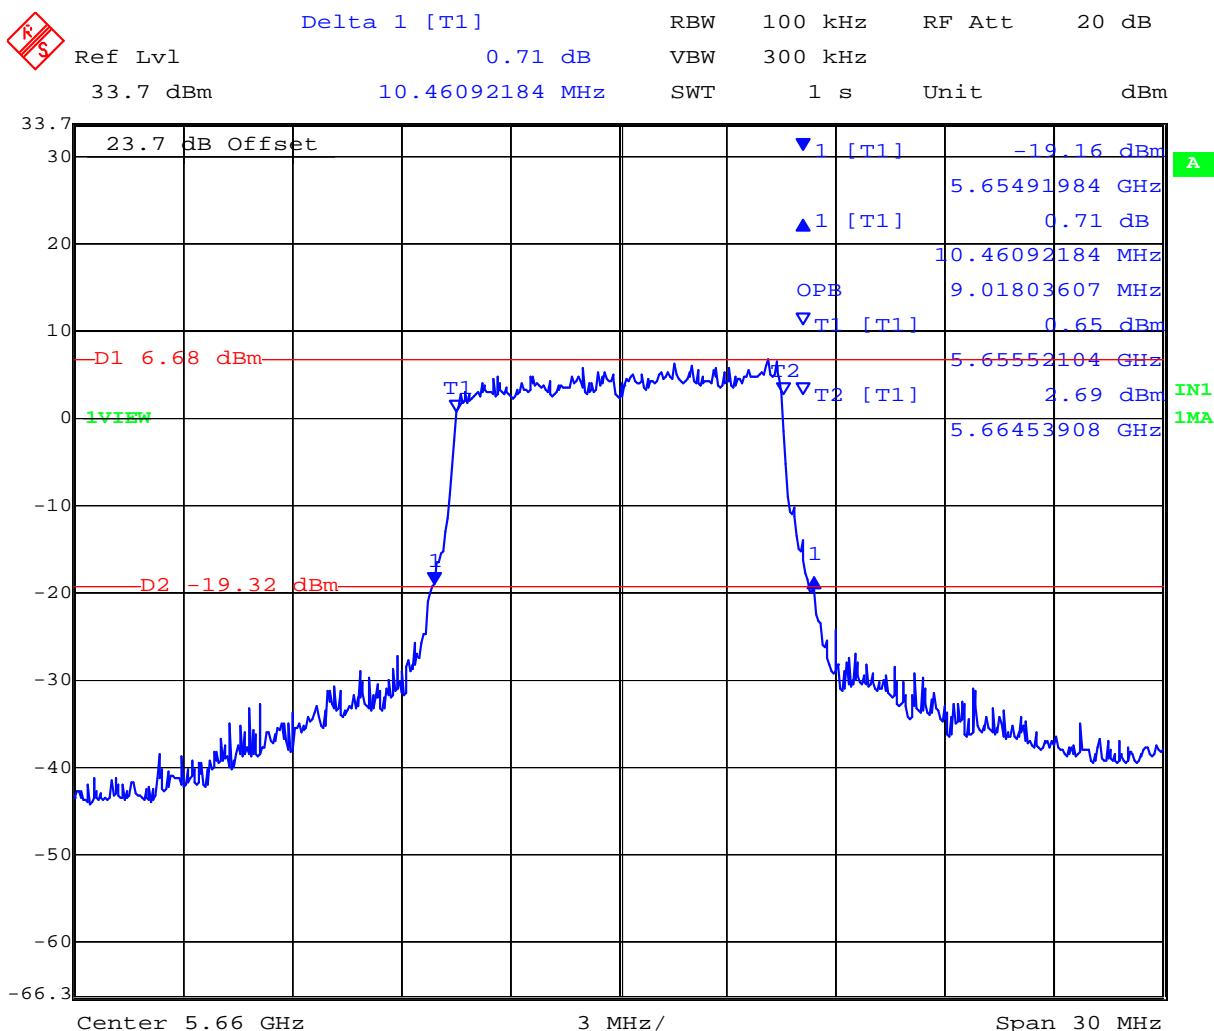


Date: 27.SEP.2007 17:43:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 26 of 113

**5,715 MHz 64 QAM 10 MHz BW 26 dB and 99 % Bandwidth**

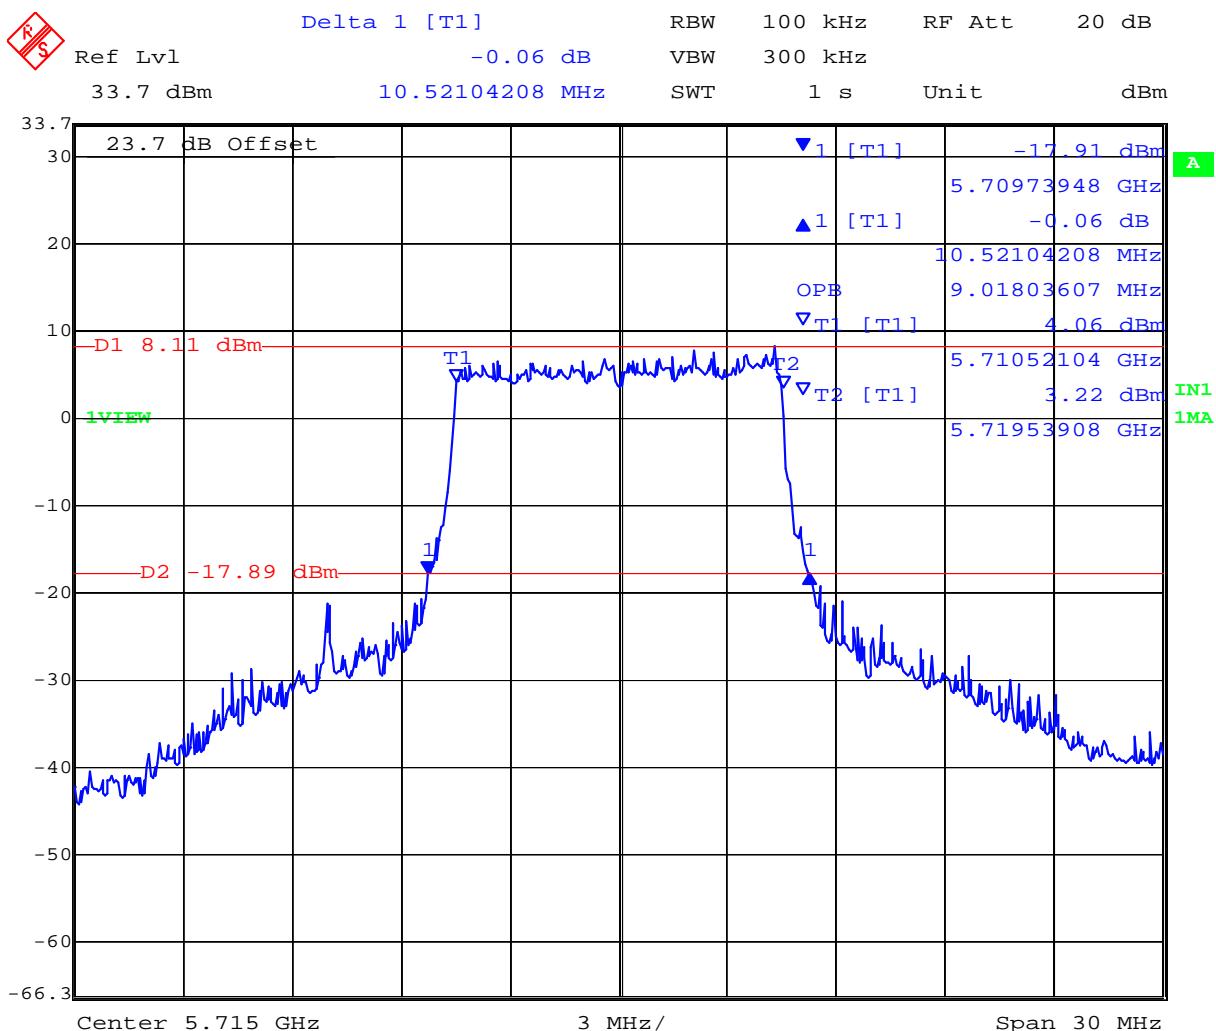


Date: 27.SEP.2007 17:23:40

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – - 64 QAM 5 MHz BW

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,610	16.11222445	13.46693387
5,660	16.03206413	13.46693387
5,715	16.03206413	13.46693387

5,610 MHz 64 QAM 15 MHz BW 26 dB and 99 % Bandwidth

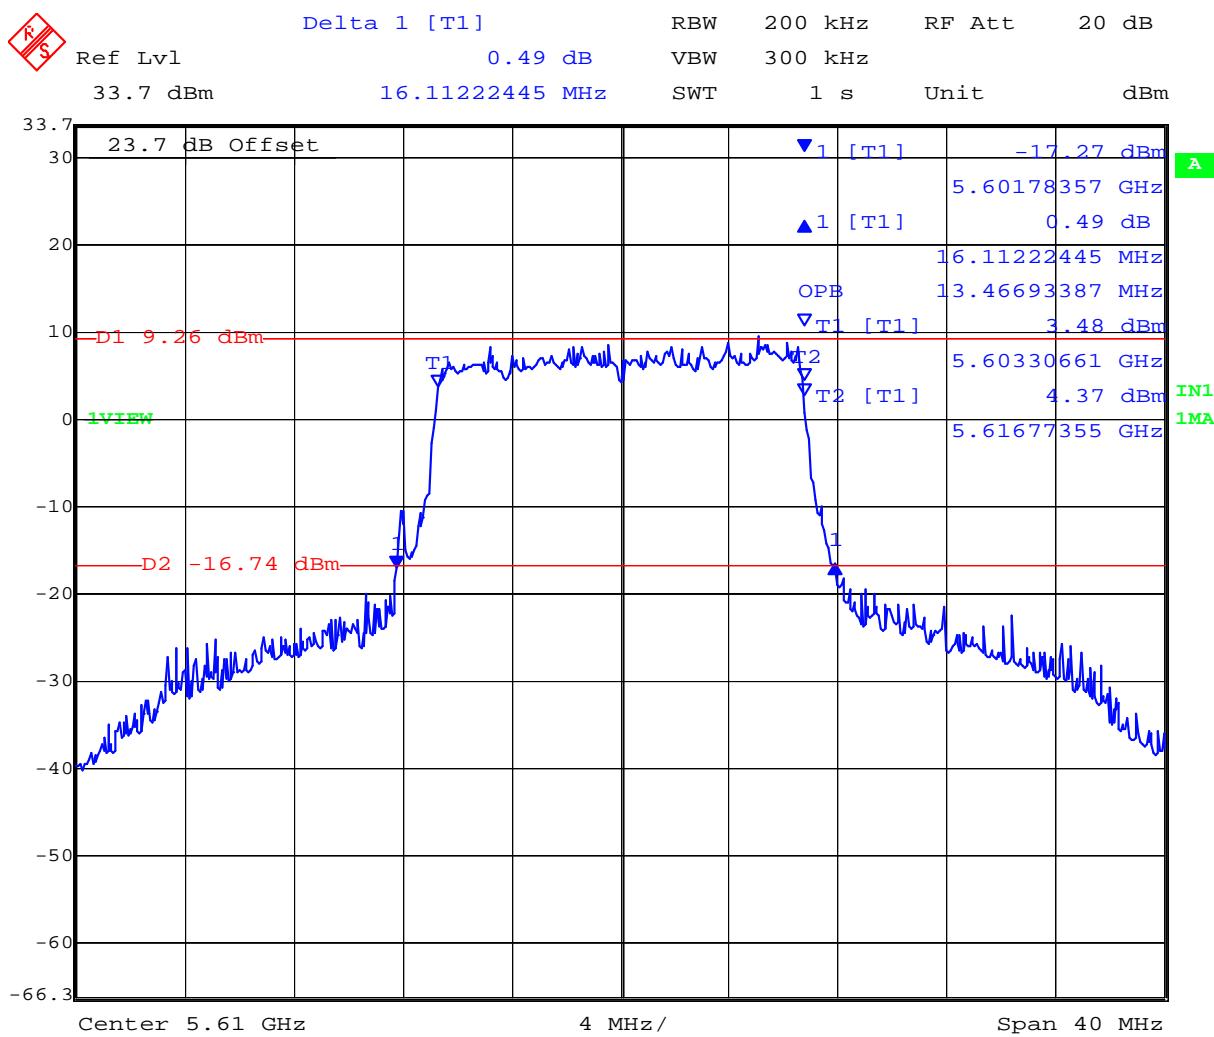


Date: 27.SEP.2007 17:50:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 28 of 113

### 5,660 MHz 64 QAM 15 MHz BW 26 dB and 99 % Bandwidth

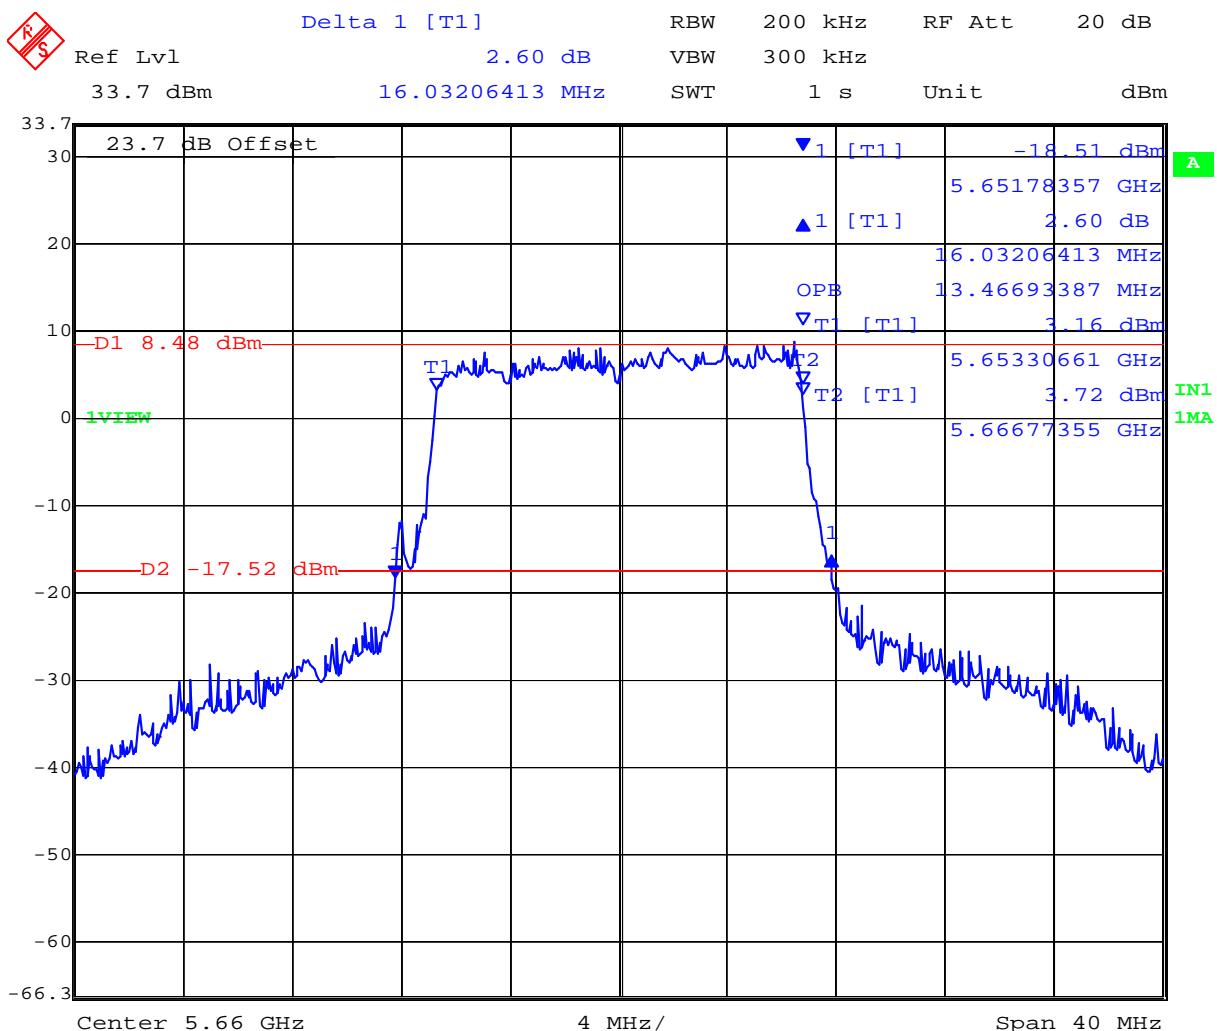

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**5,715 MHz 64 QAM 15 MHz BW 26 dB and 99 % Bandwidth**

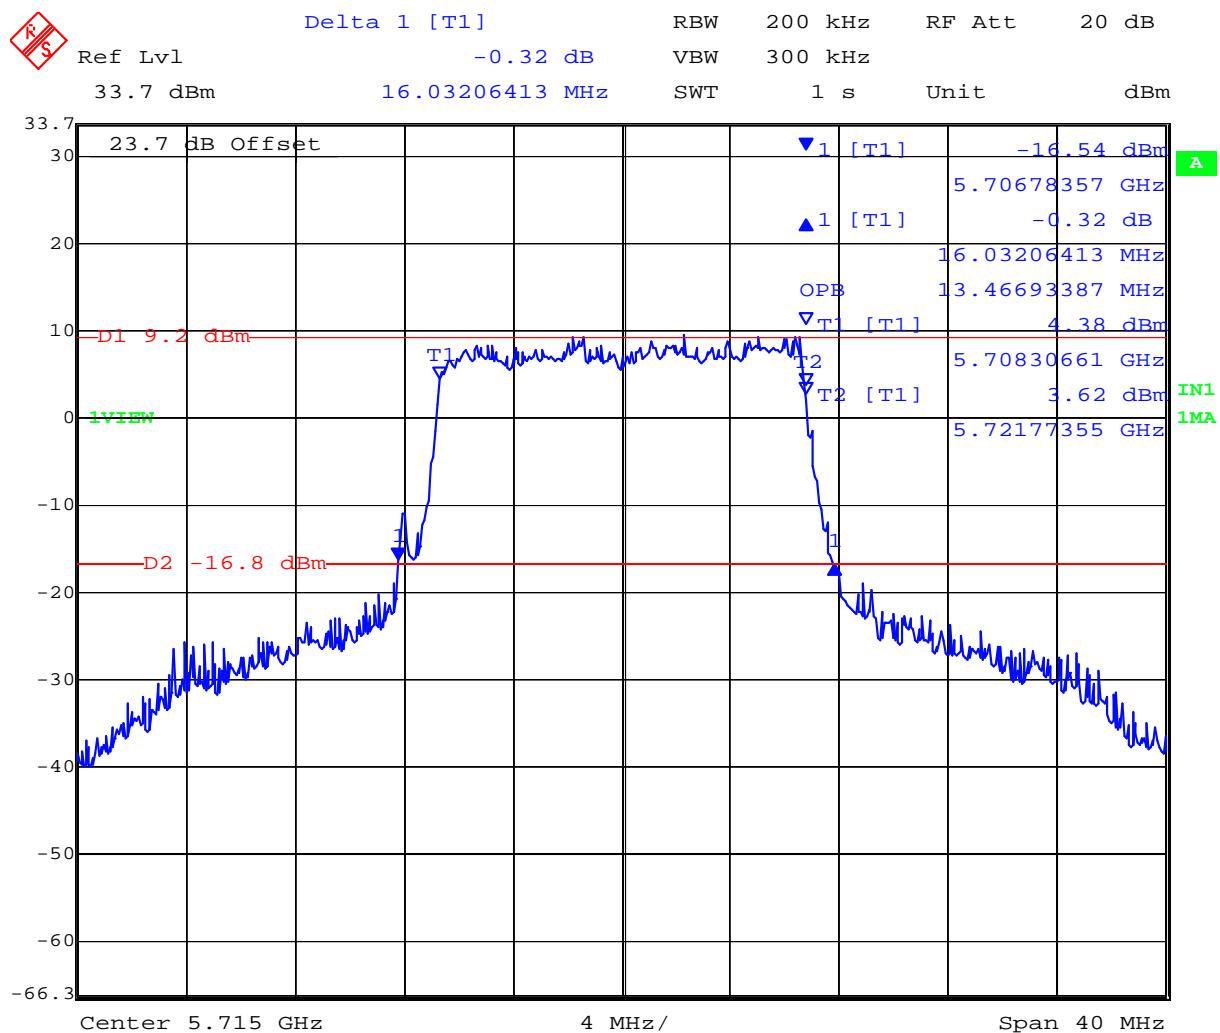

Date: 27.SEP.2007 17:54:44

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 30 of 113

## Specification

### Limits

#### FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

**(a)(1)** For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(2)** For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

#### Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

### Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.2. Transmit Output Power

**FCC, Part 15 Subpart C §15.407(a)**  
**Industry Canada RSS-210 §9.9(2)**  
**Industry Canada RSS-Gen 4.6**

#### Test Procedure

The transmitter terminal of EUT was connected to the input of the average power meter and the spectrum analyzer. Method #2 as outlined in the FCC's Public Notice (DA 02-2138, August 30, 2002 was used to make all measurements. The results reported include all offsets due to attenuators, cable losses etc.

#### Test Measurement Set up

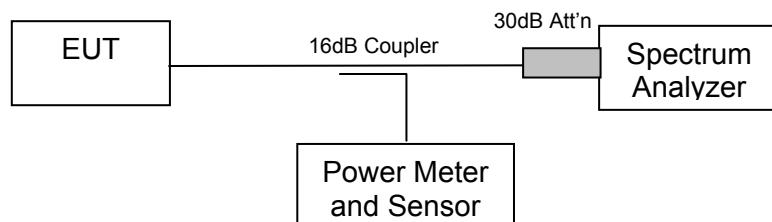

Measurement set up for Transmitter Output Power

#### Maximum Transmit Power, FCC Limits

Limit 5470 – 5725 MHz band; Lesser of 250 mW (+24dBm) or  $11 + 10 \log (B)$  dBm

BW (MHz)	Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	$11 + 10 \log (B)$	Limit (dBm)
5	5470 - 5725	5.63	+18.51	+18.51
10	5470 – 5725	10.59	+21.25	+21.25
15	5470 - 5725	16.12	+23.08	+23.08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 32 of 113

---

## Industry Canada Limits

### Maximum Transmit Power, Industry Canada Limits

Limit 5470 – 5725; Lesser of 250 mW (+24dBm) or 11 + 10 Log (B) dBm

<b>BW (MHz)</b>	<b>Frequency Range (MHz)</b>	<b>Maximum 99% Bandwidth (MHz)</b>	<b>11 + 10 Log (B)</b>	<b>Limit (dBm)</b>
5	5470 - 5725	4.66	+17.69	+17.69
10	5470 – 5725	9.02	+20.56	+20.56
15	5470 - 5725	13.47	+22.30	+22.30

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 33 of 113

### Measurement Results for Transmit Output Power

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

#### TABLE OF RESULTS – - 64 QAM 5 MHZ BW

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,610	+15.84
5,660	+15.18
5,715	+16.40

#### TABLE OF RESULTS – - 64 QAM 10 MHZ BW

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,610	+15.45
5,660	+14.77
5,715	+16.06

#### TABLE OF RESULTS – - 64 QAM 15 MHZ BW

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,610	+16.19
5,660	+15.52
5,715	+16.58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 34 of 113

## Specification

### Limits

#### FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

**(a)(1)** For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $+4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(2)** For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $+11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

#### Industry Canada RSS-210 §A9.2(2)

For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

#### Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

## Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

## Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### **5.1.3. Peak Power Spectral Density**

**FCC, Part 15 Subpart C §15.407(a)**  
**Industry Canada RSS-210 § A9.2(2)**


#### **Test Procedure**

The transmitter output was connected to a spectrum analyzer and the peak power spectral density measured. Method 2 Sample Detection and power averaging, specified in FCC document DA 02-2138 (Normative Reference (x) in Section 2.1 'References and Measurement Uncertainty');

"Measurement Procedure Updated for Peak Transmit Power in the Unlicensed National Information Infrastructure (U-NII) Bands."

was used to determine the peak power spectral density of the emission. The Peak Power Spectral Density is the highest level found across the emission in a 1 MHz resolution bandwidth.

#### **Test Measurement Set up**

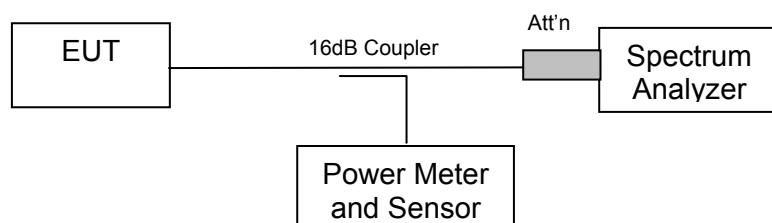

Measurement set up for Peak Power Spectral Density

#### **Measurement Results for Peak Power Spectral Density**

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS - - 64 QAM 5 MHz BW


Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)	Limit (dBm)
5,610	5.61010020	8.31	+11
5,660	5.65949900	8.05	+11
5,715	5.71634269	8.47	+11

5,610 MHz - 64 QAM 5 MHz BW Peak Power Spectral Density

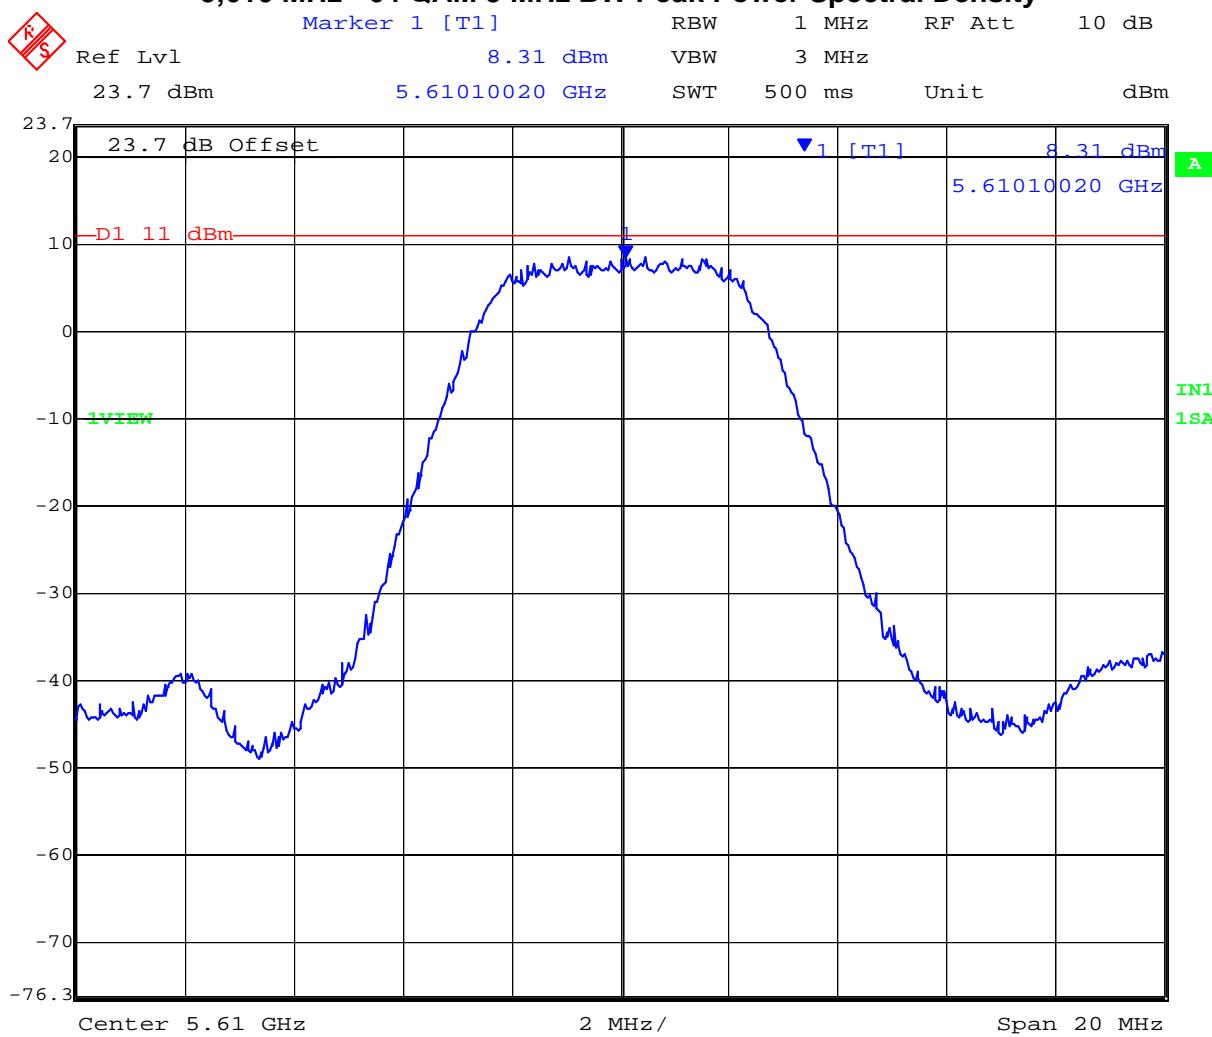

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


**5,660 MHz - 64 QAM 5 MHz BW Peak Power Spectral Density**

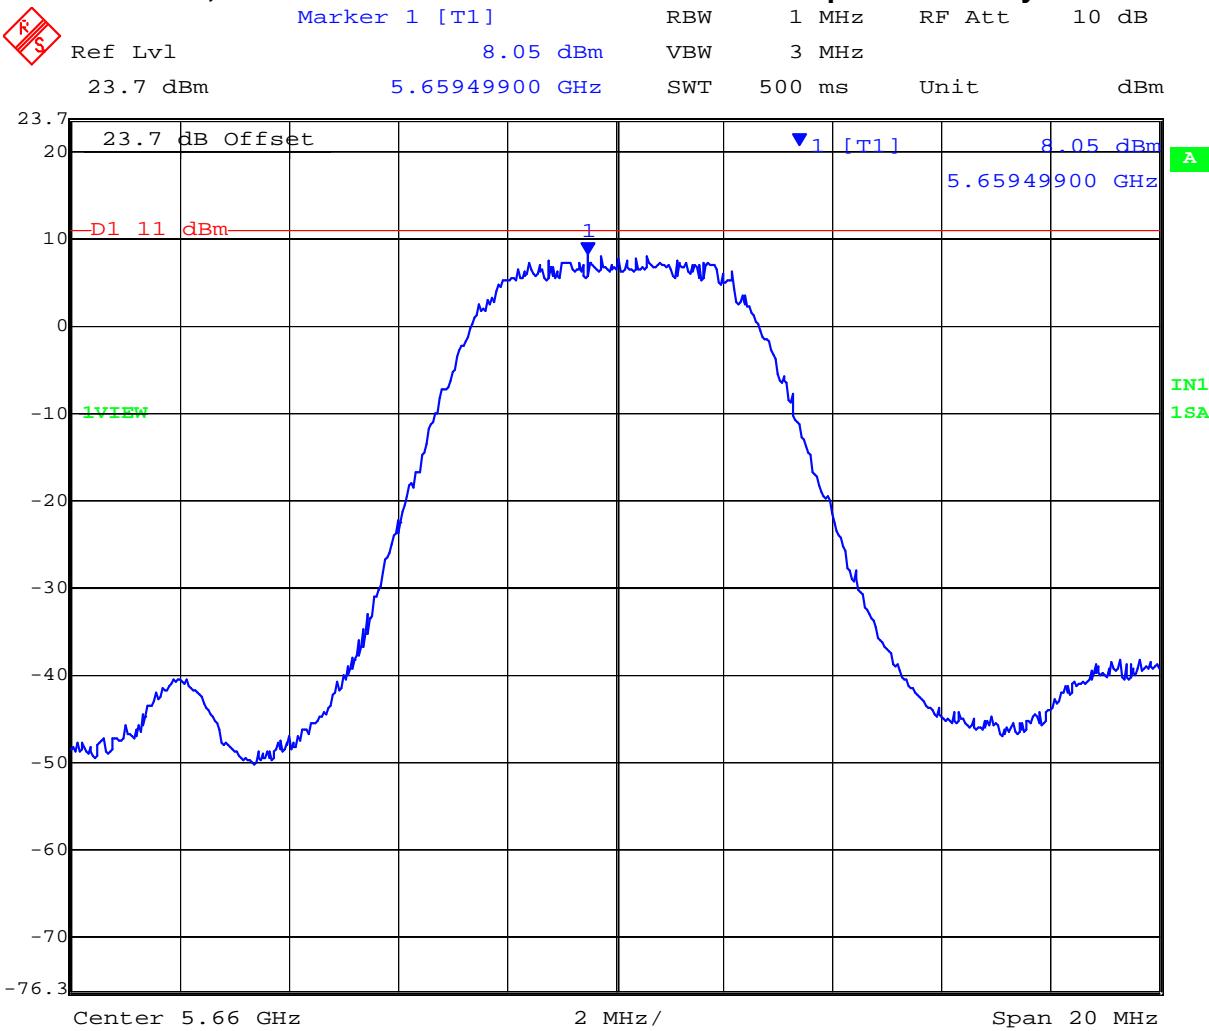

Date: 27.SEP.2007 18:13:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**5,715 MHz - 64 QAM 5 MHz BW Peak Power Spectral Density**

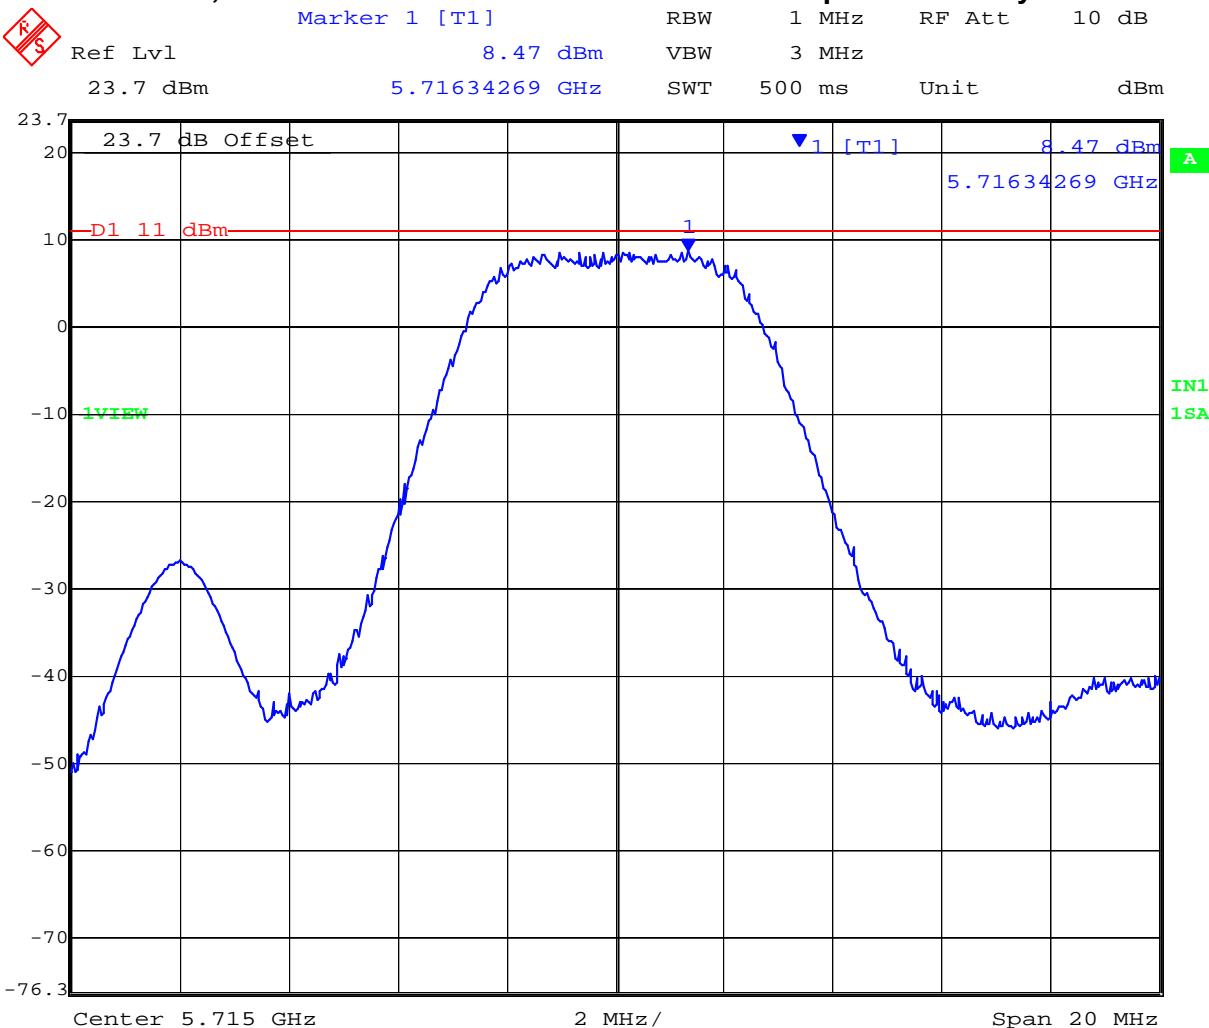


This test report may be reproduced in full only. The document may only be updated by MiCOM  
 Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS - - 64 QAM 10 MHz BW


Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)	Limit (dBm)
5,610	5.61129259	5.59	+11
5,660	5.66201403	4.92	+11
5,715	5.71677355	5.86	+11

5,610 MHz - 64 QAM 10 MHz BW Peak Power Spectral Density

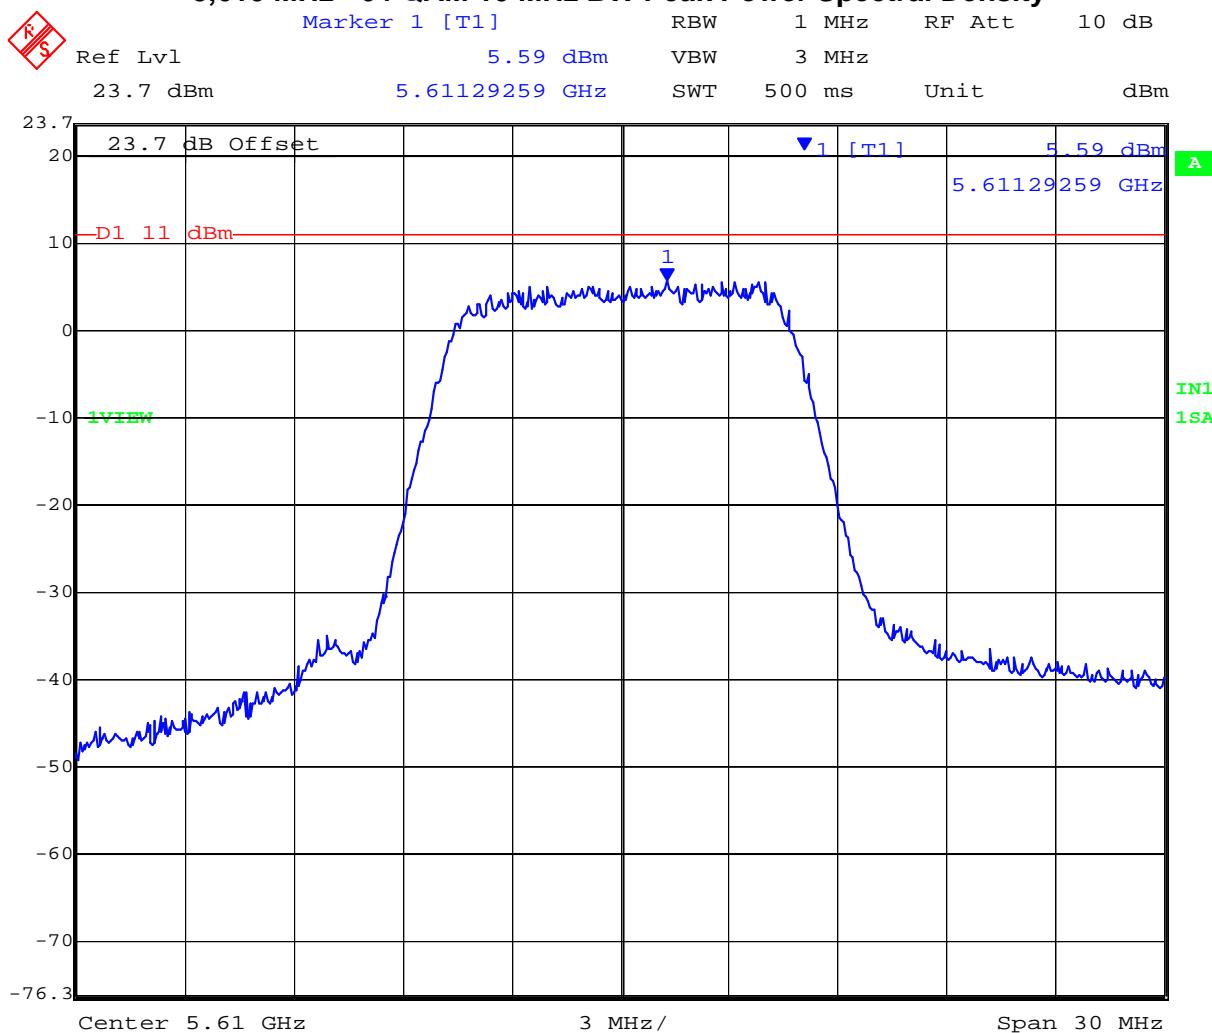

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


**5,660 MHz - 64 QAM 10 MHz BW Peak Power Spectral Density**

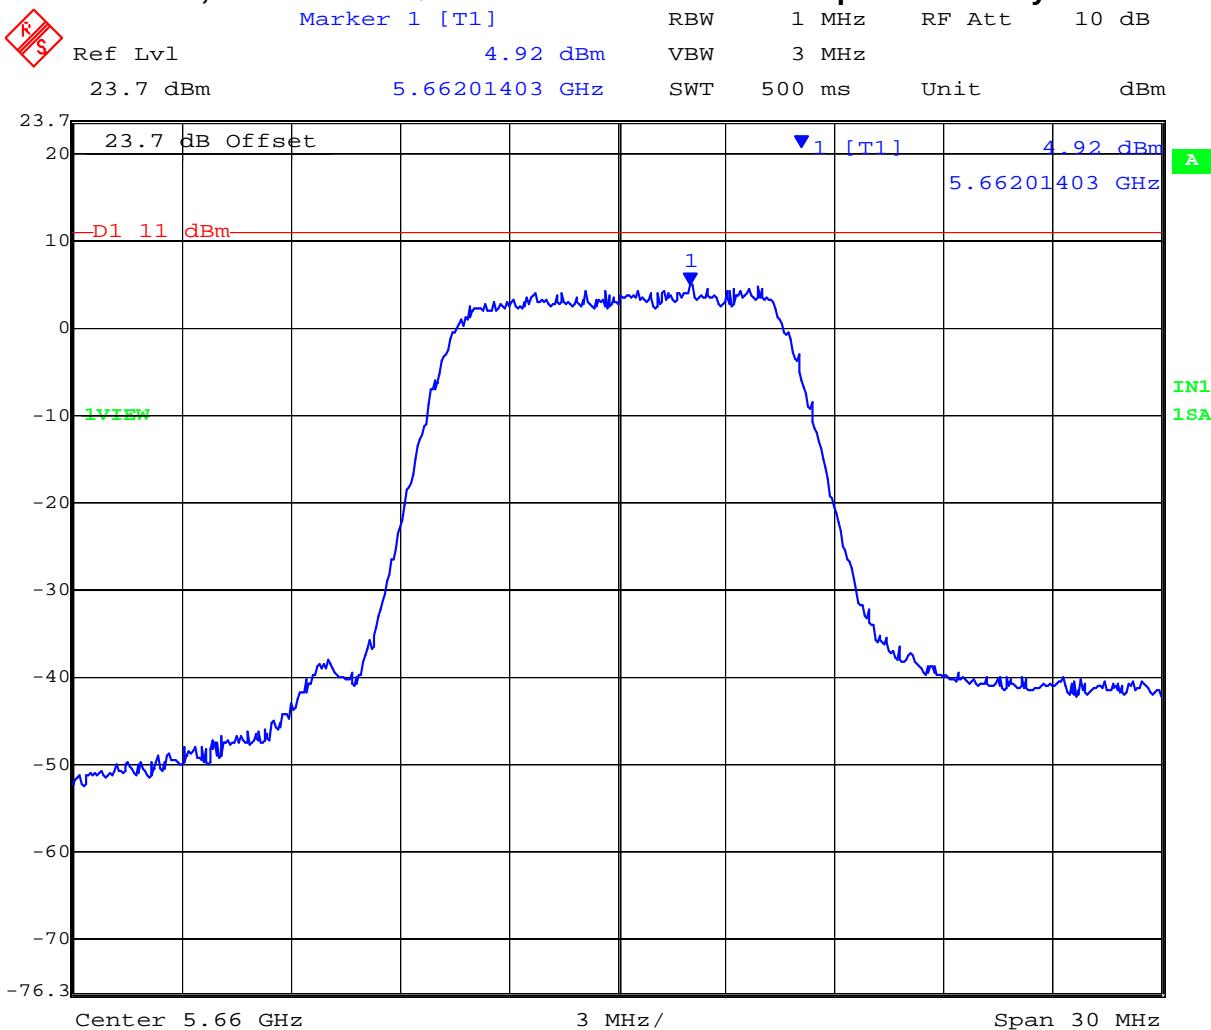

Date: 27.SEP.2007 18:07:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**5,715 MHz - 64 QAM 10 MHz BW Peak Power Spectral Density**

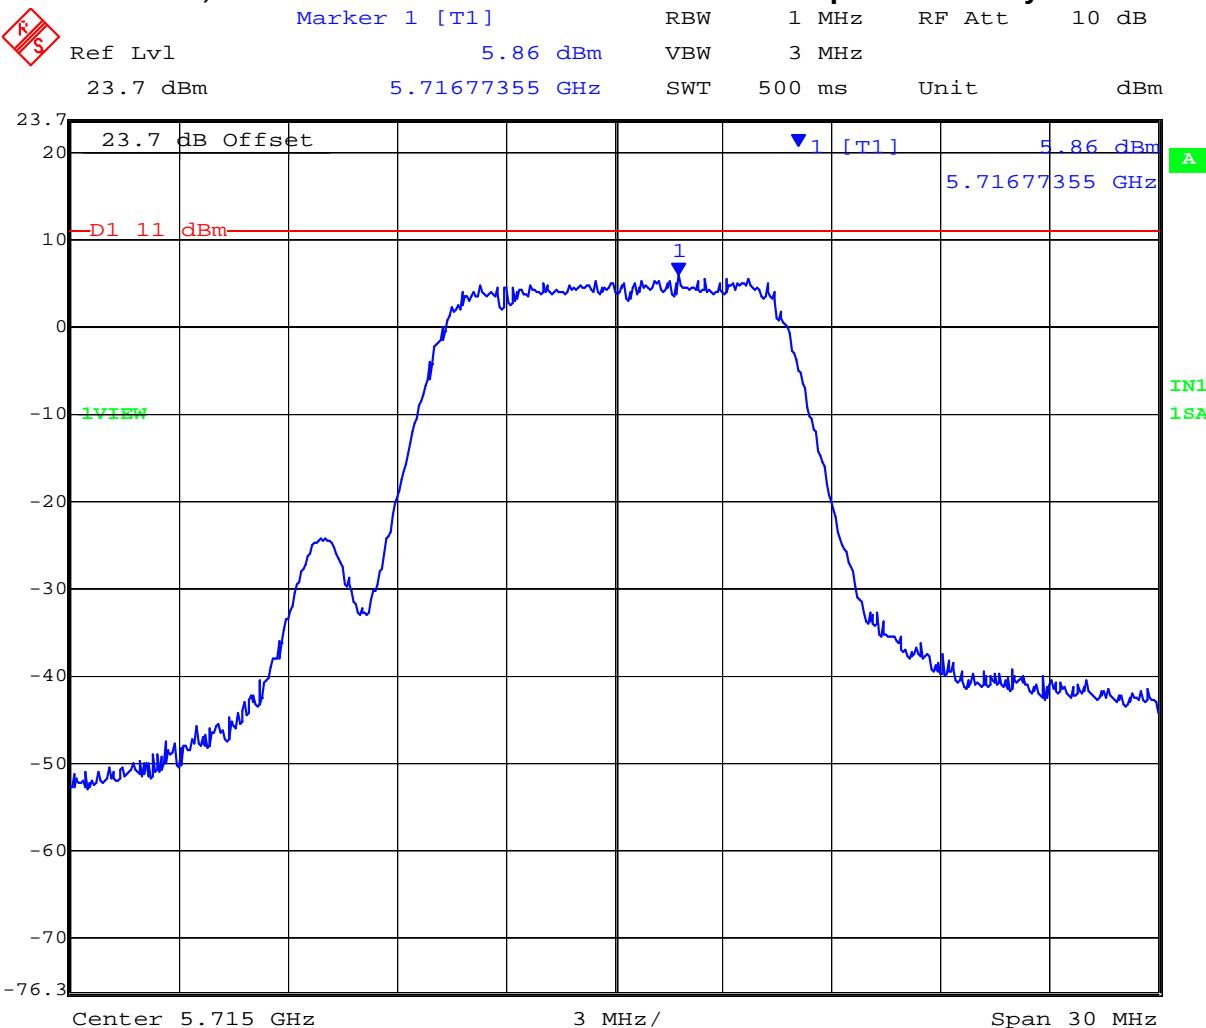


Date: 27.SEP.2007 18:08:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


TABLE OF RESULTS – - 64 QAM 15 MHz BW

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)	Limit (dBm)
5,610	5.61541082	4.64	+11
5,660	5.66484970	4.27	+11
5,715	5.71672345	4.71	+11

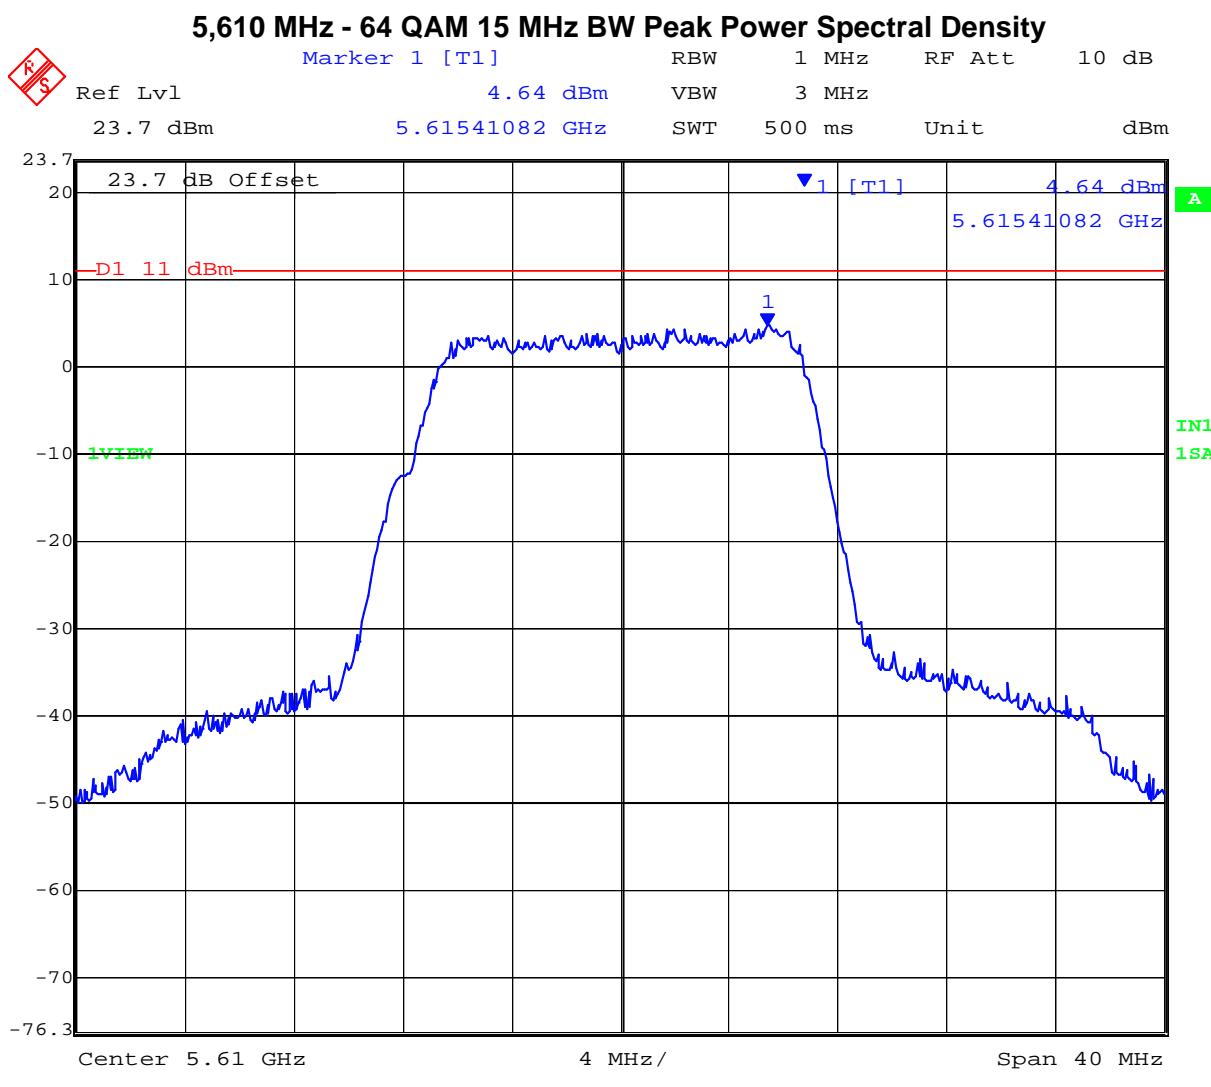

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


**5,660 MHz - 64 QAM 15 MHz BW Peak Power Spectral Density**

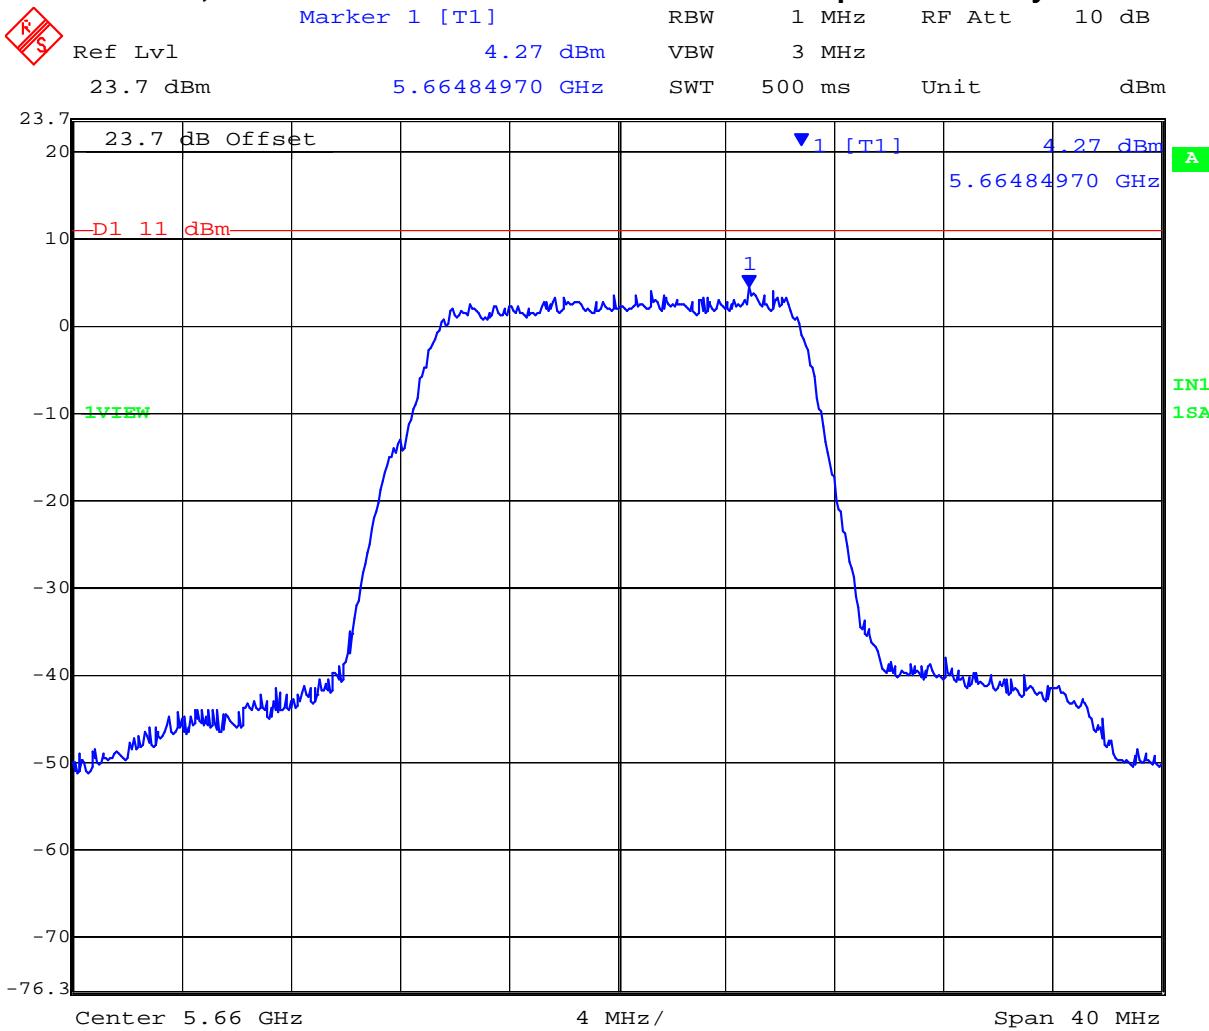

Date: 27.SEP.2007 18:00:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**5,715 MHz - 64 QAM 15 MHz BW Peak Power Spectral Density**

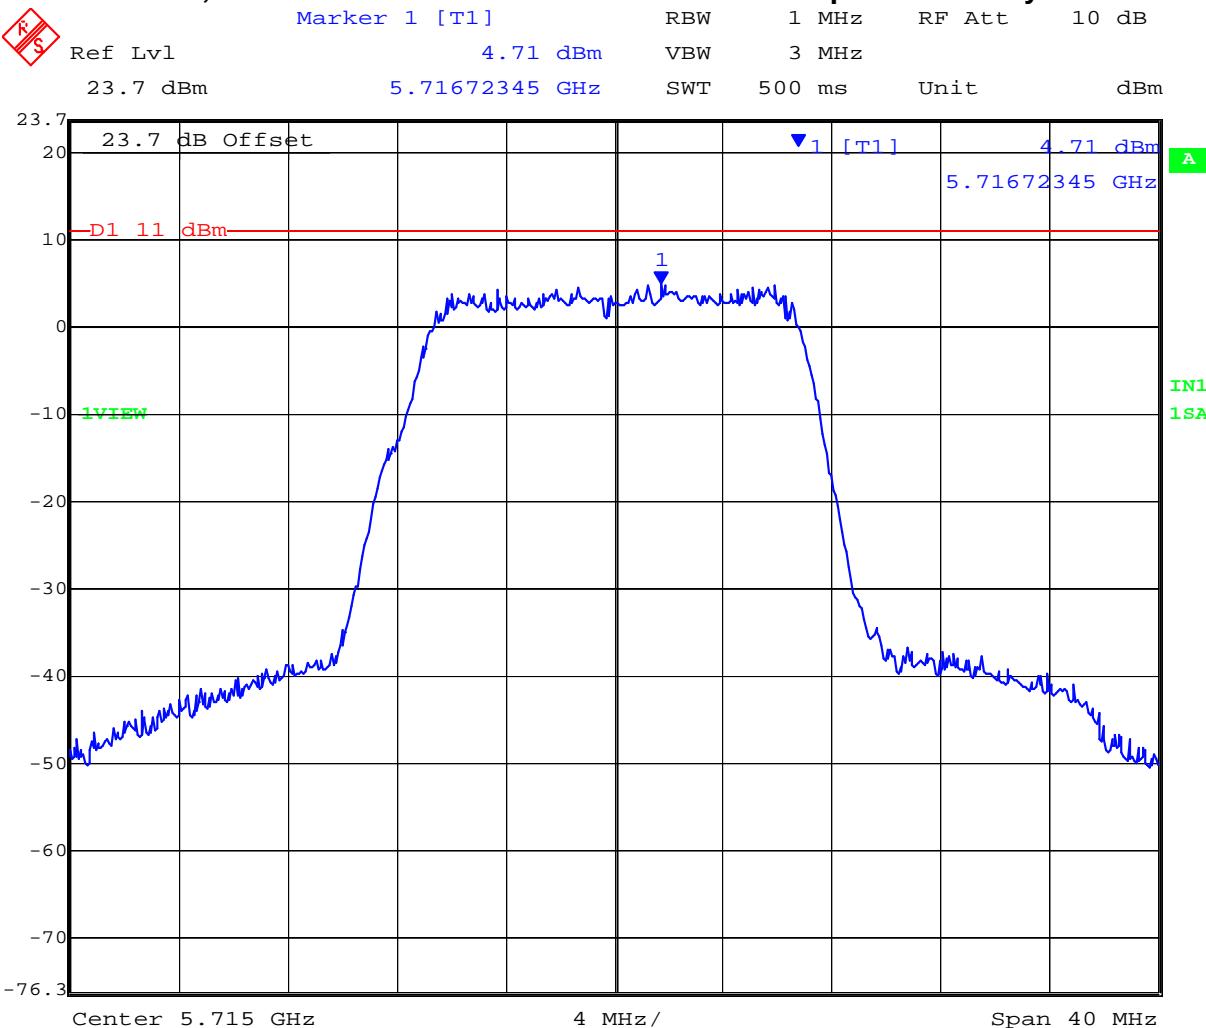

Date: 27.SEP.2007 17:58:24

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 45 of 113

## Specification

### FCC, Part 15 §15.407 (a)(1), (a)(2)

**(a)(1)** The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(2)** The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

### Industry Canada RSS-210 § A9.2(1), A9.2(2)

**§ A9.2(1)** The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

**§ A9.2(2)** The power spectral density shall not exceed +11 dBm in any 1 MHz band

## Laboratory Measurement Uncertainty for Spectral Density

Measurement uncertainty	±1.33 dB
-------------------------	----------

## Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.4. Peak Excursion Ratio

#### FCC, Part 15 Subpart C §15.407(a)(6)

##### Test Procedure

Normative Reference (xi) Section 2.1 Measurement Procedure DA 02-2138 "Measurement Procedure Updated for Peak Transmit Power in the UNII Bands" was implemented to determine the Peak Excursion Ratio. This is a conducted measurement using a spectrum analyzer. The Peak Excursion Ratio is the difference in amplitude (dB) between the two traces.

##### Test Measurement Set up

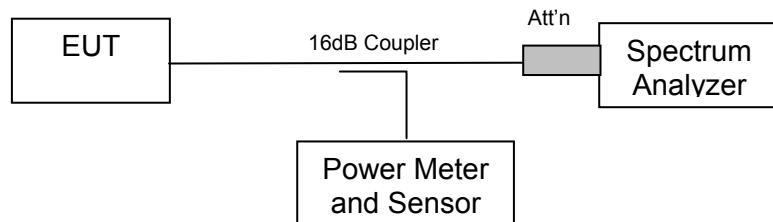

Measurement set up for Peak Excursion Ratio

##### Measurement Results for Peak Excursion Ratio


Ambient conditions.

Temperature: 17 to 23 °C   Relative humidity: 31 to 57%   Pressure: 999 to 1012 mbar

TABLE OF RESULTS - - 64 QAM 15 MHz BW


Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,610	11.87
5,660	12.02
5,715	12.14

5,610 MHz - 64 QAM 15 MHz BW Peak Excursion Ratio

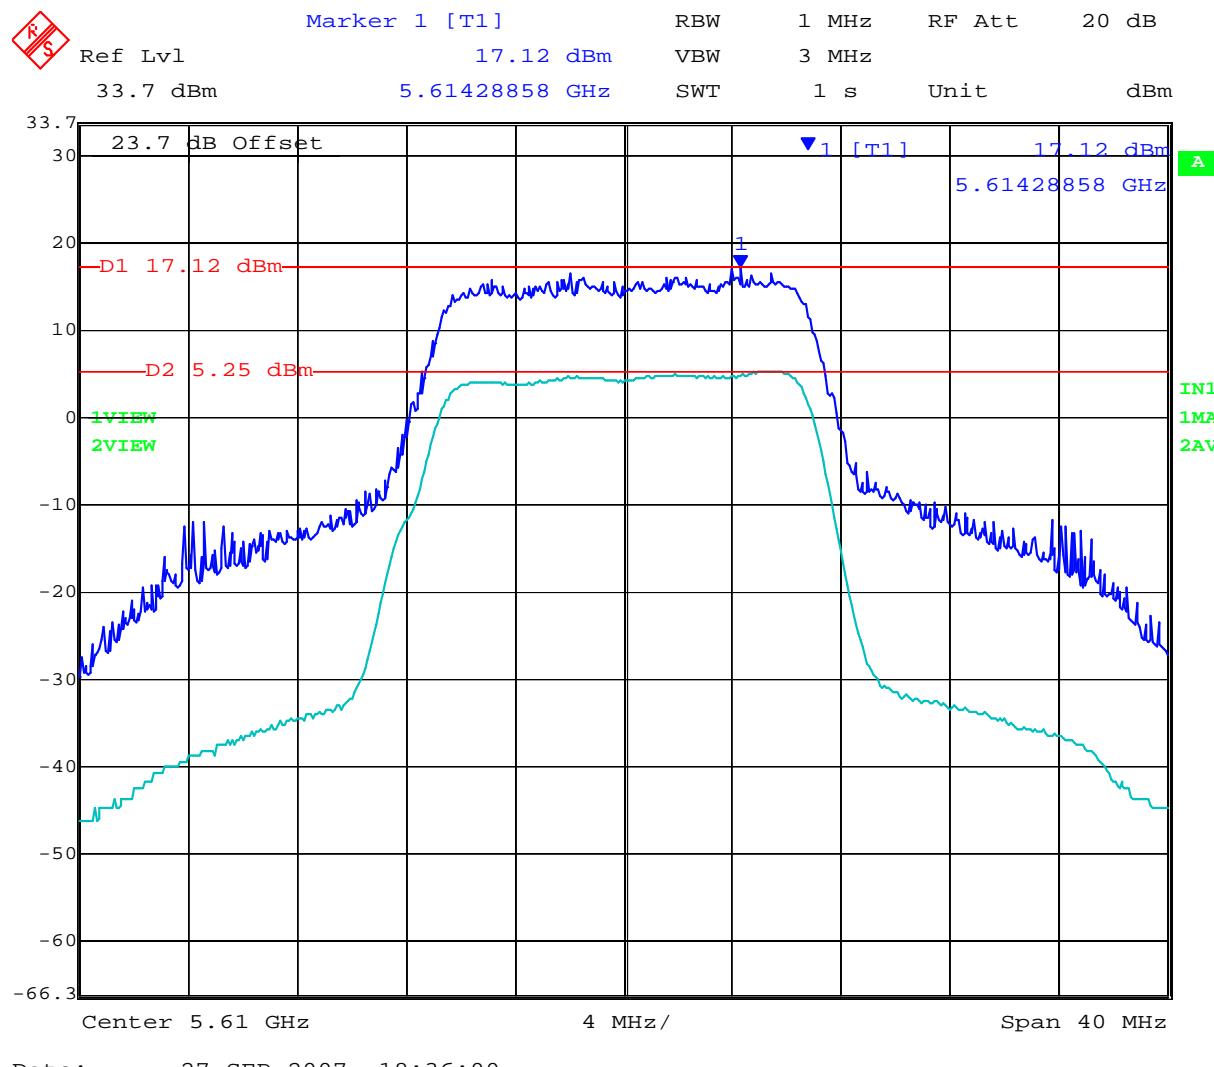

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5,660 MHz - 64 QAM 15 MHz BW Peak Excursion Ratio

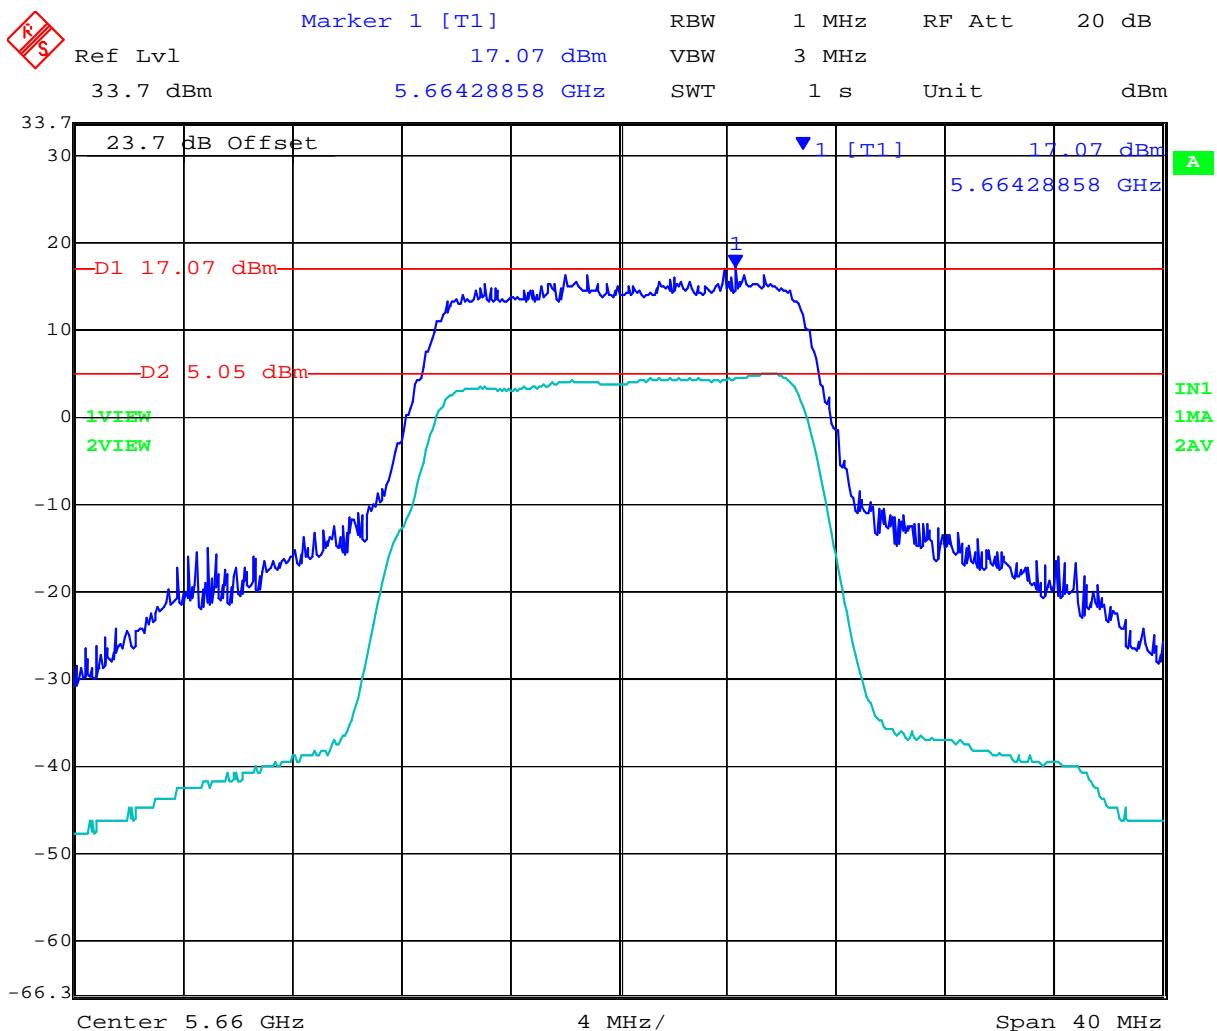

Date: 27.SEP.2007 18:39:09

This test report may be reproduced in full only. The document may only be updated by MiCOM  
 Labs personnel. Any changes will be noted in the Document History section of the report.

### 5,715 MHz - 64 QAM 15 MHz BW Peak Excursion Ratio

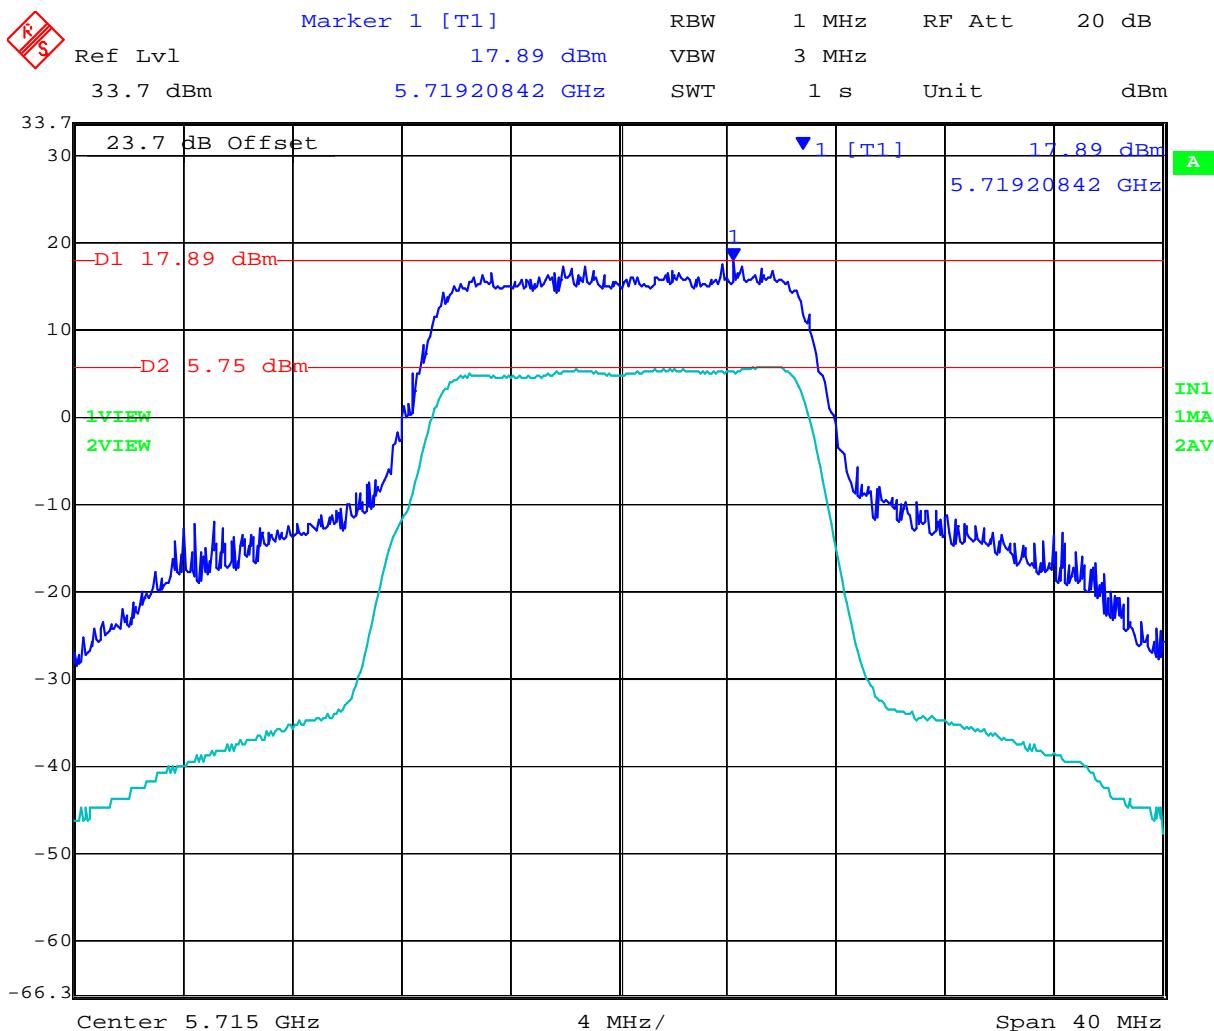

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 50 of 113

## Specification

### Limits

**§15.407 (a)(6)** The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

### Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	± 2.81dB
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### **5.1.5. Frequency Stability**

**FCC, Part 15 Subpart C §15.407(g)  
Industry Canada RSS-210 §2.1**

#### **Test Procedure**

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

#### **Manufacturer Declaration**

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have  $\pm 20$ ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

$\pm 20$ ppm at 5.250 GHz translates to a maximum frequency shift of  $\pm 105$  KHz. As the edge of the channels is at least one MHz from either of the band edges,  $\pm 105$  KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

#### **Specification**

#### **Limits**

**§15.407 (g)** Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 52 of 113

### **5.1.6. Maximum Permissible Exposure**

**FCC, Part 15 Subpart C §15.407(f)**

**Industry Canada RSS-Gen §5.5**

#### **Calculations for Maximum Permissible Exposure Levels**

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10 ^ {(G \text{ (dBi)})/10}$$

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm<sup>2</sup>

Freq. Band (GHz)	Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm <sup>2</sup> Limit(cm)	Minimum Separation Distance (cm)
5.6	16.0	39.81	+16.58	45.50	12.0	20.0

**Note:** for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

#### **Specification**

#### **Maximum Permissible Exposure Limits**

**FCC §1.1310** Limit = 1mW / cm<sup>2</sup> from 1.310 Table 1

**RSS-Gen §5.5** Before equipment certification is granted, the application requirements of RSS-102 shall be met.

#### **Laboratory Measurement Uncertainty for Power Measurements**

Measurement uncertainty	±1.33 dB
-------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.7. Radiated Emissions

#### 5.1.7.1. Transmitter Radiated Spurious Emissions (above 1 GHz)


**FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)**  
**Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7**

#### Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

#### Test Measurement Set up

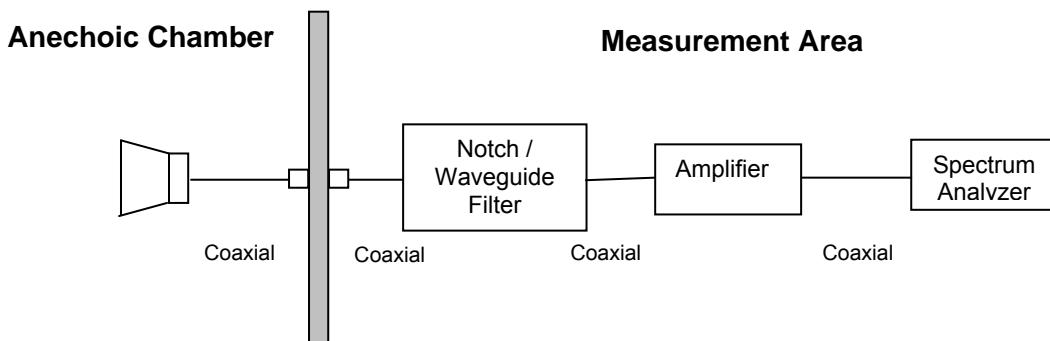

Measurement set up for Radiated Emission Test

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 54 of 113

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (}\mu\text{V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength;

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m, where P is the EIRP in Watts}$$

$$\text{Therefore: } -27 \text{ dBm/MHz} = 68.23 \text{ dBuV/m}$$

**Note:** The data in this Section along with the data in sections 5.1.7 (Conducted Spurious Emissions) and Section 5.1.8.2 (Radiated Band Edge - Restricted Bands) identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit for out of band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

Ambient conditions.

Temperature: 17 to 23°C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

#### TABLE OF RESULTS – 5,610 MHz 64 QAM 5 MHz BW


##### Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
5242.054	H	63.52	-4.38	59.14	74	-14.86
9115.000	H	47.15	+5.72	52.86	74	-21.14
11915.000	V	48.53	+6.04	54.57	74	-19.43
12696.600	H	48.80	+6.07	54.87	74	-19.13

##### Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
5242.054	H	61.20	-4.38	53.51	54	-0.49
9115.000	H	34.00	+5.72	39.72	54	-14.28
11915.000	V	35.21	+6.04	41.25	54	-12.75
12696.600	H	35.78	+6.07	41.85	54	-12.15

#### Radiated Emissions for 5,610 MHz 64 QAM 5 MHz BW

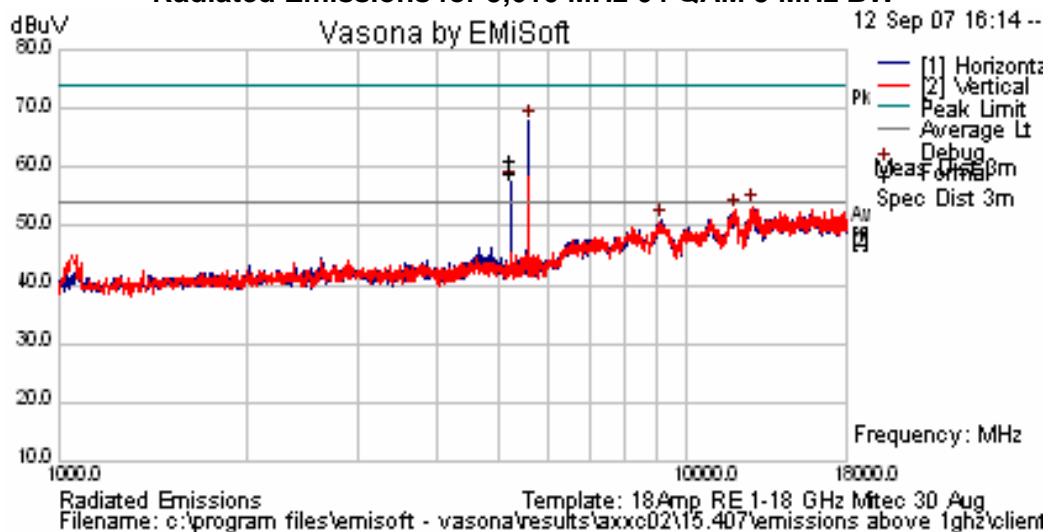

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 5,660 MHz 64 QAM 5 MHz BW


##### Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
5292.167	H	62.57	-4.38	58.19	74	-15.81

##### Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
5292.167	H	61.10	-4.38	53.21	54	-0.79

#### Radiated Emissions for 5,660 MHz 64 QAM 5 MHz BW

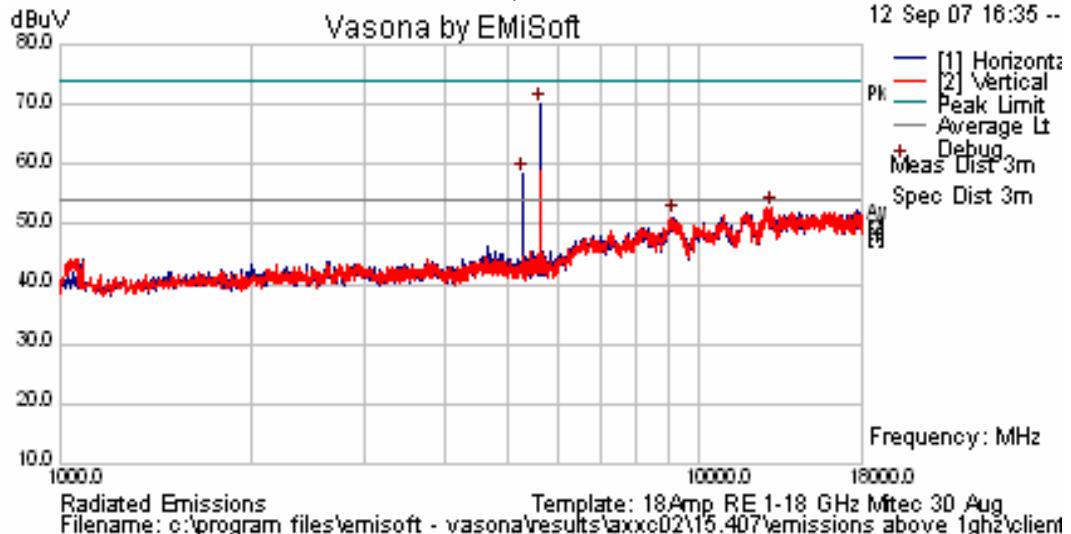

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Spurious Emissions above 1 GHz


#### TABLE OF RESULTS – 5,715 MHz 64 QAM 5 MHz BW

##### Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
5349.000	H	59.50	-4.00	55.50	74	-18.50
5881.167	H	56.17	-3.32	52.85	74	-21.15

##### Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
5349.000	H	54.87	-4.00	50.87	54	-3.13
5881.167	H	52.57	-3.32	49.25	54	-4.75

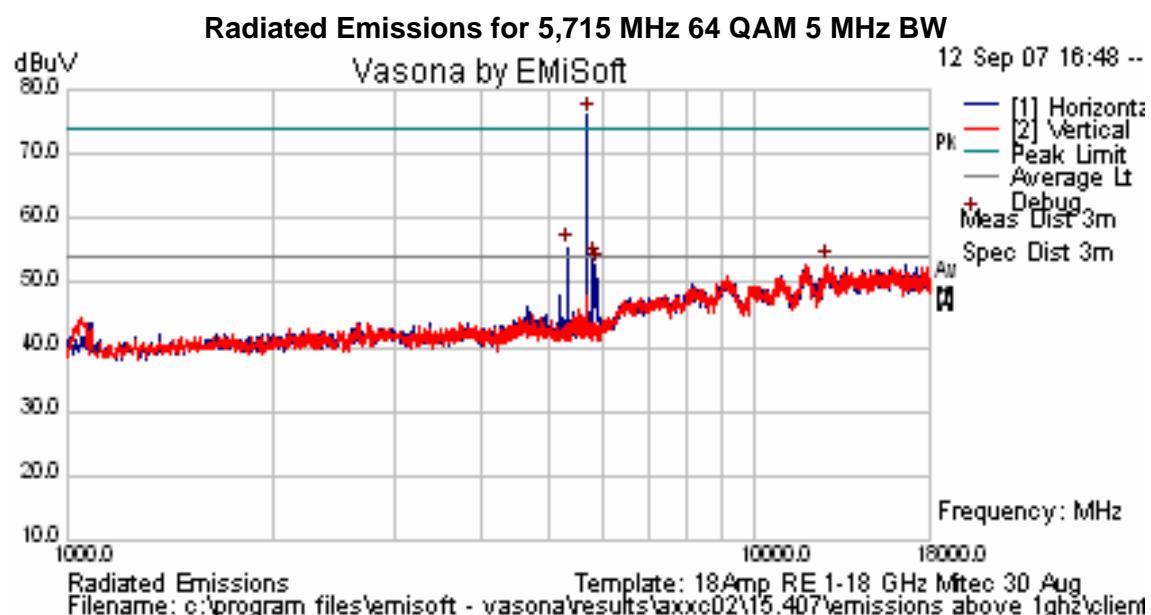

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 58 of 113

## Radiated Spurious Emissions above 1 GHz


## TABLE OF RESULTS – 5,610 MHz 64 QAM 10 MHz BW

## Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
5240.500	H	61.84	-4.38	57.46	74	16.54

## Average

Average						
Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
5240.500	H	59.52	-4.38	53.15	54	-0.85

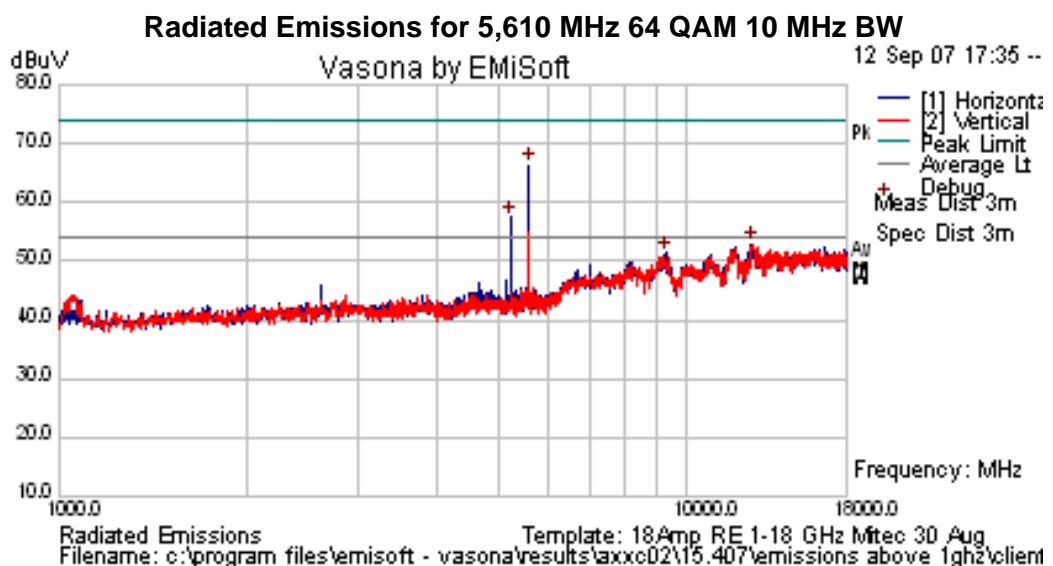

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Spurious Emissions above 1 GHz


#### TABLE OF RESULTS – 5,660 MHz 64 QAM 10 MHz BW

##### Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
2440.833	V	60.67	-7.06	53.61	74	-20.39
5292.167	H	62.13	-4.38	57.75	74	-16.25

##### Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
2440.833	V	57.78	-7.06	50.72	54	-3.28
5292.167	H	60.03	-4.38	52.90	54	-1.10

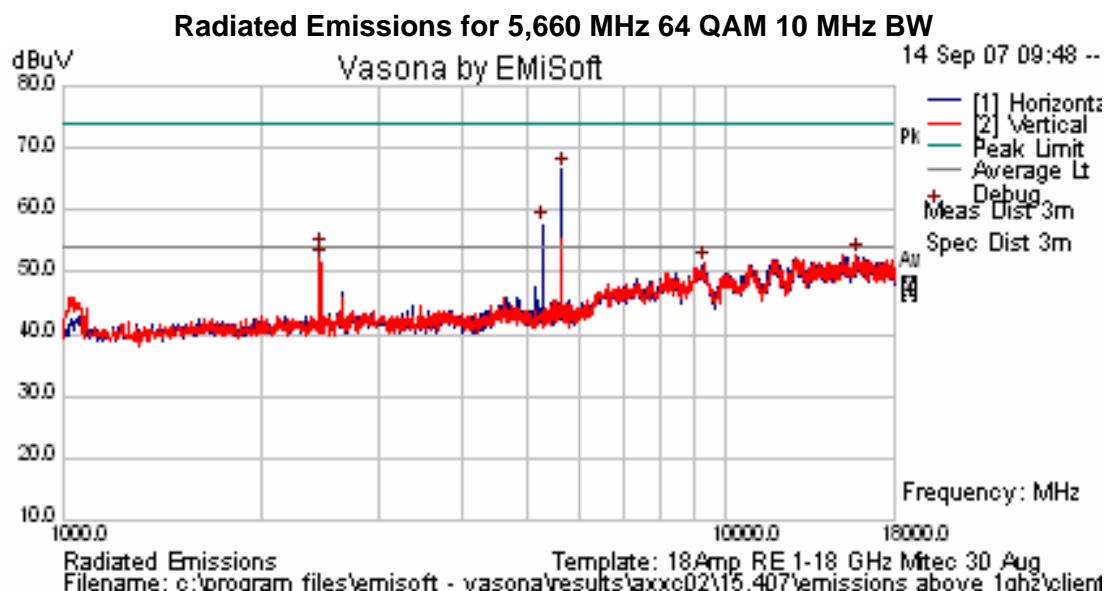

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Spurious Emissions above 1 GHz


#### TABLE OF RESULTS – 5,715 MHz 64 QAM 10 MHz BW

##### Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
2418.667	H	63.84	-7.04	56.80	74	-17.20
5349.000	H	58.34	-4.00	54.34	74	-19.66

##### Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
2418.667	H	60.31	-7.04	53.27	54	-0.73
5349.000	H	56.21	-4.00	52.21	54	-1.79

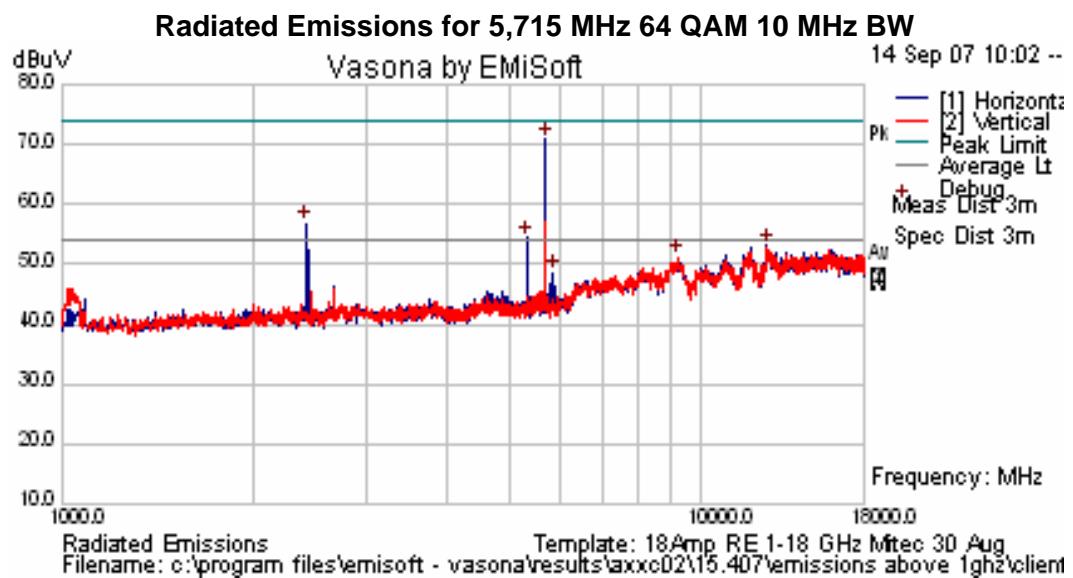

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 5,610 MHz 64 QAM 15 MHz BW


##### Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
5240.500	H	60.34	-4.38	55.96	74	-18.04
11996.670	H	46.34	+6.02	52.36	74	-21.64

##### Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
5240.500	H	57.95	-4.38	53.57	54	-0.43
11996.670	H	45.56	+6.02	39.54	54	-14.46

#### Radiated Emissions for 5,610 MHz 64 QAM 15 MHz BW

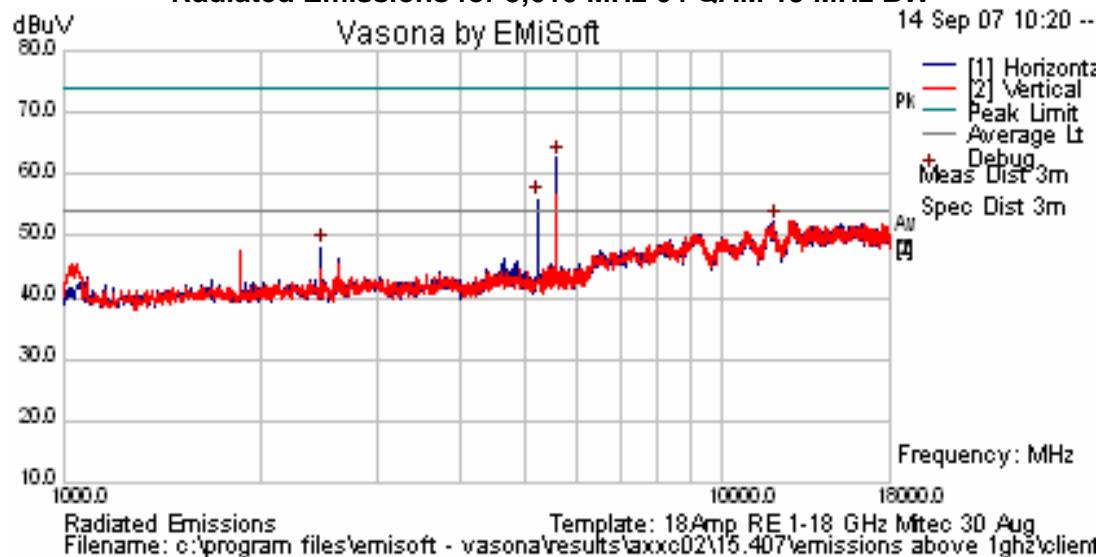

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 5,660 MHz 64 QAM 15 MHz BW


##### Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
5287.000	H	61.00	-4.26	56.74	74	-17.26

##### Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
5287.000	H	58.90	-4.26	53.34	54	-0.66

#### Radiated Emissions for 5,660 MHz 64 QAM 15 MHz BW

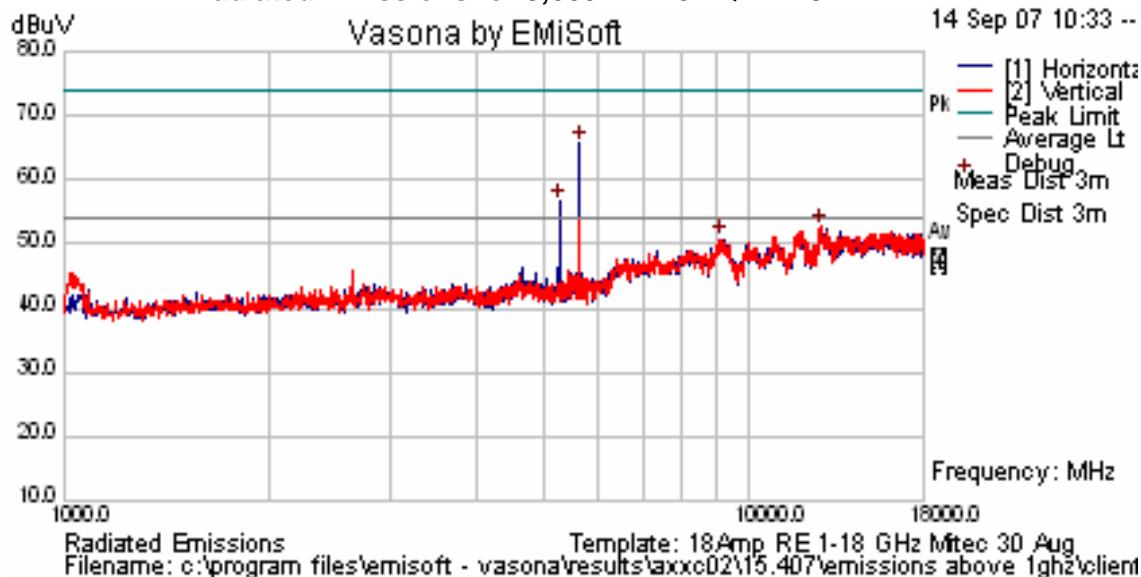

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Radiated Spurious Emissions above 1 GHz


#### TABLE OF RESULTS – 5,715 MHz 64 QAM 15 MHz BW

##### Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
11892.84	H	48.78	+5.93	54.71	74	-19.29
5343.833	H	57.67	-4.00	53.67	74	-20.33

##### Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
11892.84	H	35.28	+5.93	41.21	54	-12.79
5343.833	H	55.54	-4.00	51.54	54	-2.46

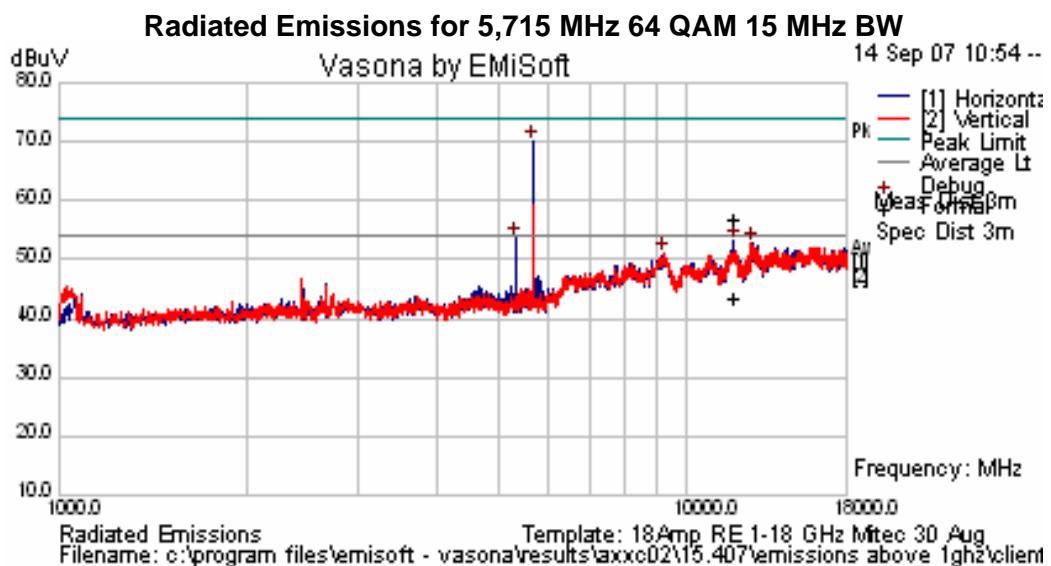

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 64 of 113

### Peak Field Strength Measurements

#### TABLE OF RESULTS – 64 QAM 5 MHZ BW

Tx Freq. (MHz)	Measured Peak Field Strength Emission (dBuV/m)
5,610	122.79
5,660	123.12
5,715	123.56

#### TABLE OF RESULTS – 64 QAM 10 MHZ BW

Tx Freq. (MHz)	Measured Peak Field Strength Emission (dBuV/m)
5,610	123.45
5,660	122.65
5,715	124.12

#### TABLE OF RESULTS – 64 QAM 15 MHZ BW

Tx Freq. (MHz)	Measured Peak Field Strength Emission (dBuV/m)
5,610	123.24
5,660	124.56
5,715	124.22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.7.2. Radiated Band-Edge – Restricted Bands


#### 5,470 MHz to 5,725 MHz

Worst case variant for band-edge measurement on the same transmitting channel is 15 MHz.

**TABLE OF RESULTS - 64 QAM 15 MHZ BW**

Tx Freq. (MHz)	Restricted Band Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5,610 <sub>PEAK</sub>	5,460	64.32	74.00	-9.68
5,610 <sub>AVE</sub>	5,460	50.65	54.00	-3.35

**5,610 MHZ 64 QAM 15 MHZ BW**  
**Lower Band Edge Peak Emission = 116.91 dB<sub>μ</sub>V/m**

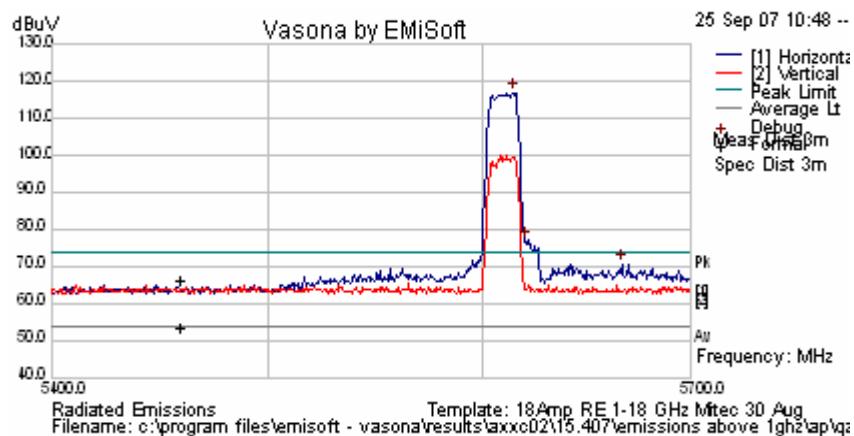

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.7.3. Receiver Spurious Emissions above 1 GHz


#### Industry Canada RSS-Gen §4.8, §6

##### Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

##### Test Measurement Set up

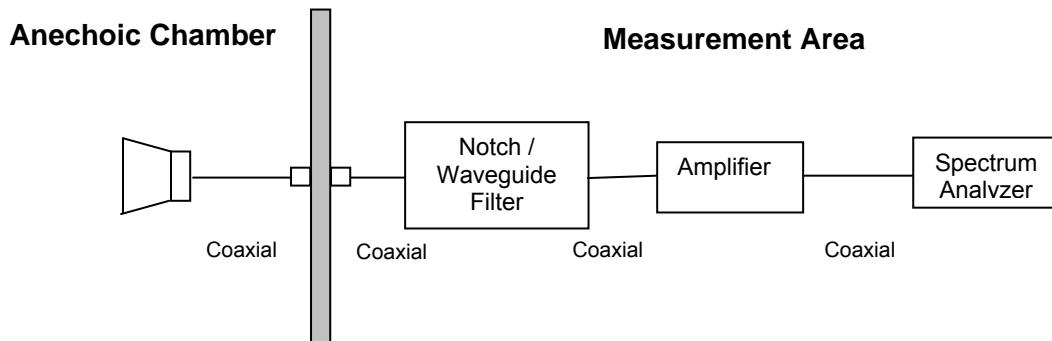

Measurement set up for Radiated Emission Test

##### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 67 of 113

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (\mu V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### Receiver Radiated Spurious Emissions above 1 GHz


#### TABLE OF RESULTS -- 64 QAM 10 MHz BW

##### Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Peak Field Strength (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)
2434.816	V	51.4	-7.06	44.34	74	-29.66
12755.00	H	46.61	+6.07	52.68	74	-21.32

##### Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB $\mu$ V)	Correction Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
2434.816	V	37.85	-7.06	30.79	54	-23.21
12755.00	H	33.75	+6.07	39.82	54	-14.18

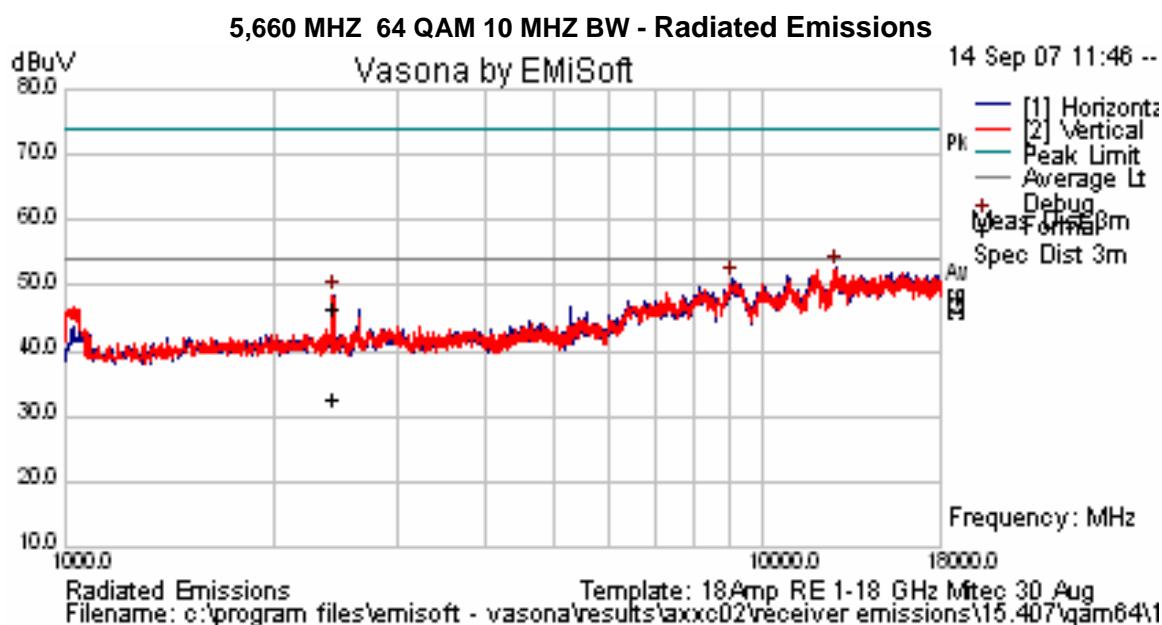

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## Specification

### Limits

**15.407 (b)(2).** All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

**RSS-210 §A9.3(2)** For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

**RSS-Gen §4.7** The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz , whichever is the lowest frequency, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

### RSS-Gen §6 Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

Frequency (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 70 of 113

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 5.1.7.4. Radiated Spurious Emissions (30M-1 GHz)


**FCC, Part 15 Subpart C §15.407(b)(6); §15.205(a); §15.209(a)**  
**Industry Canada RSS-210 §2.2**

##### Test Procedure

Preliminary radiated emissions are measured in the anechoic chamber at a 10-meter distance on every azimuth in both horizontal and vertical polarity. The emissions are recorded with a spectrum analyzer in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

##### Test Measurement Set up

##### Field Strength Calculation

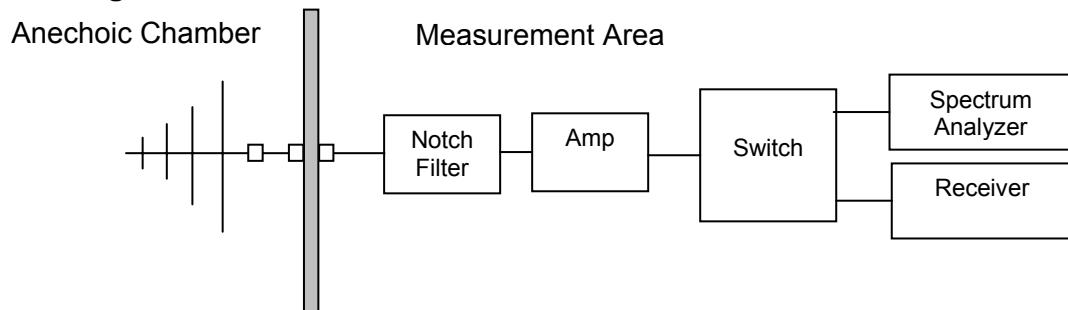

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 72 of 113

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (}\mu\text{V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

## Measurement Results for Spurious Emissions (30 MHz – 1 GHz)

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**EUT Setup**


POE TR36A-POE-480

S/N 8593

Positioned vertically

**TABLE OF RESULTS**

Freq. (MHz)	Peak (dBuV/m)	QP (dBuV/m)	QP Lmt (dBuV/m)	QP Margin (dB)	Angle (deg)	Height (cm)	Polarity
50.449	48.74	37.10	40	-2.90	338	100	V
56.645	47.61	31.74	40	-8.26	319	120	V
33.470	43.19	37.67	40	-2.33	246	111	V
94.368	42.11	38.00	43.5	-5.50	137	131	V
103.868	41.50	35.46	43.5	-8.04	95	102	V

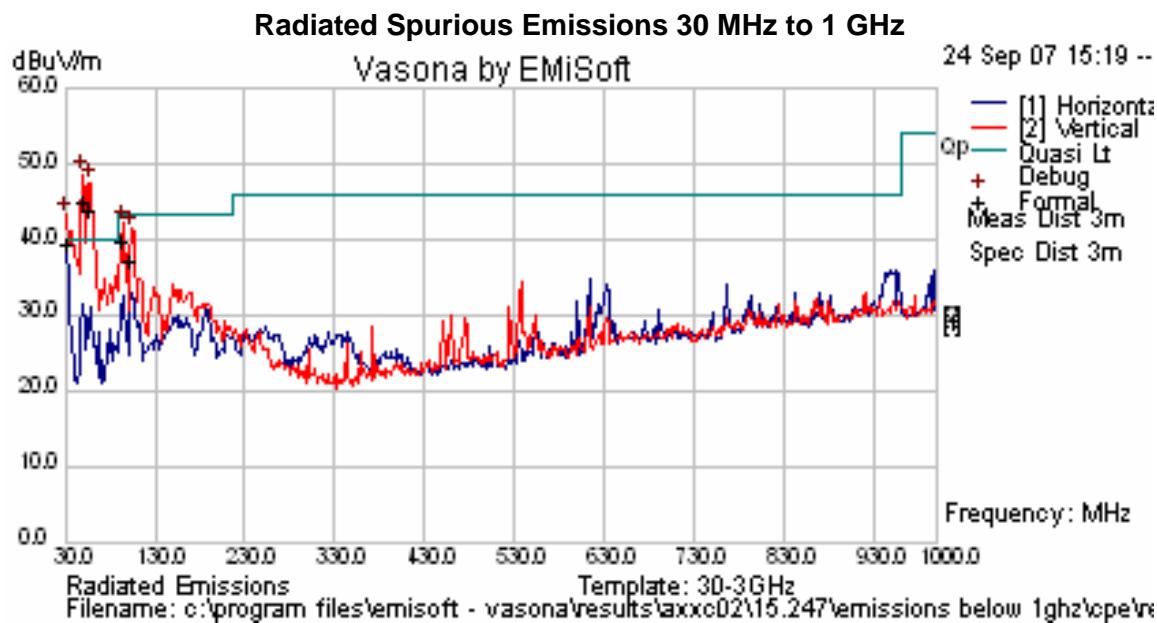

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**EUT Setup**

POE TR36A-POE-480


S/N 8593

Positioned flat on unit's back on table

Unit grounded with ground strap

**TABLE OF RESULTS**

Freq. (MHz)	Peak (dBuV/m)	QP (dBuV/m)	QP Lmt (dBuV/m)	QP Margin (dB)	Angle (deg)	Height (cm)	Polarity
38.892	47.60	36.17	40	-3.83	333	126	V
56.588	43.12	37.03	40	-2.97	360	144	V
86.067	39.88	35.38	40	-4.62	31	98	V
106.712	42.00	39.14	43.5	-4.36	148	110	V

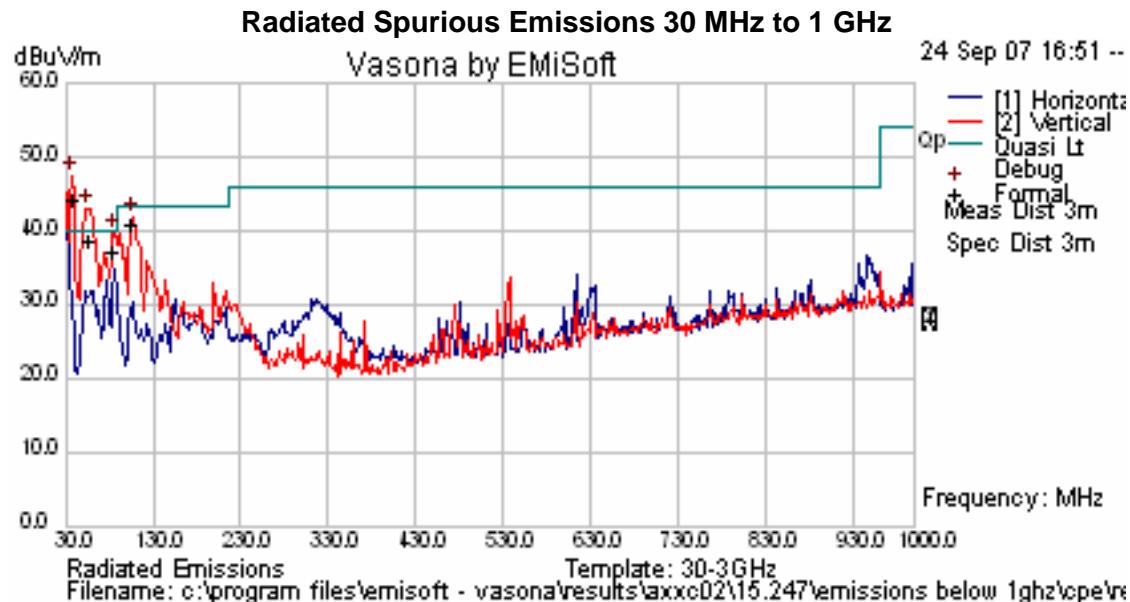

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 75 of 113

## Specification

### Limits

**§15.407(b)(6)** Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

**RSS-210 §2.2** refers to Section 2.7 Table 2 below;-

Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### **5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

**FCC, Part 15 Subpart C §15.407(b)(6)/15.207**  
**Industry Canada RSS-Gen §7.2.2**

#### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

#### **Test Measurement Set up**

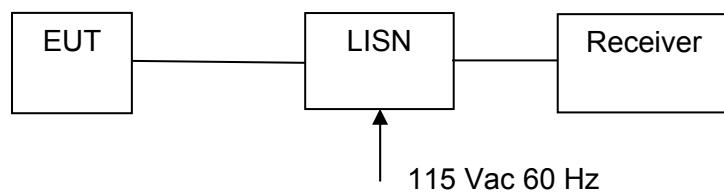

Measurement set up for AC Wireline Conducted Emissions Test

#### **Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

##### **Ambient conditions.**

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**TABLE OF RESULTS –**

Freq (MHz)	Line	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	QP Limit (dB $\mu$ V)	QP Margin (dB)	Ave. (dB $\mu$ V)	Ave. Limit (dB $\mu$ V)	Ave. Margin (dB)
0.154	Neutra	53.30	41.52	65.33	-23.81	18.06	55.33	-37.27
0.187	Neutra	54.46	51.75	64.14	-12.39	48.25	54.14	-5.88
0.229	Neutra	53.74	39.75	62.89	-23.14	20.71	52.89	-32.18
0.367	Neutra	46.32	37.73	58.61	-20.89	29.67	48.61	-18.94
0.457	Neutra	52.11	38.20	56.5	-18.30	12.78	46.50	-33.72
0.513	Neutra	43.81	19.60	56	-36.40	6.77	46	-39.23
0.662	Neutra	49.64	34.32	56	-21.68	14.87	46	-31.13
0.801	Neutra	48.90	22.57	56	-33.43	18.83	46	-27.17
0.943	Neutra	48.51	35.92	56	-20.08	11.36	46	-34.64
1.380	Neutra	45.00	22.63	56	-33.37	13.51	46	-32.49
4.423	Live	46.37	41.87	56	-14.13	31.52	46	-14.48
4.487	Neutra	43.86	32.10	56	-23.90	19.72	46	-26.28

**AC Wireline Conducted Emissions – Live and Neutral Lines (150 kHz – 30 MHz)**

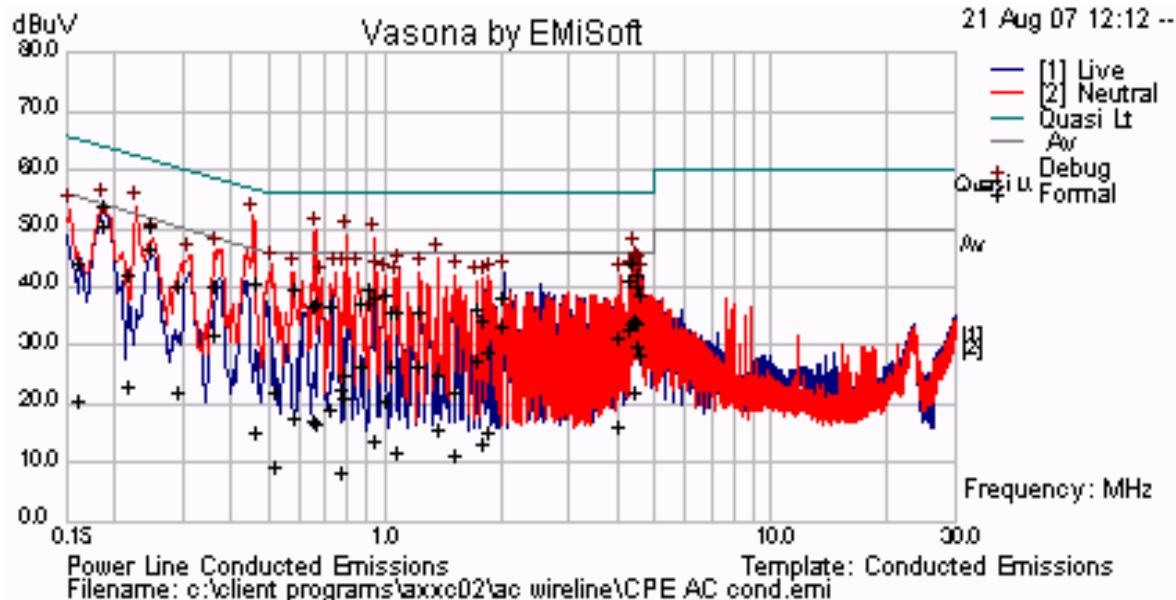

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 78 of 113

## Specification

### Limit

**§15.407 (b)(6);** Any U-NII devices using an AC power line are required to comply also with the limits set forth in Section 15.207.

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

#### RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

#### §15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

#### Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	$\pm 2.64$ dB
-------------------------	---------------

#### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0193, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 79 of 113

## **6. Dynamic Frequency Selection (DFS)**

### **6.1. Test Procedure and Setup**

**FCC, Part 15 Subpart C §15.407(h)**  
**FCC 06-96 Memorandum Opinion and Order**  
**Industry Canada RSS-210 A9.4**

#### **6.1.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring**

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna

#### **6.1.2. DFS Response requirement values**

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 80% of the 99% power bandwidth See Note 3.

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 80 of 113

### **6.1.3. Radar Test Waveforms**

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

#### **Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

#### **Long Pulse Radar Test Waveform**

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst\_Count*. Each interval is of length  $(12,000,000 / \text{Burst\_Count})$  microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst\_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen independently.

**A representative example of a Long Pulse radar test waveform:**

- 1) The total test signal length is 12 seconds.
- 2) 8 *Bursts* are randomly generated for the *Burst\_Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2* through *8* are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts 2* through *8* randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).

**Graphical representation of the Long Pulse radar Test Waveform.**

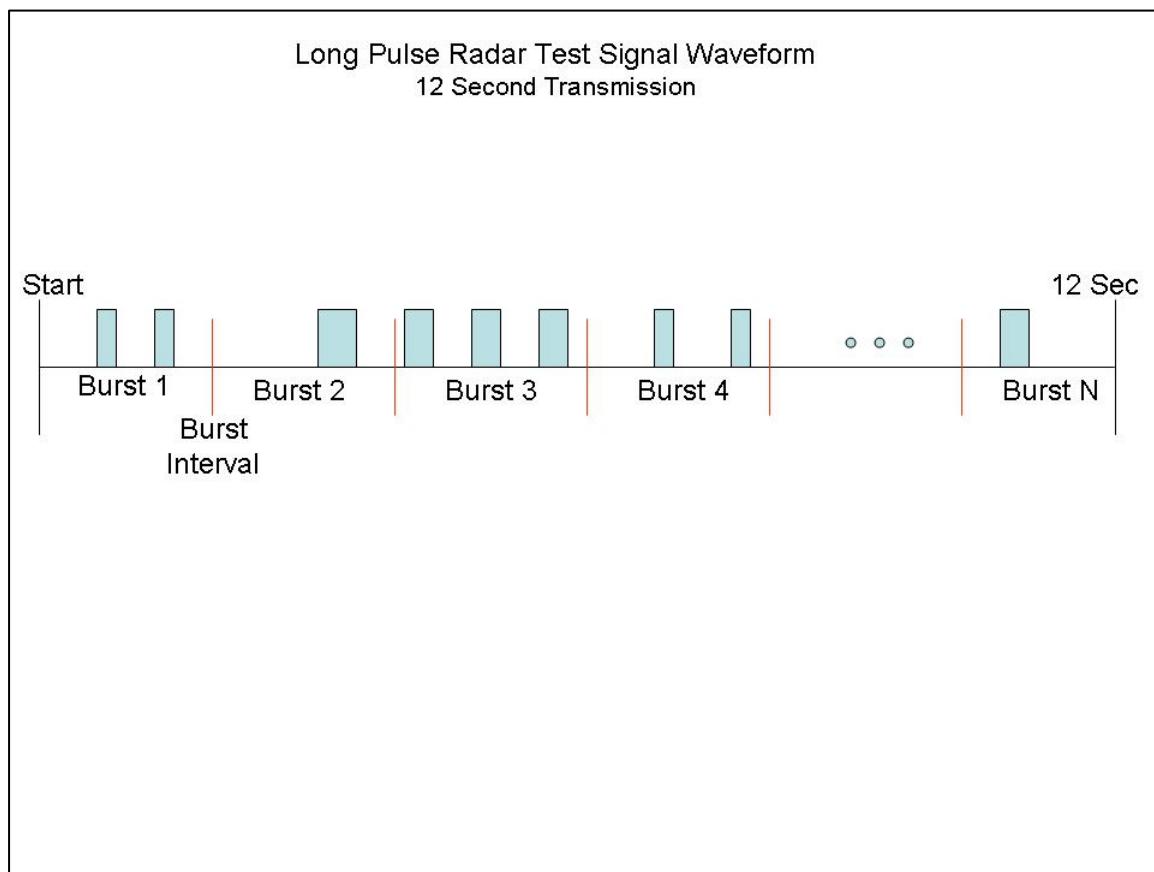

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 6.1.4. Frequency Hopping Radar Test Waveform

##### Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30


For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

#### 6.1.5. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm (Ref Section 5.1). The 30dB amplifier gain was entered as an amplitude offset on the spectrum analyzer.

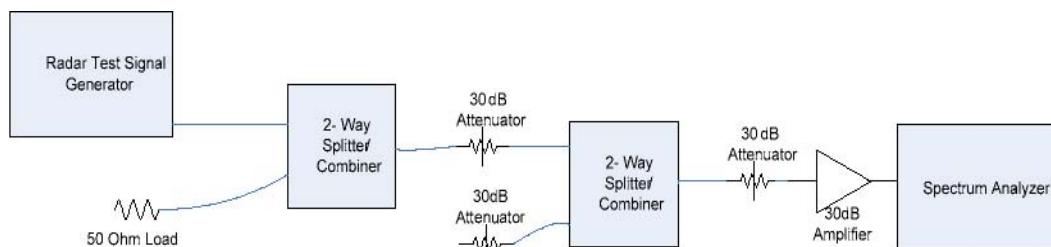


**Conducted Calibration Setup**

### 6.1.6. Radar Waveform Calibration Plots


The following are the calibration plots for required radar waveforms

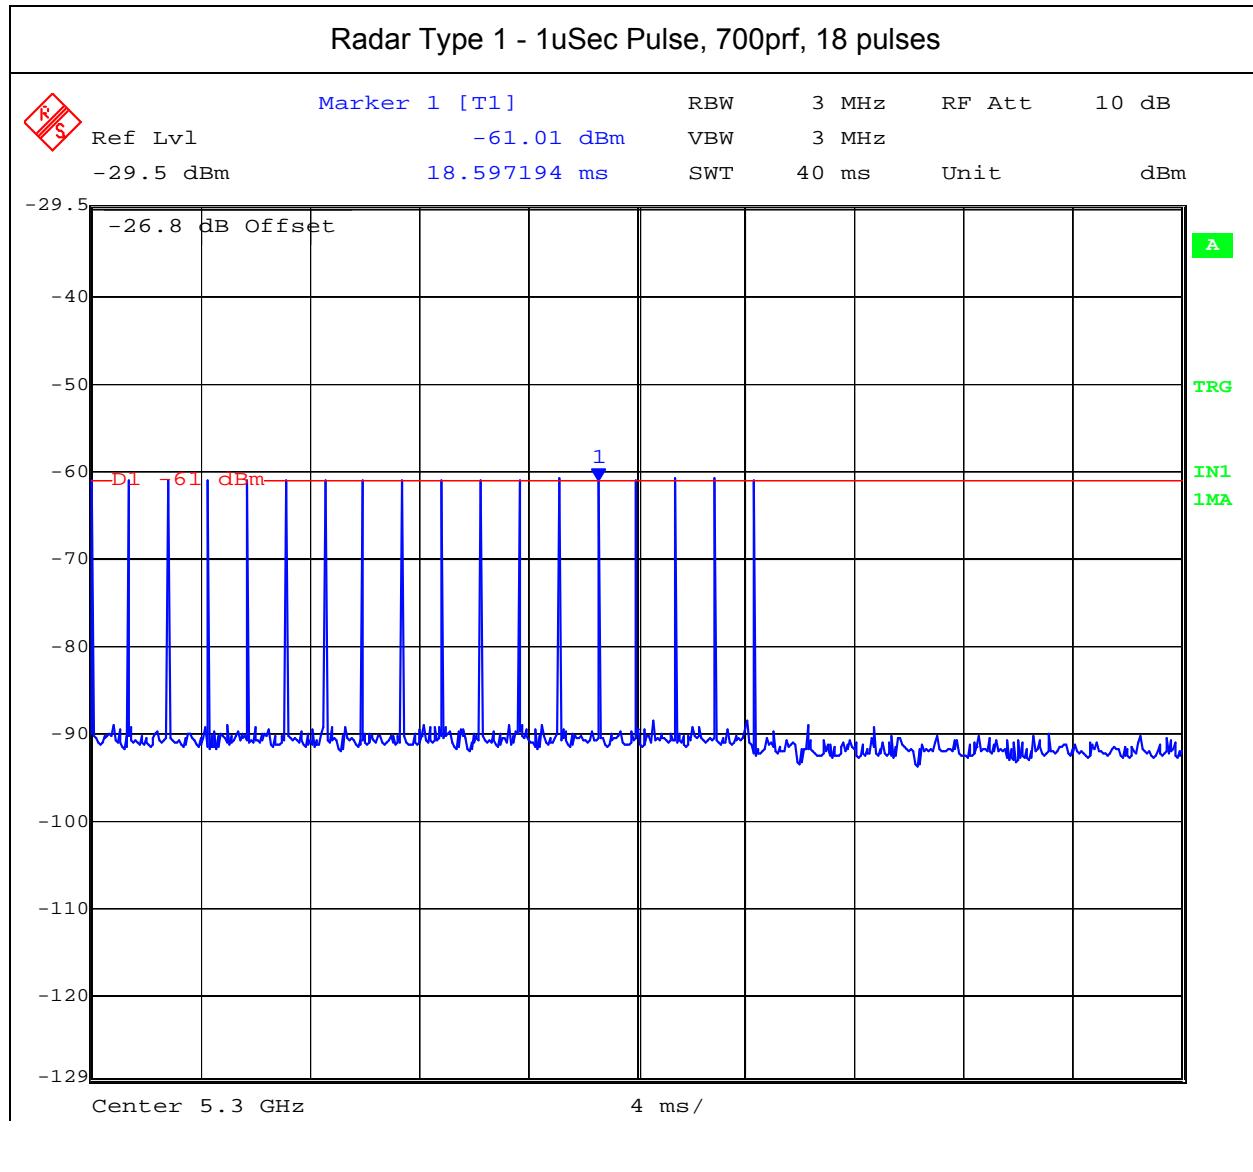


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

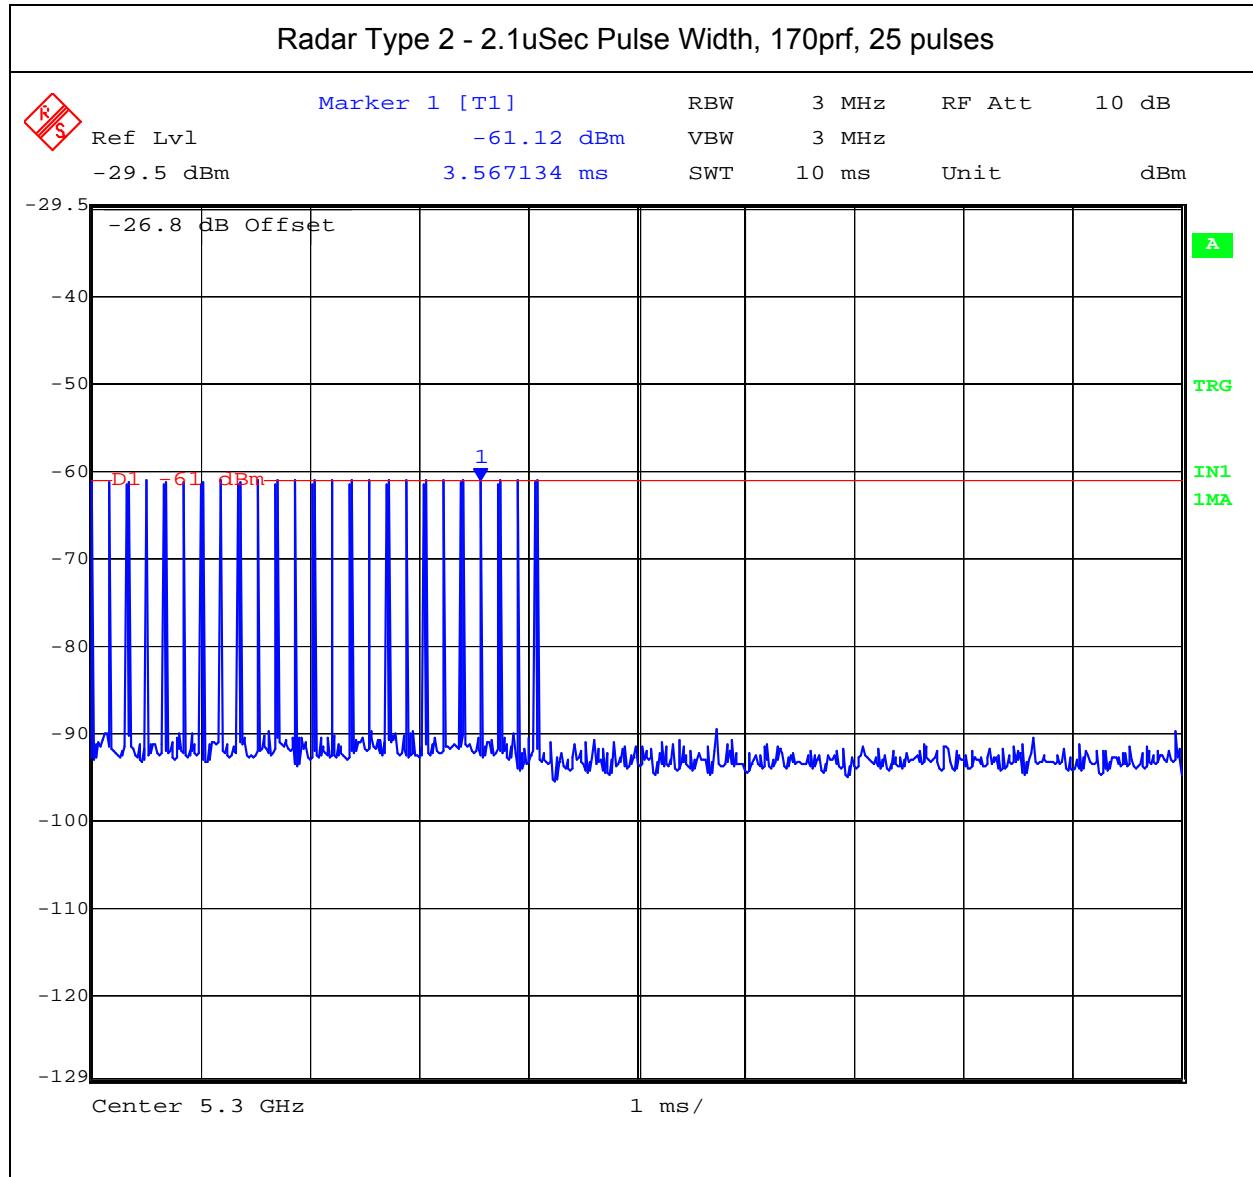


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

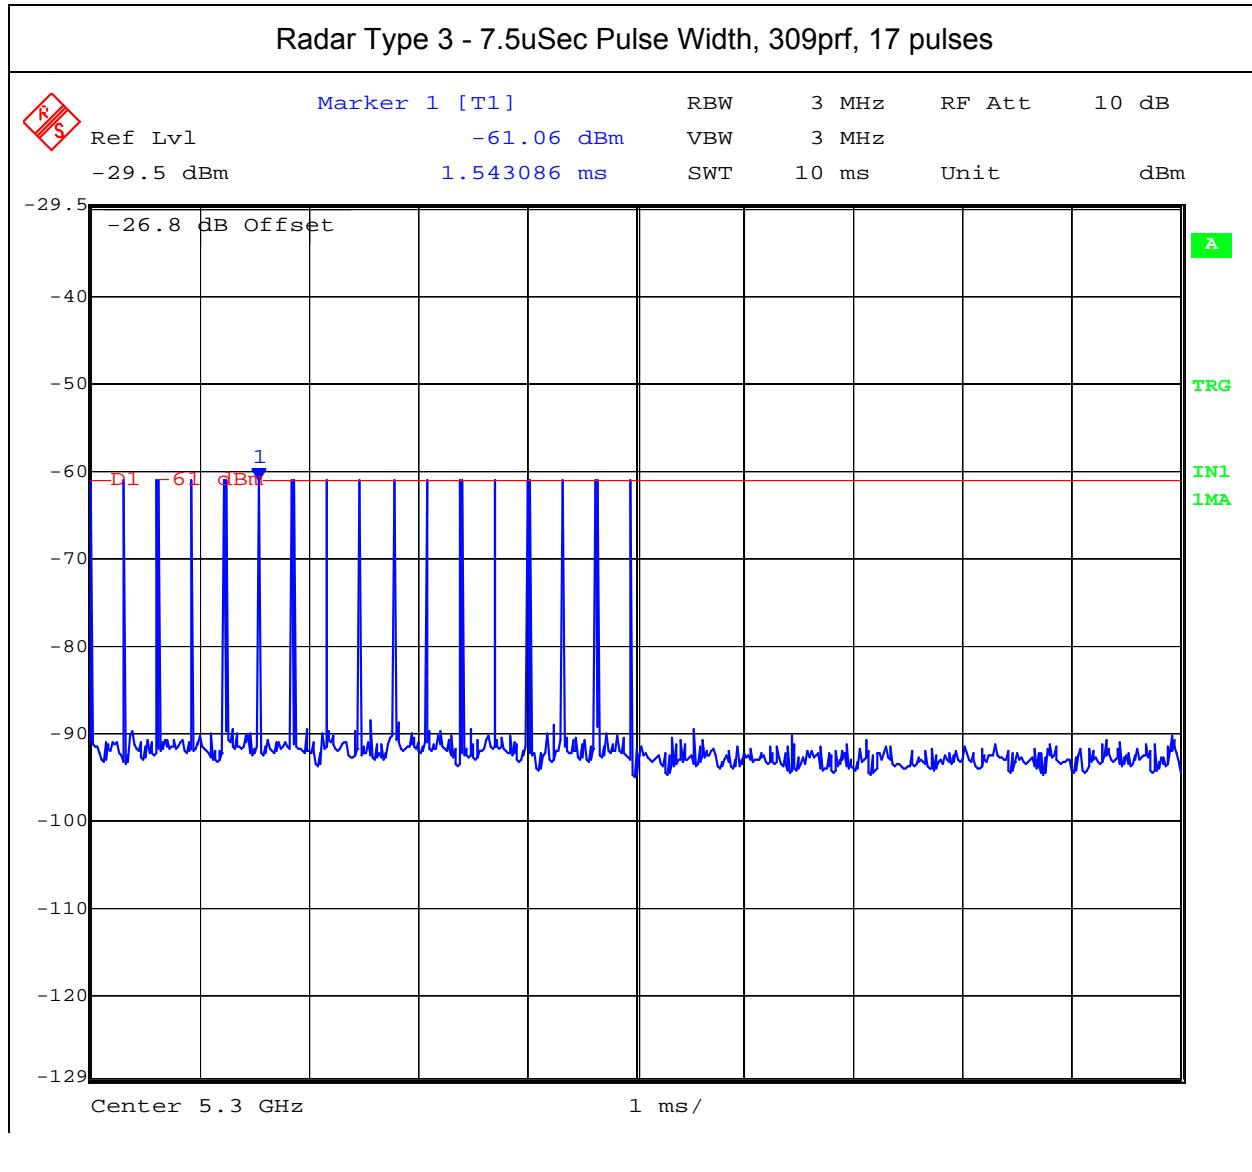


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

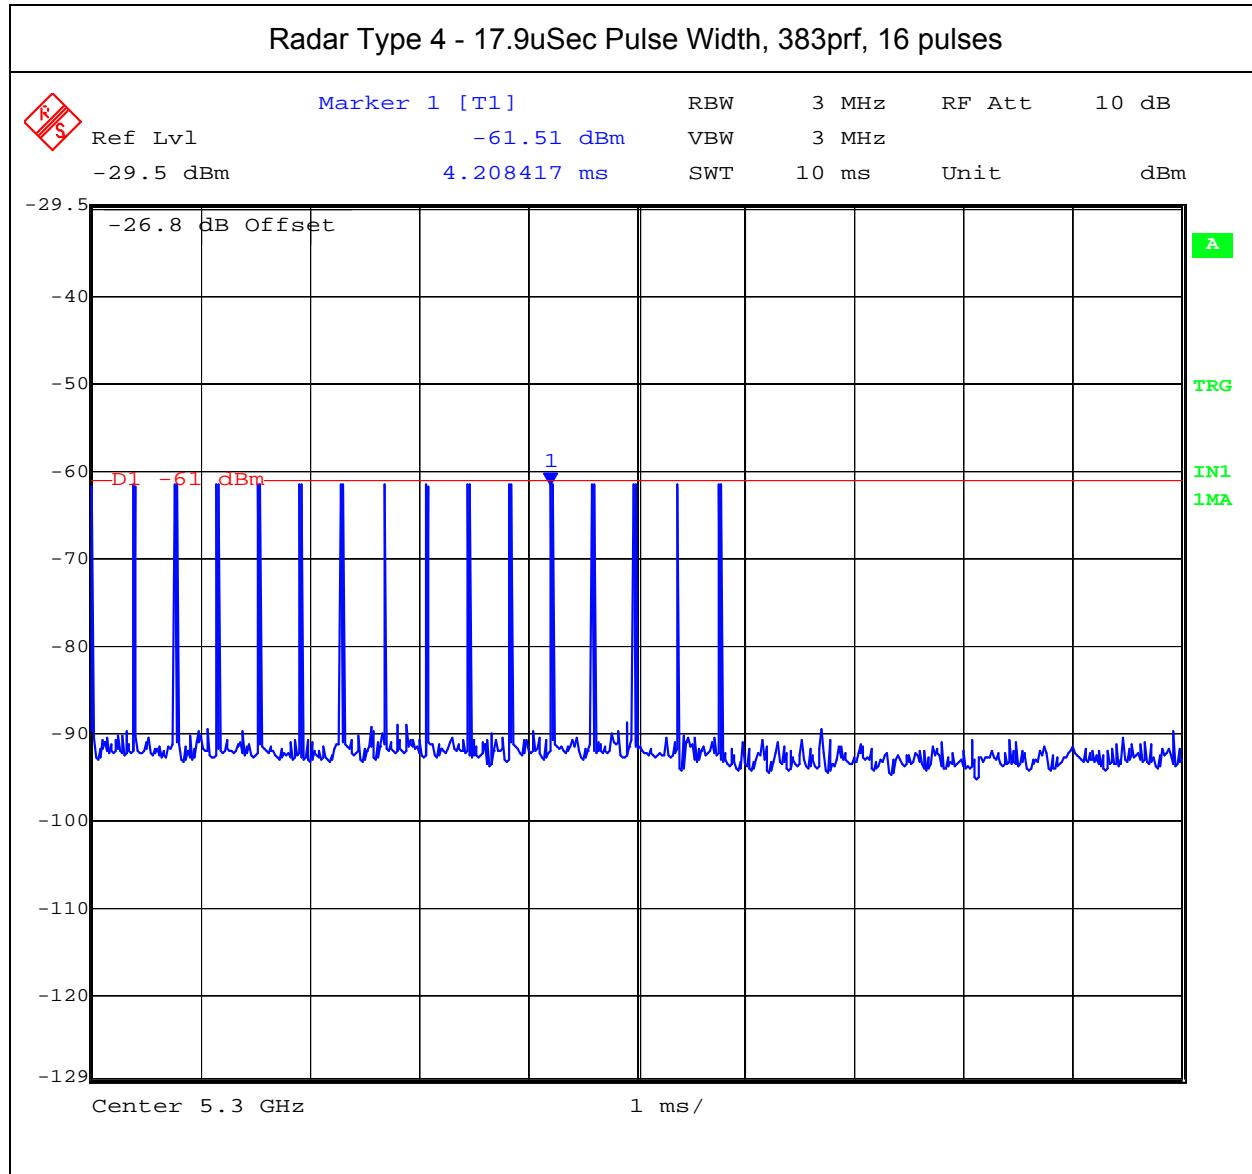

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

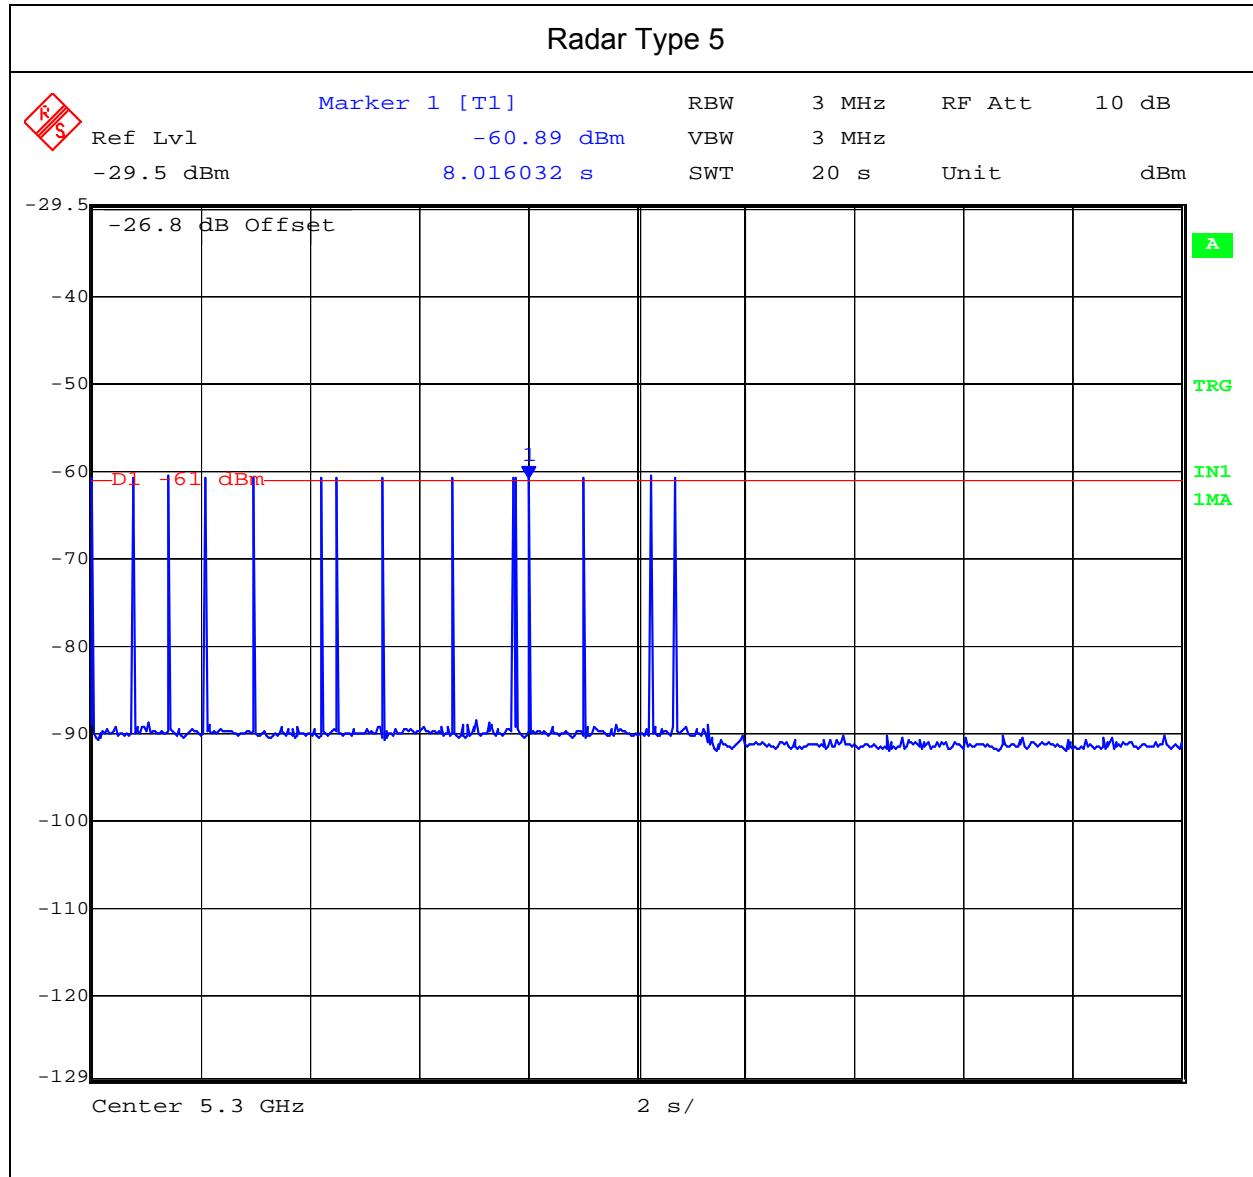

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

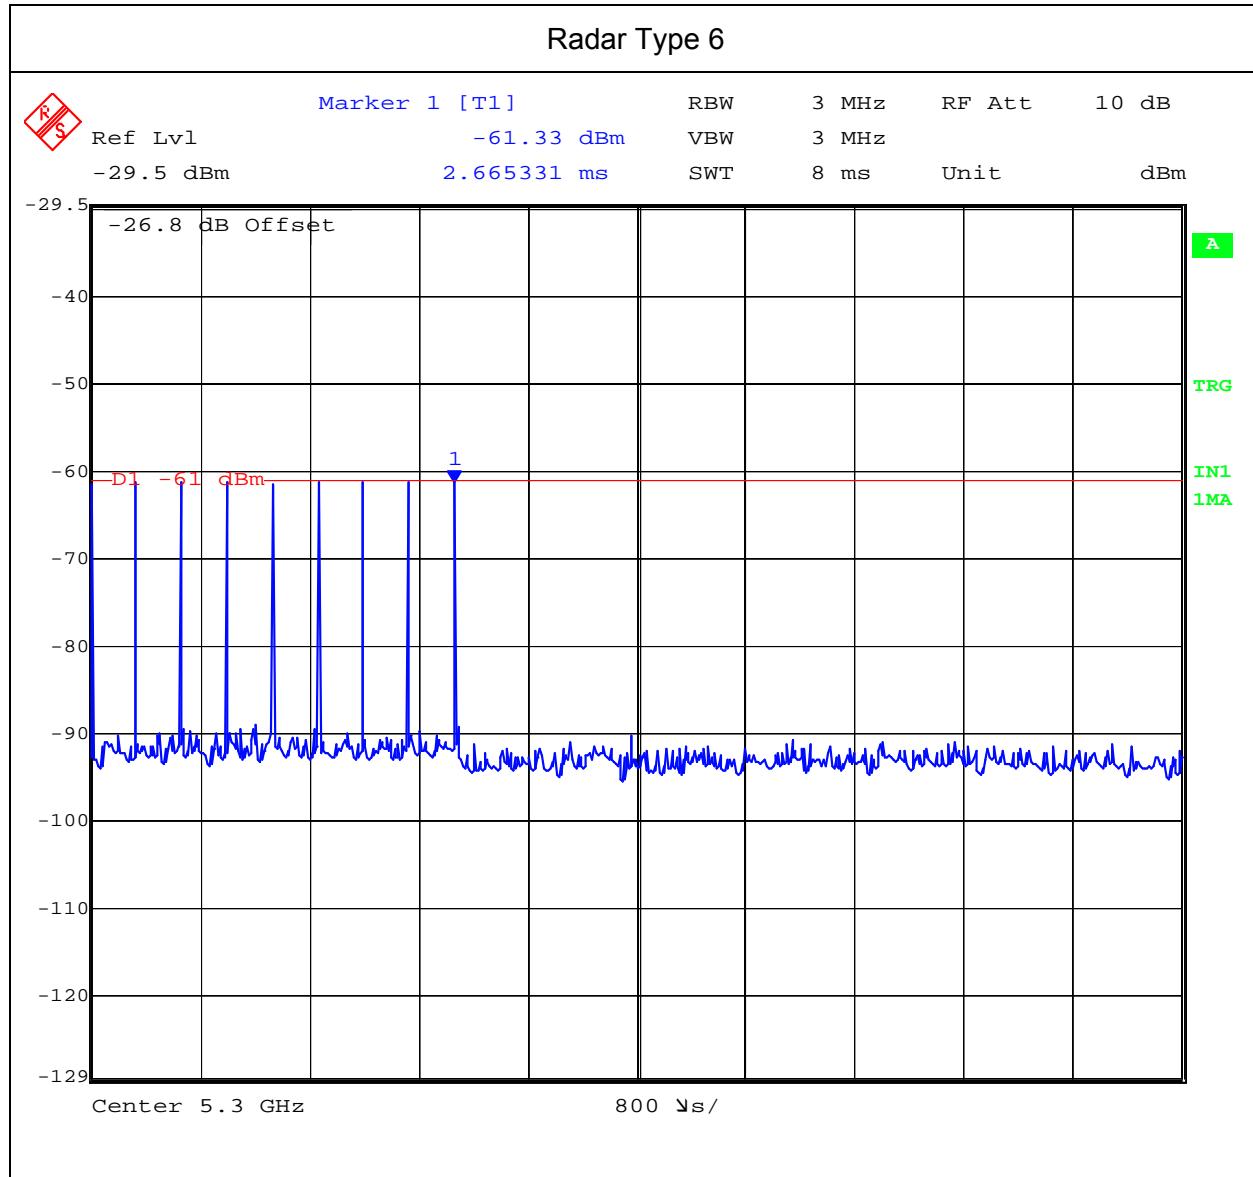


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 6.1.7. Test Set Up:

#### Block Diagram(s) of Test Setup

Setup for Conducted Measurements where the EUT is the Master with injection of Radar Test Waveforms at the Master.

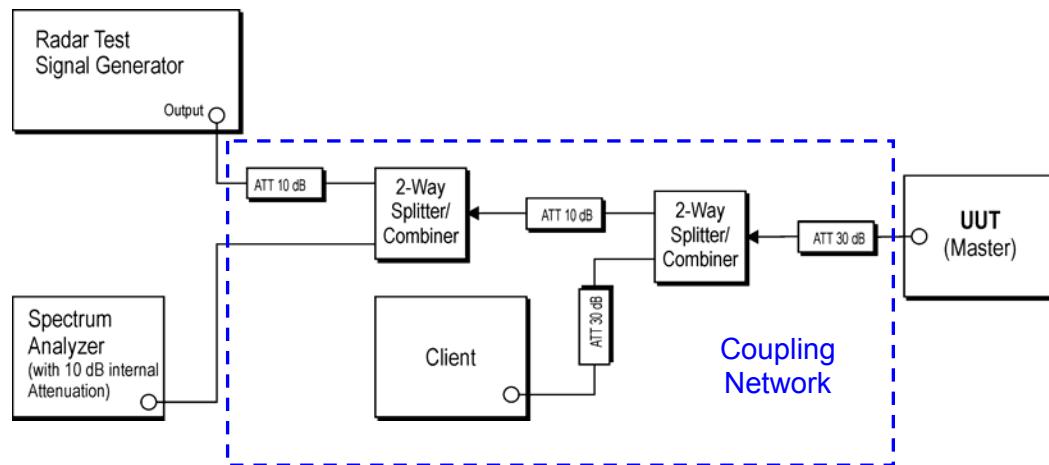

#### Support Equipment Configuration

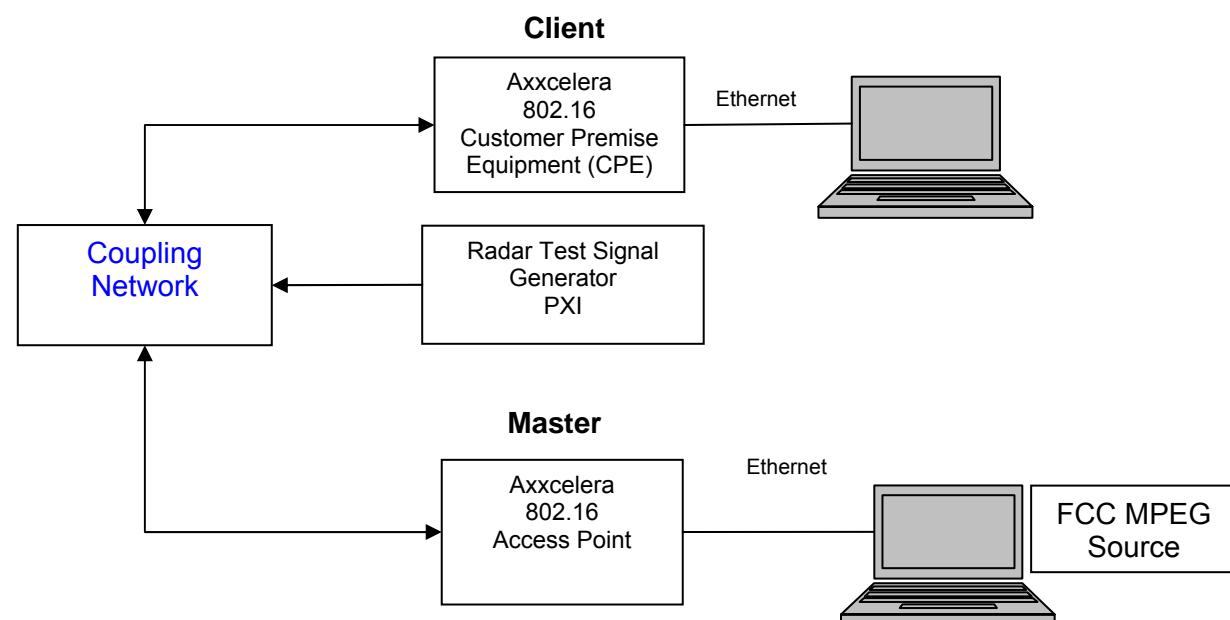

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 91 of 113

For the frequency band 5,470 – 5,725 MHz, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels.

Declared minimum antenna gain 16 dBi. ;

Radar receive signal level = -62 dBm + minimum antenna gain + 1 dB

$$= -62 + 16 + 1$$

Radar receive signal level = -45 dBm

Applicability of DFS requirements during normal operation

<b>Requirement</b>	<b>Operational Mode</b>		
	<b>Master</b>	<b>Client Without Radar Detection</b>	<b>Client With Radar Detection</b>
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

The Axxcelera AB-MAX Customer Premise Equipment is a Client device with radar detection.

### Measurement Results - Dynamic Frequency Selection (DFS)

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57%      Pressure: 999 to 1012 mbar

Radio parameters.

Test methodology: Conducted

Device Type: Client

Transmit Power: Maximum

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 6.2. Dynamic Frequency Selection (DFS) Test Results

### 6.2.1. UNII Detection Bandwidth:

All UNII channels for this device have identical channel bandwidths and DFS testing was completed on channel 5,620 MHz.

The generating equipment is configured as shown in the Conducted Test Setup above. A single Burst of the short pulse radar Type 1 through 6 was produced at 5,620 MHz at a level of -56 dBm (Ref Section 5.1). The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted. The EUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as  $F_H$ .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as  $F_L$ .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 80% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 93 of 113

**EUT Frequency=5,620MHz**

<b>Radar Frequency (MHz)</b>	<b>DFS Detection Trials (1=Detection, Blank= No Detection)</b>										<b>Detection Rate (%)</b>
	1	2	3	4	5	6	7	8	9	10	
5611	0	0	0	0	0	0	0	0	0	0	0%
5612( $F_L$ )	1	1	1	1	1	1	1	1	1	1	100%
5613	1	1	1	1	1	1	1	1	1	1	100%
5614	1	1	1	1	1	1	1	1	1	1	100%
5615	1	1	1	1	1	1	1	1	1	1	100%
5616	1	1	1	1	1	1	1	1	1	1	100%
5617	1	1	1	1	1	1	1	1	1	1	100%
5618	1	1	1	1	1	1	1	1	1	1	100%
5619	1	1	1	1	1	1	1	1	1	1	100%
5620	1	1	1	1	1	1	0	1	1	1	90%
5621	1	1	1	1	0	1	1	1	1	1	90%
5622	1	1	1	1	1	1	1	1	1	1	100%
5623	1	1	1	1	1	1	1	1	1	1	100%
5624	1	1	1	1	1	1	1	1	1	1	100%
5625	1	1	1	1	1	1	1	1	1	1	100%
5626	1	1	1	1	1	1	1	1	1	1	100%
5627	1	1	1	1	1	1	1	1	1	1	100%
5628	1	1	1	1	1	1	1	1	1	1	100%
5629 ( $F_H$ )	0	0	1	1	1	1	1	1	0	0	60%
5630	0	0	0	0	0	0	0	0	0	0	0%

Detection Bandwidth =  $F_H - F_L = 5629 - 5612 = 17$  MHz

EUT 99% Bandwidth = 13.47 MHz

13.47 MHz \*80% = 10.776 MHz

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 94 of 113

---

#### **6.2.2. Initial Channel Availability Check Time**

Not required. The Axxcelera AB-MAX Customer Premise Equipment is a Client device with radar detection.

#### **6.2.3. Radar Burst at the Beginning of the Channel Availability Check Time:**

Not required. The Axxcelera AB-MAX Customer Premise Equipment is a Client device with radar detection.

#### **6.2.4. Radar Burst at the End of the Channel Availability Check Time:**

Not required. The Axxcelera AB-MAX Customer Premise Equipment is a Client device with radar detection.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 95 of 113

---

**6.2.5. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period  
FCC §15.407(h)(2)(iii)**

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

**Channel Closing Transmission Time - Measurement**

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was captured, collecting nearly 250M samples of data, which included 60ms of pre-trigger data. This Type 1 waveform had an integral marker built into its construction, marking the start of the waveform play, which directly triggered the PXI digitizer's data capture via the PXI backplane trigger bus.

The test system was setup to capture data for all transmission events above a threshold level of -61dBm. The test equipment time stamps all captured events with respect to  $T_0$  (zero time indicating the start of the measurements sequence) starting the 60 ms pre-trigger period followed by the radar type 1 burst period.

Radar (Type 1) Pre-trigger period      60ms

Type 1 burst period      24.277ms


(The period of the 18 pulse burst includes [17 pulses \*1.428mS PRI] = 24.276ms. Then add 1 $\mu$ s pulse width for the final pulse.)

Channel Closing Transmission Time starts immediately after the last radar pulse is transmitted i.e. 84.277ms after the start of the trace capture period.

Therefore, pulses seen after this 84.277ms boundary are identified and totaled to provide an aggregate total of transmissions in order to determine whether the EUT is compliant with the Channel Closing Transmission Time requirements as described in MO&O FCC 06-96. In this case, it was found that an aggregate total of 0.072 ms of transmission time accrued.

**Channel Closing Transmission Time = 0.072 mSecs (limit 260 mSecs)**

### Channel Move Time, Channel Closing Time for Type 1 Radar

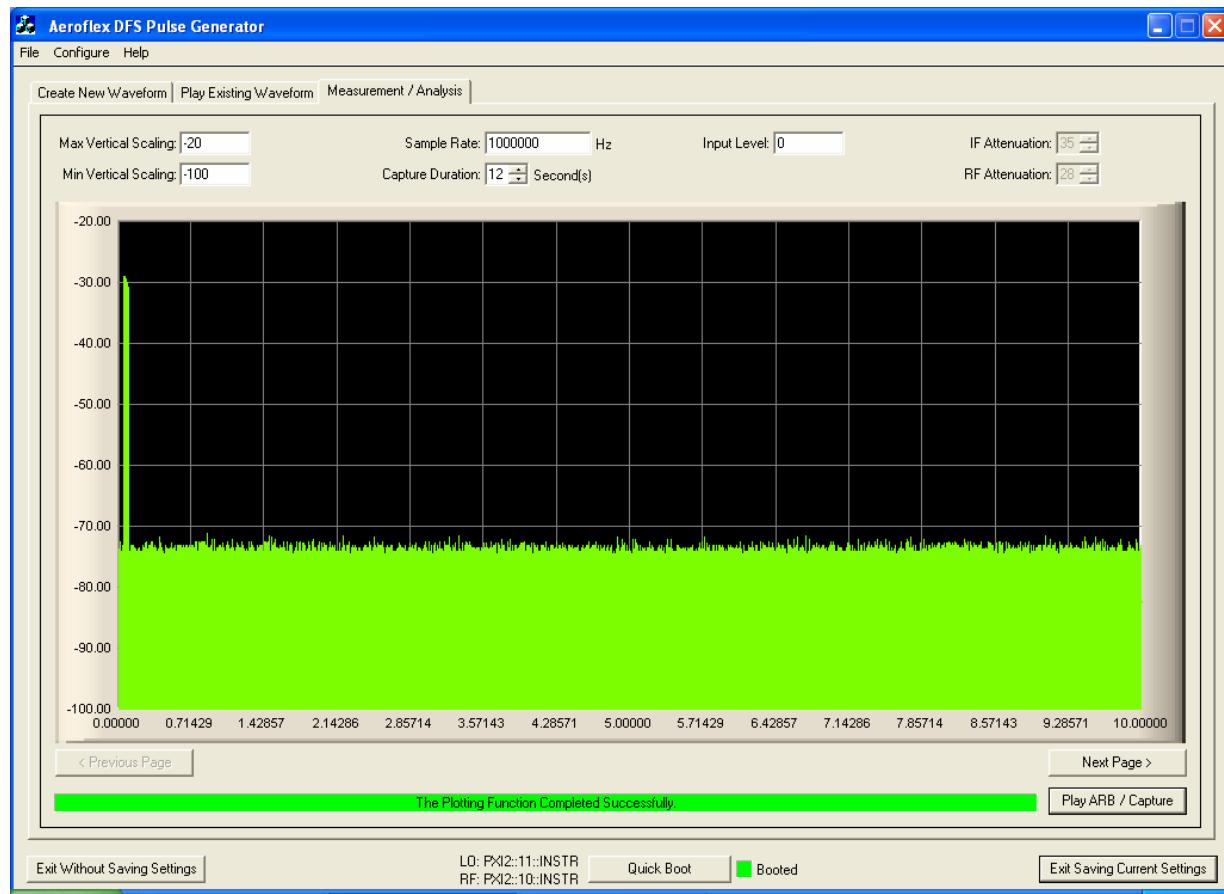

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 97 of 113

---

The following data was captured by the Aeroflex PXI test System and is used to calculate the Channel Closing Transmission Time for the EUT with the intervention of Radar Type 1.

Sample Number: 85702	Rising Edge,	Sample Time Stamp	0.085702	
Sample Number: 85704	Falling Edge,	Sample Time Stamp	0.085704	2E-06
Sample Number: 87130	Rising Edge,	Sample Time Stamp	0.08713	
Sample Number: 87133	Falling Edge,	Sample Time Stamp	0.087133	3E-06
Sample Number: 88558	Rising Edge,	Sample Time Stamp	0.088558	
Sample Number: 88561	Falling Edge,	Sample Time Stamp	0.088561	3E-06
Sample Number: 89985	Rising Edge,	Sample Time Stamp	0.089985	
Sample Number: 89989	Falling Edge,	Sample Time Stamp	0.089989	4E-06
Sample Number: 91413	Rising Edge,	Sample Time Stamp	0.091413	
Sample Number: 91417	Falling Edge,	Sample Time Stamp	0.091417	4E-06
Sample Number: 92841	Rising Edge,	Sample Time Stamp	0.092841	
Sample Number: 92845	Falling Edge,	Sample Time Stamp	0.092845	4E-06
Sample Number: 94269	Rising Edge,	Sample Time Stamp	0.094269	
Sample Number: 94273	Falling Edge,	Sample Time Stamp	0.094273	4E-06
Sample Number: 95697	Rising Edge,	Sample Time Stamp	0.095697	
Sample Number: 95701	Falling Edge,	Sample Time Stamp	0.095701	4E-06
Sample Number: 97125	Rising Edge,	Sample Time Stamp	0.097125	
Sample Number: 97129	Falling Edge,	Sample Time Stamp	0.097129	4E-06
Sample Number: 98553	Rising Edge,	Sample Time Stamp	0.098553	
Sample Number: 98557	Falling Edge,	Sample Time Stamp	0.098557	4E-06
Sample Number: 99981	Rising Edge,	Sample Time Stamp	0.099981	
Sample Number: 99985	Falling Edge,	Sample Time Stamp	0.099985	4E-06
Sample Number: 101409	Rising Edge,	Sample Time Stamp	0.101409	
Sample Number: 101413	Falling Edge,	Sample Time Stamp	0.101413	4E-06
Sample Number: 102837	Rising Edge,	Sample Time Stamp	0.102837	
Sample Number: 102841	Falling Edge,	Sample Time Stamp	0.102841	4E-06
Sample Number: 104265	Rising Edge,	Sample Time Stamp	0.104265	
Sample Number: 104269	Falling Edge,	Sample Time Stamp	0.104269	4E-06
Sample Number: 105693	Rising Edge,	Sample Time Stamp	0.105693	
Sample Number: 105697	Falling Edge,	Sample Time Stamp	0.105697	4E-06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 98 of 113

---

Sample Number: 107121	Rising Edge,	Sample Time Stamp	0.107121	
Sample Number: 107125	Falling Edge,	Sample Time Stamp	0.107125	4E-06
Sample Number: 108549	Rising Edge,	Sample Time Stamp	0.108549	
Sample Number: 108553	Falling Edge,	Sample Time Stamp	0.108553	4E-06
Sample Number: 109977	Rising Edge,	Sample Time Stamp	0.109977	
Sample Number: 109981	Falling Edge,	Sample Time Stamp	0.109981	4E-06
Sample Number: 111405	Rising Edge,	Sample Time Stamp	0.111405	
Sample Number: 111409	Falling Edge,	Sample Time Stamp	0.111409	4E-06

Aggregate Transmission Time = 7.2E-05

\* Represents the last transmission activity of the EUT. The 0.111409\*second time stamp is used to calculate Channel Move Time.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 99 of 113

---

### Channel Move Time – Measurement & Calculation Type 1 Radar

The Channel Move Time is calculated using the data captured for the Channel Closing time as follows:-

$$\text{Channel Move Time} = Ft - Pt - Rt$$

Where:-

Ft = Final transmission activity occurred at 111.409 mSeconds

Pt = Pre-trigger information 60 mS

Rt = Type 1 burst period 24.277 mS


(Rt is the period of the 18 pulse burst includes [17 pulses \*1.428mS PRI] = 24.276ms. Then add 1 $\mu$ s pulse width for the final pulse.)

$$\text{Channel Move Time} = 111.409 - 60 - 24.277 = \underline{27.132 \text{ mSeconds (Limit 10 Seconds)}}$$

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## Channel Move Time, Channel closing Transmission Time for Type 5 Radar

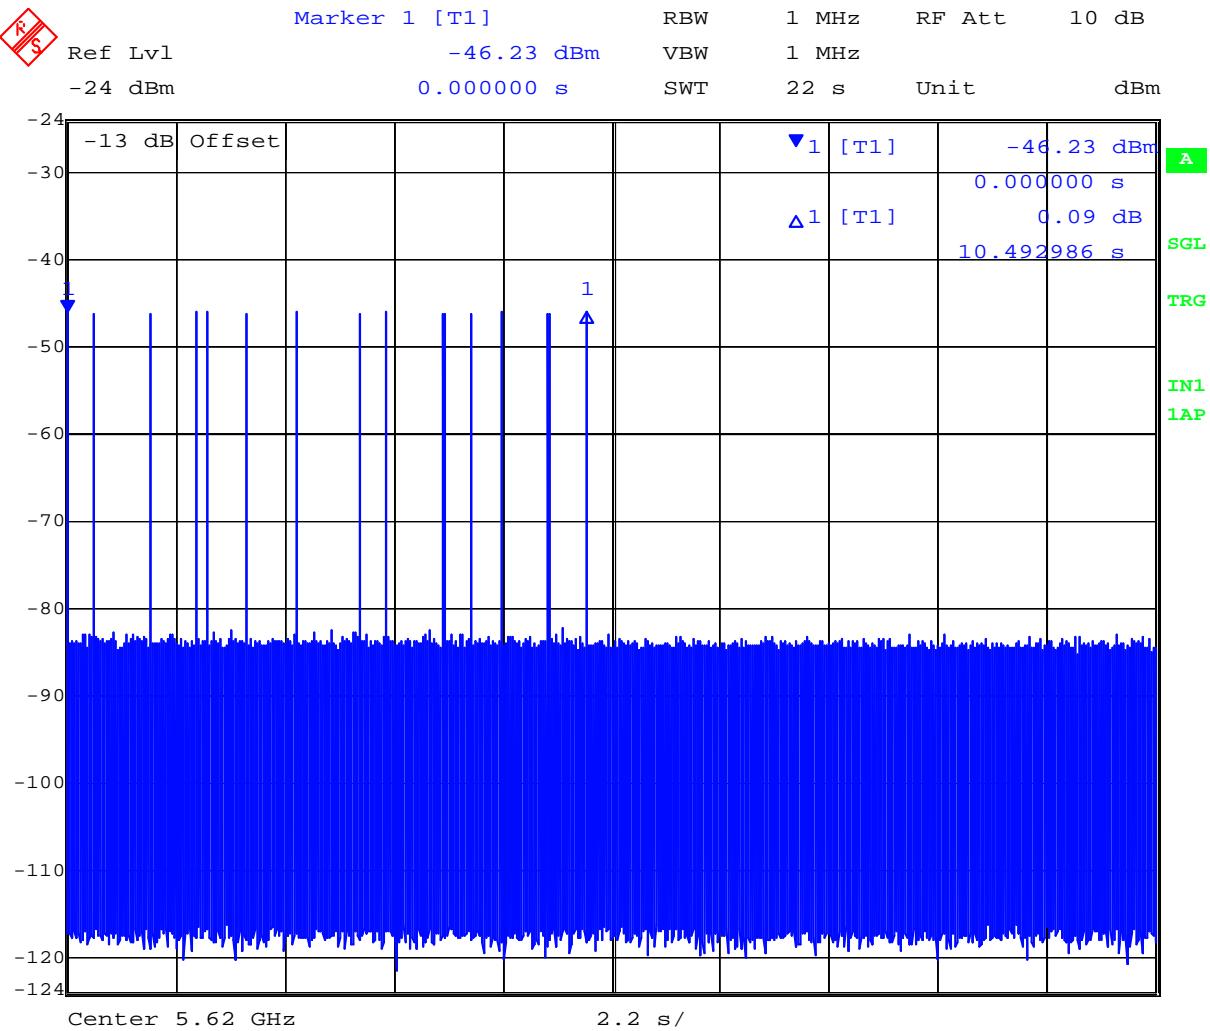


With reference to the requirements of FCC MO & O 06-96;- The instant that the Channel Move Time and Channel Closing Time begins for the long Pulse Radar Test Signal is the instant at the end of the 12 Second period defining the Radar Waveform. From the above plot is can be seen that the EUT stopped transmitting data before completion of the Radar Test Signal, therefore the Channel Closing Time and Channel Move time complies with the requirements.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 30 Minute Non-Occupancy Period

The EUT is monitored for more than 30 minutes following the channel close/move time to verify no transmissions resume on this Channel.

#### 30 Minute Non-Occupancy Period Type 1 Radar Ch 5,620 MHz

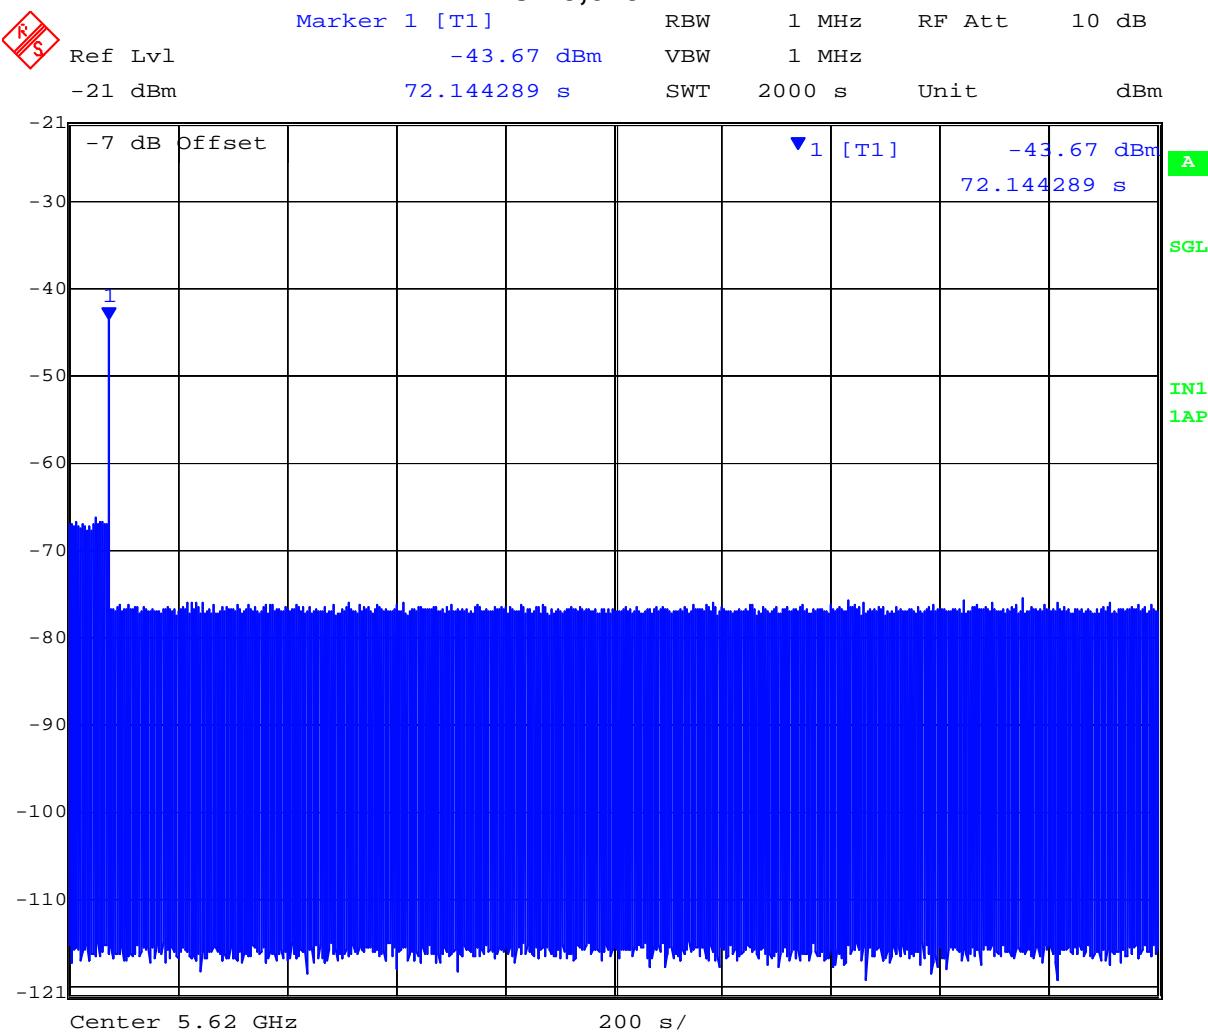

Date: 21.SEP.2007 13:45:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 102 of 113

---

#### **6.2.6. Statistical Performance Check**

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5,620 MHz. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

$\text{Total # of detections} \div \text{Total # of Trials} \times 100 = \text{Probability of Detection}$

The Minimum number of trials, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 103 of 113

### Radar Type 2 - Verification of Detection

Trail #	Detection = 1, No Detection = 0			
	Type 1	Type 2	Type 3	Type 4
1	1	1	1	1
2	1	1	1	1
3	1	1	1	1
4	1	1	1	0
5	1	1	1	1
6	1	1	1	0
7	1	1	1	1
8	1	0	1	0
9	1	1	1	1
10	1	0	1	1
11	1	1	1	1
12	1	1	1	1
13	1	1	1	1
14	1	1	0	1
15	1	1	1	1
16	0	1	1	1
17	1	1	1	0
18	0	0	1	0
19	1	0	0	0
20	0	0	1	1
21	0	1	1	1
22	1	1	0	1
23	1	1	1	1
24	0	1	1	0
25	1	1	1	1
26	1	0	1	1
27	1	1	1	1
28	0	0	1	1
29	1	1	1	1
30	1	1	1	1
<b>Detection Percentage</b>	80% (>60%)	76.7% (>60%)	90.0% (>60%)	73.3% (>60%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$P_d1 + P_d2 + P_d3 + P_d4 = (80\% + 76.7\% + 90\% + 73.3\%) = 80\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 104 of 113

#### Radar Type 5 - Verification of Detection

Trail #	Detection = 1 No Detection = 0
1	1
2	1
3	1
4	1
5	1
6	1
7	1
8	1
9	1
10	1
11	1
12	1
13	1
14	1
15	1
16	1
17	1
18	1
19	1
20	1
21	1
22	1
23	1
24	1
25	1
26	1
27	1
28	1
29	1
30	1
<b>Detection Percentage</b>	<b>100% (&gt;60%)</b>

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 105 of 113

#### Radar Type 6 - Verification of Detection

Trail #	Detection = 1 No Detection = 0
1	1
2	1
3	1
4	1
5	1
6	1
7	0
8	1
9	1
10	0
11	1
12	1
13	1
14	1
15	1
16	1
17	1
18	1
19	1
20	1
21	1
22	1
23	0
24	1
25	1
26	1
27	0
28	0
29	1
30	1
<b>Detection Percentage</b>	<b>83.3% (&gt;60%)</b>

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 106 of 113

#### Measurement Uncertainty Time/Power

Measurement uncertainty	- Time	4%
	- Power	1.33dB

#### Traceability

##### Test Equipment Used

0072, 0083, 0098, 0116, 0132, 0158, 0313, 0314, 0193, 0223, 0252, 0253, 0251, 0256, 0328, 0329

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 7. PHOTOGRAPHS

### 7.1. Radiated Spurious Emissions >1 GHz



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 7.2. Conducted Emissions (150 kHz - 30 MHz)



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 7.3. General Measurement Test Set-Up




---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 7.4. Dynamic Frequency Selection Test Set-Up


**General DFS Test Setup**

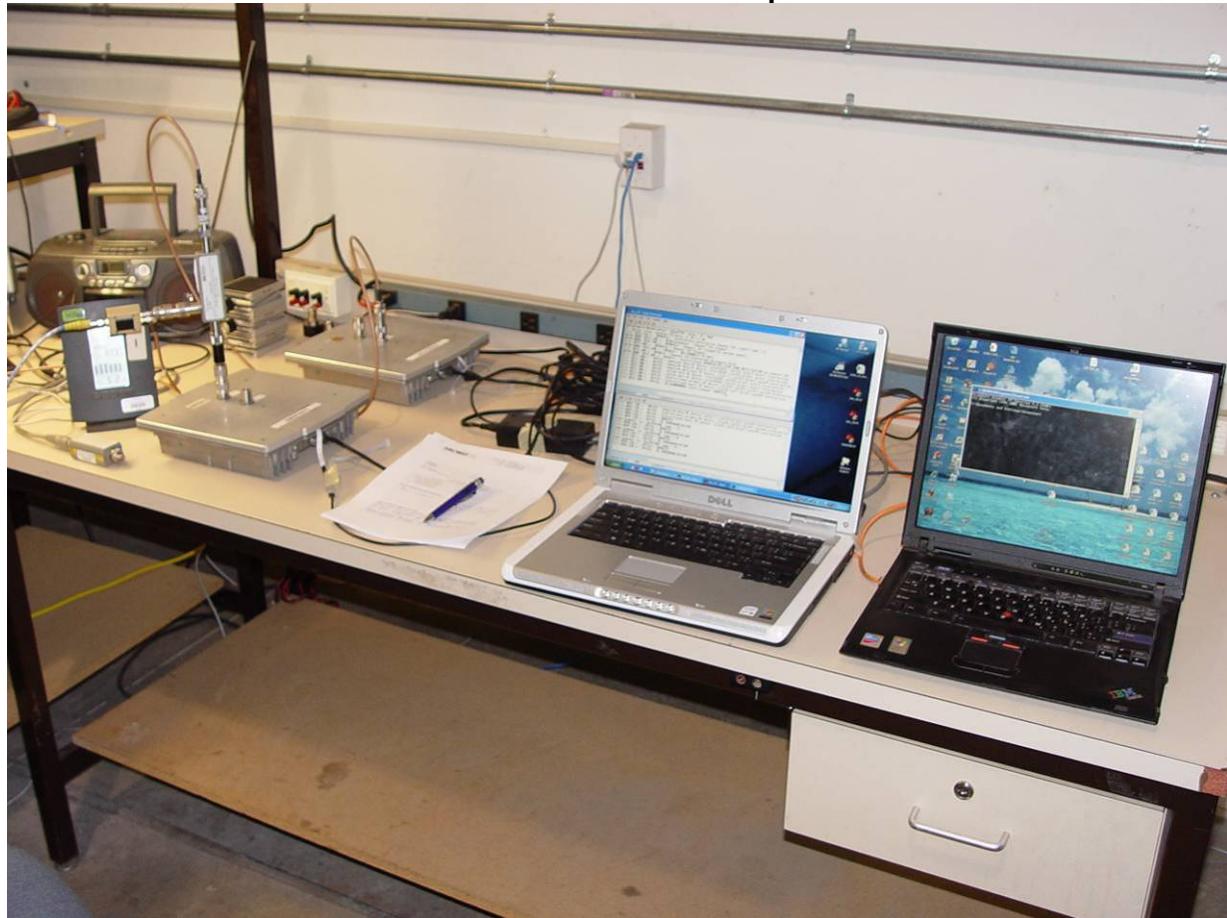

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### DFS Test Equipment

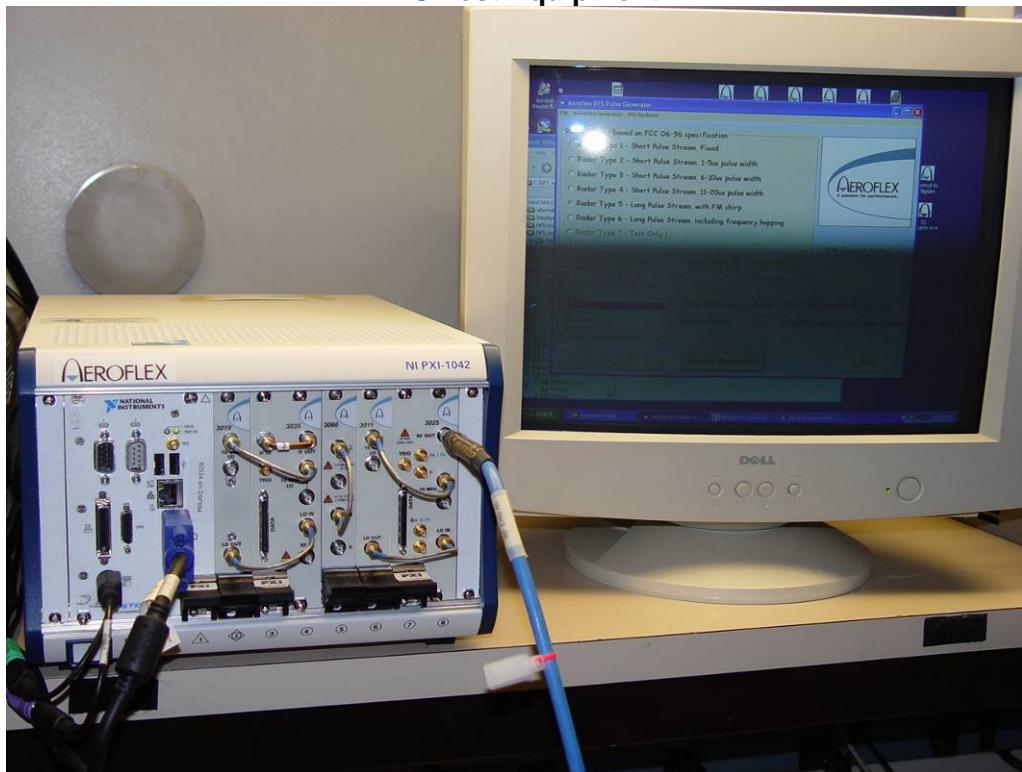

### DFS Test Equipment



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Axxcelera AB-MAX CPE  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** AXXC02-A3b Rev A  
**Issue Date:** 6th November 2007  
**Page:** 112 of 113

## **8. TEST EQUIPMENT DETAILS**

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907
	Radar Signal Generator	Aeroflex	3025, 3010, 3010/11 Opt 1	
	Analyzer	Aeroflex	3035, 3011, 3010/11 Opt 1	
	PXI Chassis	Aeroflex	82536	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200  
Pleasanton, CA 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)