



DATE: 06 September 2015

**I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
Corning Optical Communication
Wireless**

Equipment under test:

**ONE- Optical Network Evolution Wireless
Platform**

MRU (Mid Power Remote Unit)

**WCS-ESMR/CELL-PCS-LTE-AWS
(PCS Section)**

Tested:



M. Zohar

Approved by:



D. Shidlow

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



**Measurement/Technical Report for
Corning Optical Communication Wireless
ONE- Optical Network Evolution Wireless
Platform**

(PCS SECTION)

FCC ID: OJF1MRU19

This report concerns: Original Grant: X
 Class II change:
 Class I change:

Equipment type: PCS Licensed Transmitter

Limits used: 47CFR Parts 2, 24

Measurement procedure used is ANSI C63.4-2003.
Substitution Method used as in ANSI/TIA-603-C: 2004

Application for Certification prepared by:	Applicant for this device: (different from "prepared by")
R. Pinchuck	Habib Riazi
ITL (Product Testing) Ltd.	Corning Optical Communication Wireless
1 Bat Sheva St.	13221 Woodland Park Rd., Suite #400
Lod 7120101	Herndon, VA. 20171
Israel	U.S.A.
e-mail rpinchuck@itl.co.il	Tel: +1-541-758-2880
	Fax: +1-703-848-0260
	e-mail: RiaziH@corning.com



TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	Justification	7
2.2	EUT Exercise Software	7
2.3	Special Accessories	7
2.4	Equipment Modifications	7
2.5	Configuration of Tested System	8
3.	TEST SET-UP PHOTOS	9
4.	PEAK OUTPUT POWER PCS	12
4.1	Test Specification	12
4.2	Test procedure	12
4.3	Test Results	12
4.4	Test Equipment Used; Peak Output Power PCS	16
5.	OCCUPIED BANDWIDTH PCS	17
5.1	Test Specification	17
5.2	Test Procedure	17
5.3	Test Results	18
5.4	Test Equipment Used; Occupied Bandwidth PCS	25
6.	SPURIOUS EMISSIONS AT ANTENNA TERMINALS PCS	26
6.1	Test Specification	26
6.2	Test Procedure	26
6.3	Test Results	26
6.4	Test Equipment Used; Out of Band Emission at Antenna Terminals PCS	30
7.	BAND EDGE SPECTRUM PCS	31
7.1	Test Specification	31
7.2	Test procedure	31
7.3	Test Results	31
7.4	Test Equipment Used; Band Edge Spectrum PCS	35
8.	SPURIOUS EMISSIONS (RADIATED) PCS	36
8.1	Test Specification	36
8.2	Test Procedure	36
8.3	Results Table	37
8.4	Test Instrumentation Used, Radiated Measurements	38
9.	INTERMODULATION CONDUCTED	39
9.1	Test Procedure	39
9.2	Test Results	39
9.3	Test Equipment Used; Intermodulation Conducted	41
10.	INTERMODULATION RADIATED	42
10.1	Test Procedure	42
10.2	Test Results	43
10.3	Test Instrumentation Used; Radiated Measurements Intermodulation	45
11.	APPENDIX A - CORRECTION FACTORS	46
11.1	Correction factors for CABLE	46
11.2	Correction factors for Bilog ANTENNA	47
11.3	Correction factors for Horn ANTENNA	48
11.4	Correction factors for Horn ANTENNA	49
11.5	Correction factors for ACTIVE LOOP ANTENNA	50



1. General Information

1.1 Administrative Information

Manufacturer:	Corning Optical Communication Wireless
Manufacturer's Address:	13221 Woodland Park Rd., Suite #400 Herndon, VA. 20171 U.S.A. Tel: +1-541-758-2880 Fax: +1-703-848-0260
Manufacturer's Representative:	Habib Riazi
Equipment Under Test (E.U.T):	ONE- Optical Network Evolution Wireless Platform
Equipment Model No.:	MRU (Mid Power Remote Unit)
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	08.03.2015
Start of Test:	08.03.2015
End of Test:	23.03.2015
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St, Lod, Israel 7116002
Test Specifications:	FCC Parts 2, 24



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by/registered with the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number US1004.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 Product Description

Modular 7 band Enabled Mid Power Neutral Host Solution –
Supported modular frequency bands

700, ESMR+CELL, PCS, AWS, WCS

Integrated 2.5 GHz expansion ready

Composite Output Power

700, ESMR & CELL: 30dBm

PCS, AWS WCS: 33dBm

Specifications

100% Modularity

NEBS Class 2 Compliant

Small Footprint – 6 Rack Units

Highlights:

Extended ONE platform design Diversity

100% modular component design

Composite output power: 2W

Small Compact Form Factor (6U)

Non-Service Impacting Upgrades

Lower initial deployment costs

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is US1004.

1.6 Measurement Uncertainty

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB

2. System Test Configuration

2.1 Justification

The test setup was configured to closely resemble the standard installation. The EUT consists of the MRU (Mid-Power Remote Module) which is connected with the head-end ONE equipment using fiber optic cable.

The RF source signals are represented in the setup by appropriate signal generators.

An “Exercise” SW on the computer was used to enable / disable transmission of the EUT, while the EUT output was connected to the spectrum analyzer.

The system was tested under maximum gain conditions while input power level to the RIM is 0 dBm and output power at the antenna port of MRU is 33dBm for high frequency bands and 30dBm for low frequency bands.

Testing was performed on the following configurations:

Frequency Range (MHz)		
Service/Band	Downlink (DL)	Technology
700 MHz	728-757	LTE
ESMR 800	862- 869	WCDMA, LTE, GSM
CELL 850	869-894	WCDMA, LTE, GSM
PCS + G 1900	1930-1995	WCDMA, LTE, GSM
AWS 2100	2110-2155	WCDMA, LTE, GSM
WCS	2350-2360	WCDMA, LTE, GSM

2.2 EUT Exercise Software

The Element Management System ver. 1.6 used for commands delivery. These commands are used to enable/disable the EUT transmission. EUT Embedded SW versions is mru_da64_16_02.bin.

2.3 Special Accessories

No special accessories were needed in order to achieve compliance.

2.4 Equipment Modifications

No modifications were needed in order to achieve compliance.

2.5 Configuration of Tested System

Product Name	ONE Wireless Platform
Model Name	MRU (Mid Power Remote Unit) PCS
Working voltage	115VAC/48VDC
Mode of operation	Repeater
Modulations	WCDMA, LTE(64QAM), GSM
Frequency Range	1930MHz-1995MHz
Transmit power	33 dBm
Antenna Gain	12.5 dBi
DATA rate	N/A
Modulation BW	0.5MHz(GSM), 10MHz(LTE), 5MHz(WCDMA)
Temperature (°C)/ Humidity (%RH)	22°C/32%

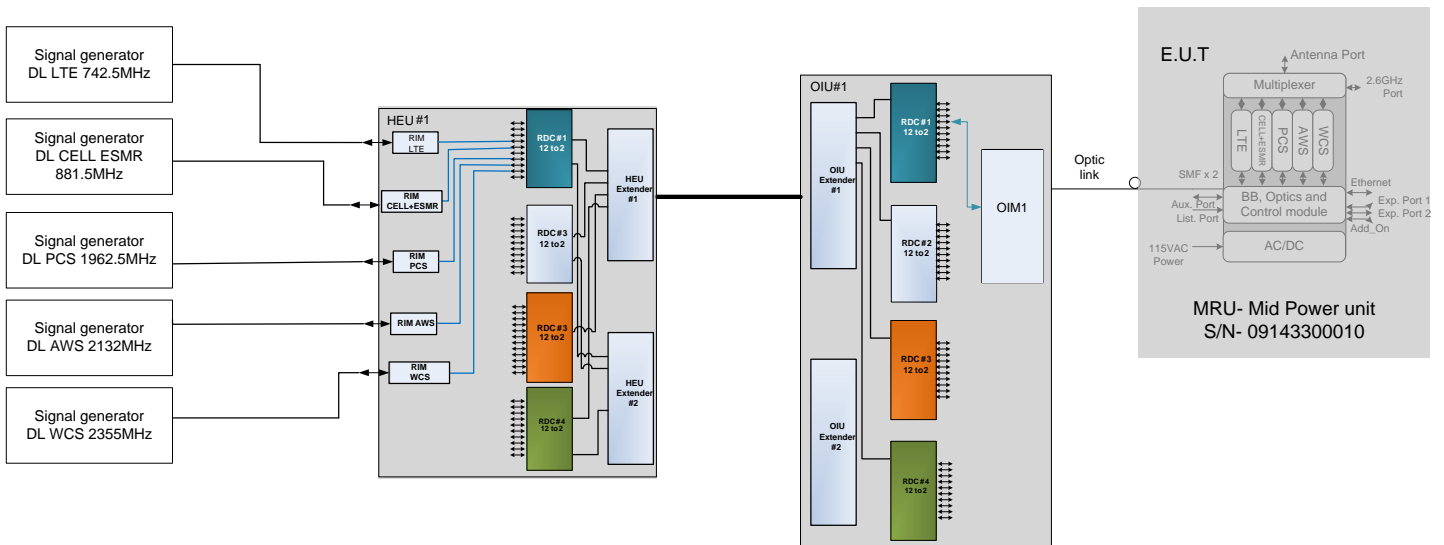


Figure 1. Test Set-up

3. Test Set-up Photos

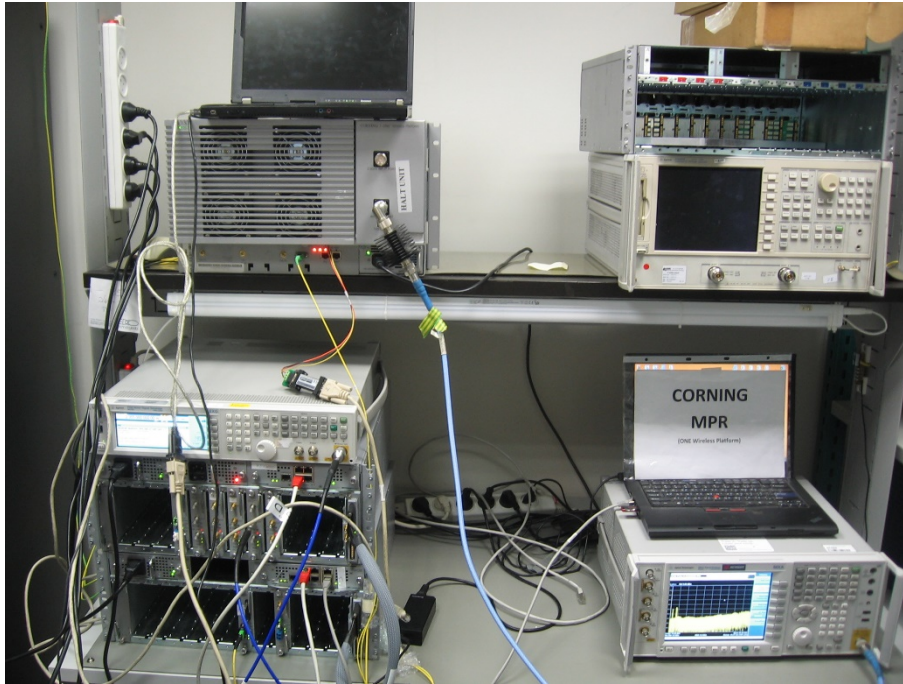


Figure 2. Conducted Emission From Antenna Port Tests

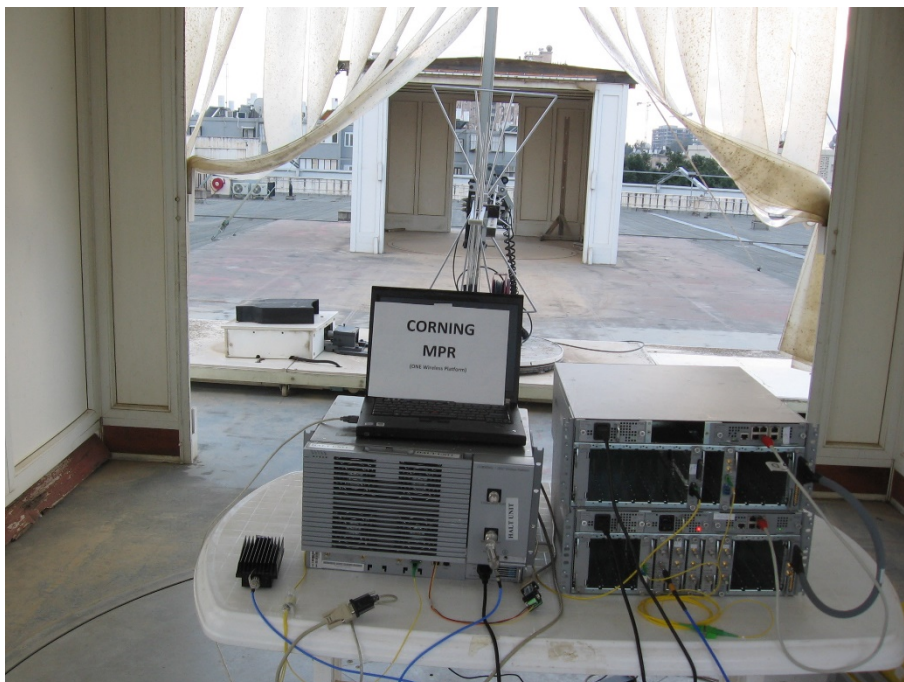


Figure 3. Radiated Emission Test

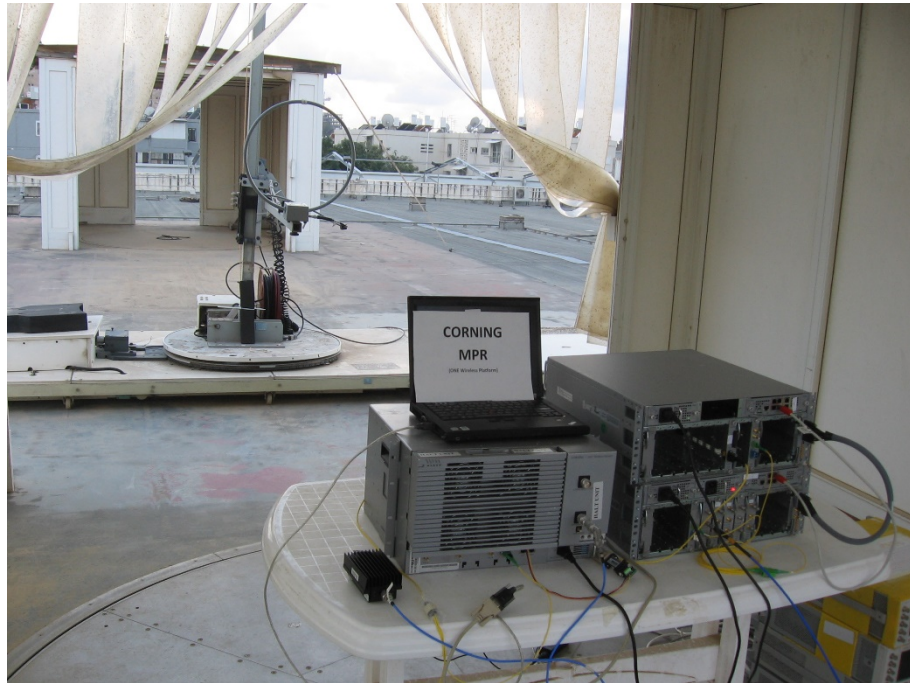


Figure 4. Radiated Emission Test

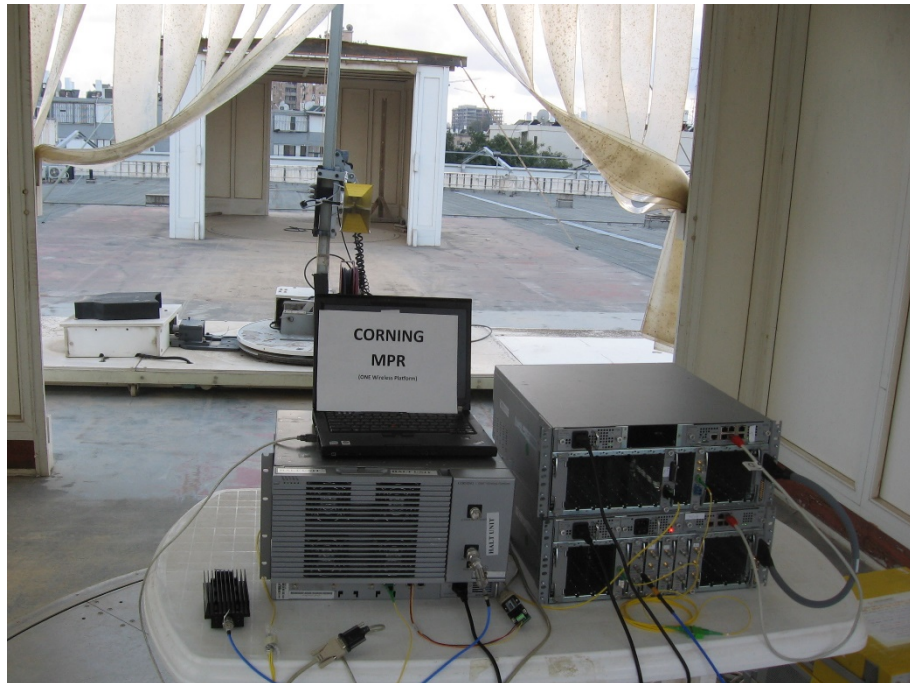


Figure 5. Radiated Emission Test

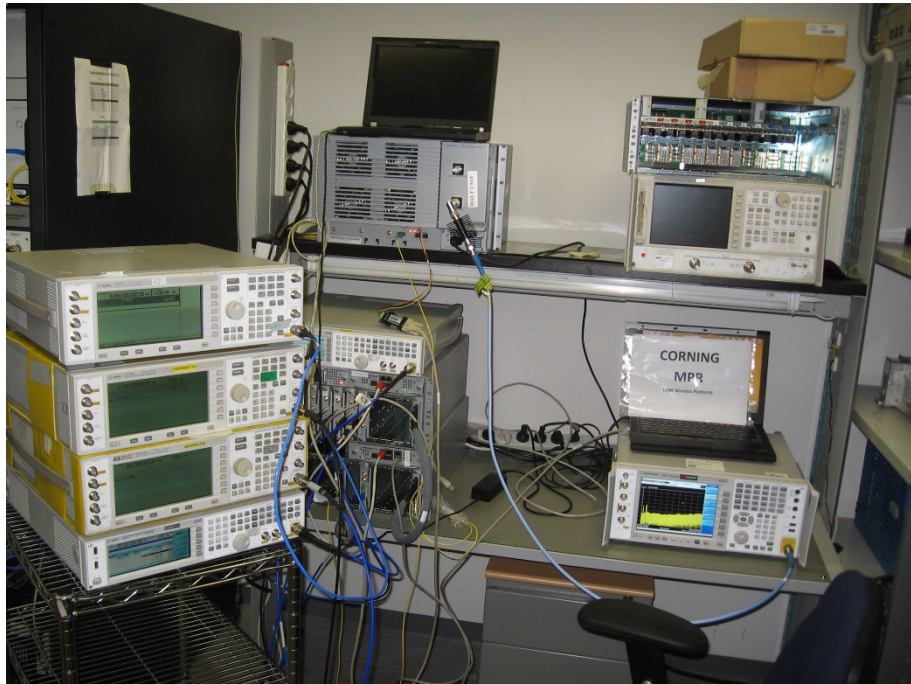


Figure 6. Intermodulation Conducted Emission Test

4. Peak Output Power PCS

4.1 Test Specification

FCC Part 24, Subpart E

4.2 Test procedure

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (loss = 31.3 dB). The E.U.T. RF output was modulated with W-CDMA, GSM and LTE 64QAM. Special attention was taken to prevent Spectrum Analyzer RF input overload. Peak Power Output must not exceed 100 Watts (50dBm).

4.3 Test Results

Modulation	Operation Frequency (MHz)	Reading (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Specification (dBm)	Margin (dB)
LTE 64QAM	1935.0	35.6	12.5	48.1	50.0	-1.9
	1962.5	34.6	12.5	47.1	50.0	-2.9
	1990.0	35.1	12.5	47.6	50.0	-2.4
GSM	1931.2	35.6	12.5	48.1	50.0	-1.9
	1960.0	34.8	12.5	47.3	50.0	-2.7
	1993.8	33.6	12.5	46.1	50.0	-3.9
W-CDMA	1932.5	36.6	12.5	49.1	50.0	-0.9
	1960.0	34.0	12.5	46.5	50.0	-3.5
	1992.5	34.7	12.5	47.2	50.0	-2.8

Figure 7 Peak Output Power PCS

See additional information in *Figure 8 to Figure 16*.

JUDGEMENT: Passed by 0.9 dB

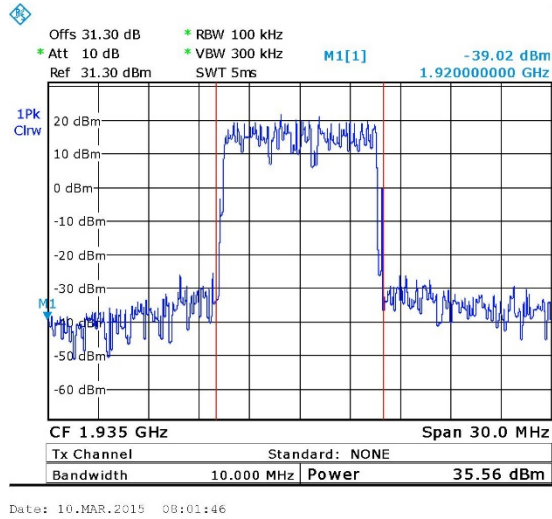


Figure 8. — LTE 64QAM 1935.00 MHz

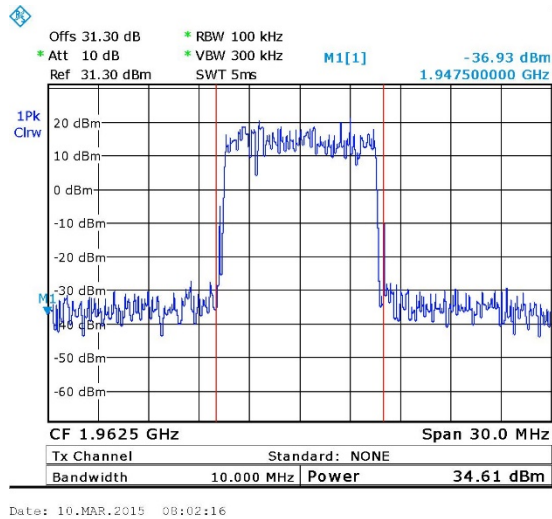


Figure 9. — LTE 64QAM 1962.50 MHz



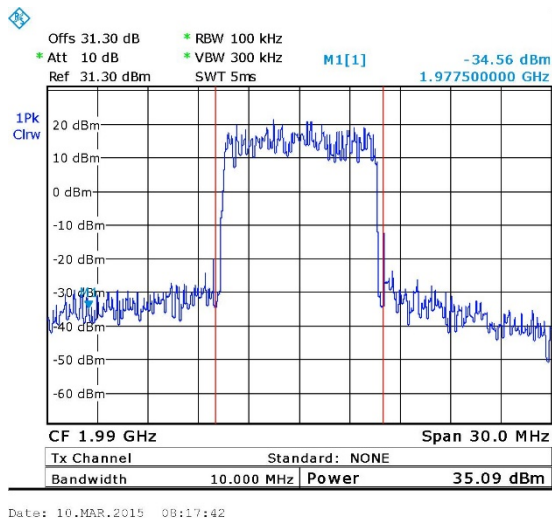


Figure 10. — LTE 64QAM 1990.00 MHz

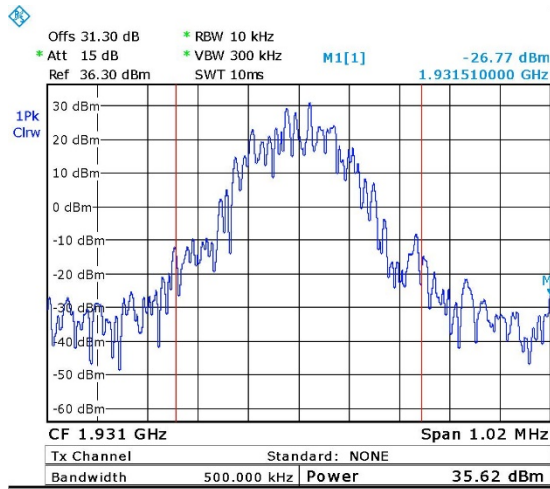


Date: 10.MAR.2015 08:22:45

Figure 11. — GSM -1931.20 MHz

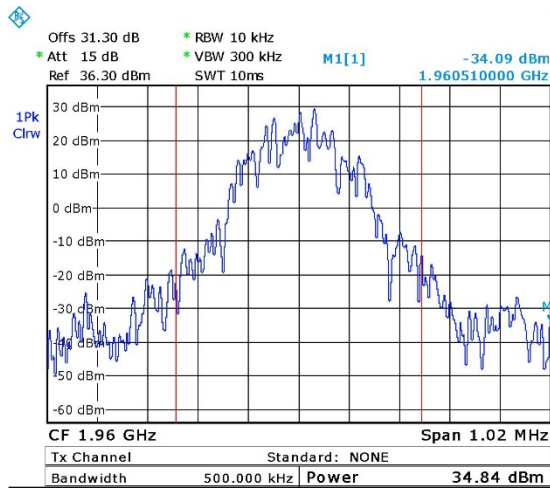


Date: 10.MAR.2015 08:30:41

Figure 12. — GSM -1960.00 MHz

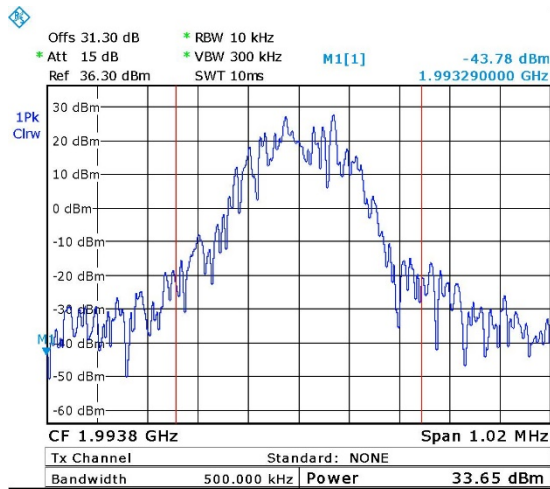


Date: 10.MAR.2015 08:29:52

Figure 13. — GSM -1993.80 MHz

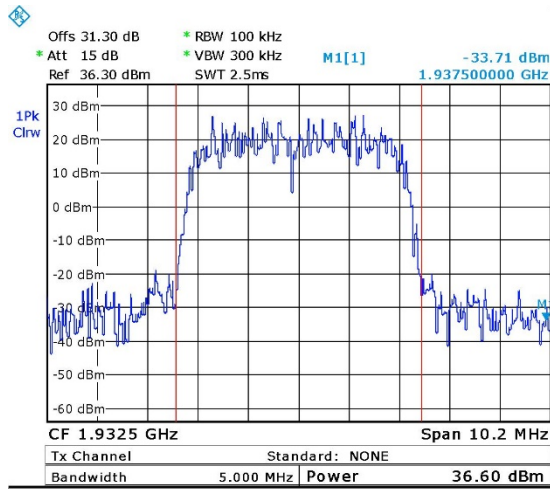


Date: 10.MAR.2015 08:32:22

Figure 14. — W-CDMA - 1932.50 MHz

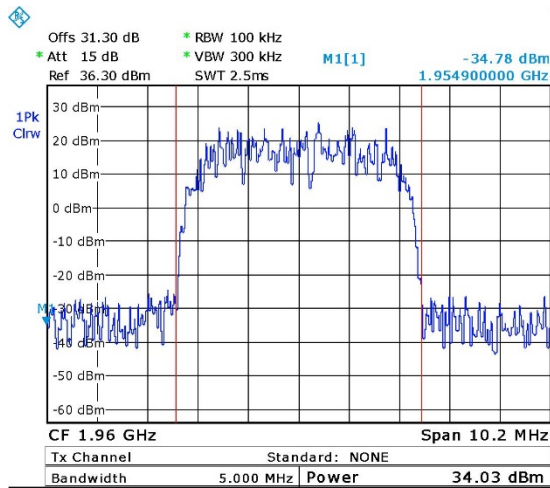

Date: 10.MAR.2015 08:32:54

Figure 15. — W-CDMA - 1960.00 MHz

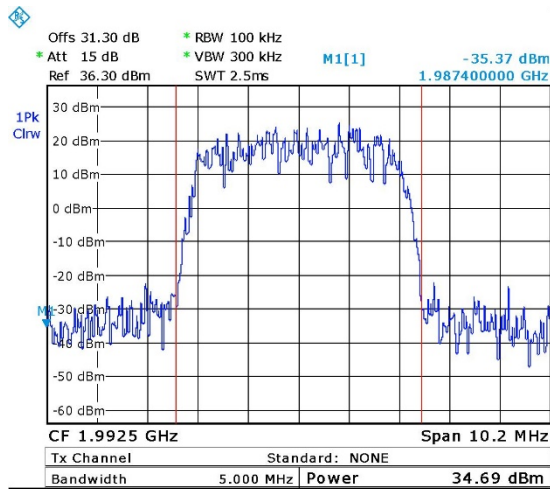

Date: 10.MAR.2015 08:33:22

Figure 16. — W-CDMA - 1992.50 MHz



4.4 Test Equipment Used; Peak Output Power PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	1 year
Spectrum Analyzer	R&S	FSL6	100194	January 1, 2015	1 year
Signal Generator	Agilent	N5172B	MY48180244	July 16, 2014	1 year
30 dB Attenuator	JFW	50FHC-030-50	43608 46-140-1	March 8, 2015	1 month

Figure 17 Test Equipment Used



5. Occupied Bandwidth PCS

5.1 Test Specification

FCC Part 2, Section 1049

5.2 Test Procedure

The E.U.T. was set to the applicable test frequency in the 1930-1995 MHz band. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (at the output test) and an appropriate coaxial cable (loss=31.3 dB). The spectrum analyzer was set to proper resolution B.W. OBW function (99%) was employed for these evaluation
Occupied bandwidth measured was repeated in the input terminal of the E.U.T.



5.3 Test Results

Modulation		Operating Frequency (MHz)	Reading (MHz)
LTE 64QAM	Input	1935.00	8.94
	Output	1935.00	8.94
	Input	1962.50	8.94
	Output	1962.50	8.94
	Input	1990.00	8.98
	Output	1990.00	8.94
GSM	Input	1931.20	0.24
	Output	1931.20	0.24
	Input	1960.00	0.24
	Output	1960.00	0.24
	Input	1993.80	0.24
	Output	1993.80	0.24
W-CDMA	Input	1932.50	4.17
	Output	1932.50	4.17
	Input	1960.00	4.17
	Output	1960.00	4.17
	Input	1992.50	4.17
	Output	1992.50	4.15

Figure 18 Occupied Bandwidth PCS

See additional information in *Figure 19* to *Figure 36*.

JUDGEMENT: Passed

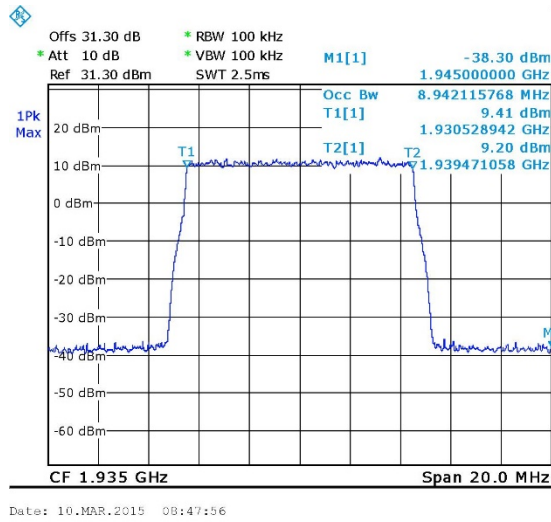


Figure 19. — LTE 64QAM Input 1935.00 MHz

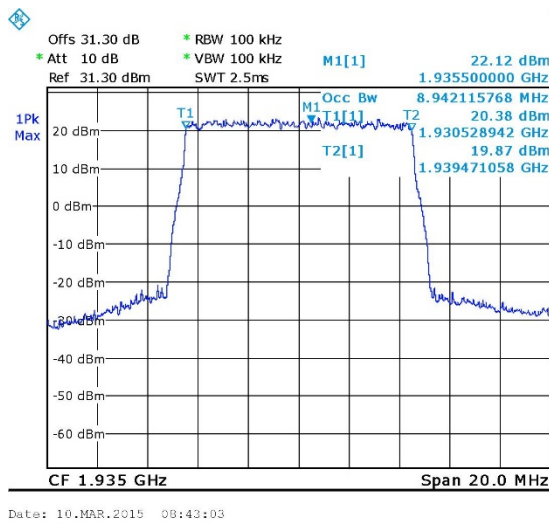


Figure 20. — LTE 64QAM Output 1935.00 MHz



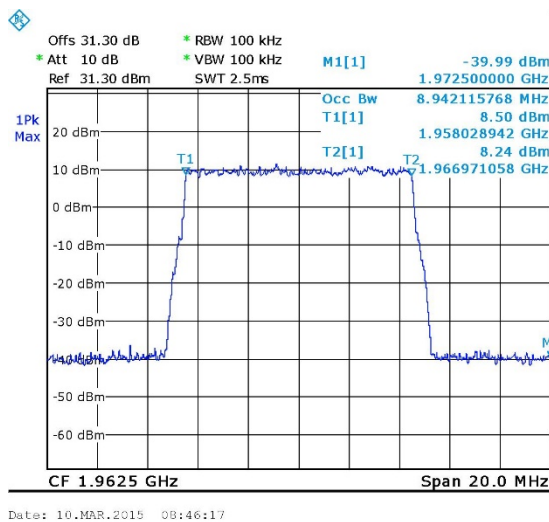


Figure 21. — LTE 64QAM Input 1962.50 MHz

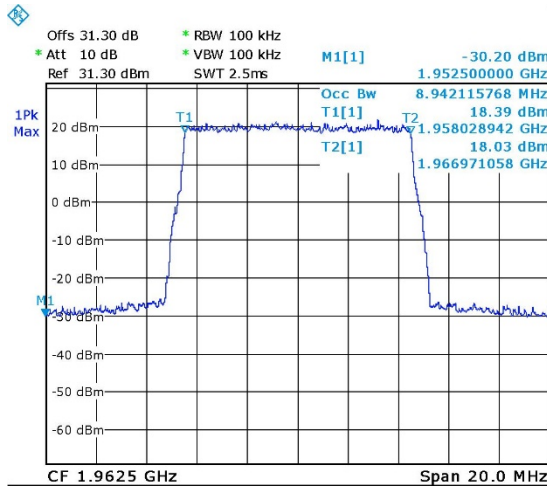


Date: 10.MAR.2015 08:43:50

Figure 22. — LTE 64QAM Output 1962.50 MHz

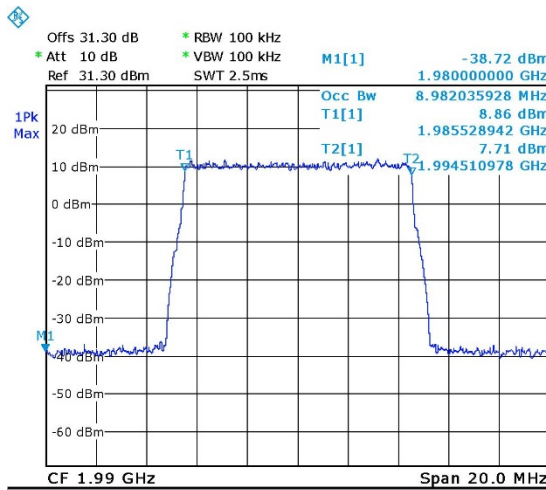

Date: 10.MAR.2015 08:45:54

Figure 23. — LTE 64QAM Input 1990.00 MHz

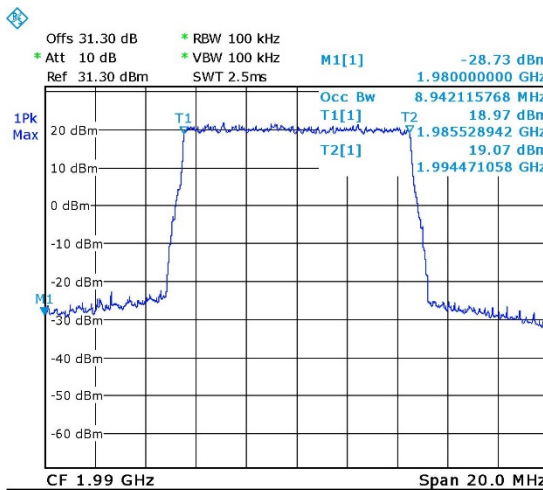

Date: 10.MAR.2015 08:44:22

Figure 24. — LTE 64QAM Output 1990.00 MHz

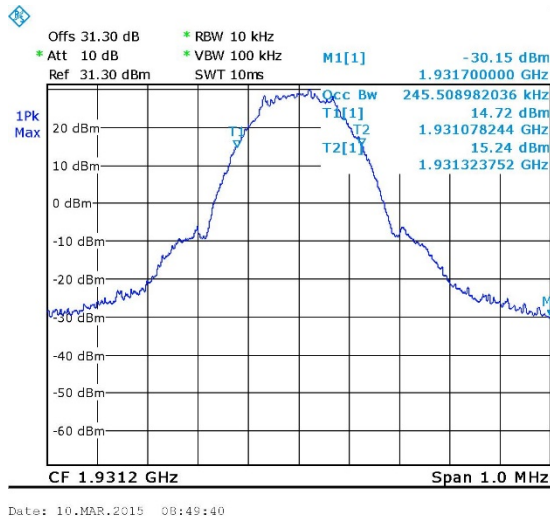


Figure 25. — GSM - Input 1931.20 MHz

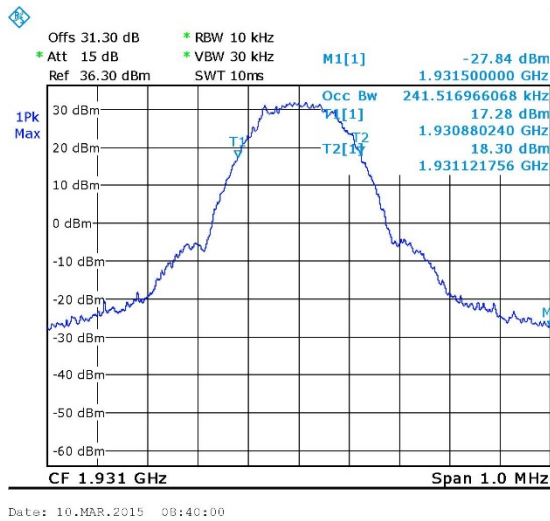


Figure 26. — GSM - Output 1931.20 MHz



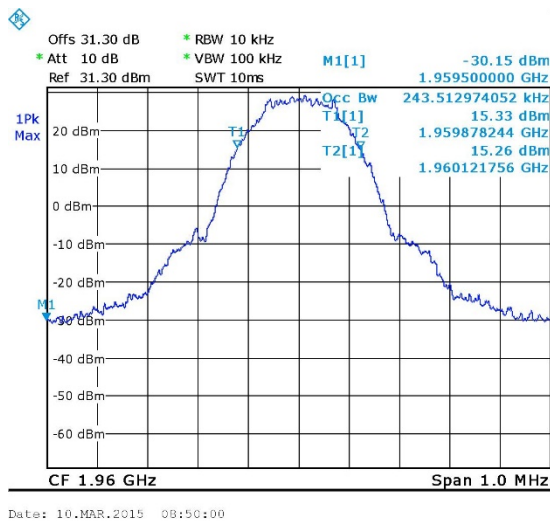


Figure 27. — GSM - Input 1960.00 MHz

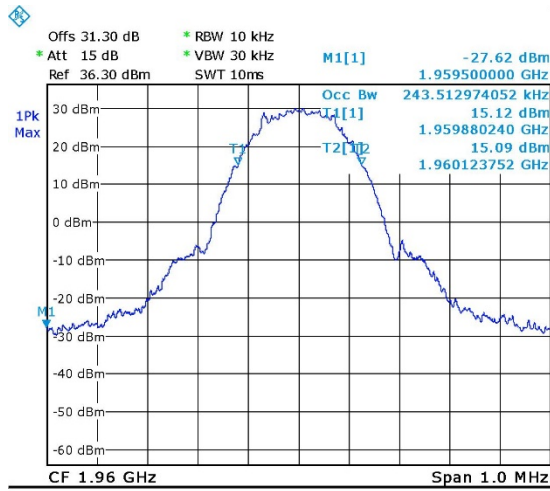


Date: 10.MAR.2015 08:40:38

Figure 28. — GSM - Output 1960.00 MHz

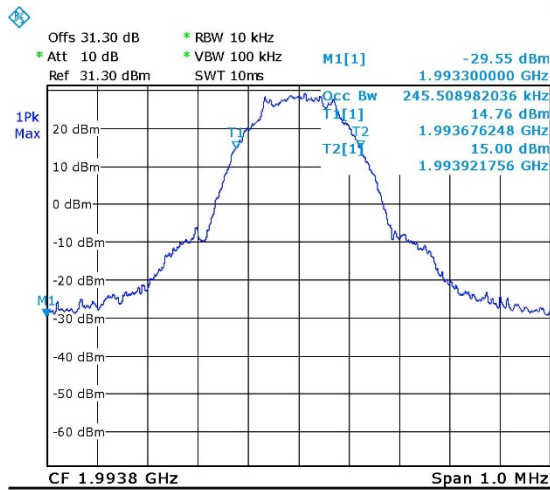

Date: 10.MAR.2015 08:50:28

Figure 29. — GSM - Input 1993.80 MHz

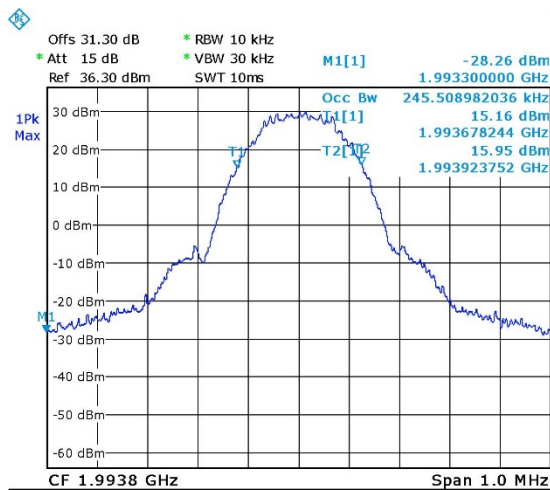

Date: 10.MAR.2015 08:41:08

Figure 30. — GSM - Output 1993.80 MHz

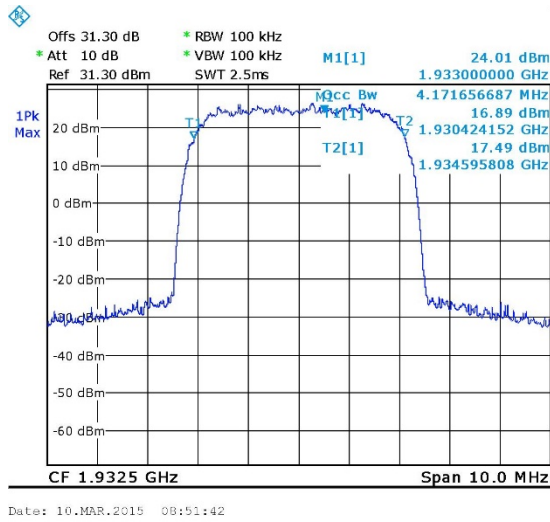


Figure 31. — W-CDMA - Input 1932.50 MHz

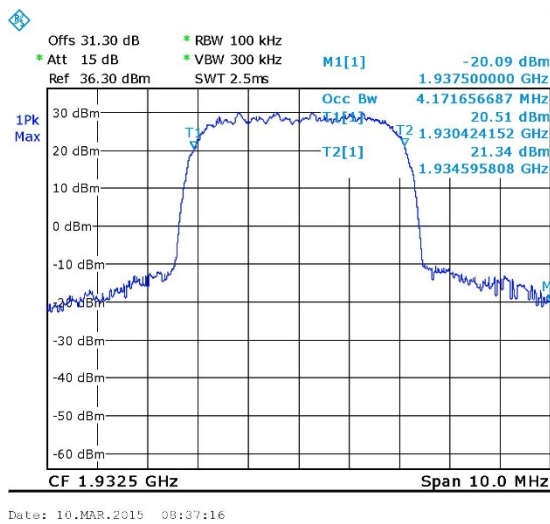


Figure 32. — W-CDMA - Output 1932.50 MHz

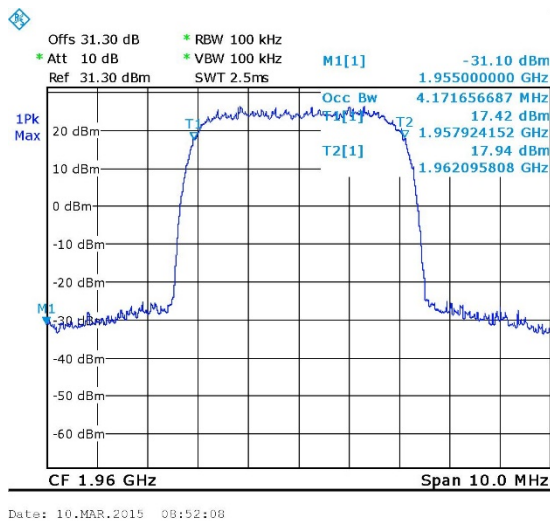


Figure 33. — W-CDMA - Input 1960.00 MHz

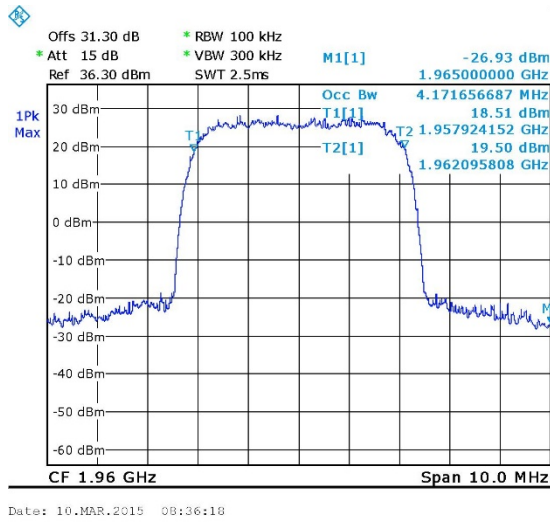


Figure 34. — W-CDMA - Output 1960.00 MHz

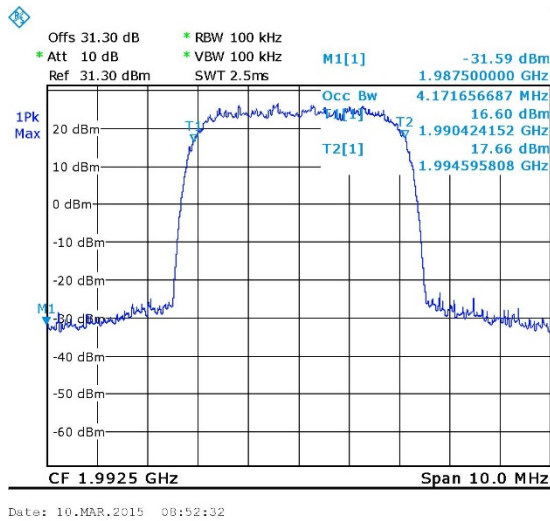


Figure 35. — W-CDMA - Input 1992.50 MHz

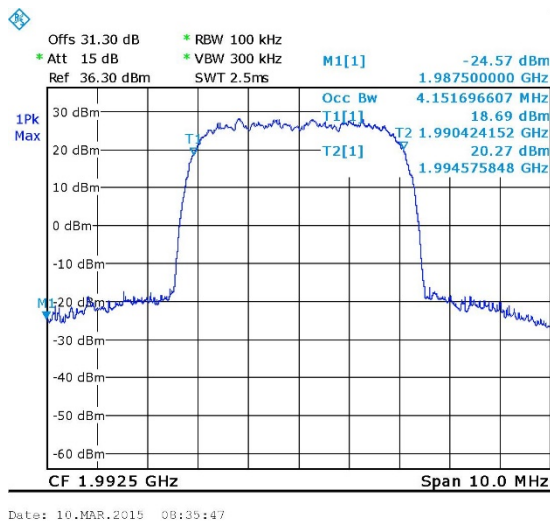


Figure 36. — W-CDMA - Output 1992.50 MHz



5.4 Test Equipment Used; Occupied Bandwidth PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	1 year
Spectrum Analyzer	R&S	FSL6	100194	January 1, 2015	1 year
Signal Generator	Agilent	N5172B	MY48180244	July 16, 2014	1 year
30 dB Attenuator	JFW	50FHC-030-50	43608 46-140-1	March 8, 2015	1 month

Figure 37 Test Equipment Used



6. Spurious Emissions at Antenna Terminals PCS

6.1 Test Specification

FCC Part 24, Subpart E, Section 238; FCC Part 2.1051

6.2 Test Procedure

The power of any emission outside of the authorized operating frequency ranges (1930-1990 MHz) must be attenuated below the transmitting power (P) by a factor of at least $43 + \log(P)$ dB, yielding -13dBm .

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (31.3 dB). The spectrum analyzer was set to 1 kHz resolution BW for the frequency range 9.0-150.0 kHz, 10 kHz for the frequency range 150 kHz–1.0 MHz, 100 kHz for the frequency range 1.0 MHz – 30 MHz, and 1MHz for the frequency range 30 MHz - 20.0 GHz.

6.3 Test Results

JUDGEMENT: Passed

See additional information in *Figure 38* to *Figure 46*.

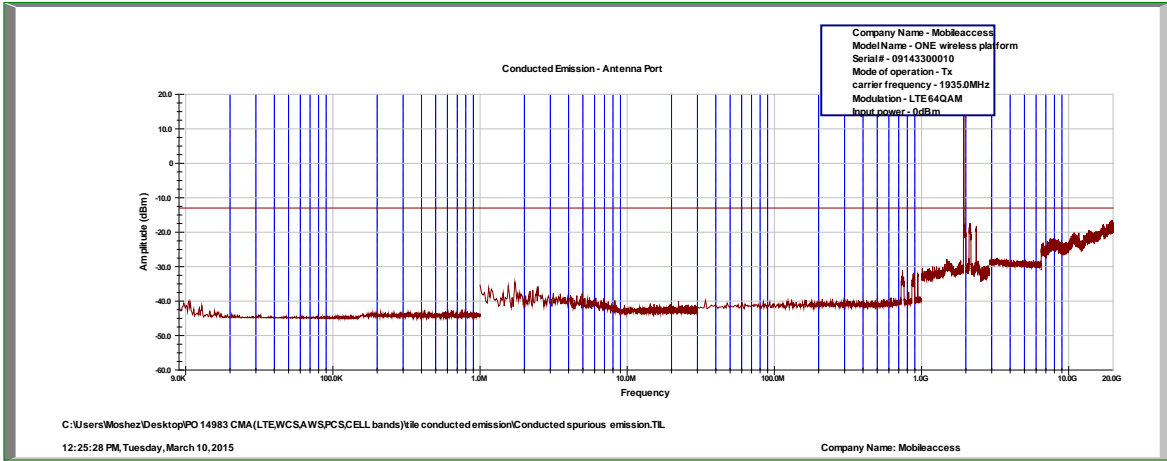


Figure 38. — LTE 64QAM - 1935.0 MHz

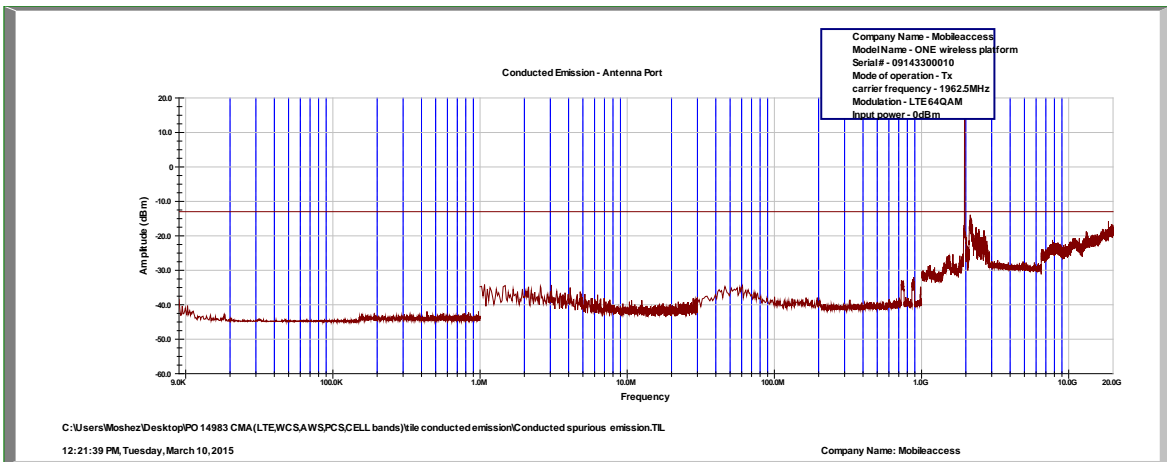


Figure 39. — LTE 64QAM - 1962.5 MHz

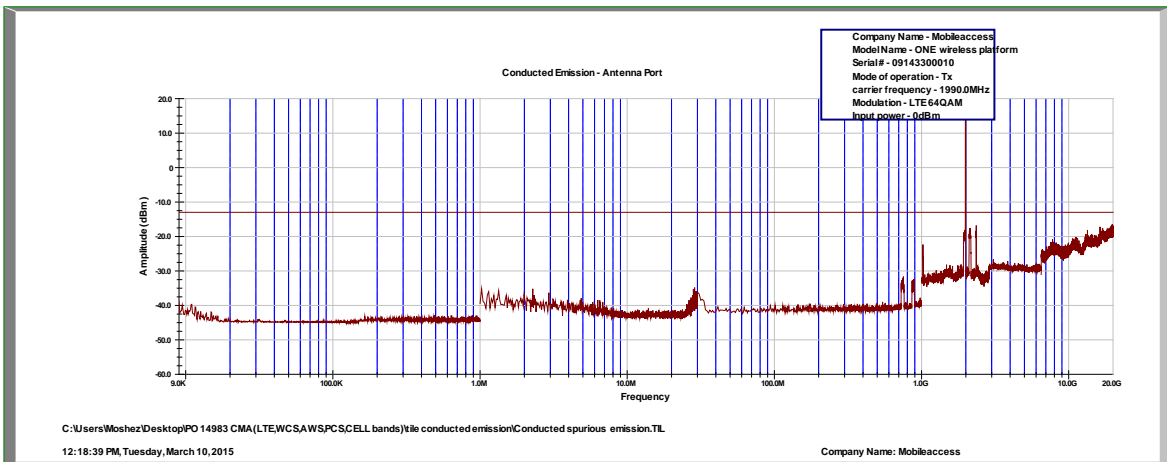


Figure 40. — LTE 64QAM - 1990.0 MHz

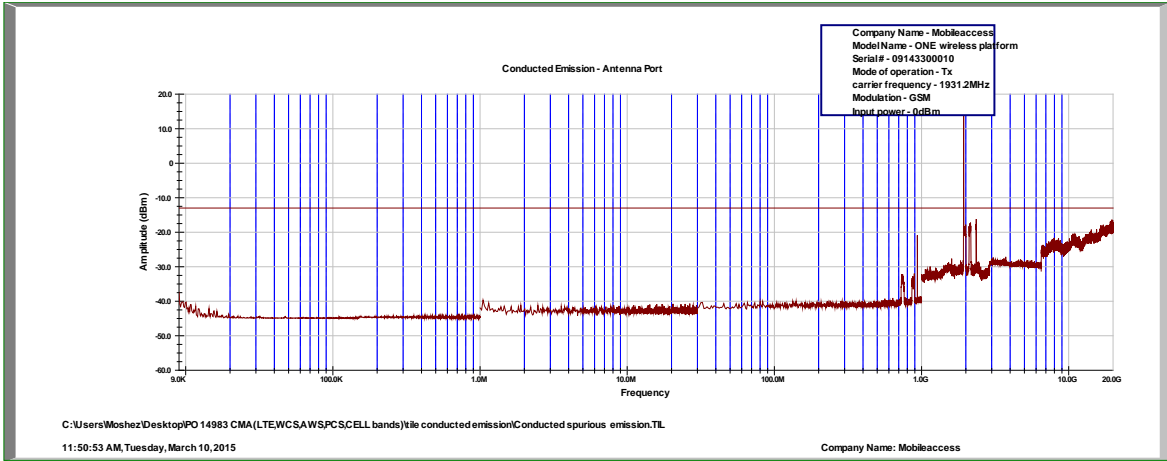


Figure 41. — GSM - 1931.2 MHz

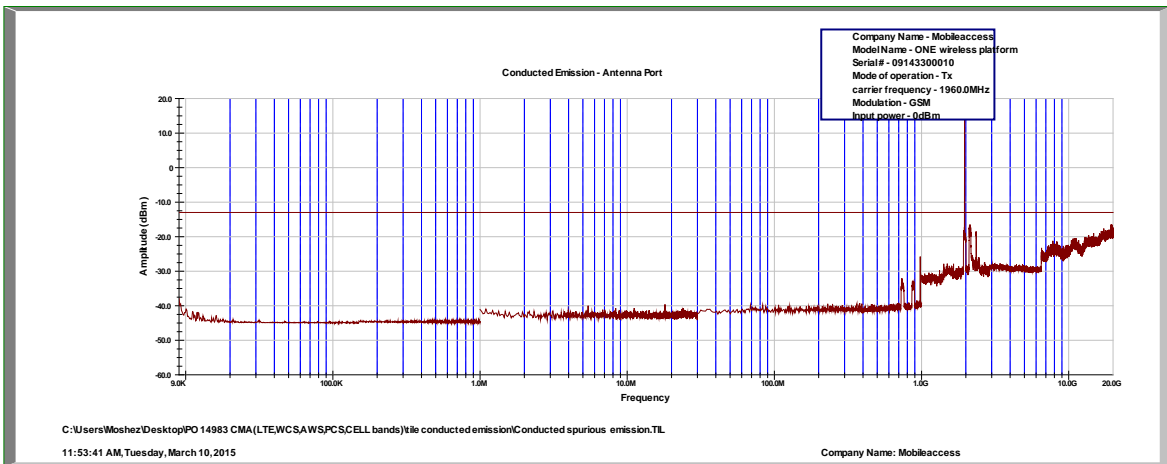


Figure 42. — GSM - 1960.0 MHz

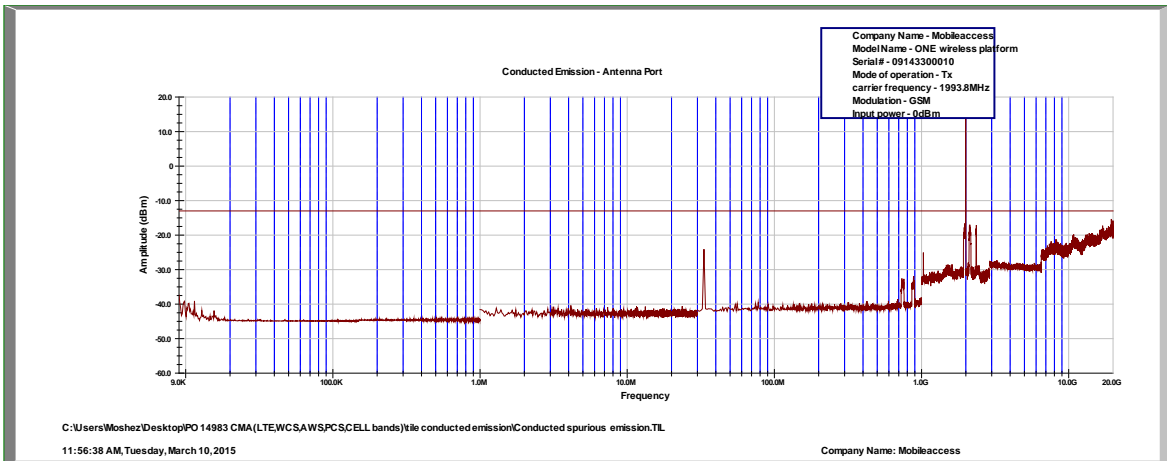


Figure 43. — GSM - 1993.8 MHz

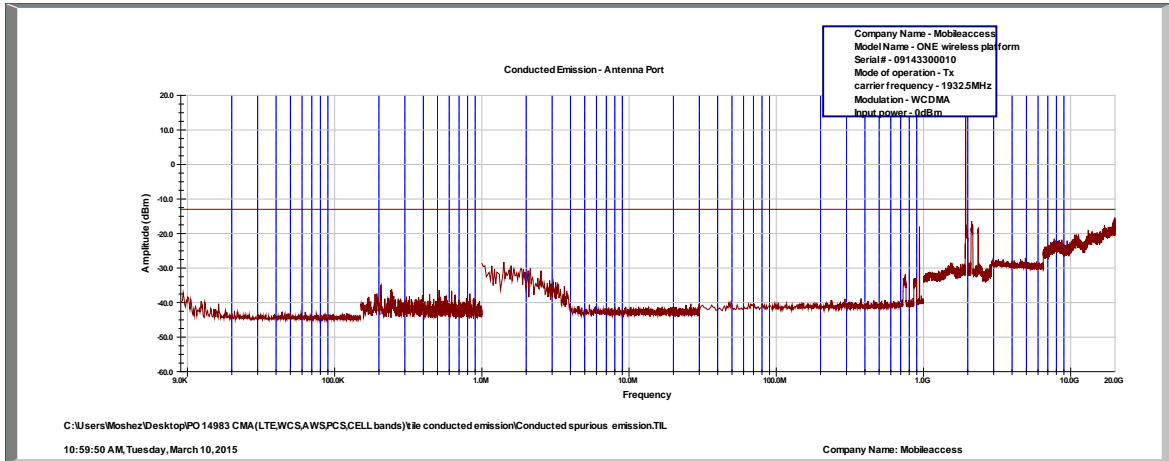


Figure 44. — W-CDMA - 1932.5 MHz

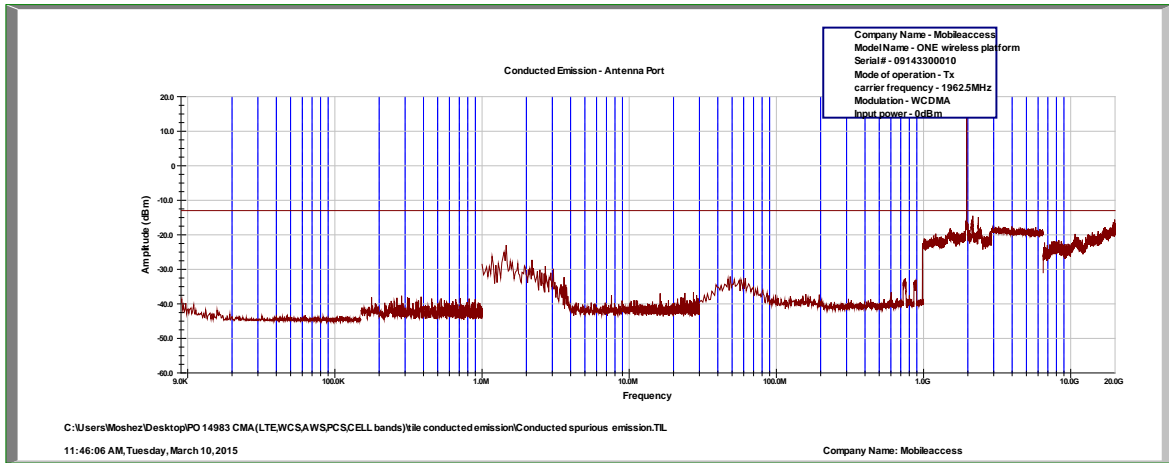


Figure 45. — W-CDMA - 1962.5 MHz

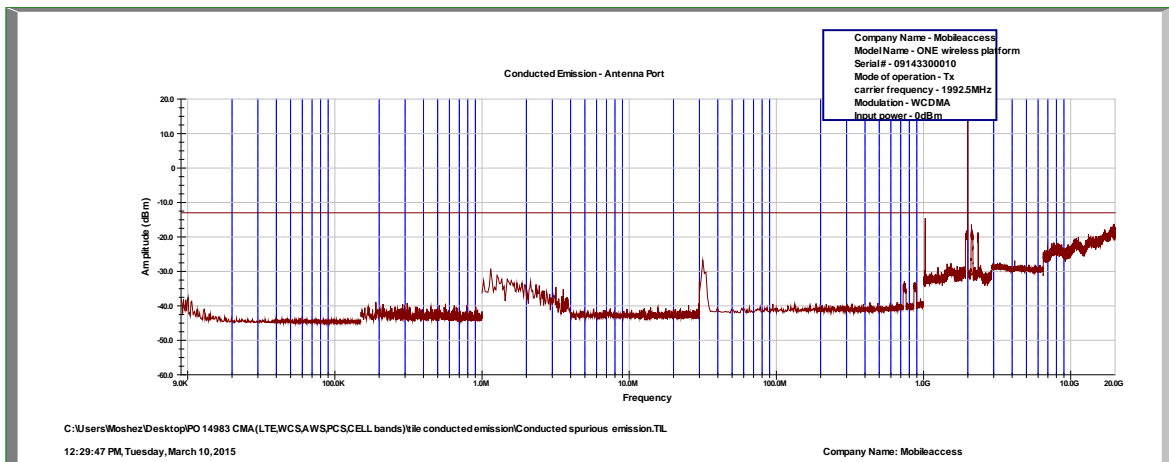


Figure 46. — W-CDMA - 1992.5 MHz



6.4 Test Equipment Used; Out of Band Emission at Antenna Terminals PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	1 year
Spectrum Analyzer	R&S	FSL6	100194	January 1, 2015	1 year
Signal Generator	Agilent	N5172B	MY48180244	July 16, 2014	1 year
30 dB Attenuator	JFW	50FHC-030-50	43608 46-140-1	March 8, 2015	1 month

Figure 47 Test Equipment Used



7. Band Edge Spectrum PCS

7.1 Test Specification

FCC Part 24, Subpart E, Section 238; FCC Part 2.1051

7.2 Test procedure

The power of any emission outside of the authorized operating frequency ranges (1930.00-1995.00 MHz) must be attenuated below the transmitting power (P) by a factor of at least $43 + \log(P)$ dB, yielding -13dBm .

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (31.3 dB).

The spectrum analyzer was set to 100 kHz R.B.W.

7.3 Test Results

Modulation	Operation Frequency (MHz)	Band Edge Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
LTE 64QAM	1935.00	1930.00	-24.7	-13.0	-11.7
	1990.00	1995.00	-23.1	-13.0	-10.1
GSM	1931.20	1930.00	-23.5	-13.0	-10.5
	1993.80	1995.00	-22.6	-13.0	-9.6
W-CDMA	1932.50	1930.00	-14.3	-13.0	-1.3
	1992.50	1995.00	-18.1	-13.0	-5.1

Figure 48 Band Edge Spectrum Results PCS

See additional information in *Figure 49* to *Figure 54*.

JUDGEMENT: Passed by 1.3 dB

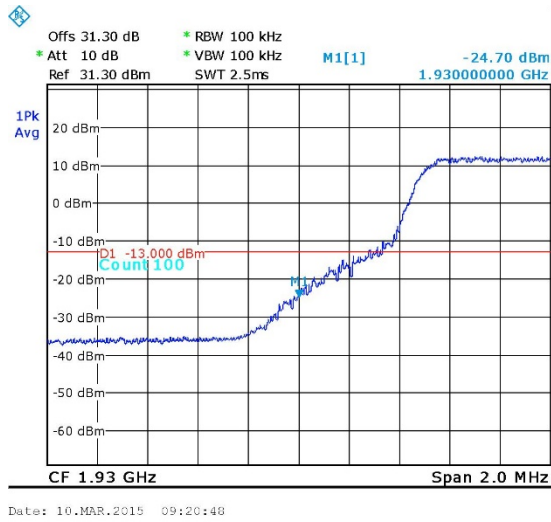


Figure 49. — LTE 64QAM 1935.00 MHz



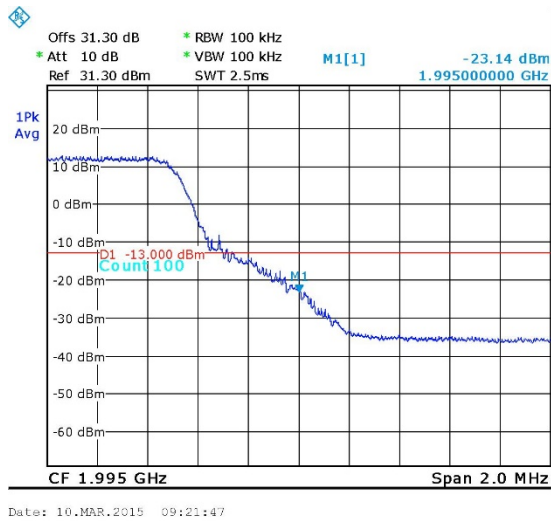


Figure 50. — LTE 64QAM 1990.00 MHz

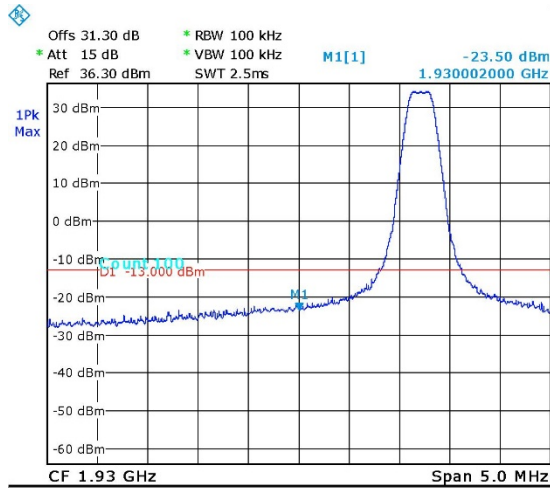


Date: 10.MAR.2015 09:26:18

Figure 51. — GSM - 1931.20 MHz

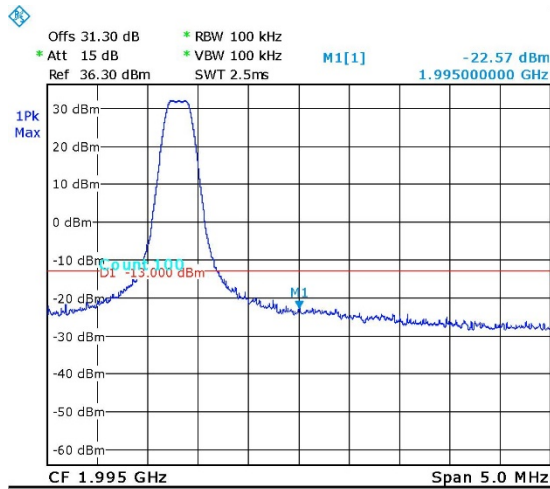


Date: 10.MAR.2015 09:31:11

Figure 52. — GSM - 1993.80 MHz

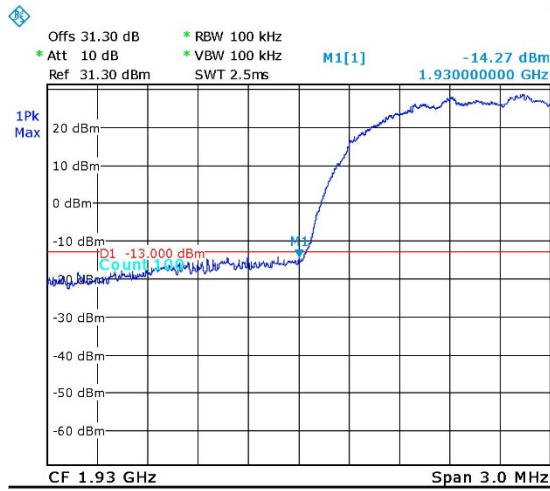

Date: 10.MAR.2015 09:36:27

Figure 53. — W-CDMA - 1932.50 MHz

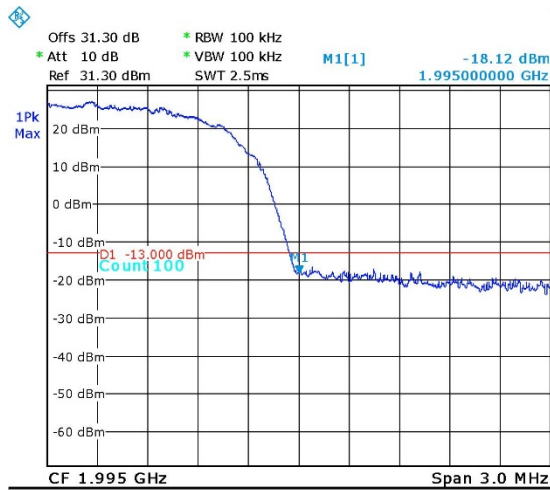

Date: 10.MAR.2015 09:37:28

Figure 54. — W-CDMA - 1992.50 MHz



7.4 Test Equipment Used; Band Edge Spectrum PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	1 year
Spectrum Analyzer	R&S	FSL6	100194	January 1, 2015	1 year
Vector Signal Generator	Agilent	N5172B	MY48180244	July 16, 2014	1 year
30 dB Attenuator	JFW	50FHC-030-50	43608 46-140-1	March 8, 2015	1 month

Figure 55 Test Equipment Used



8. Spurious Emissions (Radiated) PCS

8.1 Test Specification

FCC, Part 24, Subpart E Section 238, FCC Part 2.1053

8.2 Test Procedure

The test method was based on ANSI/TIA-603-C: 2004, Section 2.2.12

Unwanted Emissions: Radiated Spurious.

The power of any emission outside of the authorized operating frequency ranges (1930-1990 MHz) must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB, yielding -13dBm .

- (a) The E.U.T. operation mode and test set-up are as described in Section 3. A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 9 kHz-20 GHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

- (b) The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dB)}$$

P_d = Dipole equivalent power (result).

P_g = Signal generator output level.



8.3 Results Table

Carrier Channel (MHz)	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dBµV/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
1931.20	3862.4	V	81.3	-13.8	10.2	8.7	-15.3	-13.0	-2.3
1931.20	3862.4	H	81.6	-15.4	10.2	9.8	-15.8	-13.0	-2.8
1960.00	3920.0	V	81.7	-13.5	10.2	8.7	-15.0	-13.0	-2.0
1960.00	3920.0	H	81.5	-15.4	10.2	9.8	-15.8	-13.0	-2.8
1993.80	3987.6	V	78.4	-17.7	11.2	9.5	-19.4	-13.0	-6.4
1993.80	3987.6	H	81.8	-15.2	11.2	8.6	-17.8	-13.0	-4.8

Figure 56 Spurious Emission (Radiated) PCS

The E.U.T met the requirements of the FCC, Part 24, Subpart E, Section 238; FCC Part 2.1053 specifications.

JUDGEMENT: Passed by 2.0 dB



8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	R&S	ESIB7	100120	December 15, 2014	1 year
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	1 year
Active Loop Antenna	EMCO	6502	2950	November 4, 2014	1 year
Biconical Log Antenna	EMCO	3142B	1078	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years*
Horn Antenna	ARA	SWH-28	1007	March 30, 2014	2 years
40dB attenuator	Weinschel Engineering	WA 39-40-33	A1323	March 1, 2015	1 year
Signal Generator	HP	E4433B	GB40051245	July 16, 2014	1 year
Signal Generator	MARCONI	2022D	119196015	February 23, 2015	1 year
Signal Generator	HP	E4433B	GB40050702	May 16, 2013	2 years
Signal Generator	HP	E4436B	US39260774	January 7, 2015	2 years
Signal Generator	HP	ESG-4000A	1782	February 24, 2015	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Antenna Mast	ETS	2070-2	-	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

*Note – Extended to May 19, 2015

Figure 57 Test Equipment Used



9. Intermodulation Conducted

9.1 Test Procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable(loss = 31.3dB). The spectrum analyzer was set to 1 kHz resolution BW for the frequency range 9.0-150.0 kHz, 10 kHz for the frequency range 150 kHz–1.0 MHz, 100 kHz for the frequency range 1.0 MHz – 30 MHz, and 1MHz for the frequency range 30 MHz - 24.0 GHz.

5 input signals were sent simultaneously to the E.U.T. as follows:

- LTE 747 MHz CW 0 dBm
- CELL 881 MHz CW 0 dBm
- PCS 1960 MHz CW 0 dBm
- AWS: 2135 MHz CW 0 dBm
- WCS: 2355MHz CW 0 dBm

The frequency range of 9 kHz – 24.0 GHz was scanned for unwanted signals.

9.2 Test Results

See additional information in Figure 58.

JUDGEMENT: Passed

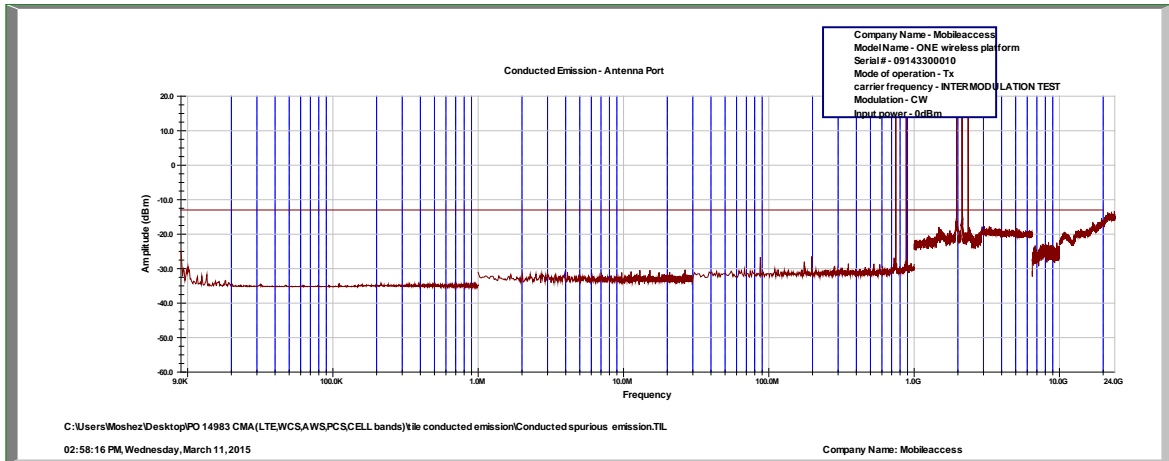


Figure 58 Intermodulation Conducted



9.3 Test Equipment Used; Intermodulation Conducted

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	1 year
Spectrum Analyzer	R&S	FSL6	100194	January 1, 2015	1 year
Vector Signal Generator	Agilent	N5182A	MY48180244	July 16, 2014	1 year
Vector Signal Generator	Agilent	N5172B	MY51350518	May 03, 2013	3 years
Vector Signal Generator	Agilent	N5172B	MY51350584	May 07, 2013	3 years
Signal Generator	HP	E4433B	GB40050702	May 16, 2013	2 years
Signal Generator	HP	E4436B	US39260774	January 07 2015	2 years
30 dB Attenuator	JFW	50FHC-030-50	43608 46-140-1	March 8, 2015	1 month

Figure 59 Test Equipment Used

10. Intermodulation Radiated

10.1 Test Procedure

The test method was based on ANSI/TIA-603-C: 2004, Section 2.2.12

Unwanted Emissions: Radiated Spurious.

The power of any emission outside of the authorized operating frequency ranges (728-758; 869-894; 1930-1990; 2110-2155 MHz; 2350-2360MHz) must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB, yielding -13dBm .

- (a) The E.U.T. operation mode and test set-up are as described in Section 2.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The E.U.T. was operated in Downlink mode at 4 different channels at center frequency of each band at the same time, transmitting at CW signal.

- (b) The frequency range 9 kHz-24 GHz was scanned and the list of the highest emissions was verified and updated accordingly. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between $0-360^\circ$, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

In the frequency range 7-22.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100 Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

- (b) The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:
 $P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dB)}$

P_d = Dipole equivalent power (result).

P_g = Signal generator output level.



5 input signals were sent simultaneously to the E.U.T. as follows:

LTE 747 MHz 0 dBm

CELL 881 MHz 0 dBm

PCS 1960 MHz 0 dBm

AWS: 2135 MHz 0 dBm

WCS: 2355MHz CW 0 dBm

Peak detector was used for this tests.

10.2 Test Results

JUDGEMENT: Passed



Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB μ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
1565.0	V	68.0	-31.9	6.7	7.6	-30.9	-13.0	-17.9
1565.0	H	66.6	-30.7	6.7	8.0	-29.4	-13.0	-16.4
3039.0	V	75.7	-22.0	9.9	8.4	-23.6	-13.0	-10.6
3039.0	H	75.8	-22.8	9.9	9.6	-23.1	-13.0	-10.1
3434.0	V	75.0	-21.1	9.9	8.4	-22.7	-13.0	-9.7
3434.0	H	76.9	-20.8	9.9	9.6	-21.1	-13.0	-8.1
4118.0	V	79.9	-16.3	11.2	9.5	-18.0	-13.0	-5.0
4118.0	H	79.1	-16.6	11.2	8.6	-19.2	-13.0	-6.2
5303.0	V	81.5	-14.0	13.1	9.7	-17.4	-13.0	-4.4
5303.0	H	82.1	-12.8	13.1	10.4	-15.5	-13.0	-2.5
3523.0	V	74.9	-20.0	13.1	9.7	-23.4	-13.0	-10.4
3523.0	H	77.0	-16.8	13.1	10.4	-19.5	-13.0	-6.5
2249.0	V	69.8	-27.6	9.0	7.7	-28.9	-13.0	-15.9
2249.0	H	69.3	-28.4	9.0	8.5	-28.9	-13.0	-15.9
1915.0	V	70.6	-27.1	6.7	7.6	-26.2	-13.0	-13.2
1915.0	H	68.3	-28.6	6.7	8.0	-27.3	-13.0	-14.3
5571.0	V	82.3	-11.7	13.5	9.9	-15.3	-13.0	-2.3
5571.0	H	82.5	-12.4	13.5	10.8	-15.0	-13.0	-2.0
3303.0	V	75.6	-20.1	9.9	8.4	-21.6	-13.0	-8.6
3303.0	H	75.9	-21.5	9.9	9.6	-21.7	-13.0	-8.7

Figure 60 Intermodulation Radiated Results



10.3 Test Instrumentation Used; Radiated Measurements Intermodulation

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	R&S	ESIB7	100120	December 15, 2014	1 year
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	1 year
Active Loop Antenna	EMCO	6502	2950	November 4, 2014	1 year
Biconical Log Antenna	EMCO	3142B	1078	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years*
Horn Antenna	A.R.A	SWH-28	1007	March 30, 2014	2 years
40dB attenuator	Weinschel Engineering	WA 39-40-33	A1323	March 1, 2015	1 year
Signal Generator	HP	E4433B	GB40051245	July 16, 2014	1 year
Signal Generator	MARCONI	2022D	119196015	February 23, 2015	1 year
Signal Generator	HP	E4433B	GB40050702	May 16, 2013	2 years
Signal Generator	HP	E4436B	US39260774	January 7, 2015	2 years
Signal Generator	HP	ESG-4000A	1782	February 24, 2015	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 Year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 Year
Antenna Mast	ETS	2070-2	-	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

*Note – Extended to May 19, 2015

Figure 61 Test Equipment Used



11. APPENDIX A - CORRECTION FACTORS

11.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

Frequency (MHz)	Cable Loss (dB)	Frequency (MHz)	Cable Loss (dB)
0.010	0.4	50.00	1.2
0.015	0.2	100.00	0.7
0.020	0.2	150.00	20.1
0.030	0.3	200.00	2.3
0.050	0.3	300.00	2.9
0.075	0.3	500.00	3.8
0.100	0.2	750.00	4.8
0.150	0.2	1000.00	5.4
0.200	0.3	1500.00	6.7
0.500	0.4	2000.00	9.0
1.00	0.4	2500.00	9.4
1.50	0.5	3000.00	9.9
2.00	0.5	3500.00	10.2
5.00	0.6	4000.00	11.2
10.00	0.8	4500.00	12.1
15.00	0.9	5000.00	13.1
20.00	0.8	5500.00	13.5
		6000.00	14.5

NOTES:

1. The cable type is SPUMA400 RF-11N(X2) and 39m long
2. The cable is manufactured by Huber + Suhner



11.2 Correction factors for Bilog ANTENNA

Model: 3142

Antenna serial number: 1250

3 meter range

FREQUENCY	AFE	FREQUENCY	AFE
(MHz)	(dB/m)	(MHz)	(dB/m)
30	18.4	1100	25
40	13.7	1200	24.9
50	9.9	1300	26
60	8.1	1400	26.1
70	7.4	1500	27.1
80	7.2	1600	27.2
90	7.5	1700	28.3
100	8.5	1800	28.1
120	7.8	1900	28.5
140	8.5	2000	28.9
160	10.8		
180	10.4		
200	10.5		
250	12.7		
300	14.3		
400	17		
500	18.6		
600	19.6		
700	21.1		
800	21.4		
900	23.5		
1000	24.3		



11.3 Correction factors for Horn ANTENNA

Model: 3115
Antenna serial number: 6142
3 meter range

FREQUENCY	Antenna Factor	FREQUENCY	Antenna Factor
(MHz)	(dB/m)	(MHz)	(dB/m)
1000	23.9	10500	38.4
1500	25.4	11000	38.5
2000	27.3	11500	39.4
2500	28.5	12000	39.2
3000	30.4	12500	39.4
3500	31.6	13000	40.7
4000	33	14000	42.1
4500	32.7	15000	40.1
5000	34.1	16000	38.2
5500	34.5	17000	41.7
6000	34.9	17500	45.7
6500	35.1	18000	47.7
7000	35.9		
7500	37.5		
8000	37.6		
8500	38.3		
9000	38.5		
9500	38.1		
10000	38.6		



11.4 Correction factors for Horn ANTENNA

Model: SWH-28
Antenna serial number: 1007
1 meter range

FREQUENCY	Antenna Factor
(MHz)	(dB/m)
18000	33.0
18500	32.9
19000	33.1
19500	33.3
20000	33.6
20500	33.6
21000	33.4
21500	33.8
22000	33.7
22500	33.9
23000	34.8
23500	34.5
24000	34.2
24500	34.8
25000	34.4
25500	35.2
26000	35.9
26500	36.0



11.5 Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2