



**DATE: 27 December 2016**

**I.T.L. (PRODUCT TESTING) LTD.**  
**FCC Radio Test Report**  
for  
**Corning Optical Communication Wireless**  
Equipment under test:  
**ONE - Optical Network Evolution DAS**

**RAU-5 Remote Antenna Unit**

**AWS, CELL/ESMR, LTE, PCS**  
**(CELL/ESMR Section)**

Tested by:

  
\_\_\_\_\_

M. Zohar

Approved by:

  
\_\_\_\_\_

D. Shidlowsky

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



# Measurement/Technical Report for Corning Optical Communication Wireless ONE - Optical Network Evolution DAS

**FCC ID: OJF1RAU5**

This report concerns: Original Grant:  
Class II change: X  
Class I change:

Equipment type: Part 20 Industrial Booster (CMRS)

Limits used: 47CFR Parts 2, 22, 20, 90

Measurement procedure used is KDB 971168 D03 v01 and  
KDB 935210 D05 v01r01.

Substitution Method used as in ANSI/TIA-603-D: 2010

Application for Certification  
prepared by:  
R. Pinchuck  
ITL (Product Testing) Ltd.  
1 Bat Sheva St.  
Lod 7120101  
Israel  
e-mail [rpinchuck@itl.co.il](mailto:rpinchuck@itl.co.il)

Applicant for this device:  
(different from "prepared by")  
Habib Riazi  
Corning Optical Communication Wireless  
13221 Woodland Park Rd., Suite #400  
Herndon, VA. 20171  
U.S.A.  
Tel: +1-541-758-2880  
Fax: +1-703-848-0260  
e-mail: [RiaziH@corning.com](mailto:RiaziH@corning.com)



# TABLE OF CONTENTS

|           |   |           |
|-----------|---|-----------|
| <b>1.</b> | <b>GENERAL INFORMATION</b> -----  | <b>5</b>  |
| 1.1       | Administrative Information .....  | 5         |
| 1.2       | List of Accreditations .....  | 6         |
| 1.3       | Product Description .....   | 7         |
| 1.4       | Test Methodology .....  | 7         |
| 1.5       | Test Facility .....   | 7         |
| 1.6       | Measurement Uncertainty.....  | 7         |
| <b>2.</b> | <b>SYSTEM TEST CONFIGURATION</b> -----                                  | <b>8</b>  |
| 2.1       | Justification.....  | 8         |
| 2.2       | EUT Exercise Software .....   | 8         |
| 2.3       | Special Accessories .....   | 8         |
| 2.4       | Equipment Modifications .....   | 8         |
| 2.5       | Configuration of Tested System .....                                    | 9         |
| <b>3.</b> | <b>TEST SET-UP PHOTOS</b> -----   | <b>11</b> |
| <b>4.</b> | <b>PEAK OUTPUT POWER CELL</b> -----                                     | <b>15</b> |
| 4.1       | Test Specification .....  | 15        |
| 4.2       | Test Procedure .....  | 15        |
| 4.3       | Test Limit.....   | 15        |
| 4.4       | Test Results .....  | 15        |
| 4.5       | Test Equipment Used; Peak Output Power CELL .....                       | 21        |
| <b>5.</b> | <b>OCCUPIED BANDWIDTH CELL</b> -----                                    | <b>22</b> |
| 5.1       | Test Specification .....  | 22        |
| 5.2       | Test Procedure .....  | 22        |
| 5.3       | Test Limit.....   | 22        |
| 5.4       | Test Results .....  | 22        |
| 5.5       | Test Equipment Used; Occupied Bandwidth CELL.....                       | 32        |
| <b>6.</b> | <b>SPURIOUS EMISSIONS AT ANTENNA TERMINALS CELL</b> -----               | <b>33</b> |
| 6.1       | Test Specification .....  | 33        |
| 6.2       | Test Procedure .....  | 33        |
| 6.3       | Test Limit.....   | 33        |
| 6.4       | Test Results .....  | 33        |
| 6.5       | Test Equipment Used; Out of Band Emission at Antenna Terminals CELL ... | 37        |
| <b>7.</b> | <b>BAND EDGE SPECTRUM CELL</b> -----                                    | <b>38</b> |
| 7.1       | Test Specification .....  | 38        |
| 7.2       | Test Procedure .....  | 38        |
| 7.3       | Test Limit.....   | 38        |
| 7.4       | Test Results .....  | 38        |
| 7.5       | Test Equipment Used; Band Edge Spectrum CELL .....                      | 42        |
| <b>8.</b> | <b>SPURIOUS EMISSIONS (RADIATED) CELL</b> -----                         | <b>43</b> |
| 8.1       | Test Specification .....  | 43        |
| 8.2       | Test Procedure .....  | 43        |
| 8.3       | Test Limit.....   | 44        |
| 8.4       | Test Results .....  | 44        |
| 8.5       | Test Instrumentation Used, Radiated Measurements CELL .....             | 45        |
| <b>9.</b> | <b>PEAK OUTPUT POWER (ESMR)</b> -----                                   | <b>46</b> |
| 9.1       | Test Specification .....  | 46        |
| 9.2       | Test Procedure .....  | 46        |
| 9.3       | Test Results .....  | 46        |
| 9.4       | Test Equipment Used; Peak Power (ESMR) .....                            | 51        |



|   |           |
|---|-----------|
| <b>10. OCCUPIED BANDWIDTH (ESMR) -----</b>                                  | <b>52</b> |
| 10.1 Test Specification .....   | 52        |
| 10.2 Test Procedure .....   | 52        |
| 10.3 Test Limit.....  | 52        |
| 10.4 Test Results .....   | 52        |
| 10.5 Test Equipment Used; Occupied Bandwidth (ESMR).....                    | 59        |
| <b>11. SPURIOUS EMISSIONS AT ANTENNA TERMINALS (ESMR) -----</b>             | <b>60</b> |
| 11.1 Test Specification .....   | 60        |
| 11.2 Test Procedure .....   | 60        |
| 11.3 Test Limit.....  | 60        |
| 11.4 Test Results .....   | 60        |
| 11.5 Test Equipment Used; Spurious Emissions at Antenna Terminals (ESMR)... | 64        |
| <b>12. BAND EDGE SPECTRUM ESMR -----</b>                                    | <b>65</b> |
| 12.1 Test Specification .....   | 65        |
| 12.2 Test Procedure .....   | 65        |
| 12.3 Test Limit.....  | 65        |
| 12.4 Test Results .....   | 65        |
| 12.5 Test Equipment Used; Band Edge Spectrum ESMR .....                     | 69        |
| <b>13. SPURIOUS EMISSIONS (RADIATED) (ESMR) -----</b>                       | <b>70</b> |
| 13.1 Test Specification .....   | 70        |
| 13.2 Test Procedure .....   | 70        |
| 13.3 Test Results .....   | 71        |
| 13.4 Test Equipment Used; Spurious Emissions (Radiated) (ESMR).....         | 72        |
| <b>14. INTERMODULATION CONDUCTED -----</b>                                  | <b>73</b> |
| 14.1 Test Procedure .....   | 73        |
| 14.2 Test Limit.....  | 73        |
| 14.3 Test Results .....   | 73        |
| 14.4 Test Equipment Used; Intermodulation Conducted .....                   | 74        |
| <b>15. INTERMODULATION RADIATED -----</b>                                   | <b>75</b> |
| 15.1 Test Procedure .....   | 75        |
| 15.2 Test Limit.....  | 76        |
| 15.3 Test Results .....   | 76        |
| 15.4 Test Instrumentation Used; Radiated Measurements Intermodulation.....  | 78        |
| <b>16. OUT-OF-BAND REJECTION (CELL&amp;ESMR) -----</b>                      | <b>79</b> |
| 16.1 Test Specification .....   | 79        |
| 16.2 Test Procedure .....   | 79        |
| 16.3 Test Limit.....  | 79        |
| 16.4 Test Results .....   | 79        |
| 16.5 Test Equipment Used; Out-of-Band Rejection .....                       | 80        |
| <b>17. APPENDIX A - CORRECTION FACTORS -----</b>                            | <b>81</b> |
| 17.1 Correction factors for RF OATS Cable 35m.....                          | 81        |
| 17.2 Correction factors for RF OATS Cable 10m.....                          | 82        |
| 17.3 Correction factors for Horn Antenna .....                              | 83        |
| 17.4 Correction factors for Horn ANTENNA .....                              | 84        |
| 17.5 Correction factors for Log Periodic Antenna .....                      | 85        |
| 17.6 Correction factors for Biconical Antenna.....                          | 86        |
| 17.7 Correction factors for ACTIVE LOOP ANTENNA .....                       | 87        |



# 1. General Information

## 1.1 Administrative Information

Manufacturer: Corning Optical Communication  
Wireless

Manufacturer's Address: 13221 Woodland Park Rd., Suite  
#400  
Herndon, VA. 20171  
U.S.A.  
Tel: +1-541-758-2880  
Fax: +1-703-848-0260

Manufacturer's Representative: Habib Riazi

Equipment Under Test (E.U.T): ONE - Optical Network Evolution  
DAS

Equipment Model No.: RAU-5 Remote Antenna Unit

Equipment Serial No.: 05144900098

Date of Receipt of E.U.T: July 13, 2016

Start of Test: July 13, 2016

End of Test: September 15, 2016

Test Laboratory Location: I.T.L (Product Testing) Ltd.  
1 Batsheva St,  
Lod,  
Israel 7116002

Test Specifications: FCC Parts 2, 22, 20,90



## **1.2 List of Accreditations**

The EMC laboratory of I.T.L. is accredited by/registered with the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



### **1.3 Product Description**

The Optical Network Platform (ONE™) by Corning provides a flexible in-building RF and network digital coverage solution based on a fiber optic transport backbone.

The fiber-optics infrastructure is easily deployable via a wide range of pre-terminated composite cables and advanced end-to-end equipment. Easy to design, Plug and Play™ connectors, significantly reduce installation cost and deployment time.

The ONE™ solution is an ideal fit for large, high-rise or campus-style deployments. It generates significant CAPEX savings and OPEX savings through the use of user configurable sectorization and an infrastructure that is simple to deploy and efficient in usage.

Dynamic sectorization management allows precise service distribution control to meet changing density needs, and provides further savings by enabling sharing of equipment at various levels for service providers.

Radio source agnostic, remote units can be used as network extenders. Ethernet capability with dedicated fiber link for Wi-Fi offload brings a higher level of granularity and support for devices and applications with very high speed requirements.

### **1.4 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in KDB 971168 D03 v01, KDB 935210 D05 v01r01 and ANSI/TIA-603-D: 2010. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### **1.5 Test Facility**

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

### **1.6 Measurement Uncertainty**

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)  
for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB



## 2. System Test Configuration

### 2.1 *Justification*

The E.U.T. was originally FCC certified on 12/26/2014 under FCC ID: OJF1RAU5.

The E.U.T. is part of a booster system operated with the RXU certified under FCC ID: OJF1RXU.

No changes have been made to the E.U.T.

The C2PC change is to allow the E.U.T. to operate as part of a booster system with the new RXU2325 certified under FCC ID: OJF1RXUN.

The E.U.T. has been fully tested with the RXU2325 and results presented in the four reports (for bands AWS, CELL/ESMR, PCS & LTE) submitted with this application.

The test setup was configured to closely resemble the standard installation.

The EUT consists of the HEU, the OIU and the RAU-5.

All source signals are represented in the setup by appropriate signal generators.

An “Exercise” SW on the computer was used to enable / disable transmission of the RAU-5, while the EUT output was connected to the spectrum analyzer.

All channels transmitted during the testing.

There is neither an intermediate amplified nor donor antenna in the uplink.

All components included in the UL path are connected by cables.

### 2.2 *EUT Exercise Software*

HCM\_2.2 Build23

ACM\_2a00\_22\_11.bin

RMM\_5a00\_22\_02. bin

OIM\_7a03\_22\_05. bin

RAU5\_9a64\_22\_12.bin

### 2.3 *Special Accessories*

No special accessories were needed in order to achieve compliance.

### 2.4 *Equipment Modifications*

No modifications were needed in order to achieve compliance.



## 2.5 Configuration of Tested System

|                          |   |
|--------------------------|---|
| Product Name             | ONE - Wireless Platform   |
| Model Name               | RAU-5   |
| Working voltage          | 48.0VDC   |
| Mode of operation        | Industrial Booster for CELL/ESMR band   |
| Modulations              | WCDMA, LTE(64QAM), GSM  |
| Assigned Frequency Range | CELL: 869MHz-894MHz<br>ESMR:862MHZ-869MHz   |
| Transmit power           | ~15.0 dBm   |
| Antenna Gain             | 12.5dBi   |
| DATA rate                | N/A   |
| Modulation BW            | CELL: 0.5MHz(GSM), 10MHz(LTE), 5MHz(WCDMA)<br>ESMR: 0.5MHz(GSM), 5MHz(LTE), 5MHz(WCDMA) |

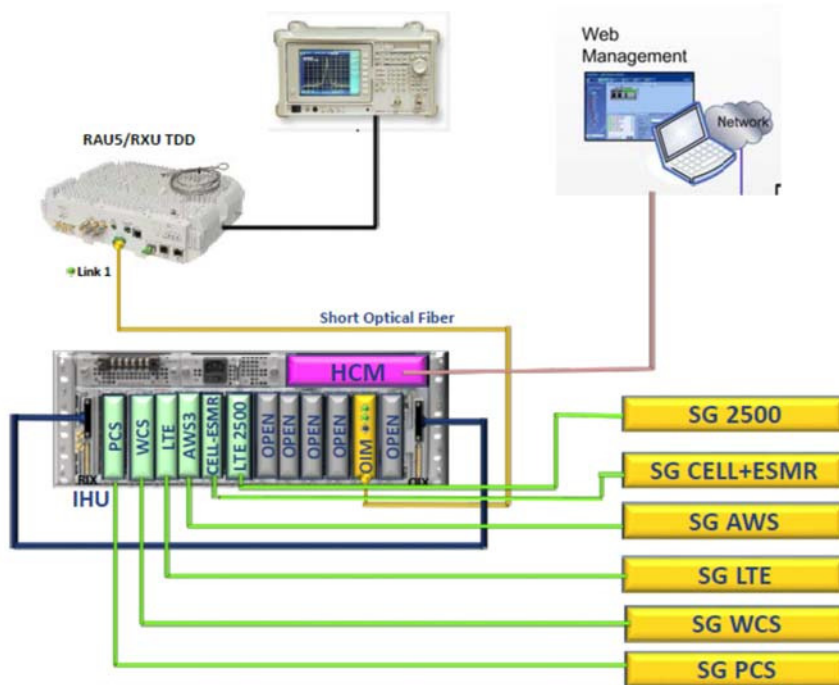


Figure 1. Test Set-Up Conducted

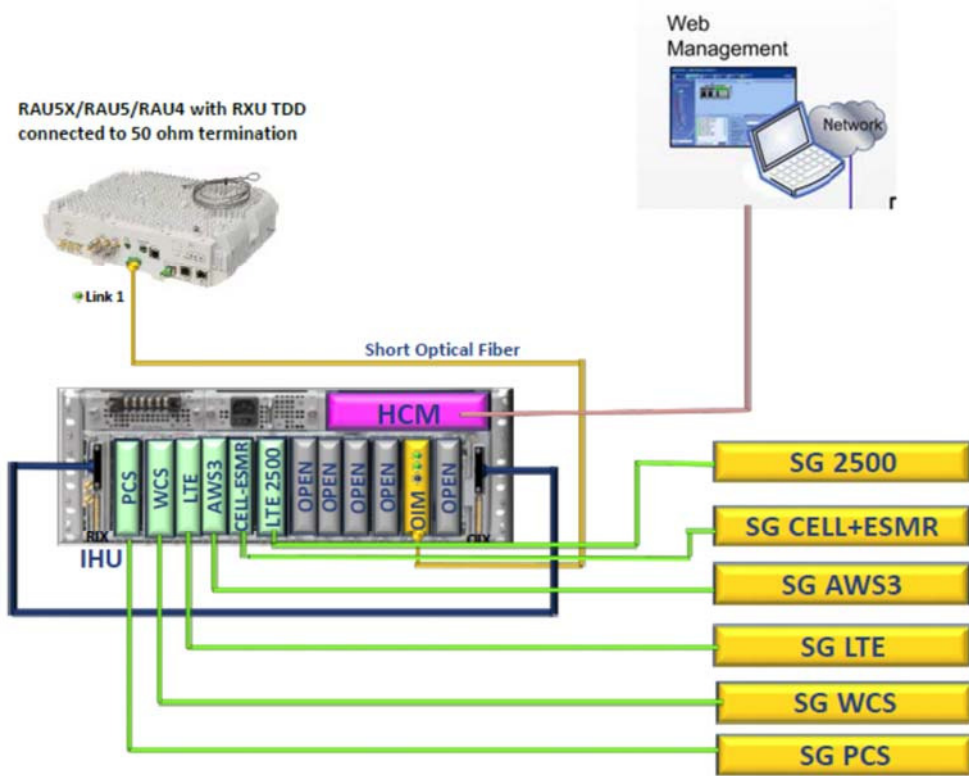


Figure 2. Test Set-Up Radiated

### 3. Test Set-Up Photos




Figure 3. Conducted Emission From Antenna Port Test



Figure 4. Radiated Emission Test



**Figure 5. Radiated Emission Test**

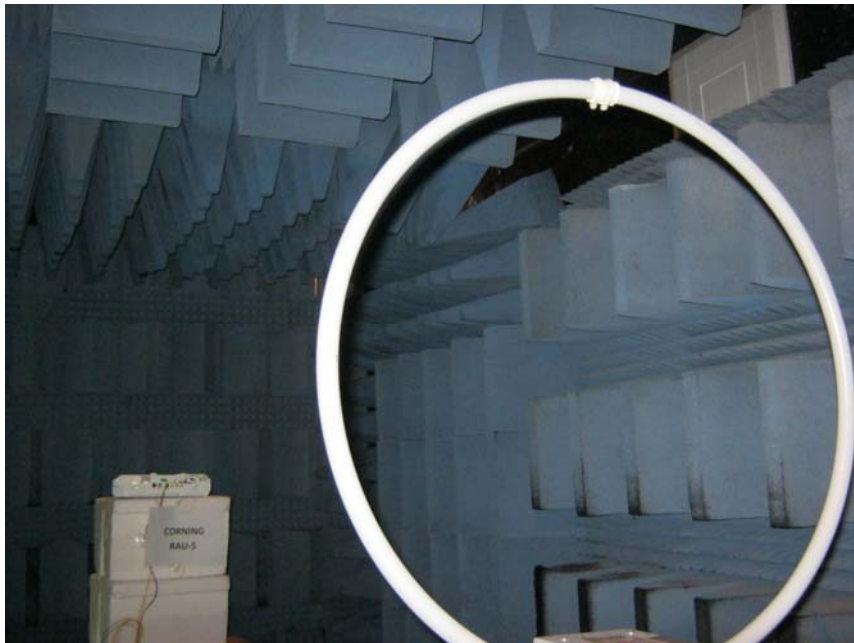


**Figure 6. Radiated Emission Test**






**Figure 7. Radiated Emission Test**

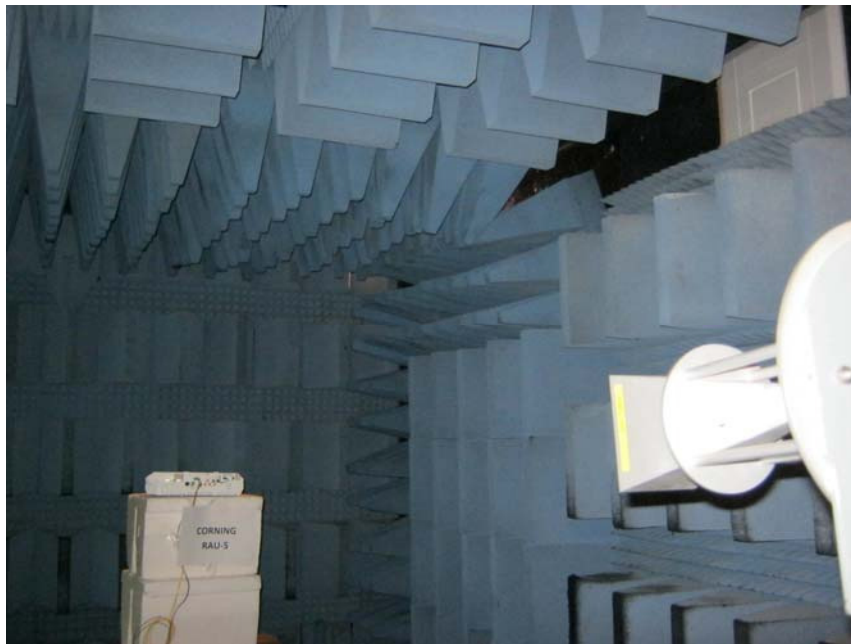

**Figure 8. Radiated Emission Test**

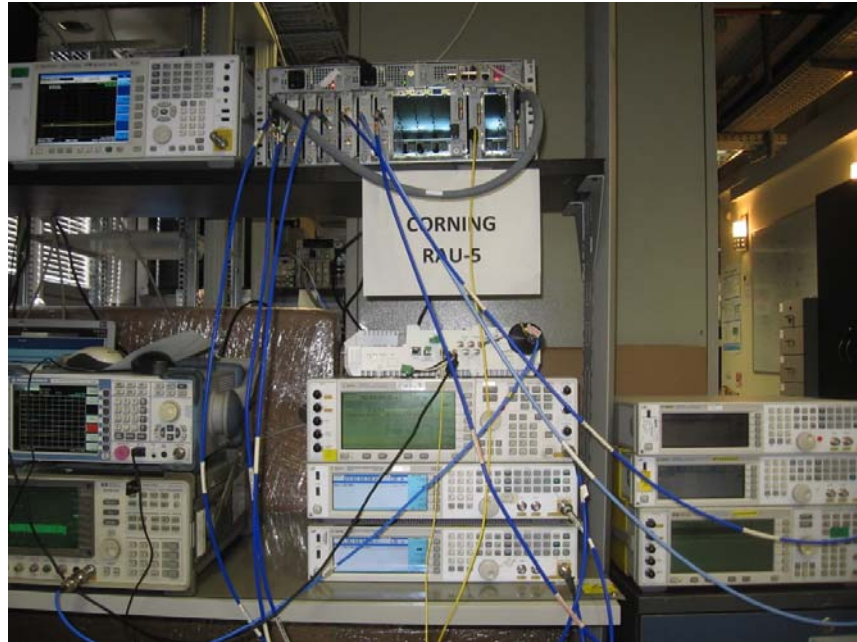

**Figure 9. Intermodulated Conducted**

## 4. Peak Output Power CELL

### 4.1 Test Specification

FCC Part 22.913

### 4.2 Test Procedure

(Temperature (22°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (loss = 31.0 dB). The E.U.T. RF output was modulated with W-CDMA, GSM and LTE 64QAM. Special attention was taken to prevent Spectrum Analyzer RF input overload.

### 4.3 Test Limit

Peak Power Output must not exceed 500 Watts (57dBm).


### 4.4 Test Results

| Modulation | Operation Frequency | Reading | Antenna Gain | EIRP  | Limit | Margin |
|------------|---------------------|---------|--------------|-------|-------|--------|
|            | (MHz)               | (dBm)   | (dBi)        | (dBm) | (dBm) | (dB)   |
| LTE 64QAM  | 874.0               | 16.6    | 12.5         | 29.1  | 57.00 | -27.9  |
|            | 881.0               | 16.5    | 12.5         | 29.0  | 57.00 | -28.0  |
|            | 889.0               | 16.8    | 12.5         | 29.3  | 57.00 | -27.7  |
| GSM        | 870.2               | 16.3    | 12.5         | 28.8  | 57.00 | -28.2  |
|            | 881.0               | 16.5    | 12.5         | 29.0  | 57.00 | -28.0  |
|            | 892.8               | 16.8    | 12.5         | 29.3  | 57.00 | -27.7  |
| W-CDMA     | 871.5               | 16.7    | 12.5         | 29.2  | 57.00 | -27.8  |
|            | 881.0               | 16.4    | 12.5         | 28.9  | 57.00 | -28.1  |
|            | 891.5               | 15.9    | 12.5         | 28.4  | 57.00 | -28.6  |

Figure 10 Peak Output Power CELL


JUDGEMENT: Passed by 27.7 dB

See additional information in *Figure 11 to Figure 19*.

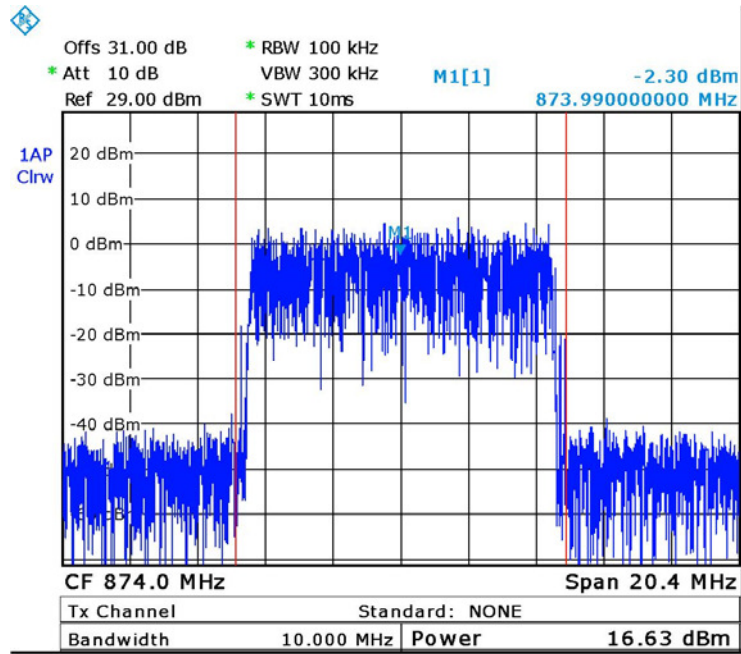

Date: 13.JUL.2016 13:06:51


Figure 11. — LTE 64QAM - 874.0 MHz

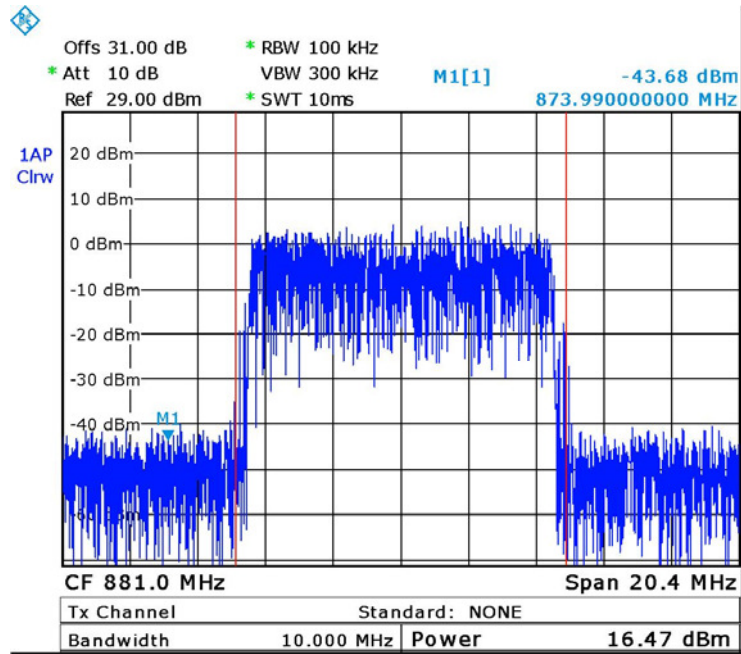

Date: 13.JUL.2016 13:07:23


Figure 12. — LTE 64QAM - 881.0 MHz



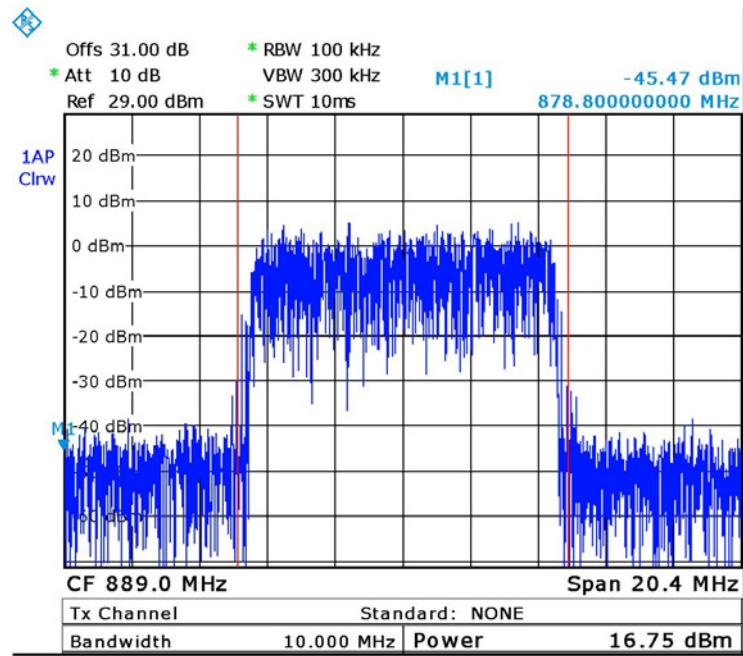


Date: 13.JUL.2016 13:07:50

Figure 13. — LTE 64QAM - 889.0 MHz

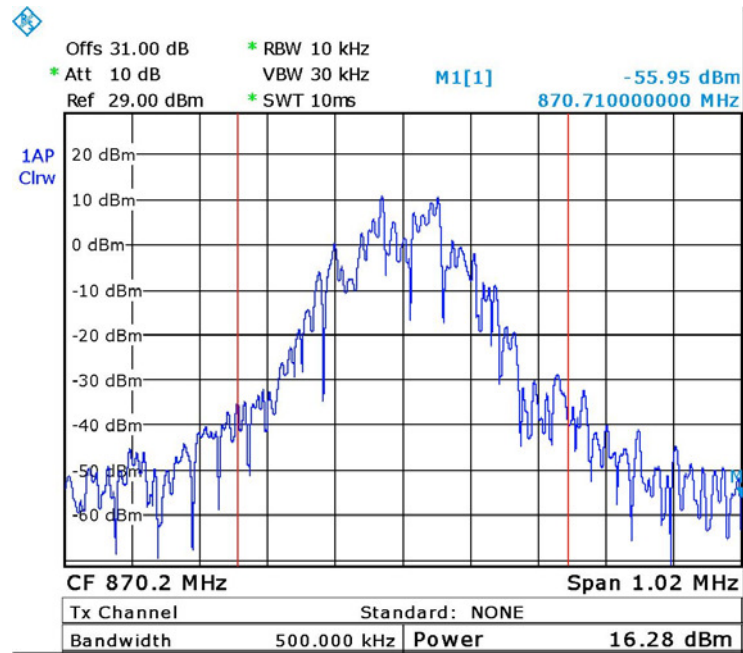


Date: 13.JUL.2016 13:10:03

Figure 14. — GSM - 870.2 MHz

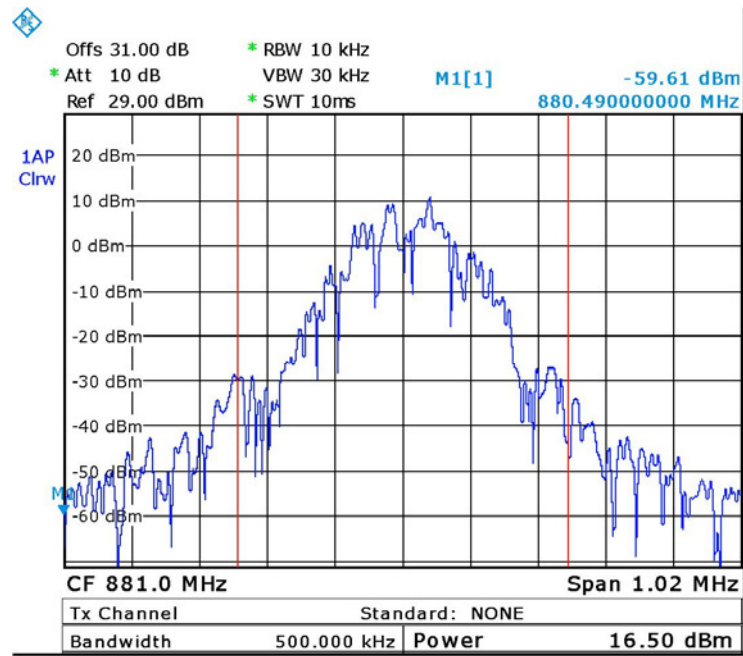


Date: 13.JUL.2016 13:10:47

Figure 15. — GSM - 881.0 MHz

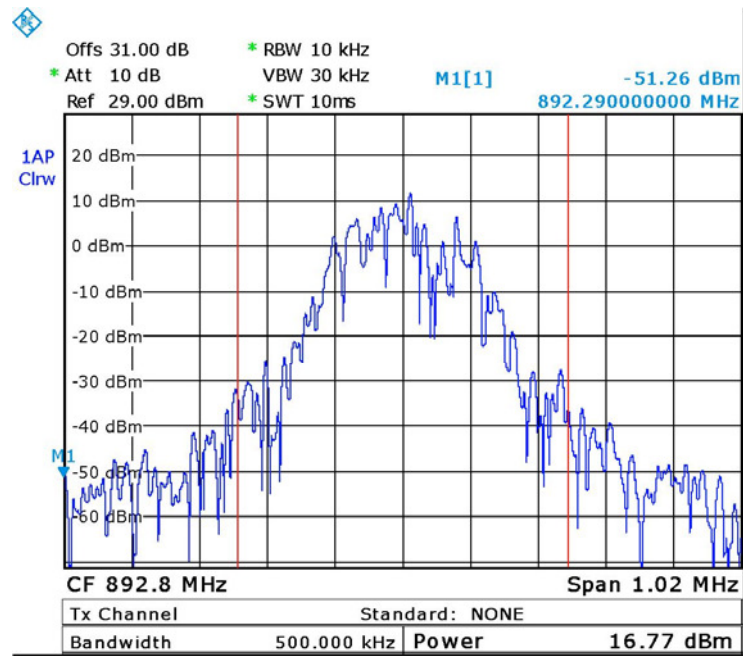


Date: 13.JUL.2016 13:11:42

Figure 16. — GSM - 892.8 MHz

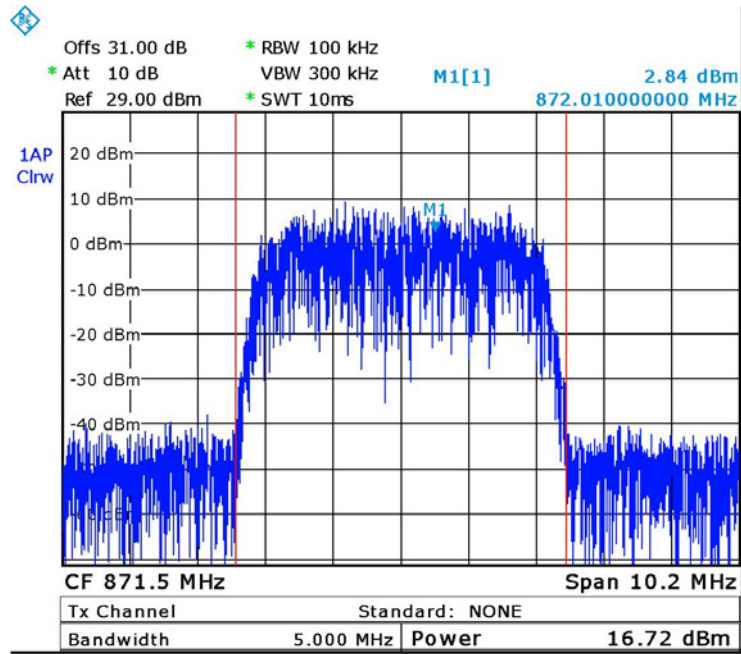


Date: 13.JUL.2016 13:13:07

Figure 17. — W-CDMA - 871.5 MHz

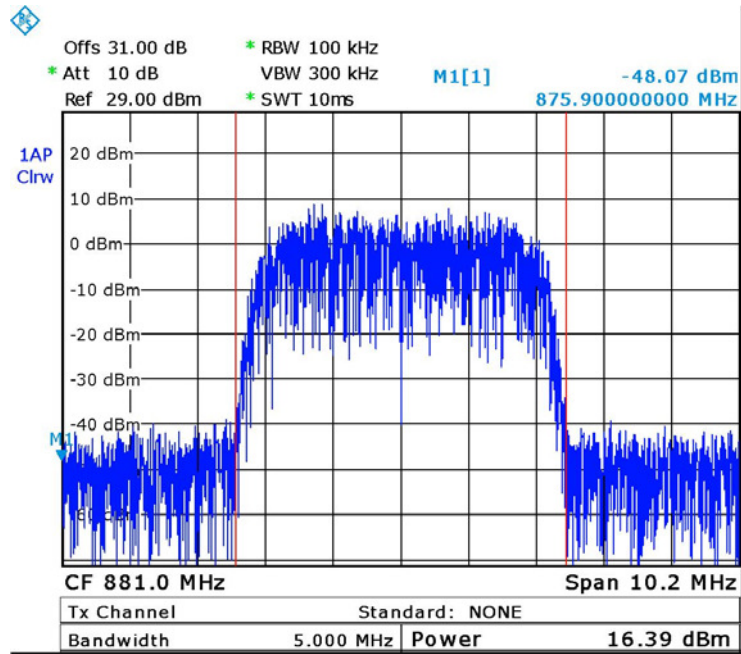

Date: 13.JUL.2016 13:13:33

Figure 18. — W-CDMA - 881.0 MHz

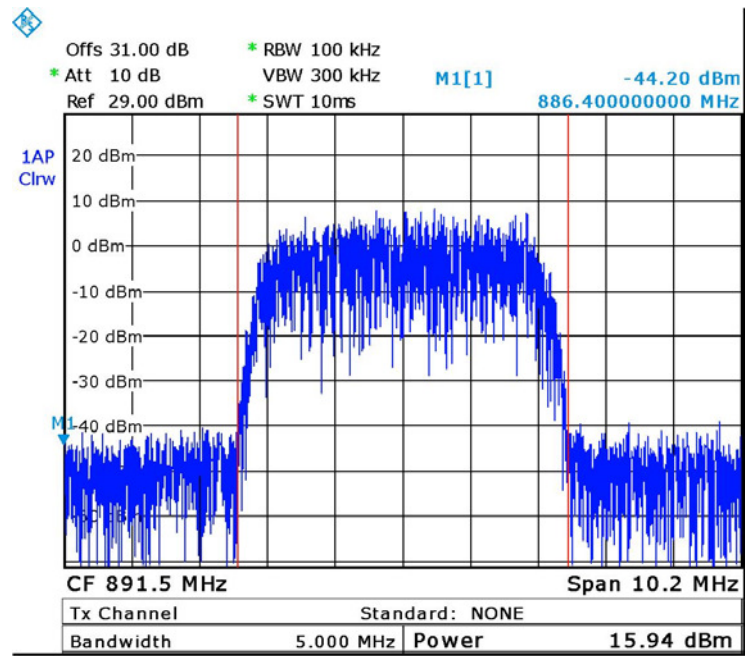

Date: 13.JUL.2016 13:14:29

Figure 19. — W-CDMA - 891.5 MHz



#### 4.5 Test Equipment Used; Peak Output Power CELL

| Instrument              | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                         |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer       | R&S          | FSL6     | 100194        | February 29, 2016     | March 1, 2017        |
| Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator        | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

Figure 20 Test Equipment Used



## 5. Occupied Bandwidth CELL

### 5.1 Test Specification

FCC Part 2, Section 1049

### 5.2 Test Procedure

(Temperature (22°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (loss=31.0 dB). The spectrum analyzer was set to proper resolution B.W.

OBW function (99%) was employed for this evaluation. Occupied bandwidth measured was repeated in the input terminal of the E.U.T.

### 5.3 Test Limit

N/A


### 5.4 Test Results

| Modulation | Port            | Operating Frequency | Reading |
|------------|-----------------|---------------------|---------|
|            | (Input/ Output) | (MHz)               | (MHz)   |
| LTE 64QAM  | Input           | 874.0               | 8.9     |
|            | Output          | 874.0               | 8.9     |
|            | Input           | 881.0               | 8.9     |
|            | Output          | 881.0               | 9.0     |
|            | Input           | 889.0               | 8.9     |
|            | Output          | 889.0               | 8.9     |
| GSM        | Input           | 870.2               | 0.2     |
|            | Output          | 870.2               | 0.2     |
|            | Input           | 881.0               | 0.2     |
|            | Output          | 881.0               | 0.2     |
|            | Input           | 892.8               | 0.2     |
|            | Output          | 892.8               | 0.2     |
| W-CDMA     | Input           | 871.5               | 4.1     |
|            | Output          | 871.5               | 4.1     |
|            | Input           | 881.0               | 4.1     |
|            | Output          | 881.0               | 4.2     |
|            | Input           | 891.5               | 4.1     |
|            | Output          | 891.5               | 4.1     |

Figure 21 Occupied Bandwidth CELL


JUDGEMENT: Passed

See additional information in *Figure 22* to *Figure 39*.

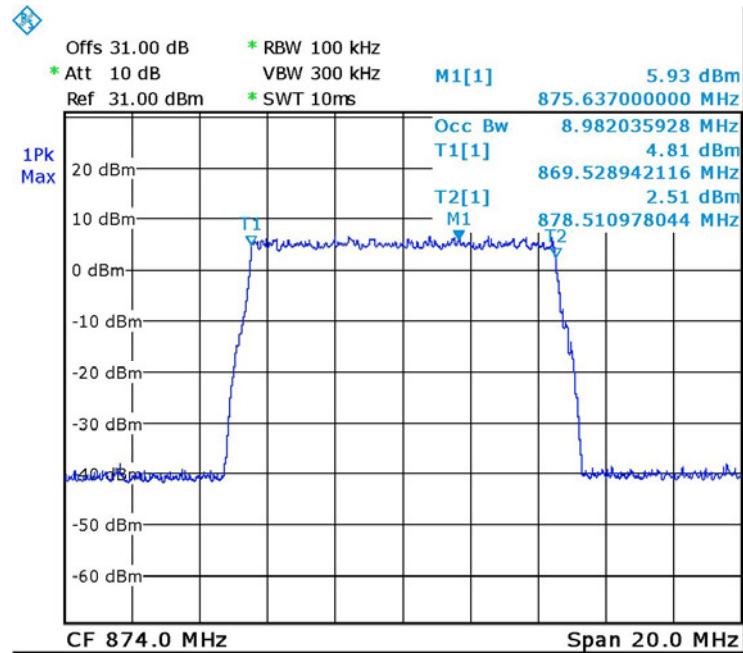


Date: 13.JUL.2016 14:11:06

Figure 22. — LTE 64QAM Input 874.0MHz

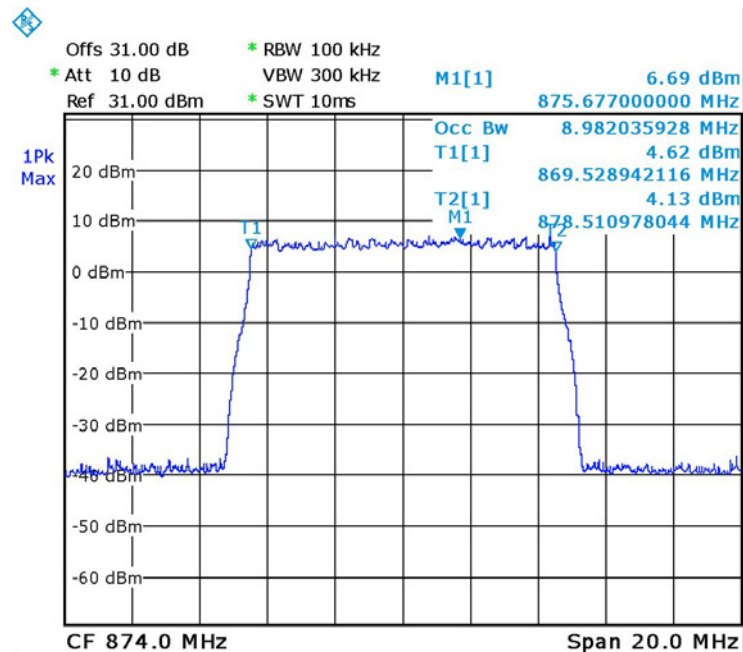


Date: 13.JUL.2016 14:02:45

Figure 23. — LTE 64QAM Output 874.0MHz

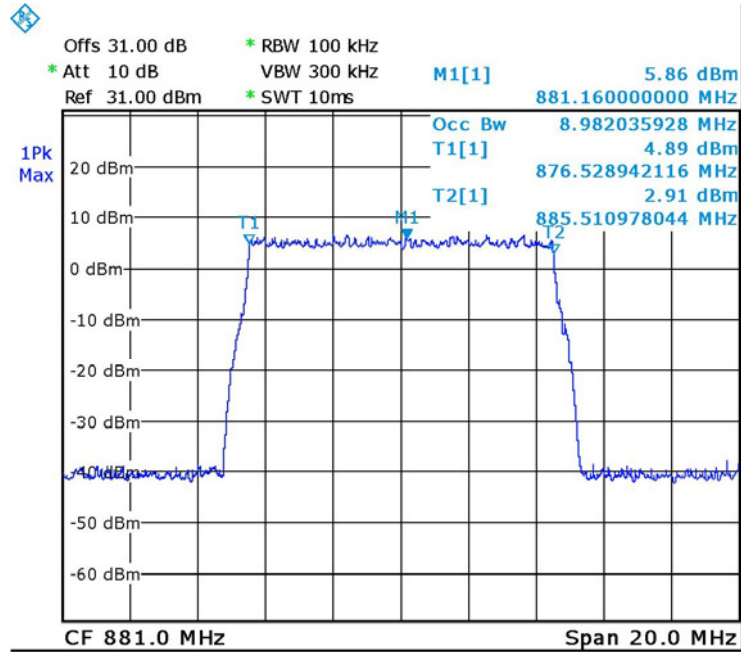

Date: 13.JUL.2016 14:11:34


Figure 24. — LTE 64QAM Input 881.0 MHz

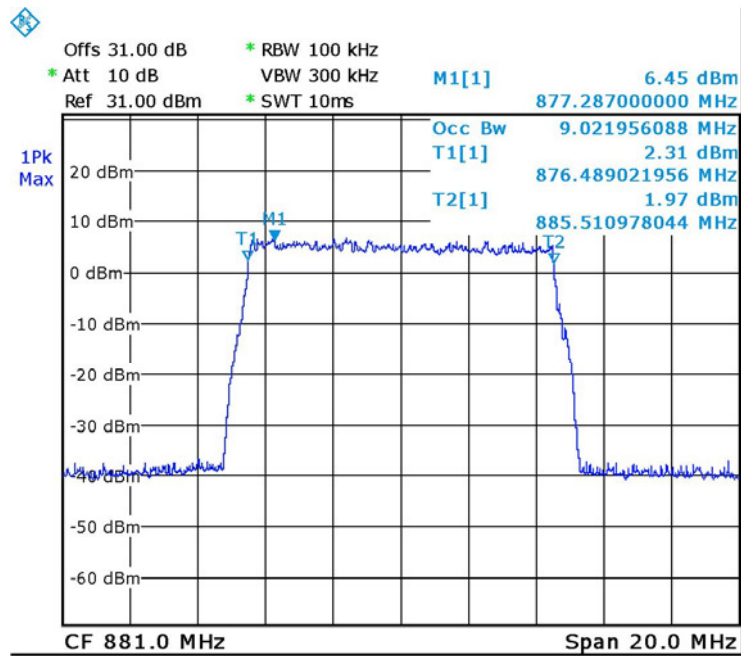

Date: 13.JUL.2016 14:03:09


Figure 25. — LTE 64QAM Output 881.0MHz



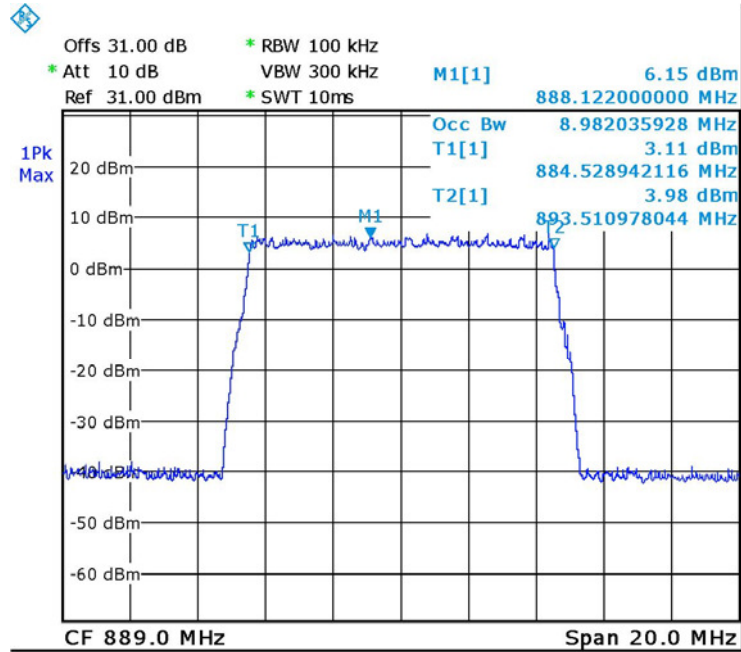


Date: 13.JUL.2016 14:11:57

Figure 26. — LTE 64QAM Input 889.00 MHz

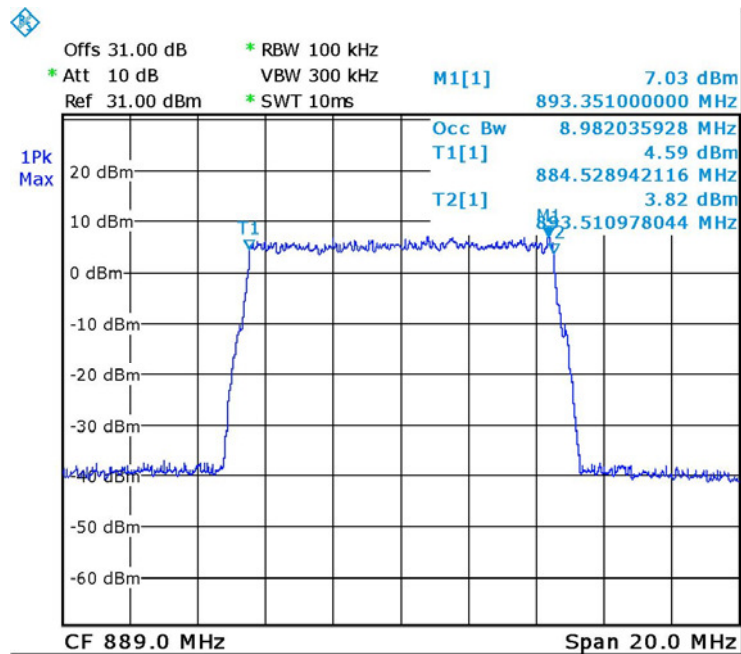


Date: 13.JUL.2016 14:03:34

Figure 27. — LTE 64QAM Output 889.0 MHz

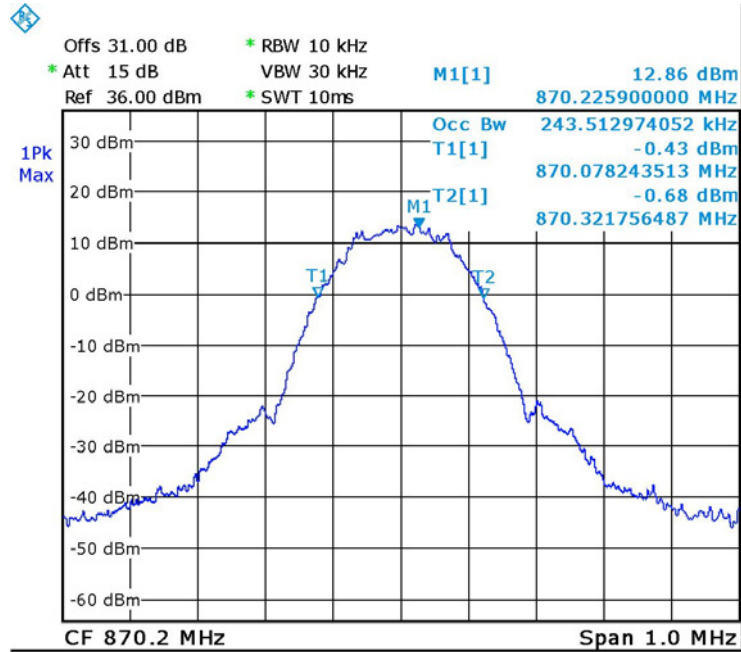


Date: 13.JUL.2016 14:10:03

Figure 28. — GSM - Input 870.2MHz

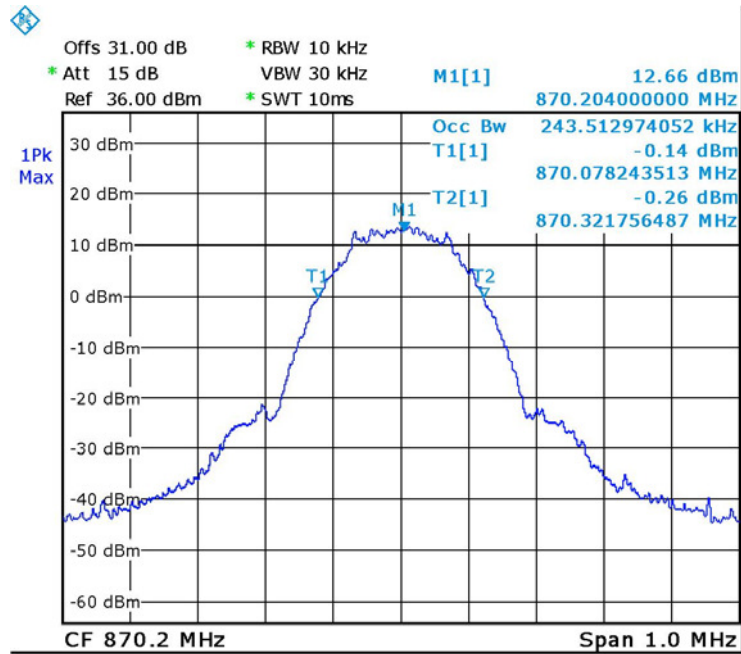


Date: 13.JUL.2016 14:05:03

Figure 29. — GSM - Output 870.2MHz

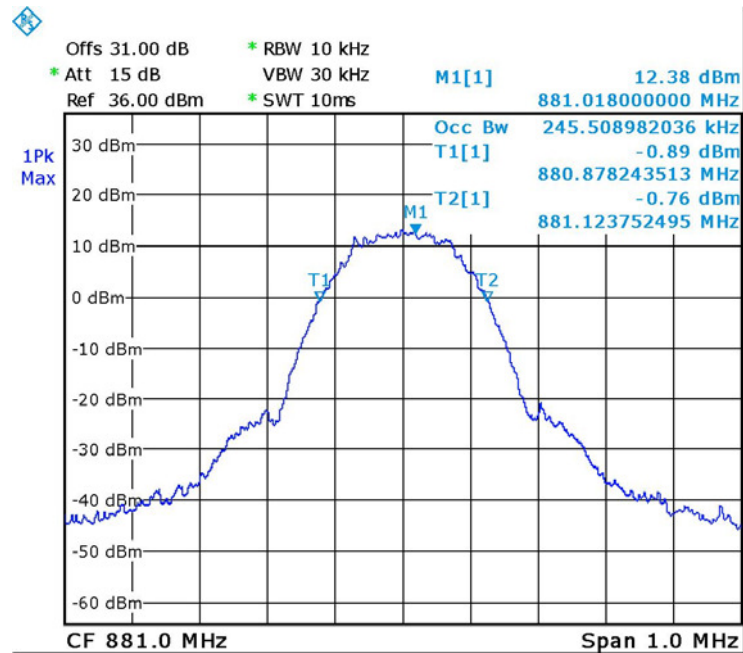


Date: 13.JUL.2016 14:09:31

Figure 30. — GSM - Input 881.0 MHz

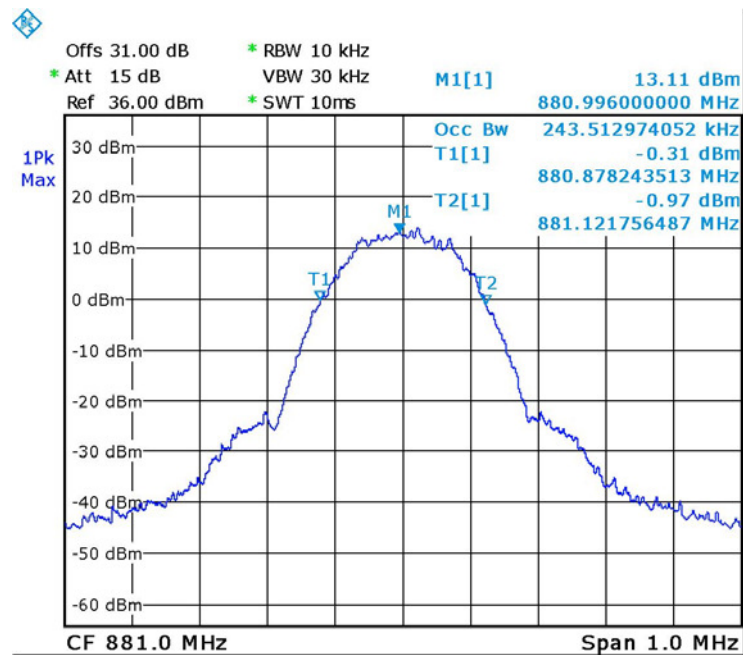


Date: 13.JUL.2016 14:05:35

Figure 31. — GSM - Output 881.0MHz

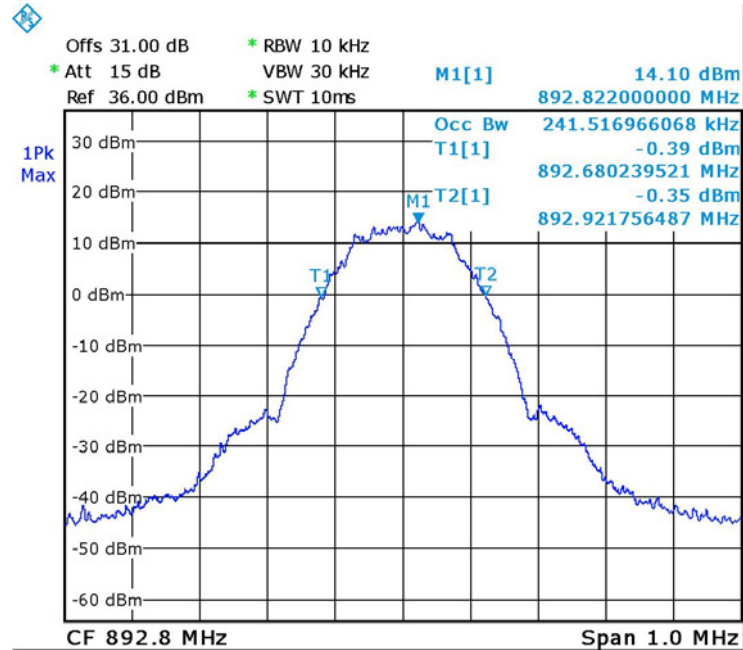


Date: 13.JUL.2016 14:09:04

Figure 32. — GSM - Input 892.8 MHz

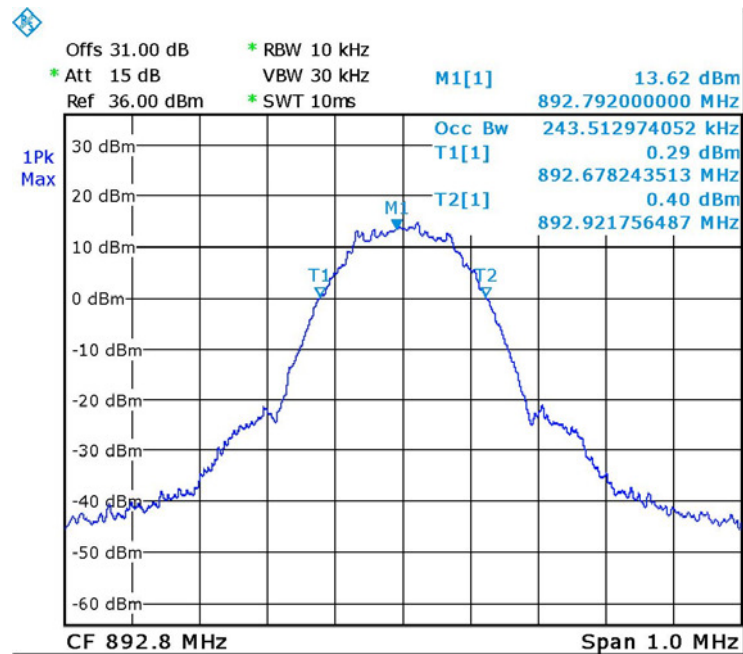


Date: 13.JUL.2016 14:06:20

Figure 33. — GSM - Output 892.8 MHz

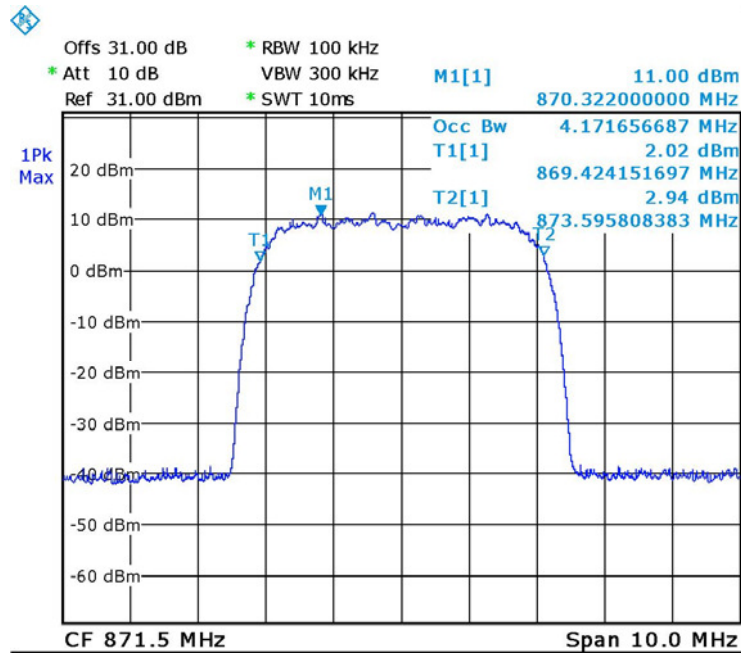

Date: 13.JUL.2016 14:13:03

Figure 34. — W-CDMA - Input 871.5MHz

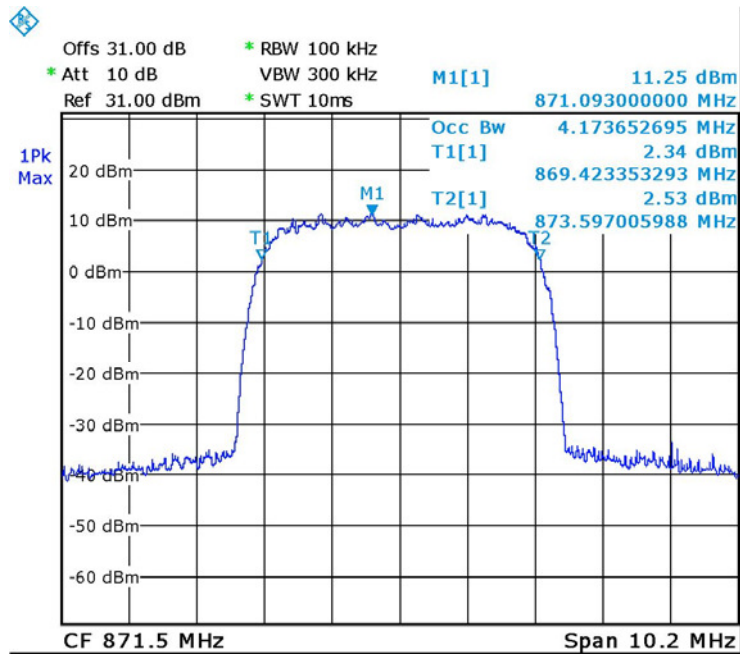

Date: 13.JUL.2016 14:01:23

Figure 35. — W-CDMA - Output 871.5MHz

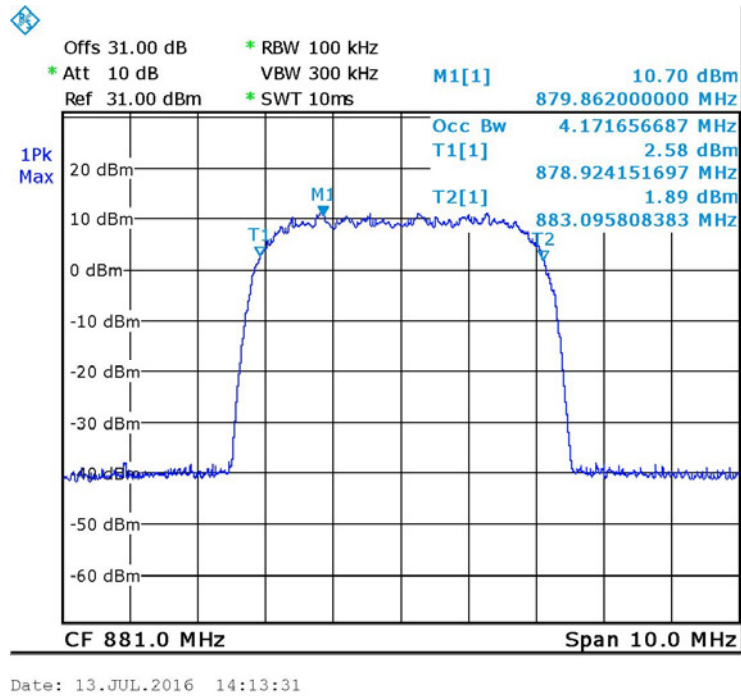


Figure 36. — W-CDMA - Input 881.0 MHz



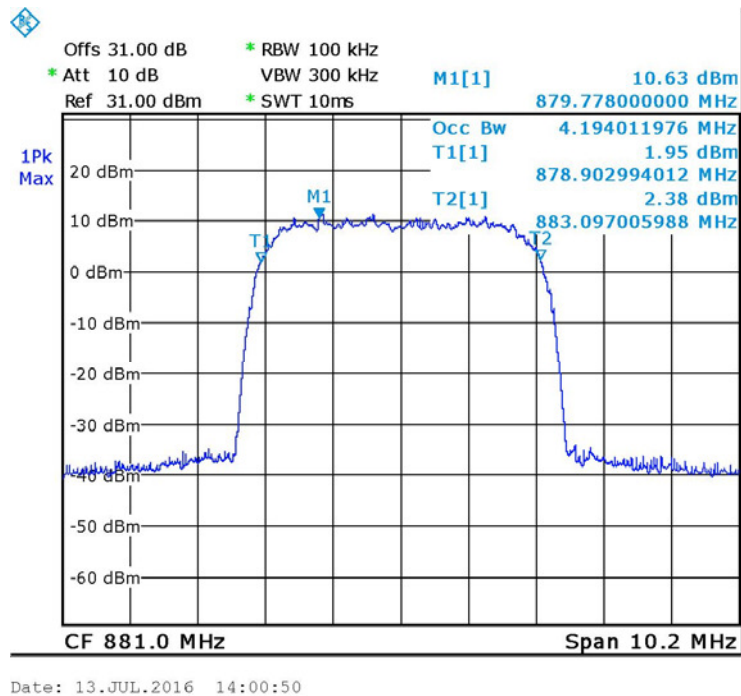


Figure 37. — W-CDMA - Output 881.0MHz

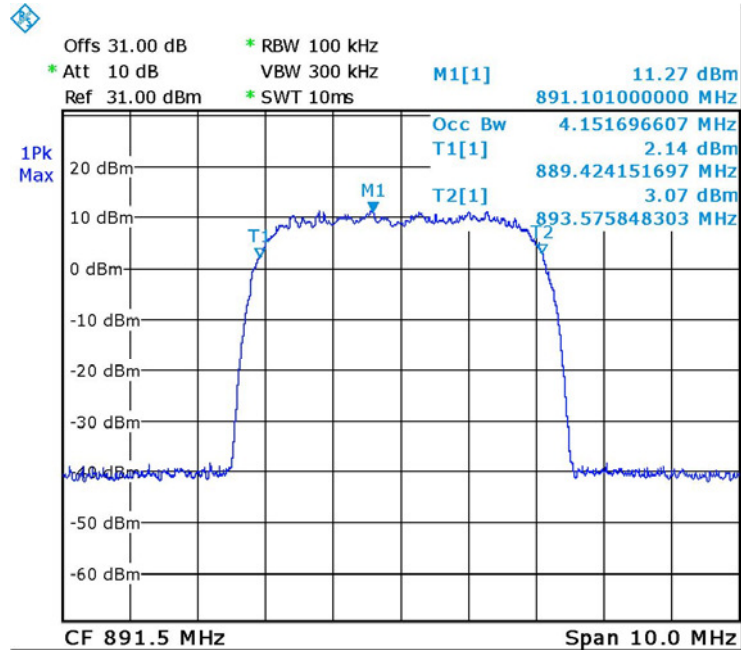

Date: 13.JUL.2016 14:14:32

Figure 38. — W-CDMA - Input 891.5 MHz

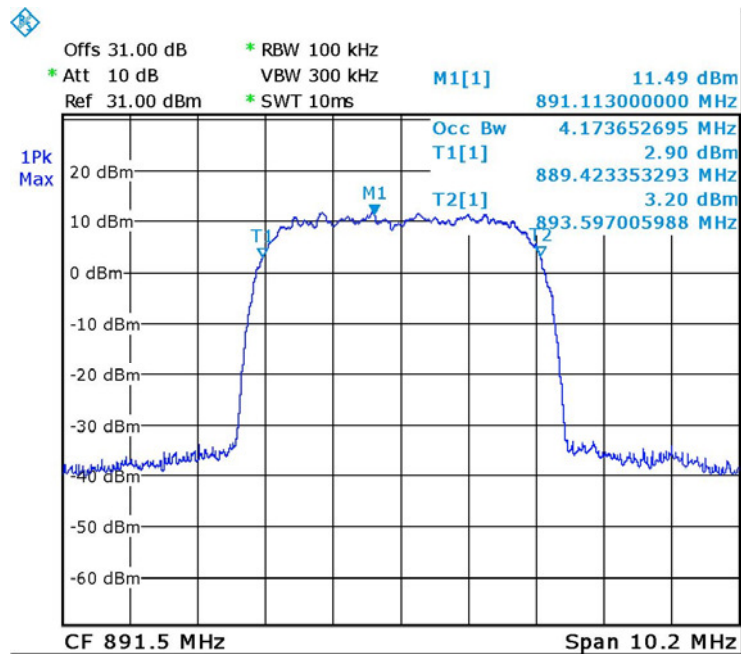

Date: 13.JUL.2016 14:00:16

Figure 39. — W-CDMA - Output 891.5 MHz





**5.5 Test Equipment Used; Occupied Bandwidth CELL**

| Instrument              | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                         |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer       | R&S          | FSL6     | 100194        | February 29, 2016     | March 1, 2017        |
| Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator        | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

**Figure 40 Test Equipment Used**





## 6. Spurious Emissions at Antenna Terminals CELL

### 6.1 Test Specification

FCC Part 22, Section 917; FCC Part 2.1051

### 6.2 Test Procedure

(Temperature (25°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max loss=31.5dB).

The spectrum analyzer was set to 1 kHz R.B.W for the frequency range of 9 kHz – 1 MHz, 100 kHz for the frequency range of 1 – 30 MHz, and 1 MHz for the frequency range of 30 MHz – 10 GHz.

### 6.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges(869 - 894 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log (P)$  dB, yielding -13dBm.

### 6.4 Test Results

JUDGEMENT: Passed

See additional information in *Figure 41* to *Figure 49*.

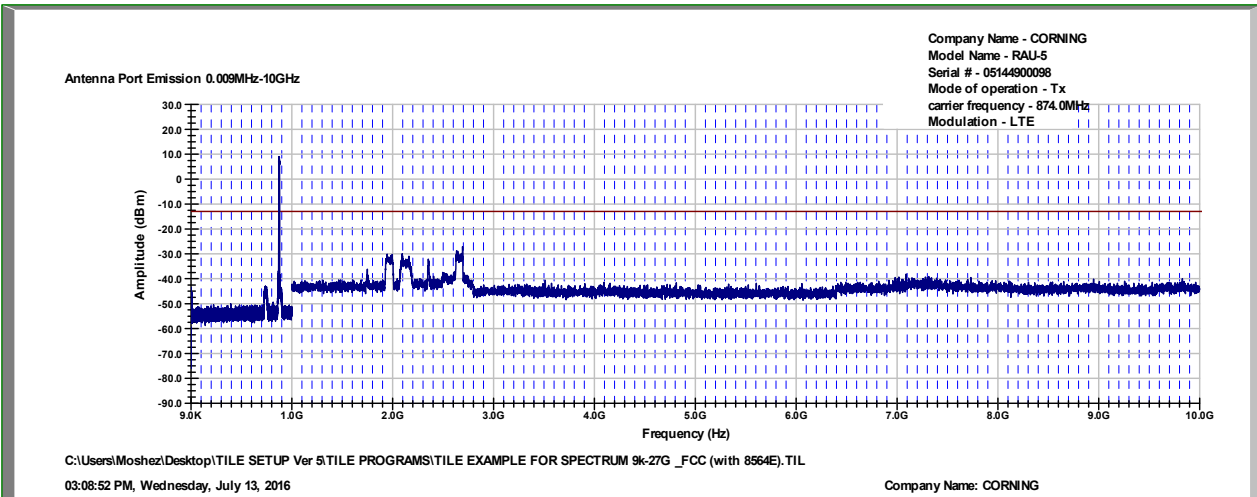


Figure 41. — LTE 64QAM - 874.0 MHz

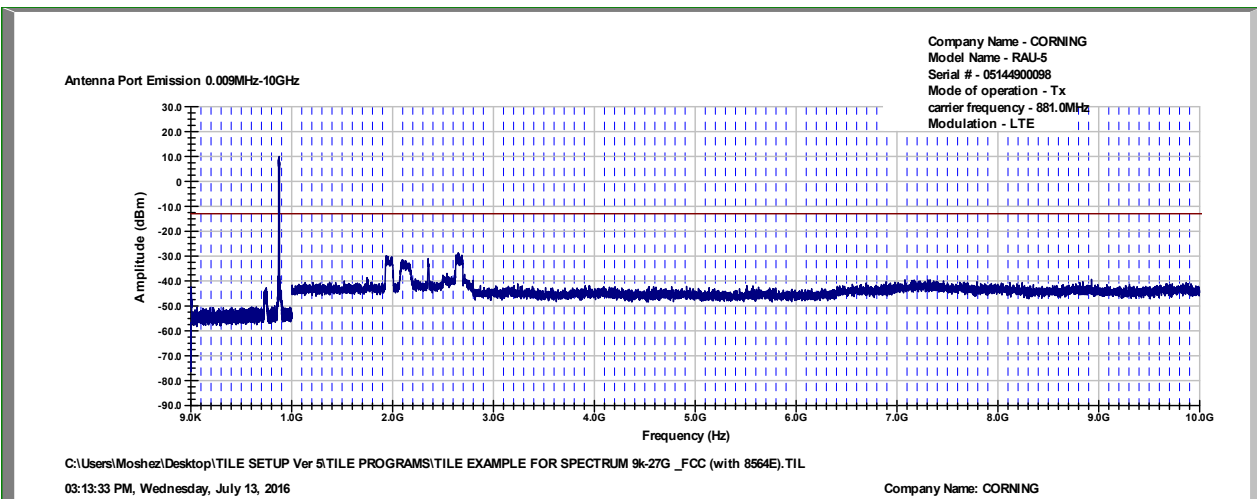


Figure 42. — LTE 64QAM - 881.0 MHz

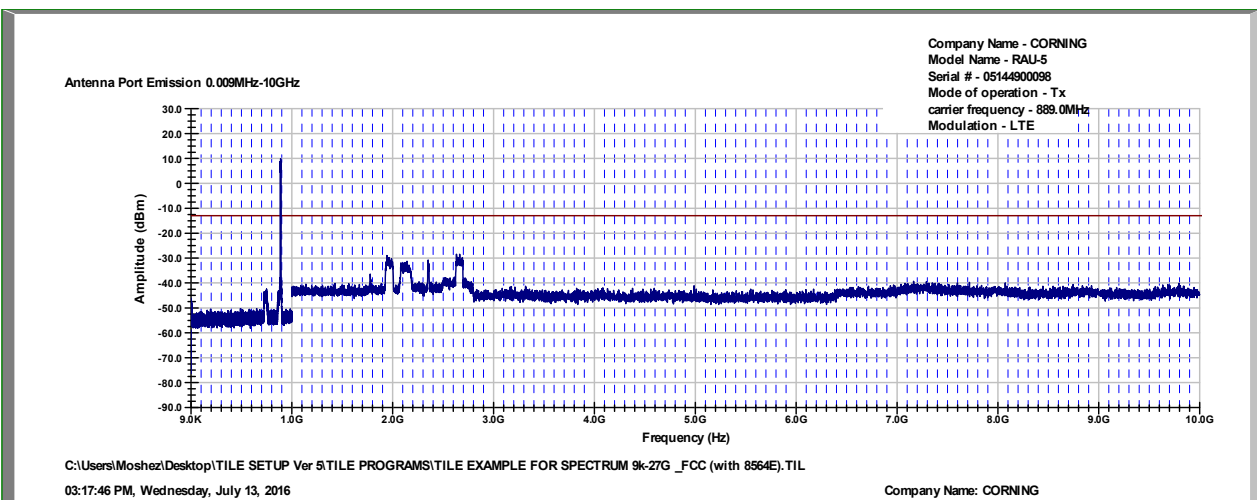


Figure 43. — LTE 64QAM - 889.0 MHz

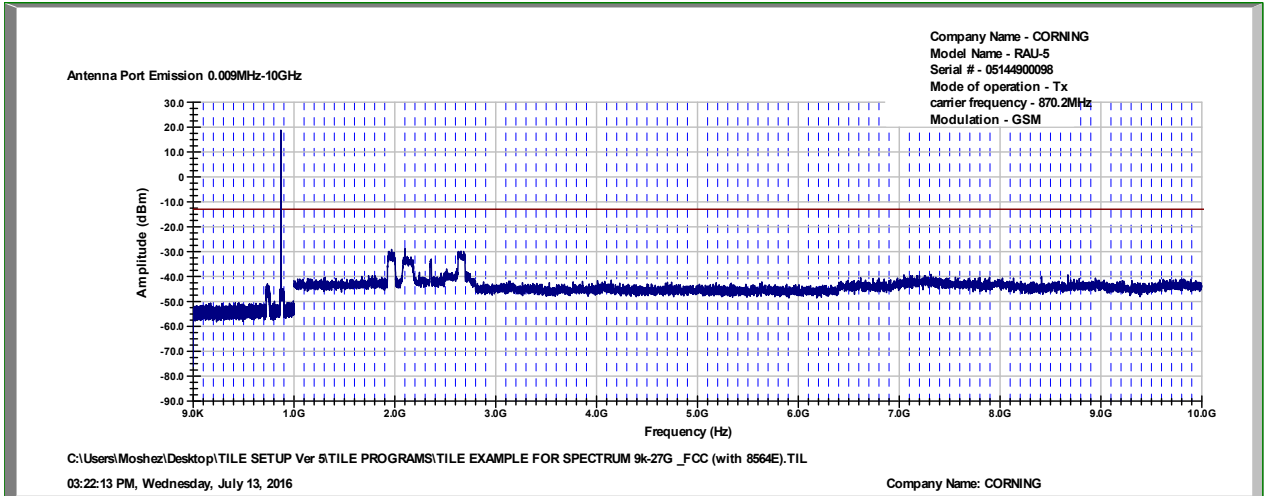


Figure 44. — GSM - 870.2 MHz

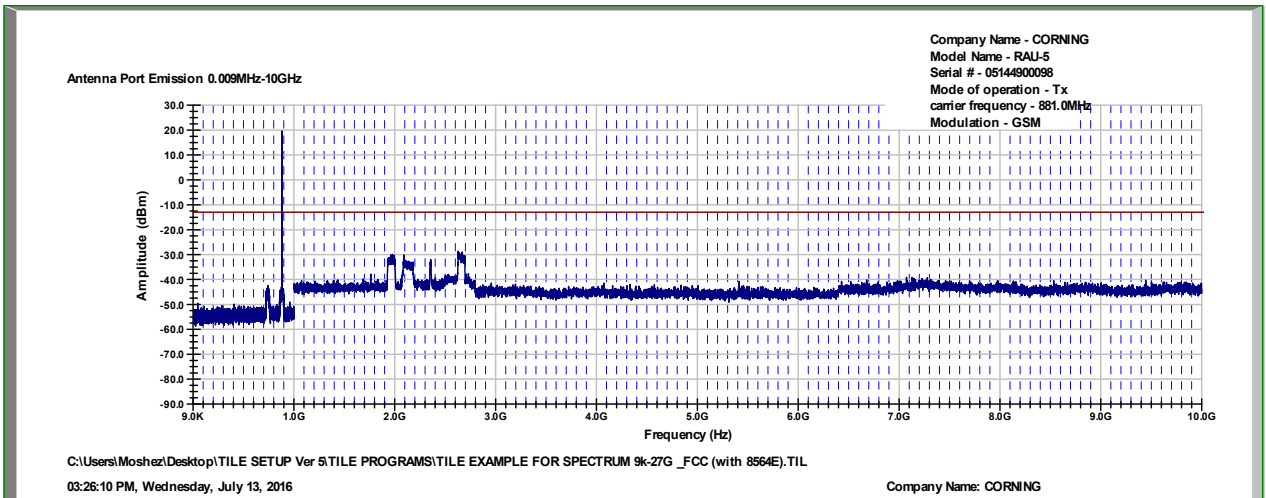


Figure 45. — GSM - 881.0 MHz

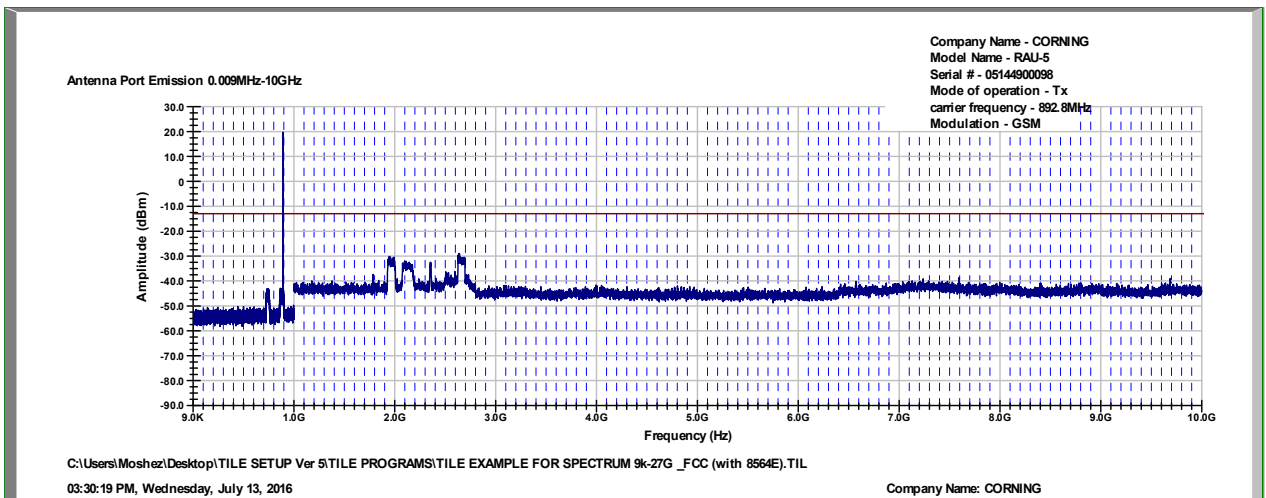


Figure 46. — GSM - 892.8 MHz

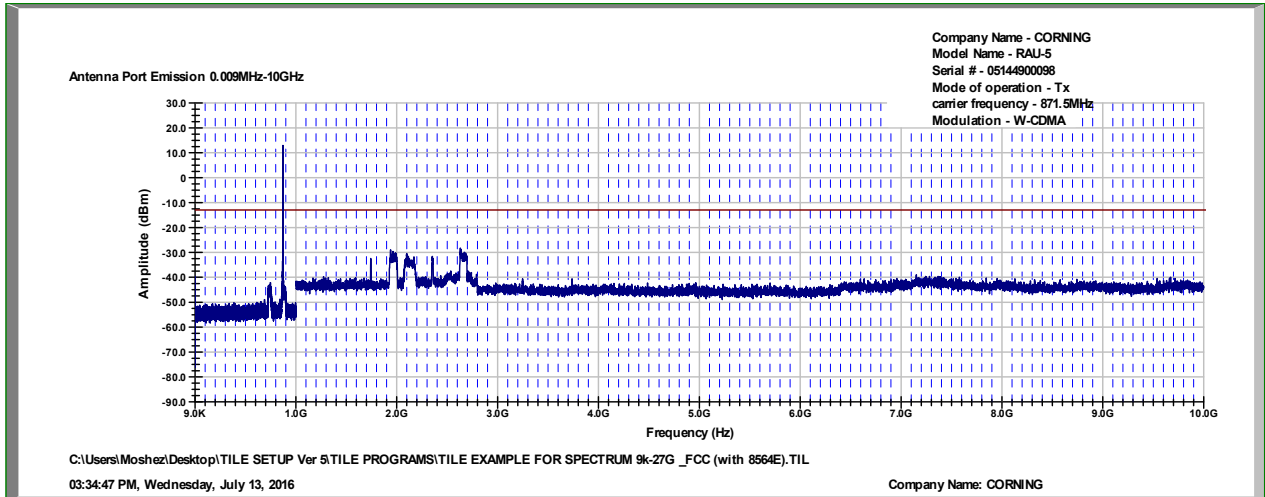


Figure 47. — W-CDMA - 871.5 MHz

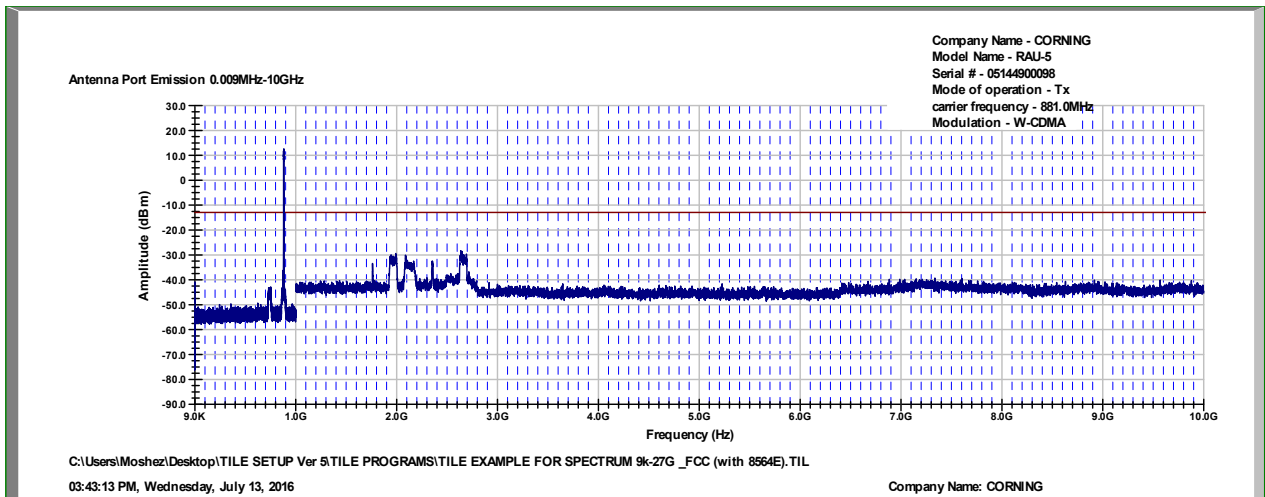


Figure 48. — W-CDMA - 881.0 MHz

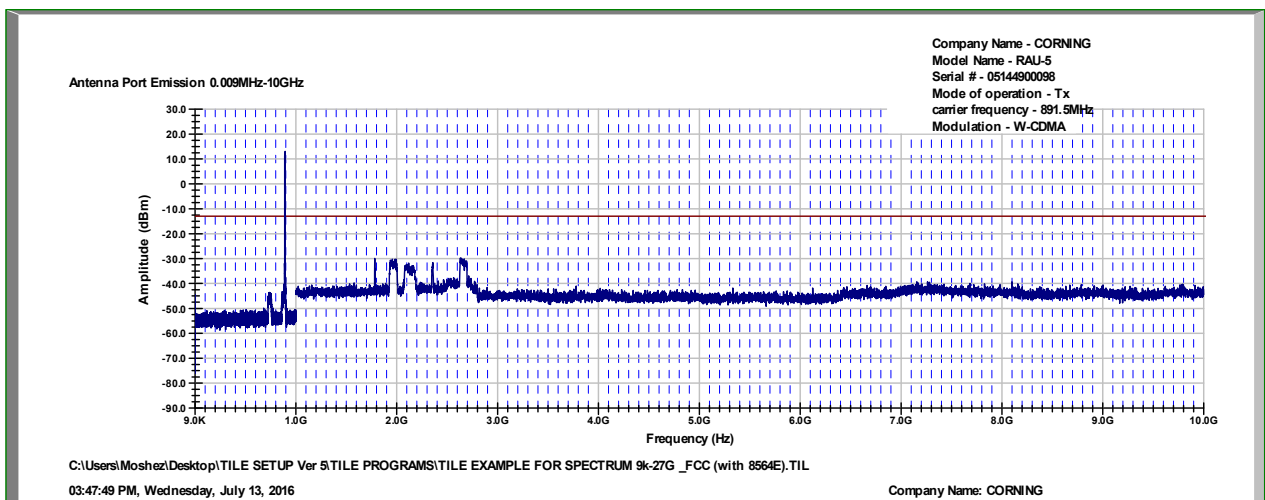


Figure 49. — W-CDMA - 891.5 MHz



**6.5 Test Equipment Used; Out of Band Emission at Antenna Terminals CELL**

| Instrument        | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------|--------------|----------|---------------|-----------------------|----------------------|
|                   |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer | HP           | 8564E    | 3442A00275    | March 10, 2016        | March 10, 2017       |
| Signal Generator  | Agilent      | N5172B   | MY48180244    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator  | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

**Figure 50 Test Equipment Used**



## 7. Band Edge Spectrum CELL

### 7.1 Test Specification

FCC Part 22, FCC Part 2.1051

### 7.2 Test Procedure

(Temperature (22°C)/ Humidity (37%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (31.0 dB).

The spectrum analyzer was set to 100 kHz R.B.W.

### 7.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (869 - 894 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding -13dBm.


### 7.4 Test Results

| Modulation | Operation Frequency | Band Edge Frequency | Reading | Limit | Margin |
|------------|---------------------|---------------------|---------|-------|--------|
|            | (MHz)               | (MHz)               | (dBm)   | (dBm) | (dB)   |
| LTE 64QAM  | 874.0               | 869.0               | -31.6   | -13.0 | -18.6  |
|            | 889.0               | 894.0               | -27.5   | -13.0 | -14.5  |
| GSM        | 870.2               | 869.0               | -38.9   | -13.0 | -25.9  |
|            | 892.8               | 894.0               | -38.1   | -13.0 | -25.1  |
| W-CDMA     | 871.5               | 869.0               | -34.3   | -13.0 | -21.3  |
|            | 891.5               | 894.0               | -34.2   | -13.0 | -21.2  |

**Figure 51 Band Edge Spectrum Results CELL**


JUDGEMENT: Passed by 14.5dB

See additional information in *Figure 52* to *Figure 57*.

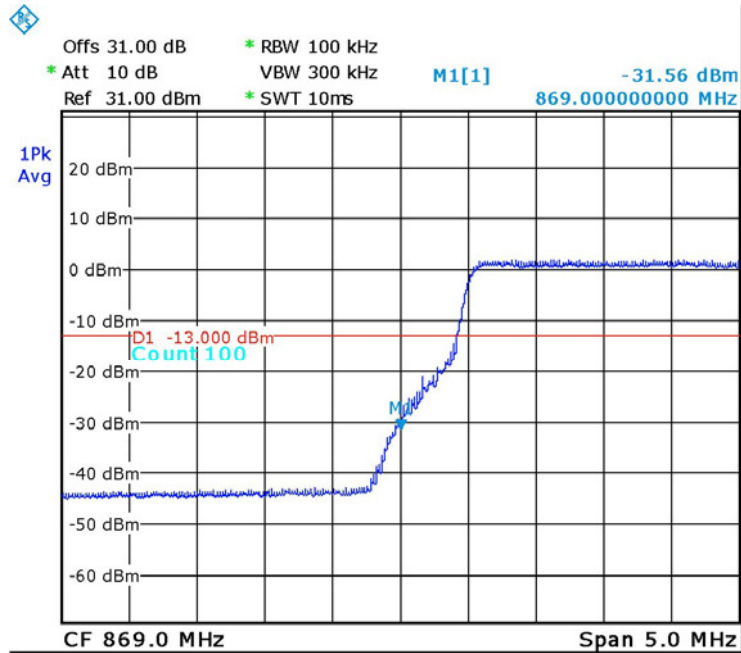


Date: 13.JUL.2016 14:25:13

Figure 52. — LTE 64QAM 874.0 MHz

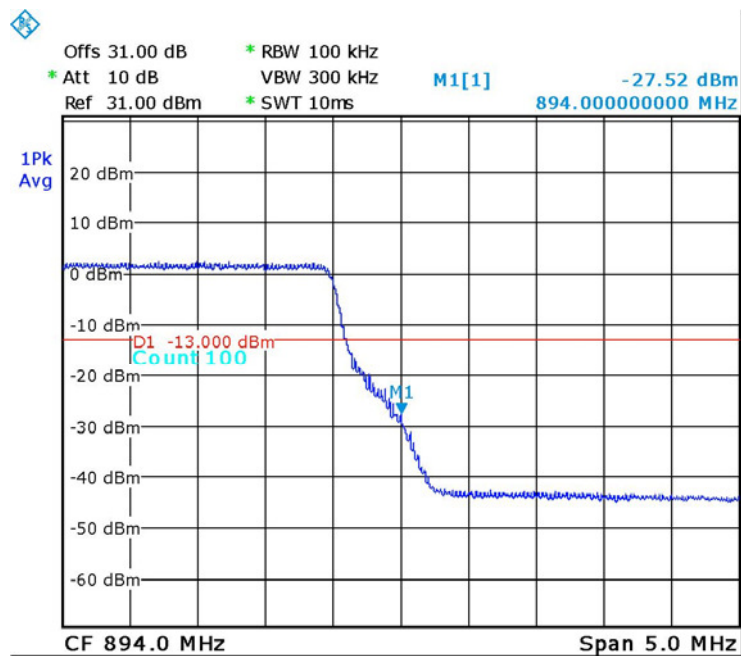


Date: 13.JUL.2016 14:24:23

Figure 53. — LTE 64QAM 899.0 MHz

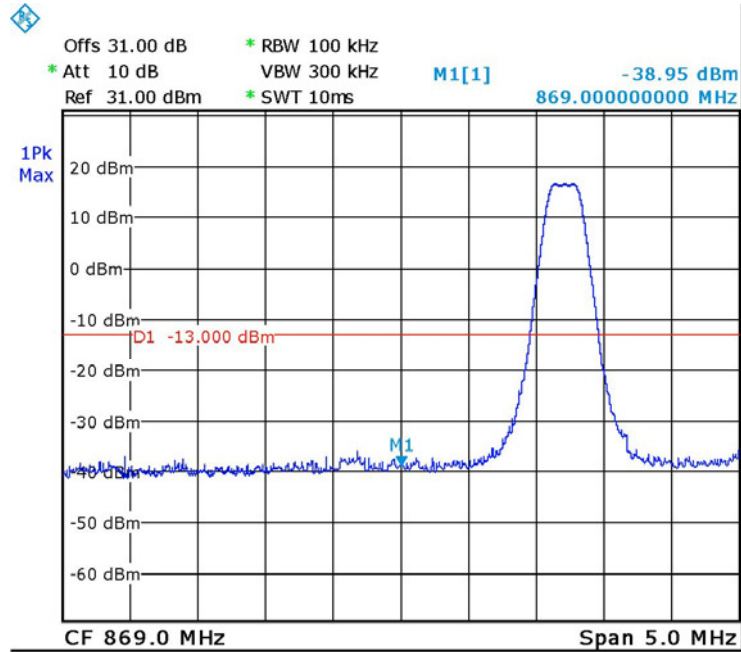

Date: 13.JUL.2016 14:21:07


Figure 54. — GSM - 870.2 MHz

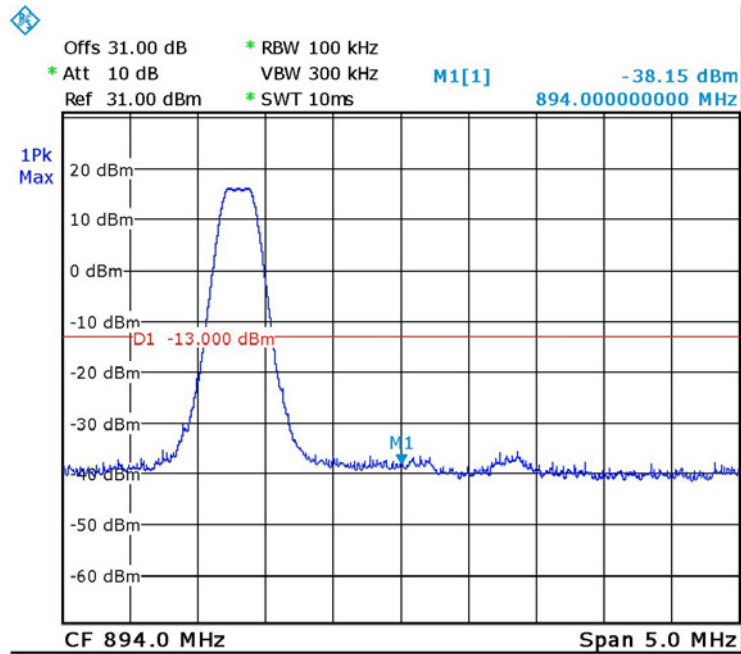

Date: 13.JUL.2016 14:21:49


Figure 55. — GSM - 892.8 MHz



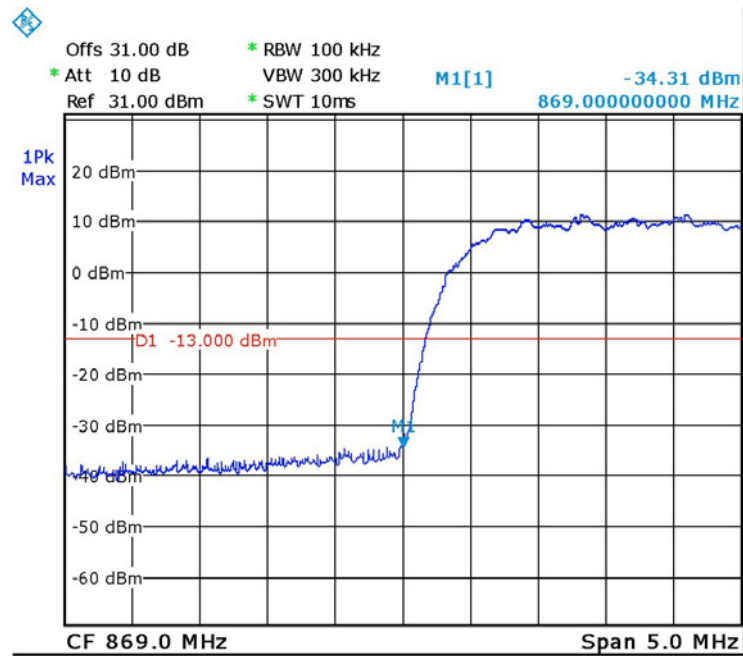

Date: 13.JUL.2016 14:19:11

Figure 56. — W-CDMA - 871.5 MHz

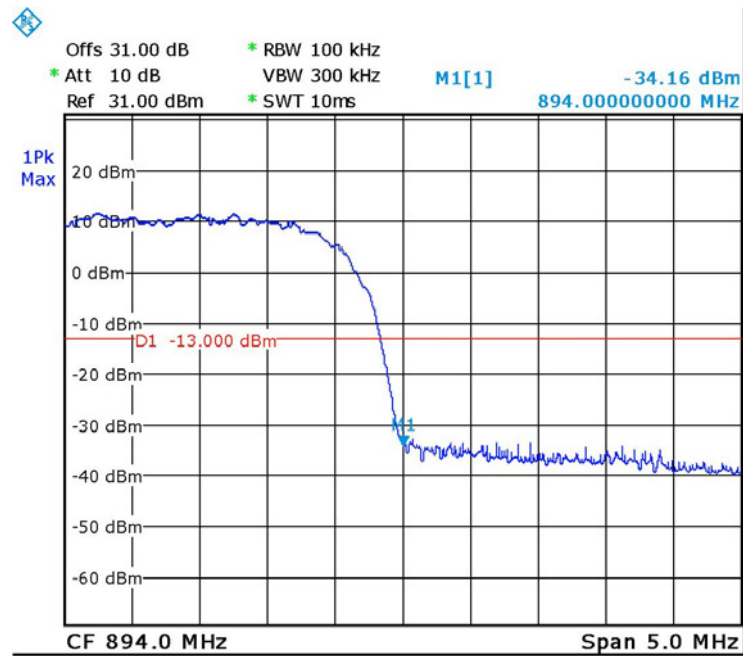

Date: 13.JUL.2016 14:18:28

Figure 57. — W-CDMA - 891.5 MHz



### 7.5 Test Equipment Used; Band Edge Spectrum CELL

| Instrument              | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                         |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer       | R&S          | FSL6     | 100194        | February 29, 2016     | March 1, 2017        |
| Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator        | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

Figure 58 Test Equipment Used



## 8. Spurious Emissions (Radiated) CELL

### 8.1 Test Specification

FCC Part 22, Section 917; FCC Part 2.1053

### 8.2 Test Procedure

(Temperature (23°C)/ Humidity (47%RH))

The test method was based on ANSI/TIA-603-D: 2010, Section 2.2.12 Unwanted Emissions: Radiated Spurious.

#### **For measurements between 0.009MHz-30MHz:**

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

#### **For measurements between 30.0MHz-1.0GHz:**

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

#### **For measurements between 1.0GHz-10.0GHz:**

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -10.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dBd)}$$

$P_d$  = Dipole equivalent power (result).

$P_g$  = Signal generator output level.

A Peak detector was used for this test.

The test was performed in 3 operation frequencies: low, mid and high.

Testing was performed when the RF port was connected to 50  $\Omega$  termination.

The table below describe only results with the highest radiation.



### 8.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding  $-13\text{dBm}$ .

### 8.4 Test Results

| Carrier Channel | Freq.  | Antenna Pol. | Maximum Peak Level | Signal Generator RF Output | Cable Loss | Antenna Gain | Effective Radiated Power Level | Limit | Margin |
|-----------------|--------|--------------|--------------------|----------------------------|------------|--------------|--------------------------------|-------|--------|
| (MHz)           | (MHz)  | (V/H)        | (dB $\mu$ V/m)     | (dBm)                      | (dB)       | (dBd)        | (dBm)                          | (dBm) | (dB)   |
| 870.2           | 1740.4 | V            | 50.6               | -50.1                      | 0.5        | 7.0          | -43.6                          | -13.0 | -30.6  |
|                 | 1740.4 | H            | 50.5               | -49.4                      | 0.5        | 7.0          | -42.9                          | -13.0 | -29.9  |
| 881.0           | 1762.0 | V            | 50.4               | -50.1                      | 0.5        | 7.0          | -43.6                          | -13.0 | -30.6  |
|                 | 1762.0 | H            | 50.5               | -49.4                      | 0.5        | 7.0          | -42.9                          | -13.0 | -29.9  |
| 892.8           | 1785.6 | V            | 50.5               | -50.1                      | 0.5        | 7.0          | -43.6                          | -13.0 | -30.6  |
|                 | 1785.6 | H            | 50.4               | -49.4                      | 0.5        | 7.0          | -42.9                          | -13.0 | -29.9  |

Figure 59 Spurious Emission (Radiated) CELL

JUDGEMENT; Passed by 29.9dB

The E.U.T met the requirements of the FCC Part 22, Section 917  
FCC Part 2.1053 specifications.



**8.5 Test Instrumentation Used, Radiated Measurements CELL**

| Instrument                  | Manufacturer    | Model            | Serial Number | Calibration           |                      |
|-----------------------------|-----------------|------------------|---------------|-----------------------|----------------------|
|                             |                 |                  |               | Last Calibration Date | Next Calibration Due |
| EMI Receiver                | HP              | 85422E           | 3906A00276    | March 3, 2016         | March 3, 2017        |
| RF Filter Section           | HP              | 85420E           | 3705A00248    | March 3, 2016         | March 3, 2017        |
| EMI Receiver                | R&S             | ESCI7            | 100724        | February 29, 2016     | March 1, 2017        |
| Spectrum Analyzer           | HP              | 8593EM           | 3536A00120ADI | March 10, 2016        | March 10, 2017       |
| Active Loop Antenna         | EMCO            | 6502             | 9506-2950     | November 5, 2015      | November 30, 2016    |
| Antenna Biconical           | EMCO            | 3110B            | 9912-3337     | March 24, 2016        | March 24, 2018       |
| Antenna Log Periodic        | EMCO            | 3146             | 9505-4081     | April 23, 2016        | April 23, 2017       |
| Horn Antenna 1G-18G         | ETS             | 3115             | 29845         | May 19, 2015          | May 19, 2018         |
| Low Noise Amplifier         | Narda           | LNA-DBS-0411N313 | 013           | March 1, 2015         | September 30, 2016   |
| Low Noise Amplifier         | Sophia Wireless | LNA 28-B         | 232           | March 1, 2015         | September 30, 2016   |
| MXG Vector Signal generator | Agilent         | N5182A           | MY49060440    | July 1, 2016          | July 1, 2017         |
| Semi Anechoic Civil Chamber | ETS             | S81              | SL 11643      | N/A                   | N/A                  |
| Antenna Mast                | ETS             | 2070-2           | -             | N/A                   | N/A                  |
| Turntable                   | ETS             | 2087             | -             | N/A                   | N/A                  |
| Mast & Table Controller     | ETS/EMCO        | 2090             | 9608-1456     | N/A                   | N/A                  |

**Figure 60 Test Equipment Used**