

Figure 492: Spurious Emissions at Antenna Terminal 256QAM 15MHz B.W.; 735.5MHz, 60kHz

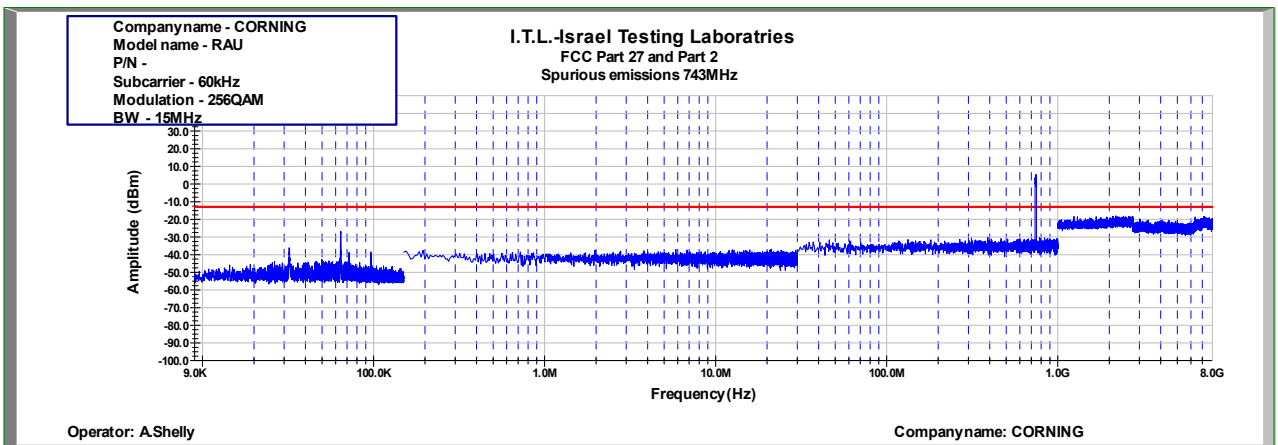


Figure 493: Spurious Emissions at Antenna Terminal 256QAM 15MHz B.W.; 743.0MHz, 60kHz

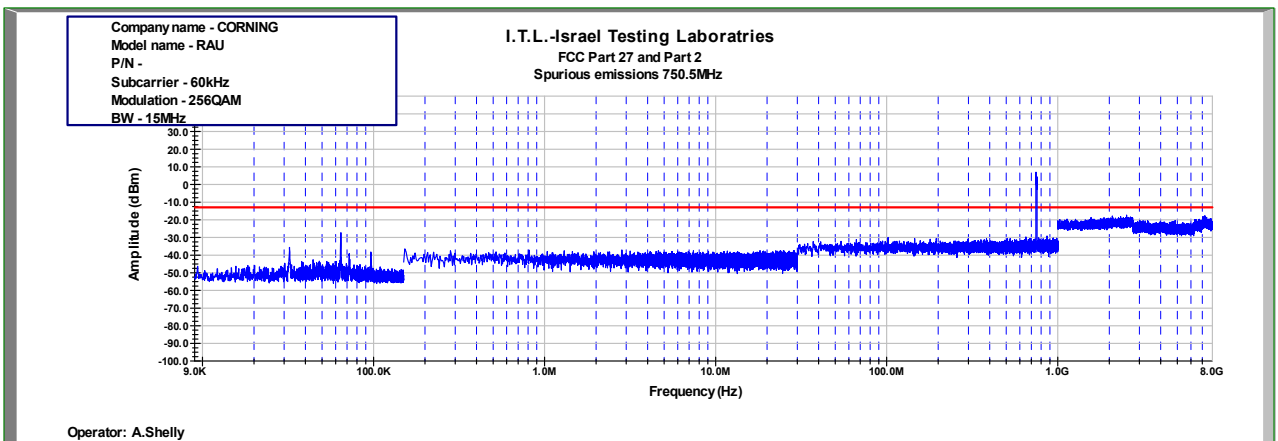


Figure 494: Spurious Emissions at Antenna Terminal 256QAM 15MHz B.W.; 750.5MHz, 60kHz

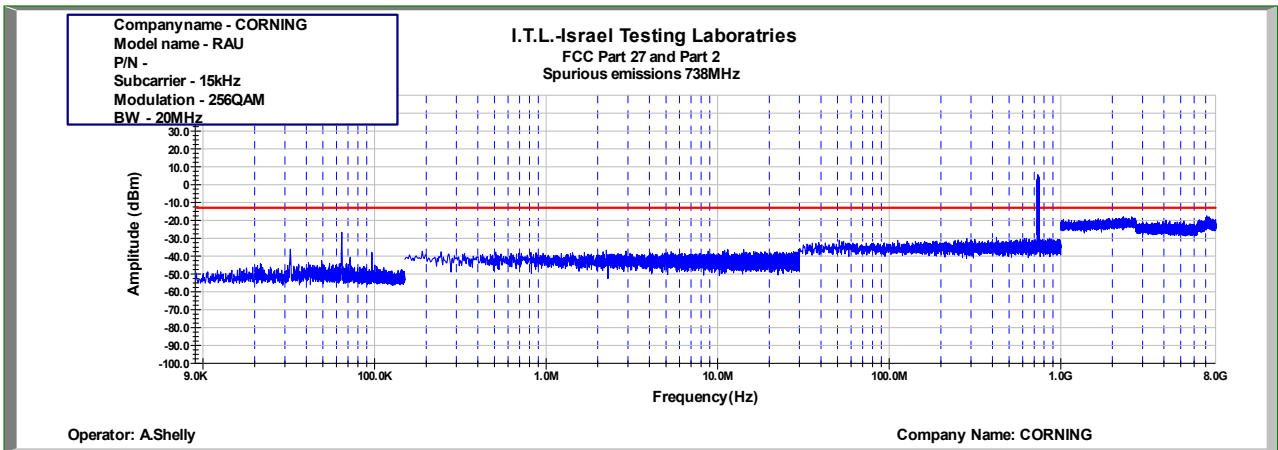


Figure 495: Spurious Emissions at Antenna Terminal 256QAM 20MHz B.W.; 738.0MHz, 15kHz

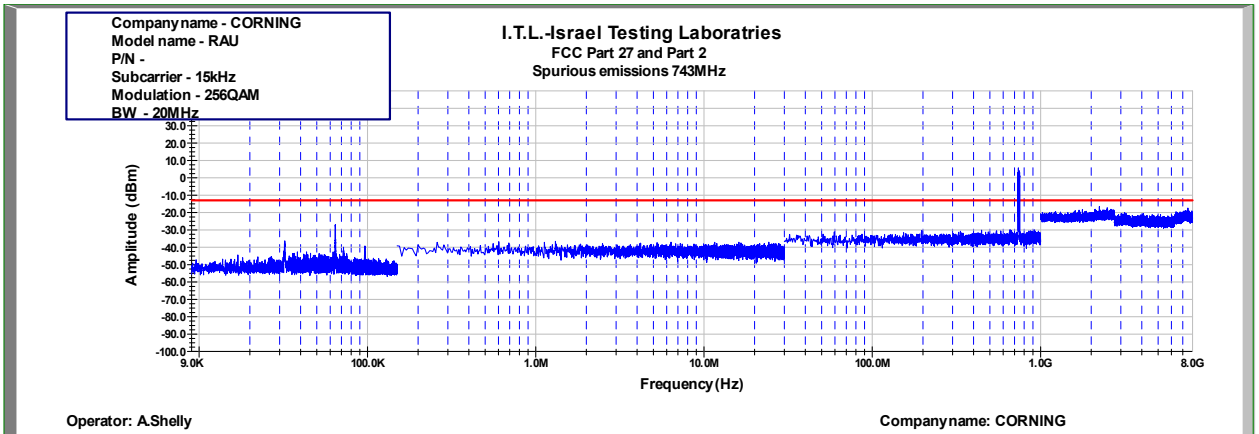


Figure 496: Spurious Emissions at Antenna Terminal 256QAM 20MHz B.W.; 743.0MHz, 15kHz

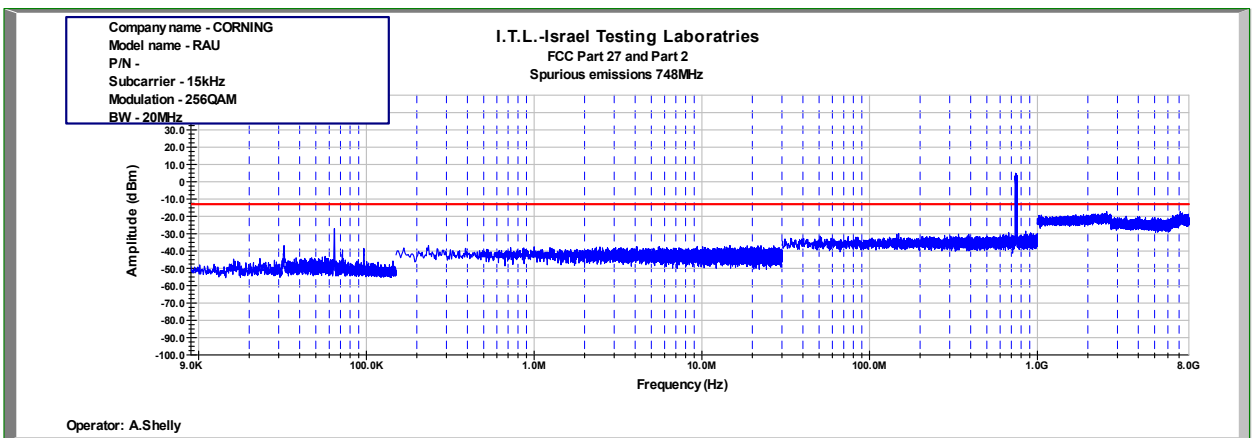


Figure 497: Spurious Emissions at Antenna Terminal 256QAM 20MHz B.W.; 748.0MHz, 15kHz

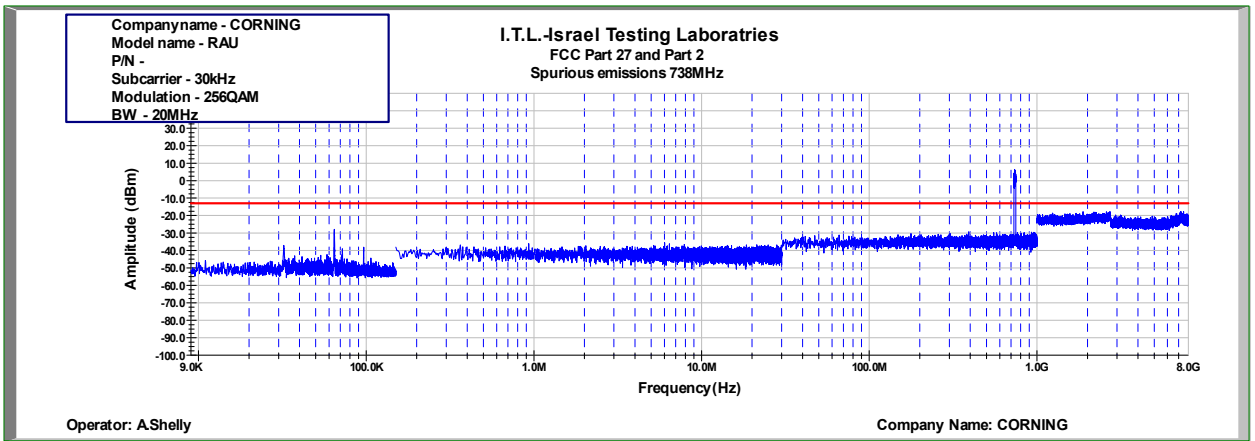


Figure 498: Spurious Emissions at Antenna Terminal 256QAM 20MHz B.W.; 738.0MHz, 30kHz

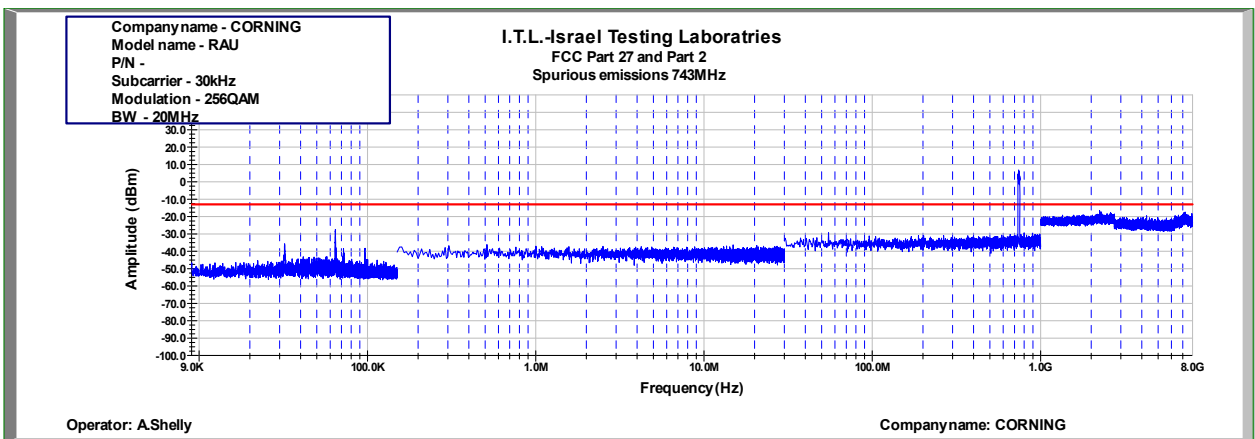


Figure 499: Spurious Emissions at Antenna Terminal 256QAM 20MHz B.W.; 743.0MHz, 30kHz

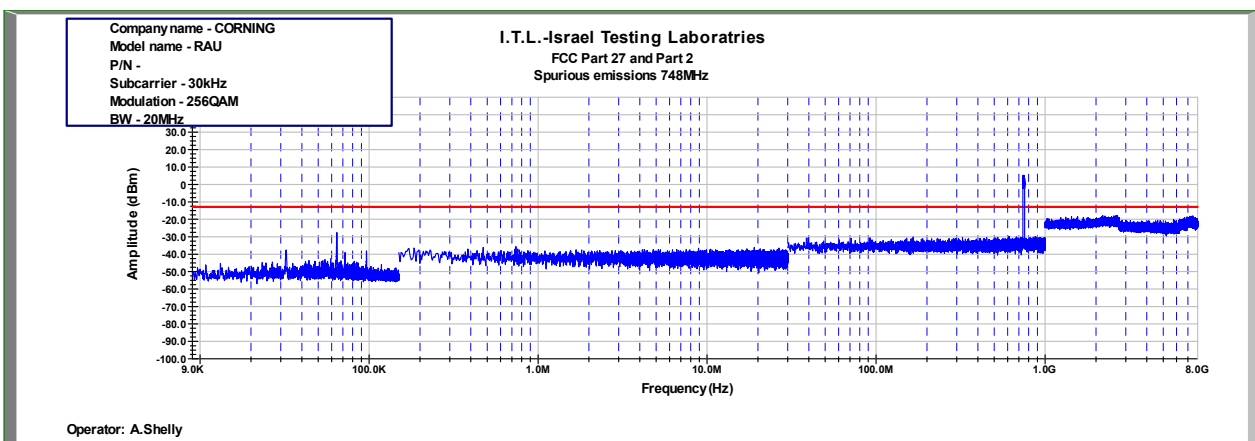


Figure 500: Spurious Emissions at Antenna Terminal 256QAM 20MHz B.W.; 748.0MHz, 30kHz

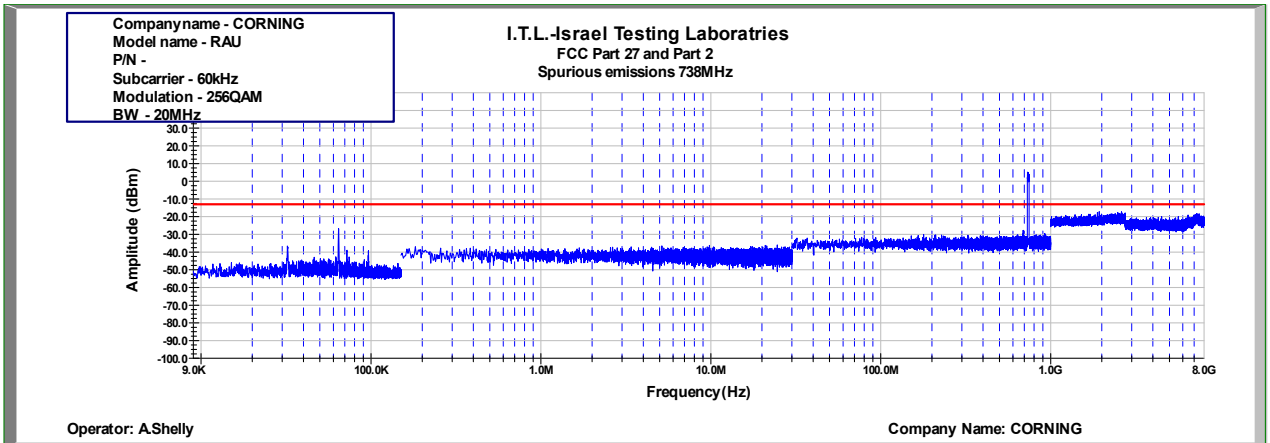


Figure 501: Spurious Emissions at Antenna Terminal 256QAM 20MHz B.W.; 738.0MHz, 60kHz

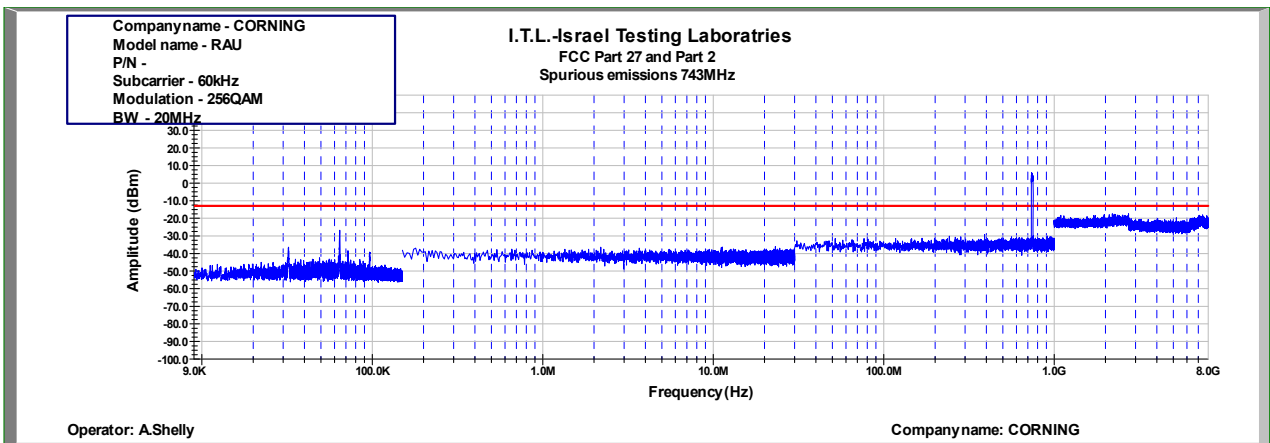


Figure 502: Spurious Emissions at Antenna Terminal 256QAM 20MHz B.W.; 743.0MHz, 60kHz

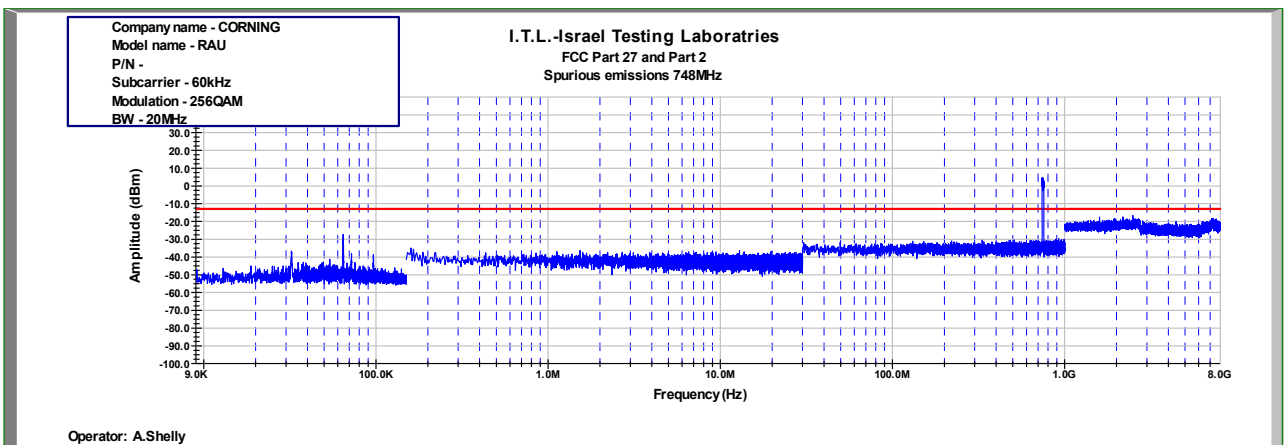


Figure 503: Spurious Emissions at Antenna Terminal 256QAM 20MHz B.W.; 748.0MHz, 60kHz

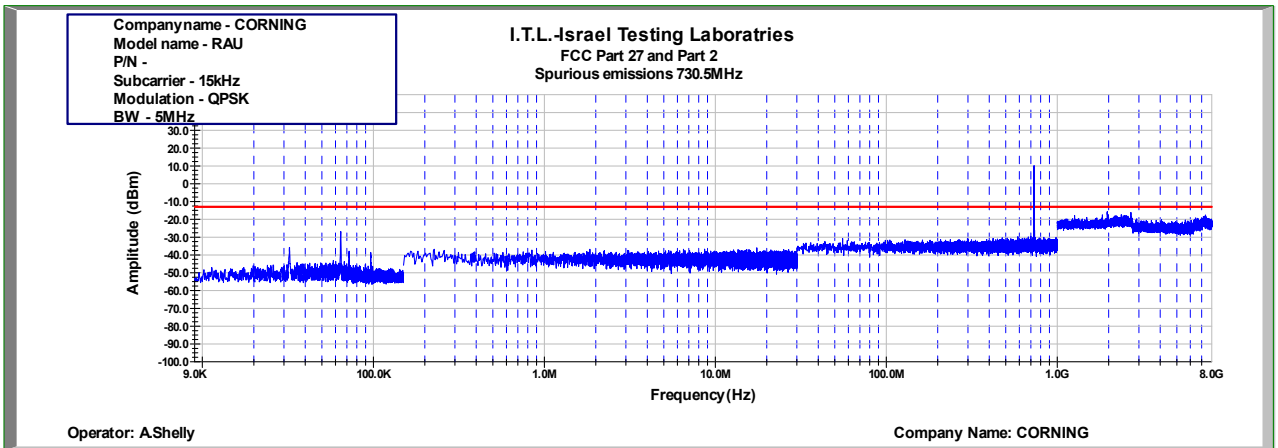


Figure 504: Spurious Emissions at Antenna Terminal QPSK 5MHz B.W.; 730.5MHz, 15kHz

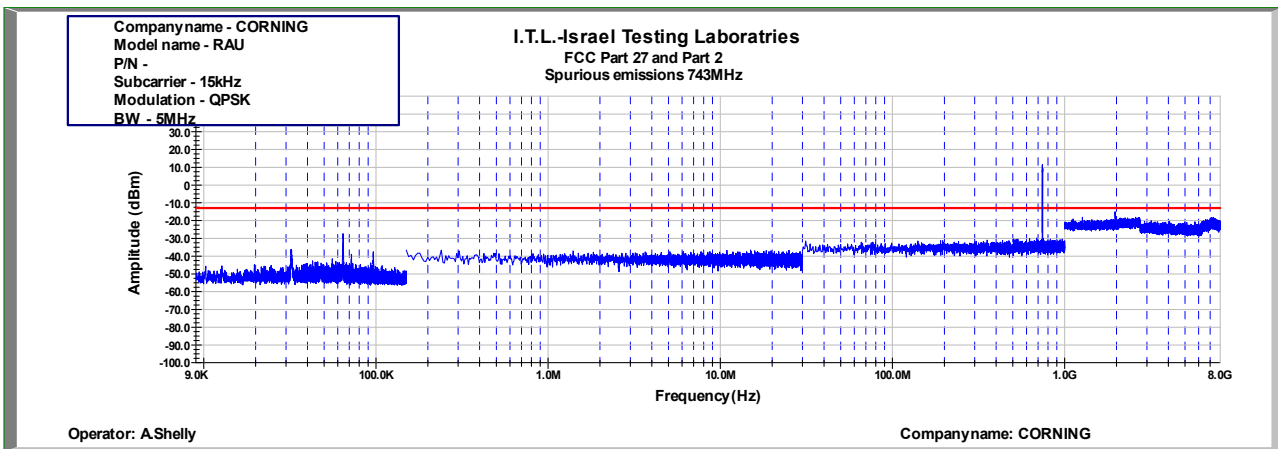


Figure 505: Spurious Emissions at Antenna Terminal QPSK 5MHz B.W.; 743.0MHz, 15kHz

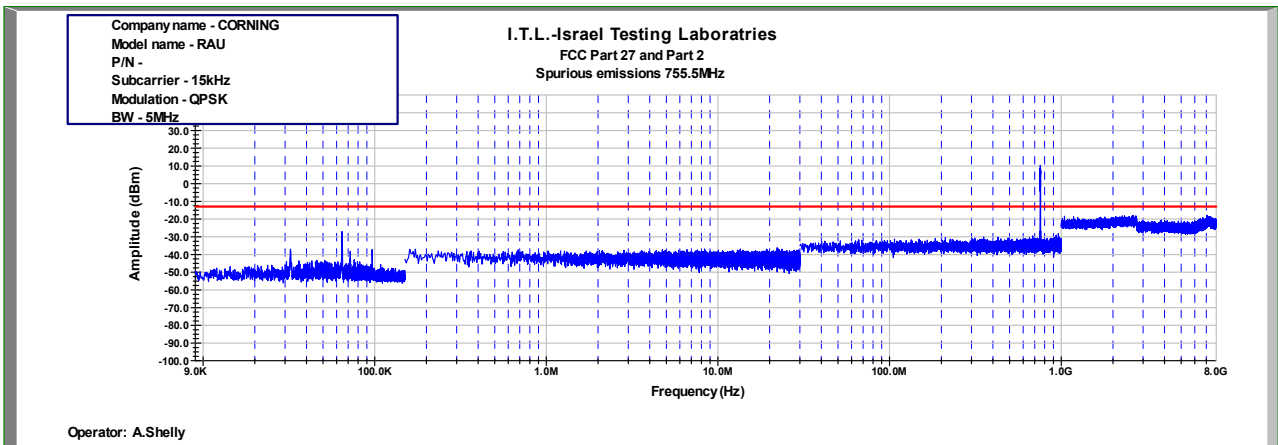


Figure 506: Spurious Emissions at Antenna Terminal QPSK 5MHz B.W.; 755.5MHz, 15kHz

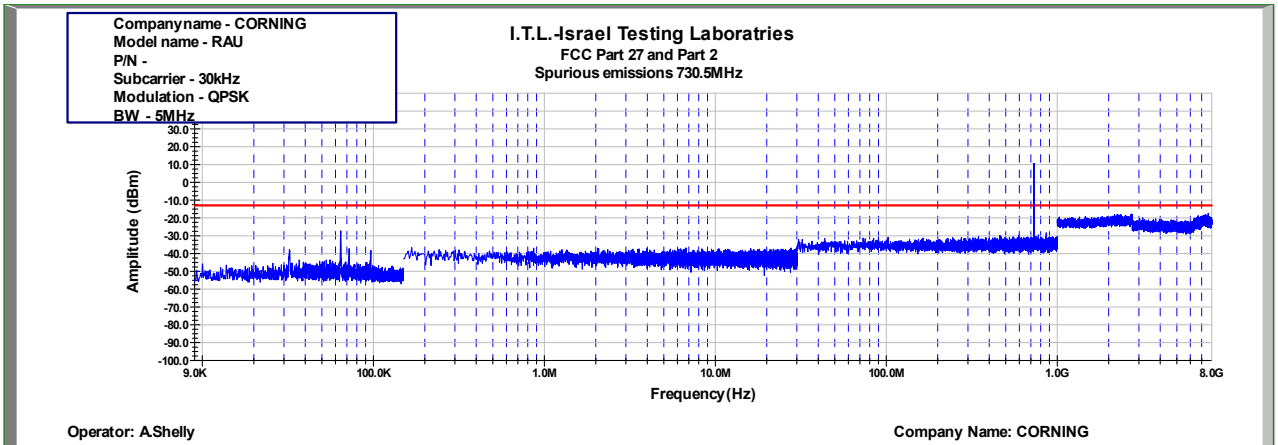


Figure 507: Spurious Emissions at Antenna Terminal QPSK 5MHz B.W.; 730.0MHz, 30kHz

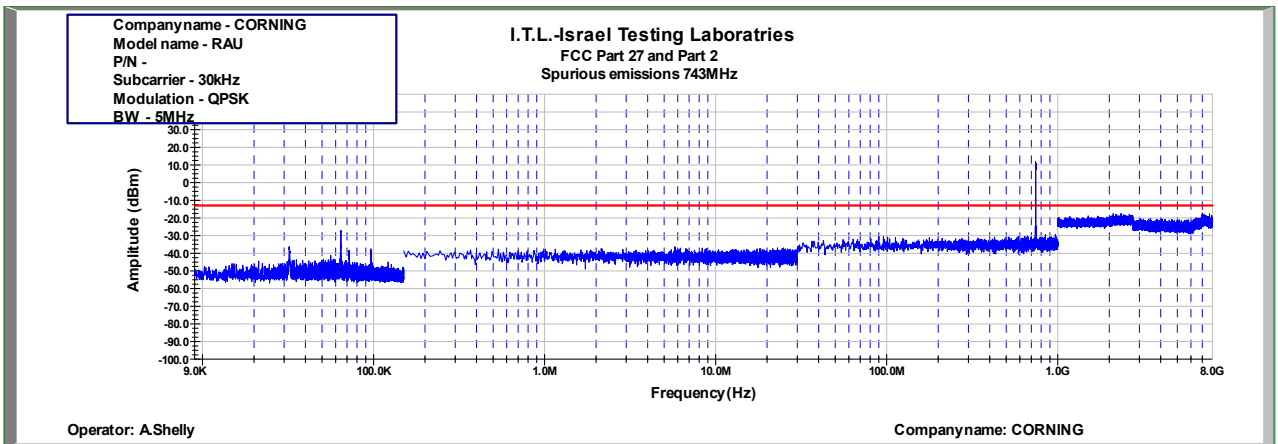


Figure 508: Spurious Emissions at Antenna Terminal QPSK 5MHz B.W.; 743.0MHz, 30kHz

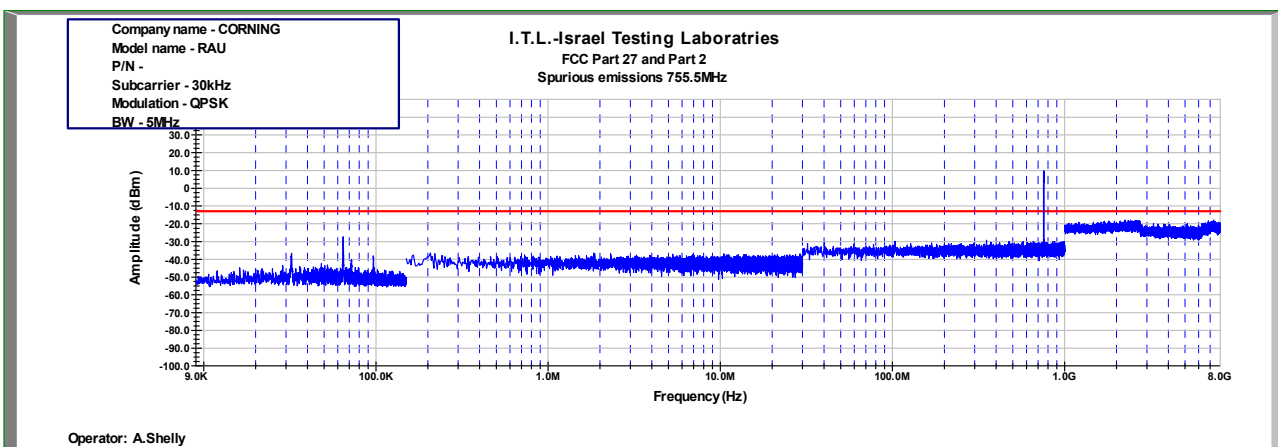


Figure 509: Spurious Emissions at Antenna Terminal QPSK 5MHz B.W.; 755.5MHz, 30kHz

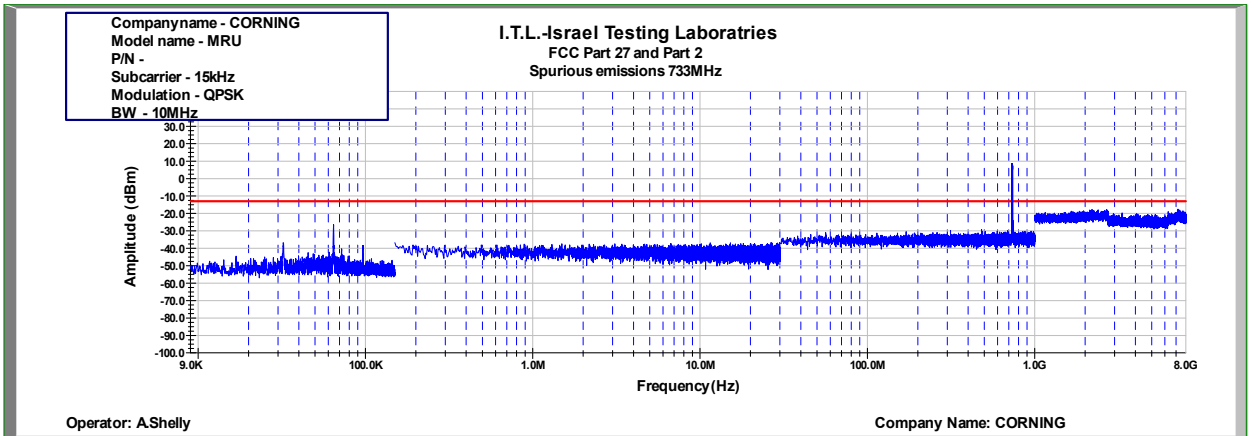


Figure 510: Spurious Emissions at Antenna Terminal QPSK 10MHz B.W.; 733.0MHz, 15kHz

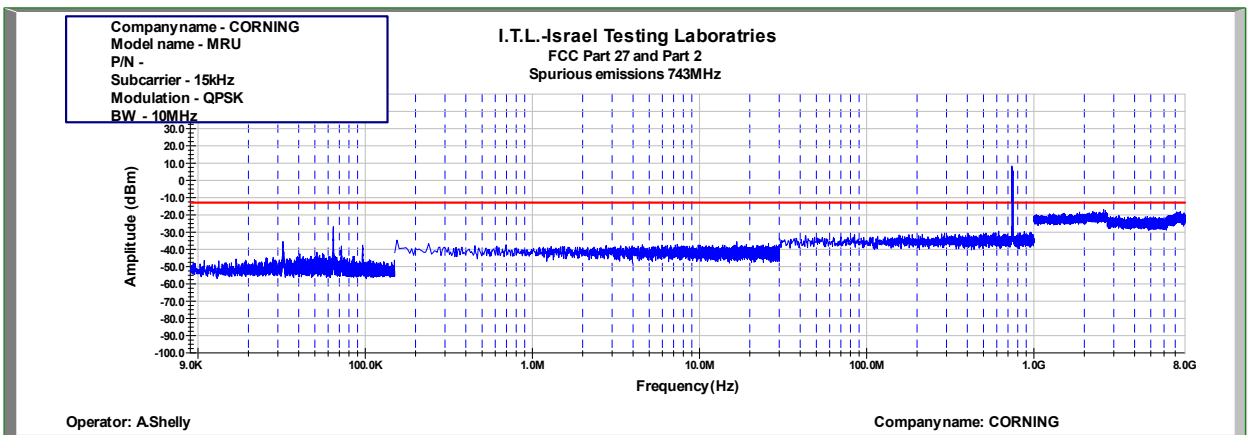


Figure 511: Spurious Emissions at Antenna Terminal QPSK 10MHz B.W.; 743.0MHz, 15kHz

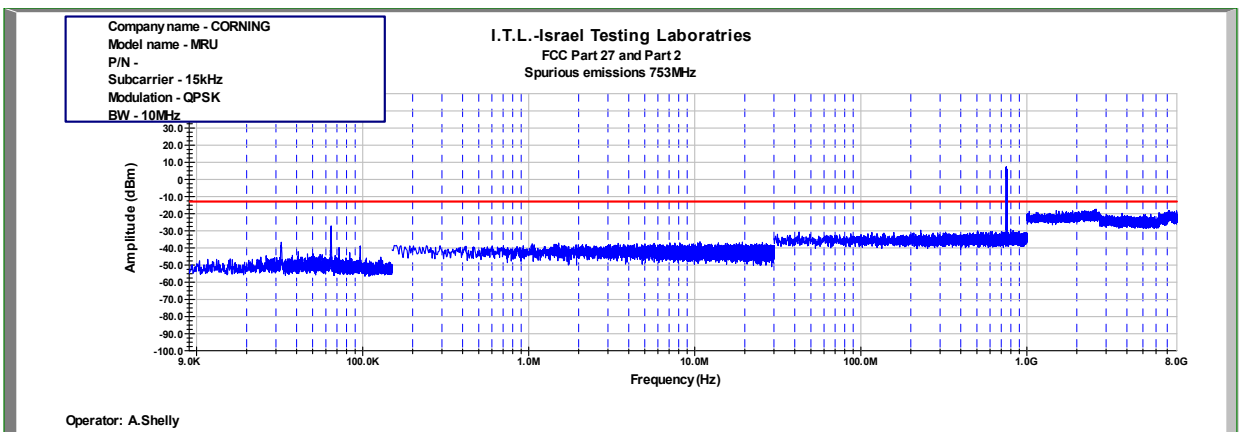


Figure 512: Spurious Emissions at Antenna Terminal QPSK 10MHz B.W.; 753.0MHz, 15kHz

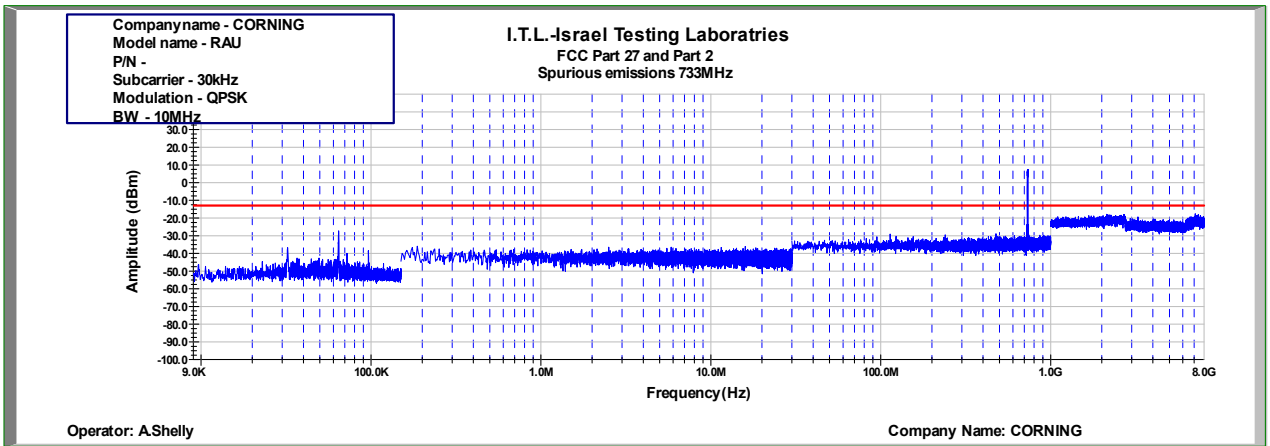


Figure 513: Spurious Emissions at Antenna Terminal QPSK 10MHz B.W.; 733.0MHz, 30kHz

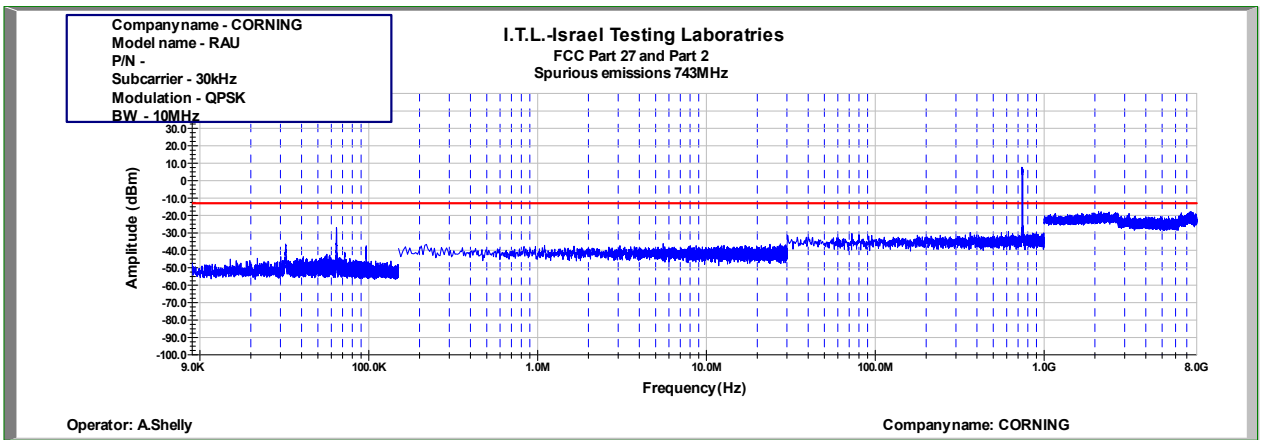


Figure 514: Spurious Emissions at Antenna Terminal QPSK 10MHz B.W.; 743.0MHz, 30kHz

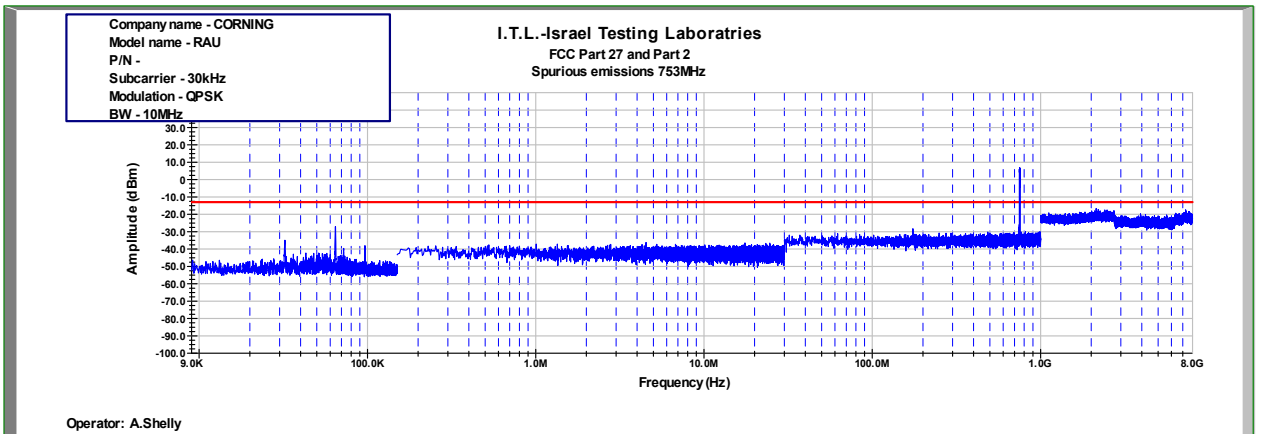


Figure 515: Spurious Emissions at Antenna Terminal QPSK 10MHz B.W.; 753.0MHz, 30kHz

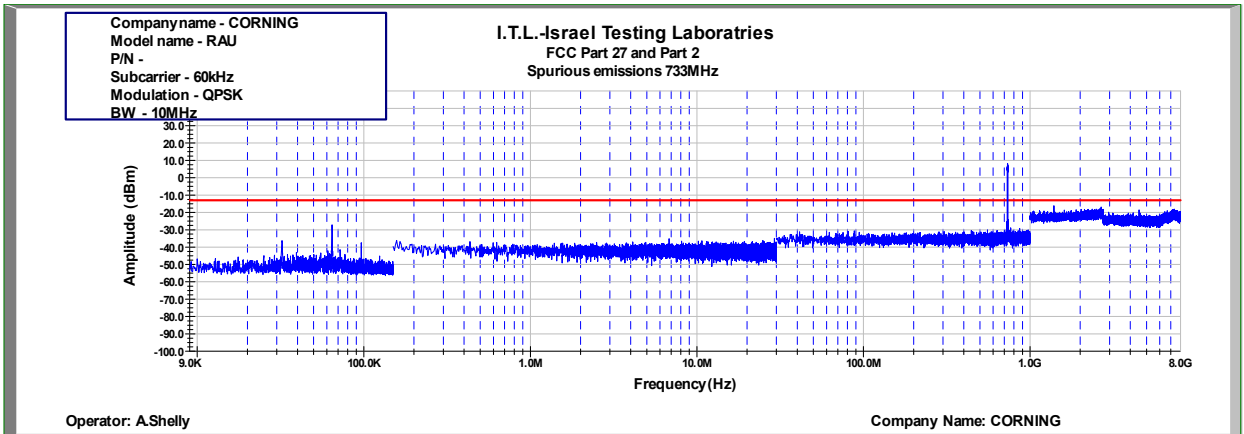


Figure 516: Spurious Emissions at Antenna Terminal QPSK 10MHz B.W.; 733.0MHz, 60kHz

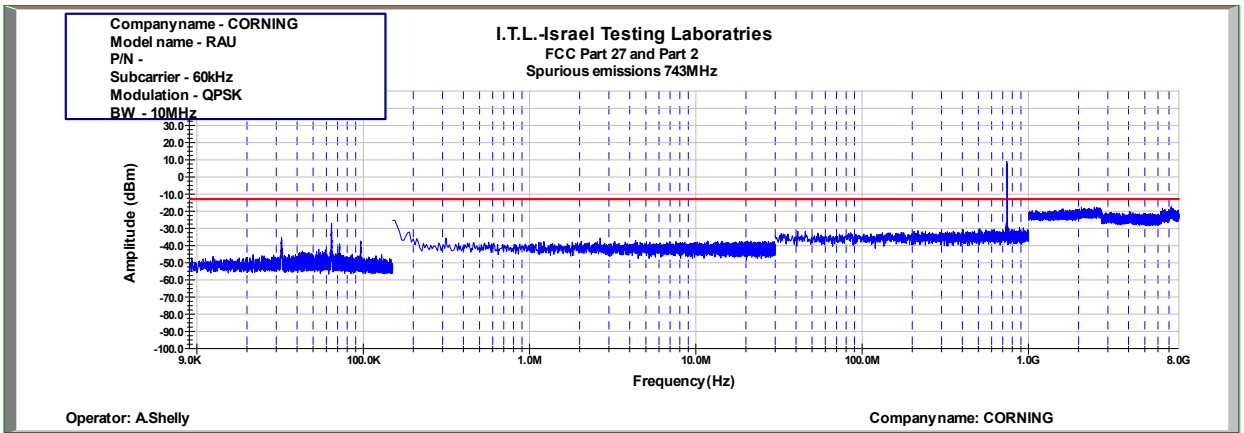


Figure 517: Spurious Emissions at Antenna Terminal QPSK 10MHz B.W.; 743.0MHz, 60kHz

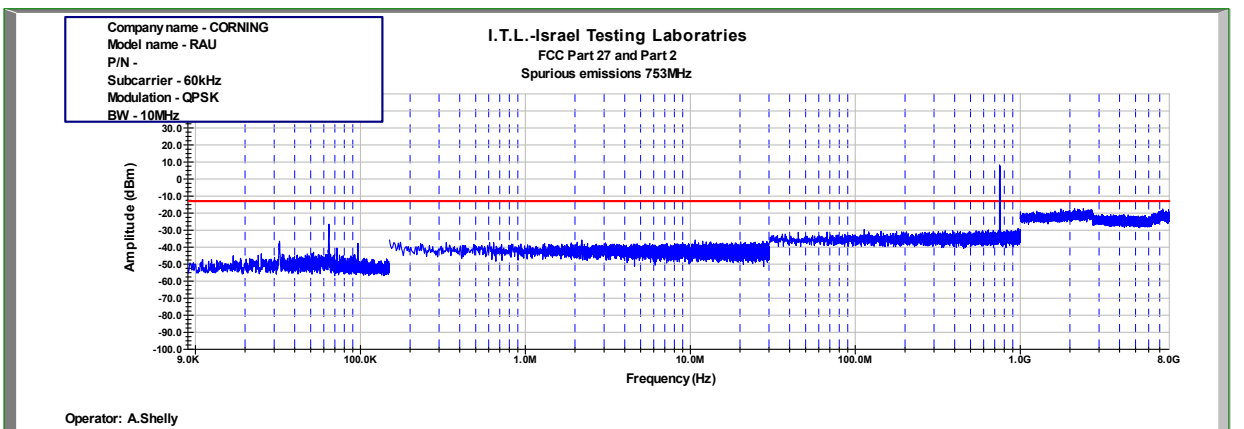


Figure 518: Spurious Emissions at Antenna Terminal QPSK 10MHz B.W.; 753.0MHz, 60kHz

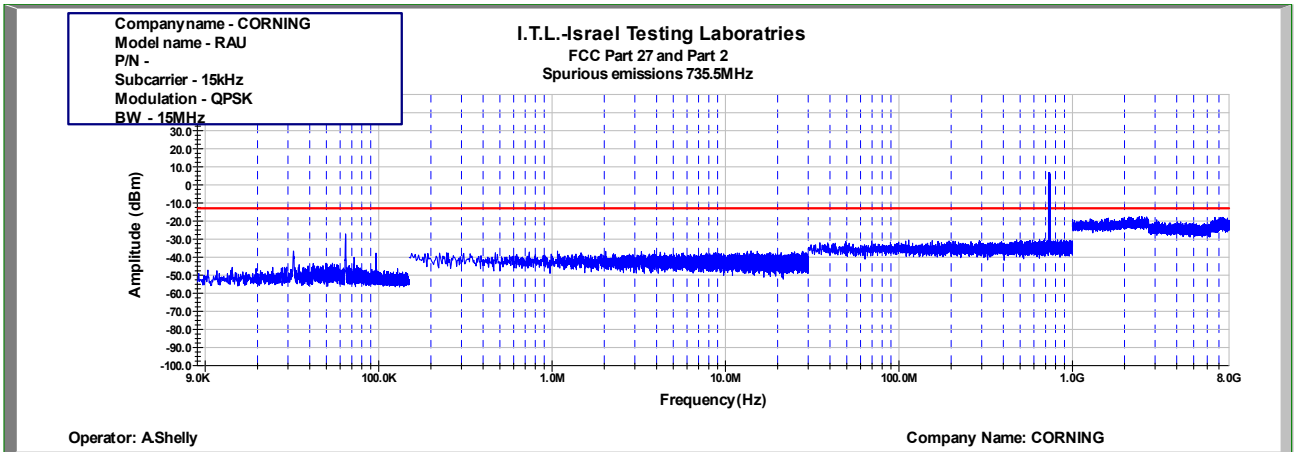


Figure 519: Spurious Emissions at Antenna Terminal QPSK 15MHz B.W.; 735.5MHz, 15kHz

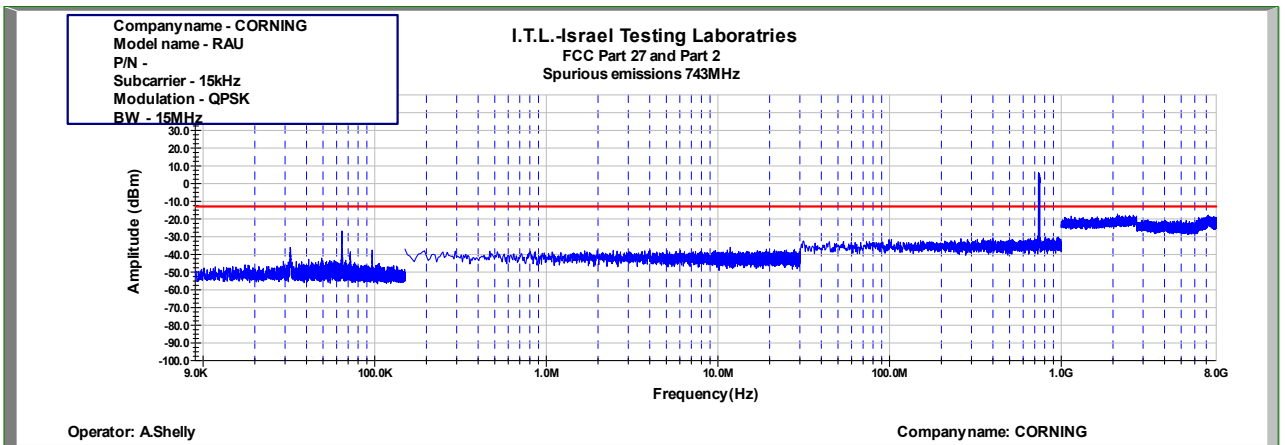


Figure 520: Spurious Emissions at Antenna Terminal QPSK 15MHz B.W.; 743.0MHz, 15kHz

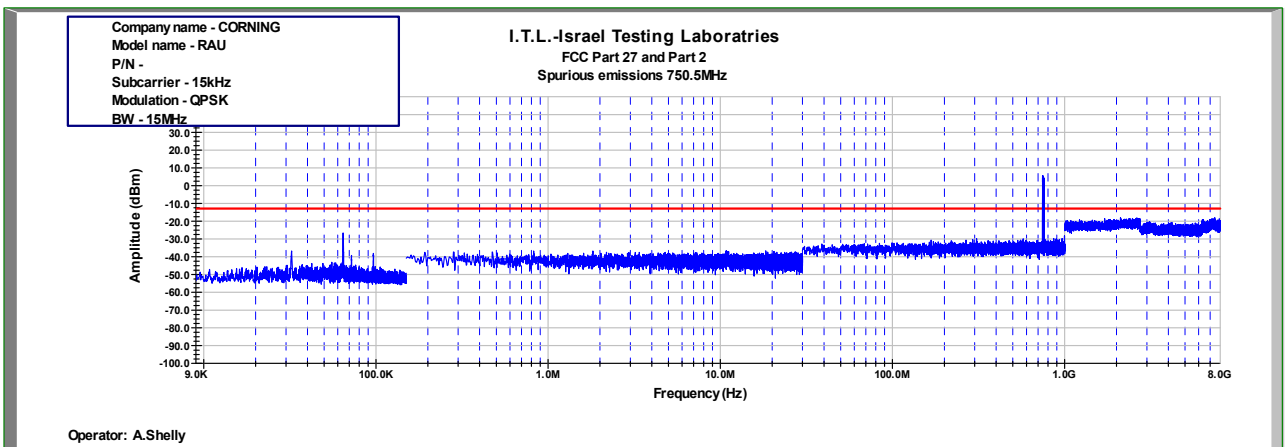


Figure 521: Spurious Emissions at Antenna Terminal QPSK 15MHz B.W.; 750.5MHz, 15kHz

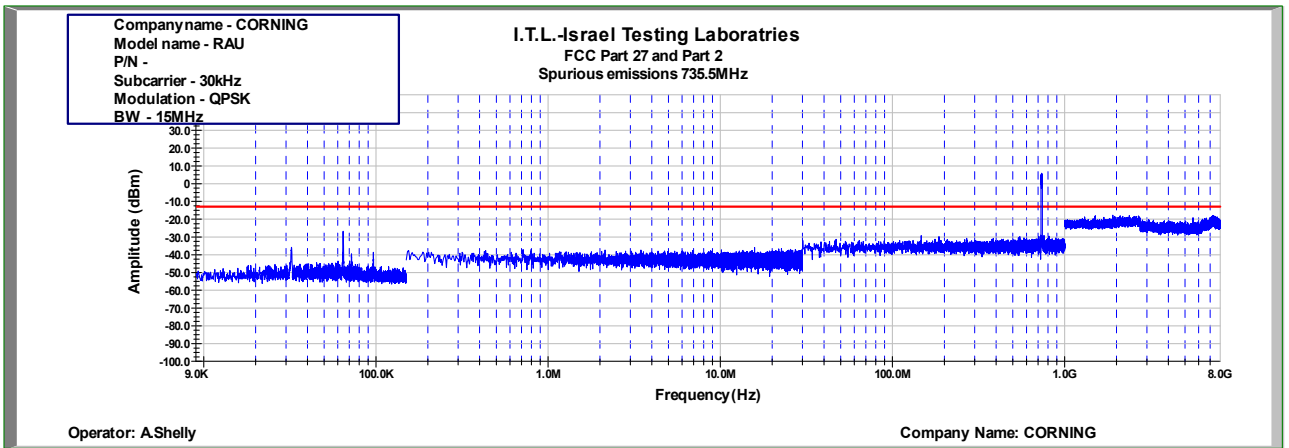


Figure 522: Spurious Emissions at Antenna Terminal QPSK 15MHz B.W.; 735.5MHz, 30kHz

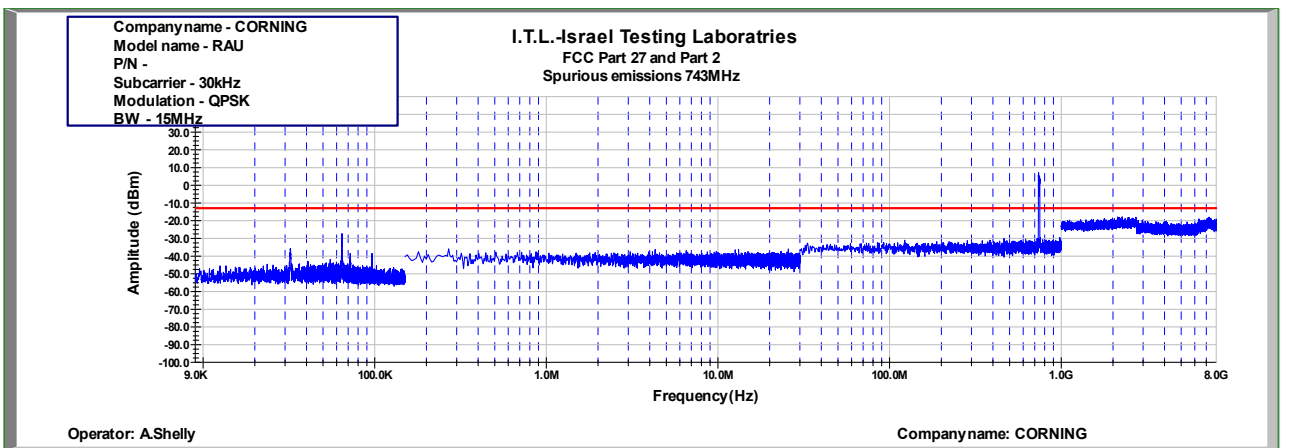


Figure 523: Spurious Emissions at Antenna Terminal QPSK 15MHz B.W.; 743.0MHz, 30kHz

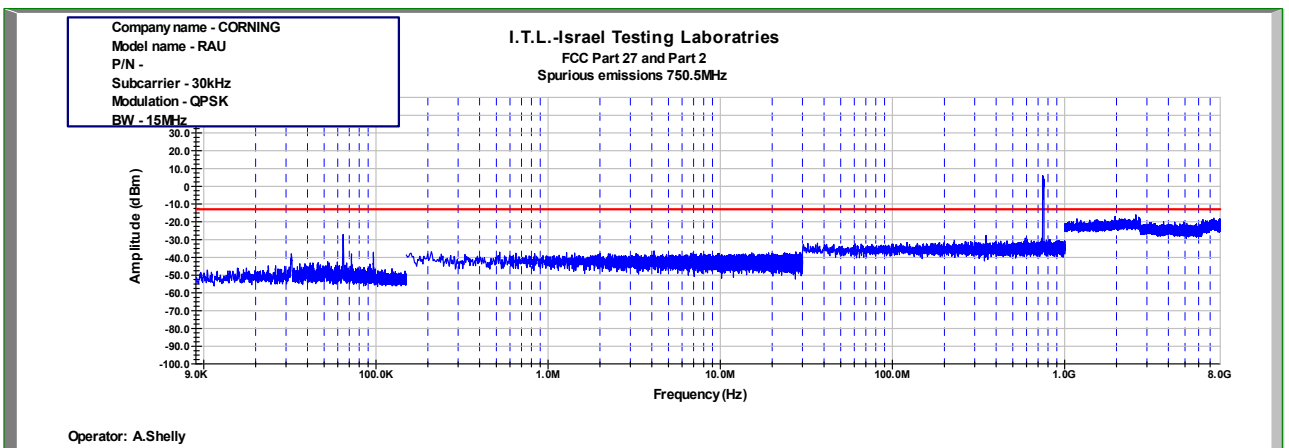


Figure 524: Spurious Emissions at Antenna Terminal QPSK 15MHz B.W.; 750.0MHz, 30kHz

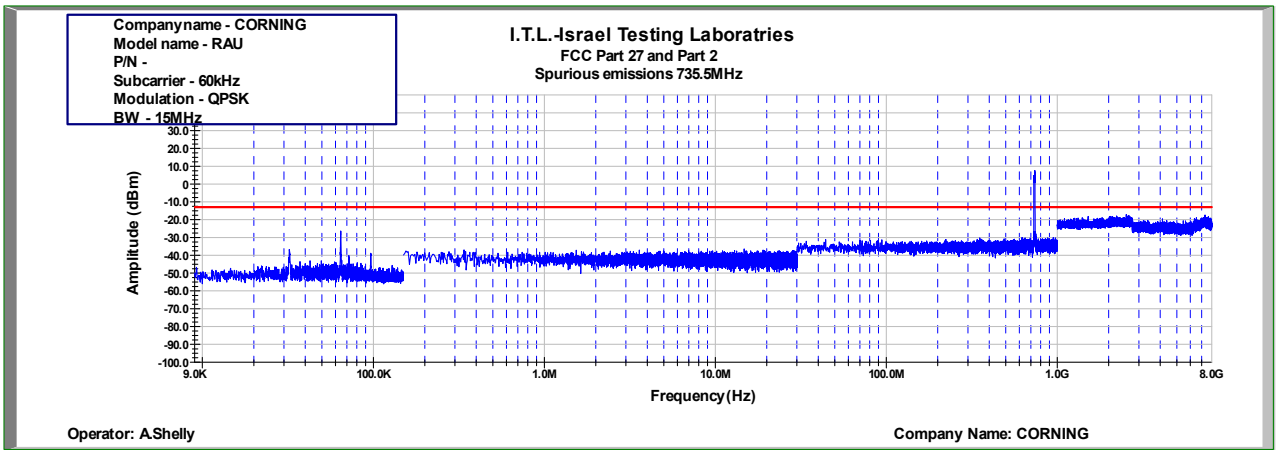


Figure 525: Spurious Emissions at Antenna Terminal QPSK 15MHz B.W.; 735.5MHz, 60kHz

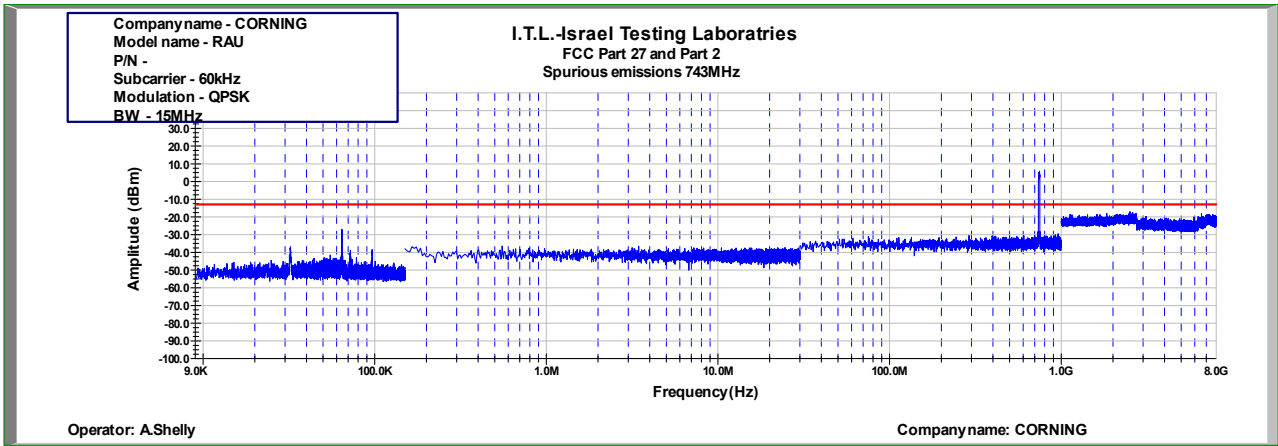


Figure 526: Spurious Emissions at Antenna Terminal QPSK 15MHz B.W.; 743.0MHz, 60kHz

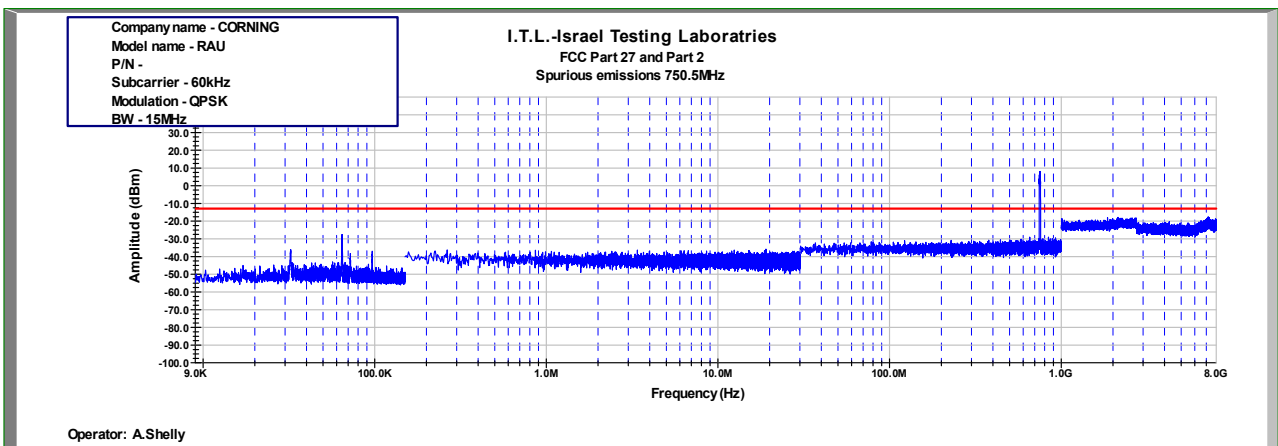


Figure 527: Spurious Emissions at Antenna Terminal QPSK 15MHz B.W.; 750.5MHz, 60kHz

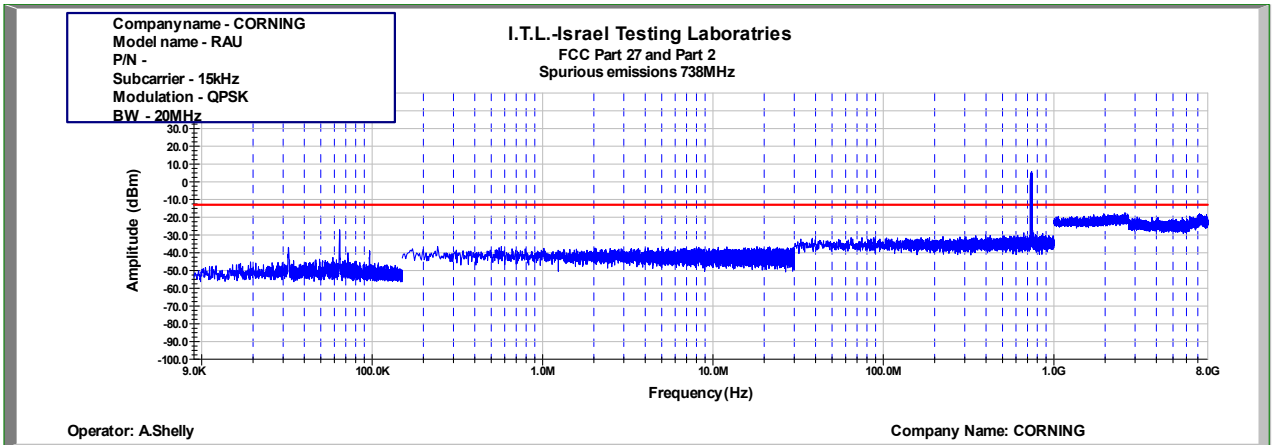


Figure 528: Spurious Emissions at Antenna Terminal QPSK 20MHz B.W.; 738.0MHz, 15kHz

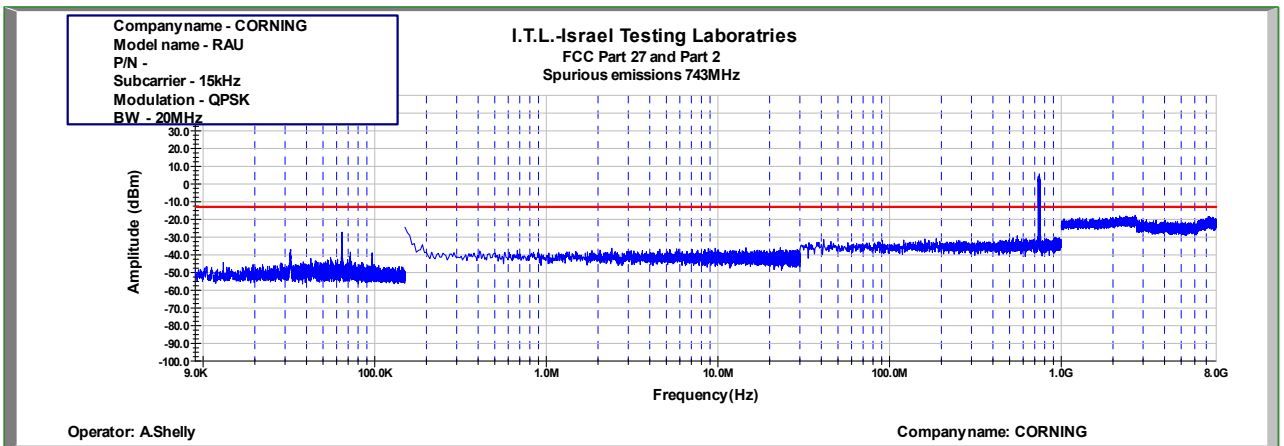


Figure 529: Spurious Emissions at Antenna Terminal QPSK 20MHz B.W.; 743.0MHz, 15kHz

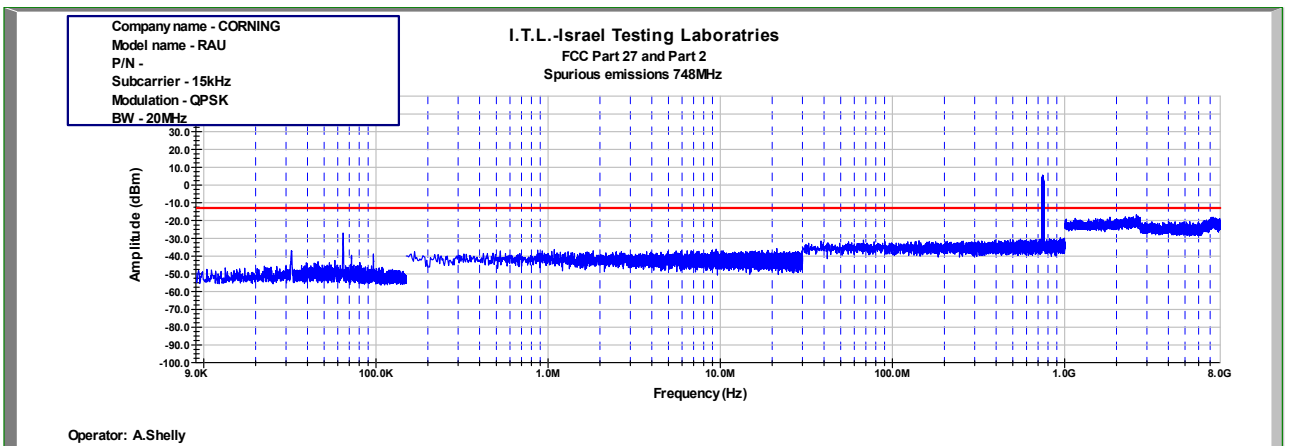


Figure 530: Spurious Emissions at Antenna Terminal QPSK 20MHz B.W.; 748.0MHz, 15kHz

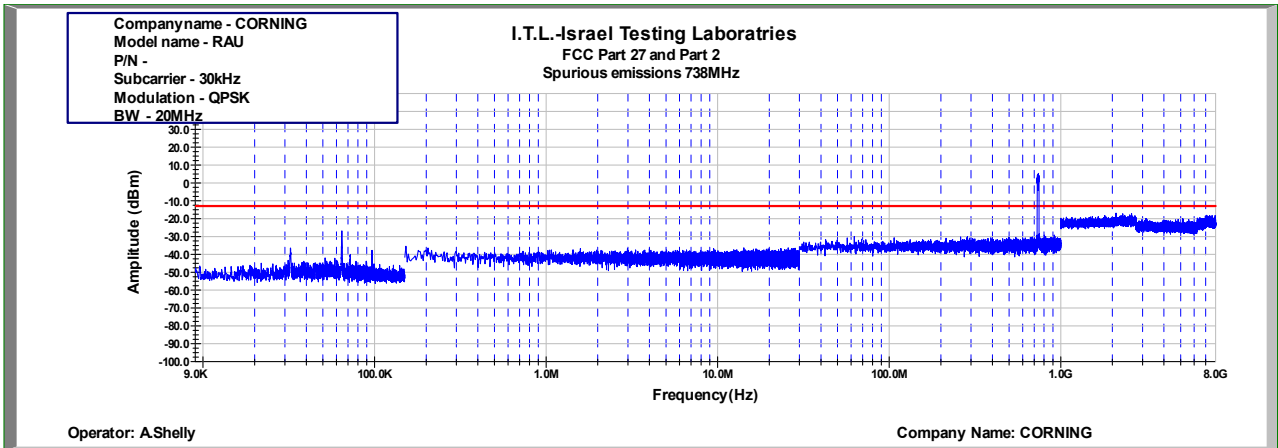


Figure 531: Spurious Emissions at Antenna Terminal QPSK 20MHz B.W.; 738.0MHz, 30kHz

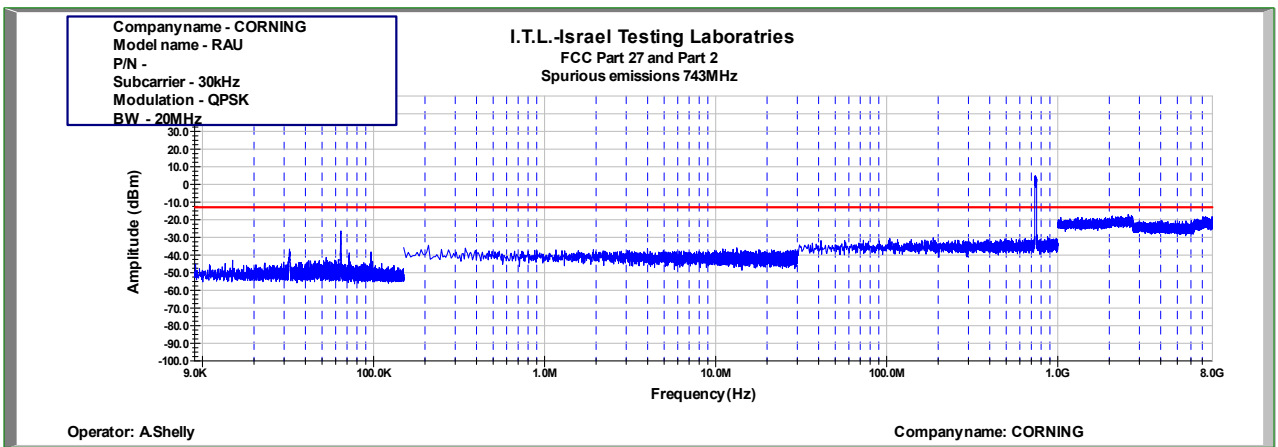


Figure 532: Spurious Emissions at Antenna Terminal QPSK 20MHz B.W.; 743.0MHz, 30kHz

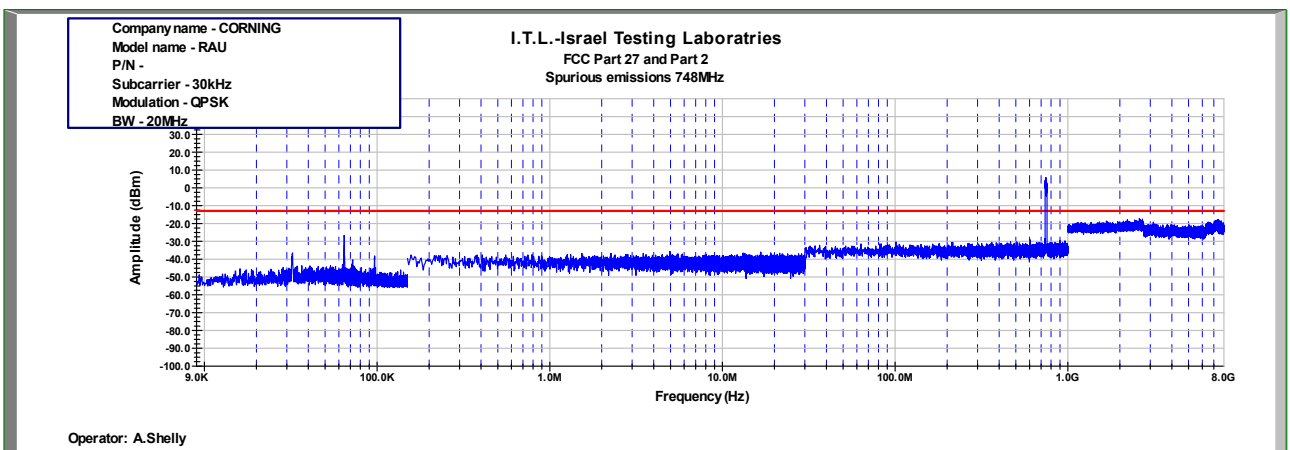


Figure 533: Spurious Emissions at Antenna Terminal QPSK 20MHz B.W.; 748.0MHz, 30kHz

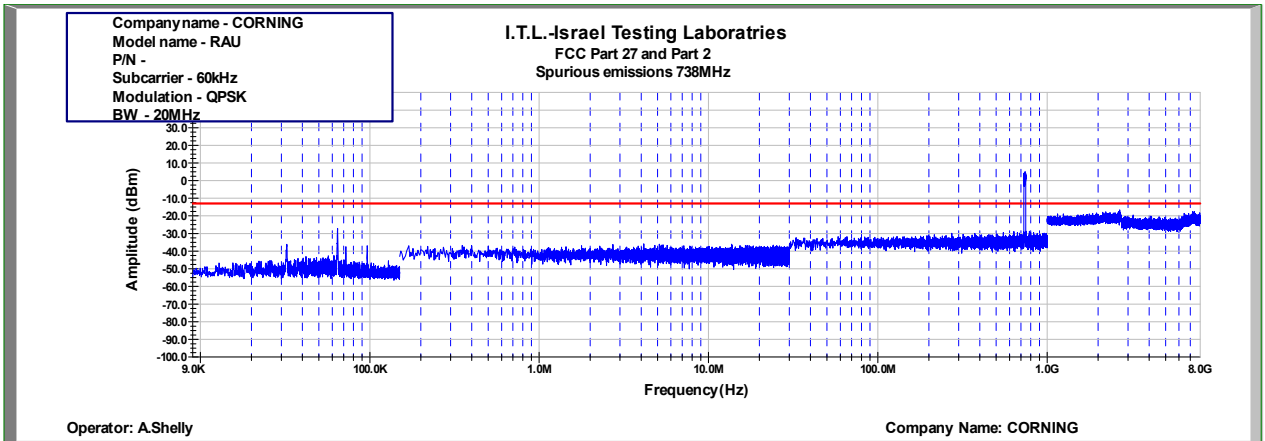


Figure 534: Spurious Emissions at Antenna Terminal QPSK 20MHz B.W.; 738.0MHz, 60kHz

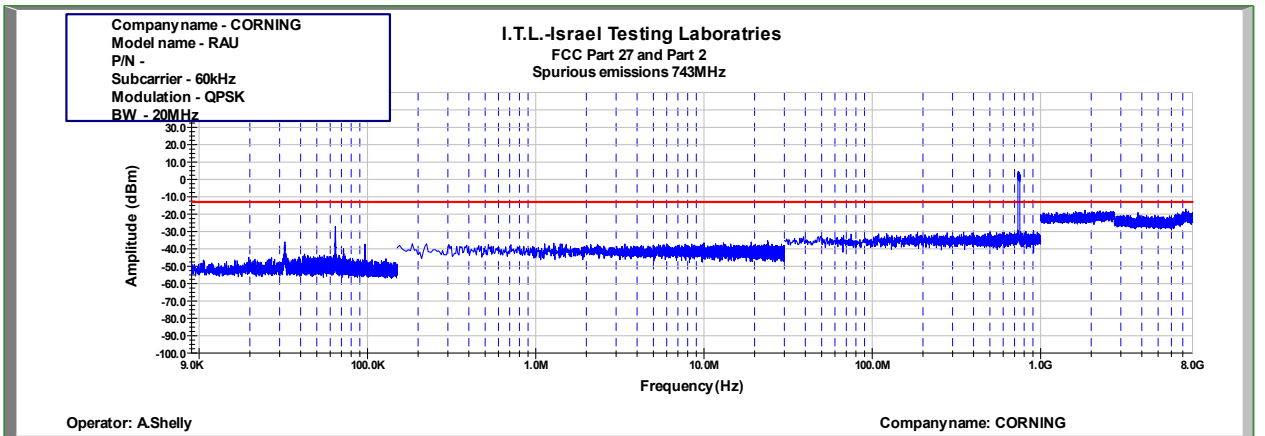


Figure 535: Spurious Emissions at Antenna Terminal QPSK 20MHz B.W.; 743.0MHz, 60kHz

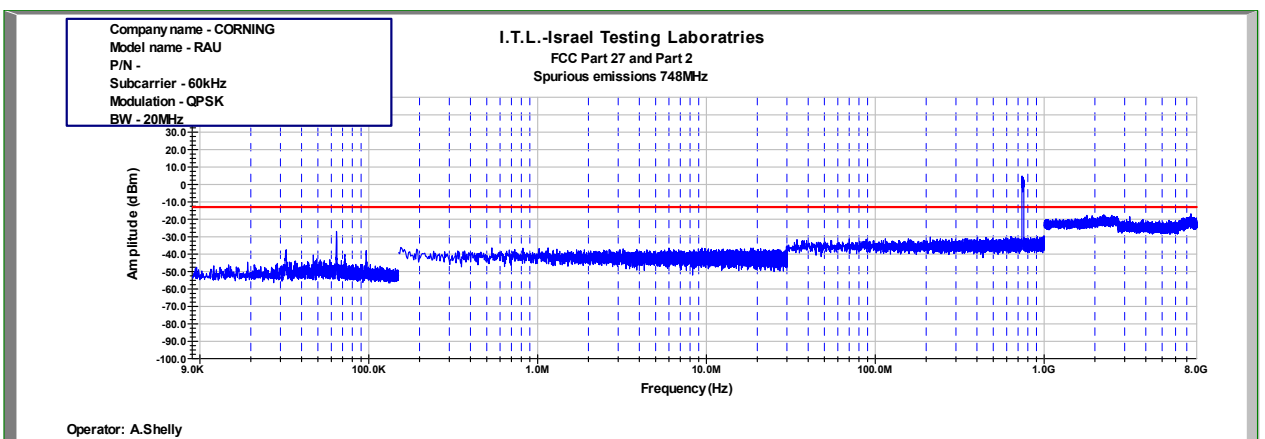


Figure 536: Spurious Emissions at Antenna Terminal QPSK 20MHz B.W.; 748.0MHz, 60kHz

6.5 Test Equipment Used; Spurious Emissions at Antenna Terminals

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
EXA signal Analyzer	Agilent Technologies	N9010A	MY52220686	November 28, 2018	May 30, 2021
Vector Signal Generator	R&S	SMBV100B	1423.1003K02-101470-XE	October 2, 2019	October 2, 2022
40 dB Attenuator	Weinschel	WA 39-40-33	A1323	July 7, 2020	July 31, 2021
RF Cable	Huber Suner	Sucofelex	27504/4PEA	August 23, 2020	August 31, 2021

Table 15 Test Equipment Used

7 Spurious Radiated Emission

7.1 Test Specification

FCC, Part 27, Subpart C, Section 27.53

7.2 Test Procedure

(Temperature (23°C)/ Humidity (47%RH))

The test method was based on ANSI/TIA-603-D: 2010, Section 2.2.12 Unwanted Emissions: Radiated Spurious.

For measurements between 0.009MHz-30MHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

For measurements between 30.0MHz-1.0GHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

For measurements between 1.0GHz-8.0GHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -8.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator.

The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dBd)}$$

P_d = Dipole equivalent power (result).

P_g = Signal generator output level.

A Peak detector was used for this test.

Testing was performed when the RF port was connected to 50 Ω termination.

Evaluation was performed for all possible modulations, bandwidths, and sub carriers.

7.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (728-758 MHz) must be attenuated below the transmitting power (P) by a factor of at least $43 + \log (P)$ dB, yielding -13dBm .

7.4 Test Results

JUDGMENT Passed

No emissions were detected above the EMI receiver noise level which is at least 20 dB margin below the limit.

7.5 Test Instrumentation Used; Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
EMI Receiver	HP	8542E	3906A00276	March 03, 2020	March 03, 2021
RF Filter Section	HP	85420E	3705A00248	March 03, 2020	March 03, 2021
Spectrum Analyzer	HP	8593EM	3536A00120ADI	March 10, 2020	March 10, 2021
Active Loop Antenna	EMCO	6502	9506-2950	February 5, 2019	February 28, 2021
Antenna Biconical	EMCO	3110B	9912-3337	May 21, 2019	May 31, 2021
Antenna Log Periodic	EMCO	3146	9505-4081	May 31, 2018	May 31, 2021
Horn Antenna 1G-18G	ETS	3115	29845	May 31, 2018	May 31, 2021
Horn Antenna 18G-26.5G	ARA	SWH-28	1007	December 13, 2017	December 31, 2020
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	December 24, 2019	December 31, 2020
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	December 24, 2019	December 31, 2020
Vector Signal Generator	VIAVI	MTS 5800	WMNK0071690263	July 1, 2018	July 1, 2021
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR
Antenna Mast	ETS	2070-2	-	NCR	NCR
Turntable	ETS	2087	-	NCR	NCR
Mast & Table Controller	ETS/EMCO	2090	9608-1456	NCR	NCR

Table 16 Test Equipment Used

8 APPENDIX A - CORRECTION FACTORS

8.1 Correction factors for RF OATS Cable 35m ITL #1784

Frequency (MHz)	Cable loss (dB)
10.0	0.3
20.0	0.2
50.0	-0.1
100.0	-0.6
200.0	-1.2
500.0	-2.3
1000.0	-3.6

**8.2 Correction factors for RF OATS Cable 10m
ITL #1794**

Frequency(MHz)	Cable loss(dB)
10.0	-0.3
20.0	-0.3
50.0	-0.5
100.0	-0.7
200.0	-1.1
500.0	-1.8
1000.0	-2.7

8.3 Correction factors for

Horn Antenna

**Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

8.4 Correction factors for Horn Antenna

Model: 3115

Antenna serial number: 29845

3 meter range

f(GHz)	AF(dB/m)	GA(dB)
0.75	25	3
1G	23.5	7
1.5G	26	8
2G	29	7
2.5G	27.5	10
3G	30	10
3.5G	31.5	10
4G	32.5	9.5
4.5G	32.5	10.5
5G	33	10.5
5.5G	35	10.5
6G	36.5	9.5
6.5G	36.5	10
7G	37.5	10
7.5G	37.5	10
8G	37.5	11
8.5G	38	11
9G	37.5	11.5
9.5G	38	11.5
10G	38.5	11.5
10.5G	38.5	12
11G	38.5	12.5
11.5G	38.5	13
12G	38	13.5
12.5G	38.5	13
13G	40	12
13.5G	41	12
14G	40	13
14.5G	39	14
15G	38	15.5
15.5G	37.5	16
16G	37.5	16
16.5G	39	15
17G	40	15
17.5G	42	13.5
18G	42.5	13

8.5 Correction factors for Log Periodic Antenna
EMCO, Model 3146,
Serial #9505-4081

Frequency [MHz]	AF [dB/m]
200.0	11.47
250.0	12.06
300.0	14.77
400.0	15.77
500.0	18.01
600.0	18.84
700.0	20.93
800.0	21.27
900.0	22.44
1000.0	24.10

8.6 Correction factors for Biconical Antenna
EMCO, Model 3110B,
Serial #9912-3337

Frequency [MHz]	AF [dB/m]
30.0	14.18
35.0	13.95
40.0	12.84
45.0	11.23
50.0	11.10
60.0	10.39
70.0	9.34
80.0	9.02
90.0	9.31
100.0	8.95
120.0	11.53
140.0	12.20
160.0	12.56
180.0	13.49
200.0	15.27

8.7 Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950

f(MHz)	MAF(dBs/m)	AF(dB/m)
0.01	-33.1	18.4
0.02	-37.2	14.3
0.03	-38.2	13.3
0.05	-39.8	11.7
0.1	-40.1	11.4
0.2	-40.3	11.2
0.3	-40.3	11.2
0.5	-40.3	11.2
0.7	-40.3	11.2
1	-40.1	11.4
2	-40	11.5
3	-40	11.5
4	-40.1	11.4
5	-40.2	11.3
6	-40.4	11.1
7	-40.4	11.1
8	-40.4	11.1
9	-40.5	11
10	-40.5	11
20	-41.5	10
30	-43.5	8