



**DATE: 11 February 2020**

**I.T.L. (PRODUCT TESTING) LTD.**  
**FCC Radio Test Report**  
**For**

**Corning Optical Communication Wireless**  
**Equipment under test:**

**Remote eXpansion Unit**

**RxU67**

**700 MHz Services**

Tested by:

  
I. Kaganovich

Approved by:

  
D. Shidlovsky

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



# Measurement/Technical Report for Corning Optical Communication Wireless

Remote eXpansion Unit

**RxU67**

**(700 MHz)**

**FCC ID: OJF1RXU67**

This report concerns:      Original Grant: X

Class II change:

Class I change:

Equipment type:      Part 20 Industrial Booster (CMRS)

Limits used:      47CFR Parts 2; 27

Measurement procedure used is KDB 935210 D05 v01r03 April 2019 and  
ANSI IEEE C63.26-2015

Substitution Method used as in ANSI TIA-603-E-2016

Application for Certification  
prepared by:

D. Shidlowsky

ITL (Product Testing) Ltd.  
1 Bat Sheva St.

Lod 7120101

Israel

e-mail davids@iltglobal.org

Applicant for this device:  
(different from "prepared by")

Isaac Nissan

Corning Optical Communication Wireless  
8253 1<sup>st</sup> Street

Vienna, VA 22812

U.S.A.

Tel: +1-703 855-1773

e-mail: NissanI@corning.com

# TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION -----</b>	<b>5</b>
1.1	Administrative Information.....	5
1.2	List of Accreditations .....	6
1.3	Product Description .....	7
1.4	Test Methodology .....	7
1.5	Test Facility .....	7
1.6	Measurement Uncertainty .....	7
<b>2</b>	<b>SYSTEM TEST CONFIGURATION-----</b>	<b>8</b>
2.1	Justification.....	8
2.2	EUT Exercise Software .....	8
2.3	Special Accessories .....	8
2.4	Equipment Modifications .....	8
2.5	Configuration of Tested System.....	9
<b>3</b>	<b>TEST SET-UP PHOTOS-----</b>	<b>11</b>
<b>4</b>	<b>RF POWER OUTPUT -----</b>	<b>14</b>
4.1	Test Specification .....	14
4.2	Test Procedure .....	14
4.3	Test Limit.....	14
4.4	Test Results.....	14
4.5	Test Equipment Used; RF Power Output.....	40
<b>5</b>	<b>BAND EDGE SPECTRUM -----</b>	<b>41</b>
5.1	Test Specification .....	41
5.2	Test Procedure .....	41
5.3	Test Limit.....	41
5.4	Test Results.....	41
5.5	Test Equipment Used; Band Edge Spectrum .....	60
<b>6</b>	<b>PEAK TO AVERAGE POWER RATIO -----</b>	<b>61</b>
6.1	Test Specification .....	61
6.2	Test Procedure .....	61
6.3	Test Limit.....	61
6.4	Test Results.....	61
6.5	Test Equipment Used; 0.1% PAPR.....	88
<b>7</b>	<b>OCCUPIED BANDWIDTH -----</b>	<b>89</b>
7.1	Test Specification .....	89
7.2	Test Procedure .....	89
7.3	Test Limit.....	89
7.4	Test Results.....	89
7.5	Test Equipment Used; Occupied Bandwidth.....	142
<b>8</b>	<b>SPURIOUS EMISSIONS AT ANTENNA TERMINALS -----</b>	<b>143</b>
8.1	Test Specification .....	143
8.2	Test Procedure .....	143
8.3	Test Limit.....	143
8.4	Test Results.....	143
8.5	Test Equipment Used; Spurious Emissions at Antenna Terminals.....	188
<b>9</b>	<b>SPURIOUS RADIATED EMISSION -----</b>	<b>189</b>
9.1	Test Specification .....	189
9.2	Test Procedure .....	189
9.3	Test Limit.....	190
9.4	Test Results.....	190
9.5	Test Instrumentation Used; Radiated Measurements.....	191



<b>10</b>	<b>OUT-OF-BAND REJECTION</b>	<b>192</b>
1.1	Test Specification .....	192
1.2	Test Procedure .....	192
1.3	Test Limit.....	192
1.4	Test Results.....	192
10.1	Test Equipment Used; Out-of-Band Rejection .....	193
<b>11</b>	<b>APPENDIX A - CORRECTION FACTORS</b>	<b>194</b>
11.1	Correction factors for RF OATS Cable 35m.....	194
11.2	Correction factors for RF OATS Cable 10m.....	195
11.3	Correction factors for Horn Antenna .....	196
11.4	Correction factors for Horn Antenna .....	197
11.5	Correction factors for Log Periodic Antenna .....	198
11.6	Correction factors for Biconical Antenna.....	199
11.7	Correction factors for ACTIVE LOOP ANTENNA .....	200



# 1 General Information

## 1.1 Administrative Information

Manufacturer: Corning Optical Communication Wireless

Manufacturer's Address: 8253 1st Street  
Vienna, VA 22812  
U.S.A.

Tel: +1-703 855-1773

Manufacturer's Representative: Isaac Nissan

Equipment Under Test (E.U.T): Remote eXpansion Unit

Equipment Model No.: RxU67

Equipment Serial No.: Not Designated

Date of Receipt of E.U.T: 28.12.2019

Start of Test: 29.12.2019

End of Test: 29.01.2020

Test Laboratory Location: I.T.L (Product Testing) Ltd.  
1 Batsheva St,  
Lod,  
Israel 7116002

Test Specifications: FCC Parts 2; 27



## 1.2 ***List of Accreditations***

The EMC laboratory of I.T.L. is accredited by/registered with the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number is IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-20025, R-2729, T-20028, G-20068.
5. Department of Innovation, Science and Economic Development (ISED) Canada, CAB identifier: IL1002.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



### **1.3 Product Description**

Remote Expansion Unit RxU67 is an add-on module that expands the service distribution at remote locations to include 600MHz and 700MHz FirstNet bands.

RxU67 is part of the Corning optical network evolution (ONE™) solutions. It is designed to plug-into the remote access unit (RAU5x), expanding the five services supported by the RAU5x to include 600MHz and 700MHz FirstNet bands.

All seven services are distributed over the same infrastructure: routed to the RAU5x over a single optic fibre, distributed over the same footprint and managed as a single element – as the RAU5x.

### **1.4 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in KDB 935210 D05 v01r03 April 2019 and ANSI/TIA-603-E-2016. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### **1.5 Test Facility**

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

### **1.6 Measurement Uncertainty**

Conducted Emission (CISPR 11, EN 55011, CISPR 32, EN 55032, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission (CISPR 11, EN 55011, CISPR 32, EN 55032, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB

## **2 System Test Configuration**

### **2.1 Justification**

The E.U.T. has been fully tested receiving signals from the RAU5x.

The test setup was configured to closely resemble the standard installation.  
All source signals are represented in the setup by appropriate signal generators.

An “Exercise” SW on the computer was used to enable / disable transmission of the RAU5x, while the EUT output was connected to the spectrum analyzer.  
All channels transmitted during the testing.  
There is neither an intermediate amplified nor donor antenna in the uplink.  
All components included in the UL path are connected by cables.

### **2.2 EUT Exercise Software**

HCM 3.6 build26-RC1

### **2.3 Special Accessories**


No special accessories were needed in order to achieve compliance.

### **2.4 Equipment Modifications**

No modifications were necessary in order to achieve compliance.


## 2.5 Configuration of Tested System

Product Name	Remote Expansion Unit
Model Name	RxU67
Working voltage	37-57 VDC
Mode of operation	Industrial Booster
Modulations	16QAM, 64QAM, 256QAM, QPSK
Frequency Range	<b>600</b> (DL: 617-652, UL:663-698) <b>FN700</b> (DL:758-768, UL: 788-798), <b>LTE700</b> (DL:728-756, UL:698-716, 777-787)
Transmit power	15 dBm (Max) per band
Antenna Gain	Internal 0dBi; External Antenna 6dBi.
DATA rate	N/A
Modulation BW	5; 10; 15; 20 MHz

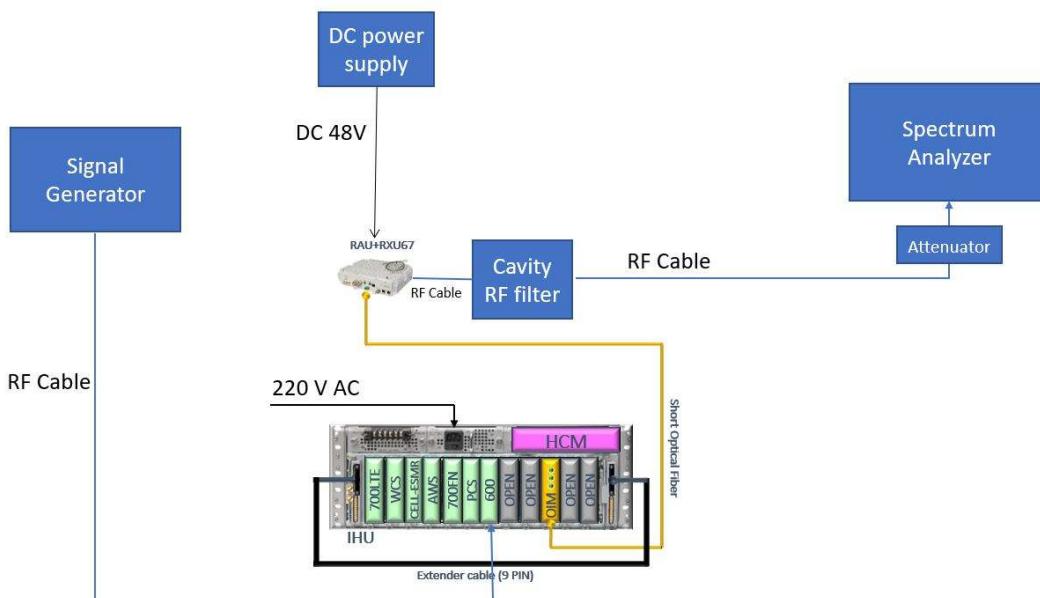


© 2020 Corning Incorporated

Figure 1. Conducted Test Set-Up

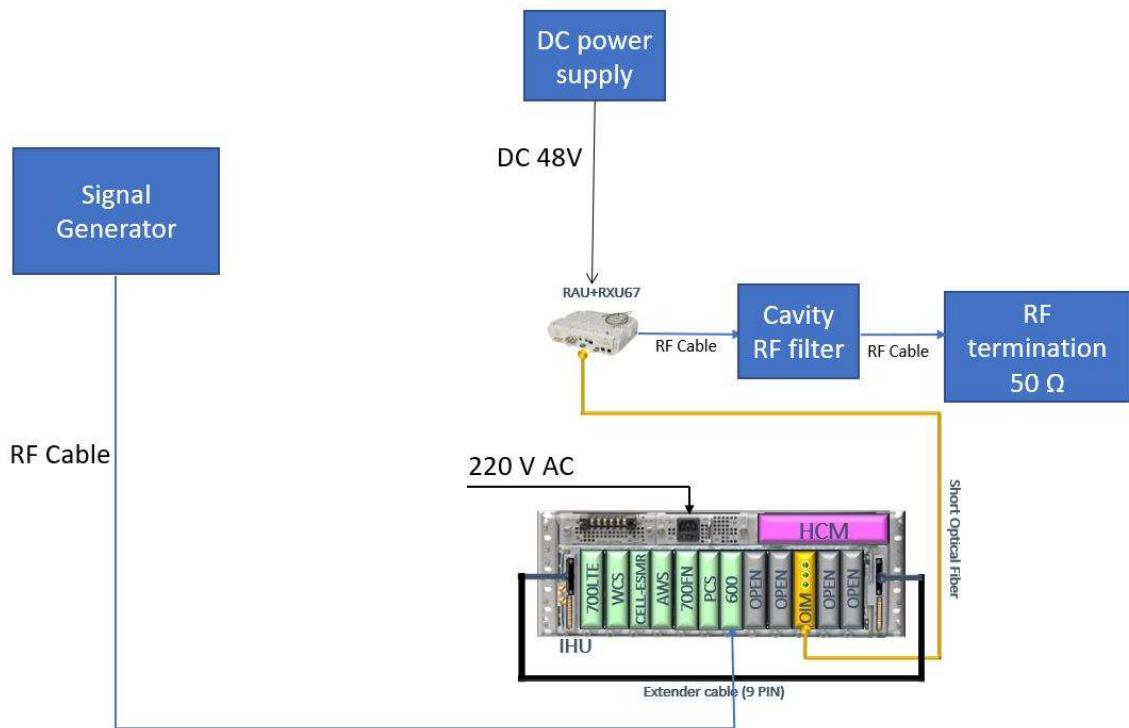


**Figure 2. Radiated Test Set-Up With Termination**

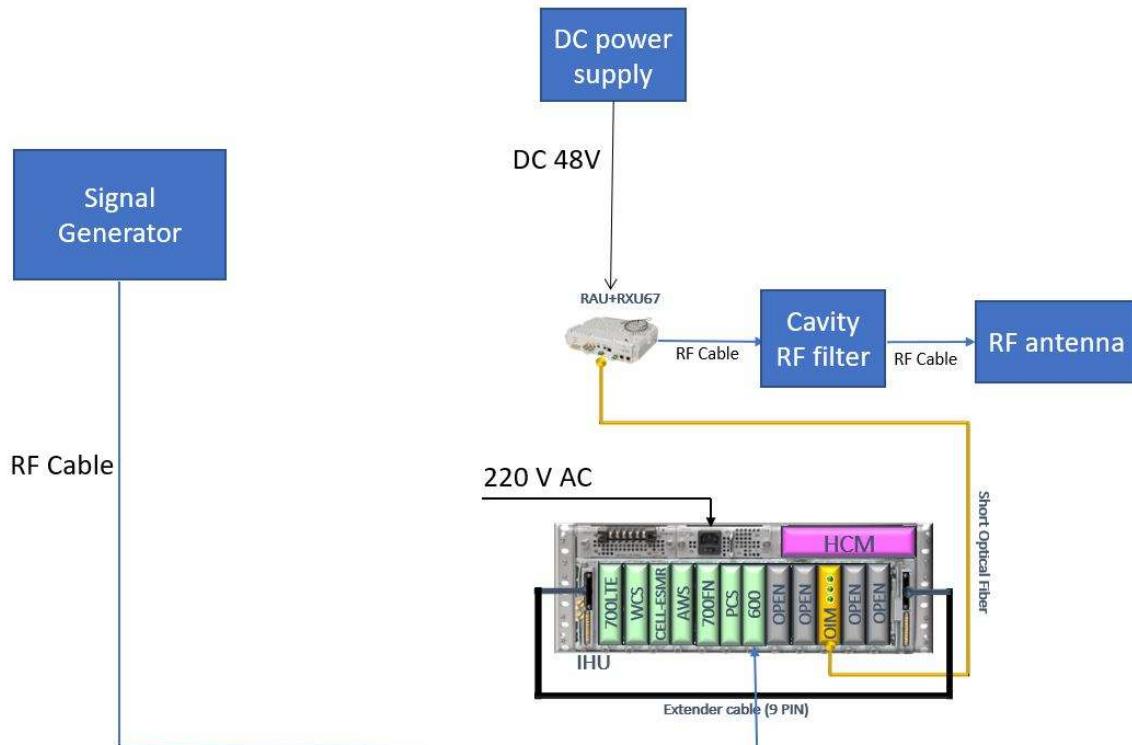

**Figure 3. Radiated Test Set-Up With Antenna**


### 3 Test Set-Up Photos

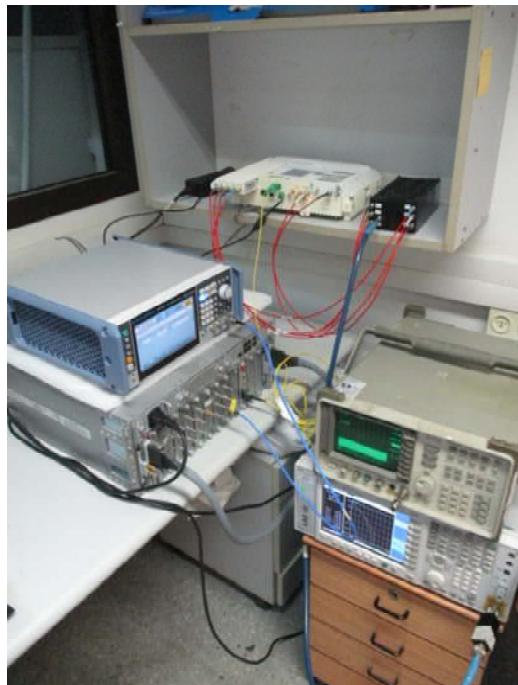


**Figure 4. Conducted Emission From Antenna Port Tests**



**Figure 5. Radiated Emission Test 9kHz - 30MHz**

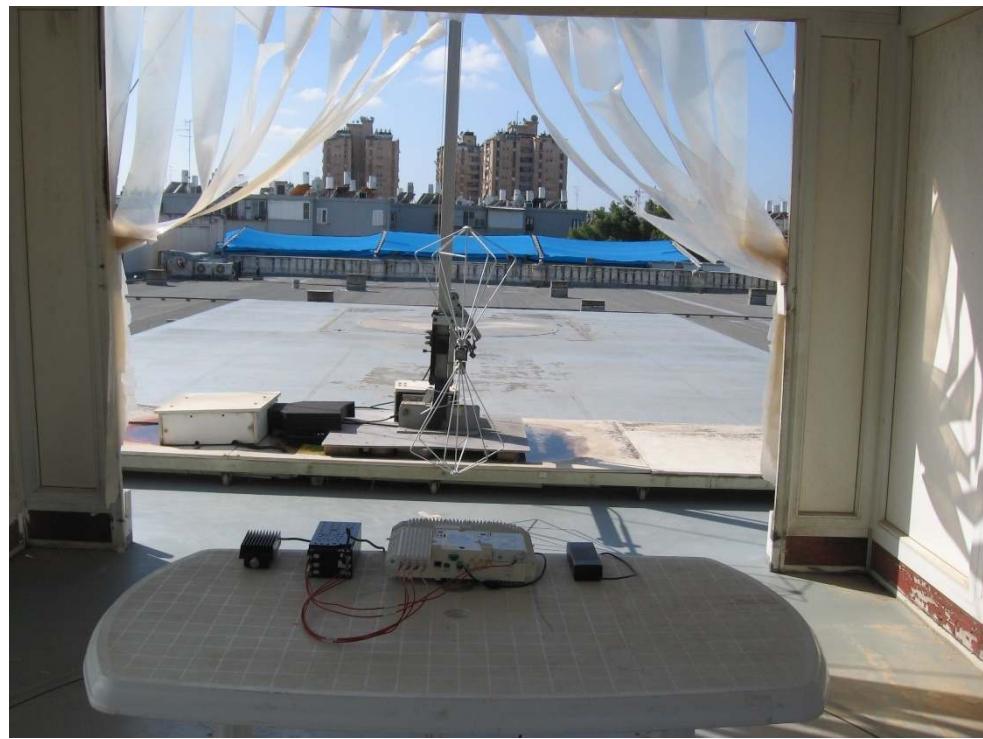

**Figure 6. Radiated Emission Test 30 - 200 MHz**

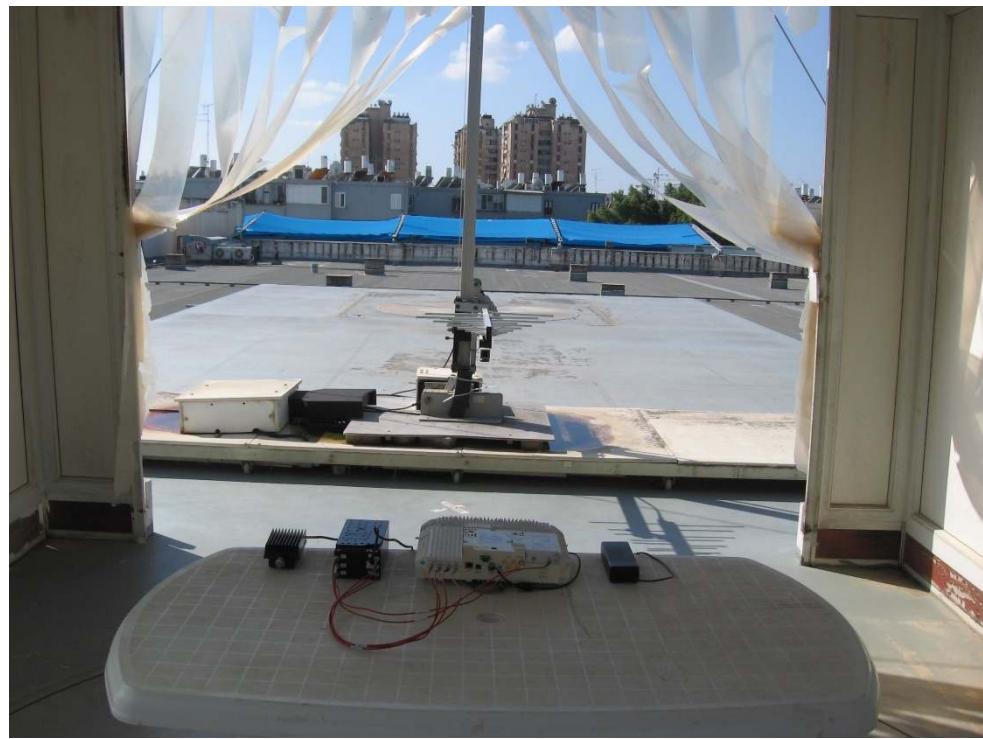

**Figure 7. Radiated Emission Test 200 - 1000MHz**



**Figure 8. Radiated Emission Test 1.0 - 8.0GHz**

## **4 RF Power Output**

### **4.1 Test Specification**

FCC Part 27, Subpart C (27.50)

### **4.2 Test Procedure**

(Temperature (22°C)/ Humidity (36%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (20.8 dB) and an appropriate coaxial cable. Special attention was taken to prevent Spectrum Analyzer RF input overload.

For modulations 16QAM and 64QAM, the Spectrum Analyzer was set to 120 kHz RBW for bandwidth 5 MHz; 240 kHz RBW for bandwidth 10 MHz; 360 kHz RBW for bandwidth 15 MHz; and 470 kHz RBW for bandwidth 20 MHz.

For modulation 256QAM, the Spectrum Analyzer was set to 91 kHz RBW for bandwidth 5 MHz; 180 kHz RBW for bandwidth 10 MHz; 270 kHz RBW for bandwidth 15 MHz; and 390 kHz RBW for bandwidth 20 MHz.

For modulation QPSK, the Spectrum Analyzer was set to 91 kHz RBW for bandwidth 5 MHz; 270 kHz RBW for bandwidth 10 MHz; 270 kHz RBW for bandwidth 15 MHz; and 390 kHz RBW for bandwidth 20 MHz.

### **4.3 Test Limit**

Peak Power Output must not exceed 1000W (60 dBm).

### **4.4 Test Results**

JUDGEMENT: Passed

See additional information in Table 1 to Table 4 and Figure 9 to Figure 137.

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
16QAM	5	15	730.5	15.27	6	21.27	60	-38.7
		30		15.11		21.11	60	-38.9
	10	15	743.0	15.12		21.12	60	-38.9
		30		15.12		21.12	60	-38.9
		15	755.5	15.09		21.09	60	-38.9
		30		15.13		21.13	60	-38.9
	15	15	733.0	15.11		21.11	60	-38.9
		30		14.96		20.96	60	-39.0
		60		15.13		21.13	60	-38.9
		15	743.0	15.17		21.17	60	-38.8
		30		15.03		21.03	60	-39.0
		60		15.09		21.09	60	-38.9
		15	753.0	15.09		21.09	60	-38.9
		30		15.05		21.05	60	-39.0
		60		15.04		21.04	60	-39.0
	20	15	735.5	15.07		21.07	60	-38.9
		30		14.96		20.96	60	-39.0
		60		15.01		21.01	60	-39.0
		15	743.0	15.01		21.01	60	-39.0
		30		15.12		21.12	60	-38.9
		60		14.92		20.92	60	-39.1
		15	750.5	14.86		20.86	60	-39.1
		30		14.84		20.84	60	-39.2
		60		14.88		20.88	60	-39.1
		15	738.0	15.14		21.14	60	-38.9
		30		14.97		20.97	60	-39.0
		60		15.05		21.05	60	-39.0
		15	743.0	15.05		21.05	60	-39.0
		30		15.09		21.09	60	-38.9
		60		15.04		21.04	60	-39.0
		15	748.0	15.07		21.07	60	-38.9
		30		15.15		21.15	60	-38.9
		60		15.06		21.06	60	-38.9

Table 1 RF Power Output 16QAM

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
64QAM	5	15	730.5	14.91	6	20.91	60	-39.1
		30		14.91		20.91	60	-39.1
		15	743.0	14.96		20.96	60	-39.0
		30		15.27		21.27	60	-38.7
		15	755.5	15.20		21.20	60	-38.8
		30		14.97		20.97	60	-39.0
	10	15	733.0	14.92		20.92	60	-39.1
		30		14.99		20.99	60	-39.0
		60		15.20		21.20	60	-38.8
		15	743.0	15.20		21.20	60	-38.8
		30		15.18		21.18	60	-38.8
		60		15.14		21.14	60	-38.9
		15	753.0	14.93		20.93	60	-39.1
		30		14.93		20.93	60	-39.1
		60		15.13		21.13	60	-38.9
	15	15	735.5	14.66		20.66	60	-39.3
		30		15.17		21.17	60	-38.8
		60		14.98		20.98	60	-39.0
		15	743.0	14.95		20.95	60	-39.1
		30		15.01		21.01	60	-39.0
		60		15.03		21.03	60	-39.0
		15	750.5	15.00		21.00	60	-39.0
		30		14.96		20.96	60	-39.0
		60		15.06		21.06	60	-38.9
	20	15	738.0	14.93		20.93	60	-39.1
		30		15.01		21.01	60	-39.0
		60		14.98		20.98	60	-39.0
		15	743.0	15.24		21.24	60	-38.8
		30		15.06		21.06	60	-38.9
		60		15.13		21.13	60	-38.9
		15	748.0	15.01		21.01	60	-39.0
		30		15.17		21.17	60	-38.8
		60		14.94		20.94	60	-39.1

Table 2 RF Power Output 64QAM

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
256QAM	5	15	730.5	15.33	6	21.33	60	-38.7
		30		15.22		21.22	60	-38.8
		15	743.0	15.66		21.66	60	-38.3
		30		15.60		21.60	60	-38.4
		15	755.5	15.53		21.53	60	-38.5
		30		15.78		21.78	60	-38.2
	10	15	733.0	15.95		21.95	60	-38.1
		30		15.20		21.20	60	-38.8
		60		15.29		21.29	60	-38.7
		15	743.0	15.51		21.51	60	-38.5
		30		15.55		21.55	60	-38.5
		60		15.51		21.51	60	-38.5
		15	753.0	15.13		21.13	60	-38.9
		30		15.05		21.05	60	-39.0
		60		15.08		21.08	60	-38.9
	15	15	735.5	15.36		21.36	60	-38.6
		30		15.24		21.24	60	-38.8
		60		15.23		21.23	60	-38.8
		15	743.0	15.68		21.68	60	-38.3
		30		15.27		21.27	60	-38.7
		60		15.13		21.13	60	-38.9
		15	750.5	15.10		21.10	60	-38.9
		30		15.19		21.19	60	-38.8
		60		15.18		21.18	60	-38.8
	20	15	738.0	15.69		21.69	60	-38.3
		30		15.32		21.32	60	-38.7
		60		15.41		21.41	60	-38.6
		15	743.0	15.76		21.76	60	-38.2
		30		15.48		21.48	60	-38.5
		60		15.49		21.49	60	-38.5
		15	748.0	15.47		21.47	60	-38.5
		30		15.12		21.12	60	-38.9
		60		15.13		21.13	60	-38.9

Table 3 RF Power Output 256QAM

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
QPSK	5	15	730.488 (730.5)	15.21	6	21.21	60	-38.8
		30		15.20		21.20	60	-38.8
		15	743.0	15.50		21.50	60	-38.5
		30		15.50		21.50	60	-38.5
		15	755.5	15.07		21.07	60	-38.9
		30		15.04		21.04	60	-39.0
	10	15	733.0	14.91		20.91	60	-39.1
		30		15.03		21.03	60	-39.0
		60		15.00		21.00	60	-39.0
		15	743.0	15.68		21.68	60	-38.3
		30		15.31		21.31	60	-38.7
		60		15.67		21.67	60	-38.3
		15	753.0	15.36		21.36	60	-38.6
		30		15.12		21.12	60	-38.9
		60		15.13		21.13	60	-38.9
	15	15	735.5	15.48		21.48	60	-38.5
		30		15.29		21.29	60	-38.7
		60		15.01		21.01	60	-39.0
		15	743.0	15.82		21.82	60	-38.2
		30		15.63		21.63	60	-38.4
		60		15.41		21.41	60	-38.6
		15	750.5	15.15		21.15	60	-38.9
		30		15.27		21.27	60	-38.7
		60		15.04		21.04	60	-39.0
	20	15	738.0	15.73		21.73	60	-38.3
		30		15.32		21.32	60	-38.7
		60		15.54		21.54	60	-38.5
		15	743.0	15.43		21.43	60	-38.6
		30		15.45		21.45	60	-38.6
		60		15.57		21.57	60	-38.4
		15	748.0	15.07		21.07	60	-38.9
		30		15.29		21.29	60	-38.7
		60		15.27		21.27	60	-38.7

Table 4 RF Power Output QPSK





Figure 15: 16QAM 10MHz B.W.; 733.0MHz, 15kHz



Figure 16: 16QAM 10MHz B.W.; 733.0MHz, 30kHz



Figure 17: 16QAM 10MHz B.W.; 733.0(732.9) MHz, 60kHz





Figure 18: 16QAM 10MHz B.W.; 743.0MHz, 15kHz



Figure 19: 16QAM 10MHz B.W.; 743.0MHz, 30kHz



Figure 20: 16QAM 10MHz B.W.; 743.0MHz, 60kHz

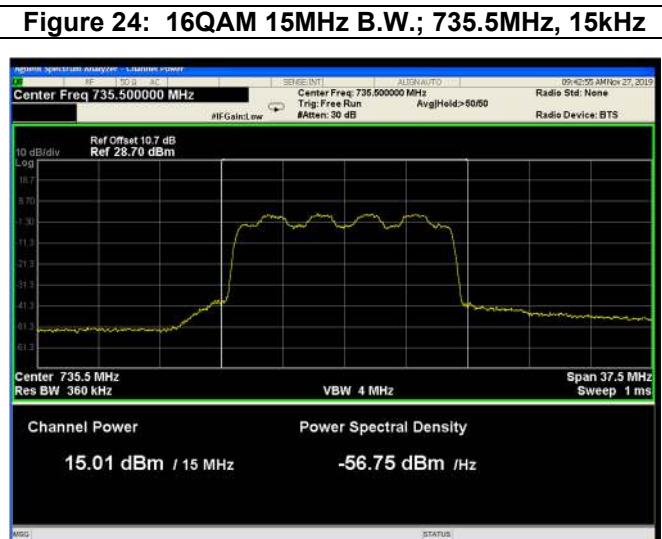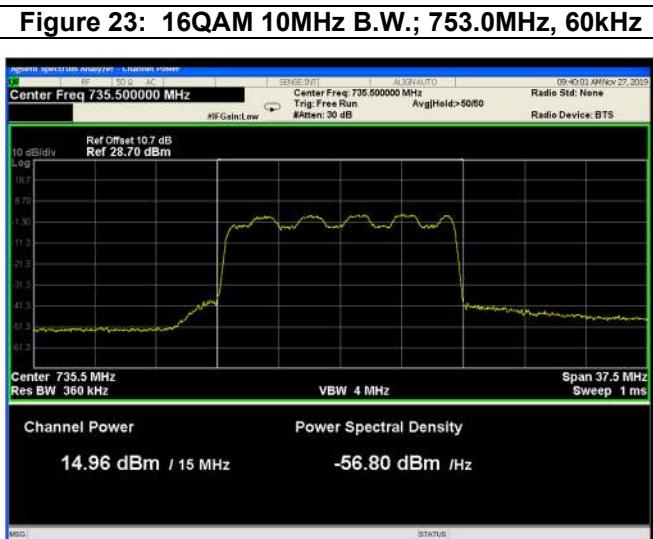





**Figure 33: 16QAM 20MHz B.W.; 738.0MHz, 15 kHz**



**Figure 34: 16QAM 20MHz B.W.; 738.0MHz, 30kHz**



**Figure 35: 16QAM 20MHz B.W.; 738.0MHz, 60kHz**



**Figure 36: 16QAM 20MHz B.W.; 743.0MHz, 15kHz**



**Figure 37: 16QAM 20MHzB.W.; 743.0MHz, 30kHz**



**Figure 38: 16QAM 20MHz B.W.; 743.0MHz, 60kHz**



**Figure 39: 16QAM 20MHz B.W.; 748.0MHz, 15kHz**



**Figure 40: 16QAM 20MHz B.W.; 748.0MHz, 30kHz**



**Figure 41: 16QAM 20MHz B.W.; 748.0MHz, 60kHz**



**Figure 42: 64QAM 5MHz B.W.; 730.5MHz, 15kHz**






**Figure 43: 64QAM 5MHz B.W.; 730.5MHz, 30kHz**



**Figure 44: 64QAM 5MHz B.W.; 743.0MHz, 15kHz**



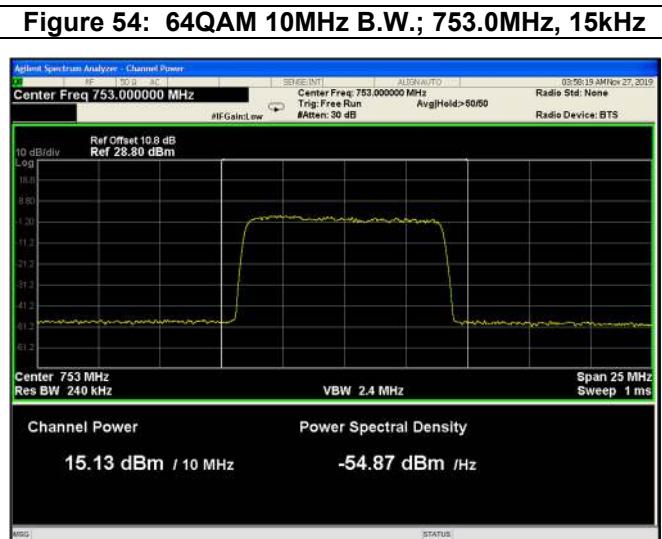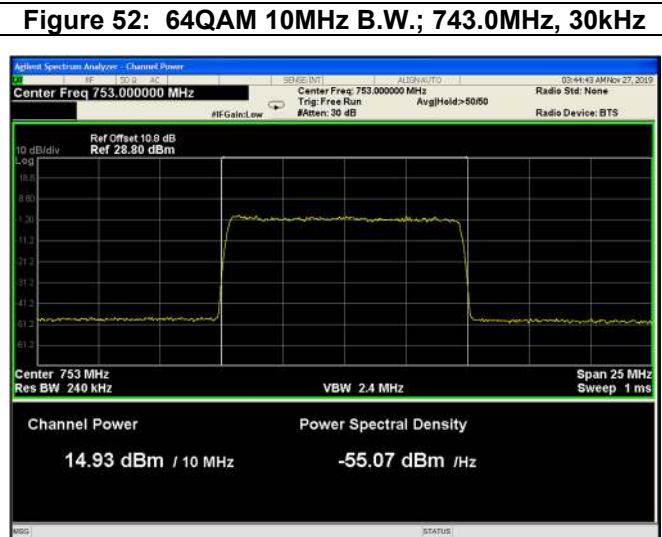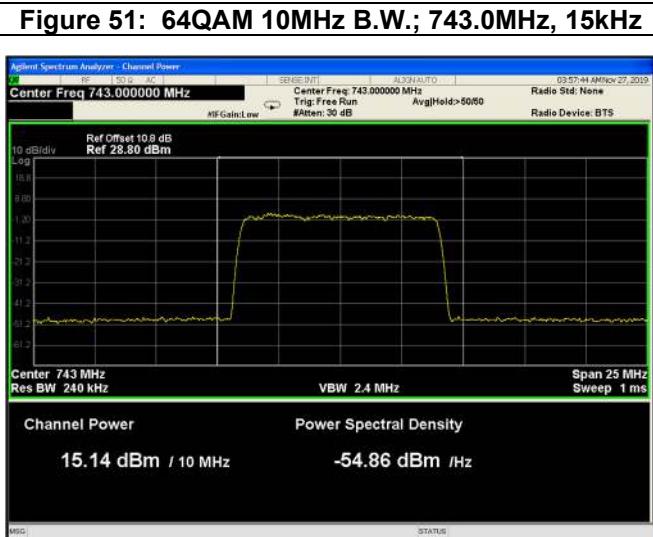



**Figure 57: 64QAM 15MHz B.W.; 735.5MHz, 15kHz**



**Figure 58: 64QAM 15MHz B.W.; 735.5MHz, 30kHz**




**Figure 59: 64QAM 15MHz B.W.; 735.5MHz, 60kHz**



**Figure 60: 64QAM 15MHz B.W.; 743.0MHz, 15kHz**



**Figure 61: 64QAM 15MHz; 743.0MHz B.W., 30kHz**

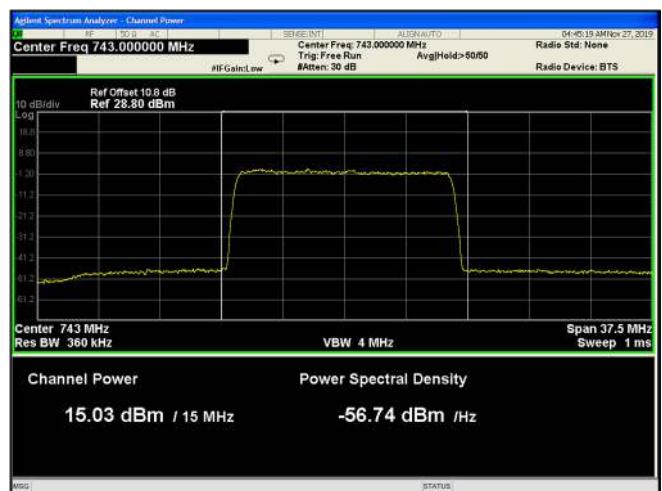

**Figure 62: 64QAM 15MHz B.W.; 743.0MHz, 60kHz**



Figure 63: 64QAM 15MHz B.W.; 750.5MHz, 15kHz



Figure 64: 64QAM 15MHz B.W.; 750.5MHz, 30kHz



Figure 65: 64QAM 15MHz B.W.; 750.5MHz, 60kHz



Figure 66: 64QAM 20MHz B.W.; 738.0MHz, 15kHz



Figure 67: 64QAM 20MHz B.W.; 738.0MHz, 30kHz



Figure 68: 64QAM 20MHz B.W.; 738.0MHz, 60kHz



**Figure 69: 64QAM 20MHz B.W.; 743.0MHz, 15kHz**



**Figure 70: 64QAM 20MHz B.W.; 743.0MHz, 30kHz**



**Figure 71: 64QAM 20MHz B.W.; 743.0MHz, 60kHz**




**Figure 72: 256QAM 5MHz B.W.; 748.0MHz, 15kHz**



**Figure 73: 256QAM 5MHz B.W.; 748.0MHz, 30kHz**



**Figure 74: 256QAM 5MHz B.W.; 748.0MHz, 60kHz**

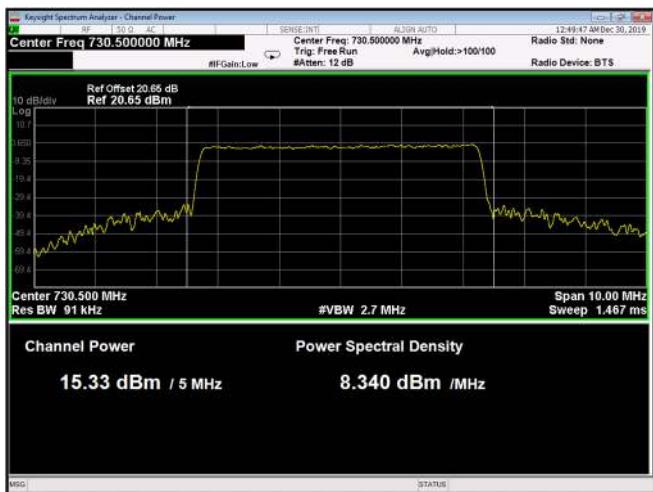


**Figure 75: 256QAM 5MHz B.W.; 730.5MHz, 15kHz**




**Figure 76: 256QAM 5MHz B.W.; 730.5MHz, 30kHz**



**Figure 77: 256QAM 5MHz B.W.; 743.0MHz, 30kHz**

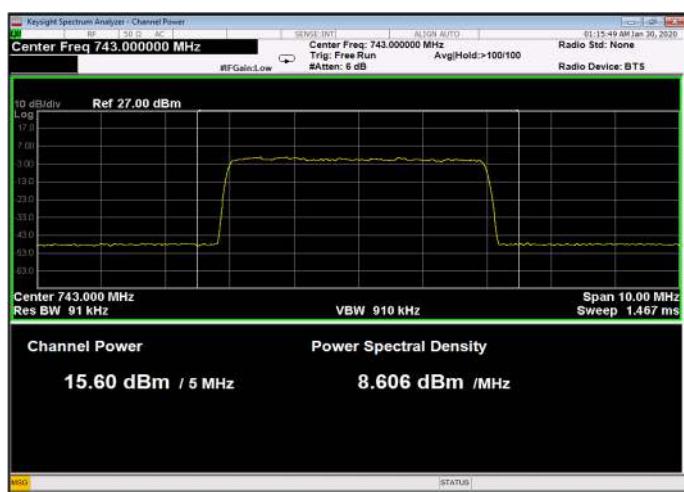


**Figure 78: 256QAM 5MHz B.W.; 743.0MHz, 15kHz**

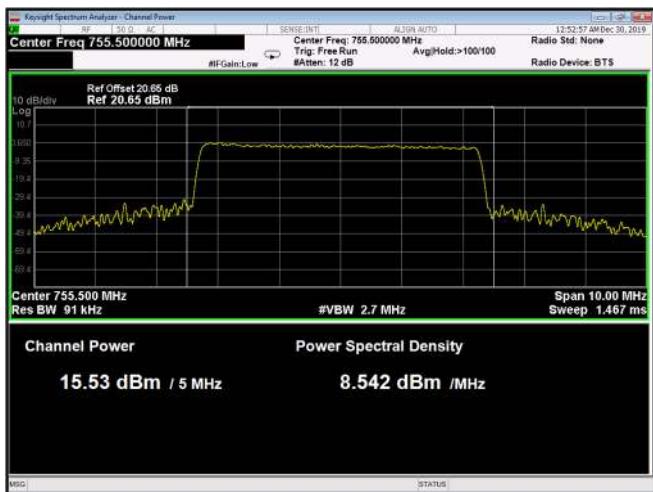


**Figure 79: 256QAM 5MHz B.W.; 755.5MHz, 15kHz**




**Figure 80: 256QAM 5MHz B.W.; 755.5MHz, 30kHz**

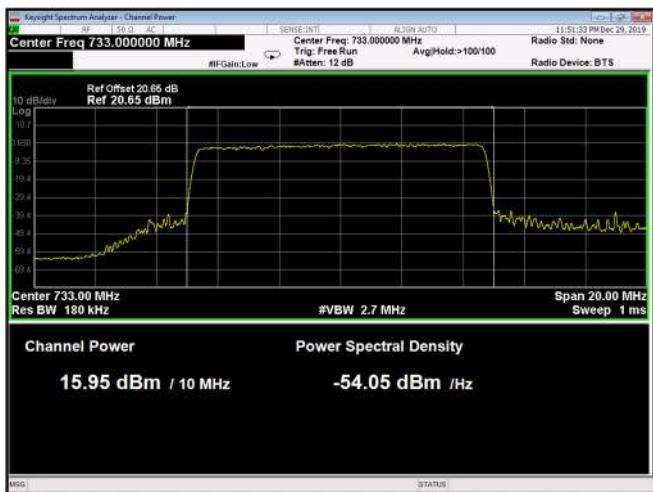


**Figure 81:** 256QAM 10MHz B.W.; 733.0MHz, 15kHz

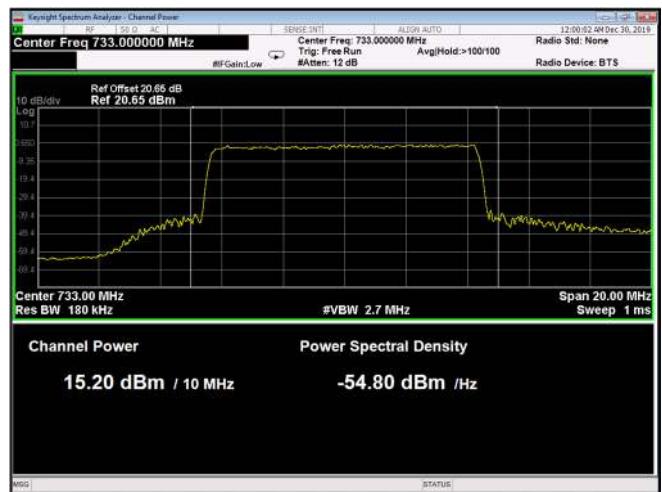


**Figure 82:** 256QAM 10MHz B.W.; 733.0MHz, 30kHz

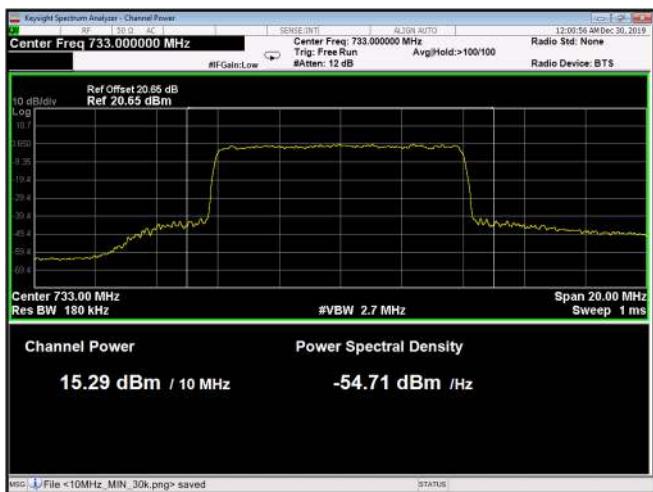


**Figure 83:** 256QAM 10MHz B.W.; 733.0MHz, 60kHz

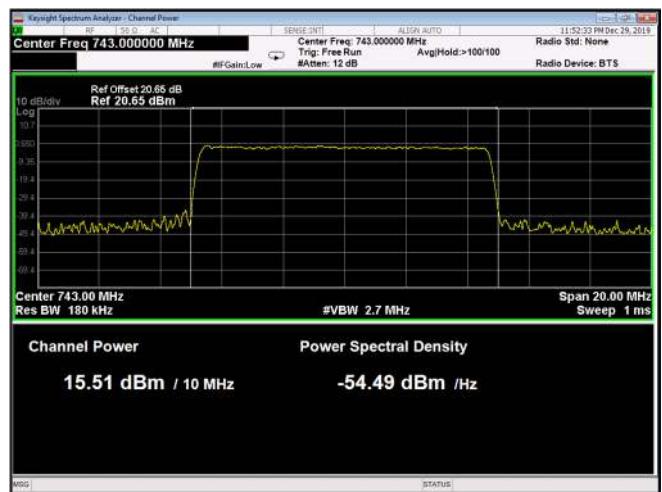


**Figure 84:** 256QAM 10MHz B.W.; 743.0MHz, 15kHz

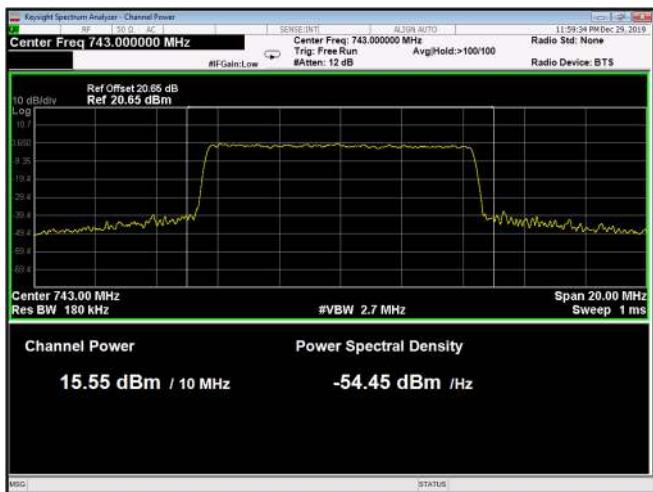


**Figure 85:** 256QAM 10MHz B.W.; 743.0MHz, 30kHz

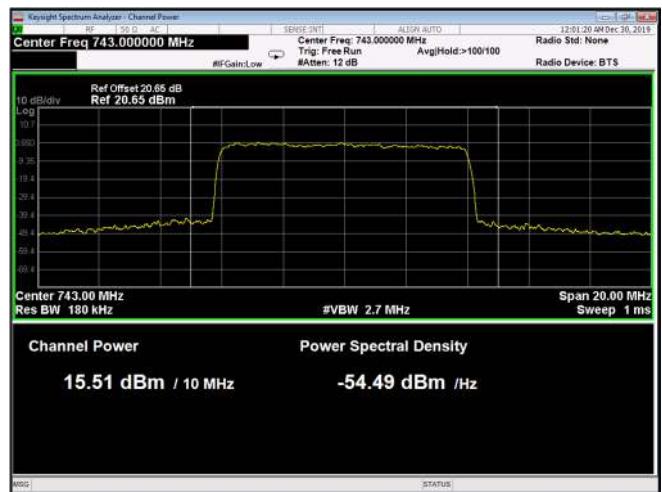


**Figure 86:** 256QAM 10MHz B.W.; 743.0MHz, 60kHz

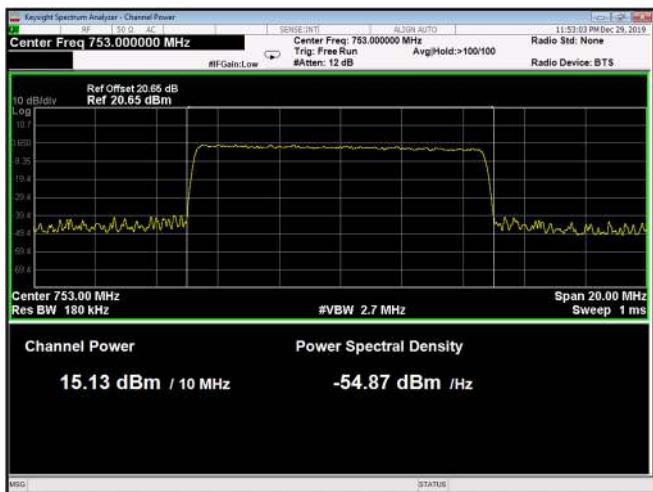


**Figure 87:** 256QAM 10MHz B.W.; 753.0MHz, 15kHz

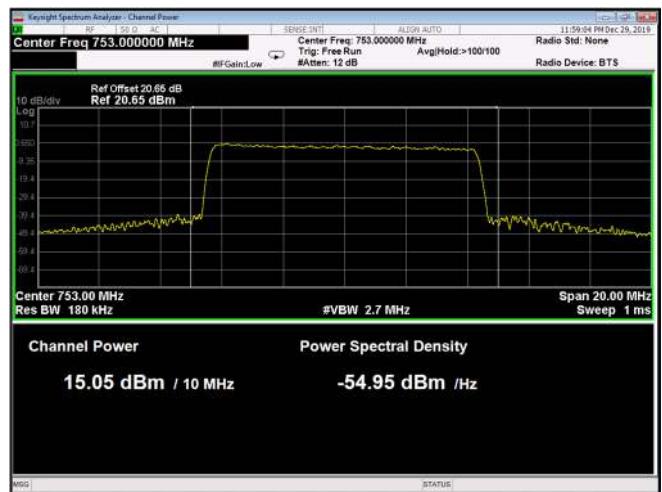


**Figure 88:** 256QAM 10MHz B.W.; 753.0MHz, 30kHz

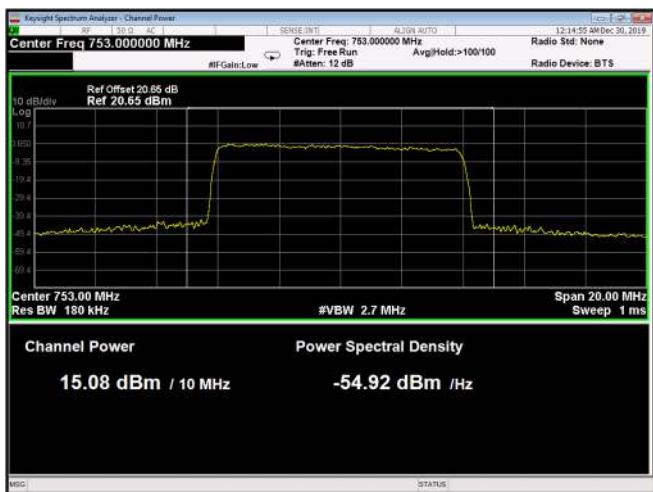


**Figure 89:** 256QAM 10MHz B.W.; 753.0MHz, 60kHz

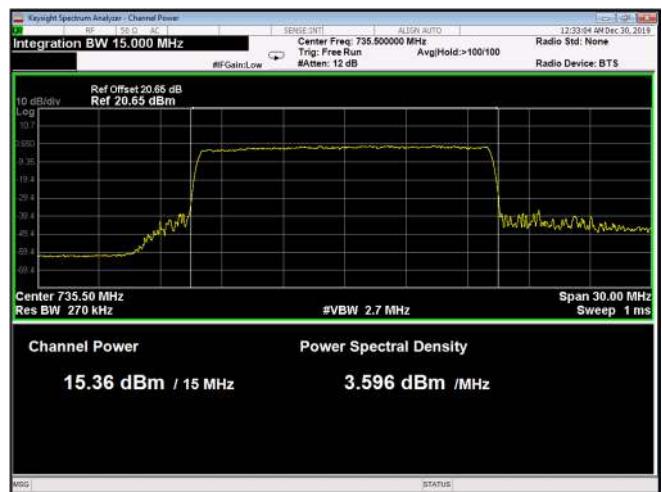







**Figure 90:** 256QAM 15MHz B.W.; 735.5MHz, 15kHz

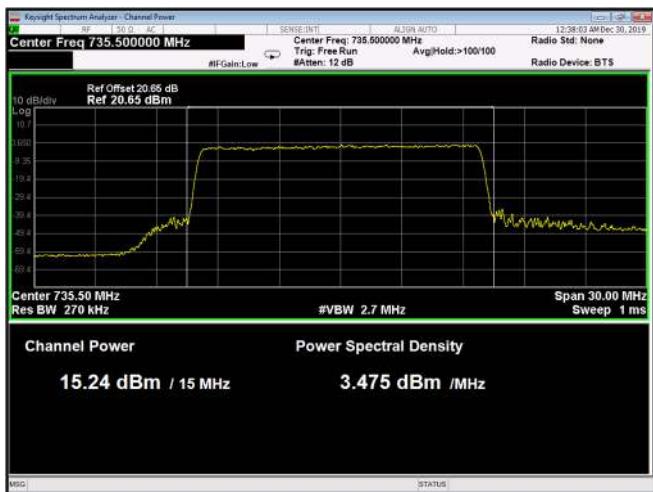


**Figure 91:** 256QAM 15MHz B.W.; 735.5MHz, 30kHz

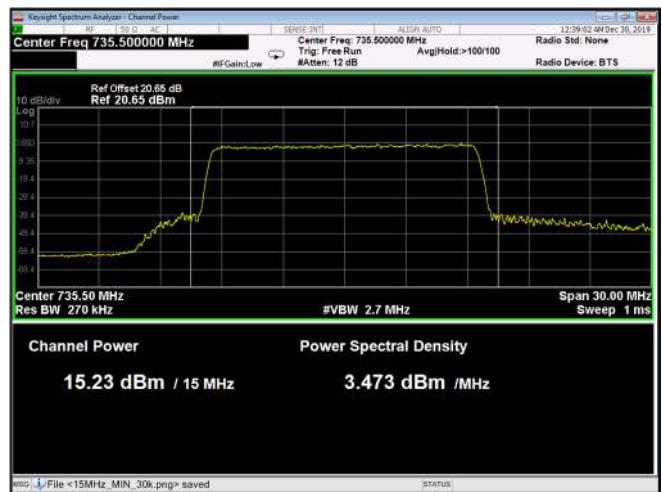


**Figure 92:** 256QAM 15MHz B.W.; 735.5MHz, 60kHz

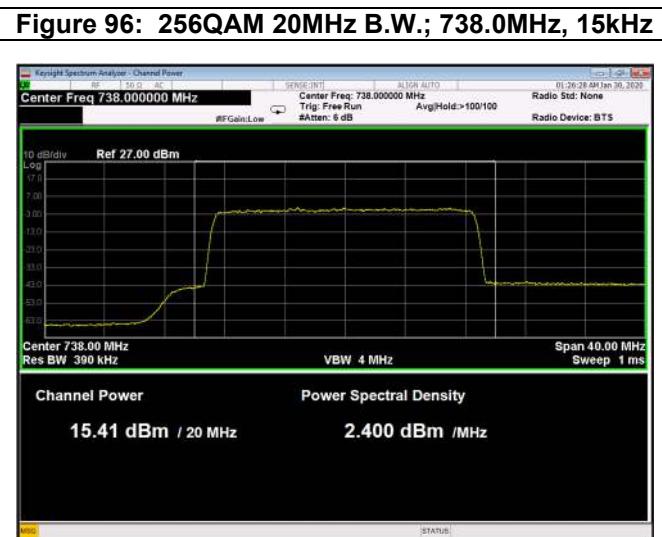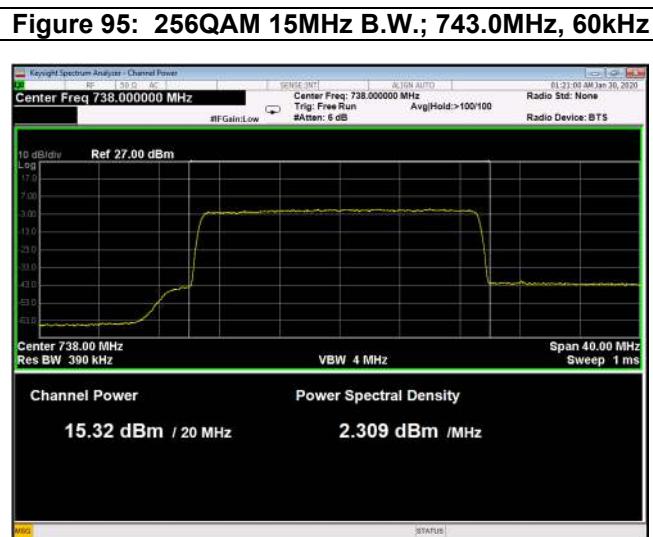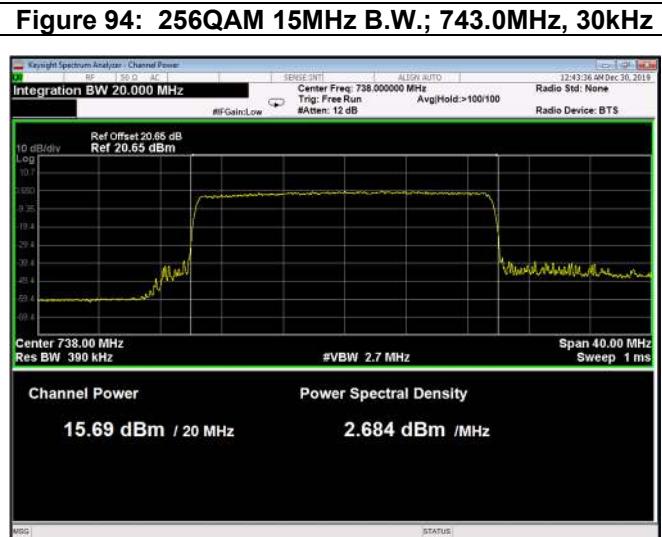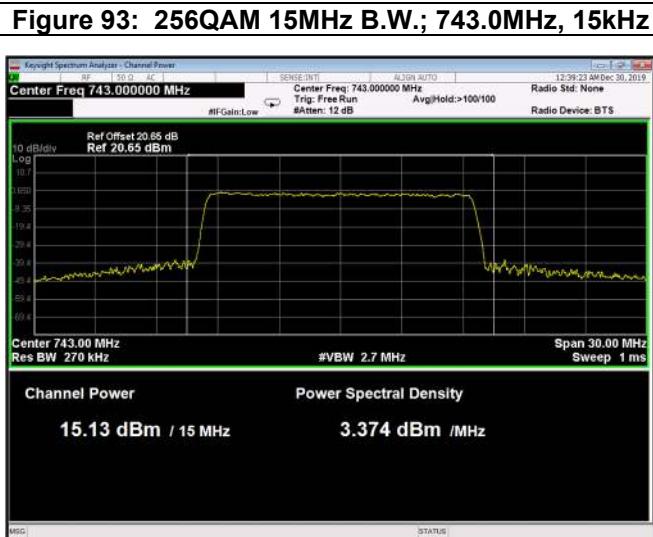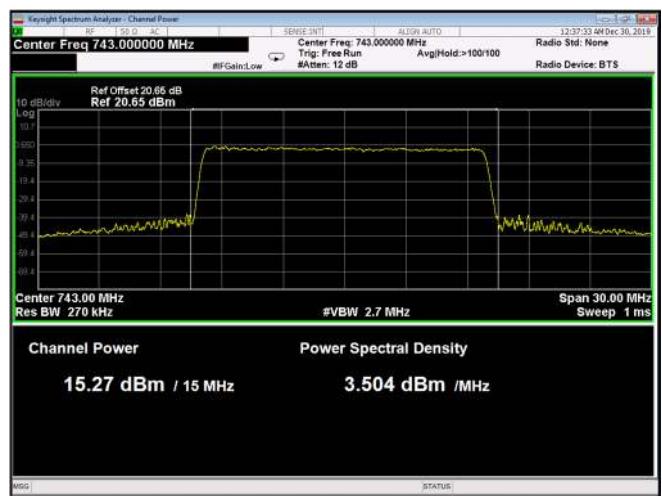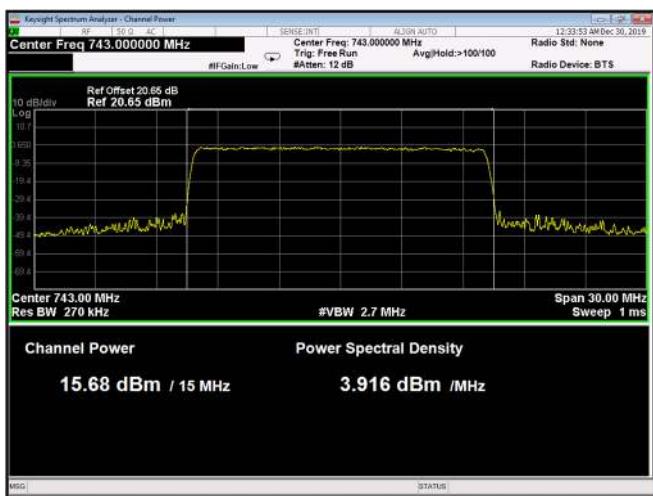


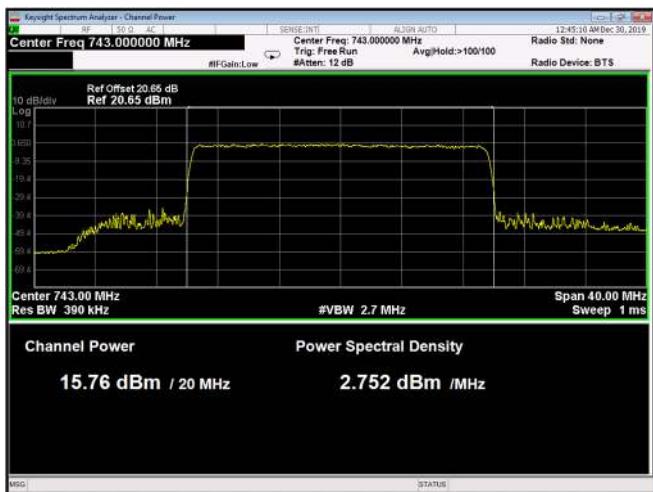


**Figure 99:** 256QAM 20MHz B.W.; 743.0MHz, 15kHz

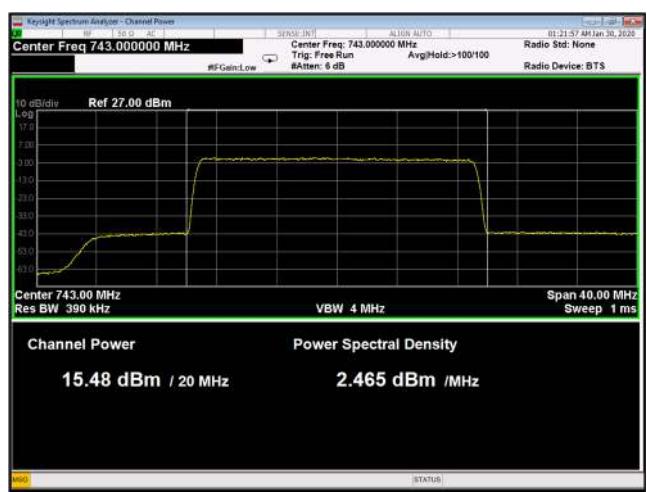


**Figure 100:** 256QAM 20MHz B.W.; 743.0MHz, 30kHz

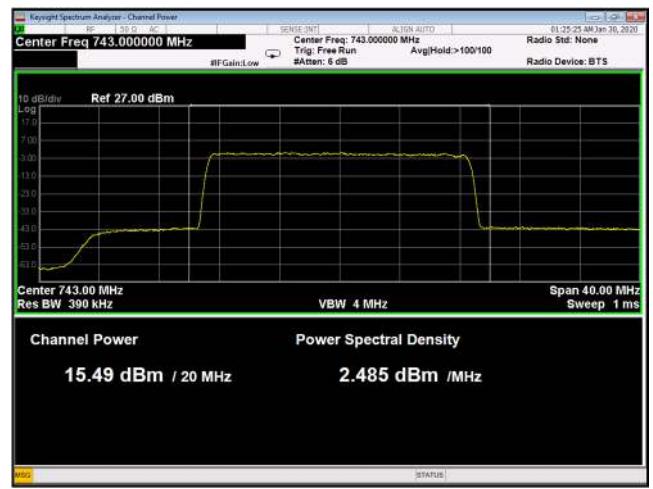


**Figure 101:** 256QAM 20MHz B.W.; 743.0MHz, 60kHz

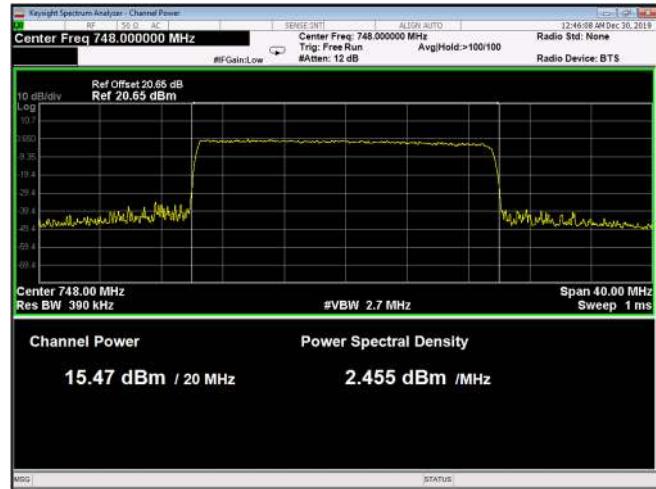


**Figure 102:** 256QAM 20MHz B.W.; 748.0MHz, 15kHz

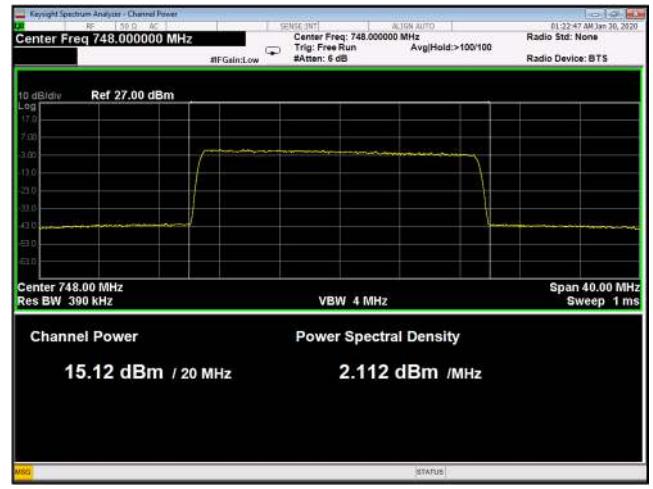


**Figure 103:** 256QAM 20MHz B.W.; 748.0MHz, 30kHz

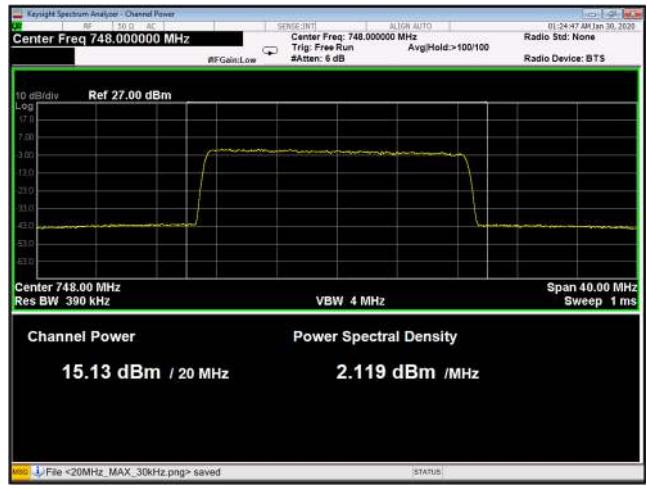


**Figure 104:** 256QAM 20MHz B.W.; 748.0MHz, 60kHz

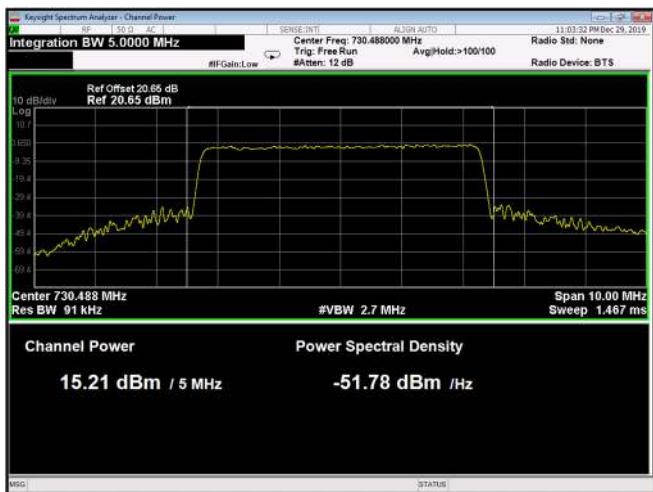


**Figure 105:** QPSK 5MHz B.W.; 730.5 (730.48)MHz, 15kHz

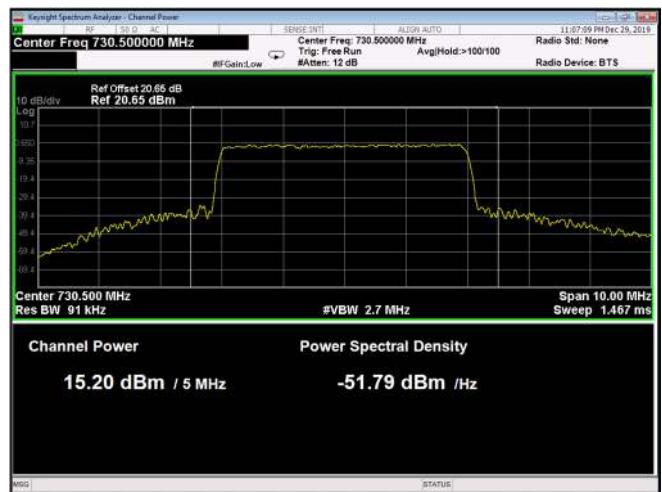


**Figure 106:** QPSK 5MHz B.W.; 730.5MHz, 30kHz

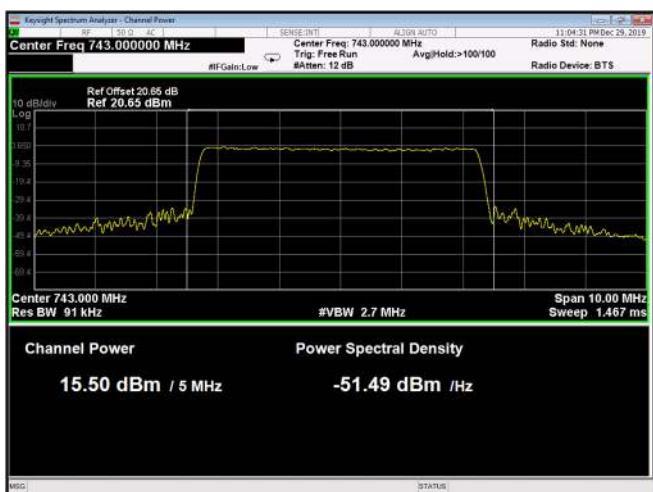


**Figure 107:** QPSK 5MHz B.W.; 743.0MHz, 15kHz

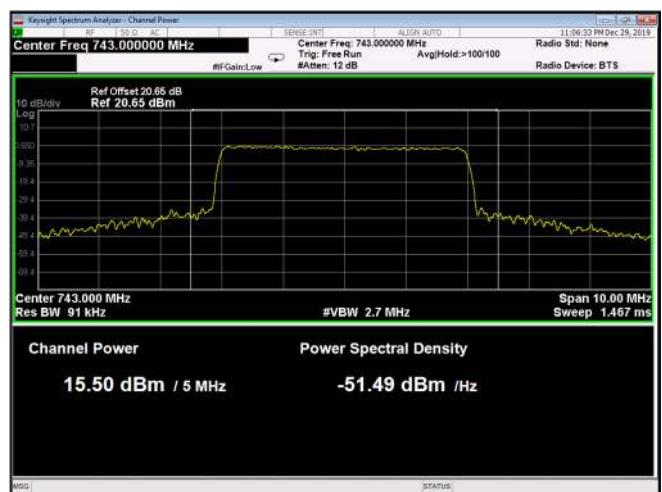


**Figure 108:** QPSK 5MHz B.W.; 743.0MHz, 30kHz

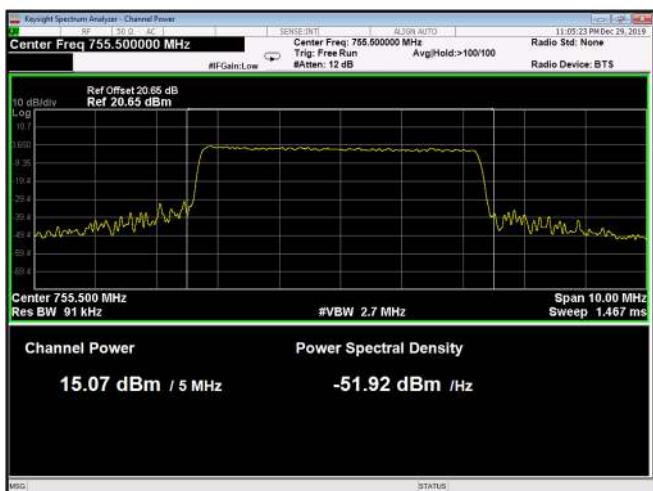


**Figure 109:** QPSK 5MHz B.W.; 755.5MHz, 15kHz

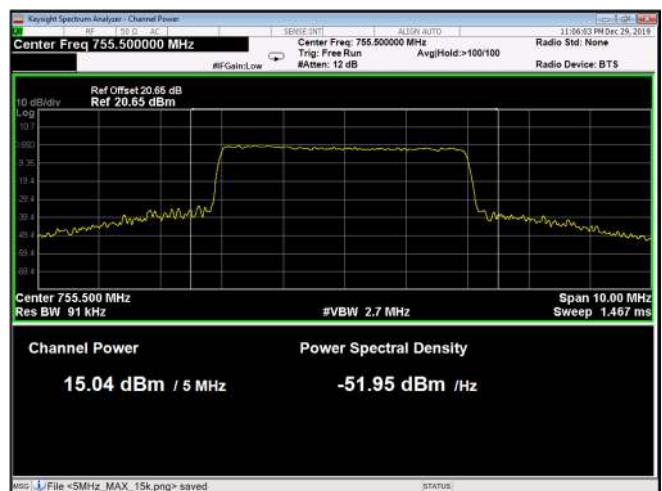


**Figure 110:** QPSK 5MHz B.W.; 755.5MHz, 30kHz

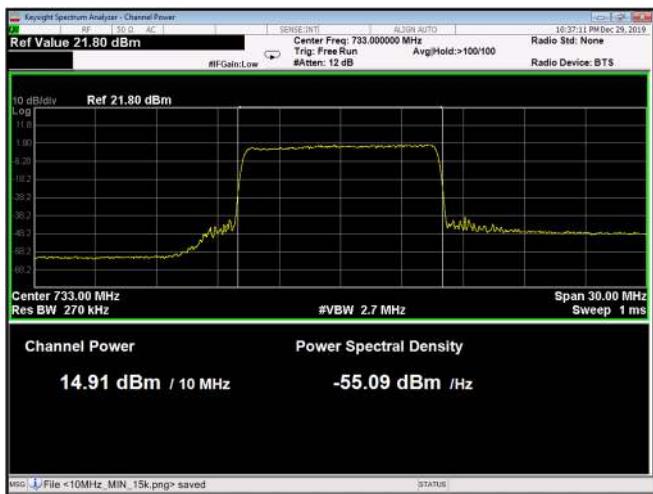


**Figure 111: QPSK 10MHz B.W.; 733.0MHz, 15kHz**

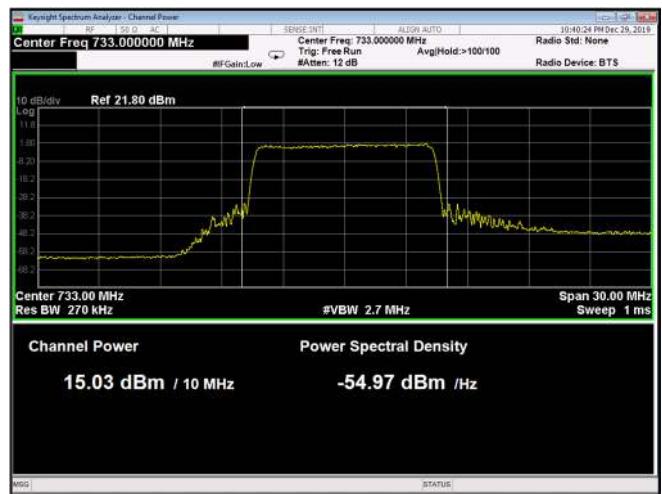


**Figure 112: QPSK 1MHz B.W.; 733.0MHz, 30kHz**

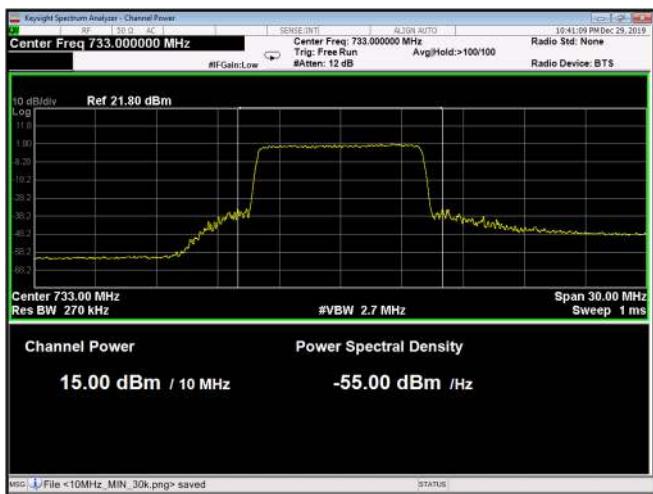


**Figure 113: QPSK 10MHz B.W.; 733.0MHz, 60kHz**

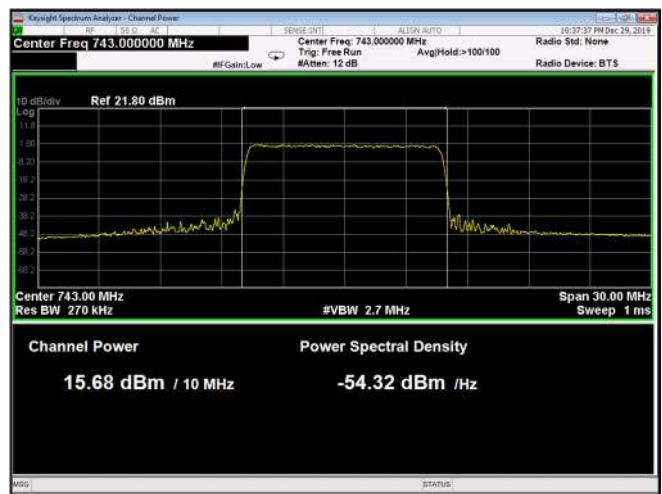

**Figure 114: QPSK 10MHz B.W.; 743.0MHz, 15kHz**

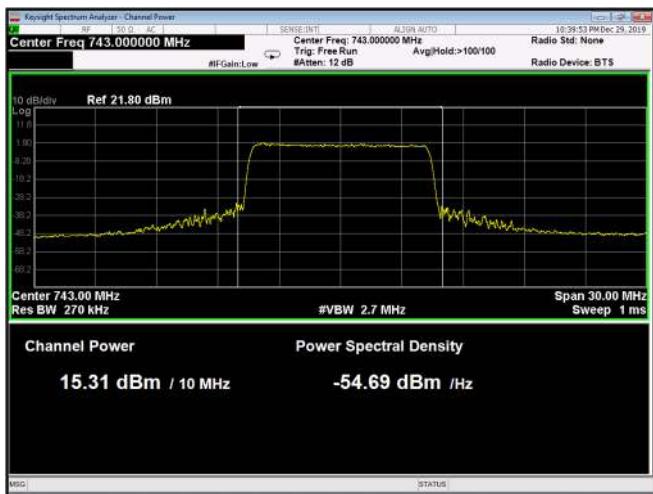

**Figure 115: QPSK 10MHz B.W.; 743.0MHz, 30kHz**

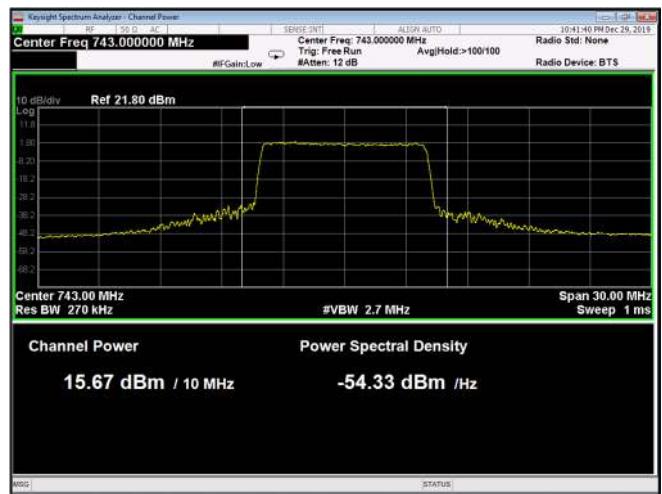

**Figure 116: QPSK 10MHz B.W.; 743.0MHz, 60kHz**

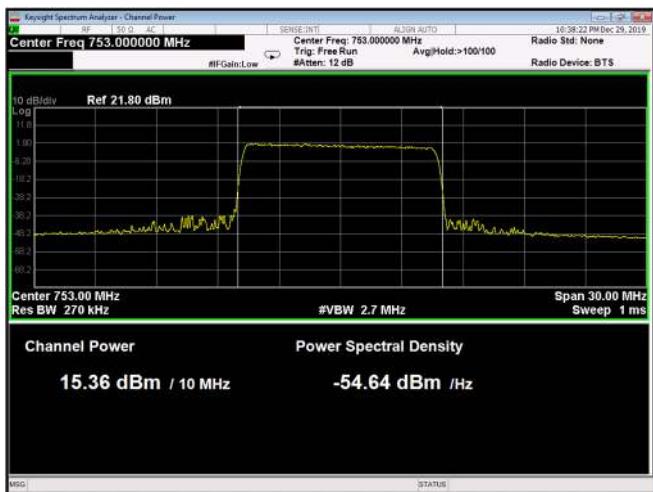


Figure 117: QPSK 10MHz B.W.; 753.0MHz, 15kHz



Figure 118: QPSK 10MHz B.W.; 753.0MHz, 30kHz

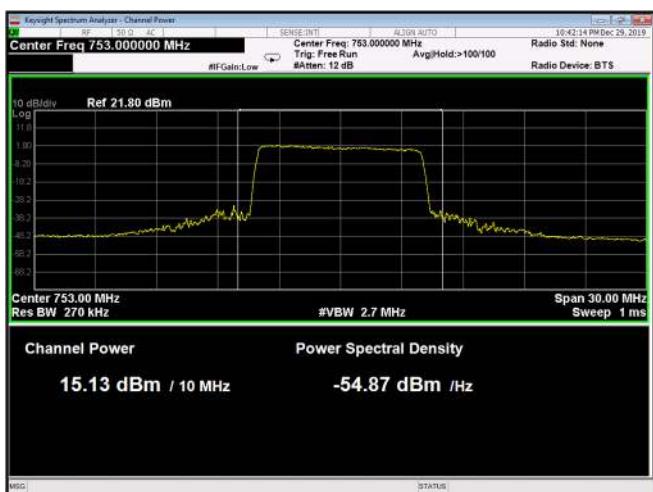


Figure 119: QPSK 10MHz B.W.; 753.0MHz, 60kHz

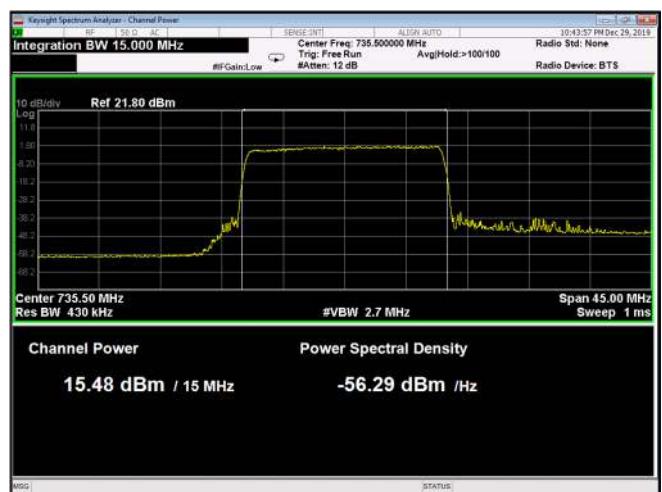


Figure 120: QPSK 15MHz B.W.; 735.5MHz, 15kHz

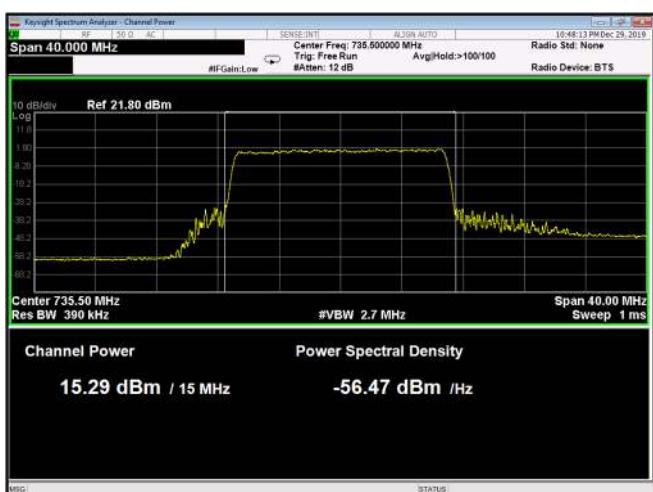


Figure 121: QPSK 15MHz B.W.; 735.5MHz, 30kHz

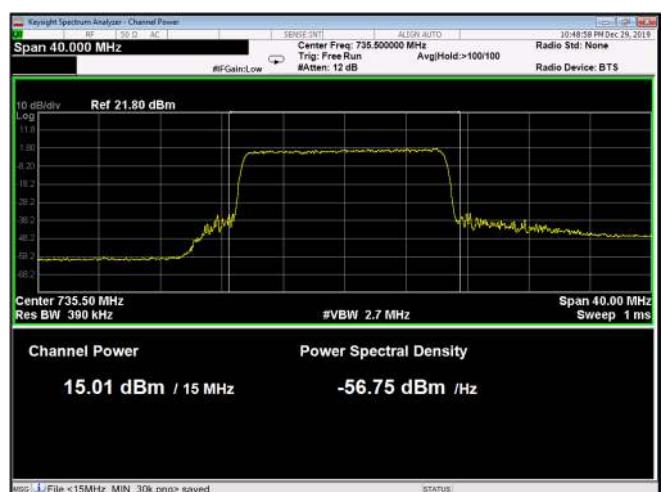


Figure 122: QPSK 15MHz B.W.; 735.5MHz, 60kHz

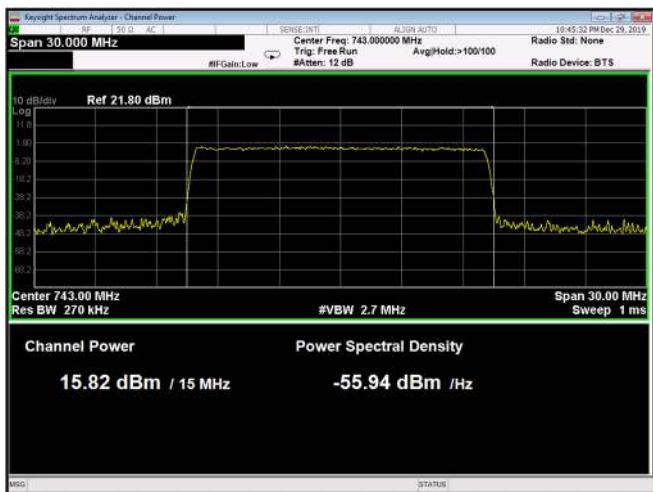


Figure 123: QPSK 15MHz B.W.; 743.0MHz, 15kHz

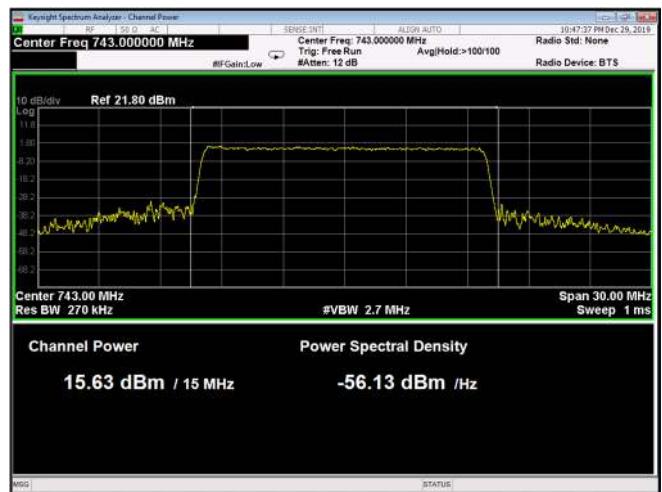


Figure 124: QPSK 15MHz B.W.; 743.0MHz, 15kHz

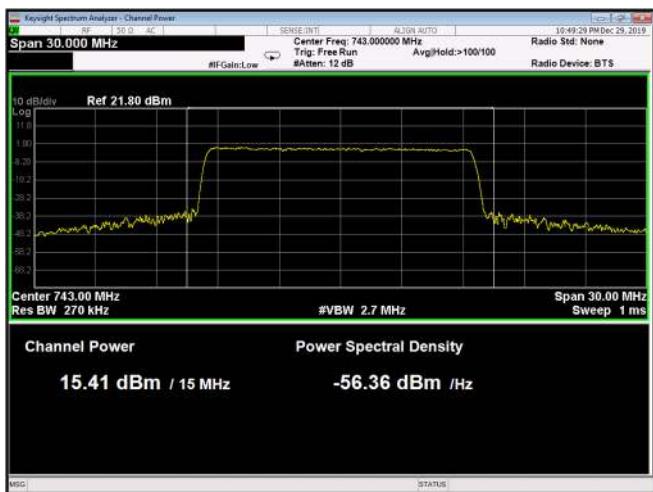


Figure 125: QPSK 15MHz B.W.; 743.0MHz, 60kHz

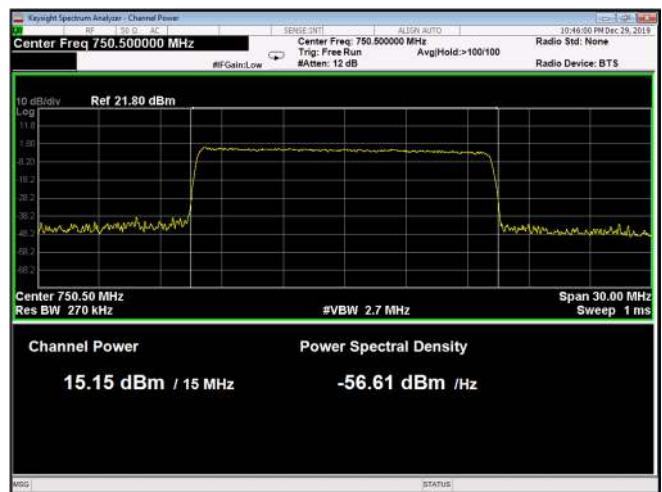


Figure 126: QPSK 15MHz B.W.; 750.5MHz, 15kHz

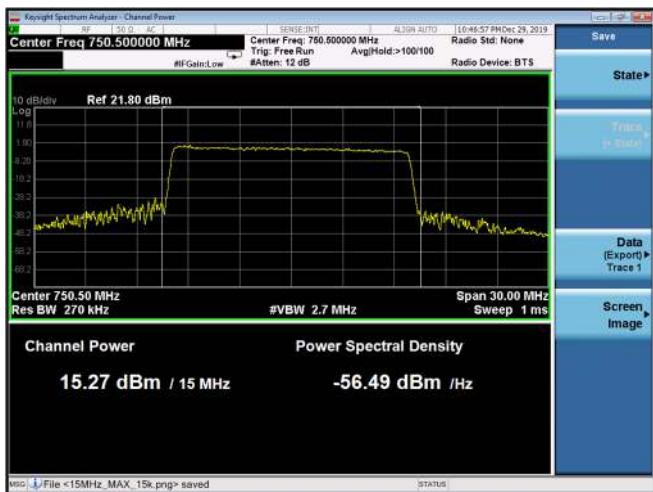


Figure 127: QPSK 15MHz B.W.; 750.5MHz, 30kHz

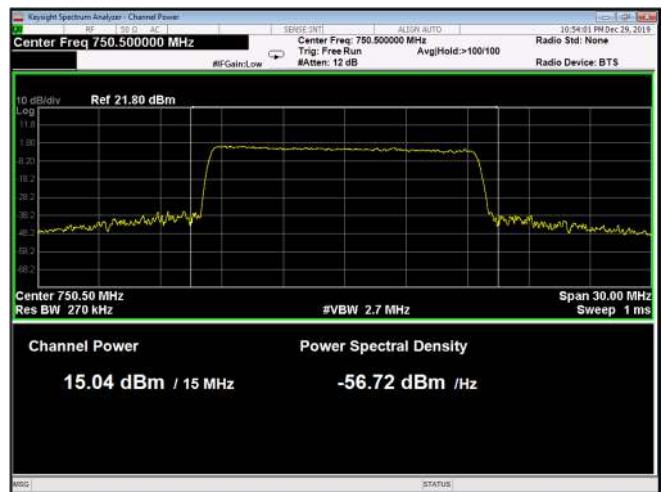


Figure 128: QPSK 15MHz B.W.; 750.5MHz, 60kHz

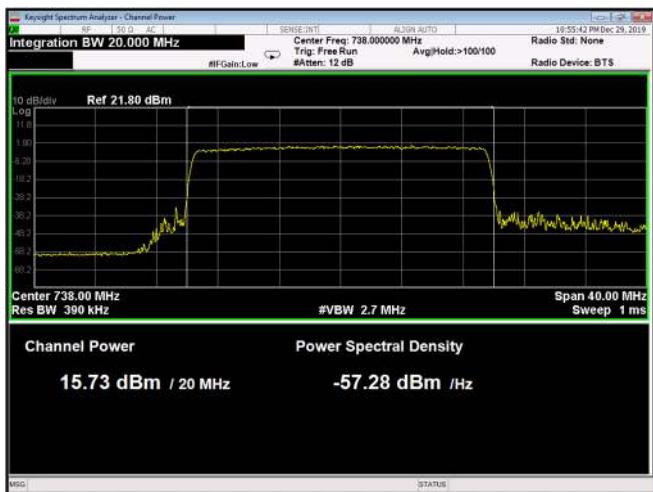


Figure 129: QPSK 20MHz B.W.; 738.0MHz, 15kHz

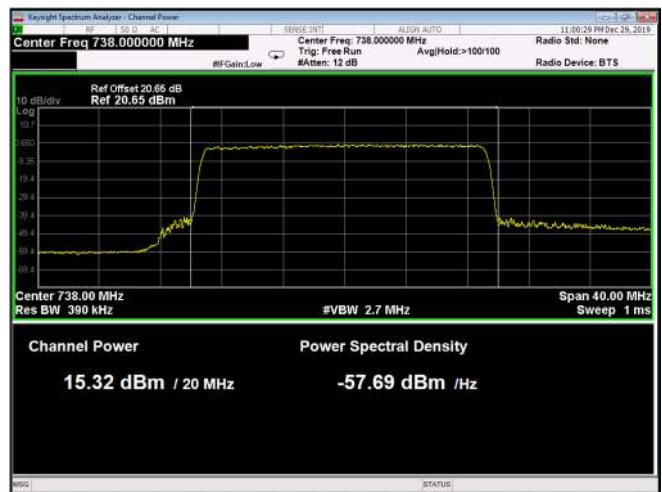


Figure 130: QPSK 20MHz B.W.; 738.0MHz, 30kHz

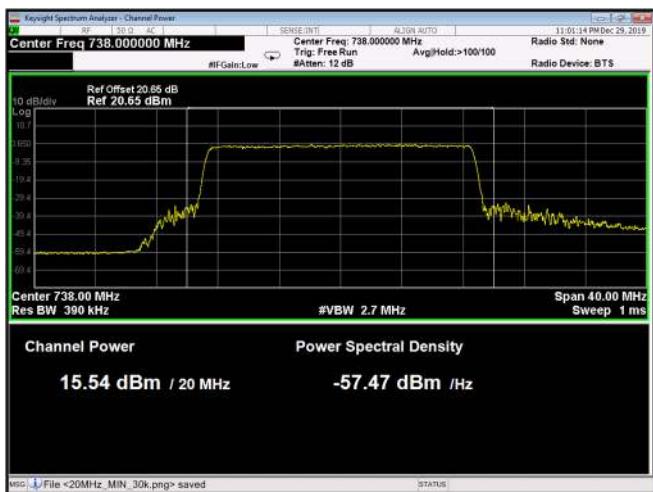


Figure 131: QPSK 20MHz B.W.; 738.0MHz, 60kHz

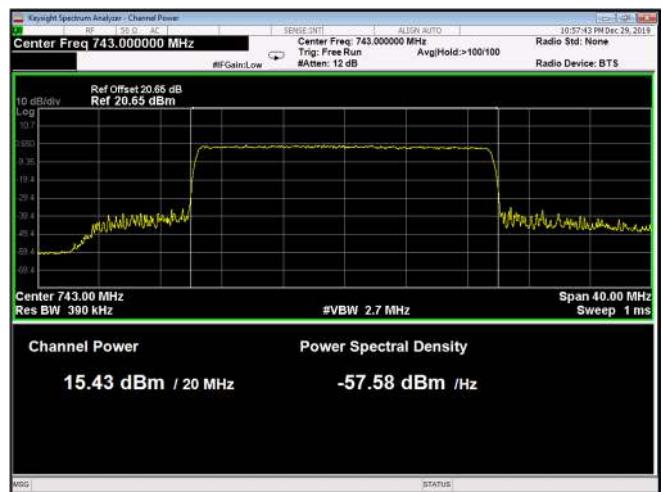


Figure 132: QPSK 20MHz B.W.; 743.0MHz, 15kHz

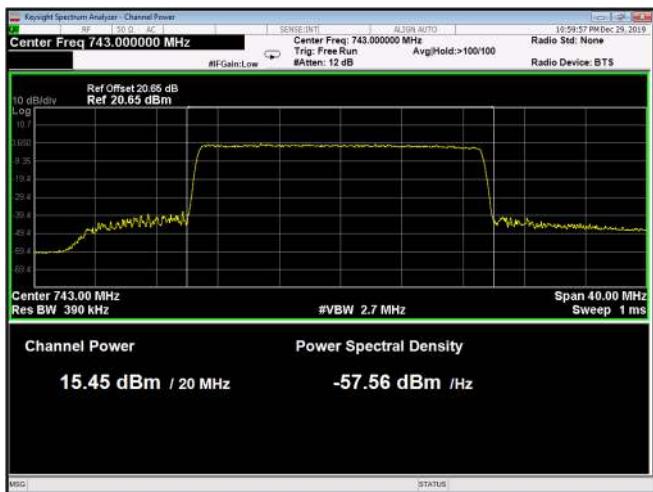


Figure 133: QPSK 20MHz B.W.; 743.0MHz, 60kHz



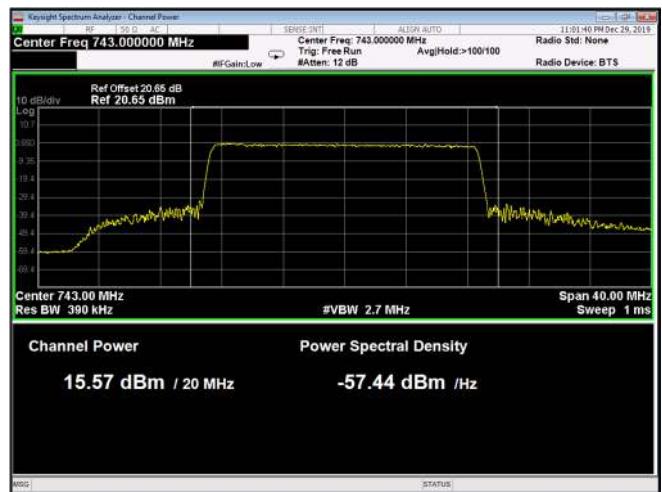



Figure 134: QPSK 20MHz B.W.; 634.5MHz, 60kHz

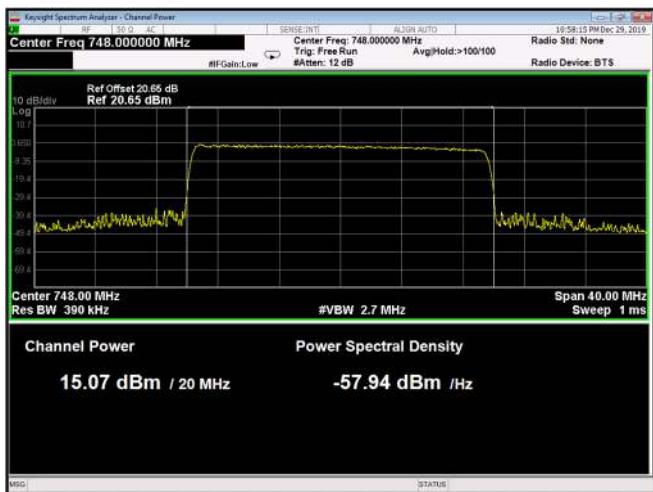

**Figure 135: QPSK 20MHz B.W.; 748.0MHz, 15kHz**

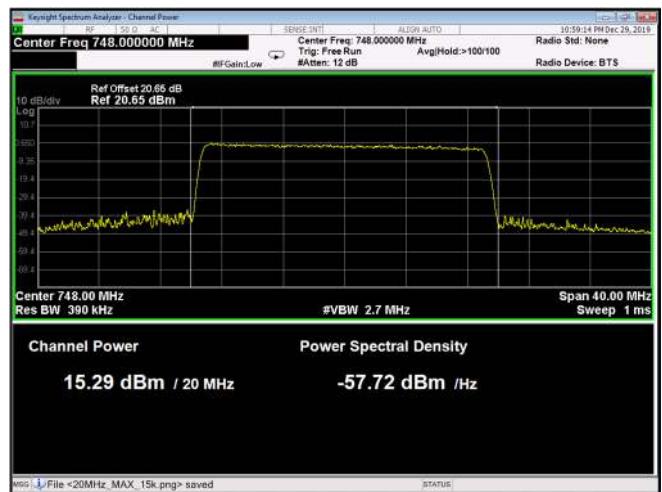

**Figure 136: QPSK 20MHz B.W.; 748.0MHz, 30kHz**

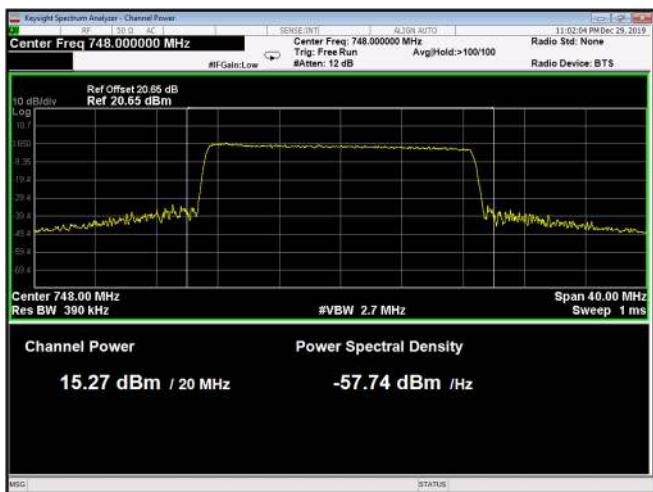

**Figure 137: QPSK 20MHz B.W.; 748.0MHz, 60kHz**

#### 4.5 Test Equipment Used; RF Power Output

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
EXA signal Analyzer	Agilent Technologies	N9010A	MY52220686	28 November 2018	28 November 2020
EXG Vector Signal Generator	Agilent Technologies	N5172B	MY51350437	03 December 2018	03 December 2020
20 dB Attenuator	Bird	8304-N20DB	-	24 December 2019	24 December 2020

**Table 5 Test Equipment Used**