



**DATE: 10 March 2021**

**I.T.L. (PRODUCT TESTING)  
LTD.**

**FCC Radio Test Report**

**For**

**Corning Optical Communication Wireless**

**Equipment under test:**

**Corning Everon 6000 DAS - dMRU**

**dMRU Medium Power Modular Remote Unit**

**(LOWER 700+UPPER 700)**

Tested by:

M. Zohar

Approved by:

D. Shidlowky

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



**Measurement/Technical Report for  
Corning Optical Communication Wireless  
Corning Everon 6000 DAS - dMRU  
dMRU Medium Power Modular Remote Unit  
(LOWER 700+UPPER 700)**

**FCC ID: OJFDMRUDPAM67**

This report concerns:      Original Grant: X  
   Class II change:  
   Class I change:

Equipment type:              Part 20 Industrial Booster (CMRS)

Limits used:                  47CFR Parts 2; 27; 90

Measurement procedure used is KDB 935210 D05 v01r04 April 2020 and ANSI IEEE C63.26-2015

Substitution Method used as in ANSI TIA-603-E-2016

Application for Certification  
prepared by:

R. Pinchuck  
ITL (Product Testing) Ltd.  
1 Bat Sheva St.  
Lod 7120101  
Israel  
e-mail RPinchuck@iltglobal.org

Applicant for this device:

(different from "prepared by")

Isaac Nissan  
Corning Optical Communication Wireless  
8253 1<sup>st</sup> Avenue  
Vienna, VA 22812  
U.S.A.  
Tel: +1-703 855-1773  
e-mail: NissanI@corning.com



# TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION</b>	<b>5</b>
1.1	Administrative Information	5
1.2	List of Accreditations	6
1.3	Product Description	7
1.4	Test Methodology	7
1.5	Test Facility	7
1.6	Measurement Uncertainty	7
<b>2</b>	<b>SYSTEM TEST CONFIGURATION</b>	<b>8</b>
2.1	Justification	8
2.2	EUT Exercise Software	8
2.3	Special Accessories	8
2.4	Equipment Modifications	8
2.5	Configuration of Tested System	9
<b>3</b>	<b>TEST SET-UP PHOTOS</b>	<b>11</b>
<b>4</b>	<b>RF POWER OUTPUT - 5G</b>	<b>14</b>
4.1	Test Specification	14
4.2	Test Procedure	14
4.3	Test Limit	14
4.4	Test Results	14
4.5	Test Equipment Used; RF Output Power	29
<b>5</b>	<b>RF POWER OUTPUT – 4G</b>	<b>30</b>
5.1	Test Specification	30
5.2	Test Procedure	30
5.3	Test Limit	30
5.4	Test Results	30
5.5	Test Equipment Used; RF Output Power	37
<b>6</b>	<b>BAND EDGE SPECTRUM - 5G</b>	<b>38</b>
6.1	Test Specification	38
6.2	Test Procedure	38
6.3	Test Limit	38
6.4	Test Results	38
6.5	Test Equipment Used; Band Edge Spectrum	48
<b>7</b>	<b>BAND EDGE SPECTRUM – 4G</b>	<b>49</b>
7.1	Test Specification	49
7.2	Test Procedure	49
7.3	Test Limit	49
7.4	Test Results	49
7.5	Test Equipment Used; Band Edge Spectrum	54
<b>8</b>	<b>PEAK TO AVERAGE POWER RATIO - 5G</b>	<b>55</b>
8.1	Test Specification	55
8.2	Test Procedure	55
8.3	Test Limit	55
8.4	Test Results	55
8.5	Test Equipment Used; 0.1% PAPR	68
<b>9</b>	<b>PEAK TO AVERAGE POWER RATIO - 4G</b>	<b>69</b>
9.1	Test Specification	69
9.2	Test Procedure	69
9.3	Test Limit	69
9.4	Test Results	69
9.5	Test Equipment Used; 0.1% PAPR	75



<b>10</b>	<b>OCCUPIED BANDWIDTH – 5G</b>	<b>76</b>
	10.1 Test Specification	76
	10.2 Test Procedure	76
	10.3 Test Limit	76
	10.4 Test Results	76
	10.5 Test Equipment Used; Occupied Bandwidth	101
<b>11</b>	<b>OCCUPIED BANDWIDTH – 4G</b>	<b>102</b>
	11.1 Test Specification	102
	11.2 Test Procedure	102
	11.3 Test Limit	102
	11.4 Test Results	102
	11.5 Test Equipment Used; Occupied Bandwidth	113
<b>12</b>	<b>SPURIOUS EMISSIONS AT ANTENNA TERMINALS - 5G</b>	<b>114</b>
	12.1 Test Specification	114
	12.2 Test Procedure	114
	12.3 Test Limit	114
	12.4 Test Results	114
	12.5 Test Equipment Used; Spurious Emissions at Antenna Terminals	134
<b>13</b>	<b>SPURIOUS EMISSIONS AT ANTENNA TERMINALS - 4G</b>	<b>135</b>
	13.1 Test Specification	135
	13.2 Test Procedure	135
	13.3 Test Limit	135
	13.4 Test Results	135
	13.5 Test Equipment Used; Spurious Emissions at Antenna Terminals	143
<b>14</b>	<b>SPURIOUS RADIATED EMISSION</b>	<b>144</b>
	14.1 Test Specification	144
	14.2 Test Procedure	144
	14.3 Test Limit	144
	14.4 Test Results	144
	14.5 Test Instrumentation Used; Radiated Measurements	145
<b>15</b>	<b>SPURIOUS RADIATED EMISSION FOR 1559-1610 MHZ BAND</b>	<b>146</b>
	15.1 Test Specification	146
	15.2 Test Procedure	146
	15.3 Test Limit	146
	15.4 Test Results	146
<b>16</b>	<b>OUT-OF-BAND REJECTION</b>	<b>148</b>
	16.1 Test Specification	148
	16.2 Test Procedure	148
	16.3 Test Limit	148
	16.4 Test Results	148
	16.5 Test Equipment Used; Out-of-Band Rejection	149
<b>17</b>	<b>APPENDIX A - CORRECTION FACTORS</b>	<b>150</b>
	17.1 Correction factors for RF OATS Cable 35m	150
	17.2 Correction factors for RF OATS Cable 10m	151
	17.3 Correction factors for Horn Antenna	152
	17.4 Correction factors for Horn Antenna	153
	17.5 Correction factors for Log Periodic Antenna	154
	17.6 Correction factors for Biconical Antenna	155
	17.7 Correction factors for ACTIVE LOOP ANTENNA	156



# 1 General Information

## 1.1 Administrative Information

Manufacturer:	Corning Optical Communication Wireless
Manufacturer's Address:	8253 1st Avenue Vienna, VA 22812 U.S.A. Tel: +1-703 855-1773
Manufacturer's Representative:	Isaac Nissan
Equipment Under Test (E.U.T):	Corning Everon 6000 DAS - dMRU
Equipment Model No.:	dMRU Medium Power Modular Remote Unit
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	November 1, 2020
Start of Test:	November 2, 2020
End of Test:	February 23, 2021
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St, Lod, Israel 7116002
Test Specifications:	FCC Parts 2; 27; 90



## **1.2 List of Accreditations**

The EMC laboratory of I.T.L. is accredited by/registered with the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number is IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-20025, R-2729, T-20028, G-20068.
5. Department of Innovation, Science and Economic Development (ISED) Canada, CAB identifier: IL1002.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



### 1.3 **Product Description**

DMRU - Digital Medium-power Remote Unit.

The MRU is a medium power modular remote antenna unit with a single antenna port.

The Output power for the lower bands: 600/700 MHz Low/700 MHz

High/FirstNet, 800/850 MHz is 33 dBm and the output power for the medium bands EAWS, PCS, WCS and 2.5GHz TDD is 37dBm.

The MRU modular structure and integrated high-performance cavity based multiplexing functionalities, enable setups of up to 6 RF modules, for a variety of licensed frequency bands within a single cabinet.

The MRU also provides CBRS/C-Band ready RF interface for future field upgrades.

### 1.4 **Test Methodology**

Both conducted and radiated testing were performed according to the procedures in KDB 935210 D05 v01r04 April 2020 and ANSI/TIA-603-E-2016. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### 1.5 **Test Facility**

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

### 1.6 **Measurement Uncertainty**

#### **Conducted Emission**

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

#### **Radiated Emission**

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site:

30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

1 GHz to 6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.19 dB

>6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.51 dB



## 2 System Test Configuration

### 2.1 *Justification*

The dMRU is a repeater supporting a broad range of cellular generations: 4G and 5G in the LOWER 700+UPPER 700 band+ First Net.

Evaluation was performed at the low, mid and high channels each one defined per the operation BW.

Evaluation was performed at 115VAC as the nominal power source.

Conducted tests were performed with an external attenuator connected to the spectrum analyzer.

Radiated emission tests were performed with a 50Ω termination connected to the E.U.T output terminal.

### 2.2 *EUT Exercise Software*

The Element Management System ver. 1.4 was used for commands delivery. These commands are used to enable/disable the EUT transmission. SW Ver. is 1.4.

### 2.3 *Special Accessories*

No special accessories were needed in order to achieve compliance.

### 2.4 *Equipment Modifications*

No modifications were necessary in order to achieve compliance.



## 2.5 Configuration of Tested System

Product Name	Corning Everon 6000 DAS - dMRU
Model Name	dMRU medium power modular remote unit (LOWER 700+UPPER 700+ First Net )
Working voltage(rated)	48 VDC, 115/230 VAC
Mode of operation	Repeater Booster supporting 4G and 5G
Modulations	4G: 16QAM, 64QAM, QPSK; 5G: 16QAM, 64QAM, 256QAM, QPSK
Frequency Range	LOWER 700+UPPER 700 (DL: 728-768, UL:698-716)
Transmit power	~34 dBm (Max) per band
DATA rate	N/A
Modulation BW	5; 10; 15MHz
DC Voltage applied to final RF stage band board (Driver and PA)	28.5V
DC Current applied to final RF stage band board (Driver and PA)	1.7A

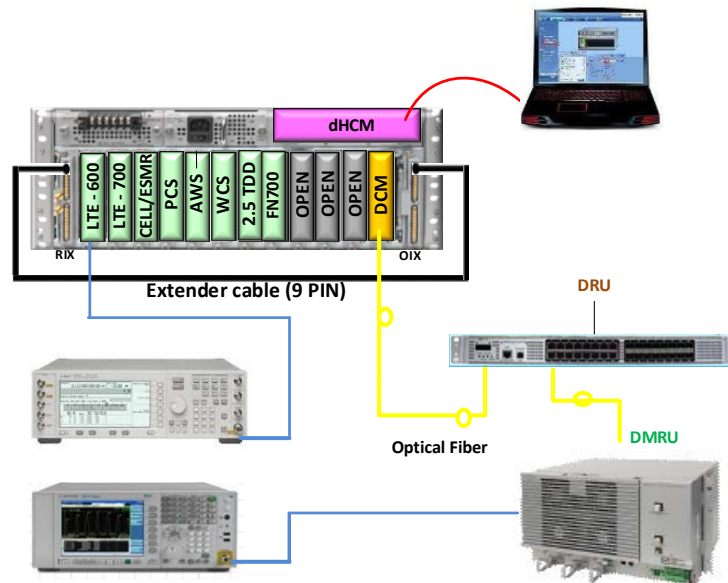


Figure 1. Conducted Test Set-Up

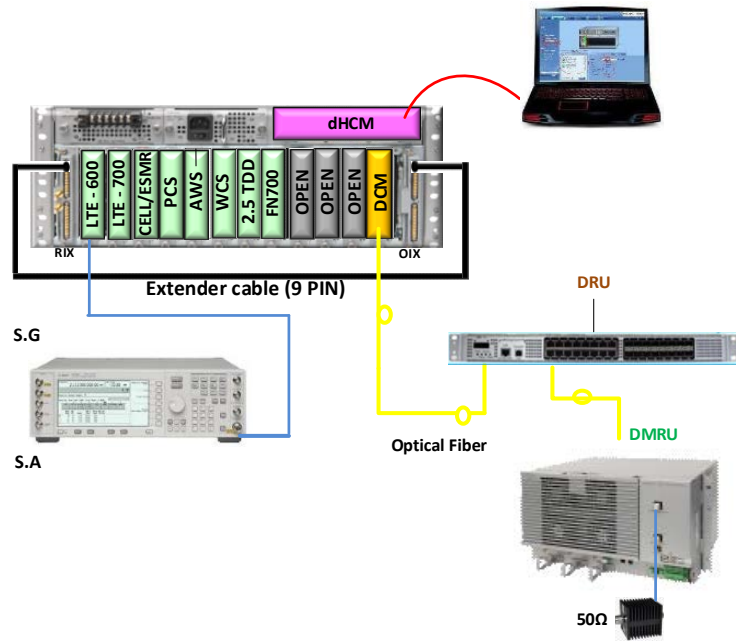


Figure 2. Radiated Test Set-Up

### 3 Test Set-Up Photos



Figure 3. Conducted Emission From Antenna Port Tests

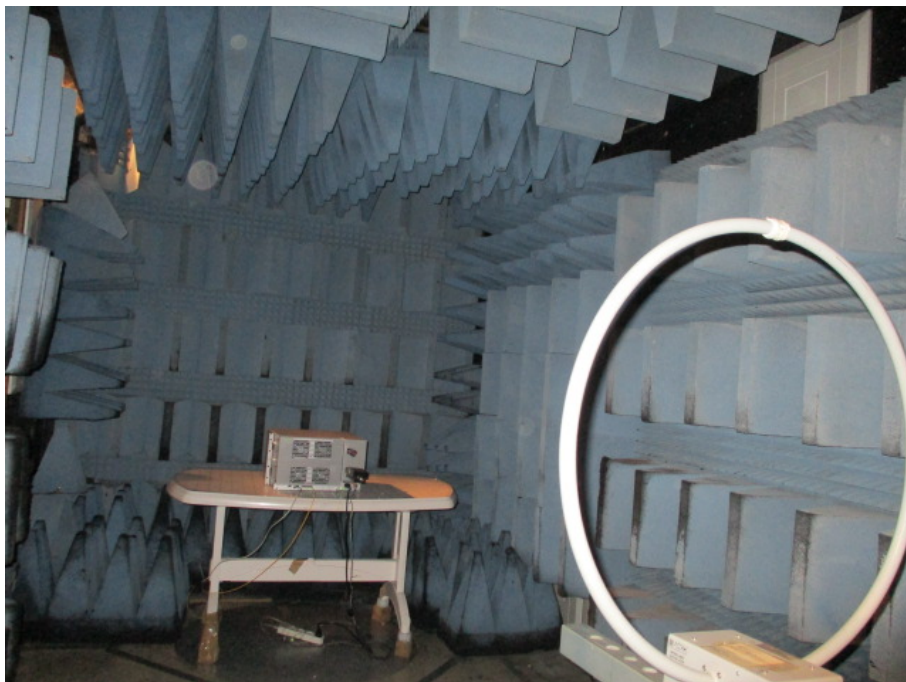


Figure 4. Radiated Emission Test 9kHz - 30MHz



**Figure 5. Radiated Emission Test 30 - 200 MHz**



**Figure 6. Radiated Emission Test 200 - 1000MHz**



**Figure 7. Radiated Emission Test 1.0 - 8.0GHz**



## 4 RF Power Output - 5G

### 4.1 Test Specification

Part 27, Subpart C, Section 27.50

Part 90, Subpart R, Section 90.542(a)(3)

### 4.2 Test Procedure

(Temperature (20°C)/ Humidity (48%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (40.7 dB) and an appropriate coaxial cable. Special attention was taken to prevent Spectrum Analyzer RF input overload.

### 4.3 Test Limit

Peak Power Output must not exceed 1000W (60 dBm).

### 4.4 Test Results

JUDGEMENT: Passed

See additional information in Table 1 to Table 4 and Figure 8 to Figure 63.



Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading
	(MHz)	(kHz)	(MHz)	(dBm)
16QAM	5	15	730.5	33.36
		30		33.57
		15	751.5	34.22
		30		34.13
		15	765.5	33.24
		30		33.53
	10	15	733.0	33.60
		30		33.70
		15	751.5	33.85
		30		33.75
		15	763.0	33.17
		30		33.33
	15	15	735.5	33.54
		30		33.67

**Table 1 RF Power Output 16QAM – 5G**



Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading
	(MHz)	(kHz)	(MHz)	(dBm)
64QAM	5	15	730.5	33.50
		30		33.47
		15	751.5	34.23
		30		34.17
		15	765.5	32.72
		30		32.79
	10	15	733.0	33.66
		30		33.71
		15	751.5	33.68
		30		33.58
		15	763.0	33.05
		30		33.00
	15	15	735.5	33.48
		30		33.34

**Table 2 RF Power Output 64QAM - 5G**










Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading
	(MHz)	(kHz)	(MHz)	(dBm)
256QAM	5	15	730.5	33.48
		30		33.55
		15	751.5	33.92
		30		33.98
		15	765.5	33.07
		30		32.79
	10	15	733.0	33.83
		30		33.79
		15	751.5	33.63
		30		33.81
		15	763.0	33.04
		30		33.01
	15	15	735.5	33.42
		30		33.39

**Table 3 RF Power Output 256QAM - 5G**



Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading
	(MHz)	(kHz)	(MHz)	(dBm)
QPSK	5	15	730.5	33.29
		30		33.13
		15	751.5	34.27
		30		34.27
		15	765.5	33.58
		30		33.60
	10	15	733	33.56
		30		33.67
		15	751.5	33.66
		30		33.80
		15	763	33.17
		30		33.30
	15	15	735.5	33.43
		30		33.82

**Table 4 RF Power Output QPSK - 5G**

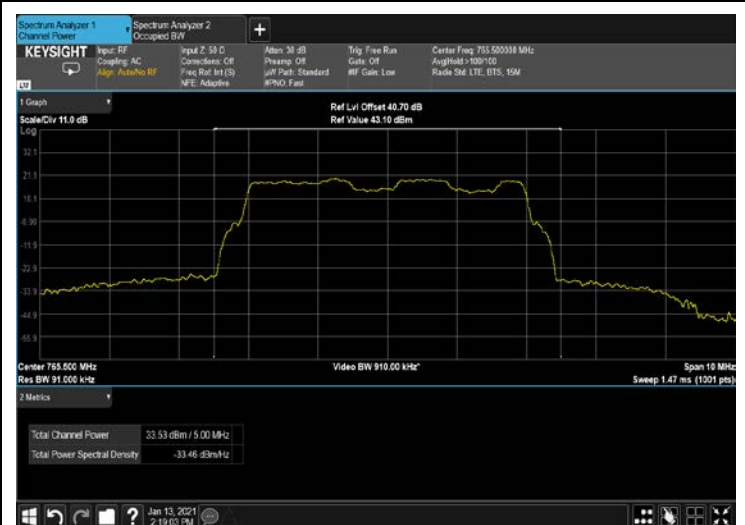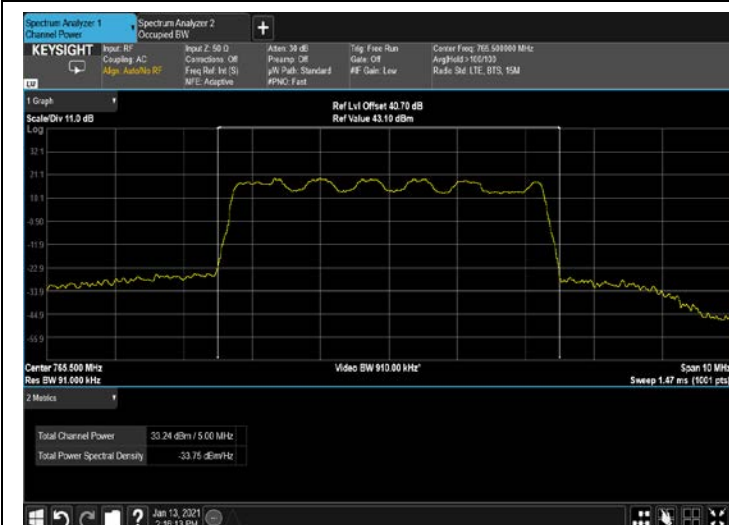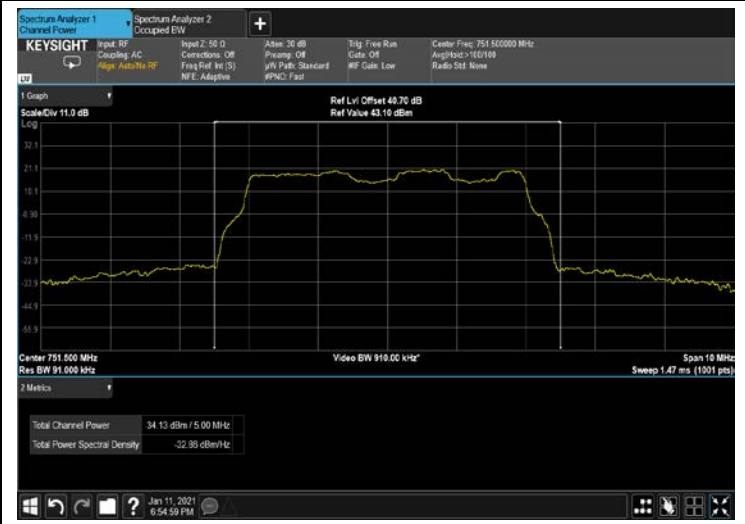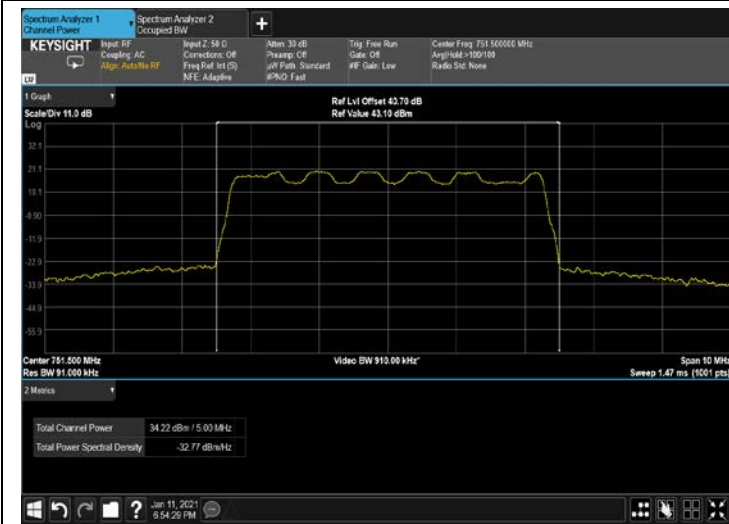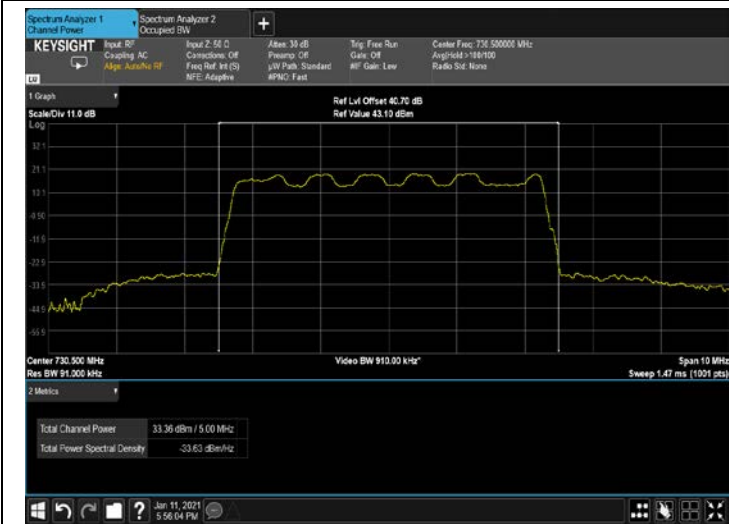

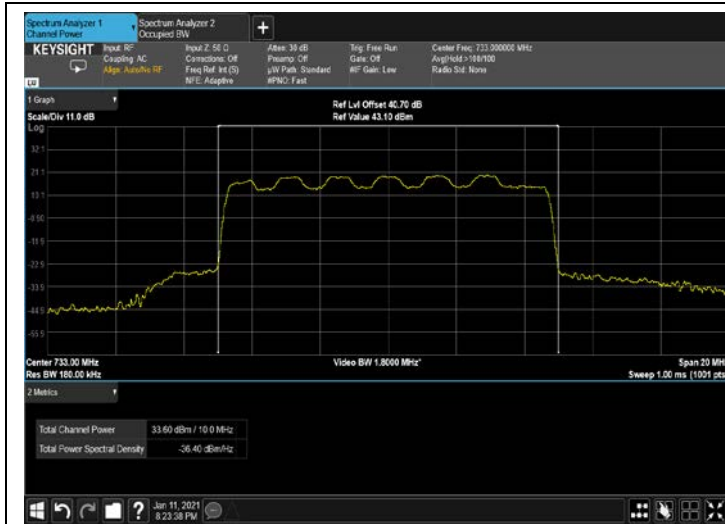


Figure 14: 16QAM 10MHz B.W; 733MHz, 15kHz

Figure 15: 16QAM 10MHz B.W; 733MHz, 30kHz

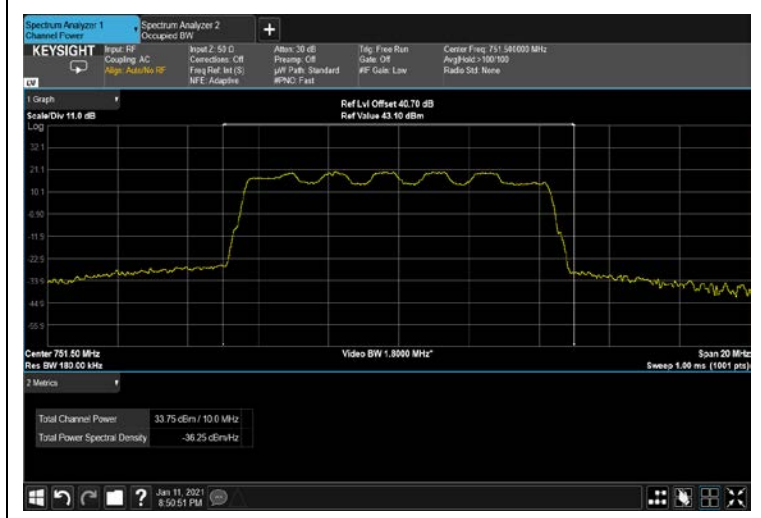





Figure 16: 16QAM 10MHz B.W; 751.5MHz, 15kHz

Figure 17: 16QAM 10MHz B.W; 751.5MHz, 30kHz




Figure 18: 16QAM 10MHz B.W; 763MHz, 15kHz

Figure 19: 16QAM 10MHz B.W; 763MHz, 30kHz

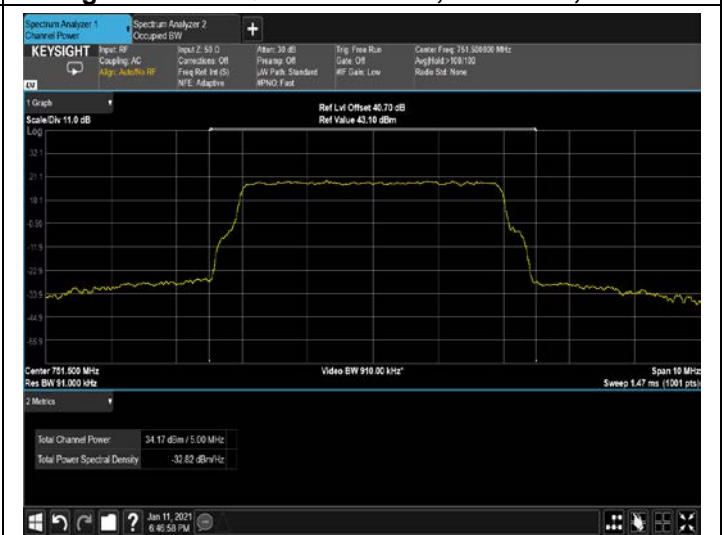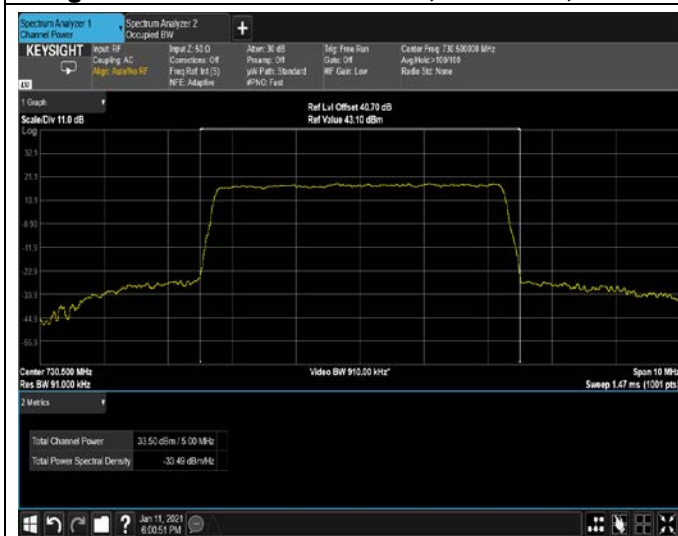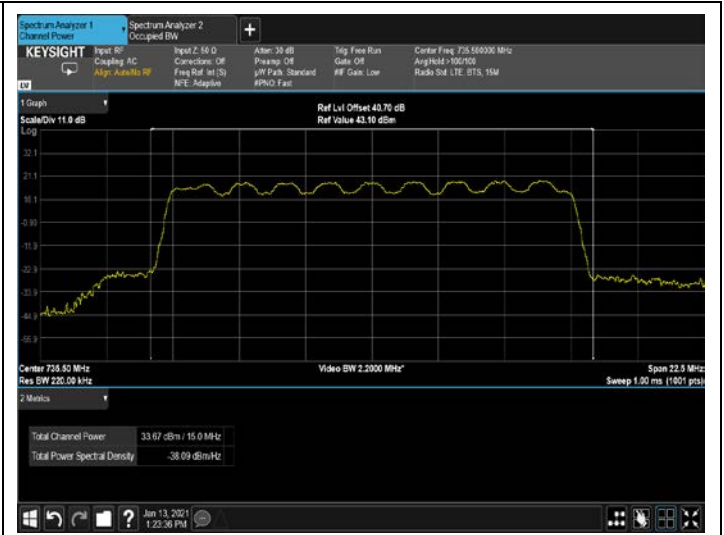



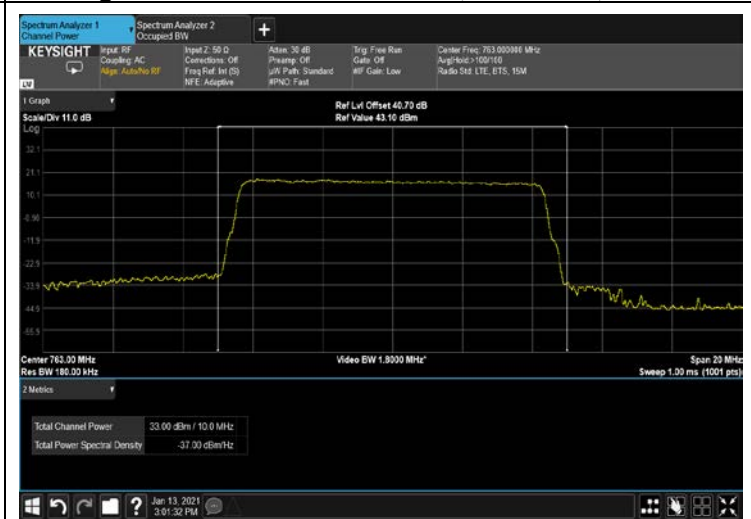

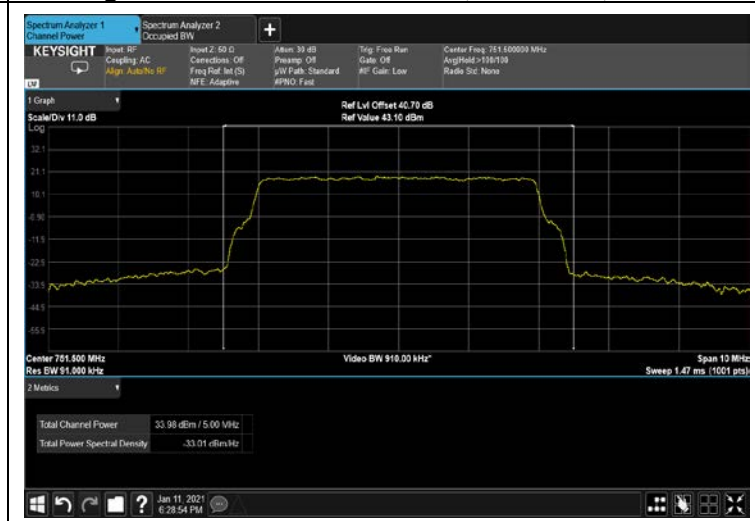
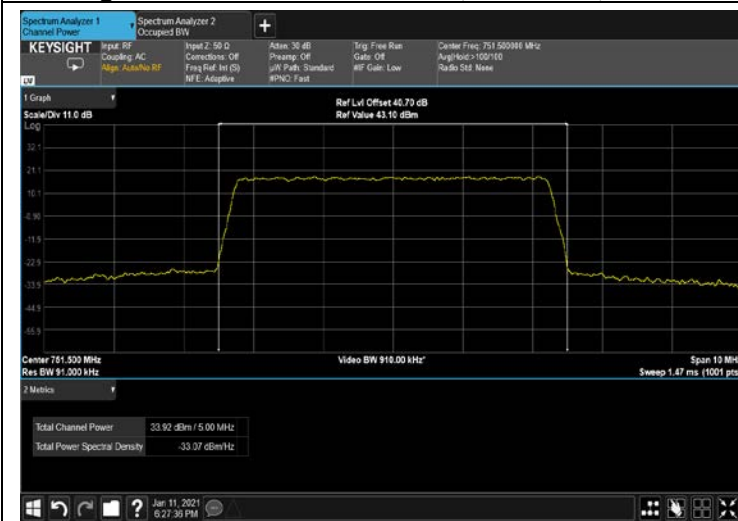
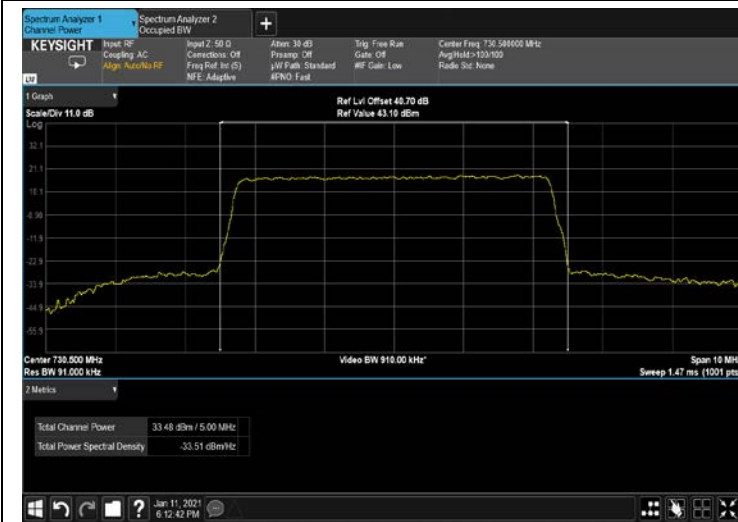






Figure 42: 256QAM 10MHz B.W; 733MHz, 15kHz

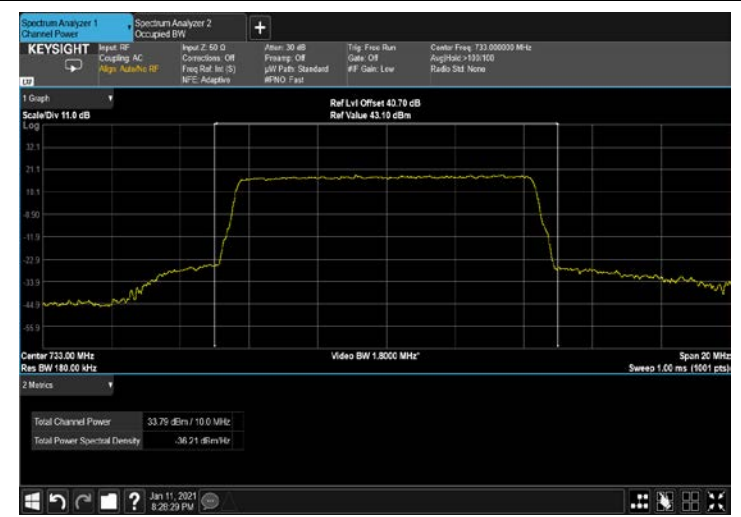


Figure 43: 256QAM 10MHz B.W; 733MHz, 30kHz



Figure 44: 256QAM 10MHz B.W; 751.5MHz, 15kHz



Figure 45: 256QAM 10MHz B.W; 751.5MHz, 30kHz

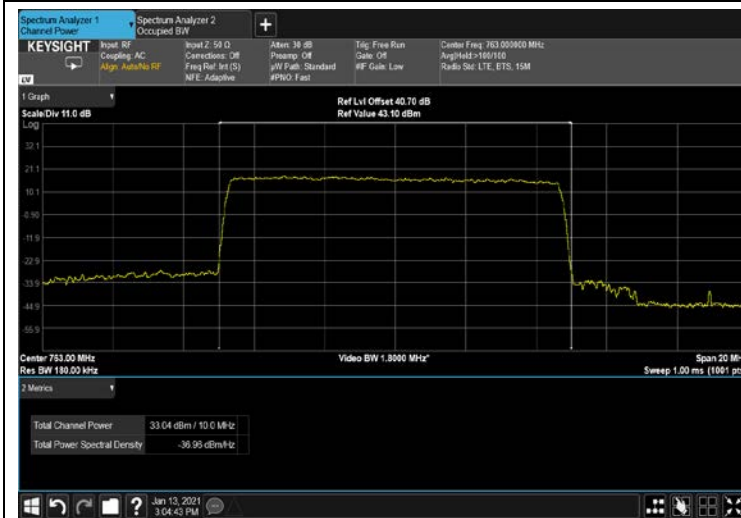


Figure 46: 256QAM 10MHz B.W; 763MHz, 15kHz



Figure 47: 256QAM 10MHz B.W; 763MHz, 30kHz

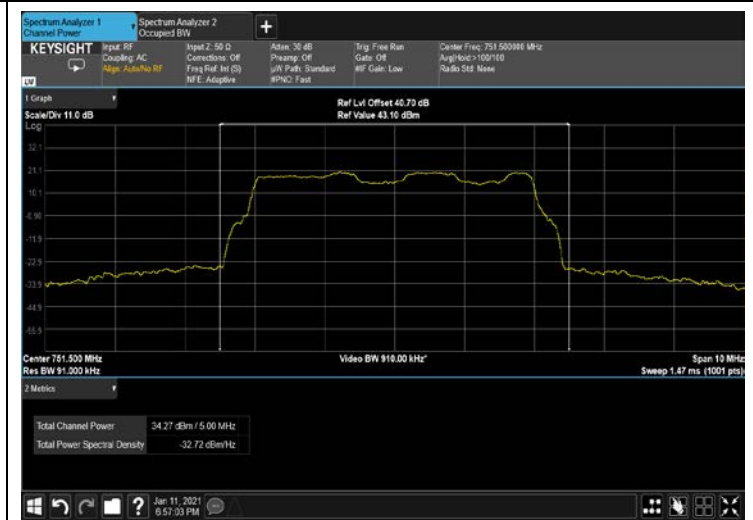
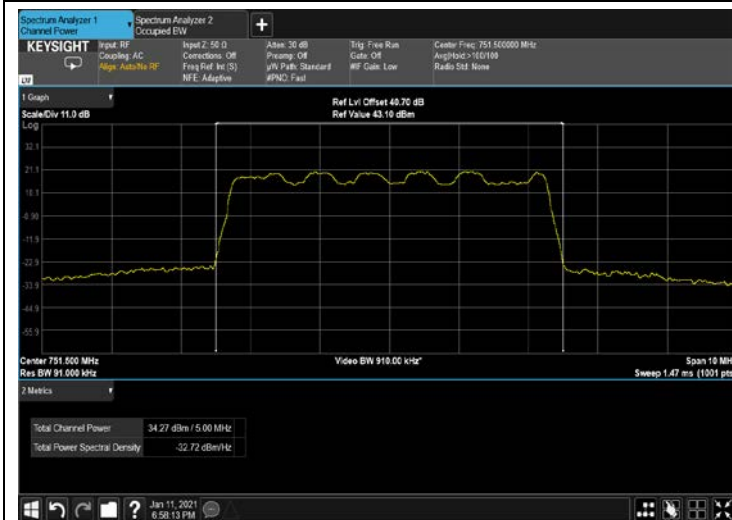
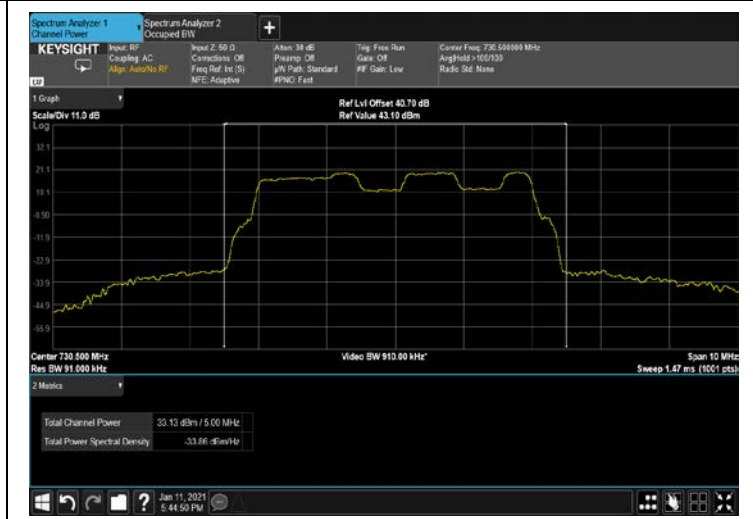




Figure 54: QPSK 5MHz B.W; 765.5MHz, 15kHz



Figure 55: QPSK 5MHz B.W; 765.5MHz, 30kHz



Figure 56: QPSK 10MHz B.W; 733MHz, 15kHz



Figure 57: QPSK 10MHz B.W; 733MHz, 30kHz



Figure 58: QPSK 10MHz B.W; 751.5MHz, 15kHz




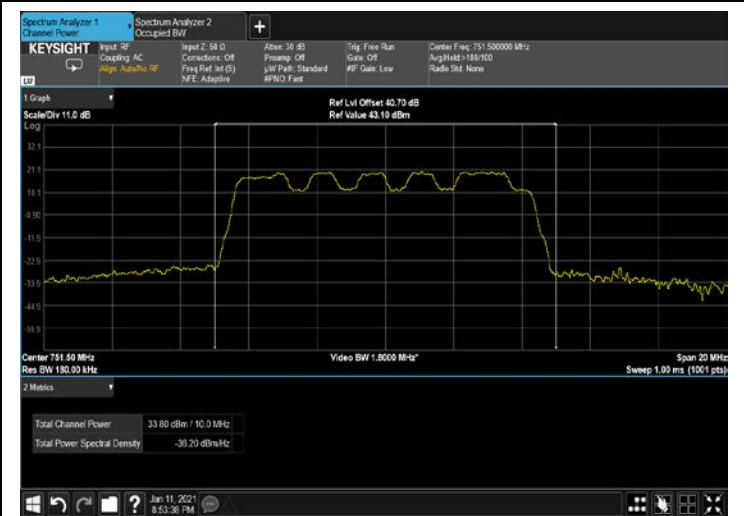


Figure 59: QPSK 10MHz B.W; 751.5MHz, 30kHz

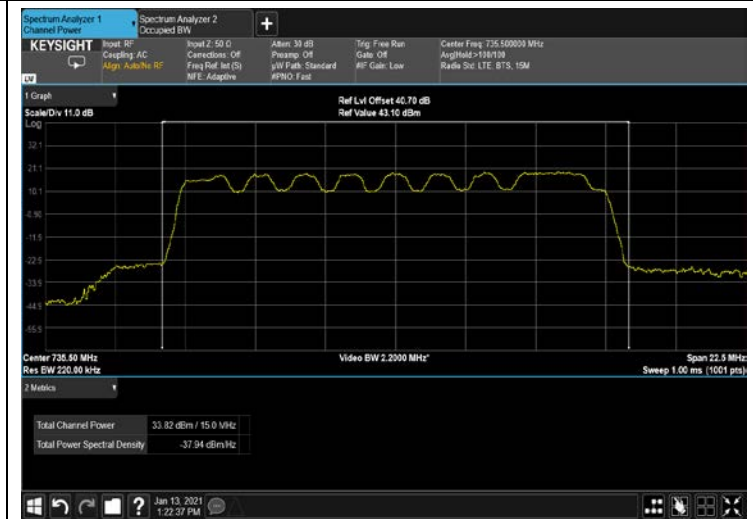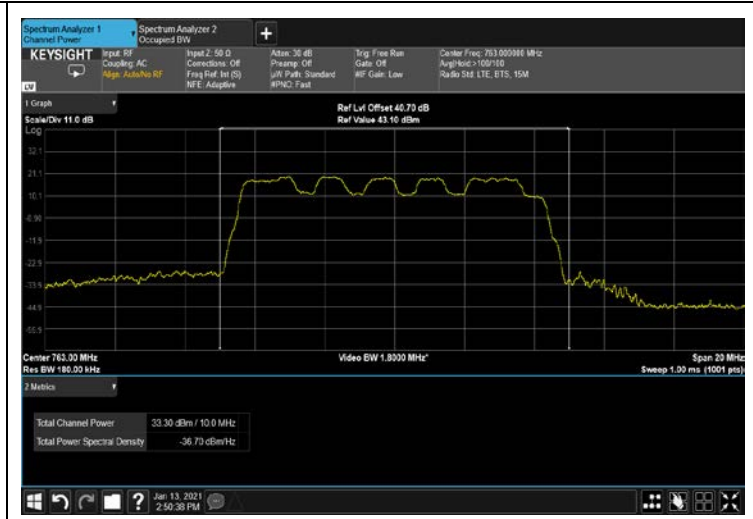

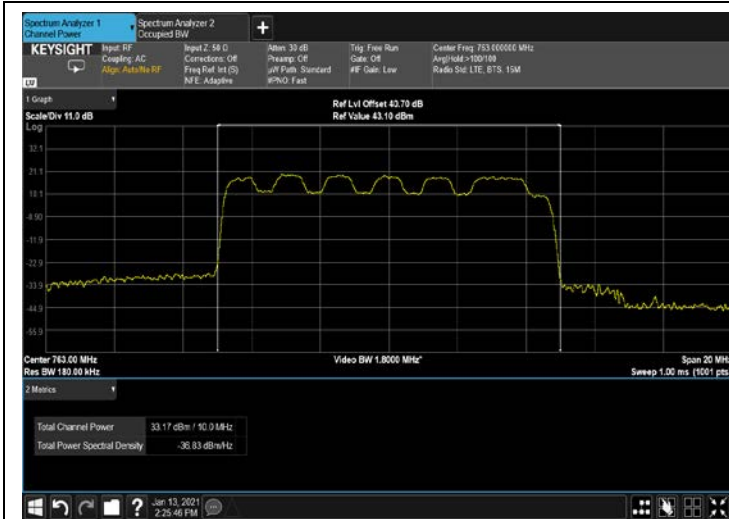

#### 4.5 Test Equipment Used; RF Output Power

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
EXA signal Analyzer	Keysight	UXA N9040B	MY56080119	January 31, 2020	January 31, 2022
EXG Vector Signal Generator	Agilent Technologies	N5172B	MY53051952	January 17, 2019	January 17, 2022
40 dB Attenuator	Weinschel Associates	WA 39-40-33	-	November 1, 2020	November 1, 2021
RF Coaxial Cable	Huber-Suner	SLLS210B	-	November 1, 2020	November 1, 2021

Table 5 Test Equipment Used



## 5 RF Power Output – 4G

### 5.1 Test Specification

Part 27, Subpart C, Section 27.50

Part 90, Subpart R, Section 90.542(a)(3)

### 5.2 Test Procedure

(Temperature (20°C)/ Humidity (48%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (40.7 dB) and an appropriate coaxial cable. Special attention was taken to prevent Spectrum Analyzer RF input overload.

### 5.3 Test Limit

Peak Power Output must not exceed 1000W (60 dBm).

### 5.4 Test Results

JUDGEMENT: Passed

See additional information in Table 6 to Table 8 and Figure 64 to Figure 84.



Modulation	Bandwidth	Operation Frequency	Reading
	(MHz)	(MHz)	(dBm)
16QAM	5	730.5	33.59
		751.5	33.90
		765.5	32.94
	10	733.0	33.98
		751.5	33.83
		763.0	33.50
15	735.5	33.08	

**Table 6 RF Power Output 16QAM - 4G**

Modulation	Bandwidth	Operation Frequency	Reading
	(MHz)	(MHz)	(dBm)
64QAM	5	730.5	33.62
		751.5	33.67
		765.5	33.15
	10	733.0	33.94
		751.5	33.70
		763.0	33.54
15	735.5	33.01	

**Table 7 RF Power Output 64AM - 4G**

Modulation	Bandwidth	Operation Frequency	Reading
	(MHz)	(MHz)	(dBm)
QPSK	5	730.5	33.54
		751.5	33.86
		765.5	33.08
	10	733.0	33.99
		751.5	33.81
		763.0	33.94
15	735.5	33.02	

**Table 8 RF Power Output QPSK - 4G**

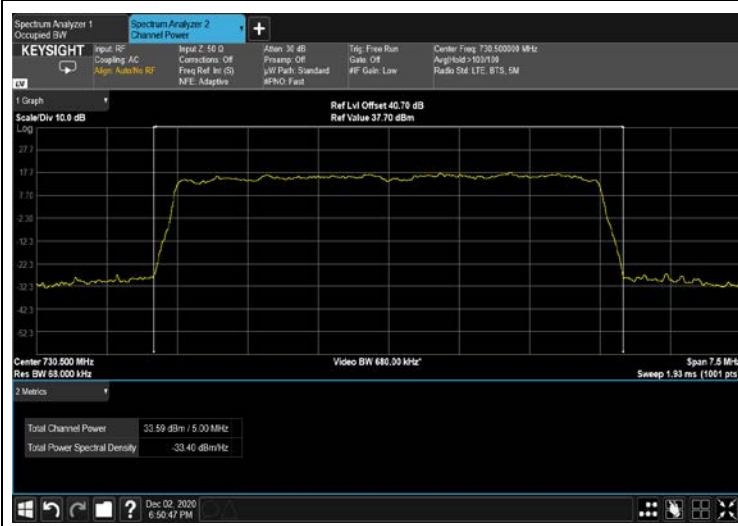


Figure 64: 16QAM 5MHz B.W; 730.5MHz – 4G



Figure 65: 16QAM 5MHz B.W; 751.5MHz – 4G



Figure 66: 16QAM 5MHz B.W; 765.5MHz – 4G



Figure 67: 16QAM 10MHz B.W; 733.0MHz – 4G





Figure 68: 16QAM 10MHz B.W; 751.5MHz – 4G



Figure 69: 16QAM 10MHz B.W; 763.0MHz – 4G





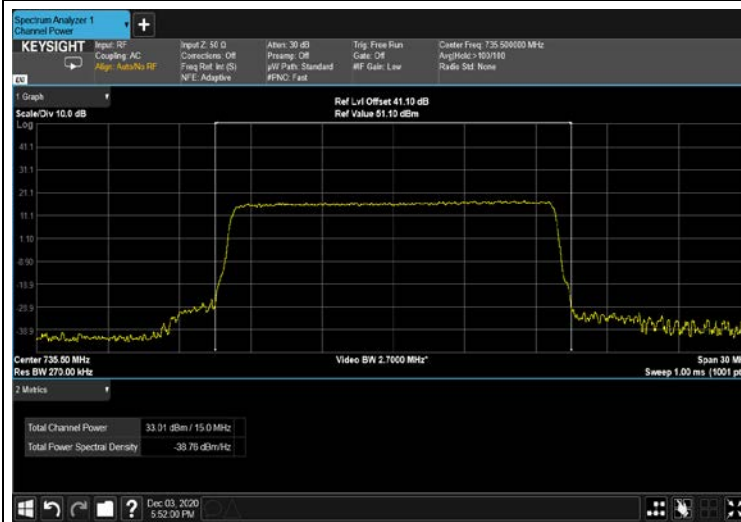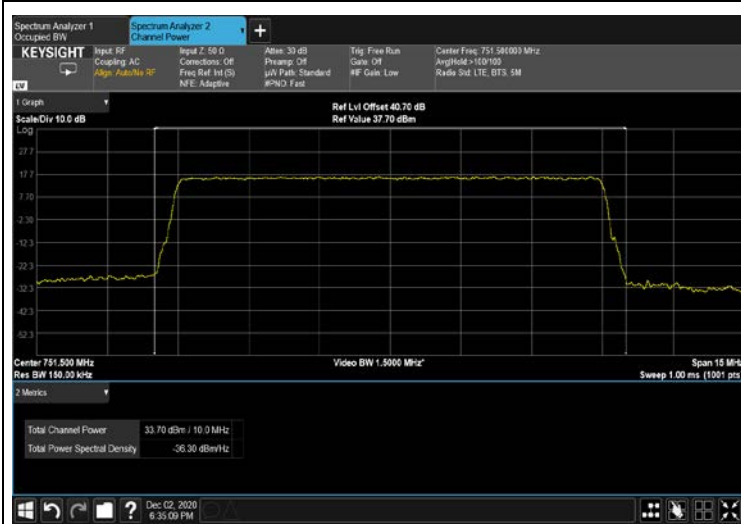


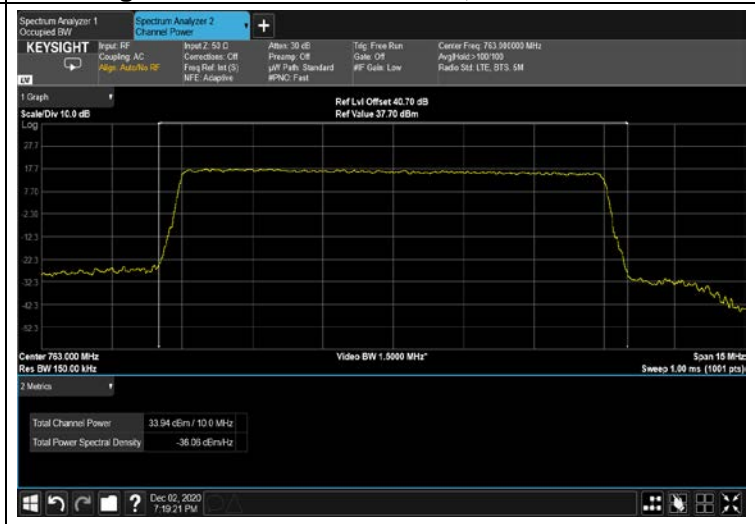




Figure 84: QPSK 15MHz B.W; 735.5MHz – 4G

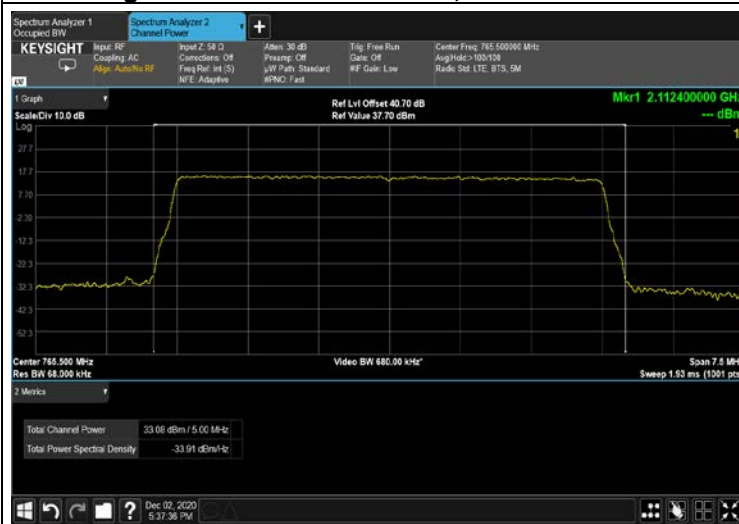

**5.5 Test Equipment Used; RF Output Power**

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
EXA signal Analyzer	Keysight	UXA N9040B	MY56080119	January 31, 2020	January 31, 2022
EXG Vector Signal Generator	Agilent Technologies	N5172B	MY53051952	January 17, 2019	January 17, 2022
40 dB Attenuator	Weinschel Associates	WA 39-40-33	-	November 1, 2020	November 1, 2021
RF Coaxial Cable	Huber-Suner	SLLS210B	-	November 1, 2020	November 1, 2021

**Table 9 Test Equipment Used**



## 6 Band Edge Spectrum - 5G

### 6.1 Test Specification

FCC Part 27, Subpart C, Section 27.53

### 6.2 Test Procedure

(Temperature (20°C)/ Humidity (48%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (40.7 dB).

The spectrum analyzer was set the RBW to proper value

### 6.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (728-768 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding  $-13\text{dBm}$ .

### 6.4 Test Results

JUDGEMENT: Passed

See additional information in Table 10 to Table 13 and Figure 85 to Figure 124.



Modulation	Bandwidth	Sub Carrier	Band Edge Frequency	Reading	Limit
	(MHz)	(kHz)	(MHz)	(dBm)	(dBm)
16QAM	5	15	730.5	-22.947	-13.0
			765.5	-27.271	-13.0
		30	730.5	-27.196	-13.0
			765.5	-36.238	-13.0
	10	15	733.0	-26.932	-13.0
			763.0	-35.183	-13.0
		30	733.0	-27.605	-13.0
			763.0	-33.816	-13.0
15	15	735.5	-27.530	-13.0	
	30	735.5	-27.379	-13.0	

Table 10 Band Edge Spectrum Results 16QAM – 5G

Modulation	Bandwidth	Sub Carrier	Band Edge Frequency	Reading	Limit
	(MHz)	(kHz)	(MHz)	(dBm)	(dBm)
64QAM	5	15	730.5	-28.323	-13.0
			765.5	-27.688	-13.0
		30	730.5	-31.199	-13.0
			765.5	-37.030	-13.0
	10	15	733.0	-27.518	-13.0
			763.0	-34.808	-13.0
		30	733.0	-28.225	-13.0
			763.0	-35.604	-13.0
15	15	735.5	-28.450	-13.0	
	30	735.5	-29.775	-13.0	

Table 11 Band Edge Spectrum Results 64QAM – 5G

Modulation	Bandwidth	Sub Carrier	Band Edge Frequency	Reading	Limit
	(MHz)	(kHz)	(MHz)	(dBm)	(dBm)
256QAM	5	15	730.5	-22.265	-13.0
			765.5	-29.393	-13.0
		30	730.5	-26.679	-13.0
			765.5	-38.530	-13.0
	10	15	733.0	-28.356	-13.0
			763.0	-36.373	-13.0
		30	733.0	-27.363	-13.0
			763.0	-36.147	-13.0
15	15	735.5	-29.905	-13.0	
	30	735.5	-27.455	-13.0	

Table 12 Band Edge Spectrum Results 256QAM – 5G



Modulation	Bandwidth	Sub Carrier	Band Edge Frequency	Reading	Limit
	(MHz)	(kHz)	(MHz)	(dBm)	(dBm)
QPSK	5	15	730.5	-23.573	-13.0
			765.5	-28.014	-13.0
		30	730.5	-25.175	-13.0
			765.5	-37.084	-13.0
	10	15	733.0	-28.019	-13.0
			763.0	-36.609	-13.0
		30	733.0	-27.624	-13.0
			763.0	-33.056	-13.0
	15	735.5	-27.571	-13.0	
		735.5	-28.494	-13.0	

Table 13 Band Edge Spectrum Results QPSK – 5G

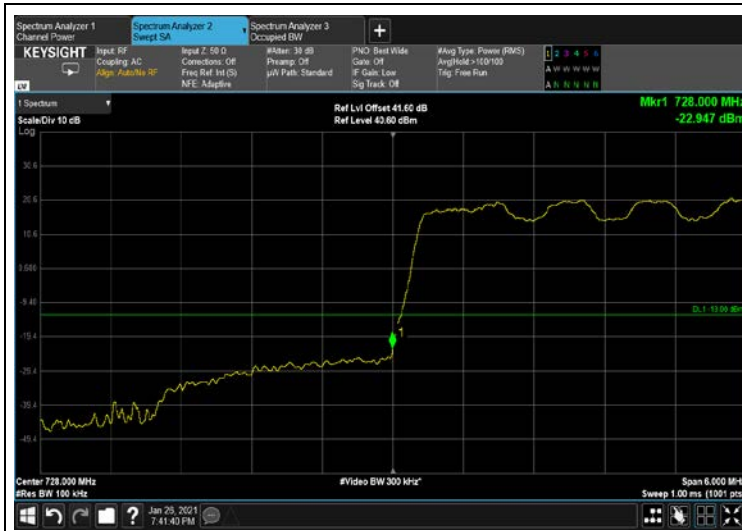


Figure 85: 16QAM 5MHz B.W.; 730.5MHz, 15kHz Lower Edge



Figure 86: 16QAM 5MHz B.W.; 765.5MHz, 15kHz Upper Edge





Figure 87: 16QAM 5MHz B.W.; 730.5MHz, 30kHz  
Lower Edge

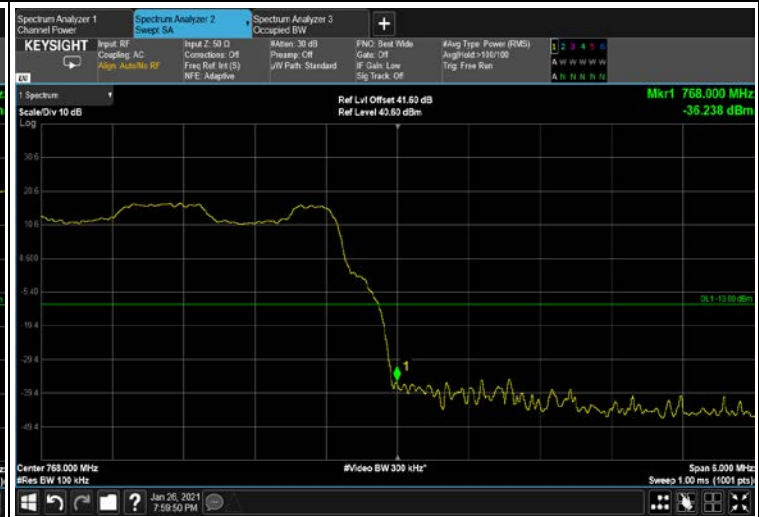


Figure 88: 16QAM 5MHz B.W.; 765.5MHz, 30kHz  
Upper Edge



Figure 89: 16QAM 10MHz B.W.; 733MHz, 15kHz  
Lower Edge

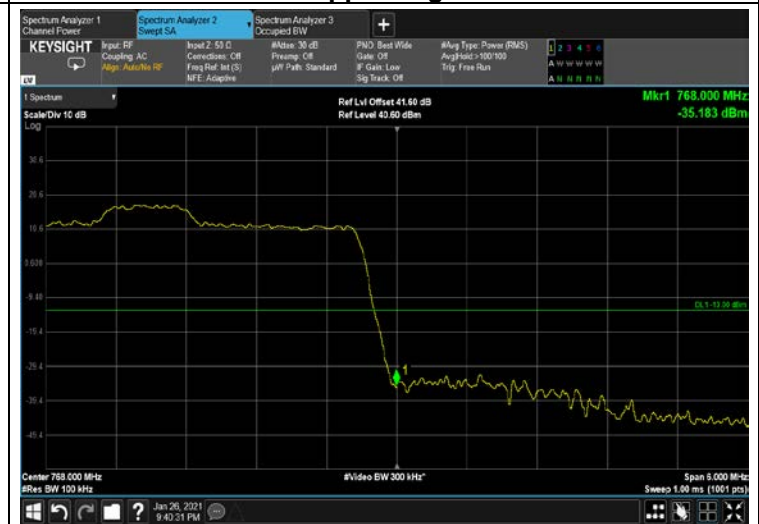


Figure 90: 16QAM 10MHz B.W.; 763MHz, 15kHz  
Upper Edge



Figure 91: 16QAM 10MHz B.W.; 733MHz, 30kHz  
Lower Edge



Figure 92: 16QAM 10MHz B.W.; 763MHz, 30kHz  
Upper Edge

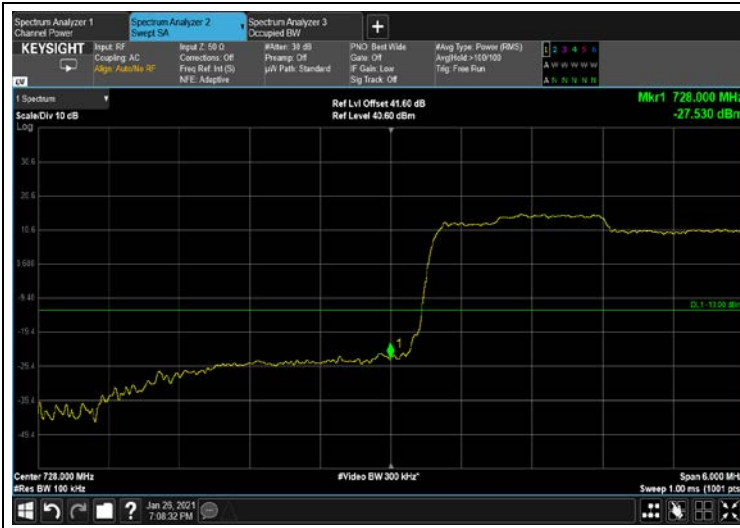


Figure 93: 16QAM 15MHz B.W.; 735.5MHz, 15kHz Lower Edge



Figure 94: 16QAM 15MHz B.W.; 735.5MHz, 30kHz Lower Edge

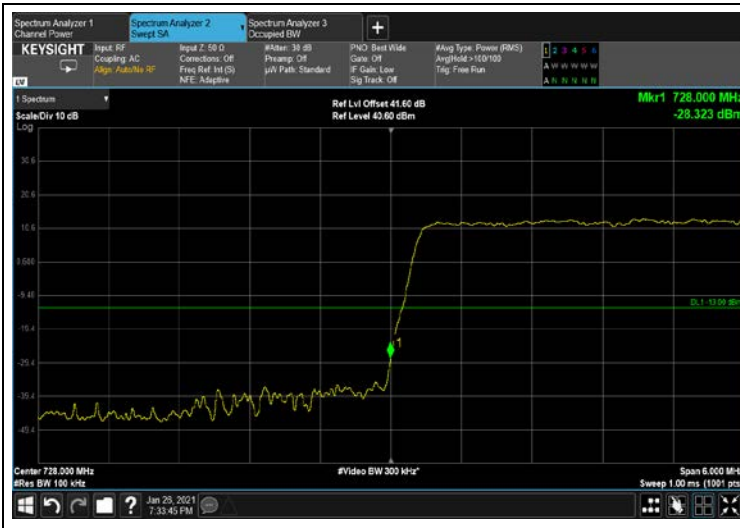


Figure 95: 64QAM 5MHz B.W.; 730.5MHz, 15kHz Lower Edge

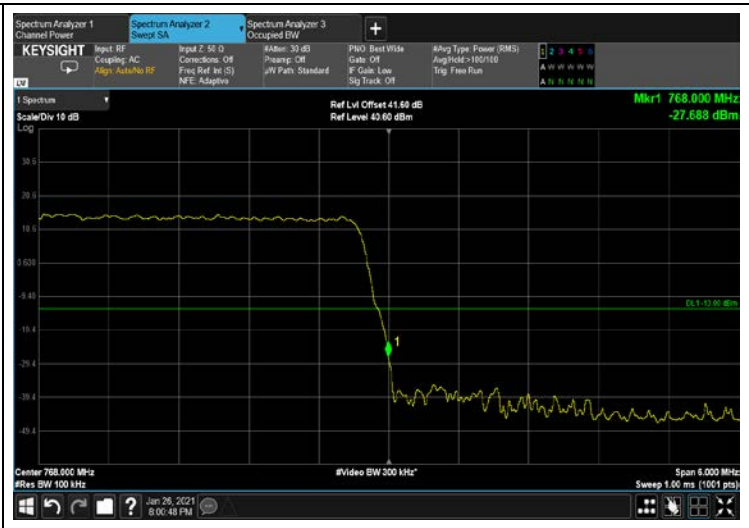


Figure 96: 64QAM 5MHz B.W.; 765.5MHz, 15kHz Upper Edge



Figure 97: 64QAM 5MHz B.W.; 730.5MHz, 30kHz  
Lower Edge

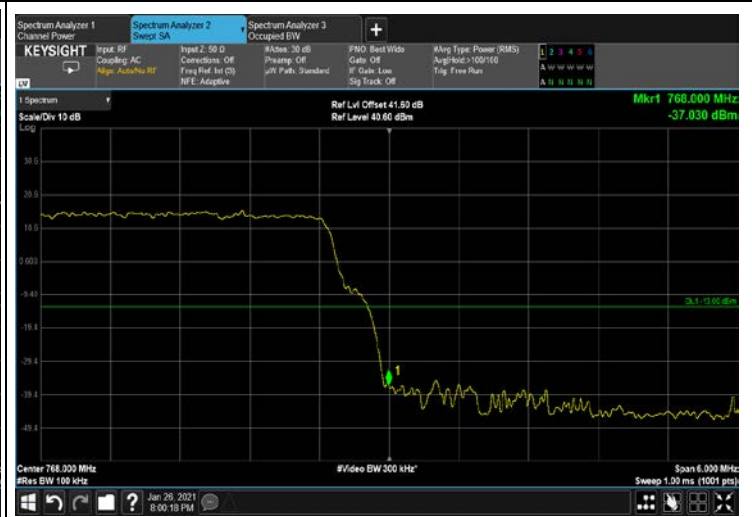


Figure 98: 64QAM 5MHz B.W.; 765.5MHz, 30kHz  
Upper Edge



Figure 99: 64QAM 10MHz B.W.; 733MHz, 15kHz  
Lower Edge

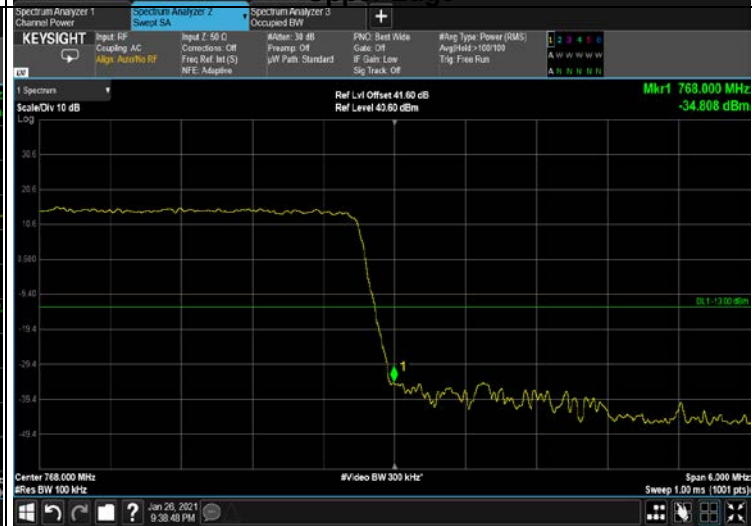


Figure 100: 64QAM 10MHz B.W.; 763MHz, 15kHz  
Upper Edge



Figure 101: 64QAM 10MHz B.W.; 733MHz, 30kHz  
Lower Edge



Figure 102: 64QAM 10MHz B.W.; 763MHz, 30kHz  
Upper Edge

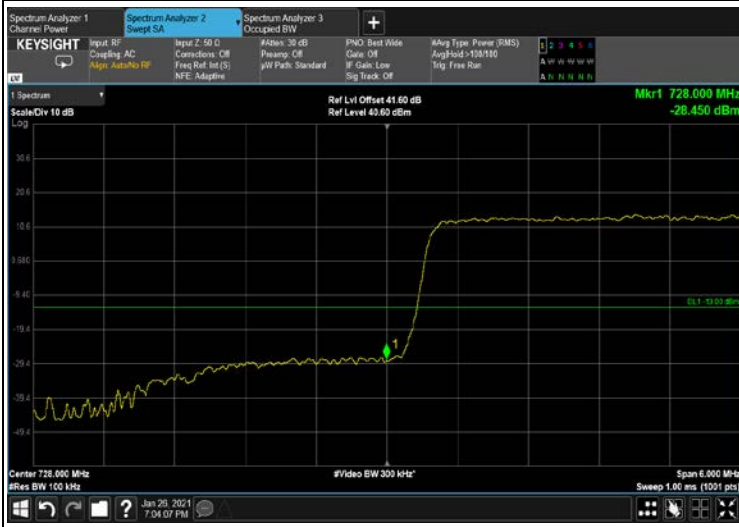


Figure 103: 64QAM 15MHz B.W.; 735.5MHz, 15kHz  
Lower Edge


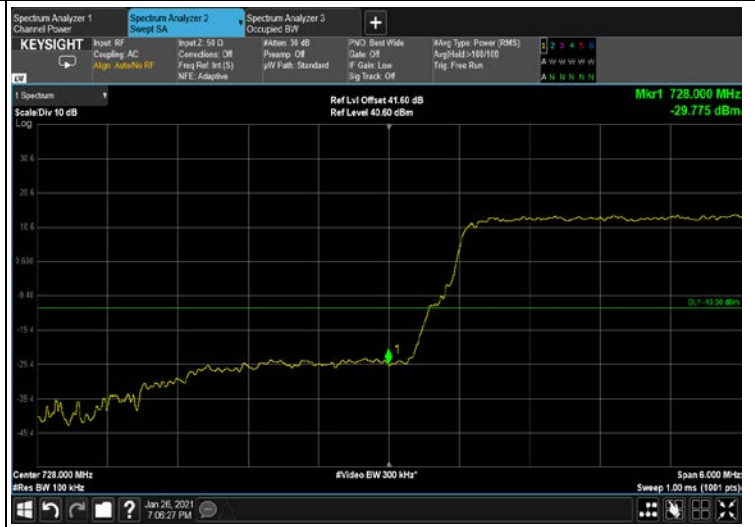


Figure 104: 64QAM 15MHz B.W.; 735.5MHz, 30kHz  
Lower Edge



**Figure 105: 256QAM 5MHz B.W.; 730.5MHz, 15kHz Lower Edge**

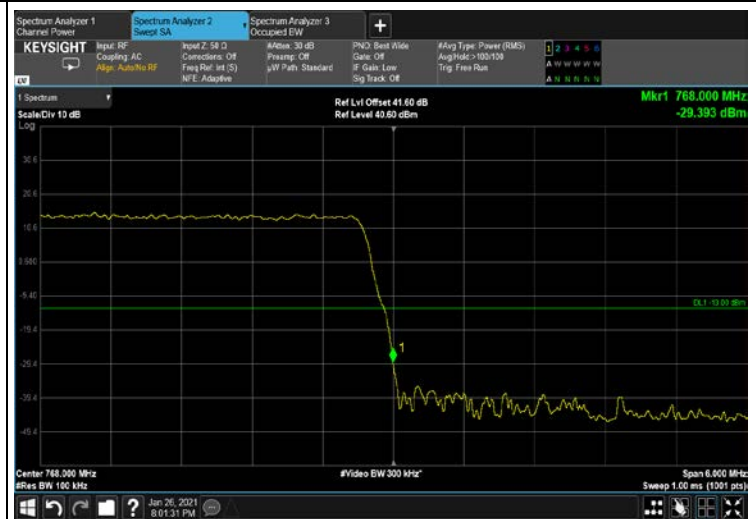


**Figure 106: 256QAM 5MHz B.W.; 765.5MHz, 15kHz Upper Edge**




**Figure 107: 256QAM 5MHz B.W.; 730.5MHz, 30kHz Lower Edge**



**Figure 108: 256QAM 5MHz B.W.; 765.5MHz, 30kHz Upper Edge**

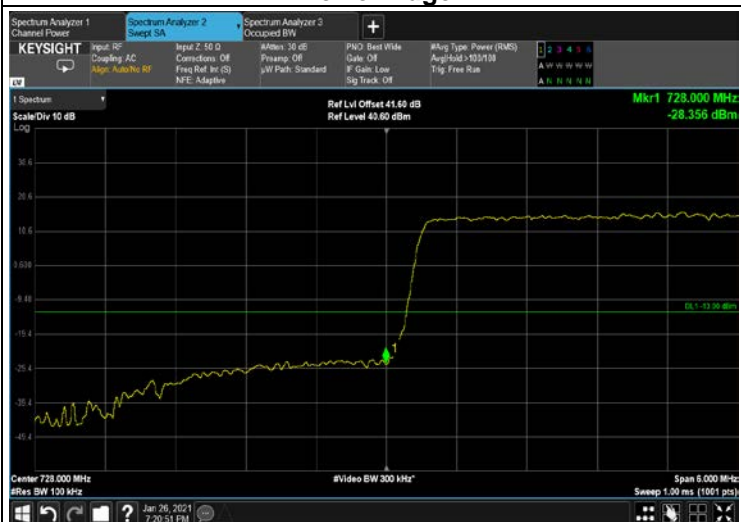


**Figure 109: 256QAM 10MHz B.W.; 733MHz, 15kHz Lower Edge**

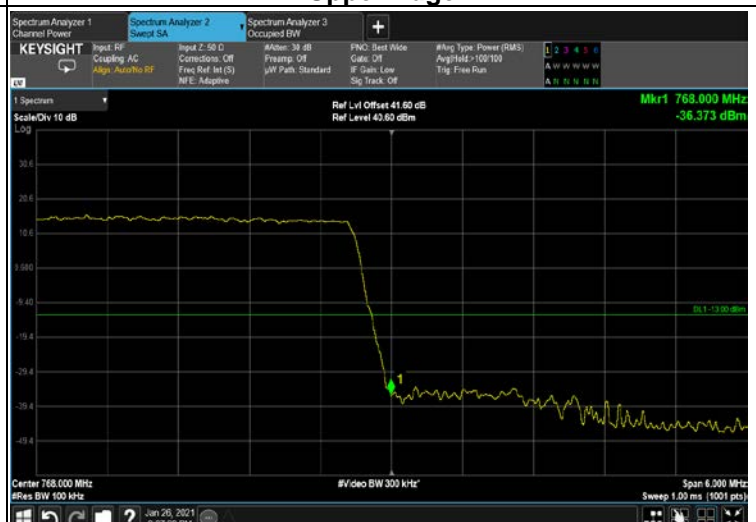


**Figure 110: 256QAM 10MHz B.W.; 765MHz, 15kHz Upper Edge**




**Figure 111: 256QAM 10MHz B.W.; 733MHz, 30kHz Lower Edge**

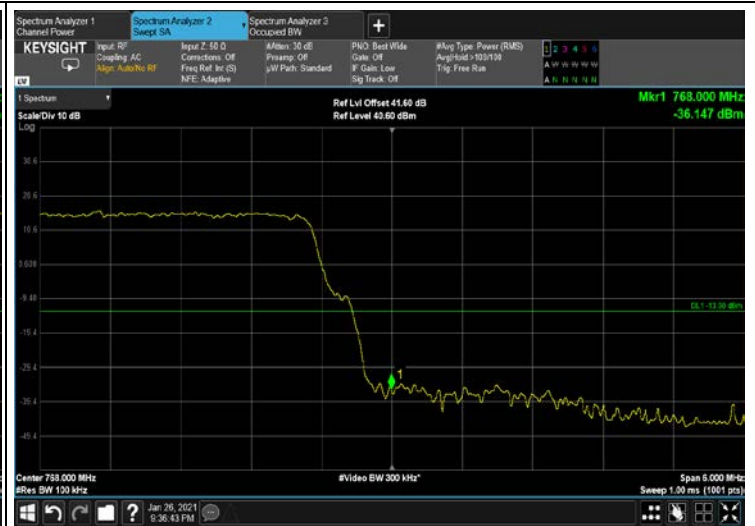


**Figure 112: 256QAM 10MHz B.W.; 763MHz, 30kHz Upper Edge**

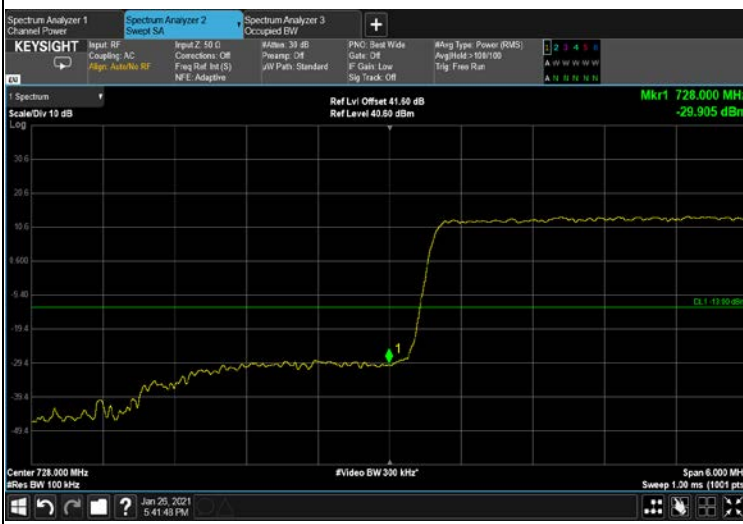


**Figure 113: 256QAM 15MHz B.W.; 735.5MHz, 15kHz Lower Edge**

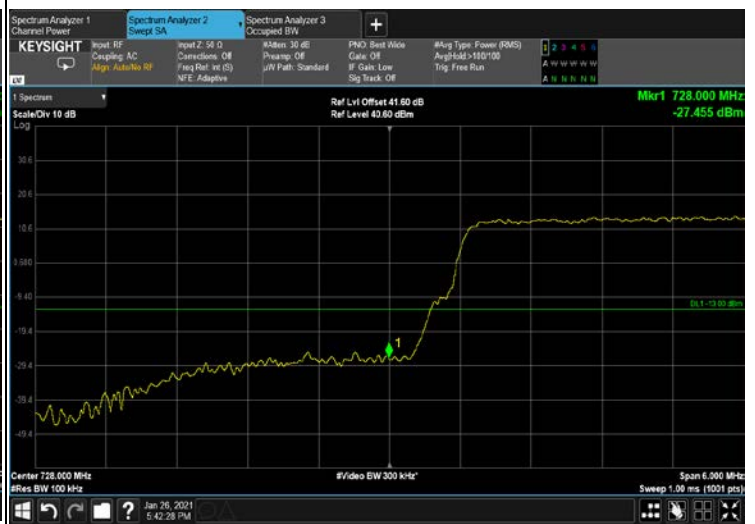

**Figure 114: 256QAM 15MHz B.W.; 735.5MHz, 30kHz Lower Edge**

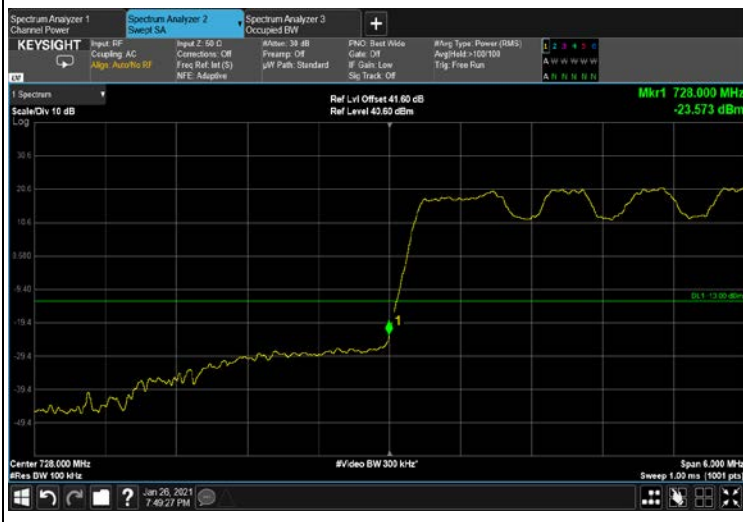

**Figure 115: QPSK 5MHz B.W.; 730.5MHz, 15kHz Lower Edge**

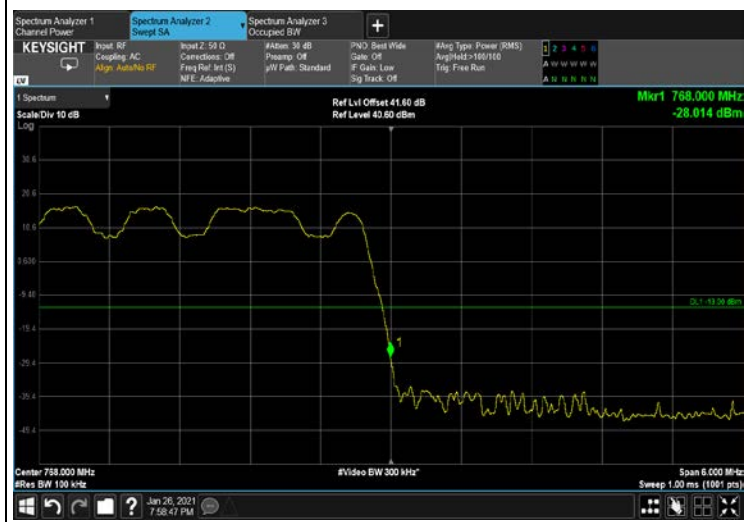

**Figure 116: QPSK 5MHz B.W.; 765.5MHz, 15kHz Upper Edge**





Figure 123: QPSK 15MHz B.W.; 735.5MHz, 15kHz  
Lower Edge



Figure 124: QPSK 15MHz B.W.; 735.5MHz, 30kHz  
Lower Edge

### 6.5 Test Equipment Used; Band Edge Spectrum

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
EXA signal Analyzer	Keysight	UXA N9040B	MY56080119	January 31, 2020	January 31, 2022
EXG Vector Signal Generator	Agilent Technologies	N5172B	MY53051952	January 17, 2019	January 17, 2022
40 dB Attenuator	Weinschel Associates	WA 39-40-33	-	November 1, 2020	November 1, 2021
RF Coaxial Cable	Huber-Suner	SLLS210B	-	November 1, 2020	November 1, 2021

Table 14 Test Equipment Used





## 7 Band Edge Spectrum – 4G

### 7.1 Test Specification

FCC Part 27, Subpart C, Section 27.53

### 7.2 Test Procedure

(Temperature (20°C)/ Humidity (48%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (40.7 dB).

The spectrum analyzer was set the RBW to proper value

### 7.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (728-768 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding  $-13\text{dBm}$ .

### 7.4 Test Results

JUDGEMENT: Passed

See additional information in Table 15 to Table 17 and Figure 125 to Figure 139.

Modulation	Bandwidth	Band Edge Frequency	Reading	Limit
	(MHz)	(MHz)	(dBm)	(dBm)
16QAM	5	730.5	-34.756	-13.0
		765.5	-32.061	-13.0
	10	733.0	-33.434	-13.0
		763.0	-36.224	-13.0
	15	735.5	-31.398	-13.0




**Table 15 Band Edge Spectrum Results 16QAM – 4G**



Modulation	Bandwidth	Band Edge Frequency	Reading	Limit
	(MHz)	(MHz)	(dBm)	(dBm)
64QAM	5	730.5	-33.923	-13.0
		765.5	-31.465	-13.0
	10	733.0	-32.561	-13.0
		763.0	-35.995	-13.0
	15	735.5	-31.802	-13.0

**Table 16 Band Edge Spectrum Results 64QAM – 4G**

Modulation	Bandwidth	Band Edge Frequency	Reading	Limit
	(MHz)	(MHz)	(dBm)	(dBm)
QPSK	5	730.5	-33.430	-13.0
		765.5	-32.223	-13.0
	10	733.0	-32.330	-13.0
		763.0	-35.900	-13.0
	15	735.5	-30.684	-13.0

**Table 17 Band Edge Spectrum Results QPSK – 4G**

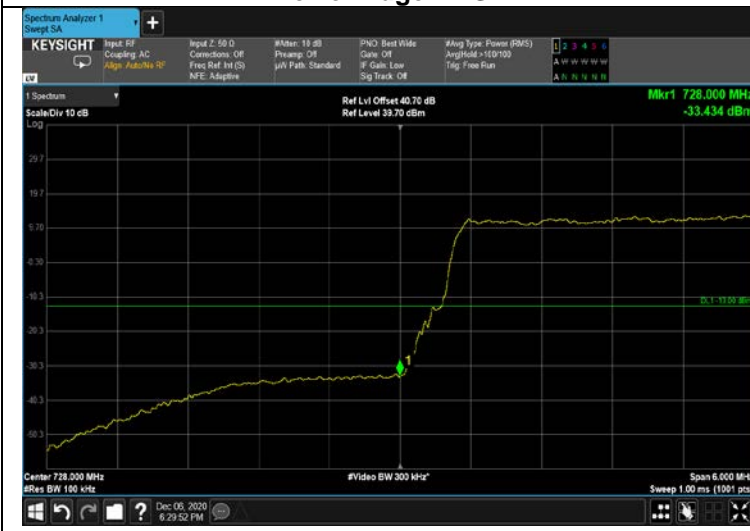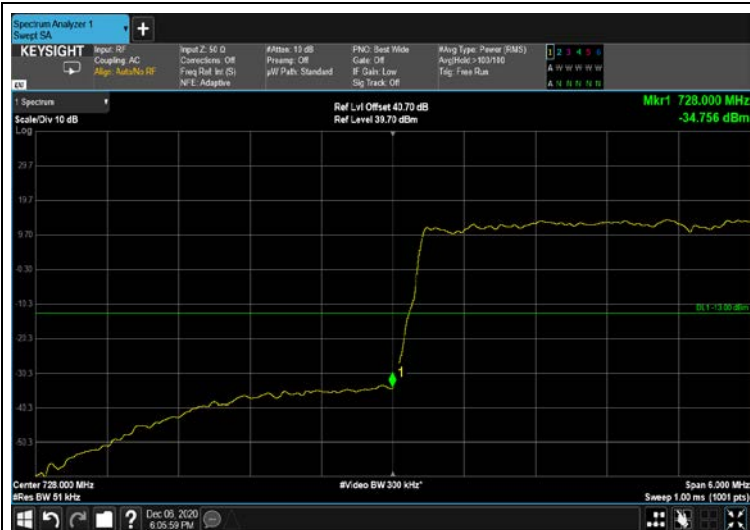

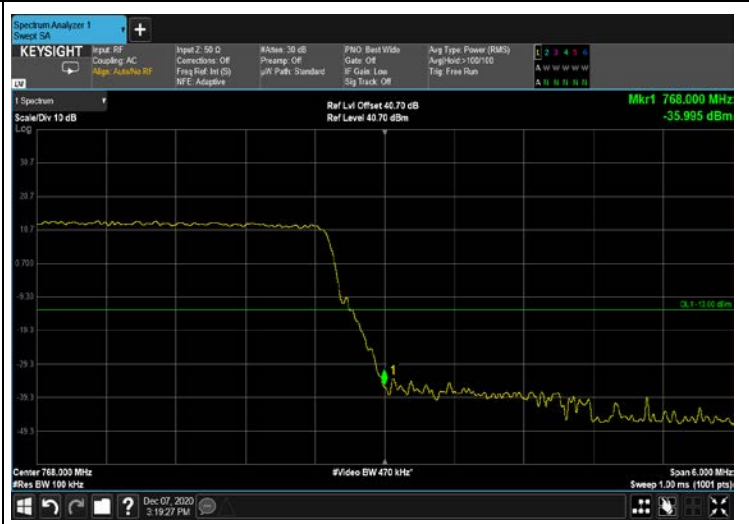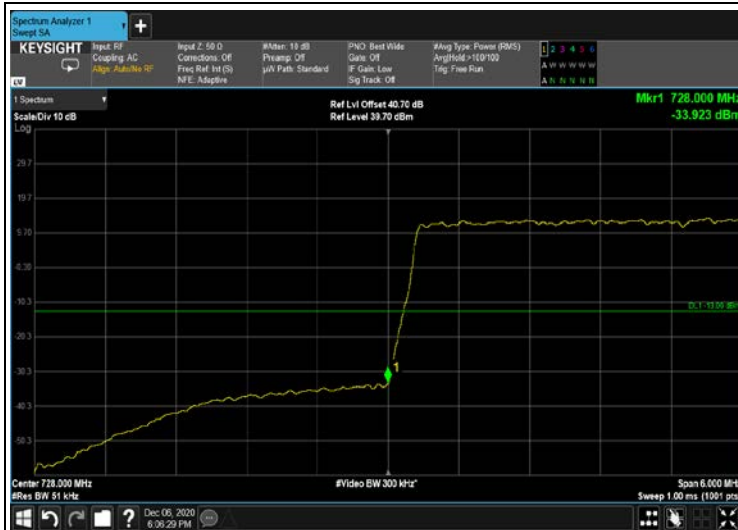

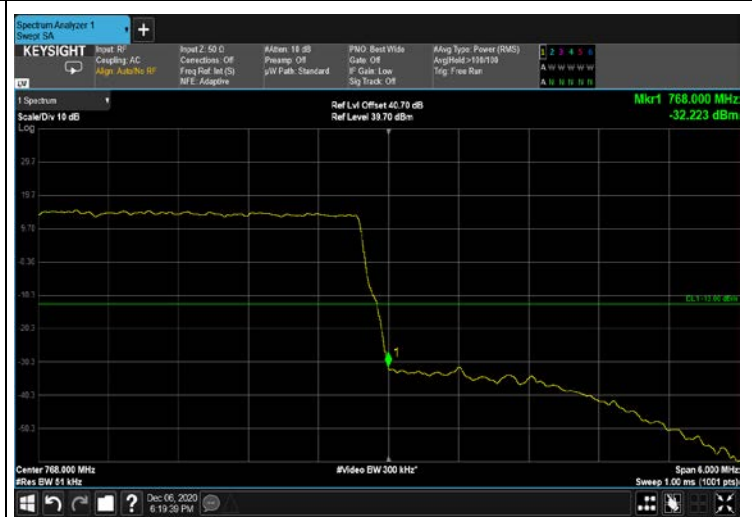
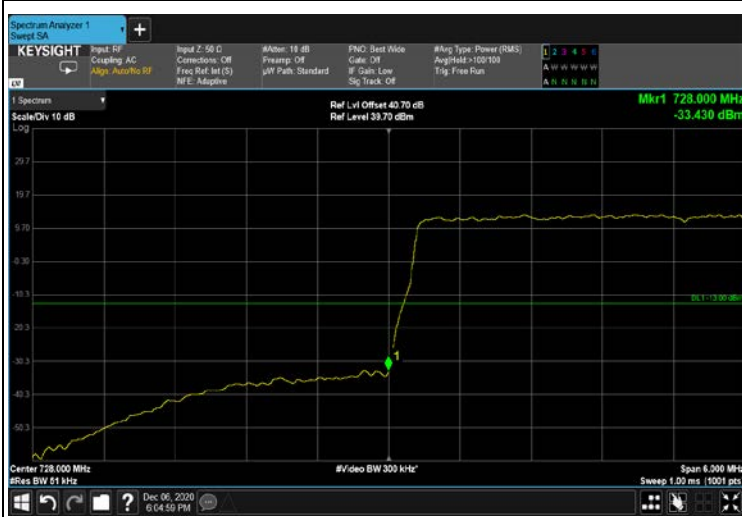


Figure 135: QPSK 5MHz B.W.; 730.5MHz Lower Edge – 4G

Figure 136: QPSK 5MHz B.W.; 765.5MHz Upper Edge – 4G


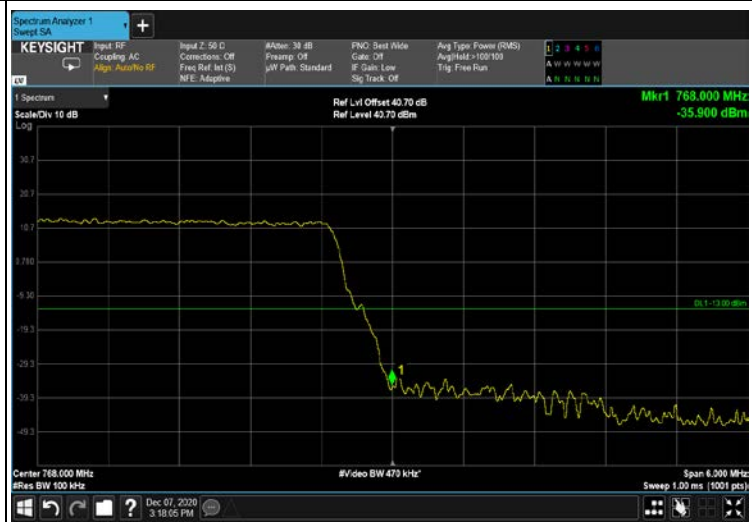


Figure 137: QPSK 10MHz B.W.; 733.0MHz Lower Edge – 4G

Figure 138: QPSK 10MHz B.W.; 763.0MHz Upper Edge – 4G



Figure 139: QPSK 15MHz B.W.; 735.5MHz Lower Edge – 4G

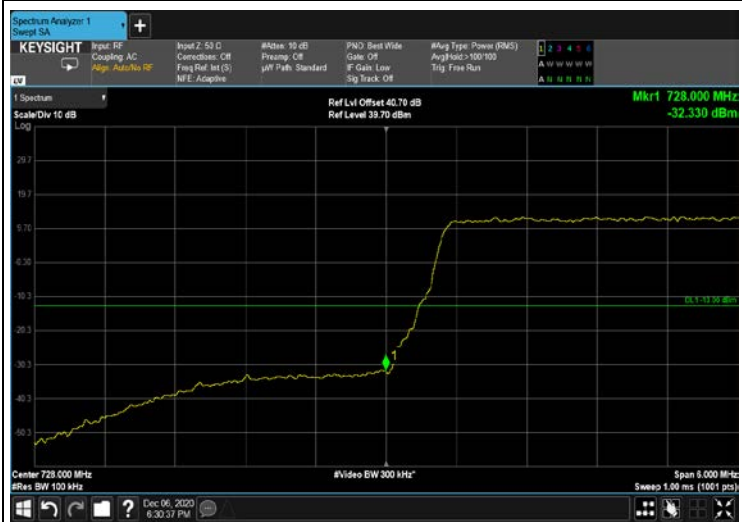

**7.5 Test Equipment Used; Band Edge Spectrum**

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
EXA signal Analyzer	Keysight	UXA N9040B	MY56080119	January 31, 2020	January 31, 2022
EXG Vector Signal Generator	Agilent Technologies	N5172B	MY53051952	January 17, 2019	January 17, 2022
40 dB Attenuator	Weinschel Associates	WA 39-40-33	-	November 1, 2020	November 1, 2021
RF Coaxial Cable	Huber-Suner	SLLS210B	-	November 1, 2020	November 1, 2021

**Table 18 Test Equipment Used**



## 8 Peak to Average Power Ratio - 5G

### 8.1 Test Specification

FCC Part 27, Subpart C, Section 27.50

### 8.2 Test Procedure

(Temperature (22°C)/ Humidity (40%RH))

The method used is detailed in FCC KDB 971168 D03 v01

Measurements was using CCDF function for each modulation.

### 8.3 Test Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

### 8.4 Test Results

JUDGEMENT: Passed

For additional information see Table 19 to Table 22 and Figure 140 to Figure 195.