

**DATE: 30 May 2011**

**I.T.L. (PRODUCT TESTING) LTD.**

**FCC Radio Test Report**

**for**

**Mobile Access Networks**

**Equipment under test:**

**Mobile AccessHX High-Power DAS Remote Unit**

**HX-C85P19A17-AC-A  
(C85=CELL; P19=PCS;A17=AWS)  
(CELL/PCS/AWS)**

Written by: \_\_\_\_\_




D. Shidlow, Documentation

Approved by: \_\_\_\_\_



A. Sharabi, Test Engineer

Approved by: \_\_\_\_\_



I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

## Measurement/Technical Report for Mobile Access Networks

### Mobile AccessHX High-Power DAS Remote Unit

**FCC ID: OJFHXC85P19A17**

This report concerns:

Original Grant: X

Class II change:

Class I change:

Equipment type:

PCS Licensed Transmitter

Limits used:

47CFR Parts 22, 24, 27

Measurement procedure used is ANSI C63.4-2003.

Substitution Method used as in ANSI/TIA-603-C: 2004

Application for Certification

Applicant for this device:

prepared by:

(different from "prepared by")

Ishaishou Raz

Steve Blum

ITL (Product Testing) Ltd.

Mobile Access Networks

Kfar Bin Nun

8391 Old Courthouse Rd., Suite #300

D.N. Shimshon 99780

Vienna, VA. 22182

Israel

U.S.A.

e-mail sraz@itl.co.il

Tel: +1-541-758-2880

Fax: +1-703-848-0260

e-mail: sblum@mobileaccess.com

# TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION-----</b>	<b>5</b>
1.1	Administrative Information.....	5
1.2	List of Accreditations .....	6
1.3	Product Description .....	7
1.4	Test Methodology .....	8
1.5	Test Facility .....	8
1.6	Measurement Uncertainty .....	8
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION-----</b>	<b>9</b>
2.1	Justification.....	9
2.2	EUT Exercise Software .....	9
2.3	Special Accessories .....	9
2.4	Equipment Modifications .....	9
2.5	Configuration of Tested System.....	10
<b>3.</b>	<b>CONDUCTED AND RADIATED MEASUREMENT TEST SET-UPS PHOTO-----</b>	<b>11</b>
<b>4.</b>	<b>PEAK OUTPUT POWER CELL -----</b>	<b>12</b>
4.1	Test Specification .....	12
4.2	Test procedure .....	12
4.3	Results Table .....	17
4.4	Test Equipment Used.....	18
<b>5.</b>	<b>OCCUPIED BANDWIDTH CELL-----</b>	<b>19</b>
5.1	Test Specification .....	19
5.2	Test Procedure.....	19
5.3	Results Table .....	29
5.4	Test Equipment Used.....	30
<b>6.</b>	<b>OUT OF BAND EMISSIONS AT ANTENNA TERMINALS CELL -----</b>	<b>31</b>
6.1	Test Specification .....	31
6.2	Test procedure .....	31
6.3	Results Table .....	58
6.4	Test Equipment Used.....	59
<b>7.</b>	<b>BAND EDGE SPECTRUM CELL -----</b>	<b>60</b>
7.1	Test Specification .....	60
7.2	Test procedure .....	60
7.3	Results Table .....	63
7.4	Test Equipment Used.....	64
<b>8.</b>	<b>OUT OF BAND EMISSIONS (RADIATED) CELL -----</b>	<b>65</b>
8.1	Test Specification .....	65
8.2	Test Procedure.....	65
8.3	Results Table .....	66
8.4	Test Instrumentation Used, Radiated Measurements CELL .....	67
<b>9.</b>	<b>PEAK OUTPUT POWER PCS-----</b>	<b>68</b>
9.1	Test Specification .....	68
9.2	Test procedure .....	68
9.3	Results Table .....	73
9.4	Test Equipment Used.....	74
<b>10.</b>	<b>OCCUPIED BANDWIDTH PCS -----</b>	<b>75</b>
10.1	Test Specification .....	75
10.2	Test Procedure.....	75
10.3	Results Table .....	85
10.4	Test Equipment Used.....	86

<b>11.</b>	<b>OUT OF BAND EMISSIONS AT ANTENNA TERMINALS PCS</b>	<b>87</b>
11.1	Test Specification	87
11.2	Test procedure	87
11.3	Results Table	114
11.4	Test Equipment Used	115
<b>12.</b>	<b>BAND EDGE SPECTRUM PCS</b>	<b>116</b>
12.1	Test Specification	116
12.2	Test procedure	116
12.3	Results Table	120
12.4	Test Equipment Used	121
<b>13.</b>	<b>OUT OF BAND EMISSIONS (RADIATED) PCS</b>	<b>122</b>
13.1	Test Specification	122
13.2	Test Procedure	122
13.3	Results Table	123
13.4	Test Instrumentation Used, Radiated Measurements	124
<b>14.</b>	<b>RF POWER OUTPUT AWS</b>	<b>125</b>
<b>15.</b>	<b>OCCUPIED BANDWIDTH AWS</b>	<b>131</b>
15.1	Test Specification	131
15.2	Test Procedure	131
15.3	Results	138
15.4	Test Equipment Used	139
<b>16.</b>	<b>SPURIOUS EMISSIONS AT ANTENNA TERMINALS AWS</b>	<b>140</b>
16.1	Test Specification	140
16.2	Test procedure	140
16.3	Results	158
16.4	Test Equipment Used	159
<b>17.</b>	<b>BAND EDGE SPECTRUM AWS</b>	<b>160</b>
17.1	Test Specification	160
17.2	Test procedure	160
17.3	Results	162
17.4	Test Equipment Used	163
<b>18.</b>	<b>SPURIOUS RADIATED EMISSION AWS</b>	<b>164</b>
18.1	Test Specification	164
18.2	Test Procedure	164
18.4	Test Instrumentation Used, Radiated Measurements AWS	166
<b>19.</b>	<b>INTERMODULATION CONDUCTED</b>	<b>167</b>
19.1	Test procedure	167
19.2	Test Equipment Used	171
<b>20.</b>	<b>INTERMODULATION RADIATED</b>	<b>172</b>
20.1	Test procedure	172
20.2	Test Results	172
20.3	Test Instrumentation Used, Radiated Measurements Intermodulation	174
<b>21.</b>	<b>APPENDIX A - CORRECTION FACTORS</b>	<b>175</b>
21.1	Correction factors for CABLE	175
21.2	Correction factors for CABLE	176
21.3	Correction factors for CABLE	177
21.4	Correction factors for LOG PERIODIC ANTENNA	178
21.5	Correction factors for LOG PERIODIC ANTENNA	179
21.6	Correction factors for BICONICAL ANTENNA	180
21.7	Correction factors for Double-Ridged Waveguide Horn	181
21.8	Correction factors for ACTIVE LOOP ANTENNA	182

# 1. General Information

## 1.1 Administrative Information

Manufacturer:	Mobile Access Networks
Manufacturer's Address:	8391 Old Courthouse Rd. Suite #300 Vienna, VA 22182 U.S.A. Tel: +1-541-758-2880 Fax: +1-703-848-0260
Manufacturer's Representative:	Steve Blum
Equipment Under Test (E.U.T):	Mobile AccessHX High-Power DAS Remote Unit
Equipment Model No.:	HX-C85P19A17-AC-A (C85=CELL; P19=PCS;A17=AWS)
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	25.05.11
Start of Test:	25.05.11
End of Test:	29.05.11
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Parts 22, 24, 27

## **1.2 List of Accreditations**

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

### 1.3 **Product Description**

The MobileAccess**HX** is a high power, Distributed Antenna System (DAS) solution for indoors or outdoors (model dependent). It is a fiber-fed, compact and scalable multi-service platform designed to provide complete RF open space coverage for large scale public venues, such as campuses, stadiums, convention centers, hotels, airports, and train stations.

HX supports multiple wireless technologies and operator services over a single broadband infrastructure. Using low loss fiber optic cabling remote units can cover distances of up to 2Km from the BTS signal sources at the head-end.

The solution can be deployed in new sites or alongside existing MobileAccess**1000** (MA1000) and/or MobileAccess**2000** (MA2000) systems, sharing a common head-end and element management system (EMS).

Alongside MA1000/MA2000 deployments, MobileAccess**HX** provides a comprehensive indoor and outdoor coverage solution for varying site requirements, supporting everything from high-rise buildings and campus topologies to stadiums and airports.

#### **Features & Benefits:**

**Multi-Service Platform:** Accommodates virtually any mix of wireless voice and data services, eliminating the need for separate overlay networks. Supported services and technologies include: GSM, UMTS, HSPA, LTE, EDGE, EV-DO, AWS, and more.

**Cost-Effective High Power:** Optimizes and reduces the number of antennas required to cover open areas by offering 33dBm (2W) composite power per frequency band.

**Available in both Indoor and outdoor models** – outdoor models are ingress protected whereas indoor models are field-upgradable. The combination of both provides maximum flexibility to match any deployment.

**Pay-As-You-Grow Design:** Can initially be deployed in dual-band, where tri-band or quad-band configurations can be enabled as needed.

**Carrier-Grade Operation:** Advanced signal handling and management ensures carrier-grade performance in multi-operator deployments.

**Design and Deployment Flexibility:**

Remote unit supports both SM and MM fiber connections.

Supports two to four wireless frequencies.

**Compatible with Existing MA1000/MA2000 Deployment:** Shares a common head-end and EMS in a single deployment.

## **System Architecture**

MobileAccessHX provides a complete solution consisting of HX remote units at the remote locations and head-end elements that are shared with any existing MA1000/MA2000 system that is either installed or being installed at the site. In the downlink, at the head-end, the BTS or BDA signal is conditioned by the RIU, ensuring a constant RF level. The conditioned signal is then converted by the Base Unit to an optical signal for transport over single or multi-mode fiber to the HX remote units, which are located at the remote locations. In the uplink, the process is reversed. The **SC-450 Controller** enables local and remote management, as well as controls all MA1000, MA2000, and HX elements from a single, centralized location.

The **MobileAccessHX Remote Unit** (indoor and outdoor models) consists of a compact enclosure that houses the RF module, power elements, and the required interfaces. The RF module supports up to four services, where two services can be enabled initially and additional services can be enabled as needed. All mobile services are combined and distributed through a single antenna port over antennas installed at the remote locations.

### **1.4 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### **1.5 Test Facility**

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

### **1.6 Measurement Uncertainty**

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)  
for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB



## 2. System Test Configuration

### 2.1 *Justification*

The test setup was configured to closely resemble the standard installation. The EUT consists of the HX (High Power Remote Module) which is connected with the head-end DAS equipment using fiber optic cable.

The RF source signals (CELL, PCS, and AWS) are represented in the setup by appropriate signal generators.

An “Exercise” SW on the computer was used to enable / disable transmission of the EUT, while the EUT output was connected to the spectrum analyzer.

The E.U.T. is available powered from AC or DC

To select the worst case host to be fully tested, an exploratory radiated emission test was performed inside the shielded room.

The units were placed on a 0.8 meter high wooden table, 1meter from the tests antenna, which was 1 m high.

The results of the exploratory radiated emission tests are shown in the table below.

<b>Frequency (MHz)</b>	<b>AC Configuration (dB<math>\mu</math>V/m)</b>	<b>DC Configuration (dB<math>\mu</math>V/m)</b>
3920.00	40.0	39.5
4270.00	53.5	51.5
5880.00	34.5	34.5

Based on the above exploratory radiated emission test, the AC powered configuration was selected as the “worst case” host.

### 2.2 *EUT Exercise Software*

The Element Management System EngGUI ver. 1.00 build 10 used for commands delivery.

These commands are used to enable / disable of EUT transmission.  
EUT Embedded SW version 01.00 build 14

### 2.3 *Special Accessories*

No special accessories were needed in order to achieve compliance.

### 2.4 *Equipment Modifications*

No modifications were needed in order to achieve compliance.

## 2.5 Configuration of Tested System

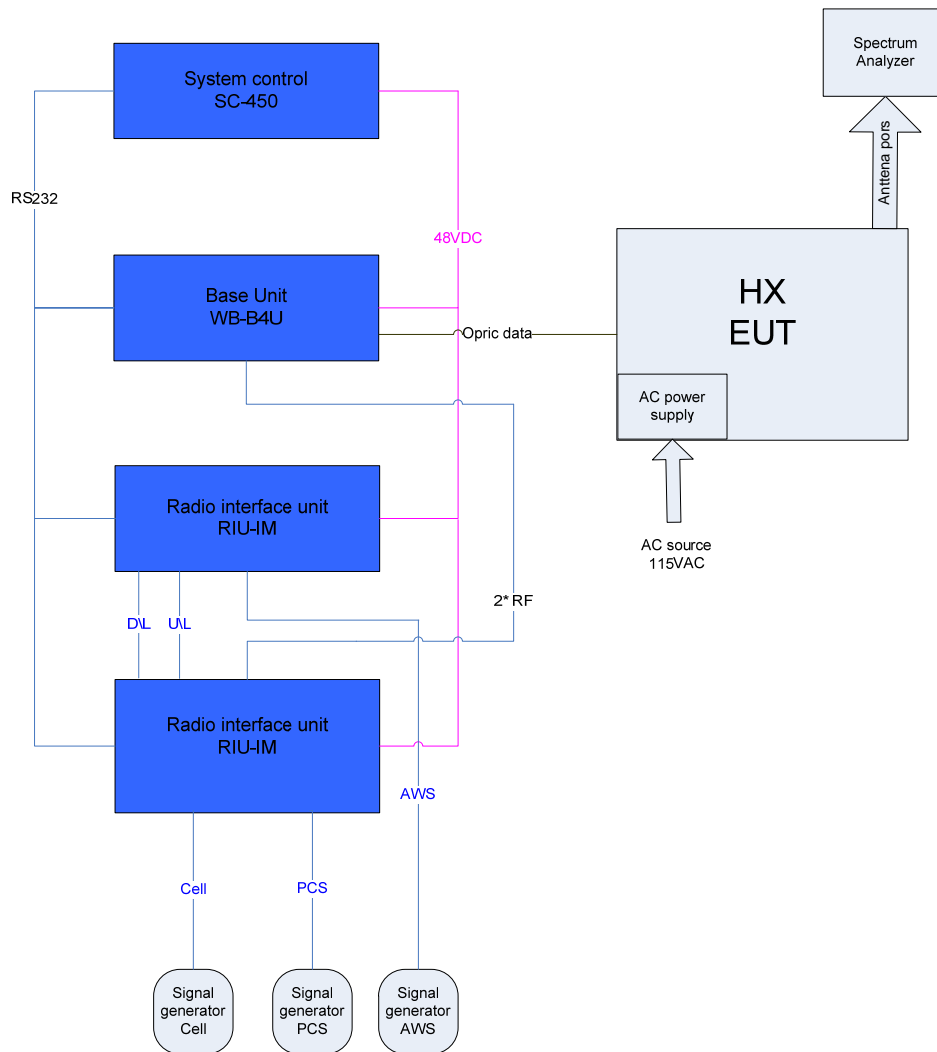


Figure 1. Tests Set-up

### 3. Conducted and Radiated Measurement Test Set-ups Photo

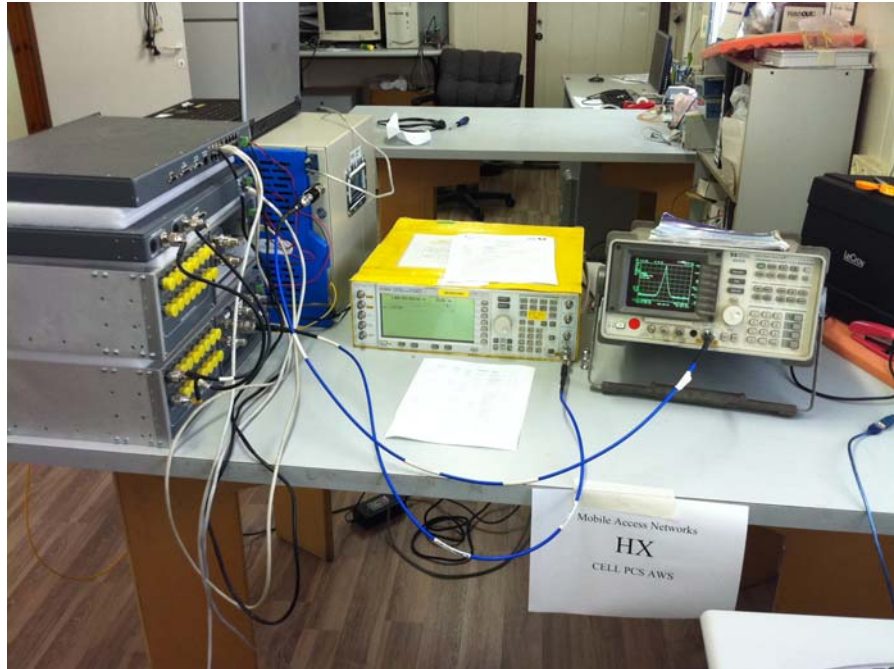


Figure 2. Conducted Emission From Antenna Ports Tests



Figure 3. Radiated Emission Test

## 4. Peak Output Power CELL

### 4.1 Test Specification

FCC Part 22.913

### 4.2 Test procedure

Peak Power Output must not exceed 500 Watts (57dBm).

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (40 dB) and an appropriate coaxial cable (1dB). The E.U.T. RF output was modulated. Special attention was taken to prevent Spectrum Analyzer RF input overload. The Spectrum Analyzer was set to 1.0 MHz RBW. The output power level was measured at 870.20, 881.0, and 892.80 MHz.

CDMA:

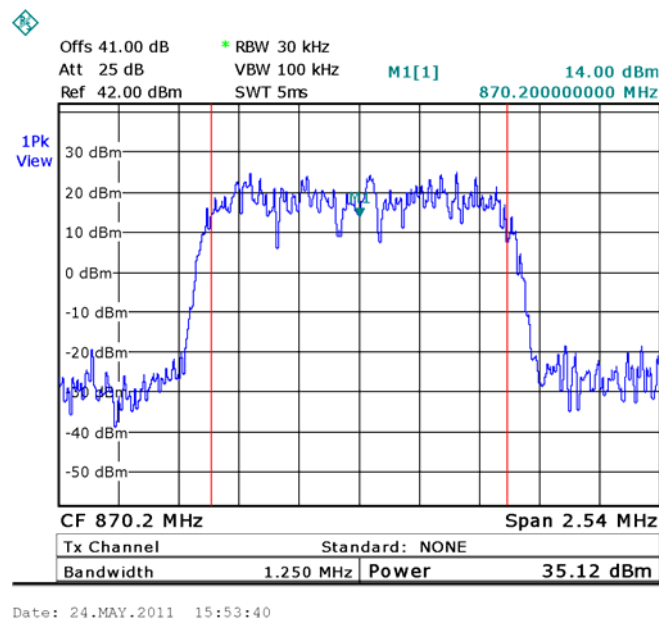


Figure 4.— 870.20 MHz

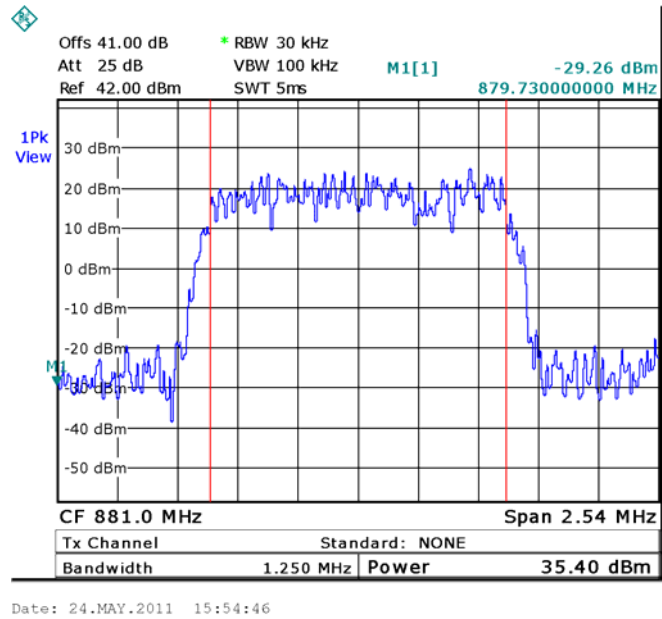


Figure 5.— 881.00 MHz

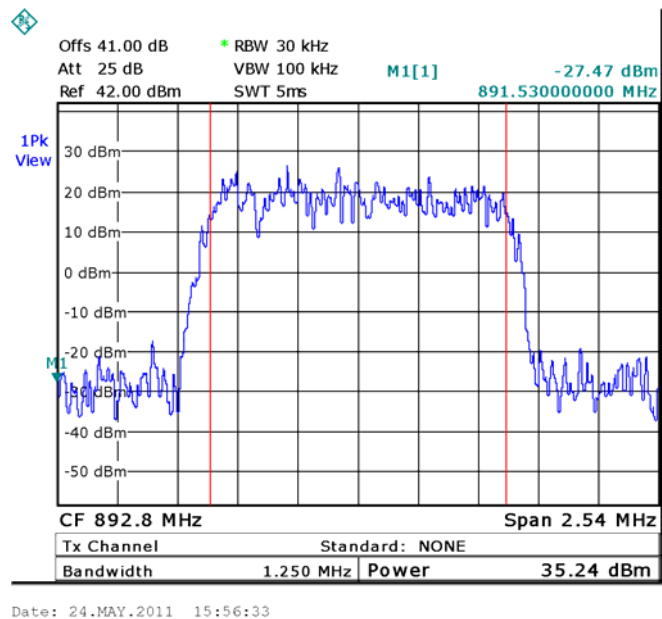


Figure 6.— 892.80 MHz

GSM:

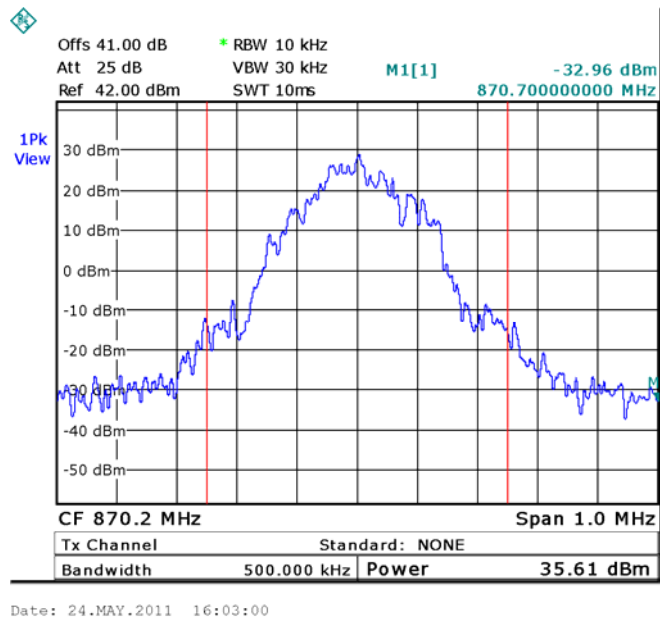


Figure 7.— 870.20 MHz

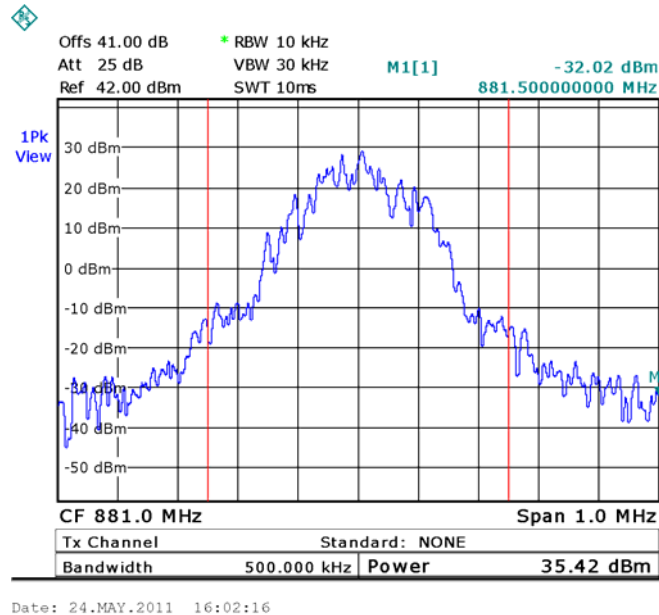


Figure 8.— 881.00 MHz

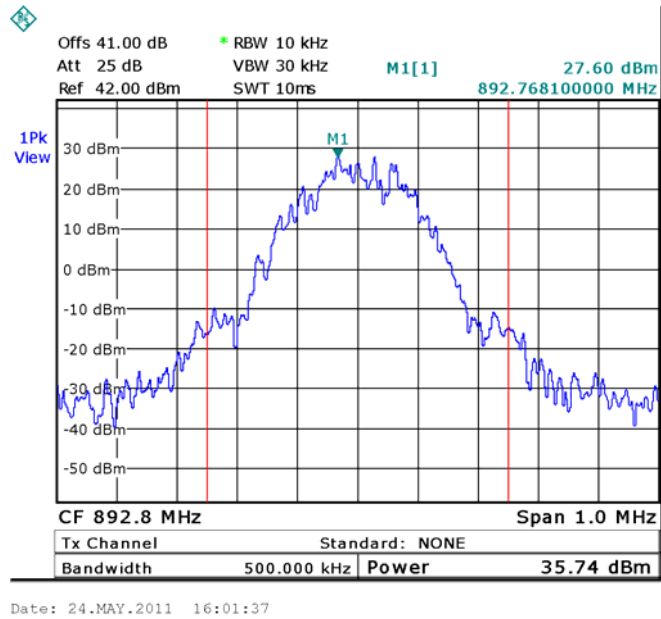


Figure 9.— 892.80 MHz

W-CDMA:

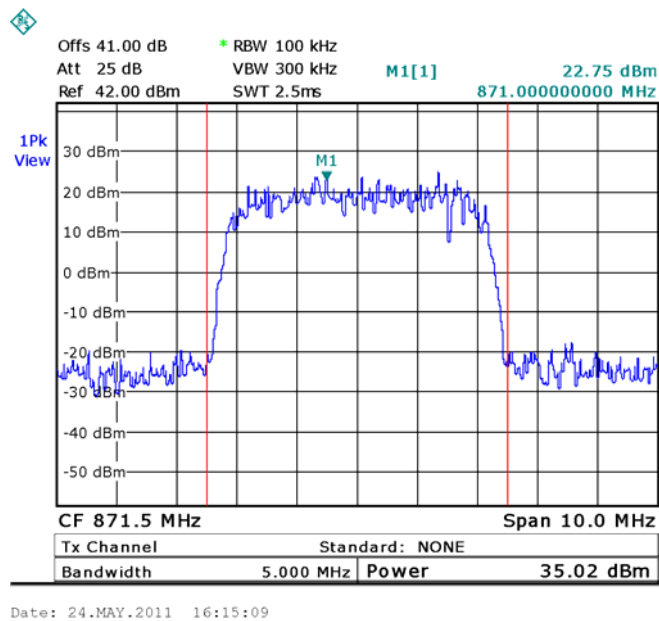


Figure 10.— 871.50 MHz

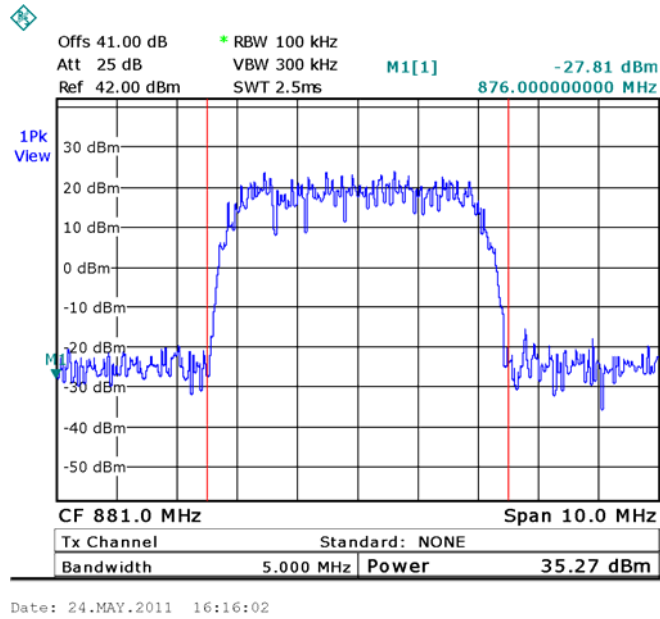


Figure 11.— 881.00 MHz

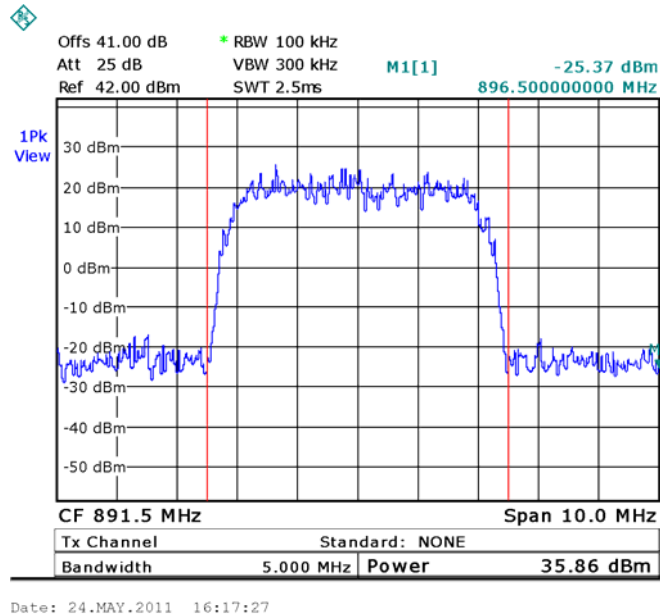


Figure 12.— 891.50 MHz



### 4.3 Results Table

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 22 Section 913, FCC Part 2, Section 1046

Modulation	Operation Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
CDMA	870.20	35.12	57.0	-21.88
	881.00	35.40	57.0	-21.60
	892.80	35.24	57.0	-21.76
GSM	870.20	35.61	57.0	-21.39
	881.00	35.42	57.0	-21.58
	892.80	35.74	57.0	-21.26
W-CDMA	871.50	35.02	57.0	-21.98
	881.50	35.27	57.0	-21.73
	891.50	35.86	57.0	-21.14

**Figure 13 Peak Output Power CELL**

JUDGEMENT: Passed by 21.14 dB

TEST PERSONNEL:

Tester Signature: \_\_\_\_\_

Date: 31.05.11

Typed/Printed Name: A. Sharabi

#### 4.4 Test Equipment Used.

##### Peak Output Power CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 14 Test Equipment Used**

## 5. Occupied Bandwidth CELL

### 5.1 Test Specification

FCC Part 2, Section 1049

### 5.2 Test Procedure

The E.U.T. was set to the applicable test frequency with modulation. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (at the output test) and an appropriate coaxial cable. The spectrum analyzer was set to 100 kHz resolution B.W.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limit, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

The occupied bandwidth of the E.U.T. at the points of 20 dB below maximum peak power was measured and recorded.

Occupied bandwidth measured was repeated in the input terminal of the E.U.T.

CDMA

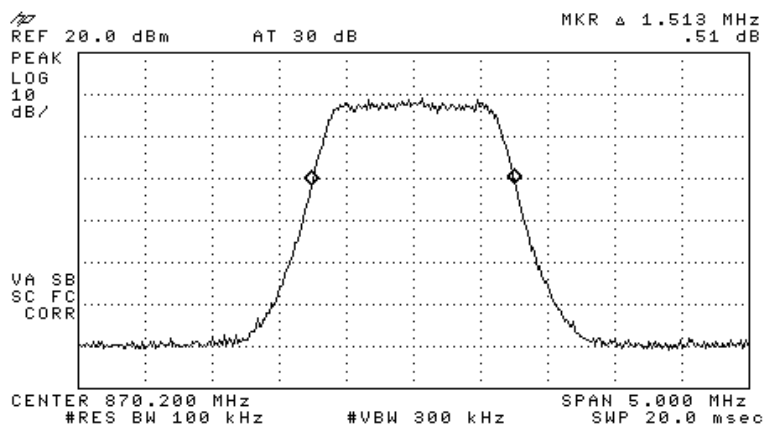


Figure 15.— Input 870.20

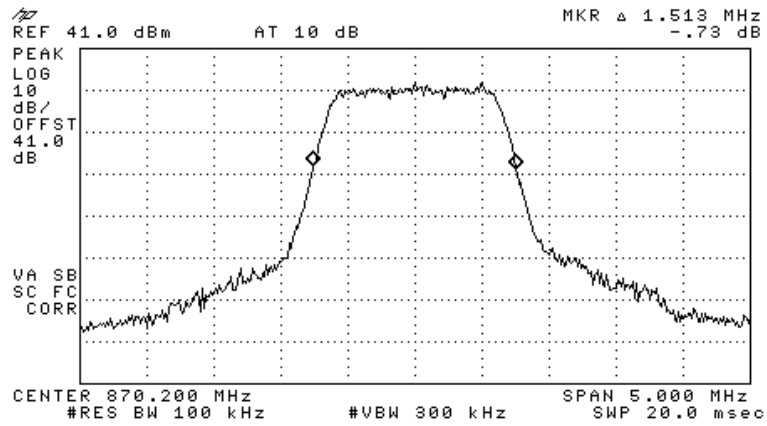


Figure 16.— Output 870.20

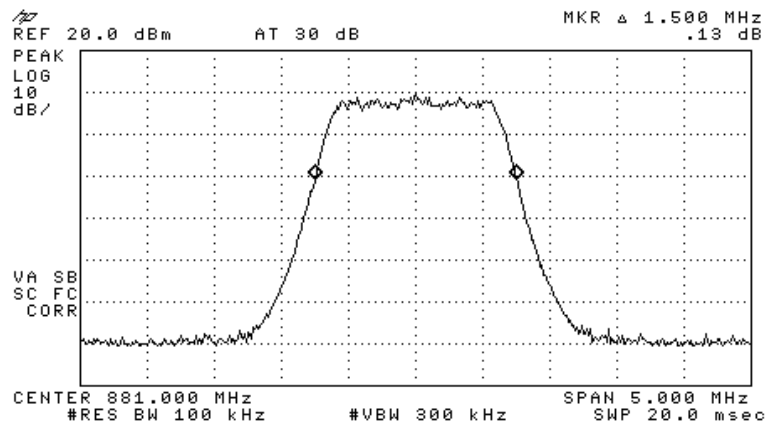


Figure 17.— Input 881.0 MHz.

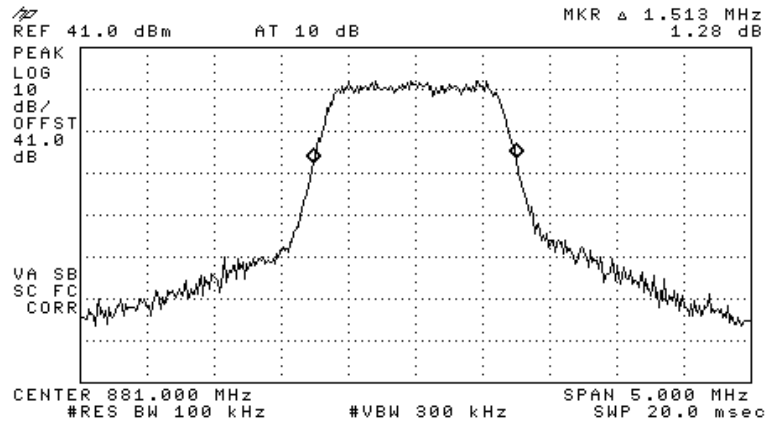


Figure 18.—Output 881.0Hz.

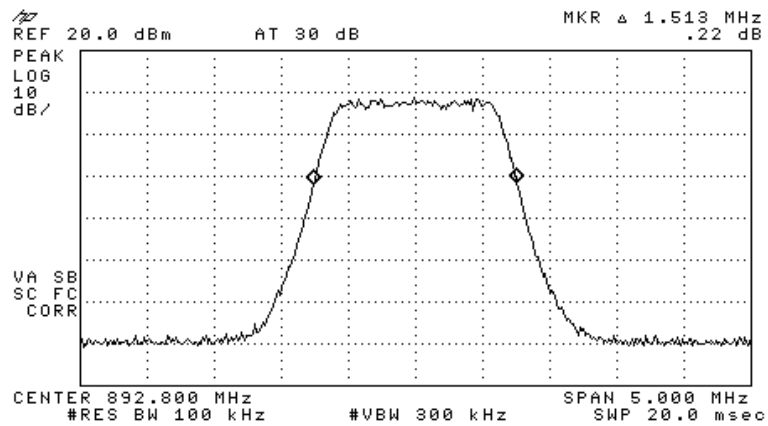


Figure 19.— Input 892.80 MHz.

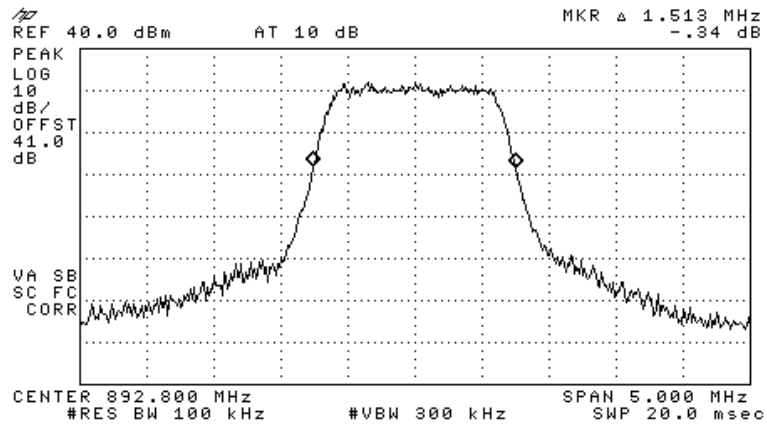


Figure 20.— Output 892.80 MHz.

GSM:

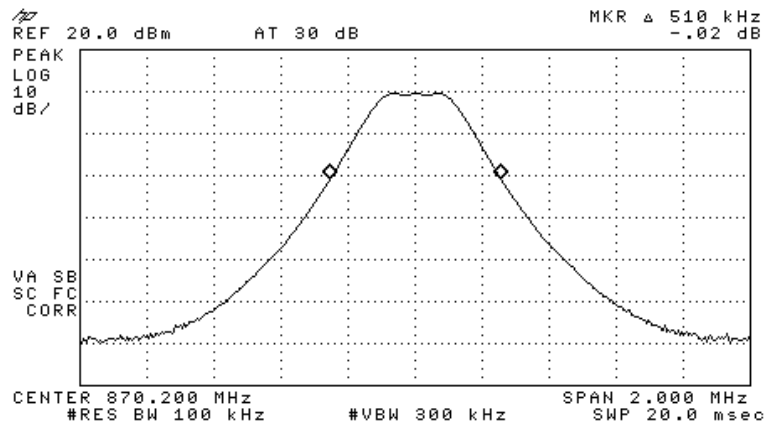


Figure 21.— Input 870.20

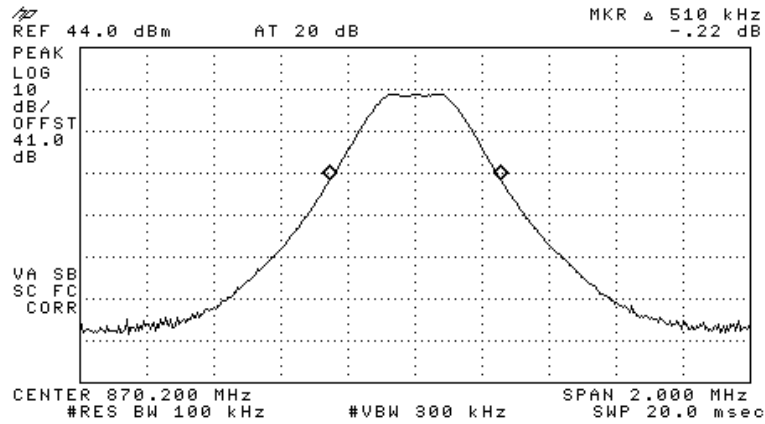


Figure 22.— Output 870.20

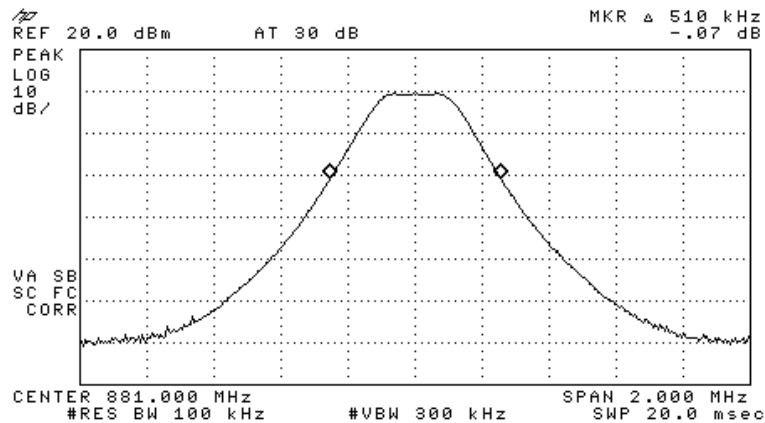


Figure 23.— Input 881.0 MHz.

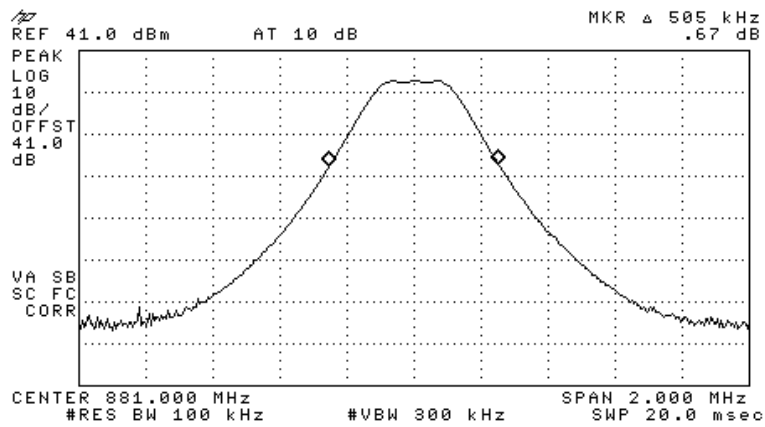


Figure 24.—Output 881.0Hz.

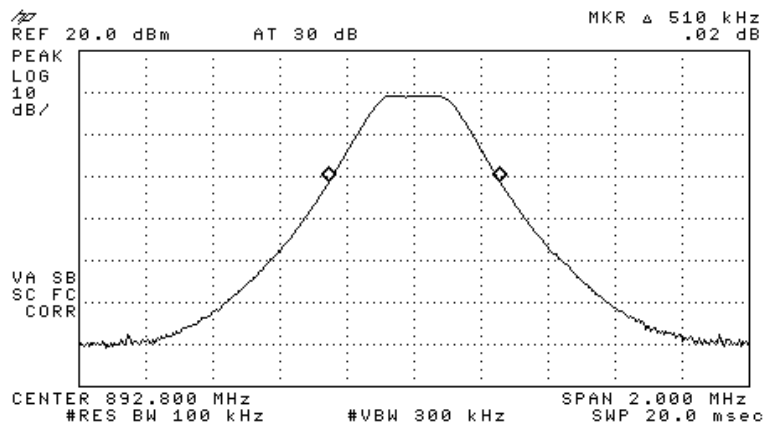


Figure 25.—Input 892.8 MHz.



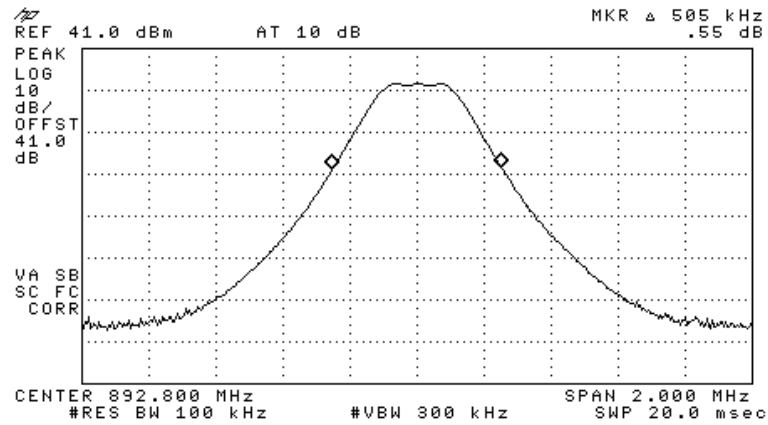


Figure 26.— Output 892.8 MHz.

W-CDMA:

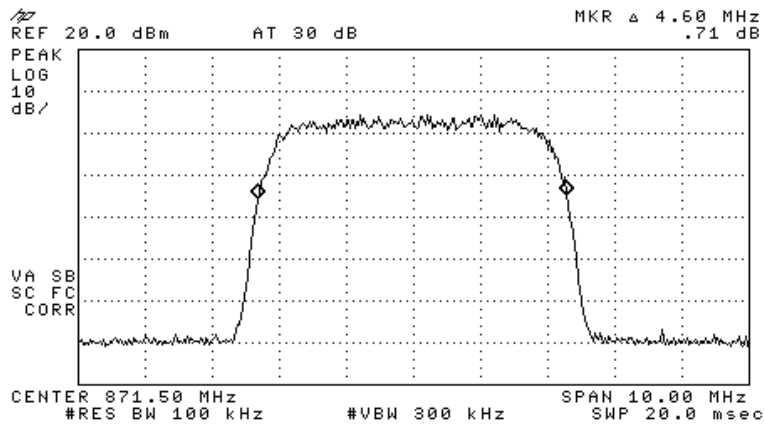
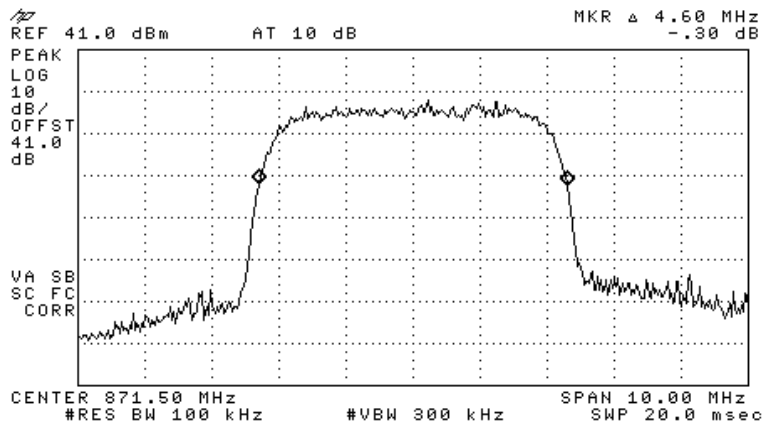
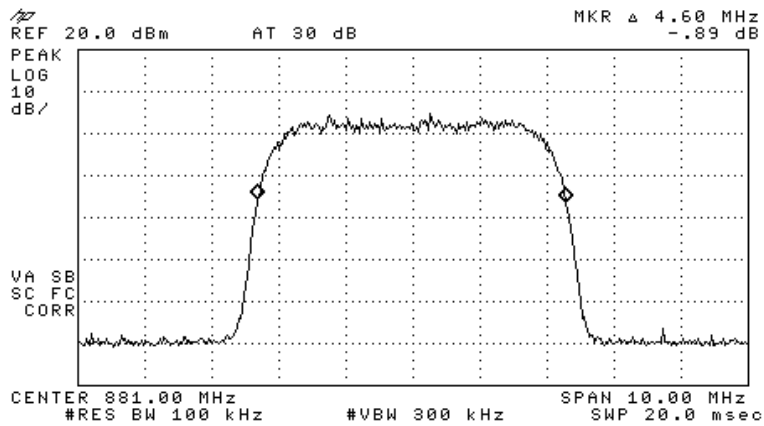


Figure 27.— Input 871.50



**Figure 28.— Output 871.50**



**Figure 29.— Input 881.0 MHz.**

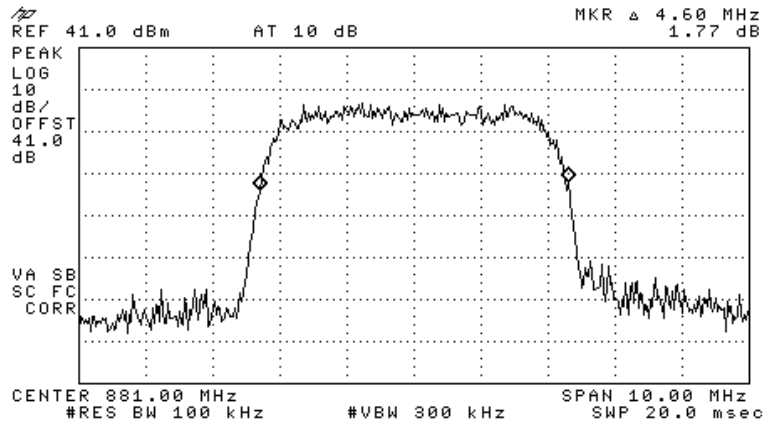


Figure 30.—Output 881.0Hz.

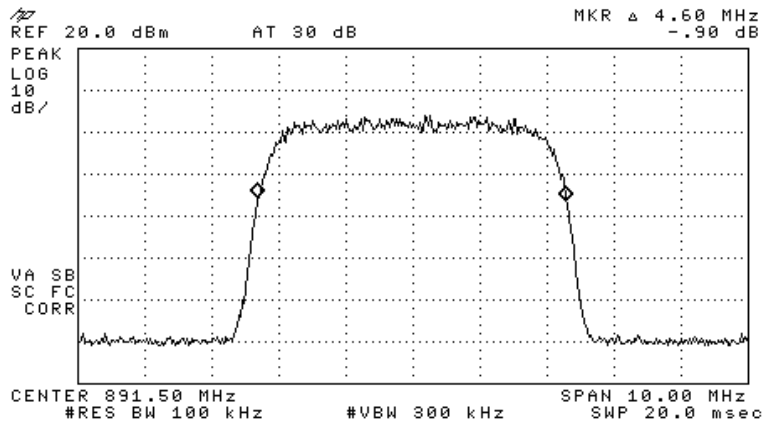


Figure 31.— Input 891.50 MHz.

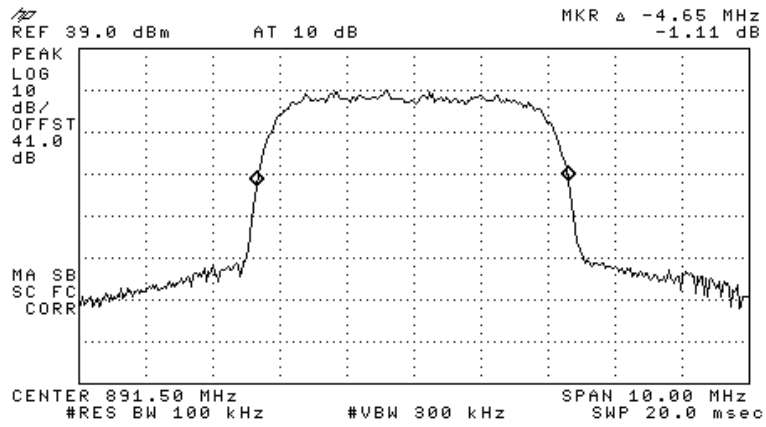


Figure 32.— Output 891.50 MHz.


### 5.3 Results Table

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 2, Section 1049

Modulation		Operating Frequency (MHz)	Reading (MHz)
CDMA	Input	870.20	1.513
CDMA	Output	870.20	1.513
CDMA	Input	881.00	1.500
CDMA	Output	881.00	1.513
CDMA	Input	892.80	1.513
CDMA	Output	892.80	1.513
GSM	Input	870.20	0.510
GSM	Output	870.20	0.510
GSM	Input	881.00	0.510
GSM	Output	881.00	0.505
GSM	Input	892.80	0.510
GSM	Output	892.80	0.505
W-CDMA	Input	871.50	4.600
W-CDMA	Output	871.50	4.600
W-CDMA	Input	881.00	4.600
W-CDMA	Output	881.00	4.600
W-CDMA	Input	891.50	4.600
W-CDMA	Output	891.50	4.650

**Figure 33 Occupied Bandwidth CELL**

TEST PERSONNEL:

Tester Signature: 

Date: 31.05.11

Typed/Printed Name: A. Sharabi

#### 5.4 Test Equipment Used.

##### Occupied Bandwidth CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8529L	3826A01204	February 21, 2011	1 year
Signal Generator	HP	E4438C ESG-	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 34 Test Equipment Used**

## 6. Out of Band Emissions at Antenna Terminals CELL

### 6.1 Test Specification

FCC Part 22, Section 917; FCC Part 2.1051

### 6.2 Test procedure

The power of any emission outside of the authorized operating frequency ranges (869 - 894 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding  $-13\text{dBm}$ .

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (41 dB).

The spectrum analyzer was set to 1.0 kHz R.B.W. for the frequency range of 9.0 – 150 kHz, 10 kHz for the frequency range of 150 kHz – 1 MHz, and 100 kHz for the frequency range of 1 MHz – 10 GHz.

CDMA:

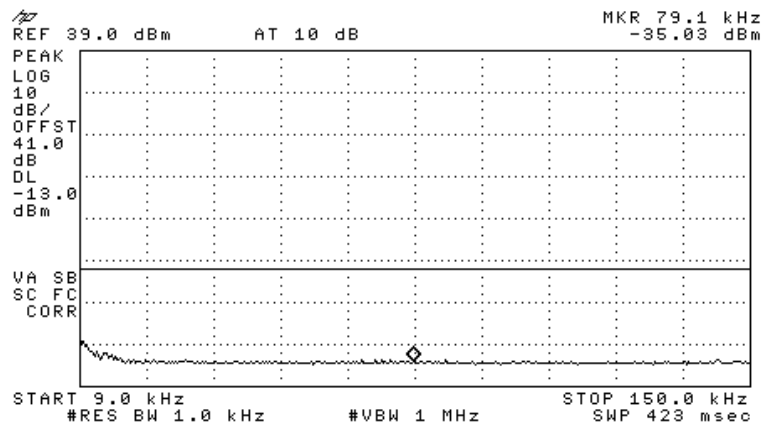


Figure 35.— 870.20 MHz

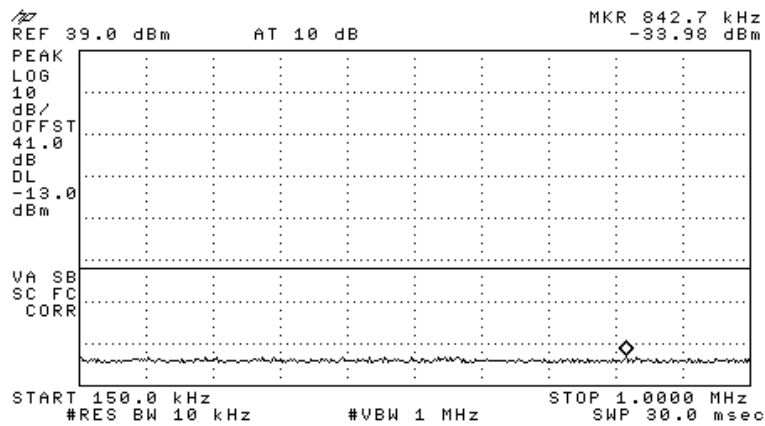


Figure 36.— 870.20 MHz

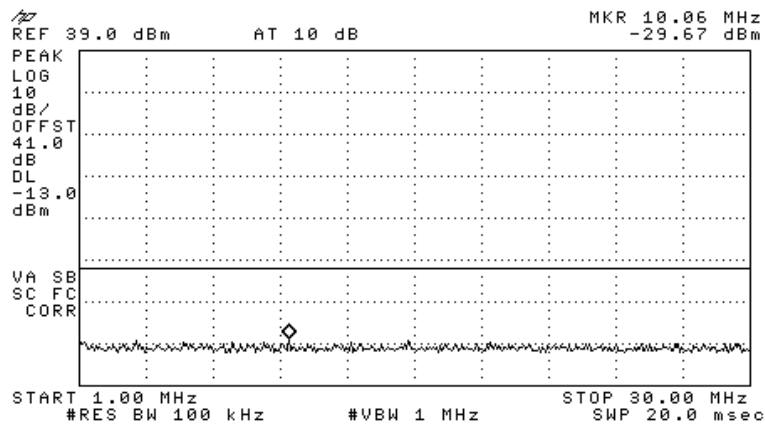


Figure 37.— 870.20 MHz



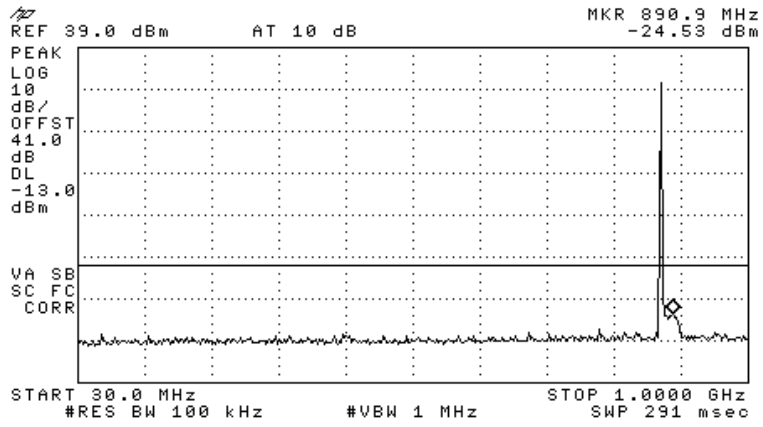


Figure 38.— 870.20 MHz

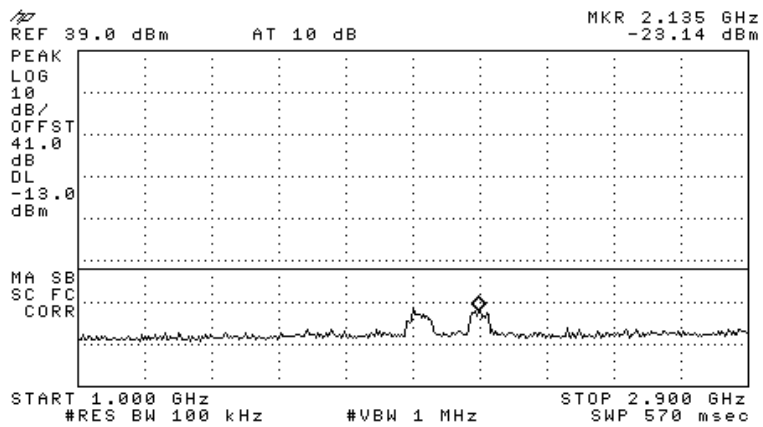


Figure 39.— 870.20 MHz

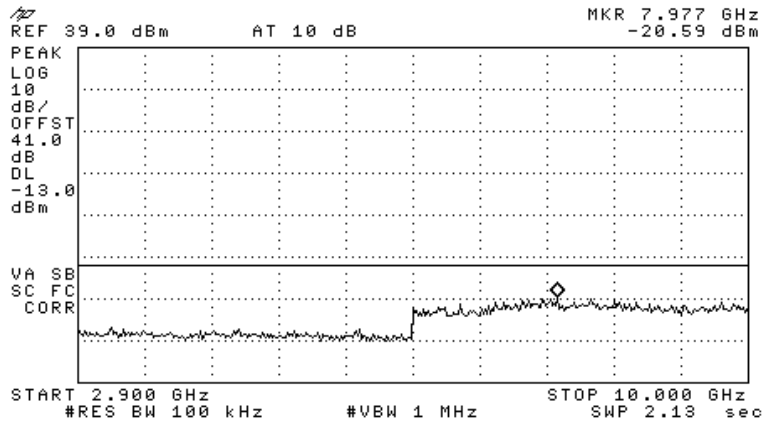


Figure 40.— 870.20 MHz

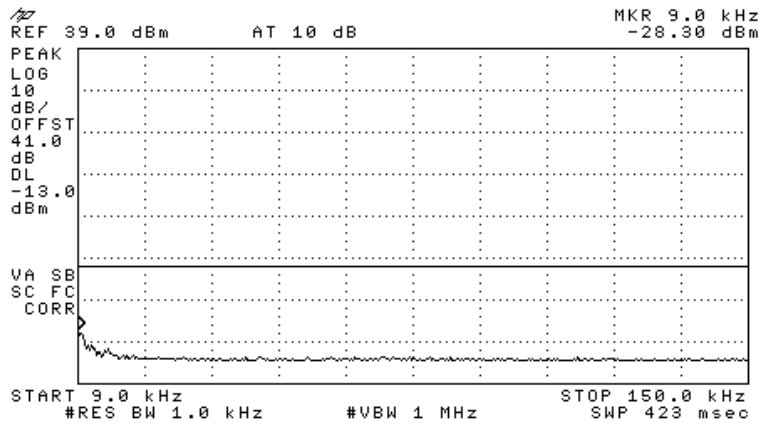


Figure 41.— 881.00 MHz

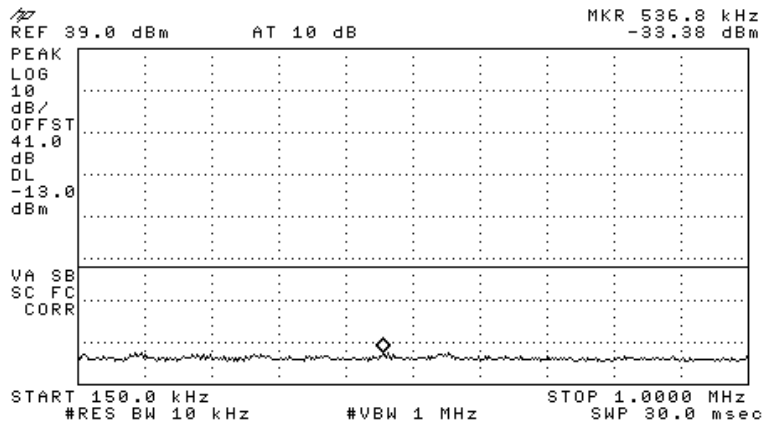


Figure 42.— 881.00 MHz

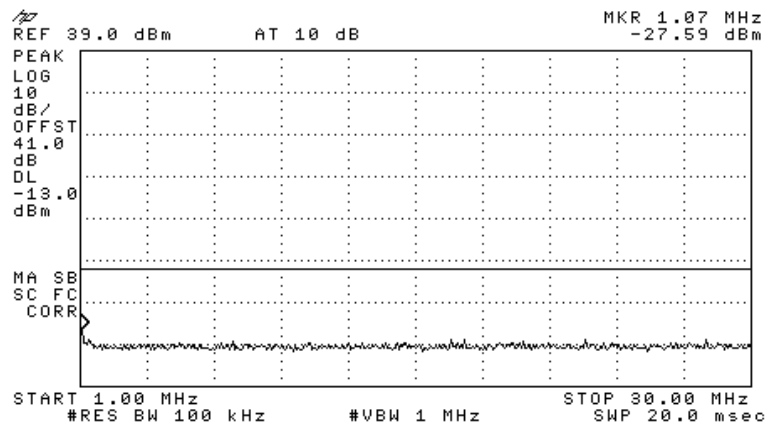


Figure 43.— 881.00 MHz

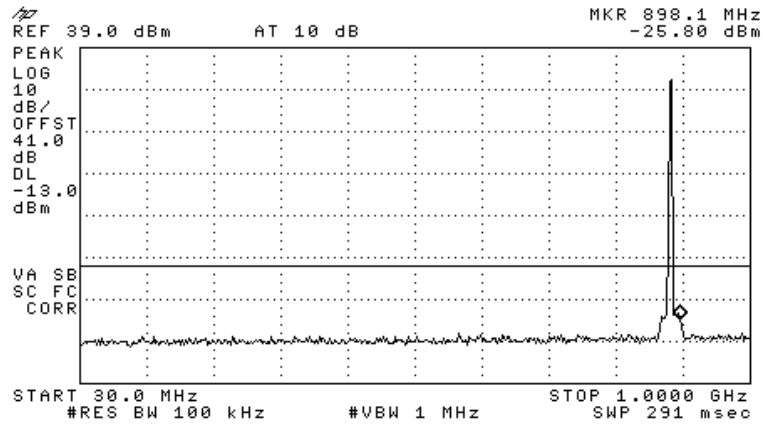


Figure 44.— 881.00 MHz

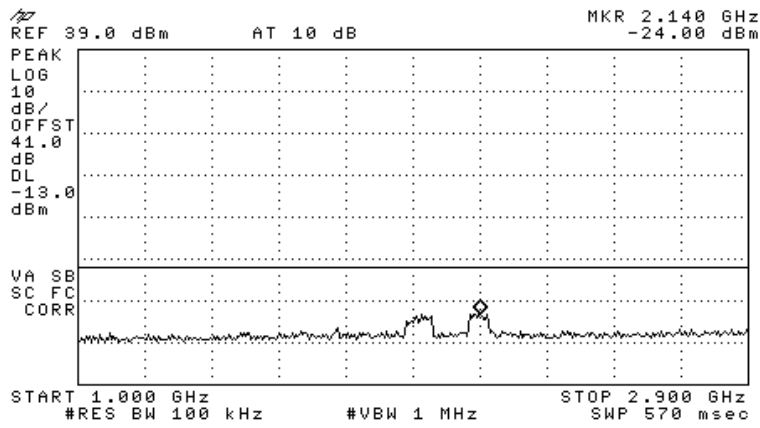


Figure 45.— 881.00 MHz

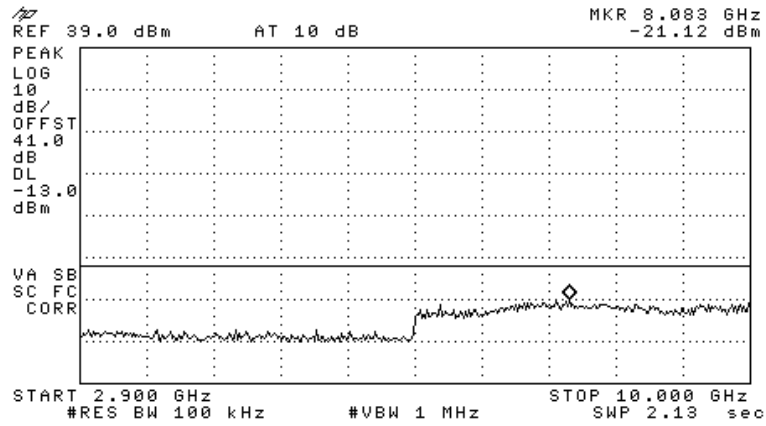


Figure 46.— 881.00 MHz

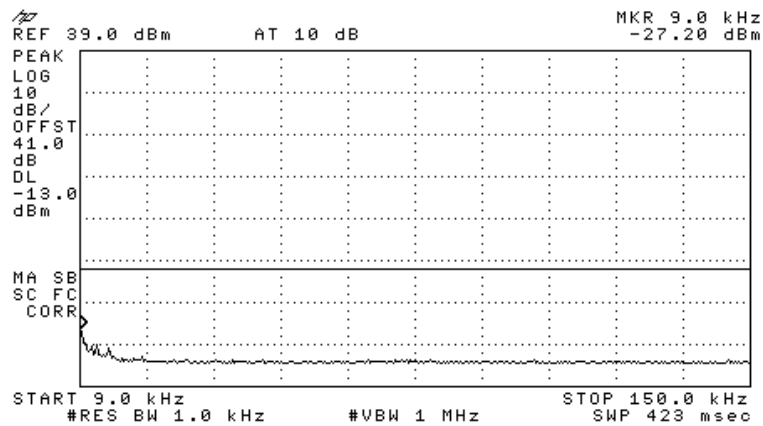


Figure 47.— 892.80 MHz

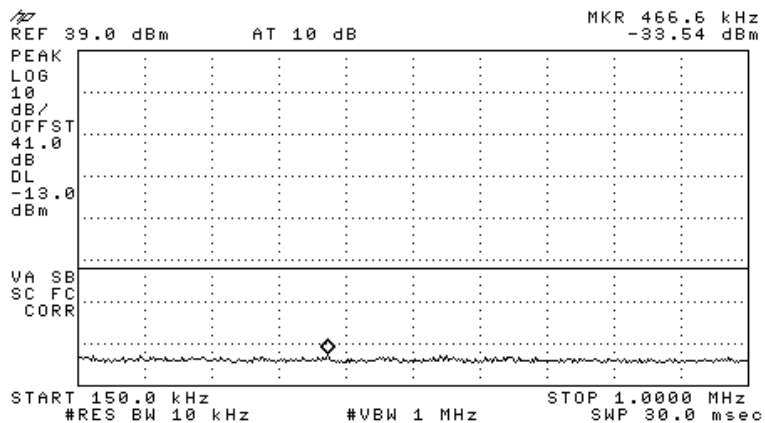


Figure 48.— 892.80 MHz

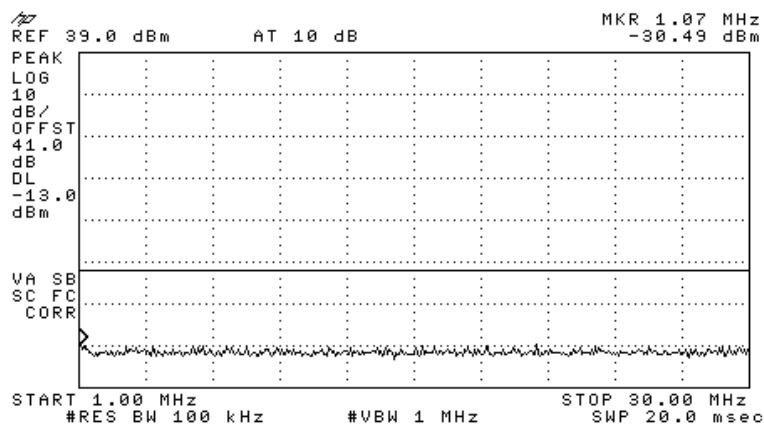


Figure 49.— 892.80 MHz

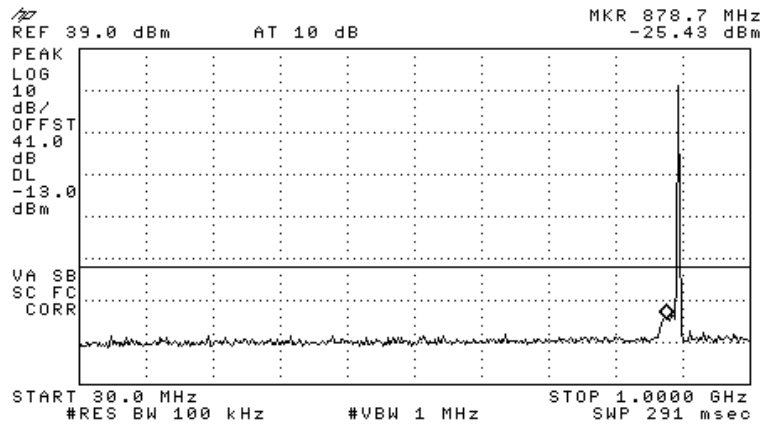


Figure 50.— 892.80 MHz

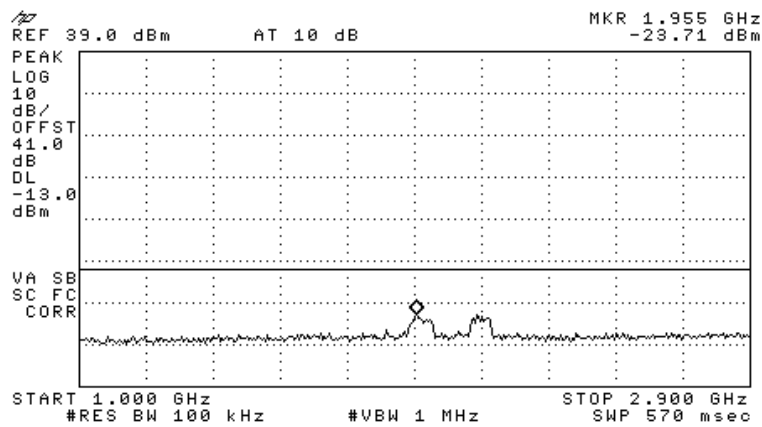


Figure 51.— 892.80 MHz

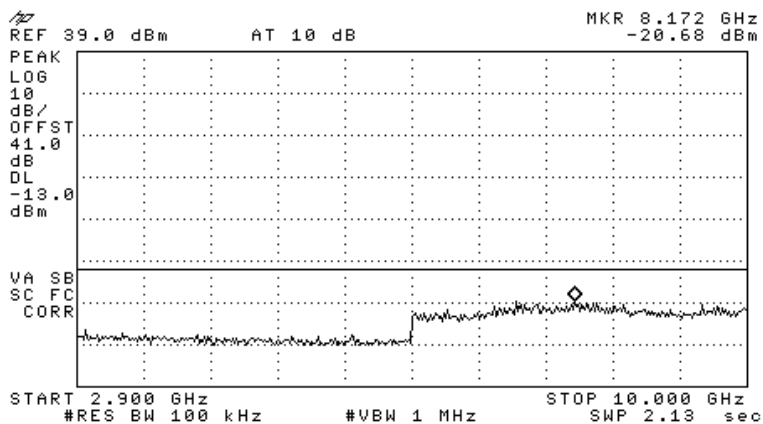


Figure 52.— 892.80 MHz

GSM:

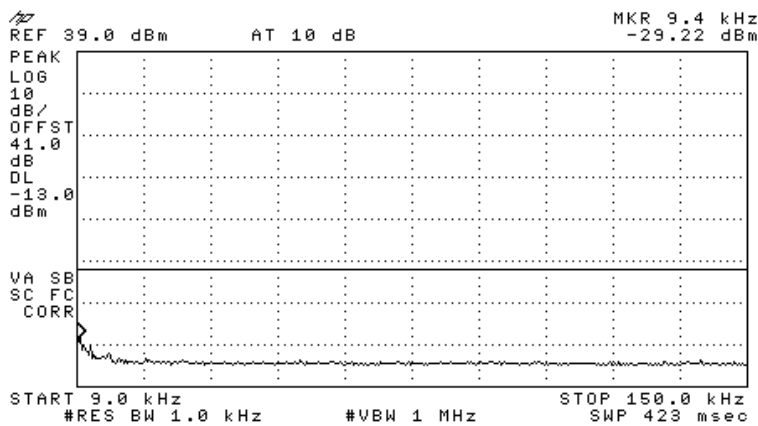


Figure 53.— 870.20 MHz



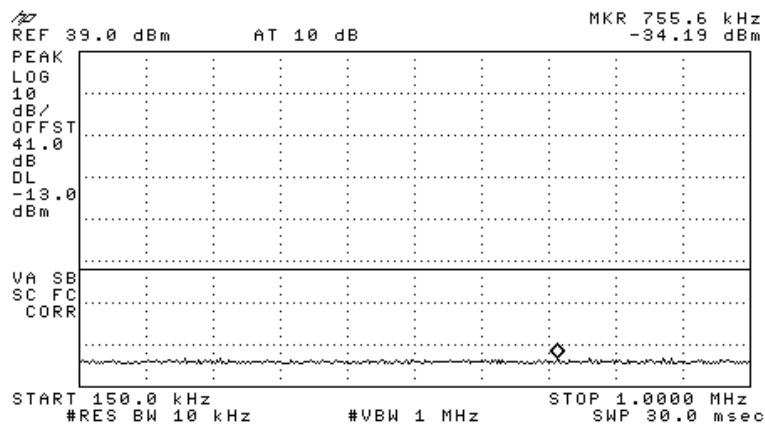


Figure 54.— 870.20 MHz

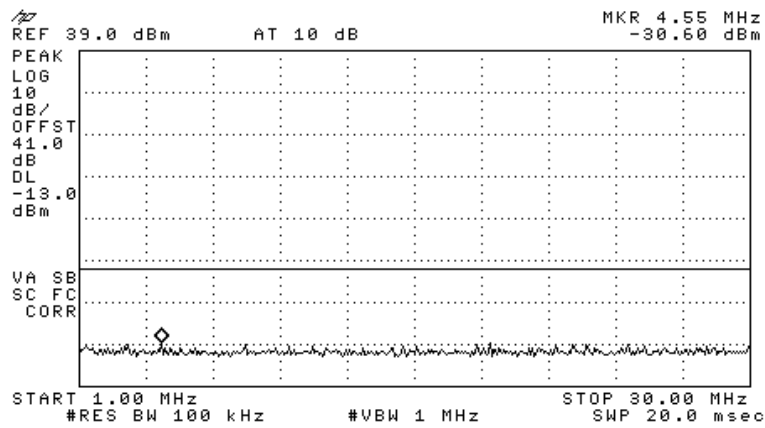


Figure 55.— 870.20 MHz

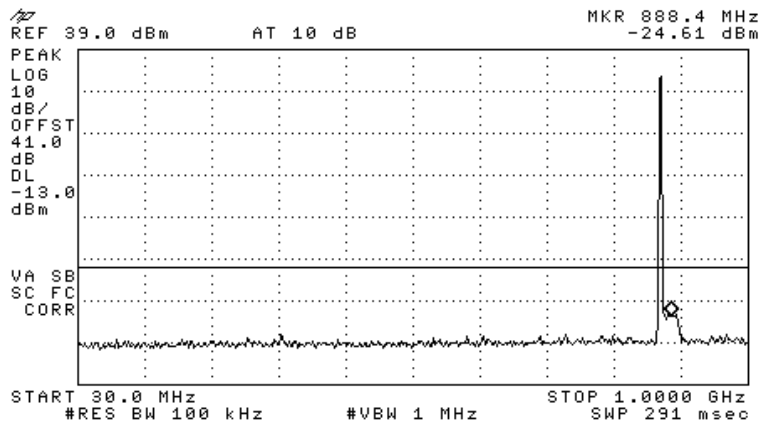


Figure 56.— 870.20 MHz

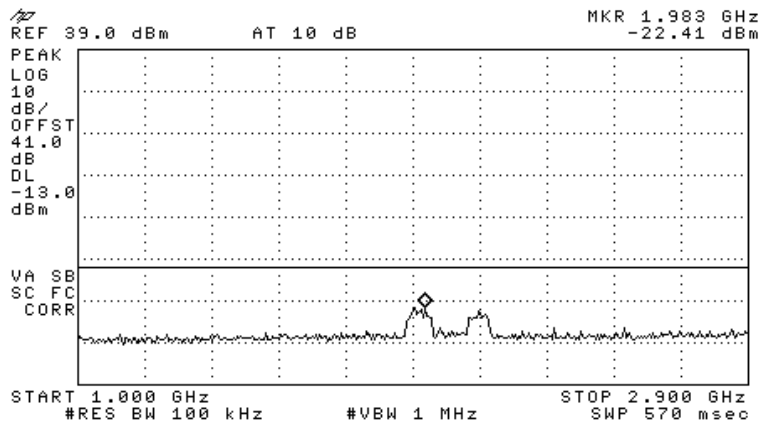


Figure 57.— 870.20 MHz

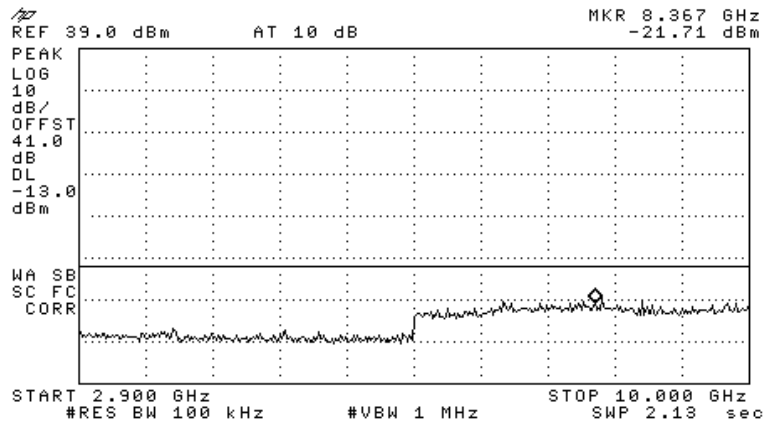


Figure 58.— 870.20 MHz

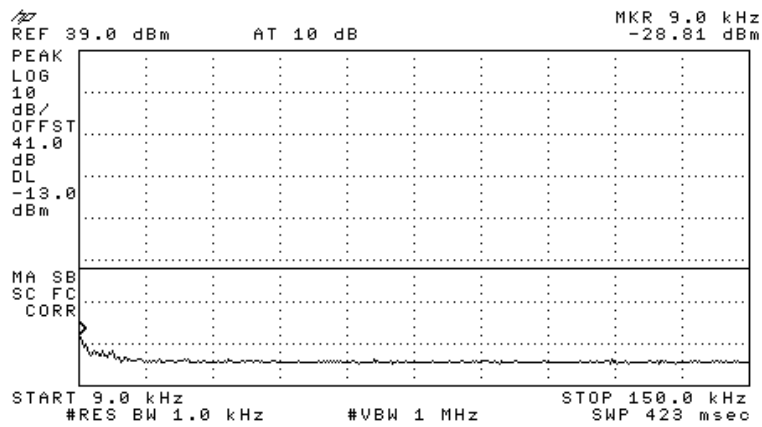


Figure 59.— 881.00 MHz

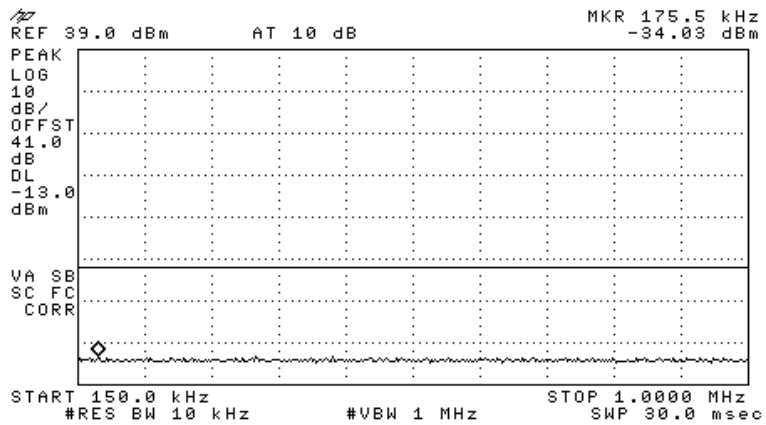


Figure 60.— 881.00 MHz

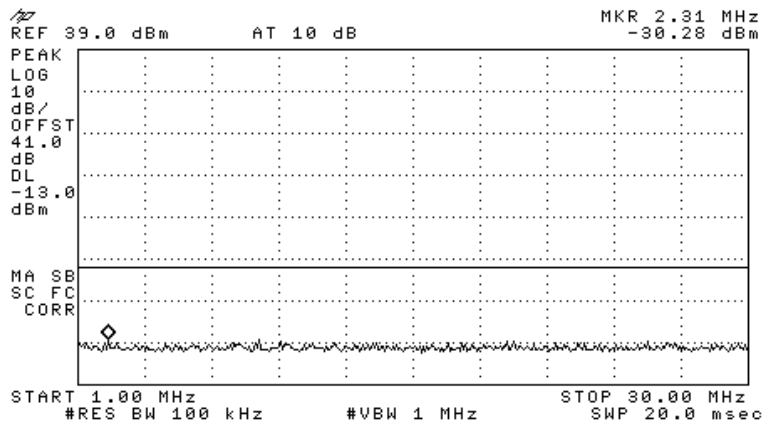


Figure 61.— 881.00 MHz

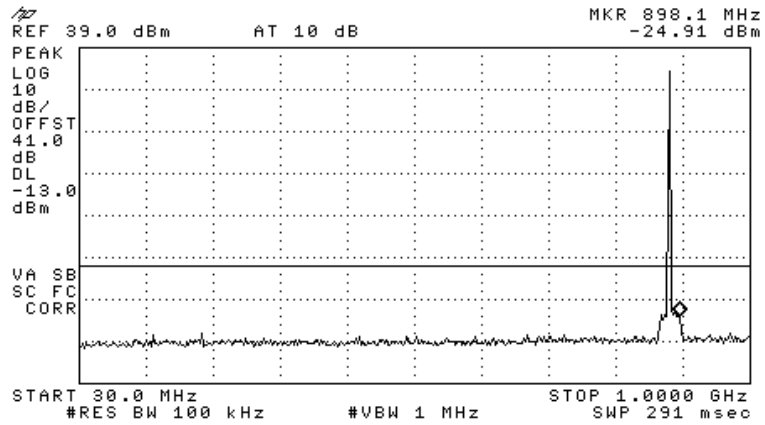


Figure 62.— 881.00 MHz

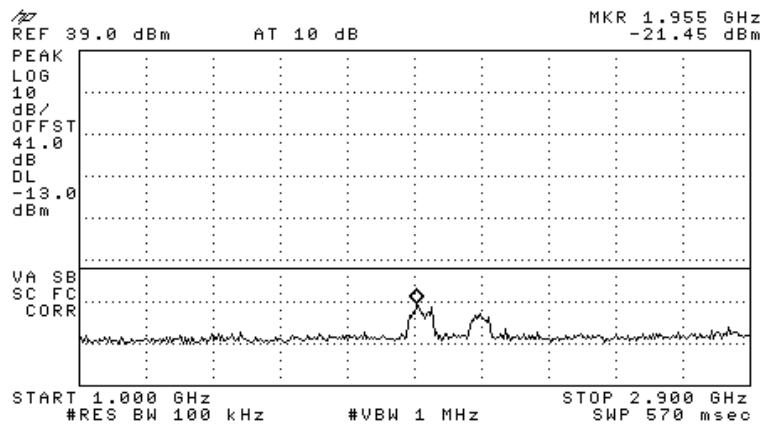


Figure 63.— 881.00 MHz

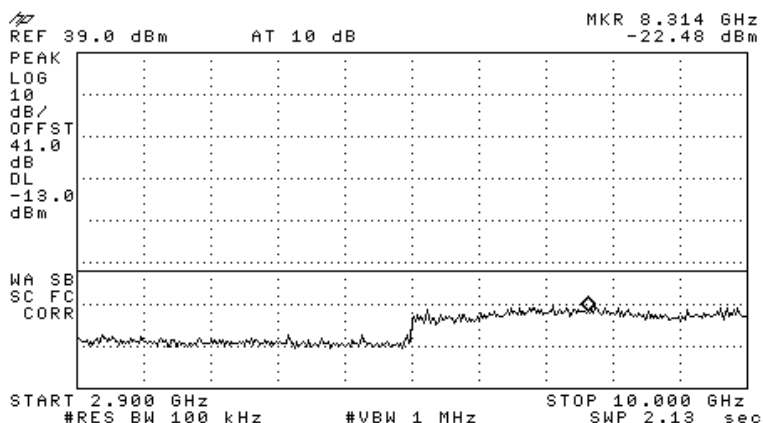


Figure 64.— 881.00 MHz

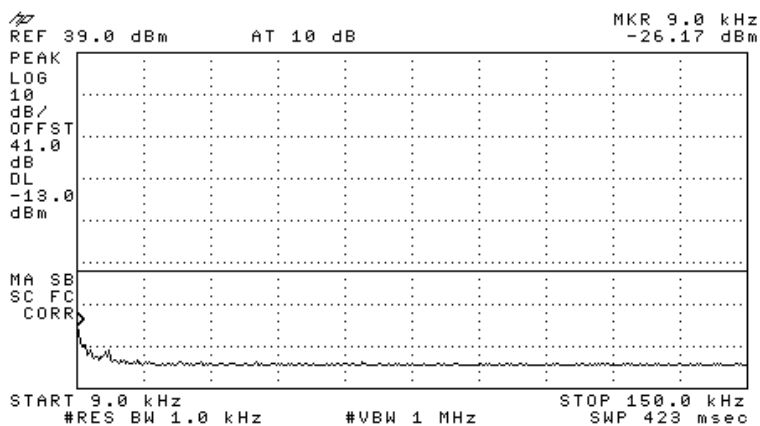


Figure 65.— 892.80 MHz

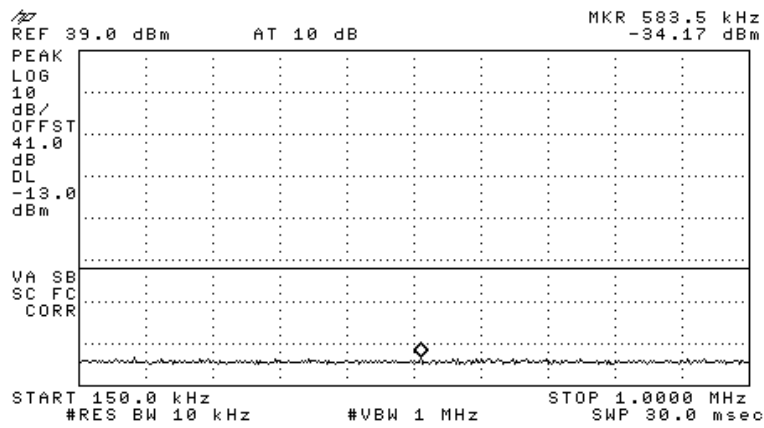


Figure 66.— 892.80 MHz

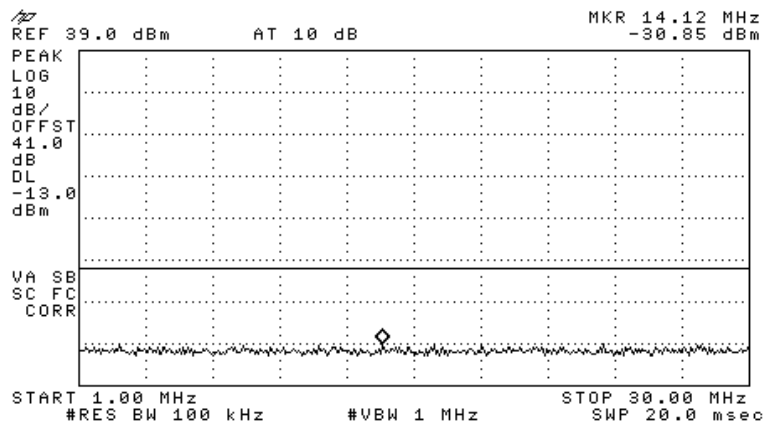


Figure 67.— 892.80 MHz

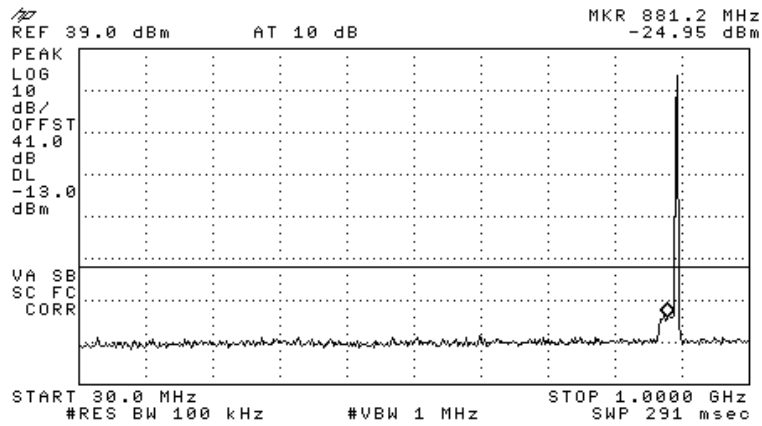


Figure 68.— 892.80 MHz

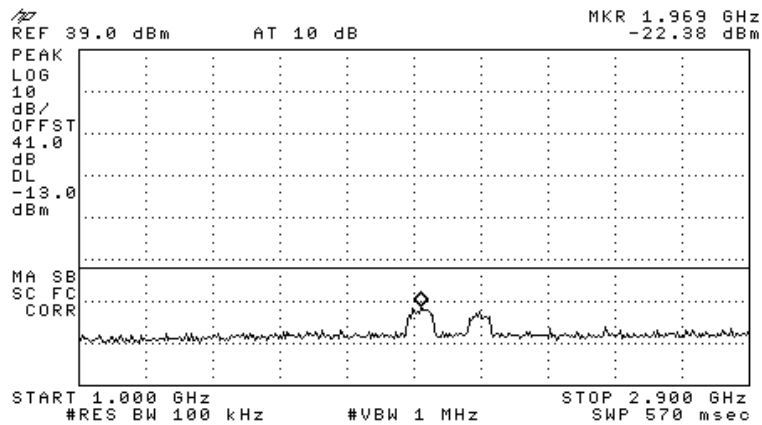


Figure 69.— 892.80 MHz



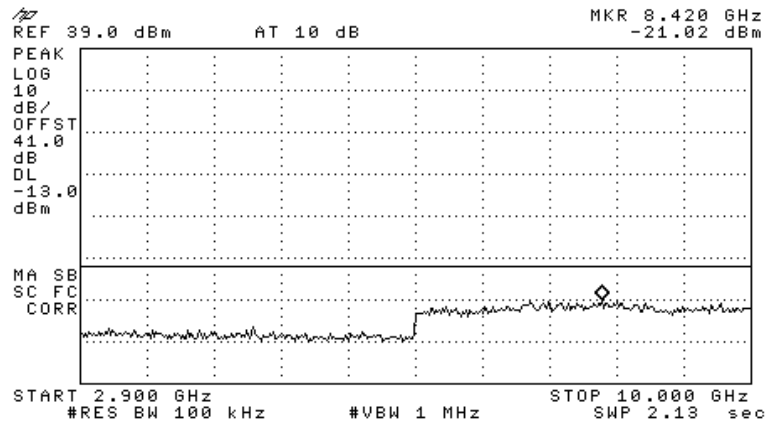


Figure 70.— 892.80 MHz

W-CDMA:

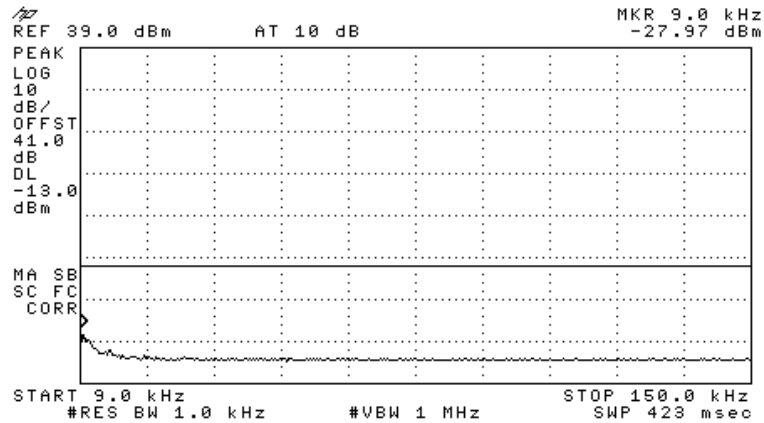


Figure 71.— 871.50 MHz

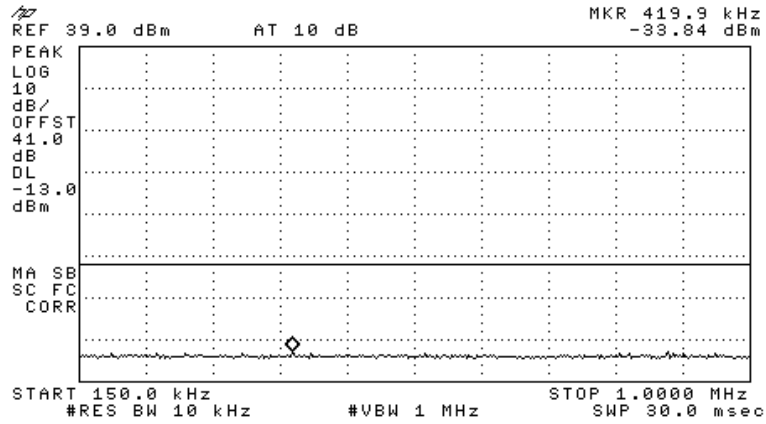


Figure 72.— 871.50 MHz

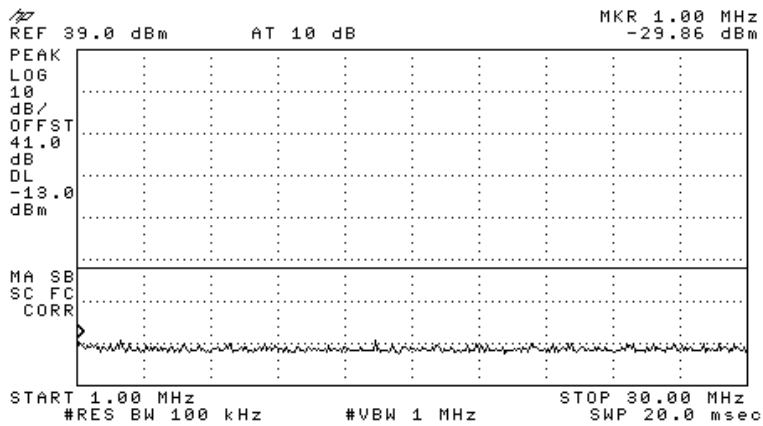


Figure 73.— 871.50 MHz

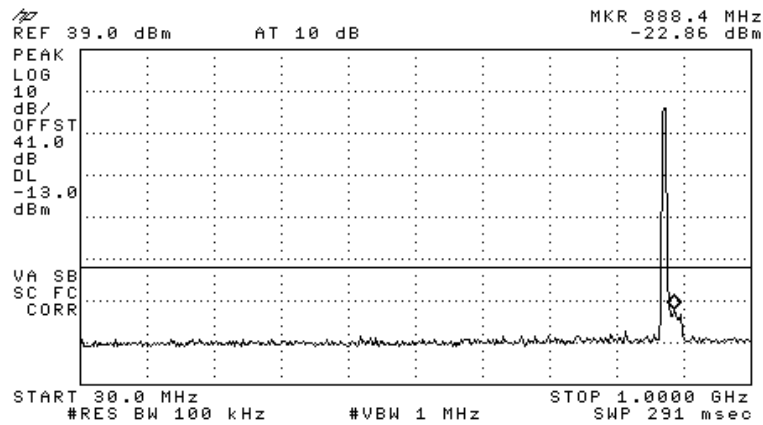


Figure 74.— 871.50 MHz

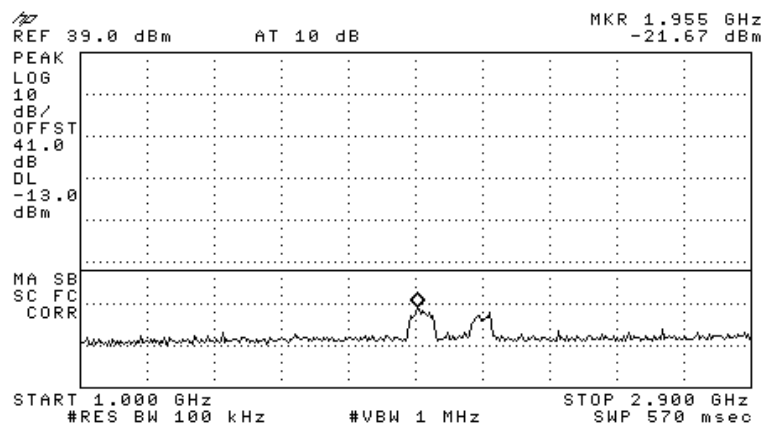


Figure 75.— 871.50 MHz

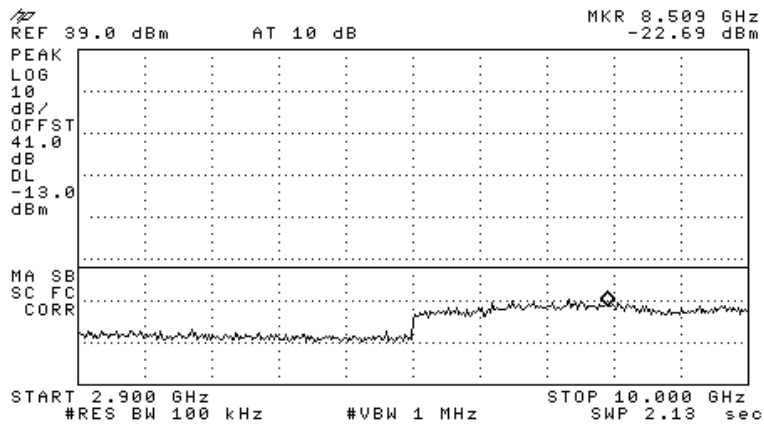


Figure 76.— 871.50 MHz

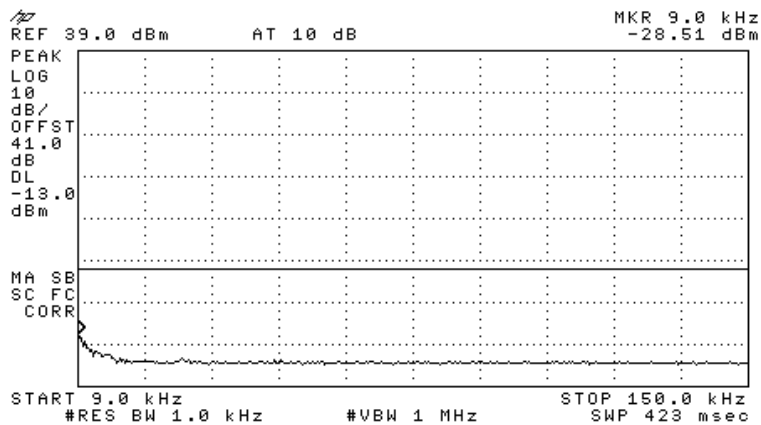


Figure 77.— 881.00 MHz

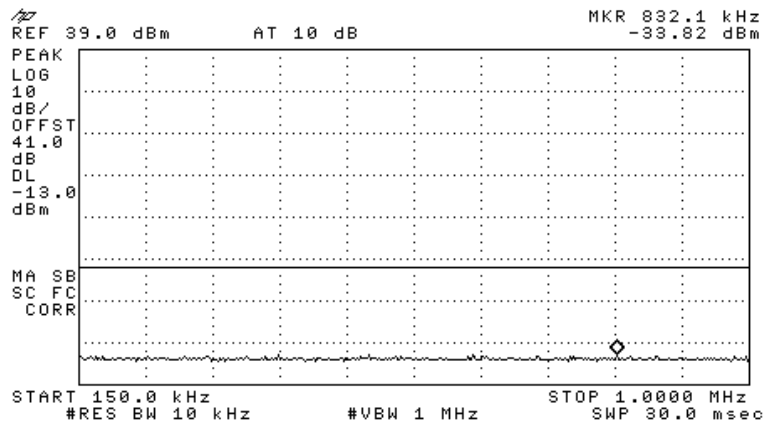


Figure 78.— 881.00 MHz

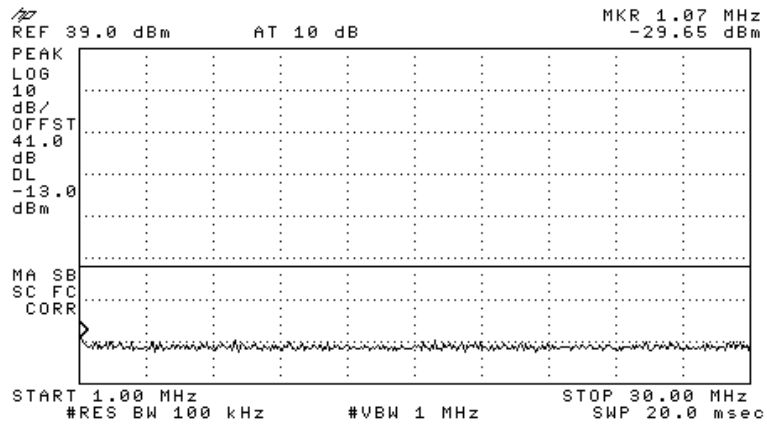


Figure 79.— 881.00 MHz

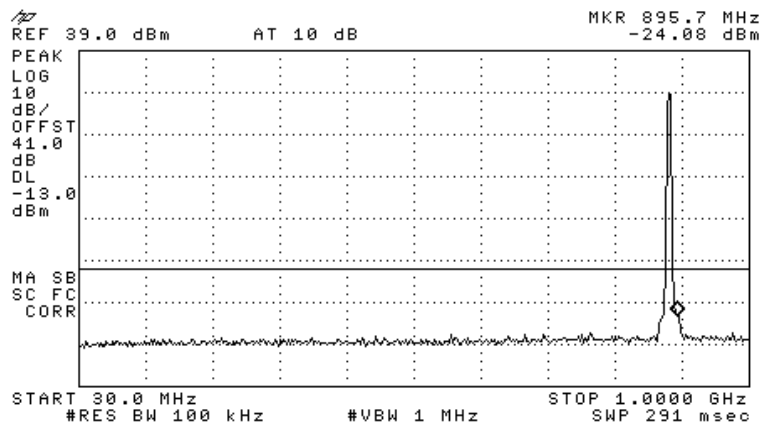


Figure 80.— 881.00 MHz

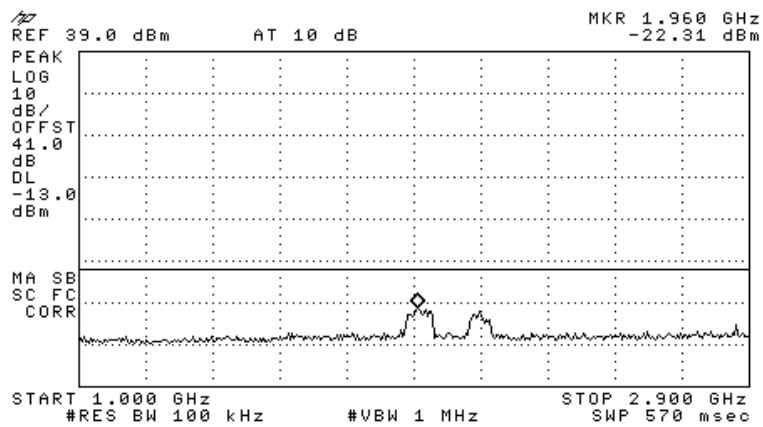
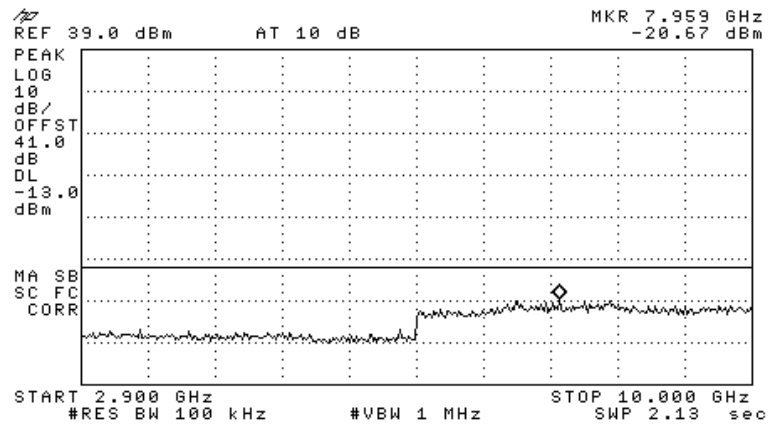
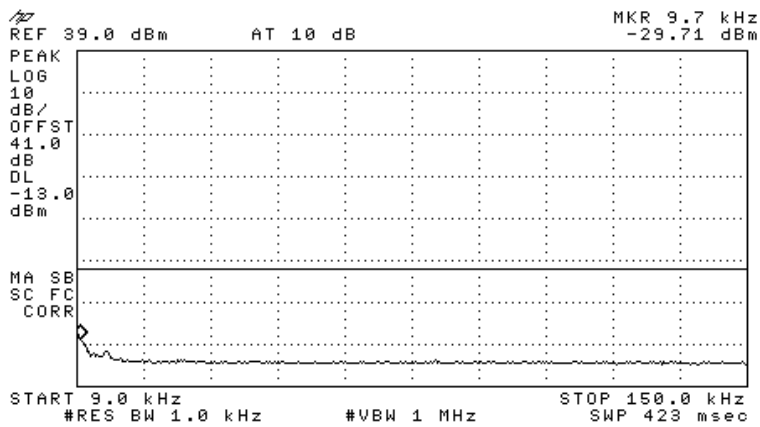


Figure 81.— 881.00 MHz



**Figure 82.— 881.00 MHz**



**Figure 83.— 891.50 MHz**

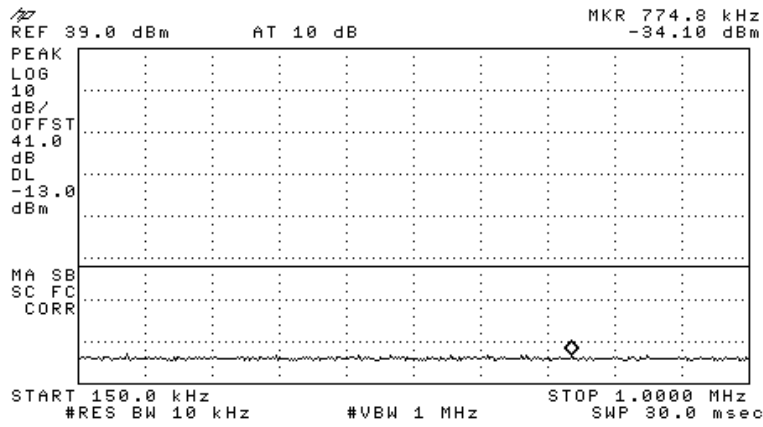


Figure 84.— 891.50 MHz

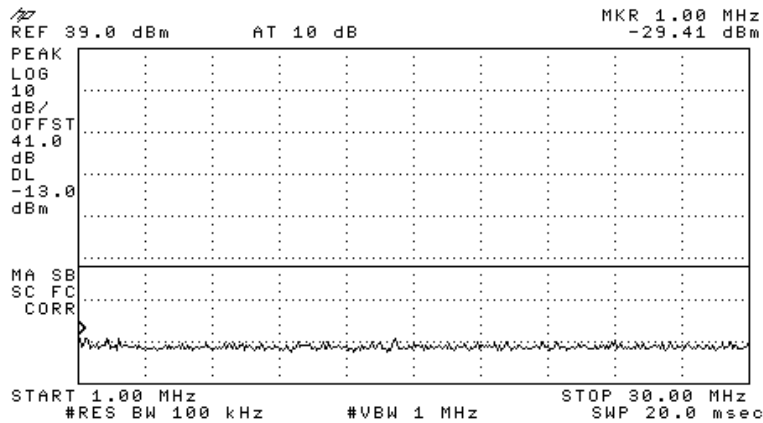


Figure 85.— 891.50 MHz



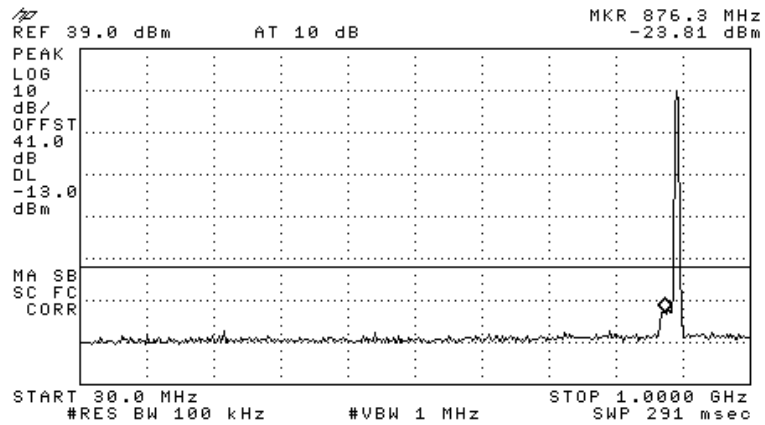


Figure 86.— 891.50 MHz

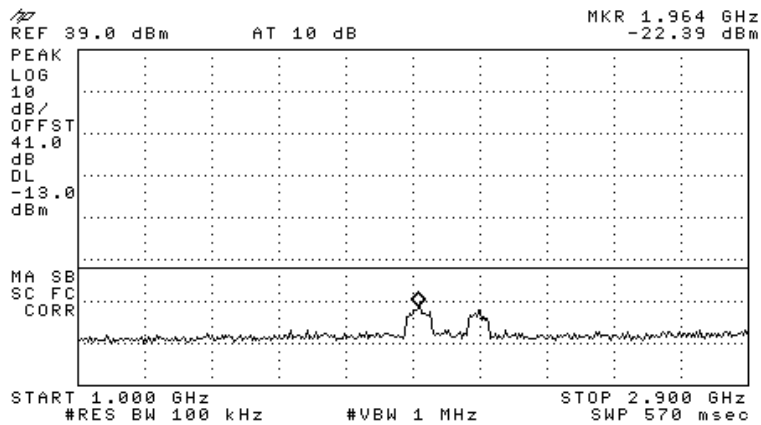


Figure 87.— 891.50 MHz

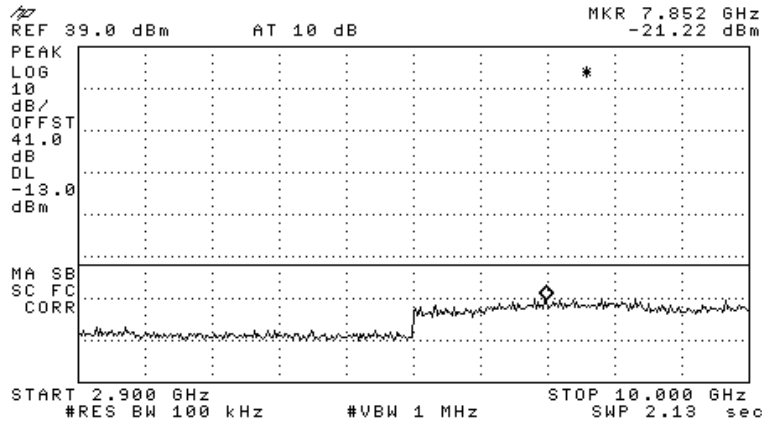


Figure 88.— 891.50 MHz

### 6.3 Results Table


E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 FCC Part 22, Section 917; FCC Part 2.1051

Modulation	Operation Frequency (MHz)	Frequency (GHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
CDMA	870.20	7.977	-20.59	-13.0	-7.59
	881.00	8.083	-21.12	-13.0	-8.12
	892.80	8.172	-20.68	-13.0	-7.98
GSM	870.20	8.367	-21.71	-13.0	-8.71
	881.00	1.955	-21.45	-13.0	-8.45
	892.80	8.420	-21.02	-13.0	-8.02
W-CDMA	871.50	1.955	-21.67	-13.0	-8.67
	881.00	7.959	-20.67	-13.0	-7.67
	891.50	7.852	-21.22	-13.0	-8.22

Figure 89 Out of Band Emission Results CELL

JUDGEMENT: Passed by 7.59 dB

TEST PERSONNEL:

Tester Signature: 

Date: 31.05.11

Typed/Printed Name: A. Sharabi

#### 6.4 Test Equipment Used.

Out of Band Emission at Antenna Terminals CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8529L	3826A01204	February 21, 2011	1 year
Signal Generator	HP	E4438C ESG-	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 90 Test Equipment Used**

## 7. Band Edge Spectrum CELL

### 7.1 Test Specification

FCC Part 22, FCC Part 2.1051

### 7.2 Test procedure

For CDMA and GSM:

Enclosed are spectrum analyzer plots for the lowest operation frequency (870.20 MHz) and the highest operation frequency (892.8 MHz) in which the E.U.T. is planned to be used.

For W-CDMA:

Enclosed are spectrum analyzer plots for the lowest operation frequency (871.50 MHz) and the highest operation frequency (891.5 MHz) in which the E.U.T. is planned to be used.

The power of any emission outside of the authorized operating frequency ranges (869 - 894 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding  $-13\text{dBm}$ .

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (21 dB).

The spectrum analyzer was set to 100 kHz R.B.W.

CDMA:

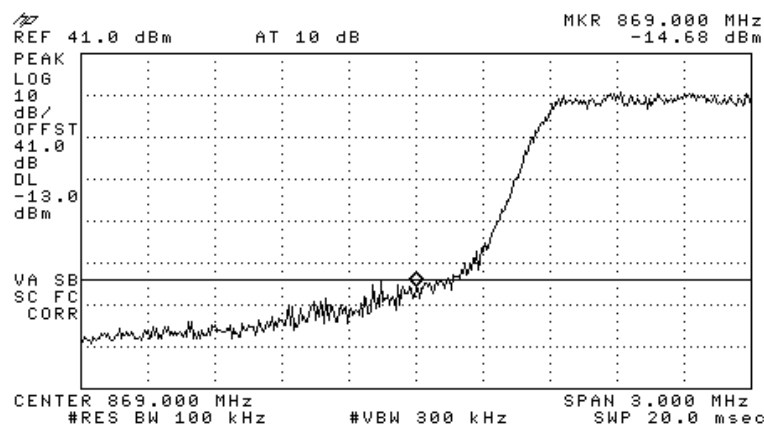


Figure 91.— 870.20 MHz

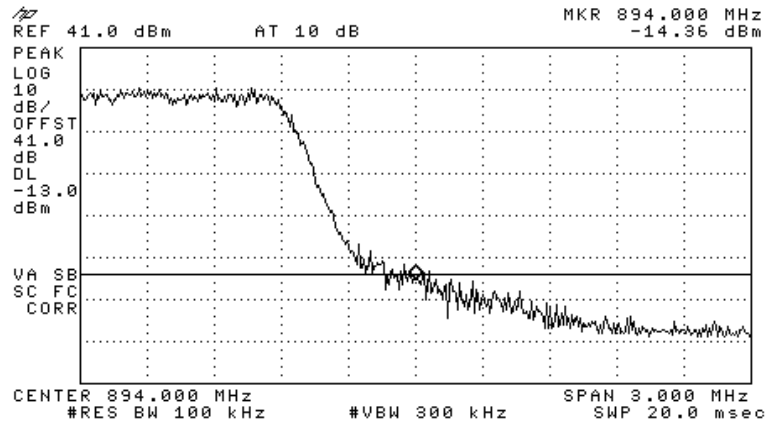


Figure 92.— 892.80 MHz

GSM:

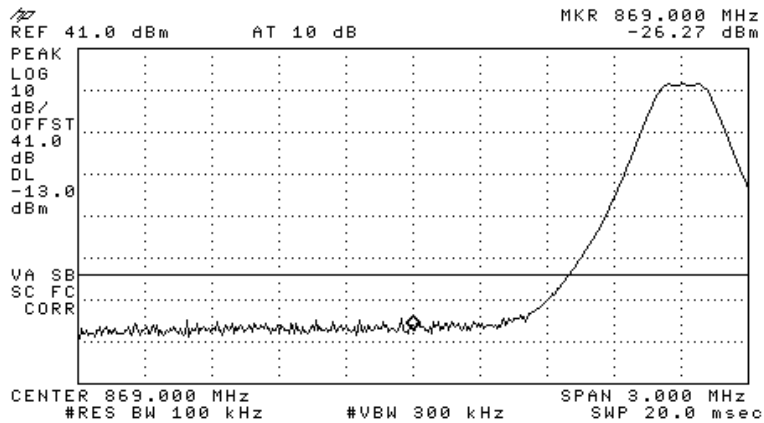


Figure 93.— 870.20 MHz

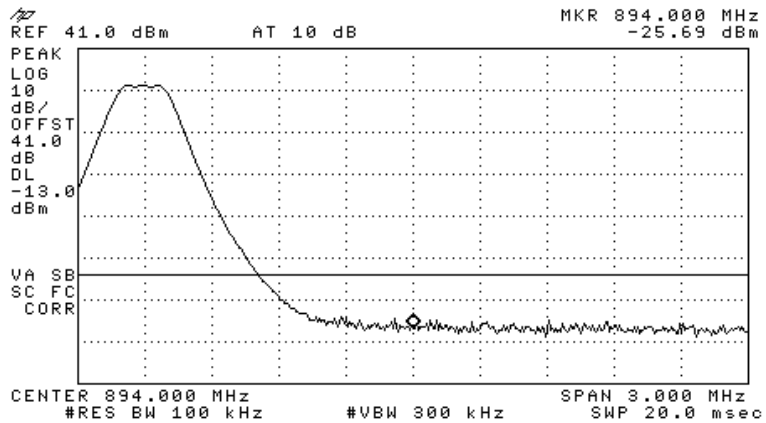


Figure 94.— 892.80 MHz

W-CDMA:

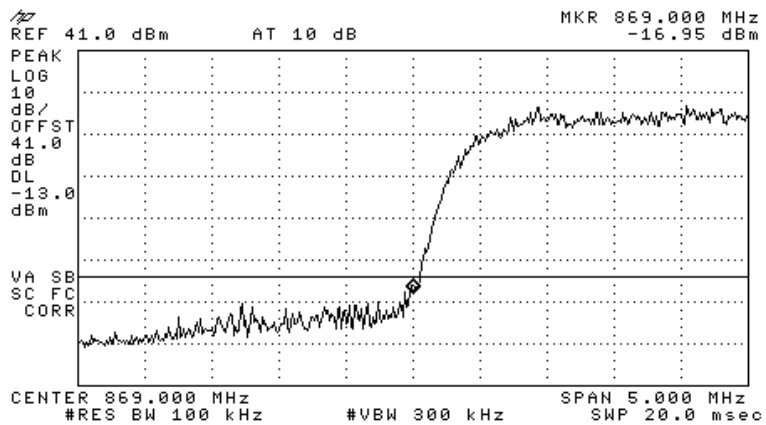


Figure 95.— 871.50 MHz

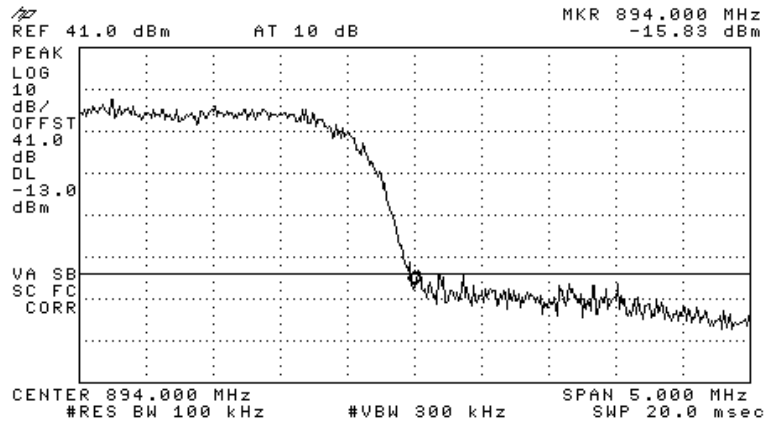


Figure 96.— 891.50 MHz

### 7.3 Results Table

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 24, Subpart E, Section 238; Part 2 Section 1051

Modulation	Operation Frequency (MHz)	Band Edge Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
CDMA	870.20	869.00	-14.68	-13.0	-1.68
	892.80	894.00	-14.36	-13.0	-1.36
GSM	870.20	869.00	-26.27	-13.0	-13.27
	892.80	894.00	-25.69	-13.0	-12.69
W-CDMA	871.50	869.00	-16.95	-13.0	-3.95
	891.50	894.00	-15.83	-13.0	-2.83

Figure 97 Band Edge Spectrum Results CELL

JUDGEMENT: Passed by dB

TEST PERSONNEL:

Tester Signature: \_\_\_\_\_

Date: 31.05.11

Typed/Printed Name: A. Sharabi

#### 7.4 Test Equipment Used.

##### Band Edge Spectrum CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8529L	3826A01204	February 21, 2011	1 year
Signal Generator	HP	E4438C ESG-	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 98 Test Equipment Used**



## 8. Out of Band Emissions (Radiated) CELL

### 8.1 Test Specification

FCC Part 22, Section 917; FCC Part 2.1053

### 8.2 Test Procedure

The test method was based on ANSI/TIA-603-C: 2004, Section 2.2.12

Unwanted Emissions: Radiated Spurious.

The power of any emission outside of the authorized operating frequency ranges (869 - 894 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding  $-13\text{dBm}$ .

- (a) The E.U.T. operation mode and test set-up are as described in Section 3. A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-20 GHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

- (b) The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a). The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dB)}$$

$P_d$  = Dipole equivalent power (result).


$P_g$  = Signal generator output level.

### 8.3 Results Table

Carrier Channel	Freq.	Antenna Pol.	Maximum Peak Level	Signal Generator RF Output	Cable Loss	Antenna Gain	Effective Radiated Power Level	Spec.	Margin
(MHz)	(MHz)		(dB $\mu$ V/m)	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
870.20	1740.40	V	48.1	-52.71	5.45	7.64	-50.52	-13.0	-37.52
870.20	1740.40	H	48.2	-52.44	5.45	7.64	-50.25	-13.0	-37.25
881.00	1762.00	V	49.55	-50.24	5.6	7.66	-48.18	-13.0	-35.18
881.00	1762.00	H	47.75	-52.3	5.6	7.66	-50.24	-13.0	-37.24
892.80	1785.60	V	50.6	-49.19	5.6	7.66	-47.13	-13.0	-34.13
892.80	1785.60	H	50.2	-49.85	5.6	7.66	-47.79	-13.0	-34.79

The E.U.T met the requirements of the FCC Part 22, Section 917;  
FCC Part 2.1053 specifications.

TEST PERSONNEL:

Tester Signature: \_\_\_\_\_ 

Date: 31.05.11

Typed/Printed Name: A. Sharabi

#### 8.4 Test Instrumentation Used, Radiated Measurements CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Active Loop Antenna	Emco	6502	2950	October 19, 2010	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 27, 2011	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A
Spectrum Analyzer	HP	8592L	3826A01204	February 21, 2011	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 5, 2010	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 4, 2011	1 Year
Signal Generator	HP	E4432B ESG-D	GB40050702	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2010	2 year

## 9. Peak Output Power PCS

### 9.1 Test Specification

FCC Part 24, Subpart E

### 9.2 Test procedure

Peak Power Output must not exceed 100 Watts (50dBm).

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (40 dB) and an appropriate coaxial cable (1dB). The E.U.T. RF output was W-CDMA and GSM and CDMA modulated. Special attention was taken to prevent Spectrum Analyzer RF input overload. The Spectrum Analyzer was set to 100 kHz RBW.

CDMA

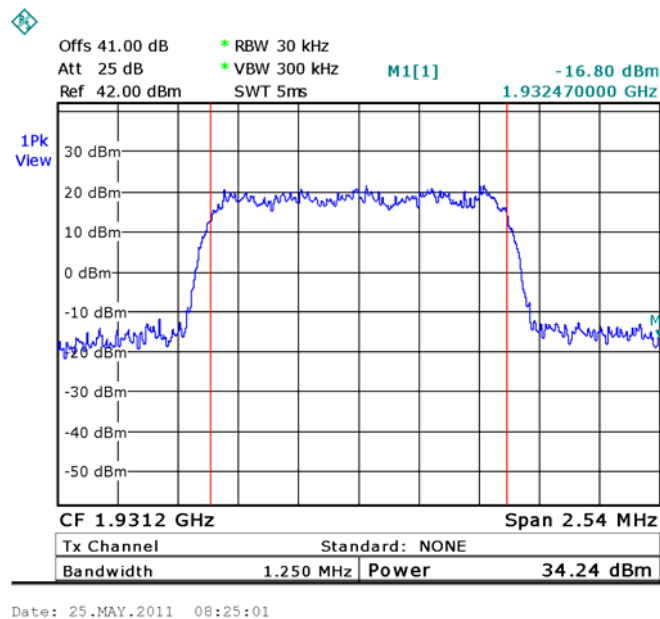


Figure 99.— 1931.20 MHz

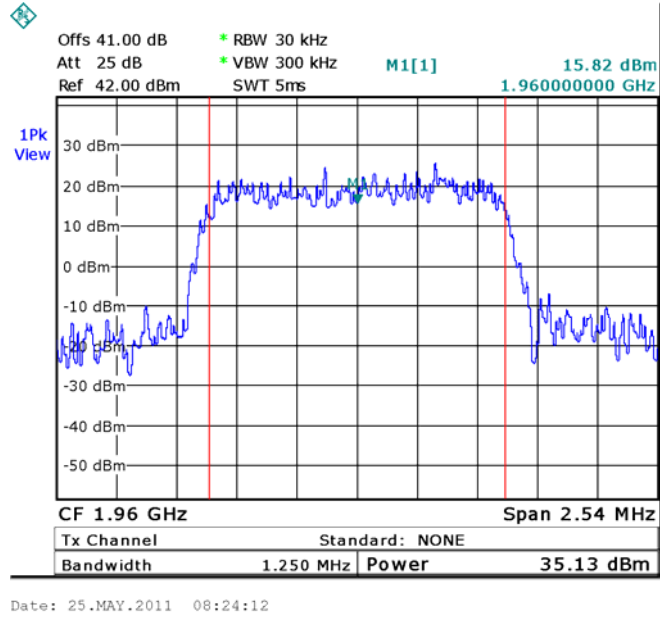


Figure 100.— 1960.00 MHz

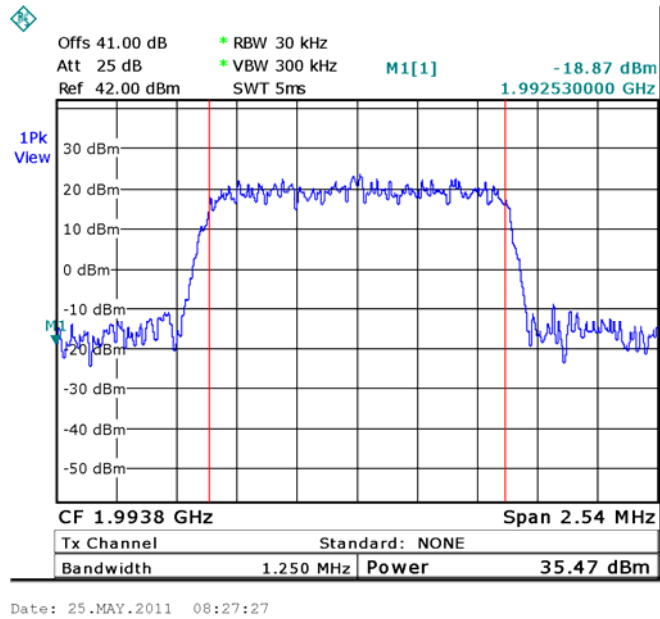


Figure 101.— 1993.80 MHz

GSM:

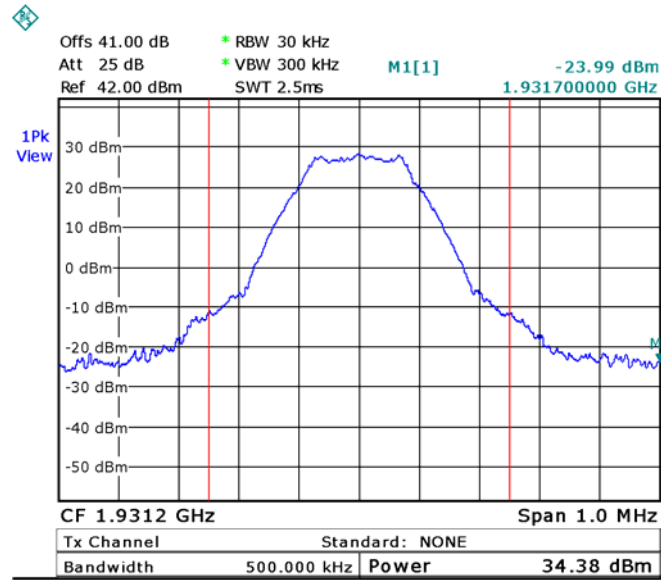


Figure 102.— 1931.20 MHz

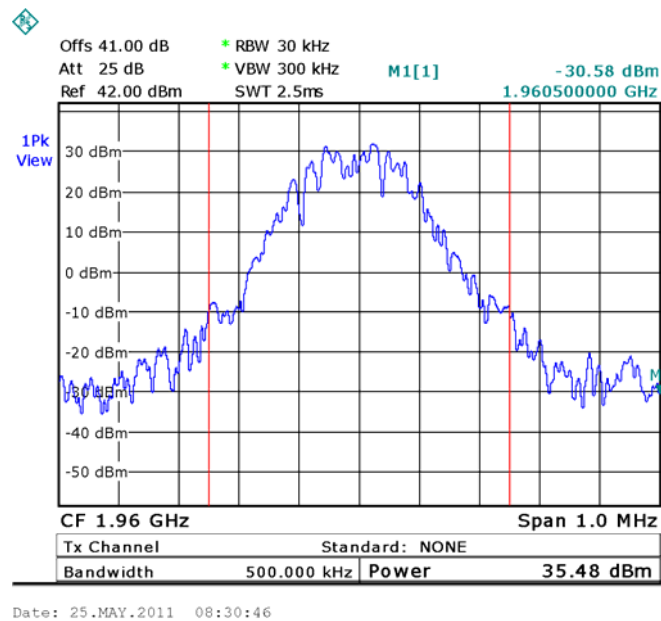


Figure 103.— 1960.00 MHz

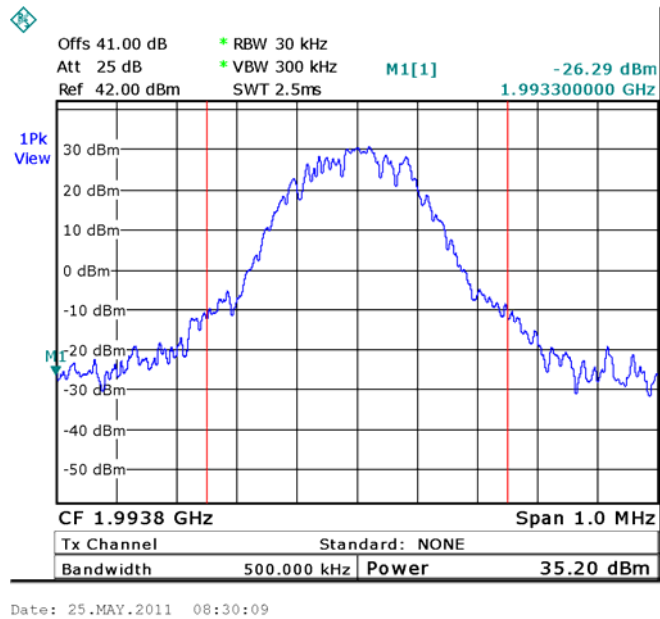


Figure 104.— 1993.80 MHz

W-CDMA:

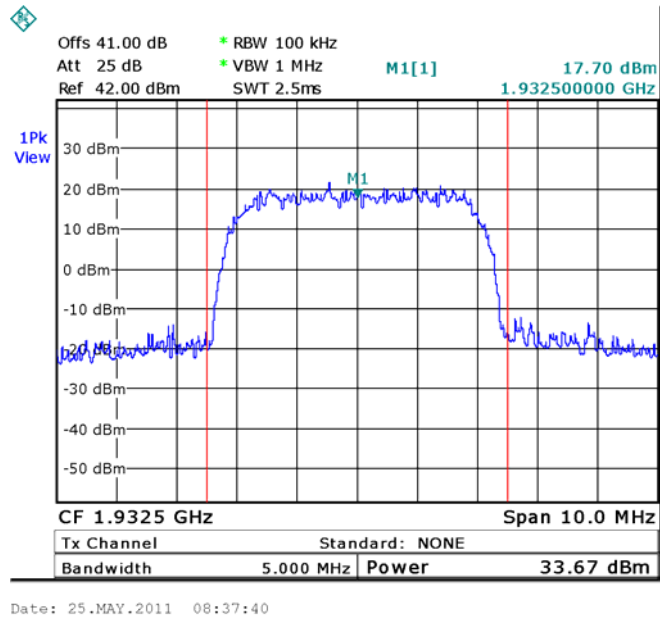


Figure 105.— 1932.50 MHz

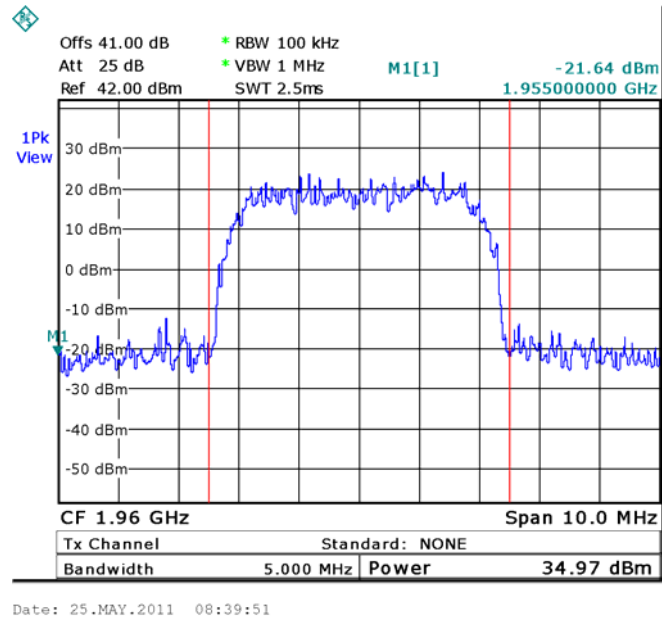


Figure 106.— 1960.00 MHz

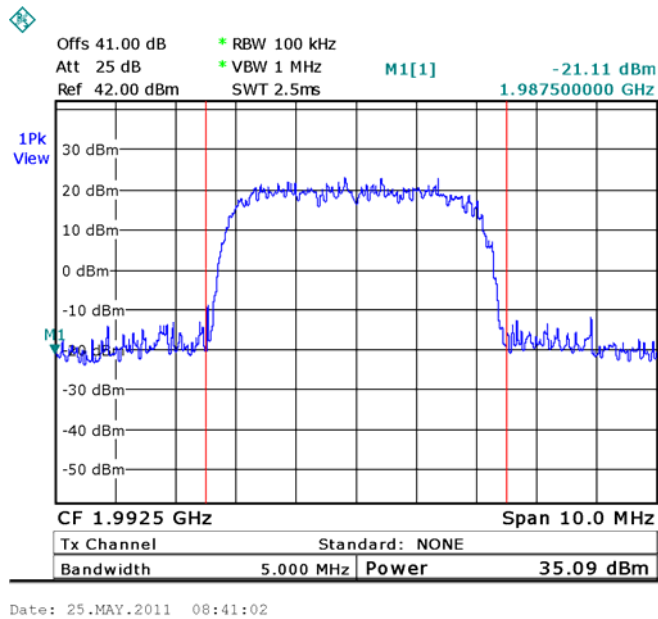


Figure 107.— 1992.50 MHz



### 9.3 Results Table

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated


Specification: FCC Part 24, Subpart E, Section 232, FCC Part 2, Section 1046

Modulation	Operation Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
CDMA	1931.20	34.24	50.0	-15.76
	1960.00	35.13	50.0	-14.87
	1993.80	35.47	50.0	-14.53
GSM	1931.20	34.38	50.0	-15.62
	1960.00	35.48	50.0	-14.52
	1993.80	35.20	50.0	-14.80
W-CDMA	1932.50	33.67	50.0	-16.33
	1960.00	34.97	50.0	-15.03
	1992.50	35.09	50.0	-14.91

**Figure 108 Peak Output Power PCS**

JUDGEMENT: Passed by 14.52 dB

TEST PERSONNEL:

Tester Signature: 

Date: 31.05.11

Typed/Printed Name: A. Sharabi

#### 9.4 Test Equipment Used.

##### Peak Output Power PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

Figure 109 Test Equipment Used

## 10. Occupied Bandwidth PCS

### 10.1 Test Specification

FCC Part 2, Section 1049

### 10.2 Test Procedure

The E.U.T. was set to the applicable test frequency with CDMA, GSM and W-CDMA modulation. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (at the output test) and an appropriate coaxial cable. The spectrum analyzer was set to 100 kHz resolution B.W.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limit, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

The occupied bandwidth of the E.U.T. at the points of 20 dB below maximum peak power was measured and recorded.

Occupied bandwidth measured was repeated in the input terminal of the E.U.T.

CDMA



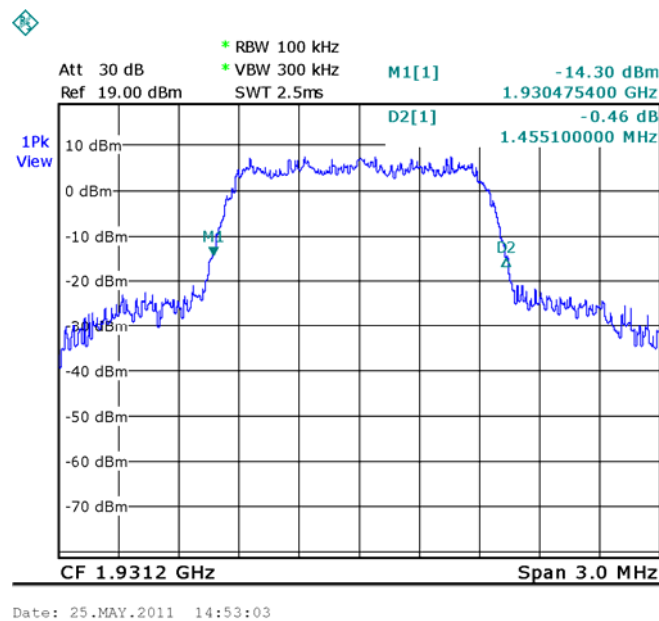


Figure 110.— Input 1931.20 MHz

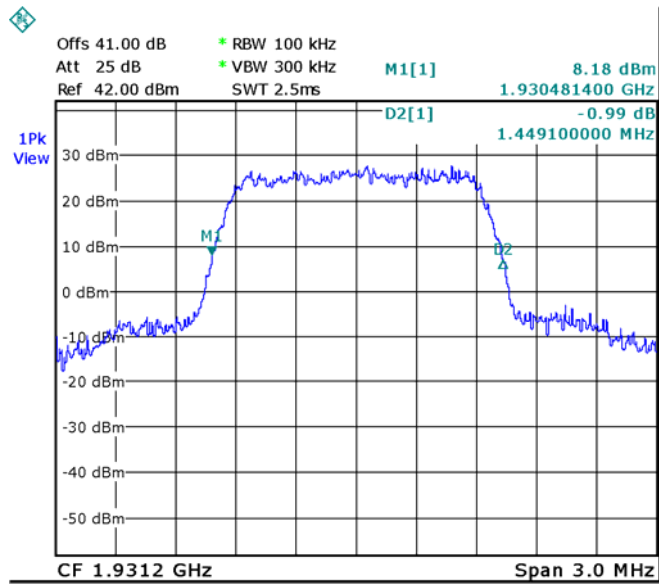


Date: 25.MAY.2011 14:24:48

Figure 111.— Output 1931.20 MHz

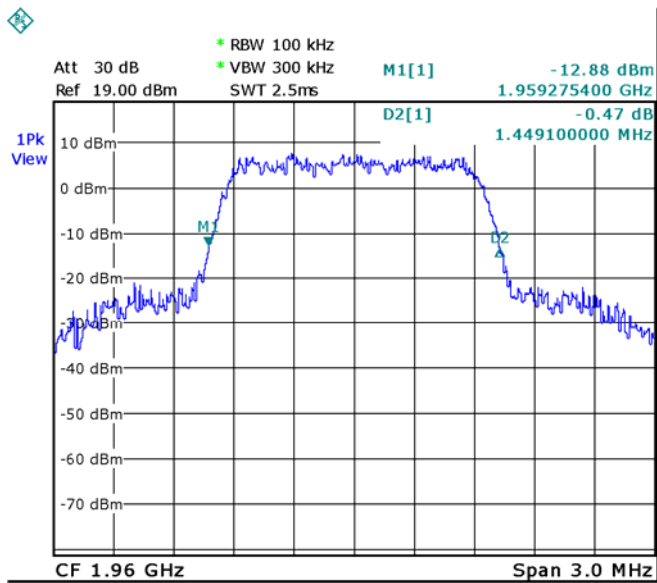


Date: 25.MAY.2011 14:50:32

Figure 112.— Input 1960.00 MHz

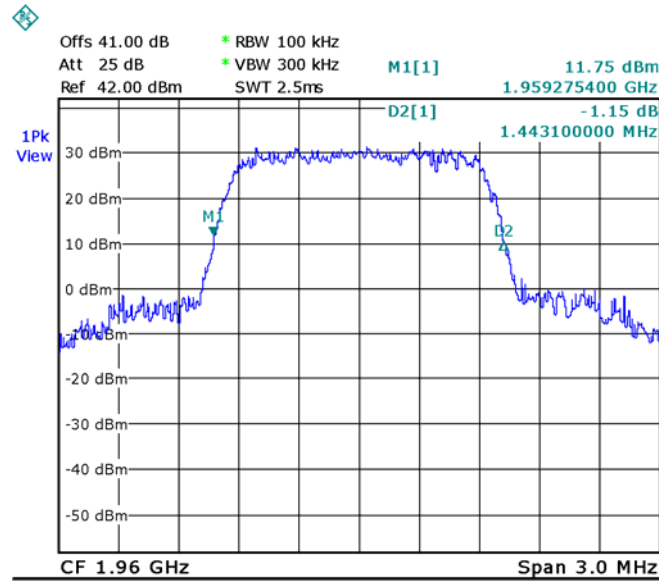

Date: 25.MAY.2011 14:26:47

Figure 113.— Output 1960.00 MHz

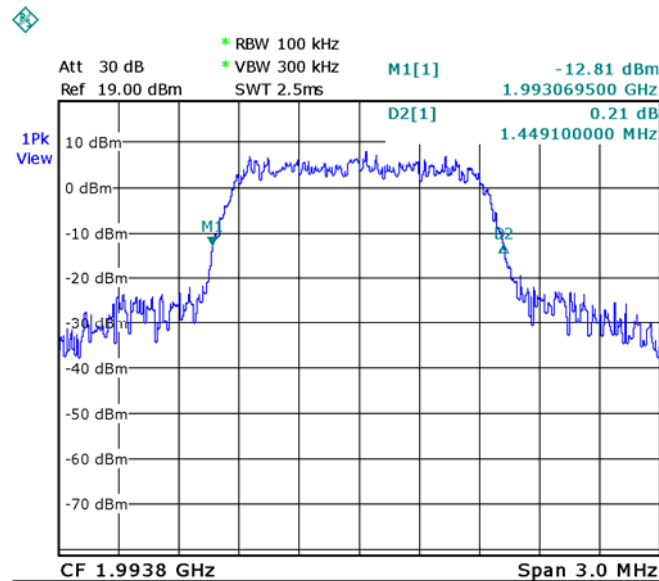

Date: 25.MAY.2011 14:48:59

Figure 114.— Input 1993.80 MHz

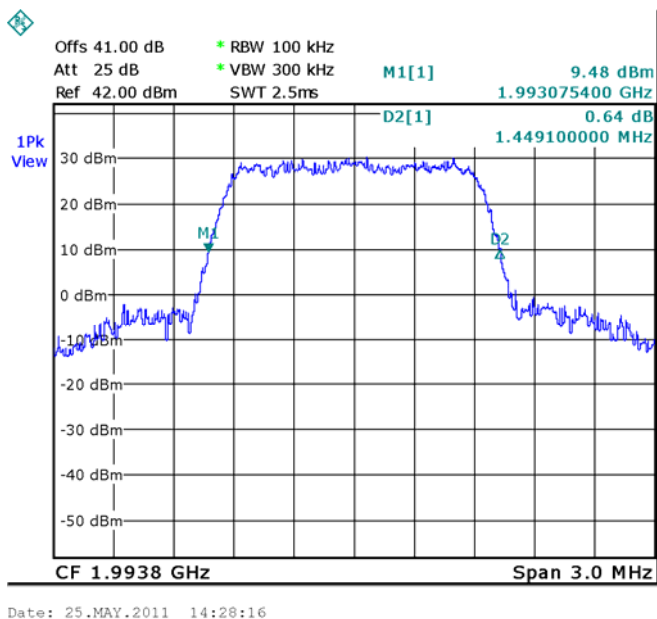


Figure 115.— Output 1993.80 MHz

GSM:

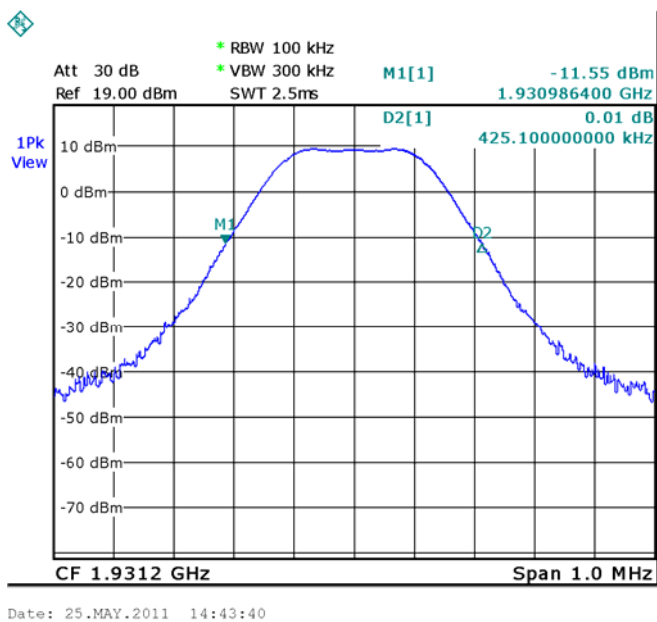


Figure 116.— Input 1931.20 MHz

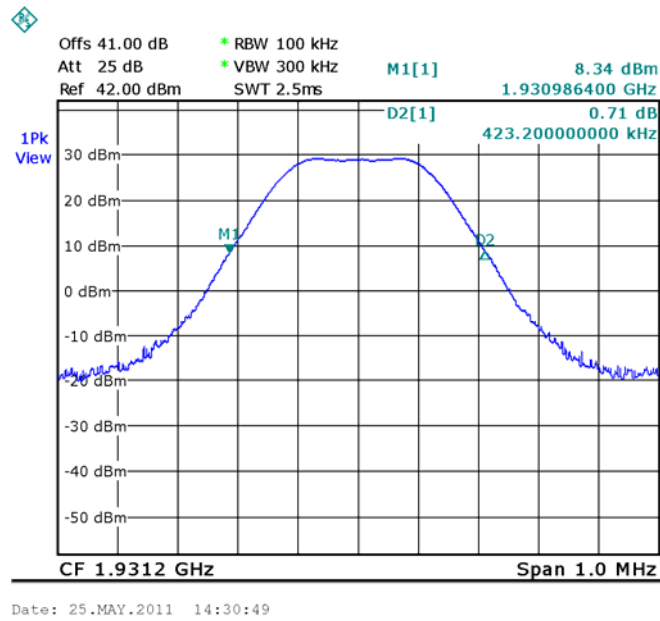


Figure 117.— Output 1931.20 MHz



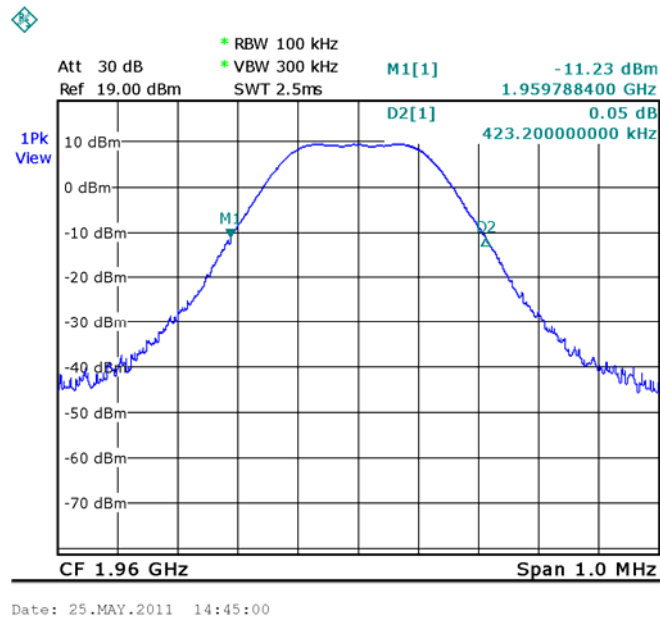


Figure 118.— Input 1960.00 MHz

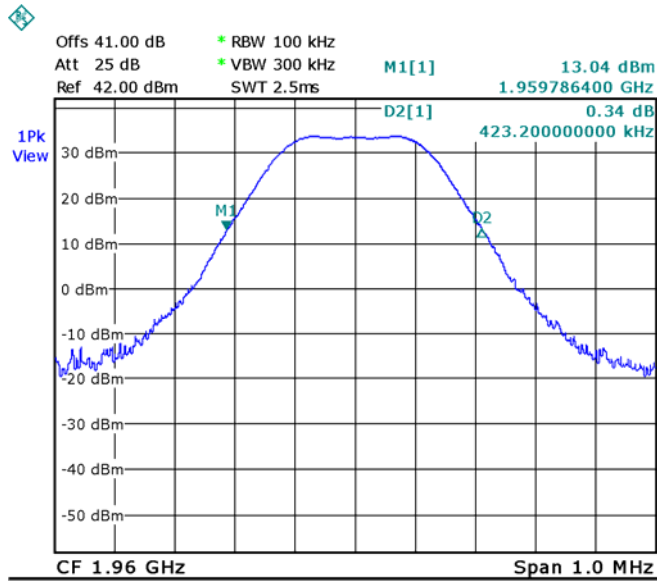

Date: 25.MAY.2011 14:32:03

Figure 119.— Output 1960.00 MHz

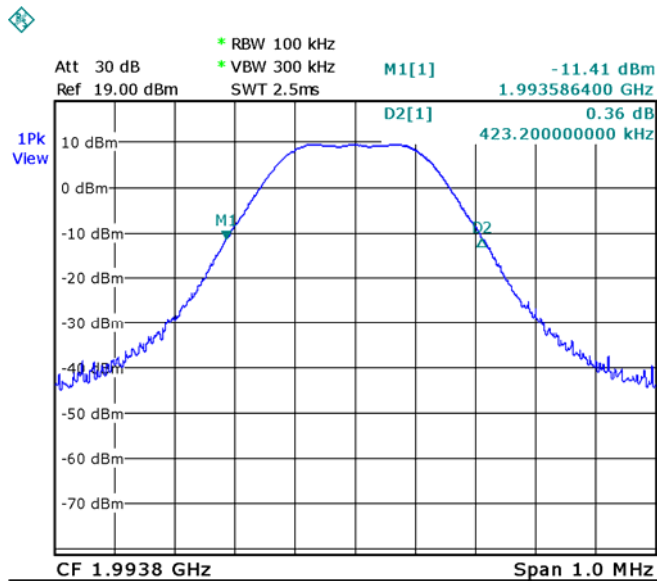

Date: 25.MAY.2011 14:47:01

Figure 120.— Input 1993.80 MHz



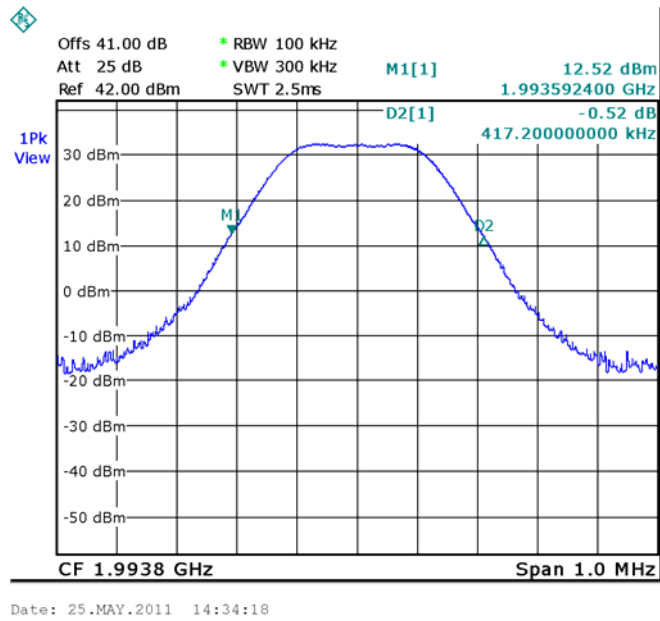


Figure 121.— Output 1993.80 MHz

W-CDMA:

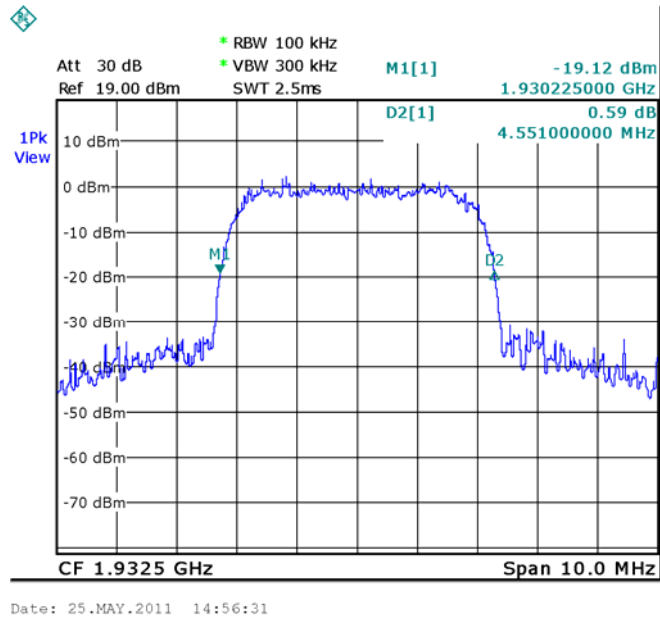


Figure 122.— Input 1932.50 MHz

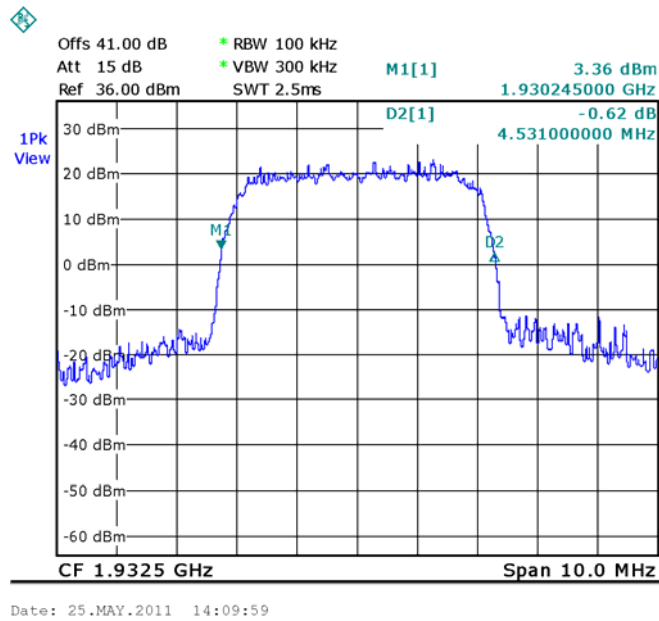


Figure 123.— Output 1932.50 MHz



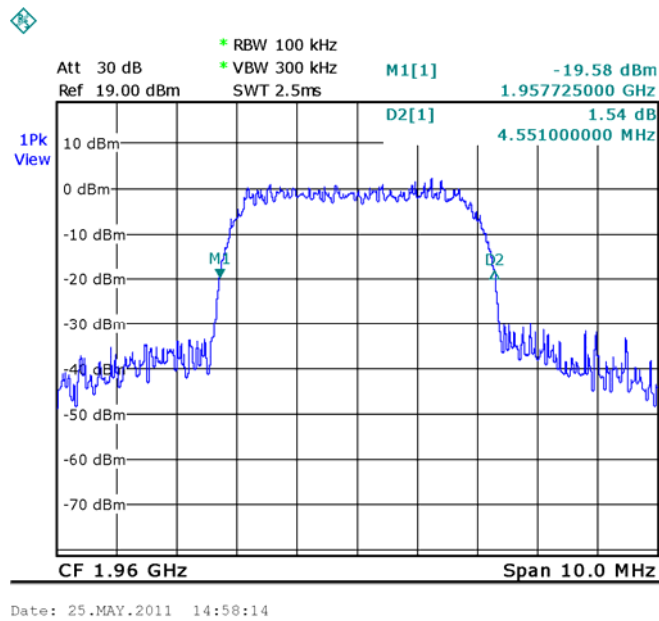


Figure 124.— Input 1960.00 MHz

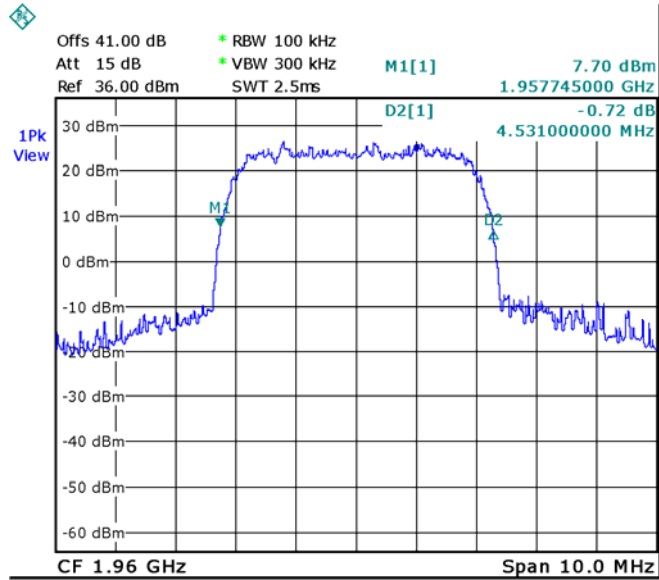

Date: 25.MAY.2011 14:18:29

Figure 125.— Output 1960.00 MHz

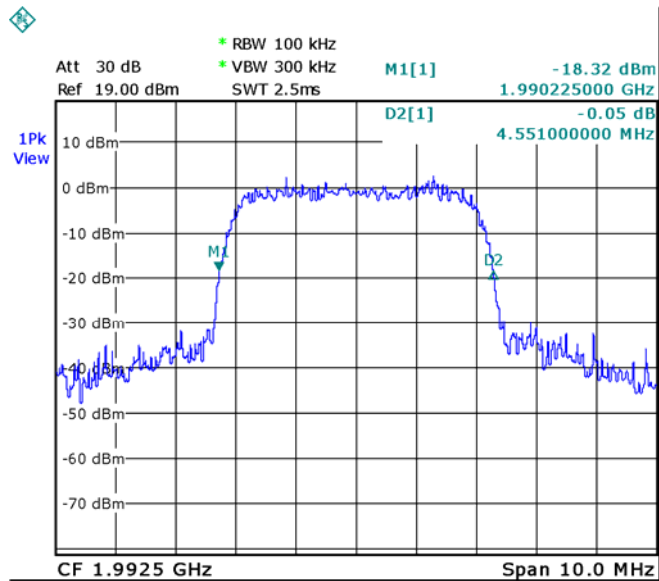

Date: 25.MAY.2011 15:00:11

Figure 126.— Input 1992.50 MHz

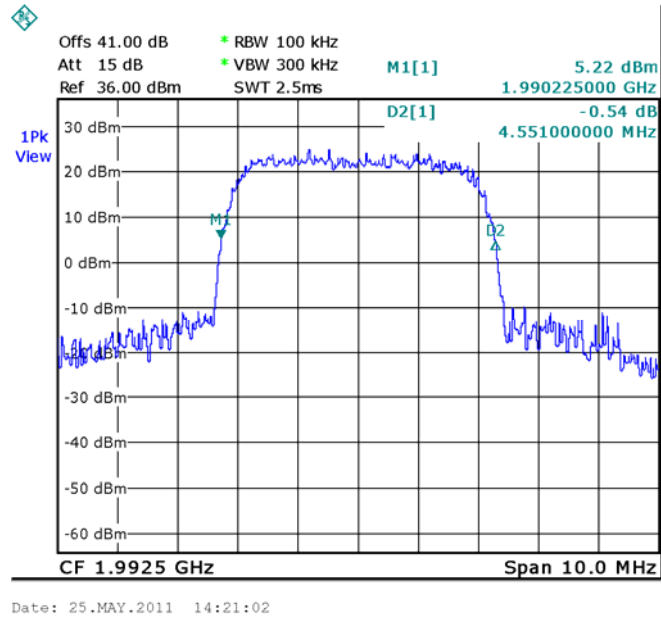


Figure 127.— Output 1992.50 MHz

### 10.3 Results Table

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 2, Section 1049

Modulation		Operating Frequency (MHz)	Reading (MHz)
CDMA	Input	1931.20	1.455
	Output	1931.20	1.449
	Input	1960.00	1.449
	Output	1960.0	1.443
	Input	1993.80	1.449
	Output	1993.80	1.449
GSM	Input	1931.20	0.425
	Output	1931.20	0.423
	Input	1960.00	0.423
	Output	1960.00	0.423
	Input	1993.80	0.423
	Output	1993.80	0.417
W-CDMA	Input	1932.50	4.551
	Output	1932.50	4.531
	Input	1960.00	4.551
	Output	1960.00	4.531
	Input	1992.50	4.551
	Output	1992.50	4.551

**Figure 128 Occupied Bandwidth PCS**

TEST PERSONNEL:

Tester Signature:  \_\_\_\_\_

Date: 31.05.11

Typed/Printed Name: A. Sharabi

## 10.4 Test Equipment Used.

### Occupied Bandwidth PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 129 Test Equipment Used**

## 11. Out of Band Emissions at Antenna Terminals PCS

### 11.1 Test Specification

FCC Part 24, Subpart E, Section 238; FCC Part 2.1051

### 11.2 Test procedure

The power of any emission outside of the authorized operating frequency ranges (1930-1990 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding  $-13\text{dBm}$ .

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (41 dB).

The spectrum analyzer was set to 1 kHz RBW for the frequency range of 9 – 150 kHz, 10 kHz RBW for the frequency range of 150 kHz – 1 MHz, and 100 kHz RBW for the frequency range of 1 MHz – 20 GHz.

Signal power was +10 dBm to EUT.

CDMA:

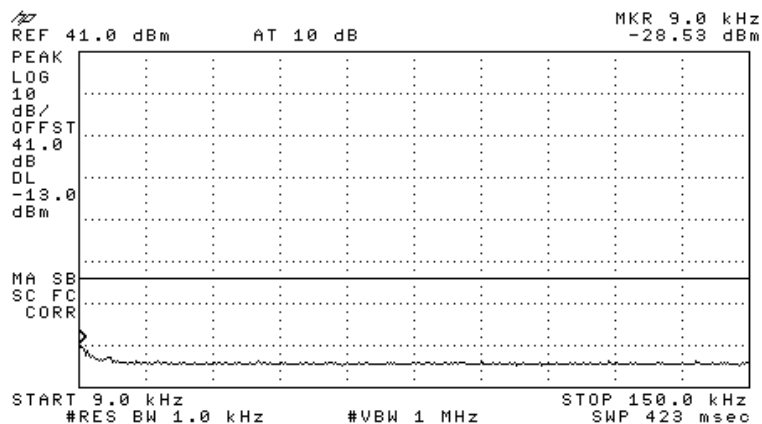


Figure 130.— 1931.20 MHz

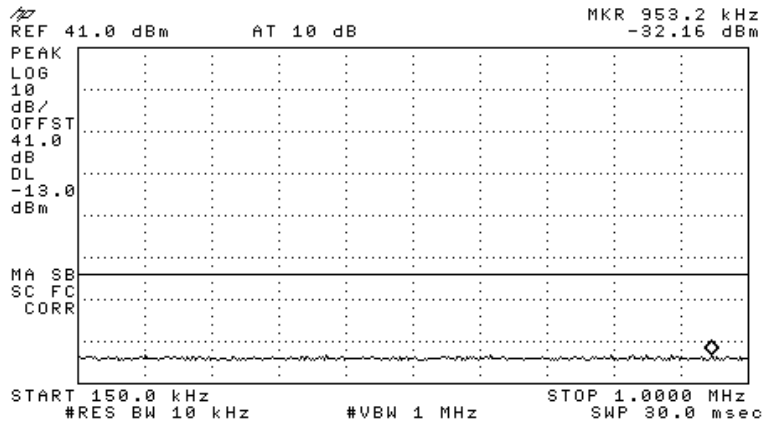


Figure 131.— 1931.20 MHz

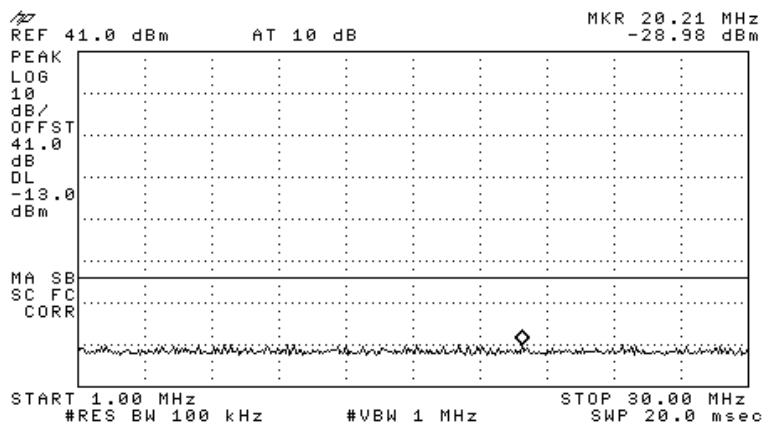


Figure 132.— 1931.20 MHz



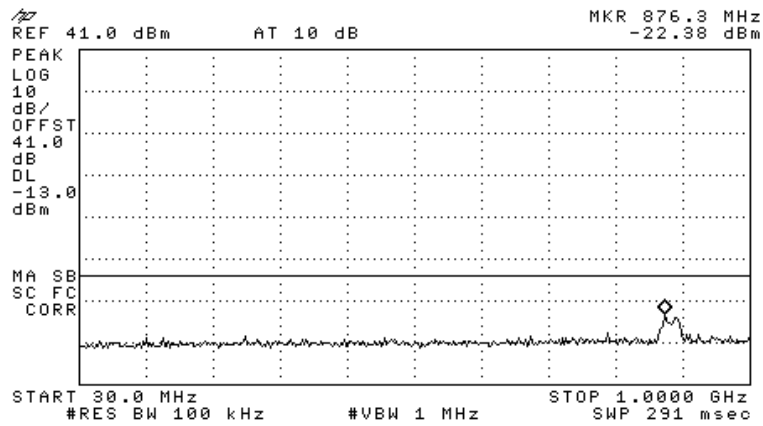


Figure 133.— 1931.20 MHz

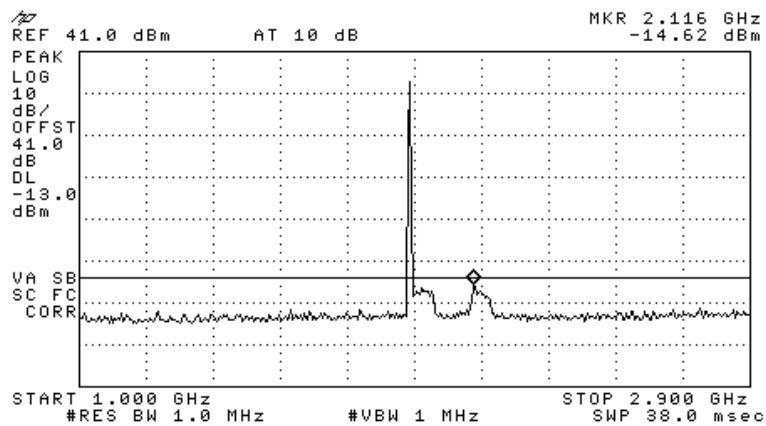


Figure 134.— 1931.20 MHz

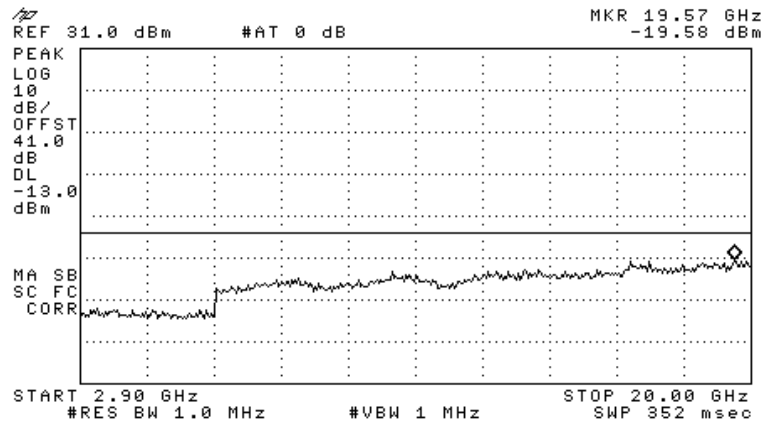


Figure 135.— 1931.20 MHz

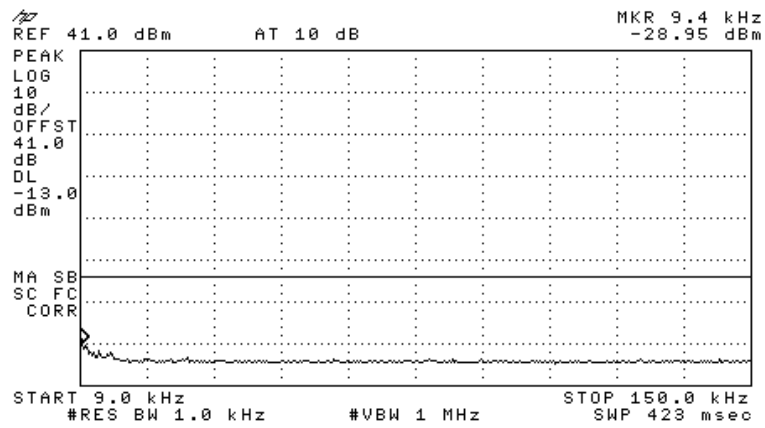


Figure 136.— 1960.00 MHz

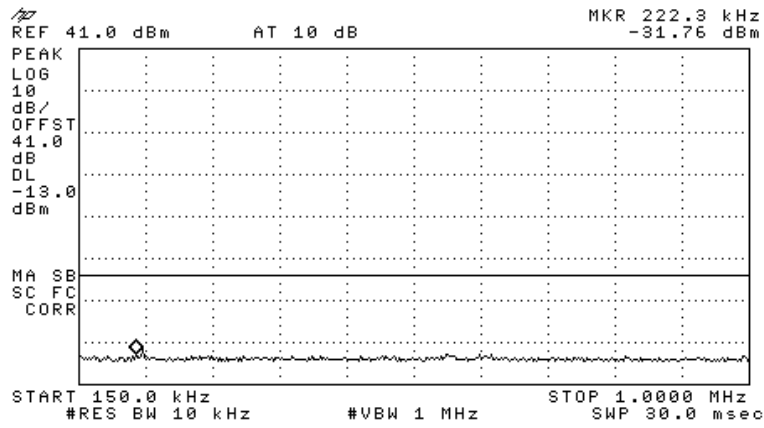


Figure 137.— 1960.00 MHz

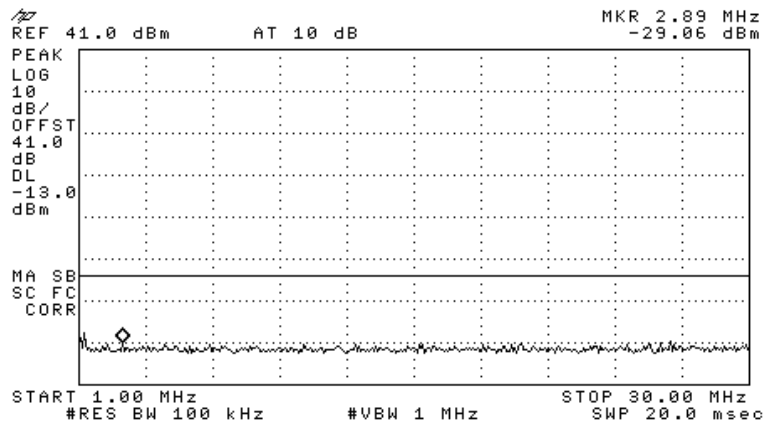


Figure 138.— 1960.00 MHz

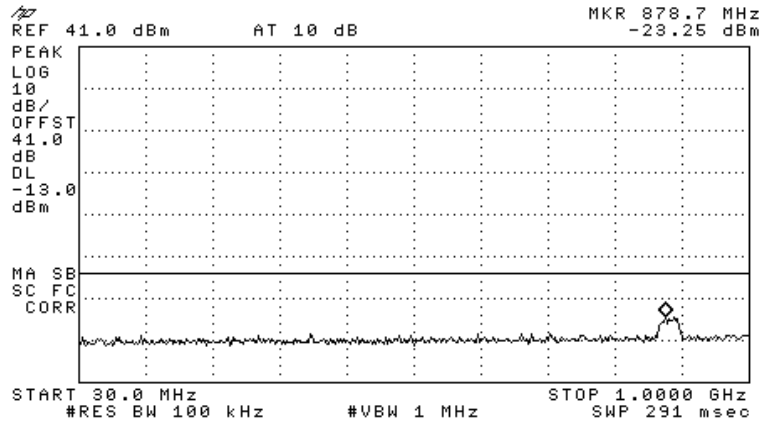


Figure 139.— 1960.00 MHz

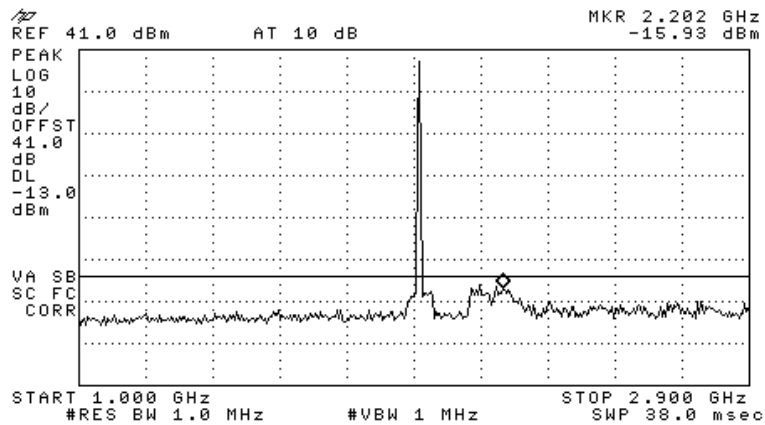


Figure 140.— 1960.00 MHz

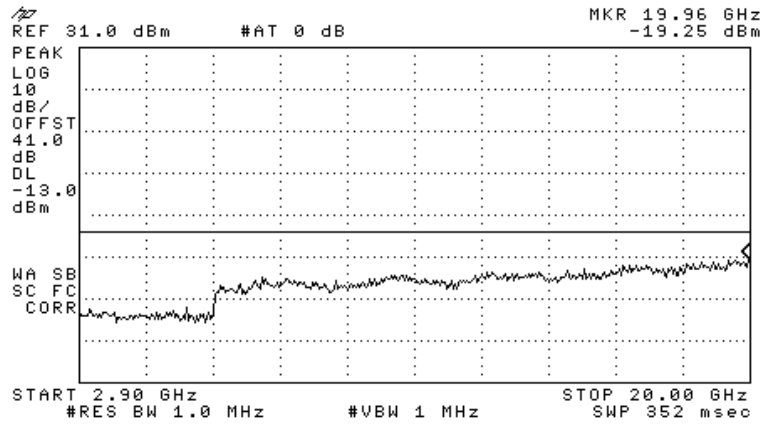


Figure 141.— 1960.00 MHz

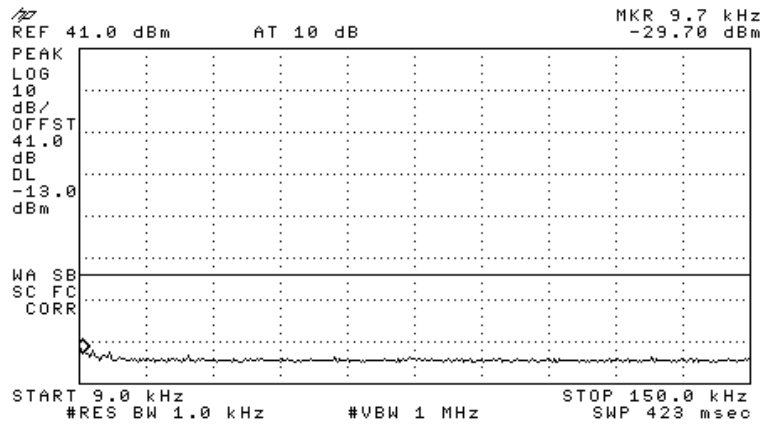


Figure 142.— 1993.80 MHz

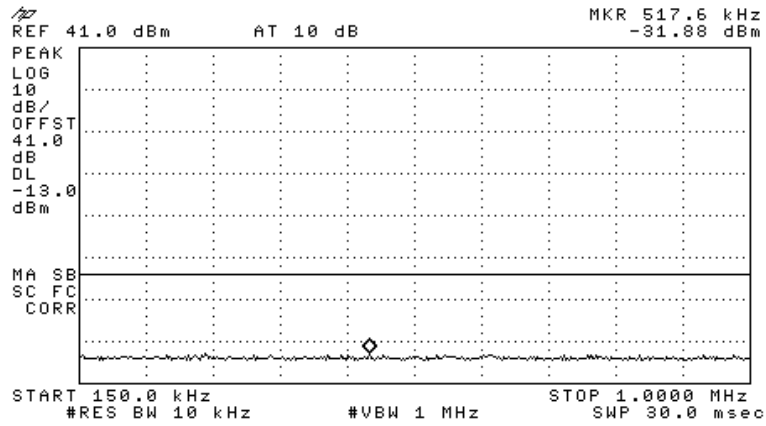


Figure 143.— 1993.80 MHz

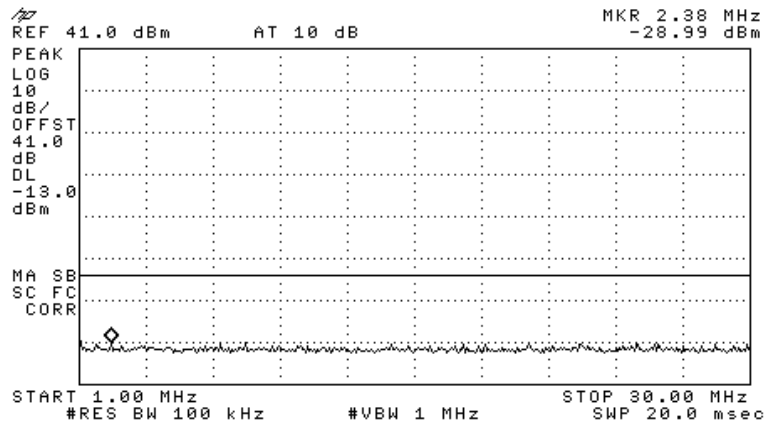


Figure 144.— 1993.80 MHz

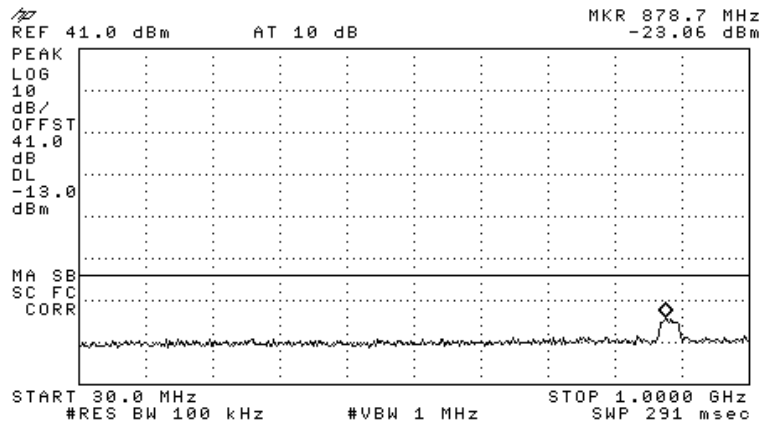


Figure 145.— 1993.80 MHz

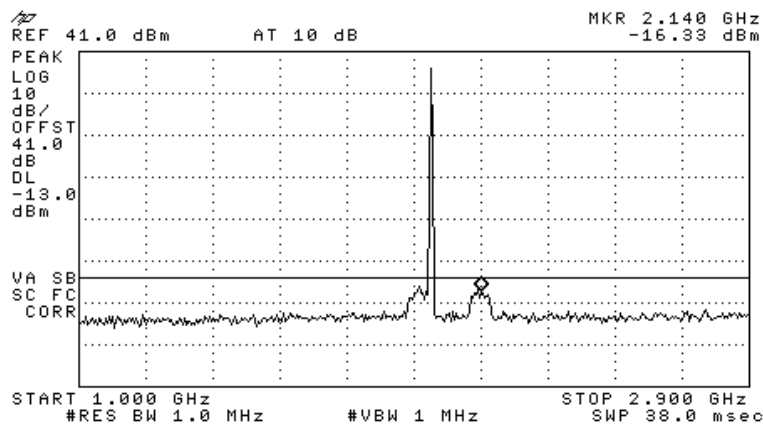


Figure 146.— 1993.80 MHz

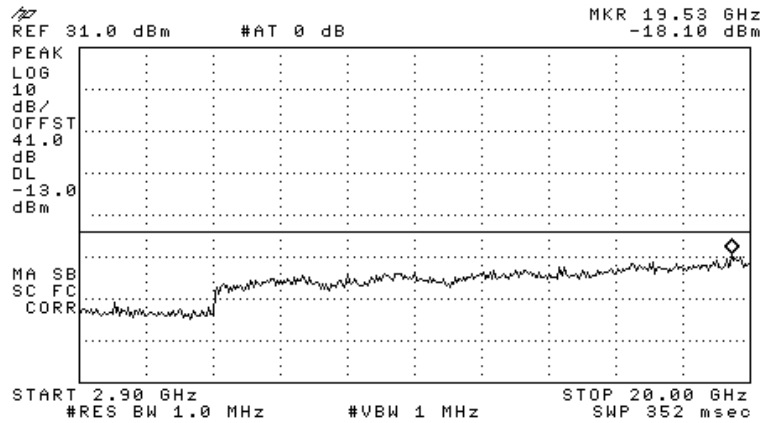


Figure 147.— 1993.80 MHz

GSM:

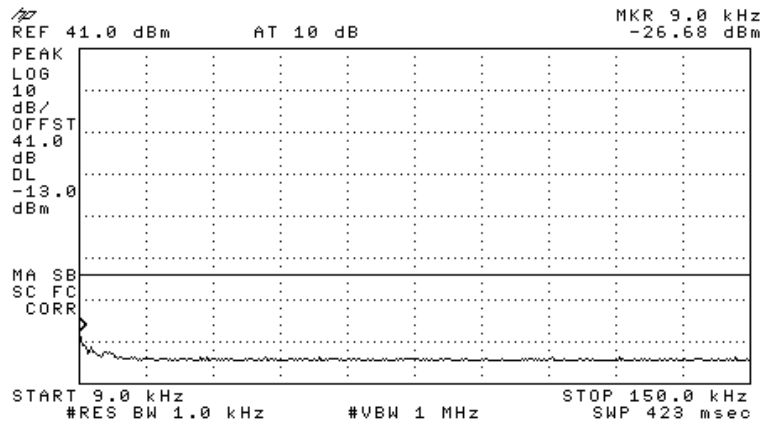


Figure 148.— 1931.20 MHz



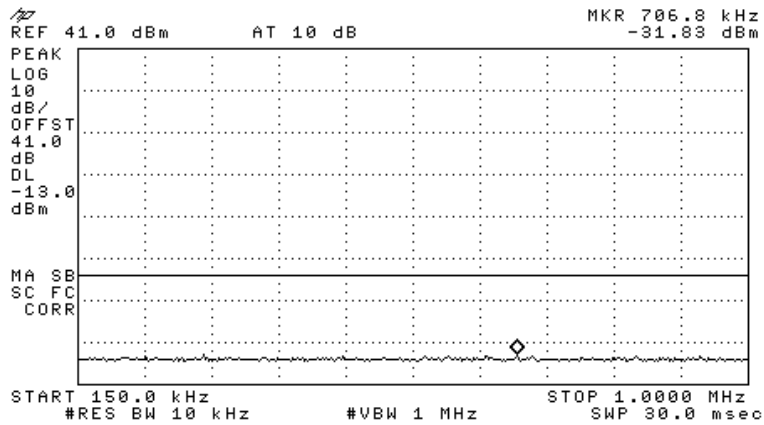


Figure 149.— 1931.20 MHz

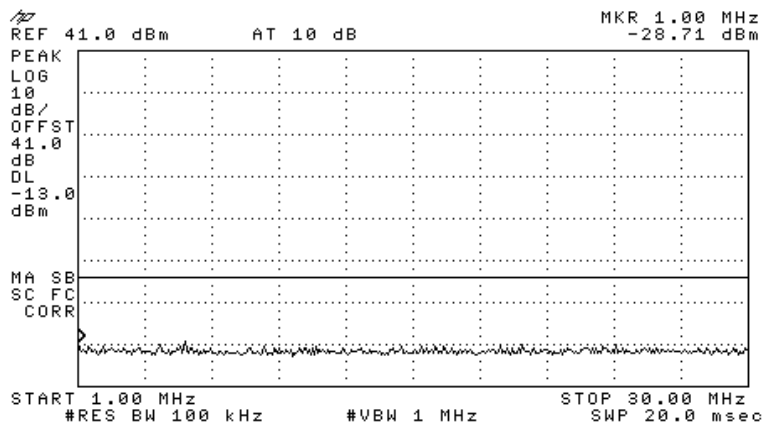


Figure 150.— 1931.20 MHz

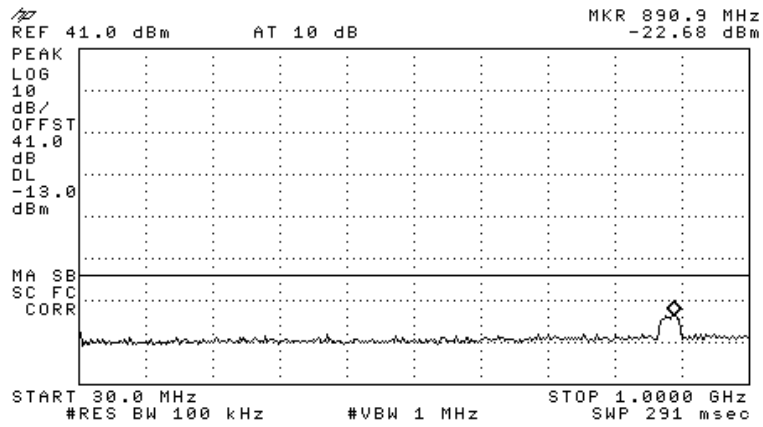


Figure 151.— 1931.20 MHz

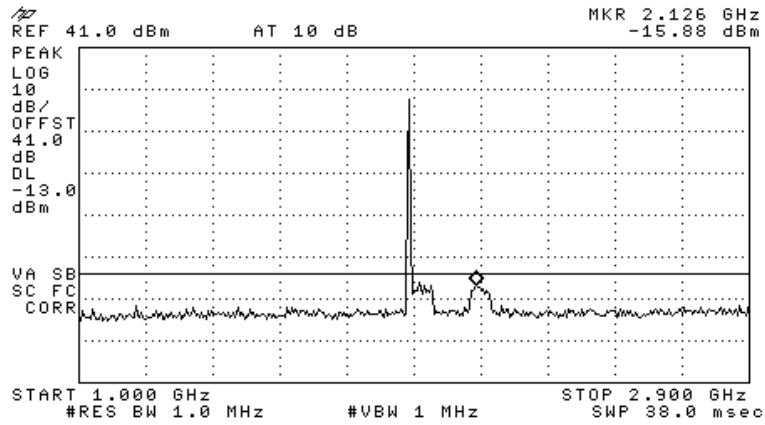


Figure 152.— 1931.20 MHz

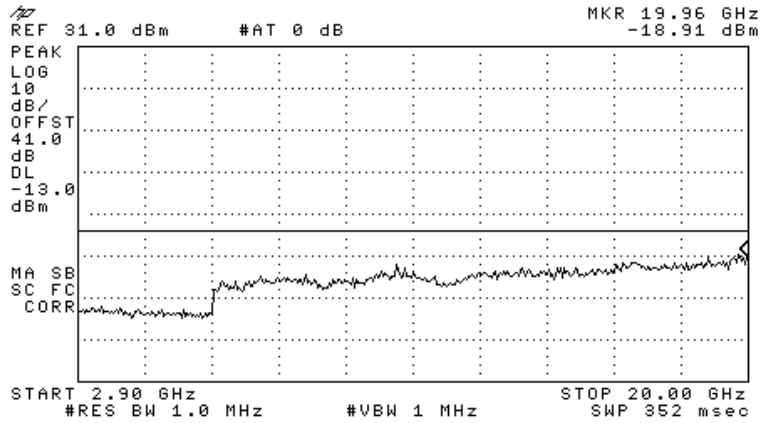


Figure 153.— 1931.20 MHz

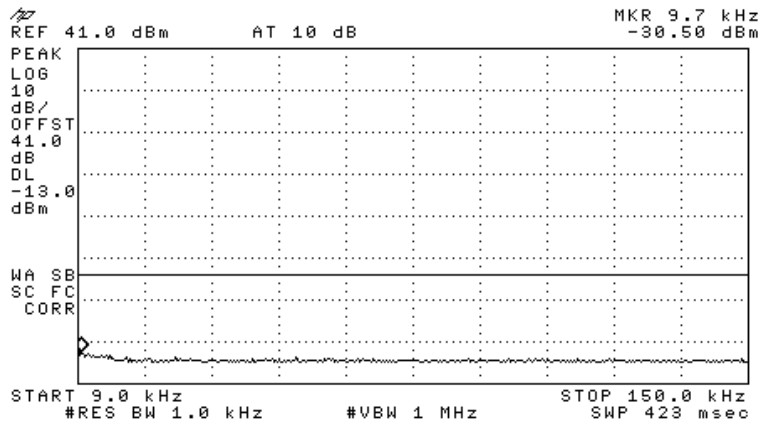


Figure 154.— 1960.00 MHz

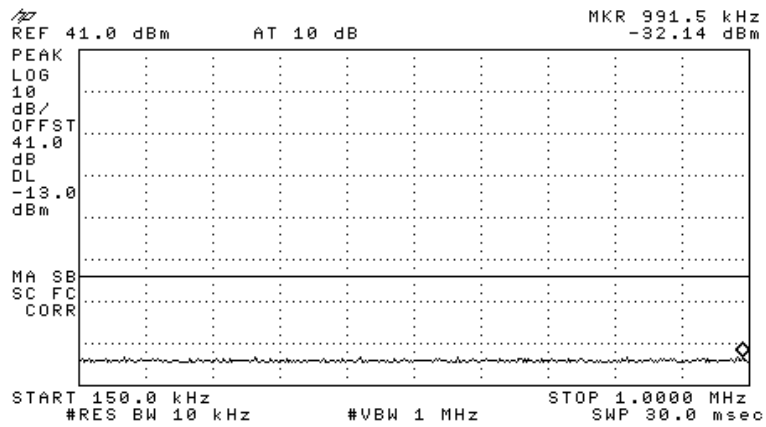


Figure 155.— 1960.00 MHz

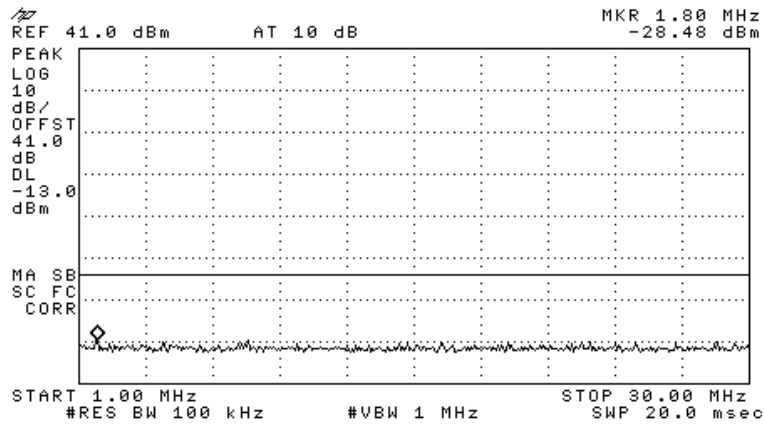


Figure 156.— 1960.00 MHz

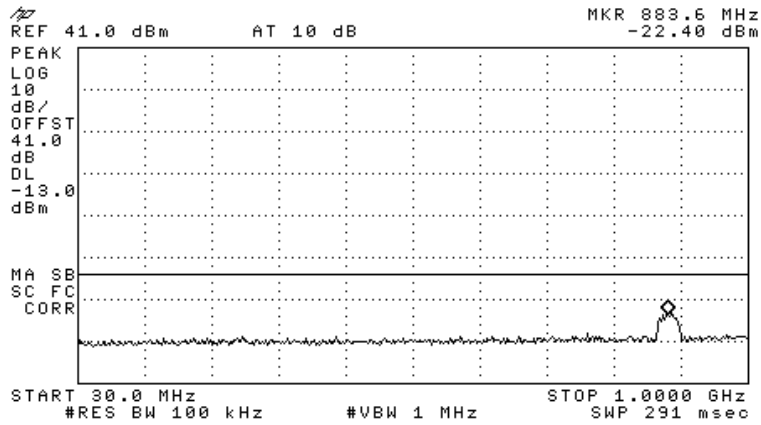


Figure 157.— 1960.00 MHz

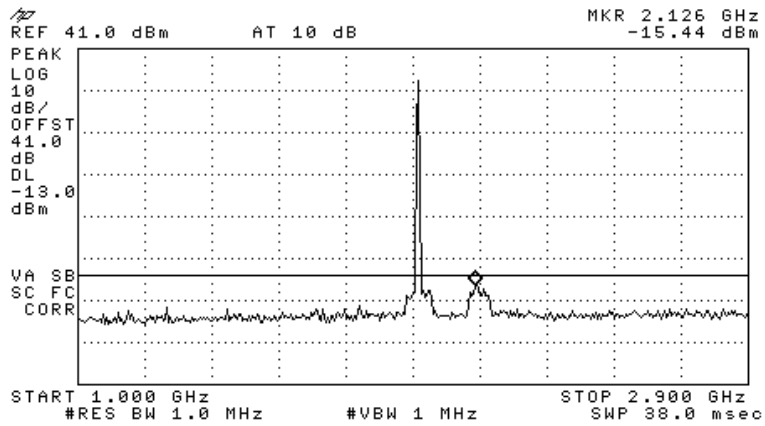


Figure 158.— 1960.00 MHz

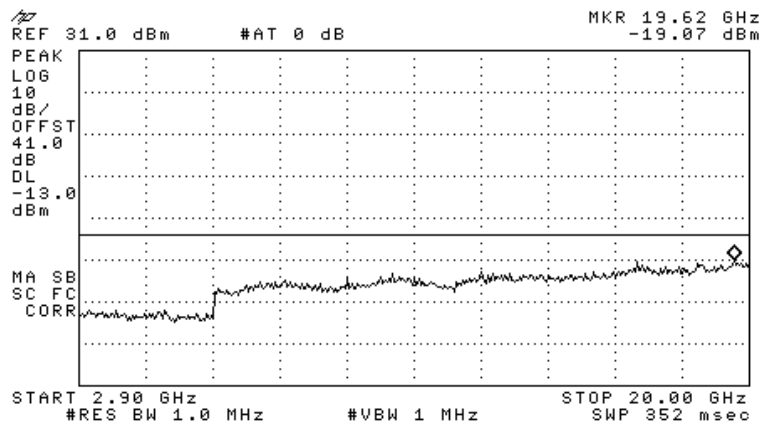


Figure 159.— 1960.00 MHz

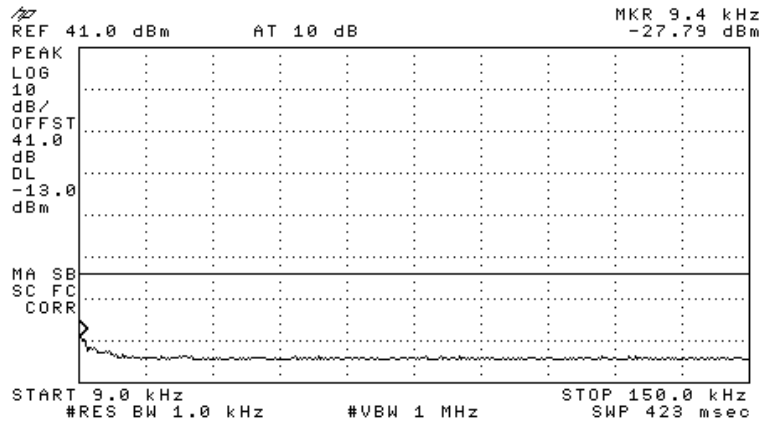


Figure 160.— 1993.80 MHz

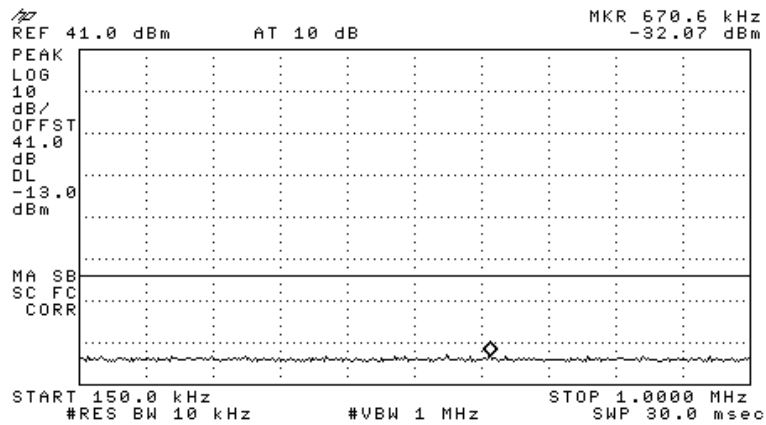


Figure 161.— 1993.80 MHz

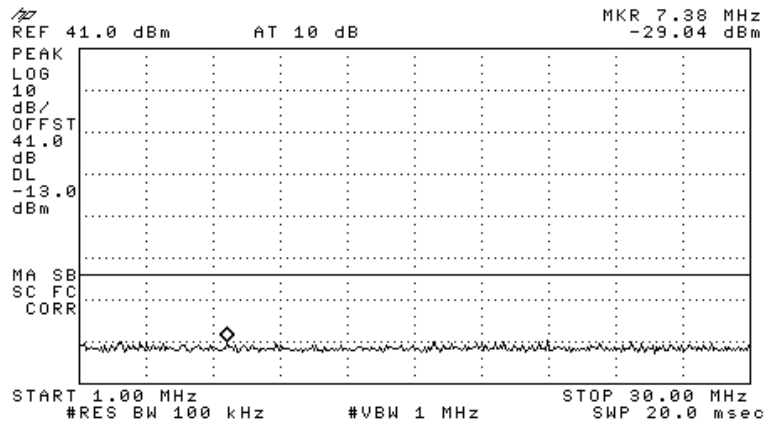


Figure 162.— 1993.80 MHz

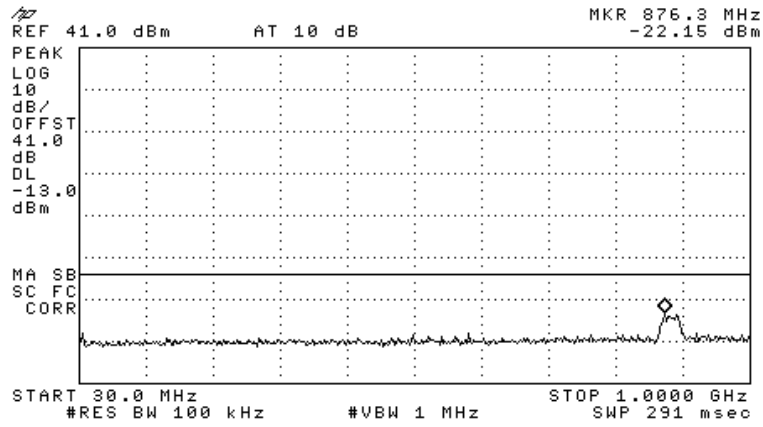


Figure 163.— 1993.80 MHz

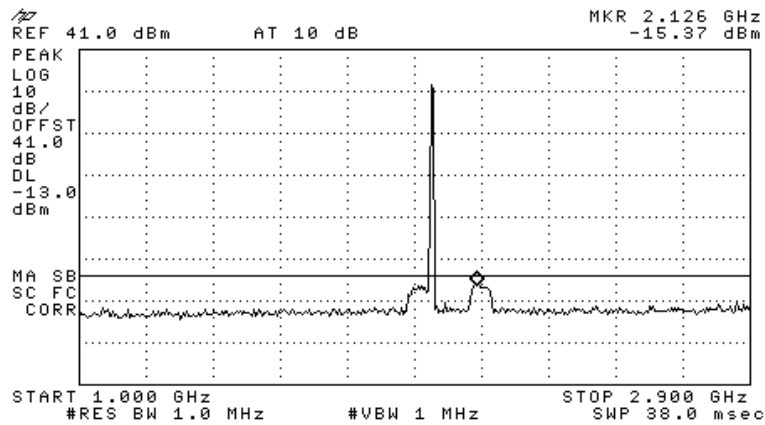


Figure 164.— 1993.80 MHz



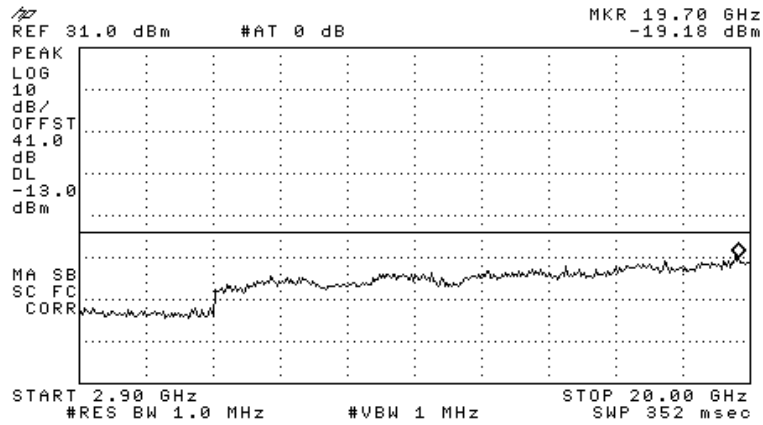


Figure 165.— 1993.80 MHz

W-CDMA:

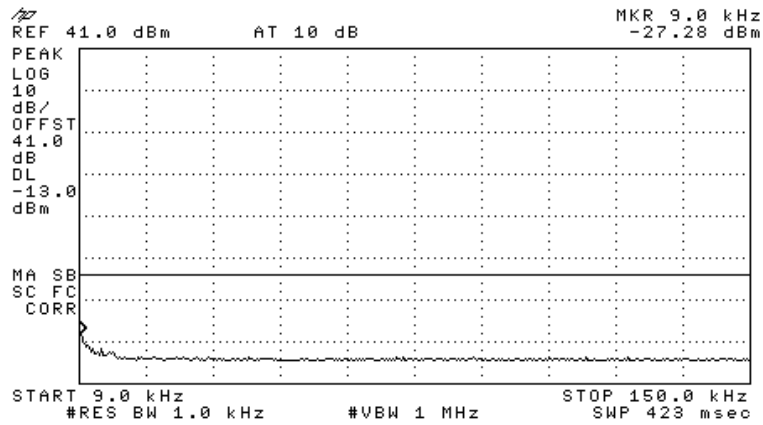


Figure 166.— 1932.50 MHz

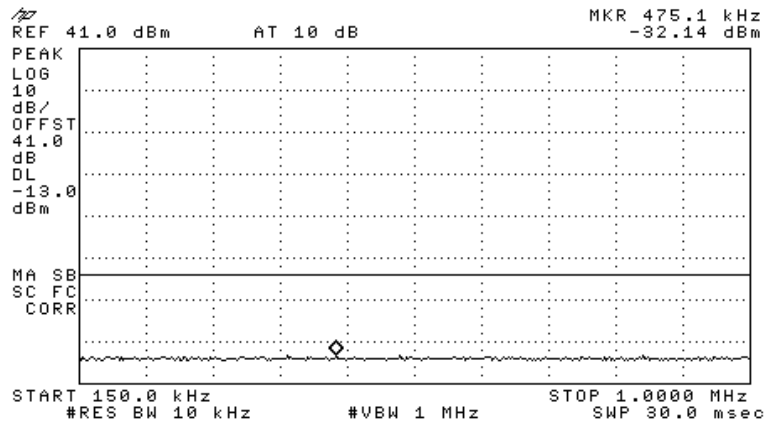


Figure 167.— 1932.50 MHz

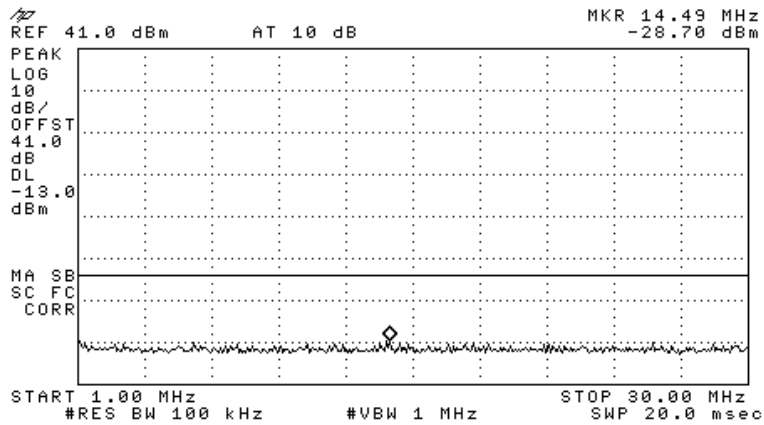


Figure 168.— 1932.50 MHz

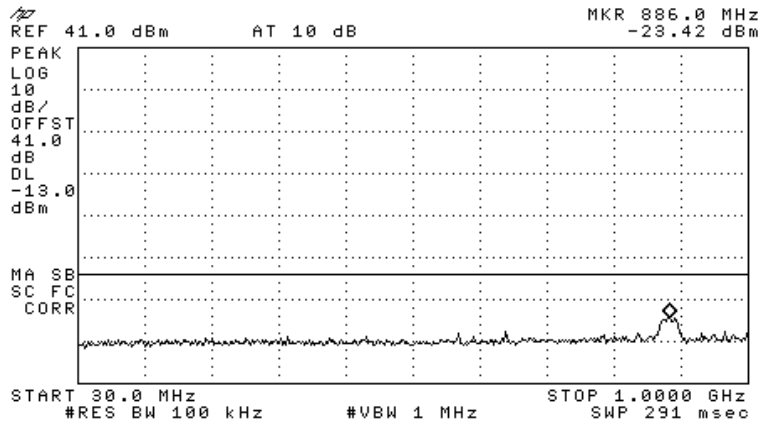


Figure 169.— 1932.50 MHz

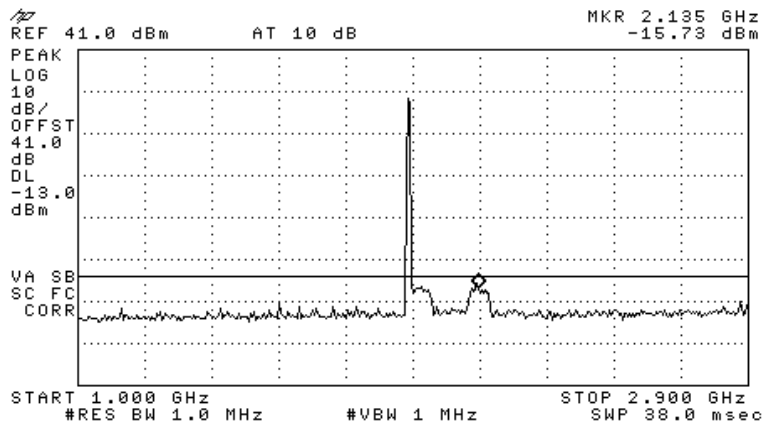


Figure 170.— 1932.50 MHz

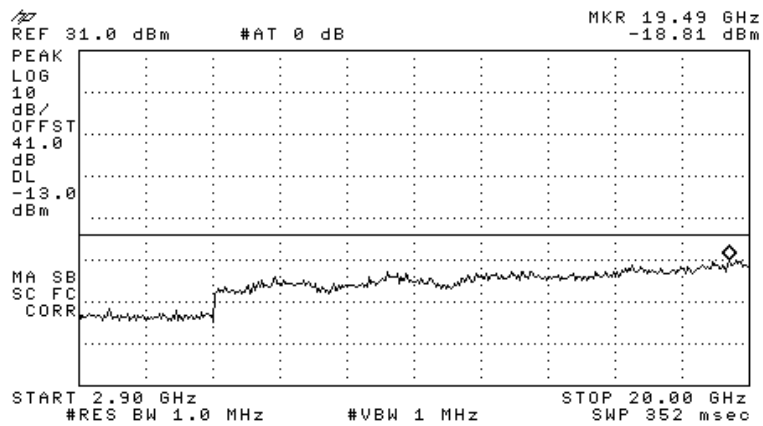


Figure 171.— 1932.50 MHz

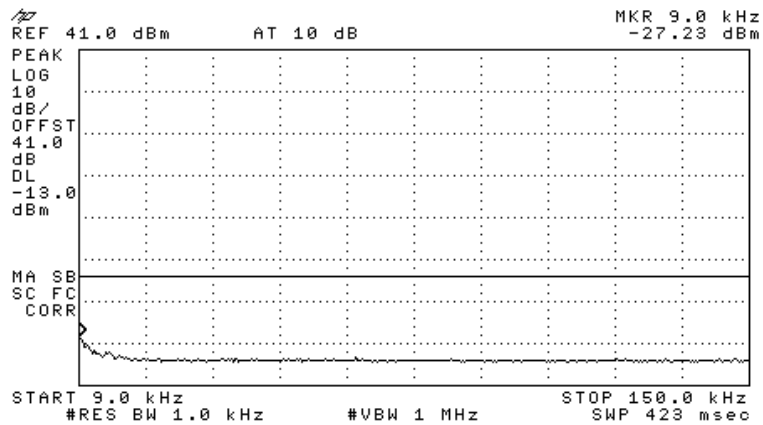


Figure 172.— 1960.00 MHz

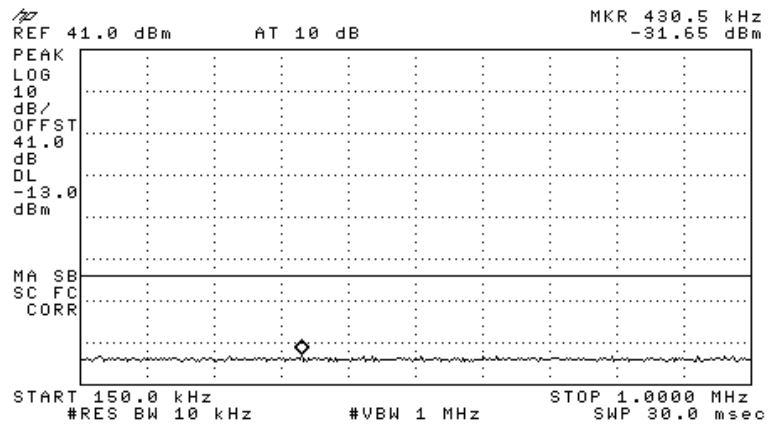


Figure 173.— 1960.00 MHz

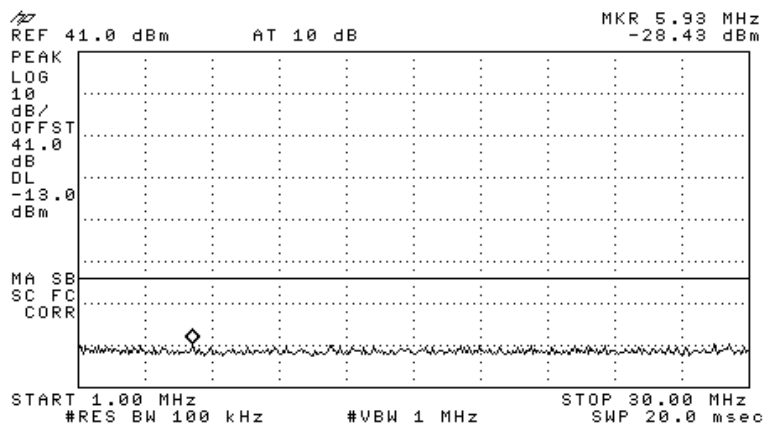


Figure 174.— 1960.00 MHz

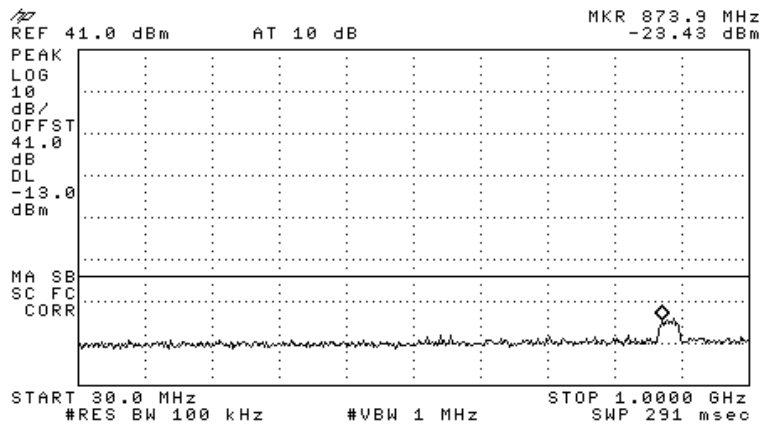


Figure 175.— 1960.00 MHz

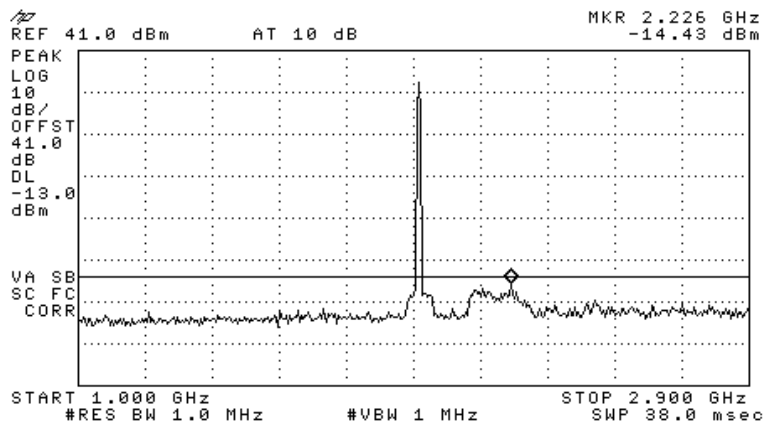


Figure 176.— 1960.00 MHz

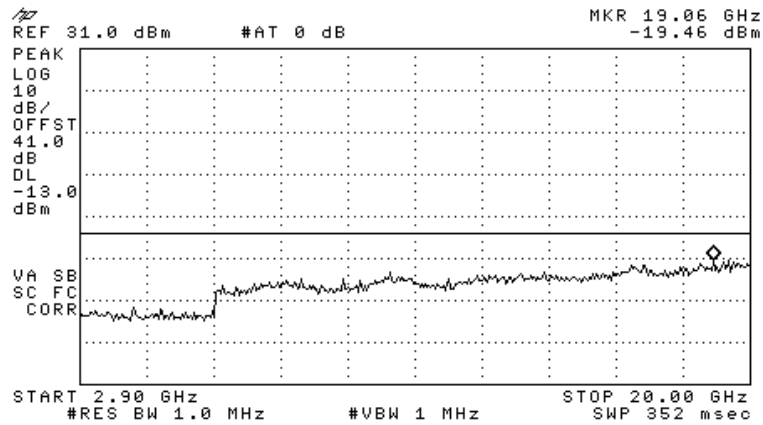


Figure 177.— 1960.00 MHz

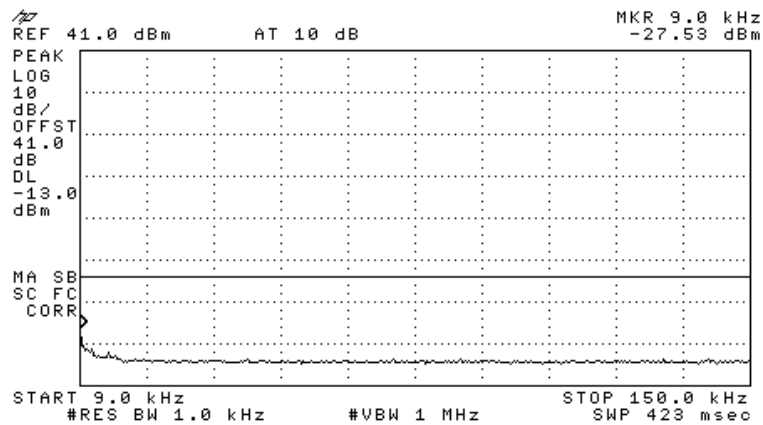


Figure 178.— 1992.50 MHz

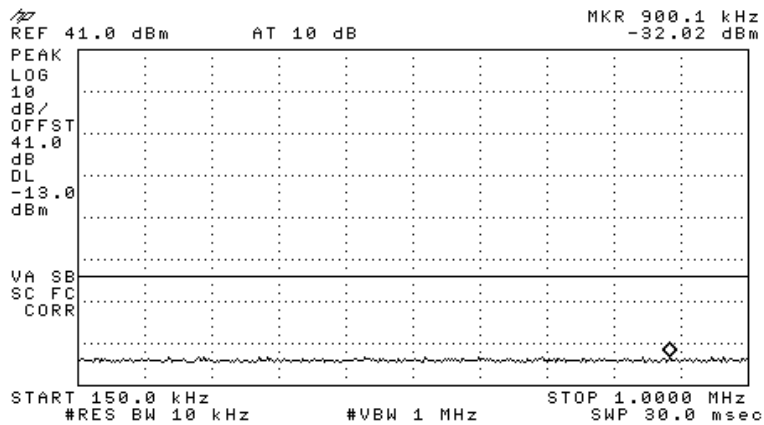


Figure 179.— 1992.50 MHz

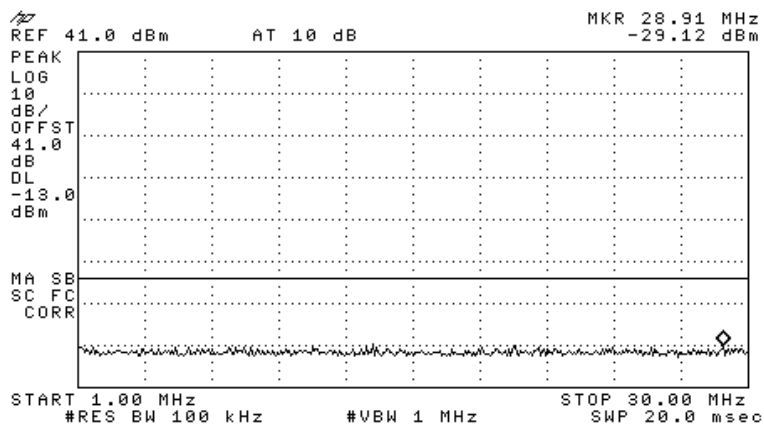


Figure 180.— 1992.50 MHz



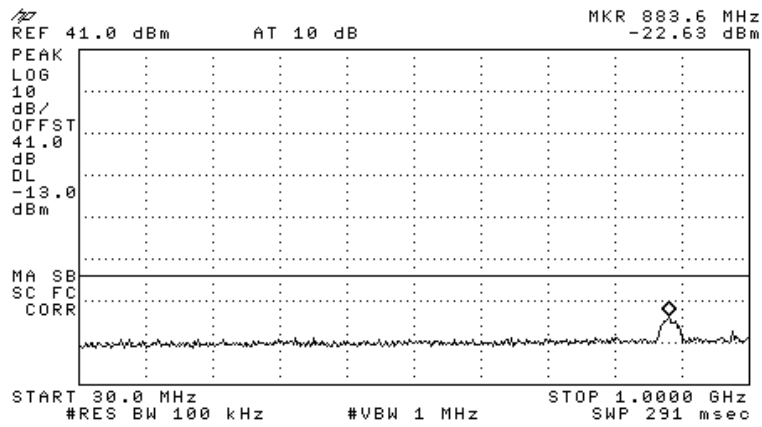


Figure 181.— 1992.50 MHz

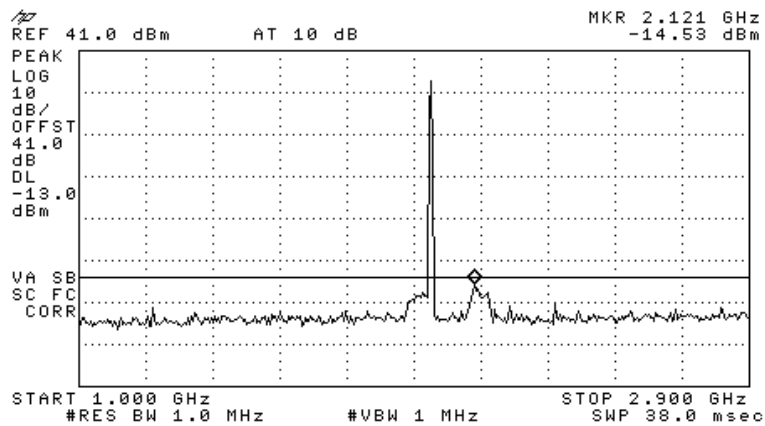


Figure 182.— 1992.50 MHz

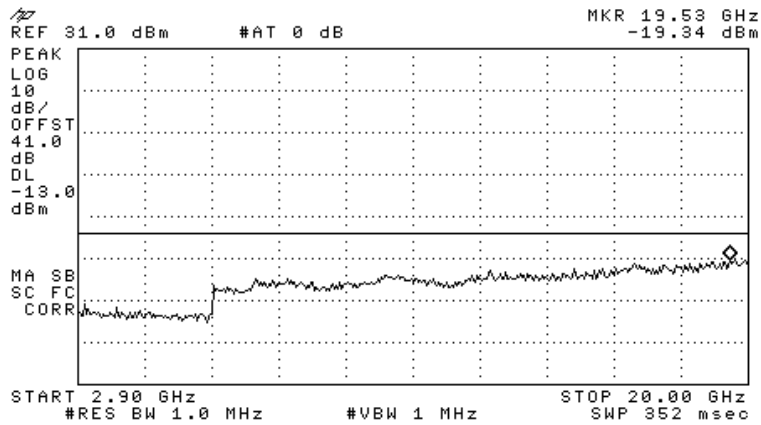


Figure 183.— 1992.50 MHz

### 11.3 Results Table


E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 24, Subpart E, Section 238; Part 2 Section 1051

Modulation	Operation Frequency (MHz)	Frequency (GHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
CDMA	1931.20	2.116	-14.62	-13.0	-1.62
	1960.00	2.202	-15.93	-13.0	-2.93
	1993.80	2.140	-16.33	-13.0	-3.33
GSM	1931.20	2.126	-15.88	-13.0	-2.88
	1960.00	2.126	-15.44	-13.0	-2.44
	1993.80	2.126	-15.37	-13.0	-2.37
W-CDMA	1932.50	2.135	-15.73	-13.0	-2.73
	1960.00	2.226	-14.43	-13.0	-1.43
	1992.50	2.121	-14.53	-13.0	-1.53

Figure 184 Out of Band Emission Results PCS

JUDGEMENT: Passed by 1.43 dB

TEST PERSONNEL:

Tester Signature: 

Date: 31.05.11

Typed/Printed Name: A. Sharabi

#### 11.4 Test Equipment Used.

Out of Band Emission at Antenna Terminals PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8529L	3826A01204	February 21, 2011	1 year
Signal Generator	HP	E4438C ESG-	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

Figure 185 Test Equipment Used

## 12. Band Edge Spectrum PCS

### 12.1 Test Specification

FCC Part 24, Subpart E, Section 238; FCC Part 2.1051

### 12.2 Test procedure

For CDMA and GSM:

Enclosed are spectrum analyzer plots for the lowest operation frequency (1931.2 MHz) and the highest operation frequency (1993.8 MHz) in which the E.U.T. is planned to be used.

For WCDMA:

Enclosed are spectrum analyzer plots for the lowest operation frequency (1932.5 MHz) and the highest operation frequency (1992.5 MHz) in which the E.U.T. is planned to be used.

The power of any emission outside of the authorized operating frequency ranges (1930.00-1990.00 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding  $-13$  dBm.

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (21 dB).

The spectrum analyzer was set to 100 kHz R.B.W.

CDMA:

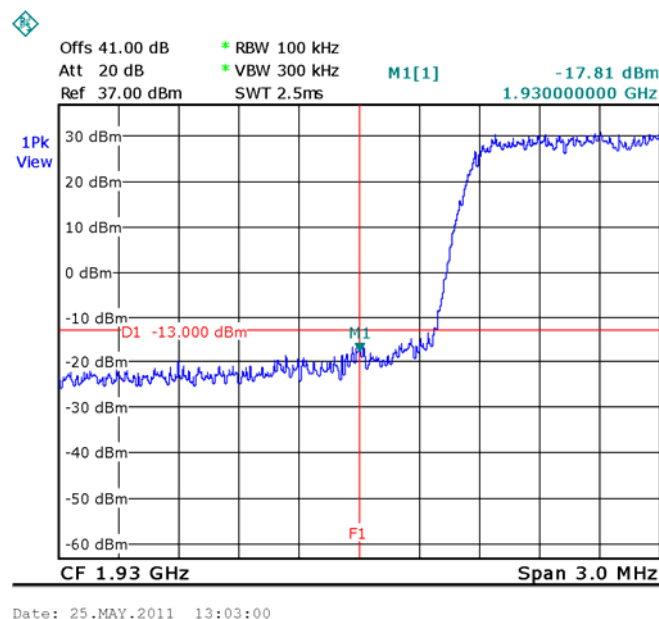


Figure 186.— 1931.20 MHz

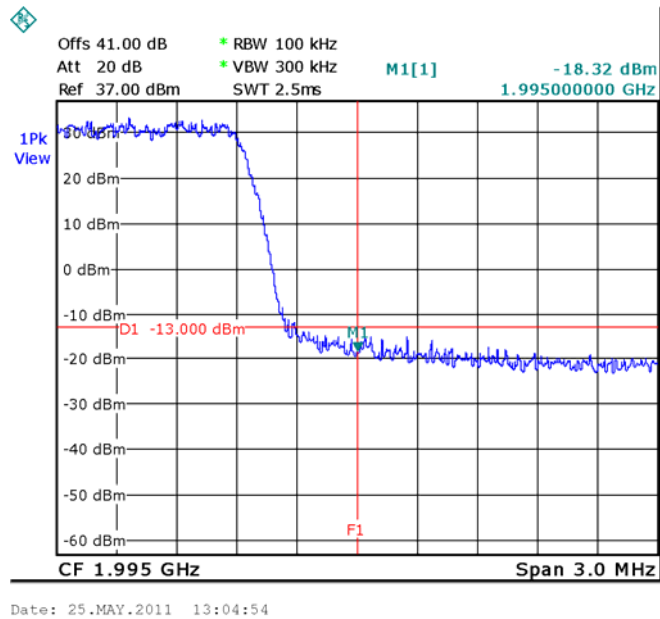


Figure 187.— 1993.80 MHz

GSM:

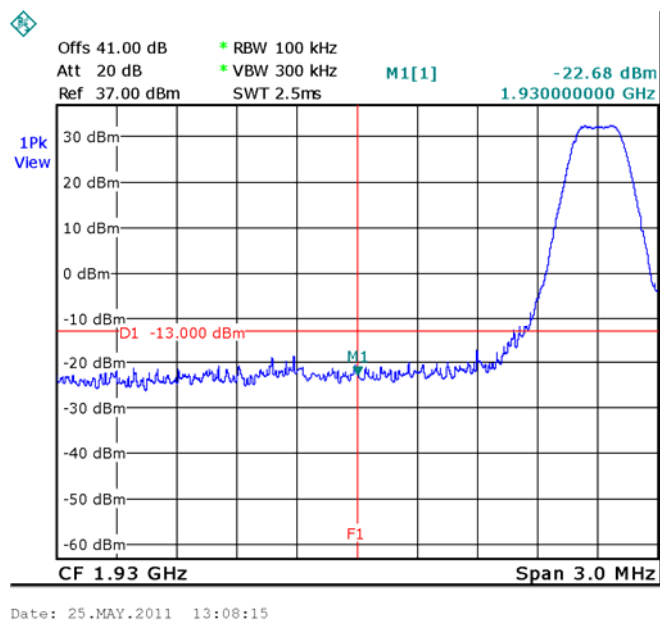


Figure 188.— 1931.20 MHz

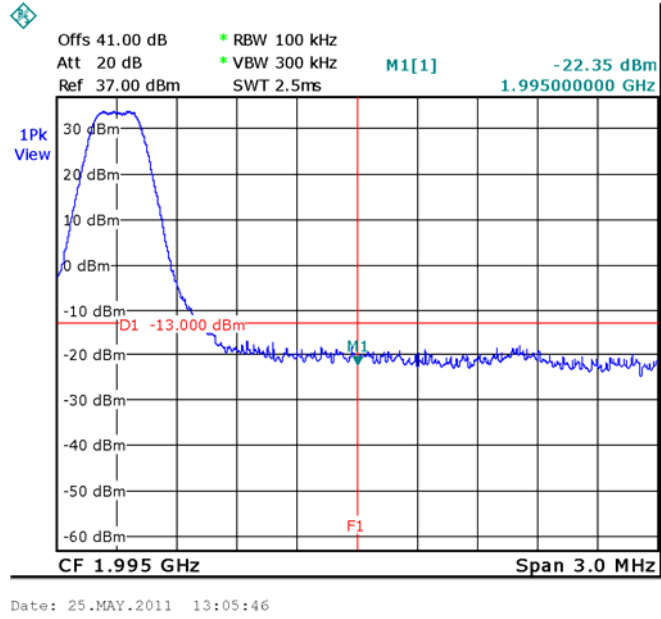


Figure 189.— 1993.80 MHz

W-CDMA:


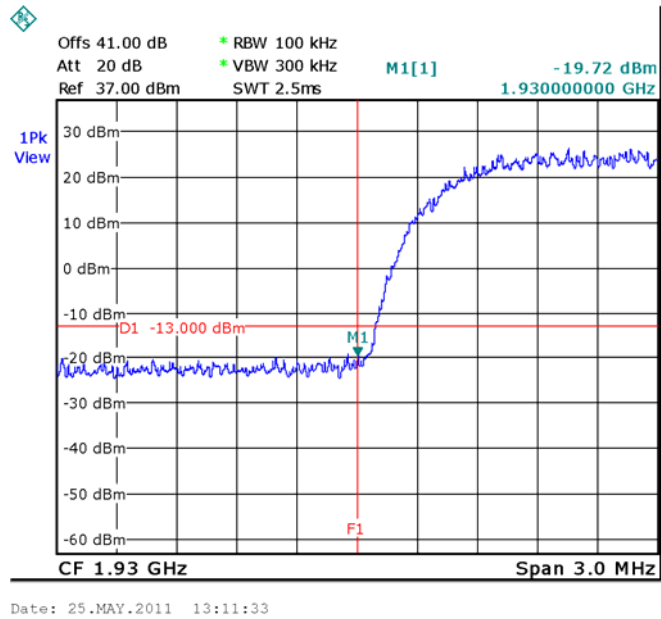


Figure 190.— 1932.50 MHz

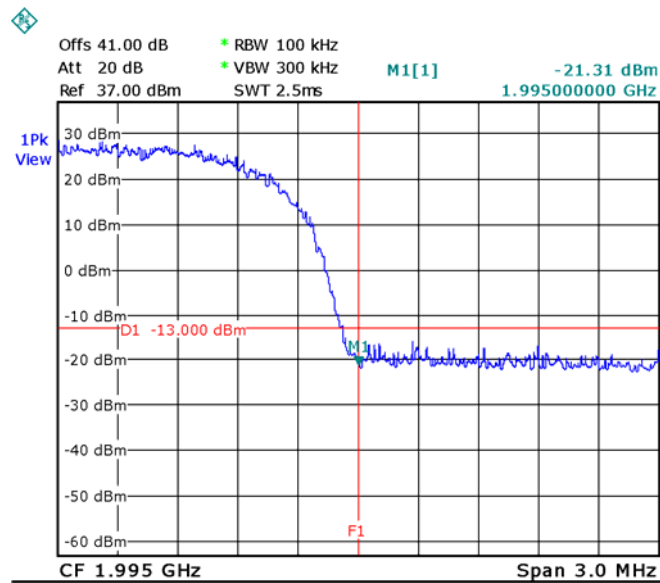

Date: 25.MAY.2011 13:14:51

**Figure 191.— 1992.50 MHz**

### 12.3 Results Table

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 24, Subpart E, Section 238; Part 2 Section 1051

Modulation	Operation Frequency (MHz)	Band Edge Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
CDMA	1931.20	1930.00	-17.81	-13.0	-4.81
	1993.80	1995.00	-18.32	-13.0	-5.32
GSM	1931.20	1930.00	-22.68	-13.0	-9.68
	1993.80	1995.00	-22.35	-13.0	-9.35
W-CDMA	1932.50	1930.00	-19.72	-13.0	-6.72
	1992.50	1995.00	-21.31	-13.0	-8.31

**Figure 192 Band Edge Spectrum Results PCS**

JUDGEMENT: Passed by 4.81 dB

TEST PERSONNEL:

Tester Signature: \_\_\_\_\_

Date: 31.05.11

Typed/Printed Name: A. Sharabi



## 12.4 Test Equipment Used.

### Band Edge Spectrum PCS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG-	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 193 Test Equipment Used**

## 13. Out of Band Emissions (Radiated) PCS

### 13.1 Test Specification

FCC, Part 24, Subpart E Section 238, FCC Part 2.1053

### 13.2 Test Procedure

The test method was based on ANSI/TIA-603-C: 2004, Section 2.2.12

Unwanted Emissions: Radiated Spurious.

The power of any emission outside of the authorized operating frequency ranges (1930-1990 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding  $-13\text{dBm}$ .

- (a) The E.U.T. operation mode and test set-up are as described in Section 3. A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-20 GHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

- (c) The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a). The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dB)}$$

$P_d$  = Dipole equivalent power (result).


$P_g$  = Signal generator output level.

### 13.3 Results Table

Carrier Channel (MHz)	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB $\mu$ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
1931.20	3862.40	V	51.1	-50.72	4.3	8.62	-46.4	-13.0	-33.40
1931.20	3862.40	H	50.5	-50.46	4.3	8.62	-46.14	-13.0	-33.14
1960.00	3920.00	V	50.7	-51.12	4.3	8.62	-46.8	-13.0	-33.80
1960.00	3920.00	H	51.2	-49.76	4.3	8.62	-45.44	-13.0	-32.44
1993.80	3987.60	V	51.3	-51	4.3	8.6	-46.7	-13.0	-33.70
1993.80	3987.60	H	51.6	-49.75	4.3	8.6	-45.45	-13.0	-32.45

The E.U.T met the requirements of the FCC, Part 24, Subpart E, Section 238; FCC Part 2.1053 specifications.

TEST PERSONNEL:

Tester Signature:  \_\_\_\_\_

Date: 31.05.11

Typed/Printed Name: A. Sharabi

### 13.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Active Loop Antenna	Emco	6502	2950	October 19, 2010	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 27, 2011	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A
Spectrum Analyzer	HP	8592L	3826A01204	February 21, 2011	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 5, 2010	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 4, 2011	1 Year
Signal Generator	HP	E4432B ESG-D	GB40050702	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2010	2 year

## 14. RF Power Output AWS

### 14.1 Test Specification

FCC Part 27, Subpart C (27.50(d))

### 14.2 Test procedure

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (40 dB) and an appropriate coaxial cable (1 dB). The E.U.T. RF output was modulated as follows:

CDMA at 1.25 MHz BW channels (2111.2 MHz, 2135 MHz and 2153.8 MHz)

WCDMA at 5 MHz BW channels (2112.5 MHz, 2135 MHz and 2152.5 MHz)

Special attention was taken to prevent Spectrum Analyzer RF input overload.

Signal generator input level 10dBm.



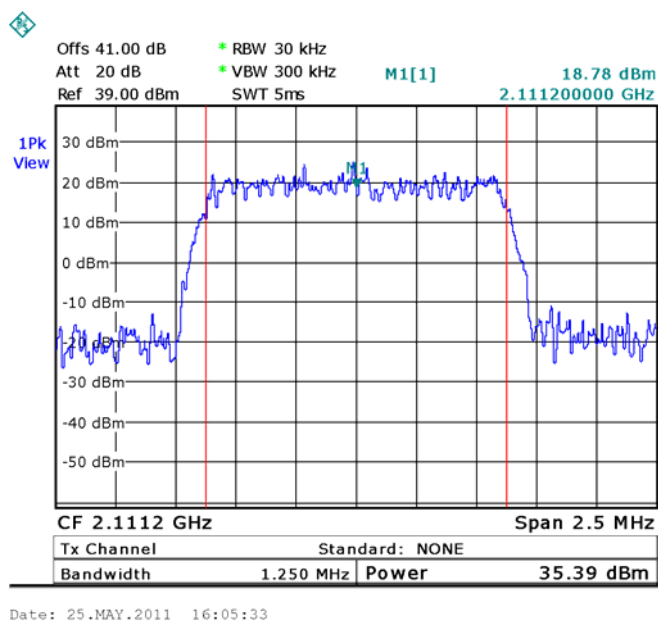


Figure 194.— CDMA (2111.2 MHz)

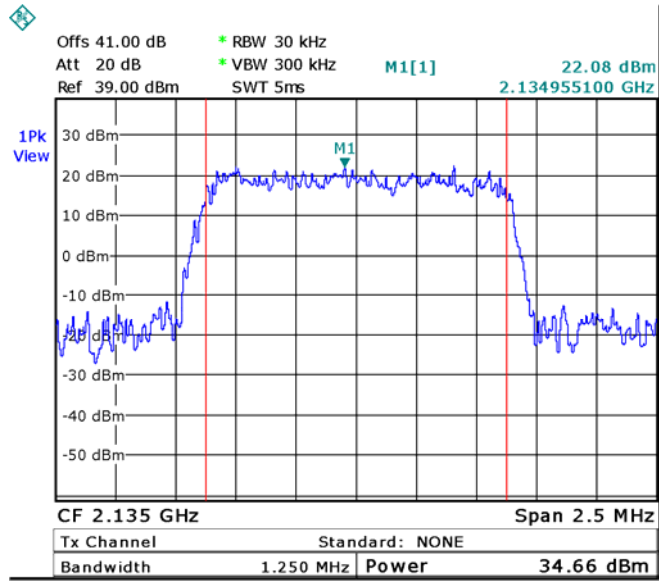

Date: 25.MAY.2011 16:06:23

Figure 195.— CDMA (2135.0 MHz)

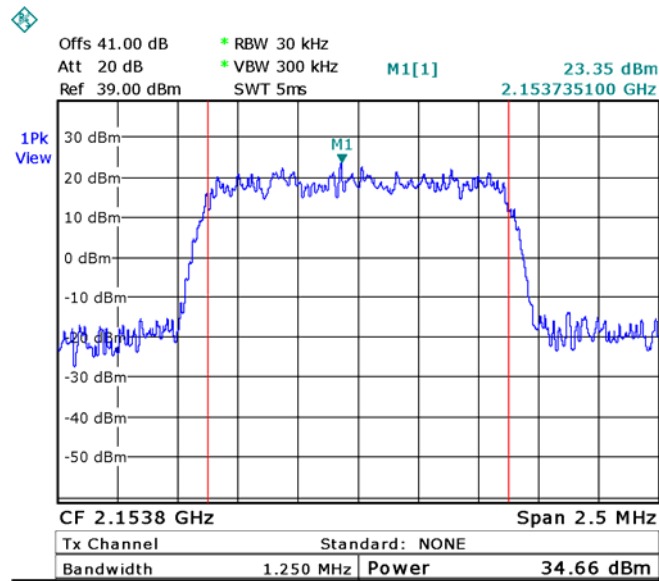

Date: 25.MAY.2011 16:08:01

Figure 196.— CDMA (2153.8 MHz)

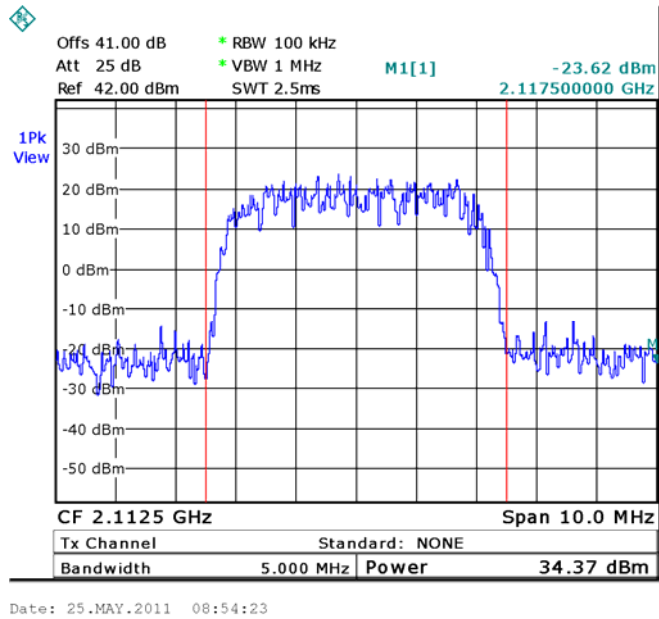


Figure 197.— W-CDMA (2112.5 MHz)


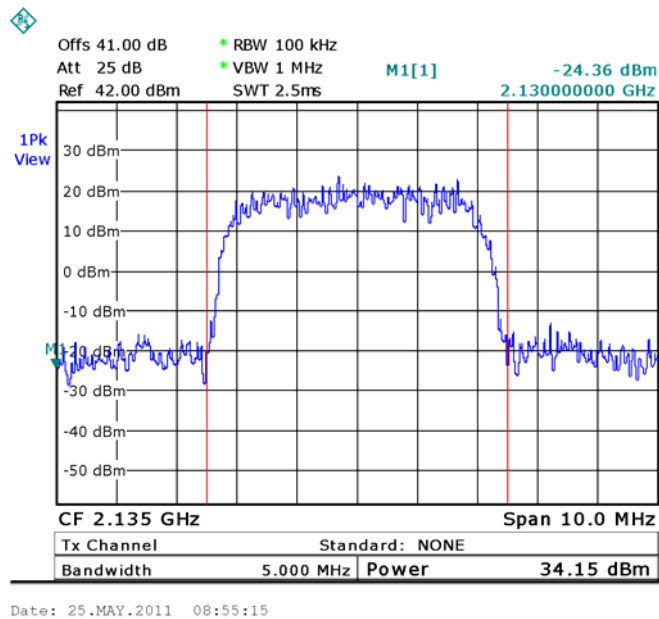


Figure 198.— W-CDMA (2135.0 MHz)



**Figure 199.— W-CDMA (2152.5 MHz)**

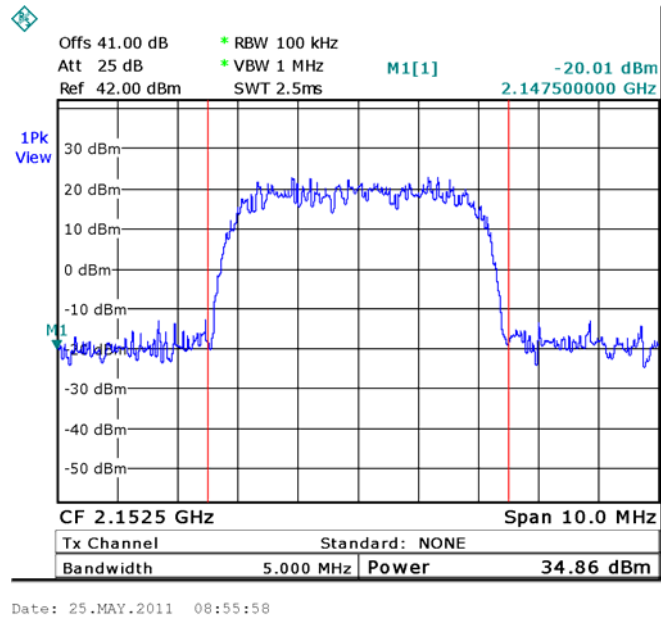

### 14.3 Results

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 27, Subpart C, Section 27.50 (d)

Modulation	Operation Frequency (MHz)	Reading (dBm)
CDMA	2111.2	35.39
CDMA	2135.0	34.66
CDMA	2153.8	34.66
WCDMA	2112.5	34.37
WCDMA	2135.0	34.15
WCDMA	2152.5	34.86

**Figure 200 RF Power Output AWS**

TEST PERSONNEL:

Tester Signature: \_\_\_\_\_

Date: 31.05.11

Typed/Printed Name: A. Sharabi

#### 14.4 Test Equipment Used.

##### RF Power Output AWS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 201 Test Equipment Used**

## 15. Occupied Bandwidth AWS

### 15.1 Test Specification

FCC Part 2, Section 1049

### 15.2 Test Procedure

The E.U.T. was set to the applicable test frequency and modulation. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (at the output test) and an appropriate coaxial cable. The spectrum analyzer was set to proper resolution B.W.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limit, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

Occupied bandwidth measured was repeated in the input terminal of the E.U.T.

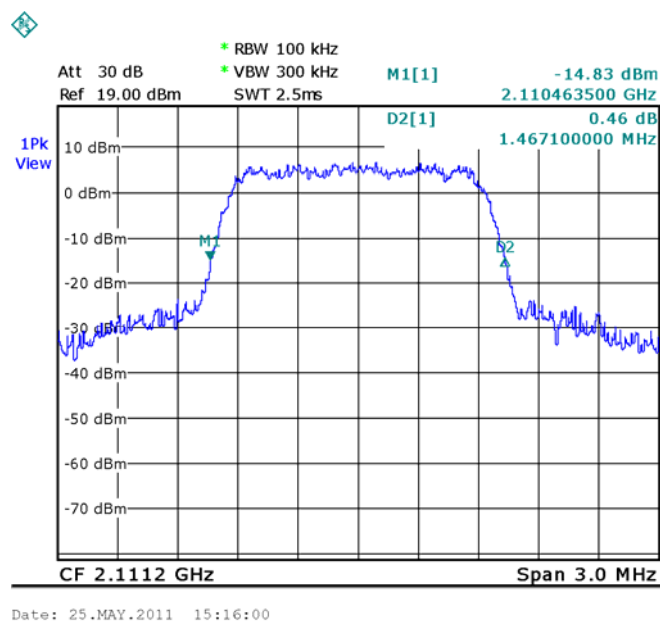


Figure 202.— CDMA (2111.20 MHz) IN

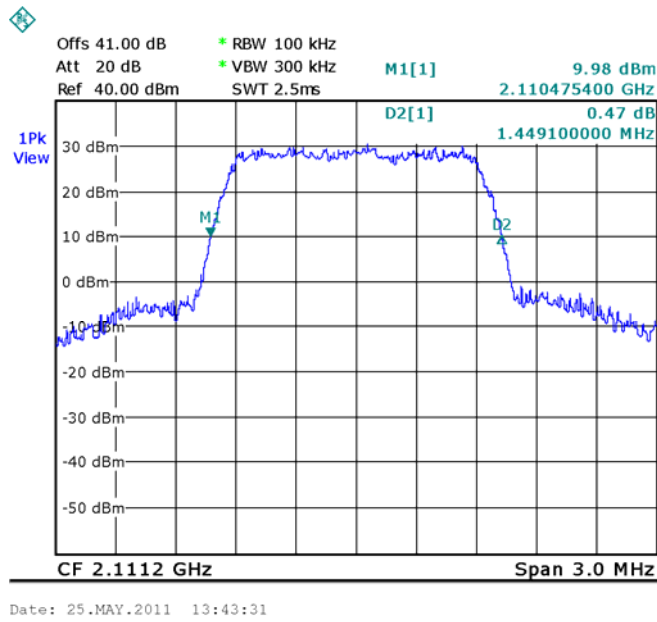


Figure 203.— CDMA (2112.0 MHz) OUT



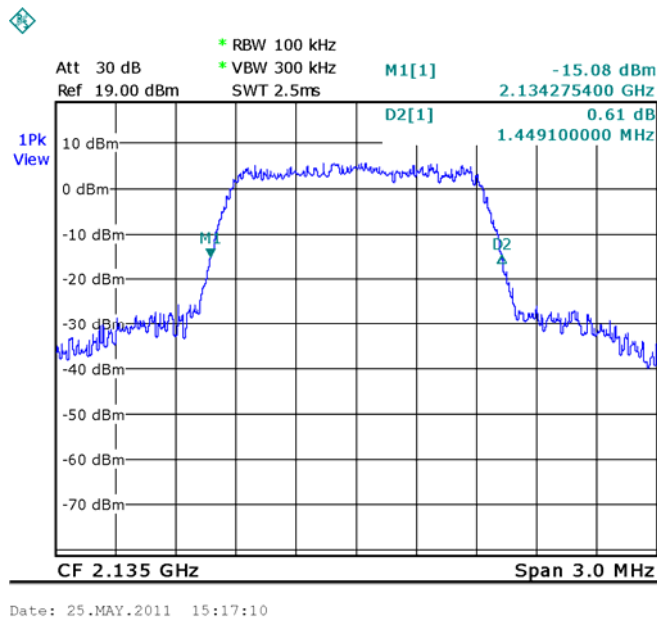


Figure 204.— CDMA (2135.0 MHz) IN

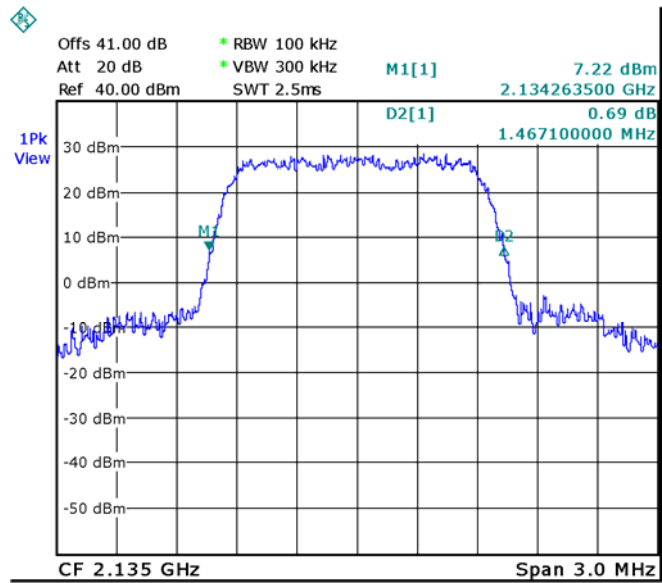


Date: 25.MAY.2011 13:45:53

Figure 205.— CDMA (2135.0 MHz) OUT

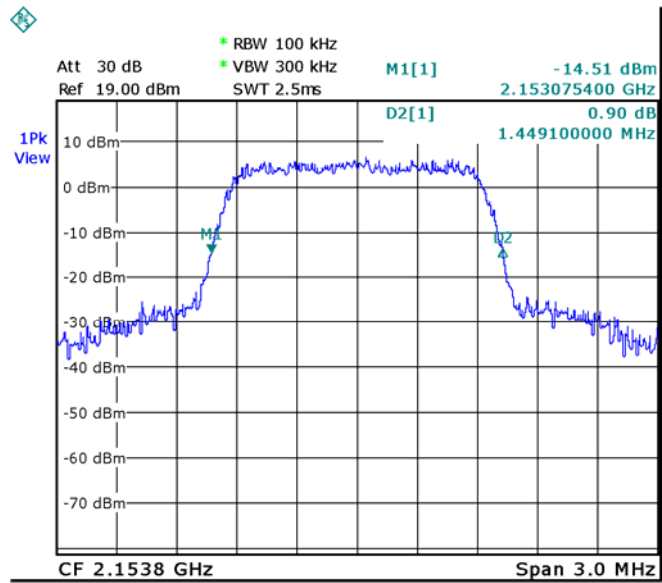


Date: 25.MAY.2011 15:18:52

Figure 206.— CDMA (2153.8 MHz) IN

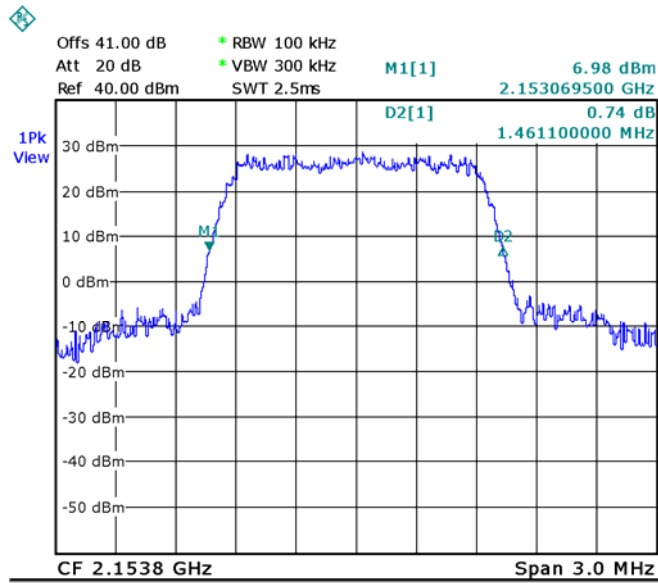


Date: 25.MAY.2011 13:48:28

Figure 207.— CDMA (2153.8 MHz) OUT

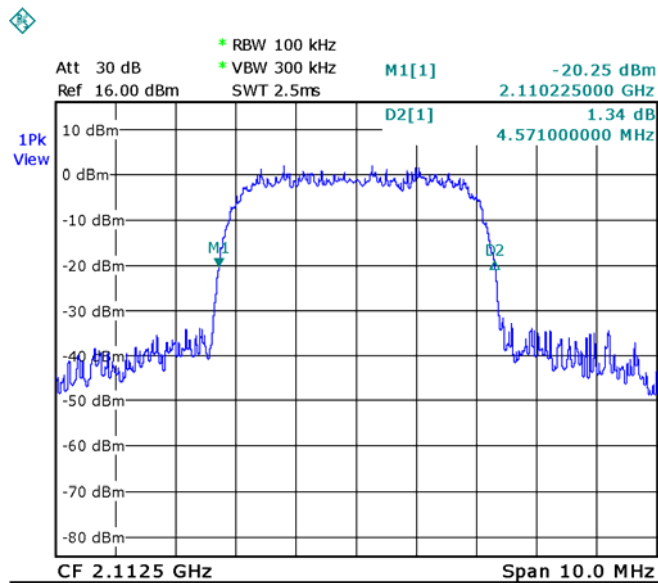


Date: 25.MAY.2011 15:10:12

Figure 208.— W-CDMA (2112.5 MHz) IN

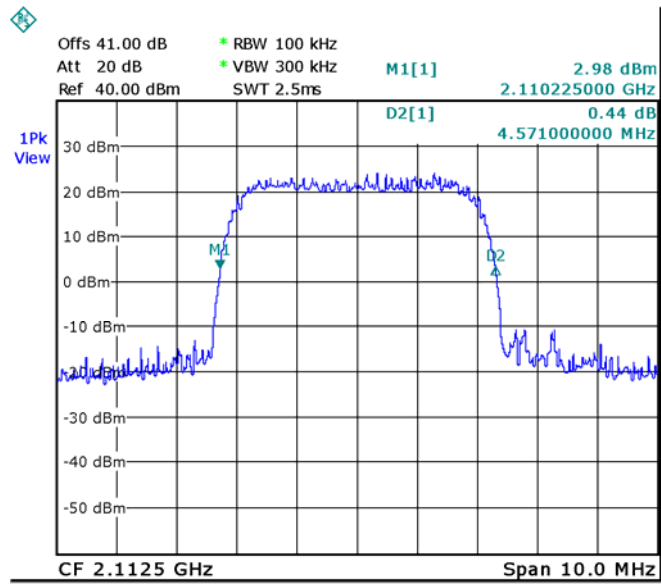


Date: 25.MAY.2011 13:59:43

Figure 209.— W-CDMA (2112.5 MHz) OUT

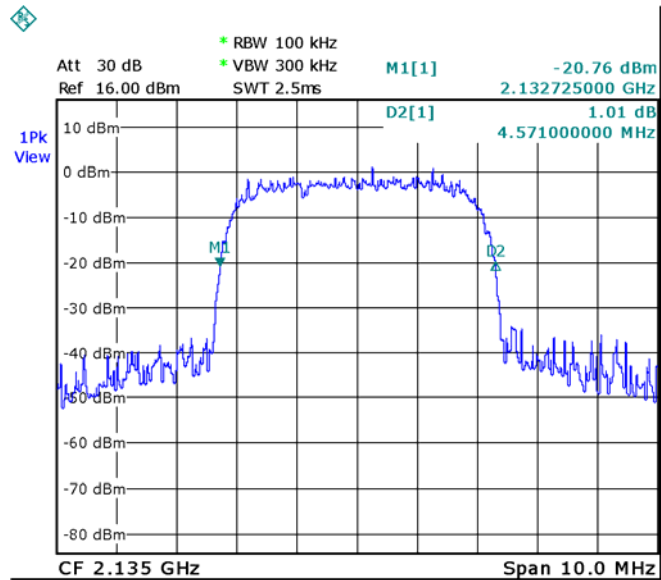


Date: 25.MAY.2011 15:11:32

Figure 210.— W-CDMA (2135.0 MHz) IN

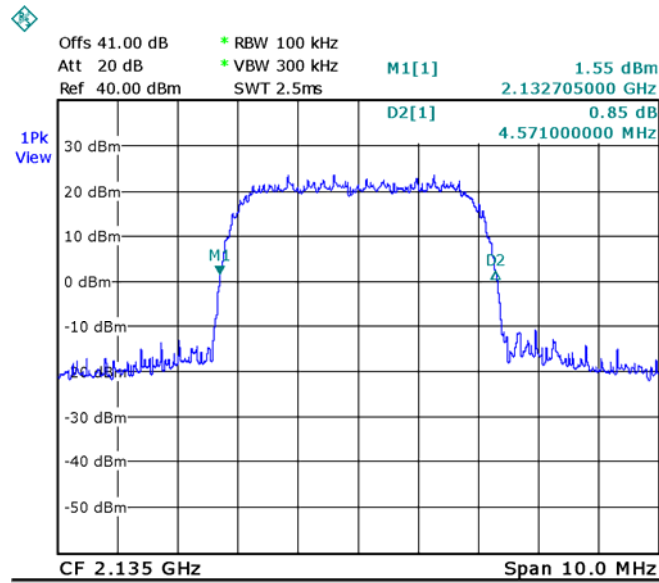

Date: 25.MAY.2011 14:01:32


Figure 211.— W-CDMA (2135.0 MHz) OUT

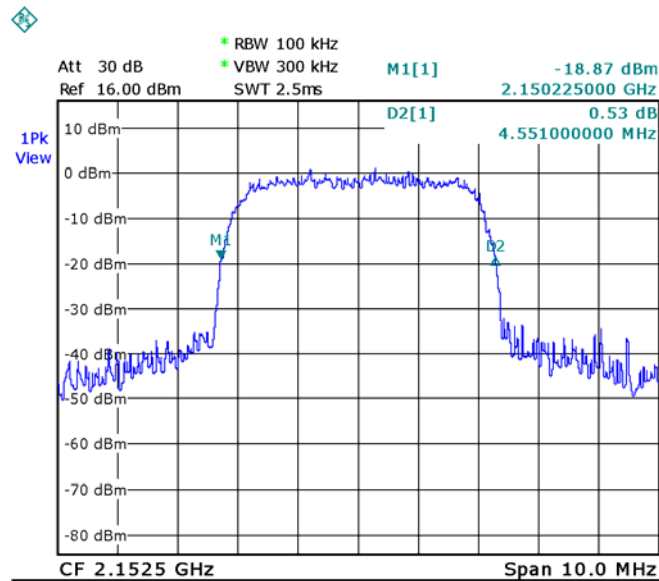

Date: 25.MAY.2011 15:13:29

Figure 212.— W-CDMA (2152.5 MHz) IN



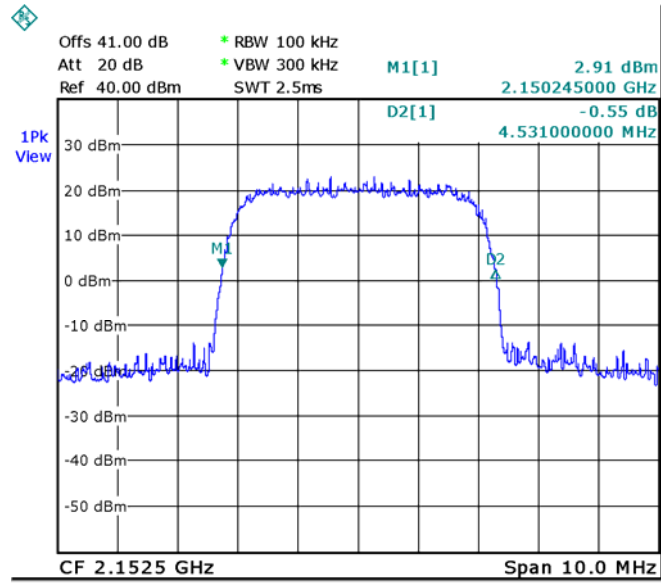

Date: 25.MAY.2011 14:04:11

Figure 213.— W-CDMA (2152.5 MHz) OUT

### 15.3 Results


E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 2, Section 1049

Modulation		Operating Frequency (MHz)	Reading (MHz)
CDMA	Input	2111.2	1.467
	Output	2111.2	1.449
	Input	2135.0	1.449
	Output	2135.0	1.467
	Input	2153.8	1.449
	Output	2153.8	1.461
WCDMA	Input	2112.5	4.571
	Output	2112.5	4.571
	Input	2135.0	4.571
	Output	2135.0	4.571
	Input	2152.5	4.551
	Output	2152.5	4.531

**Figure 214 Occupied Bandwidth AWS**

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 31.05.11

Typed/Printed Name: A. Sharabi

### 15.4 Test Equipment Used.

#### Occupied Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 215 Test Equipment Used**



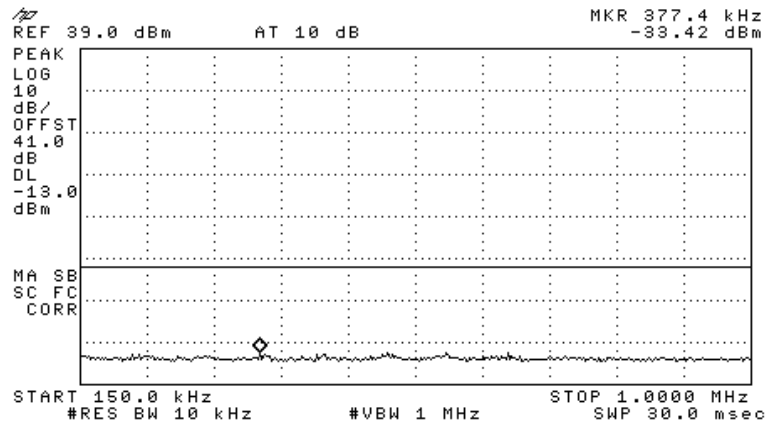


Figure 217.— 2111.20 MHz CDMA

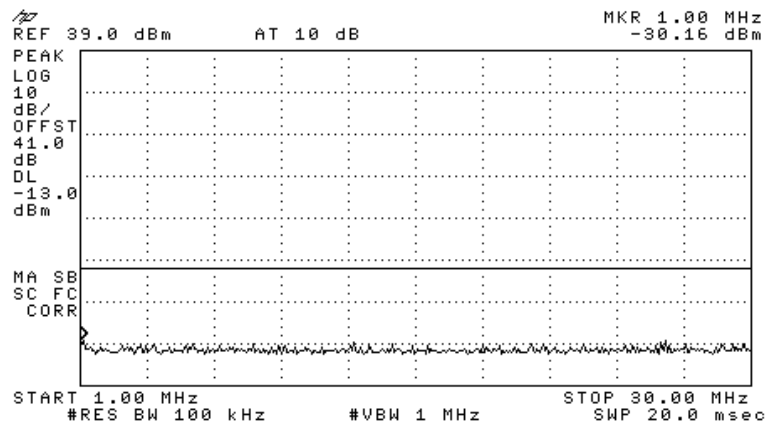


Figure 218.— 2111.20 MHz CDMA

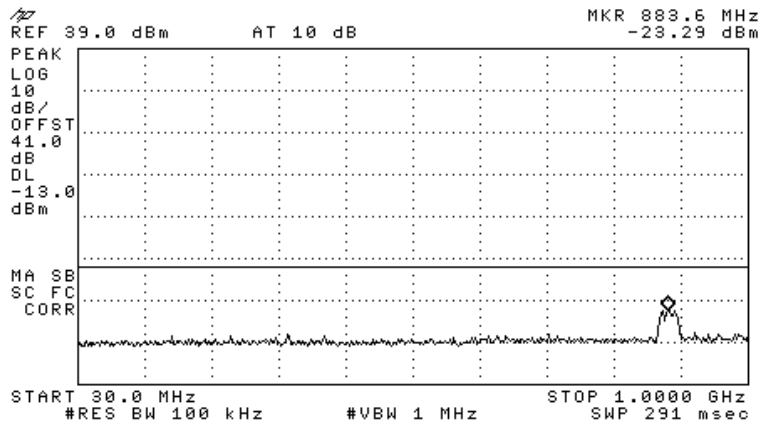


Figure 219.— 2111.20 MHz CDMA

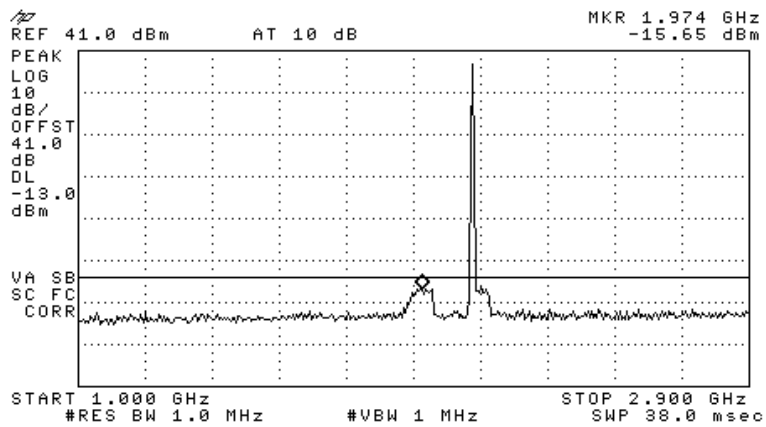


Figure 220.— 2111.20 MHz CDMA

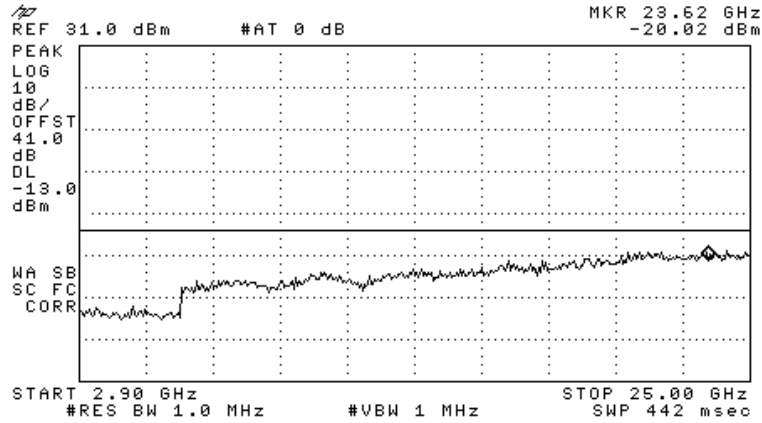


Figure 221.— 2111.20 MHz CDMA

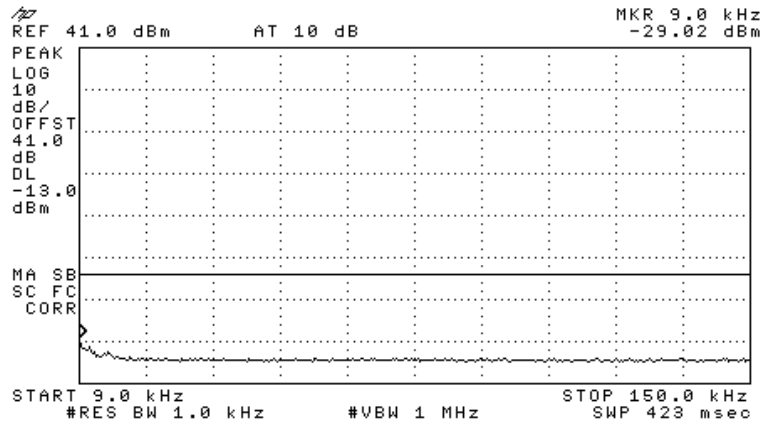


Figure 222.— 2135.00 MHz CDMA

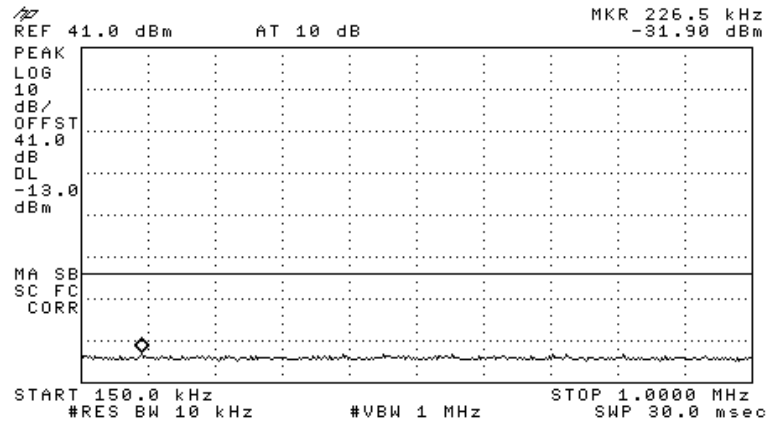


Figure 223.— 2135.00 MHz CDMA

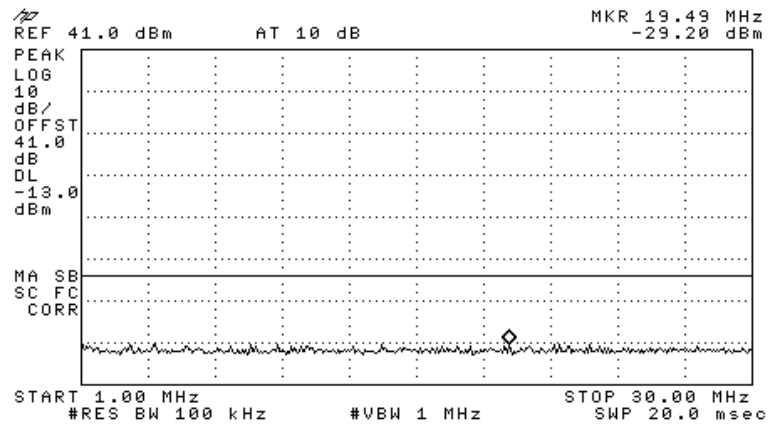


Figure 224.— 2135.00 MHz CDMA





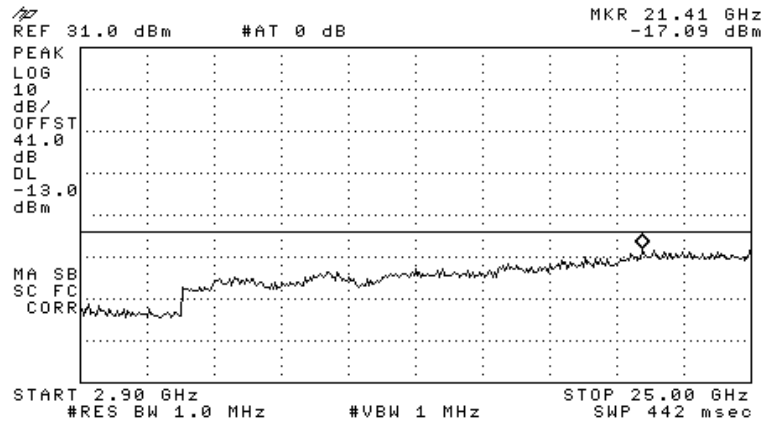


Figure 227.— 2135. 0 MHz CDMA

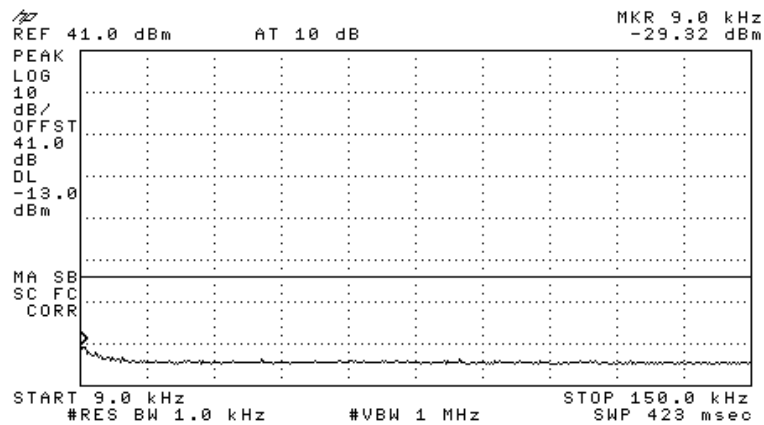


Figure 228.— 2153. 80 MHz CDMA

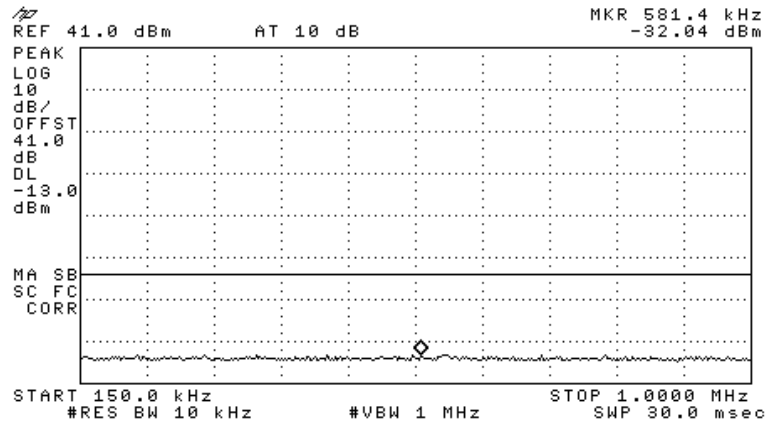


Figure 229.— 2153.80 MHz CDMA

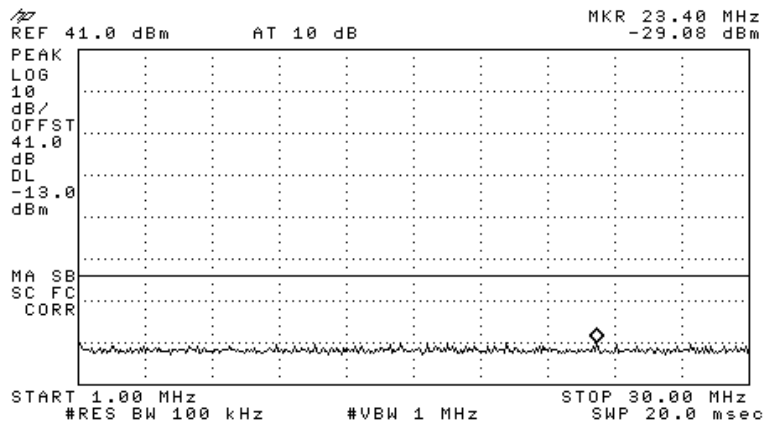


Figure 230.— 2153. 80 MHz CDMA

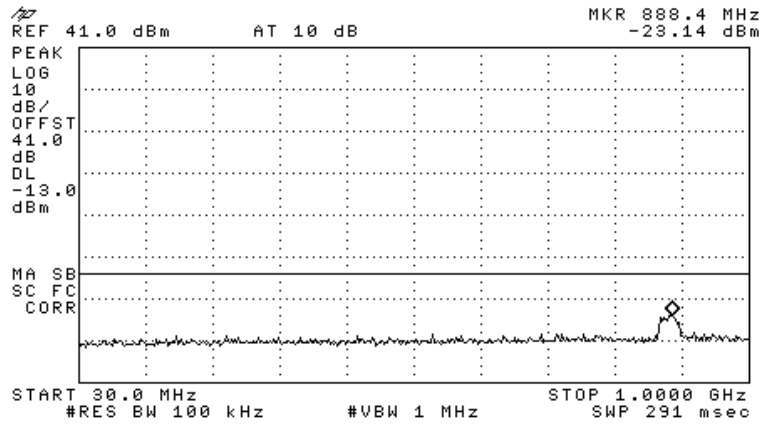


Figure 231.— 2153.80 MHz CDMA

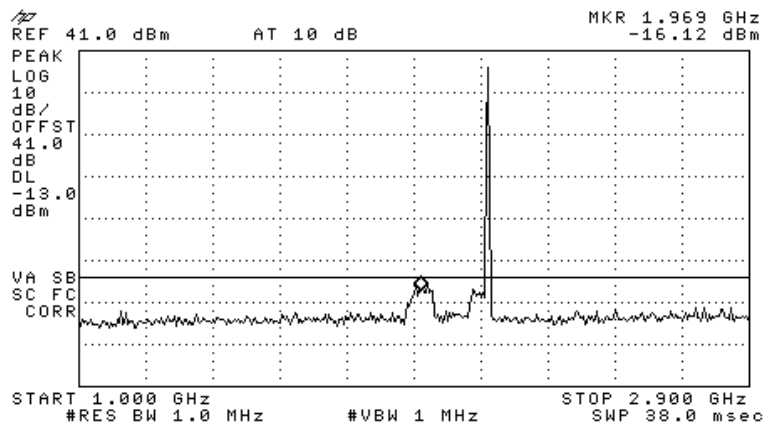


Figure 232.— 2153.80 MHz CDMA

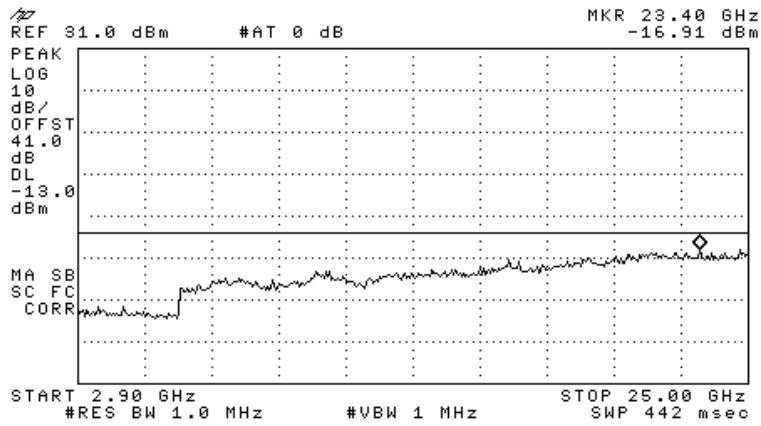


Figure 233.— 2153.80 MHz CDMA

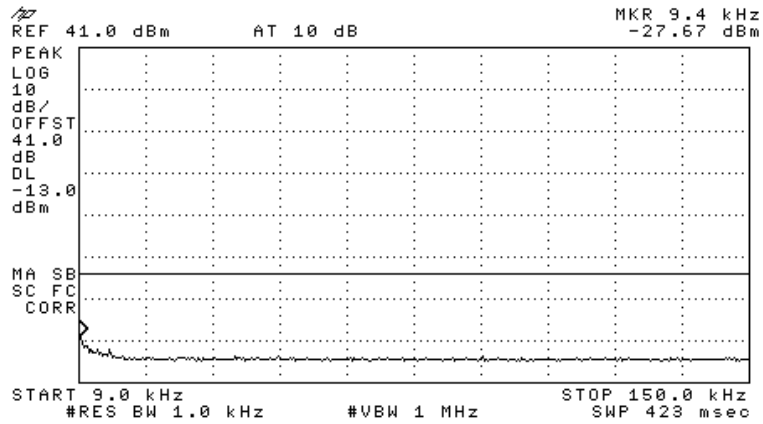


Figure 234.— 2112.50 MHz W-CDMA

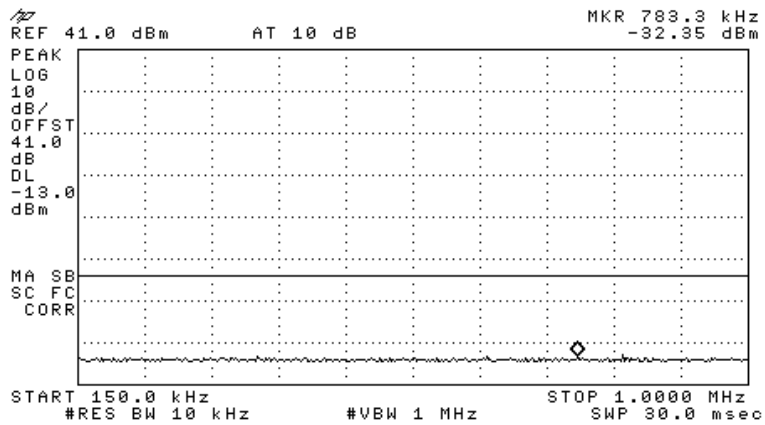


Figure 235.— 2112.50 MHz W-CDMA

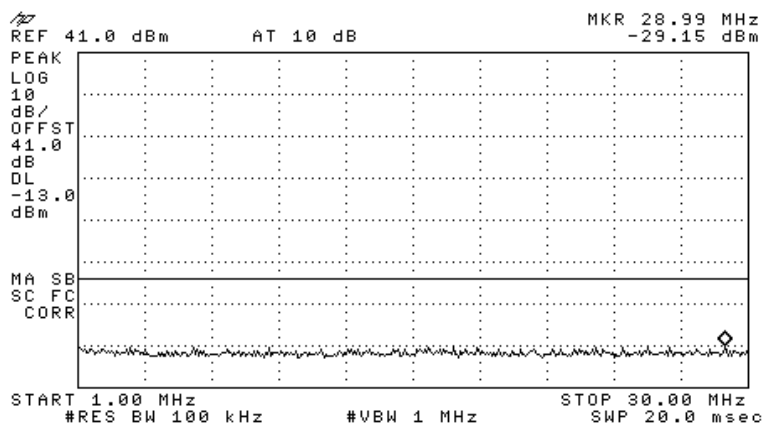


Figure 236.— 2112.50 MHz W-CDMA

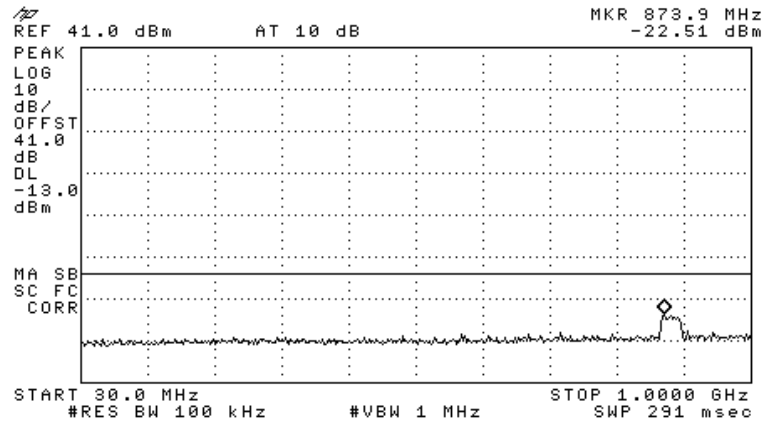


Figure 237.— 2112.50 MHz W-CDMA

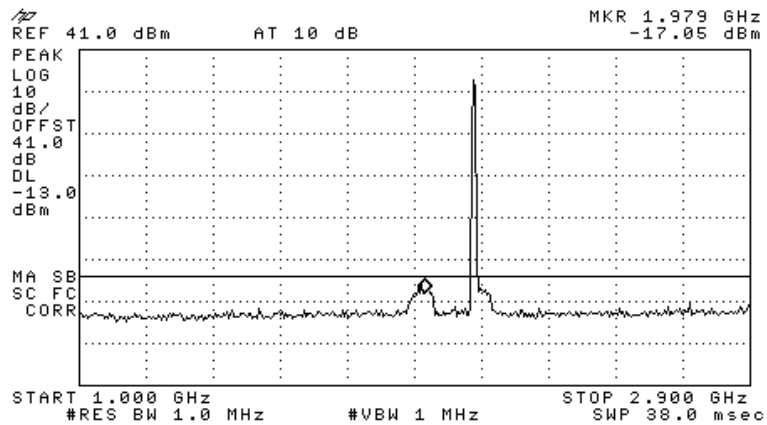


Figure 238.— 2112.50 MHz W-CDMA

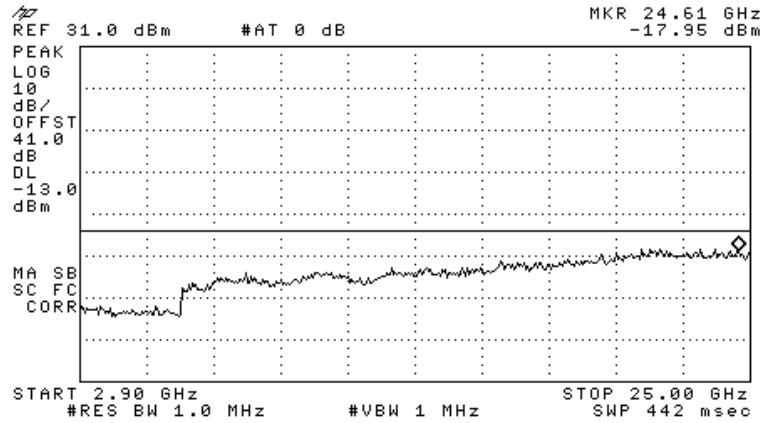


Figure 239.— 2112.50 MHz W-CDMA

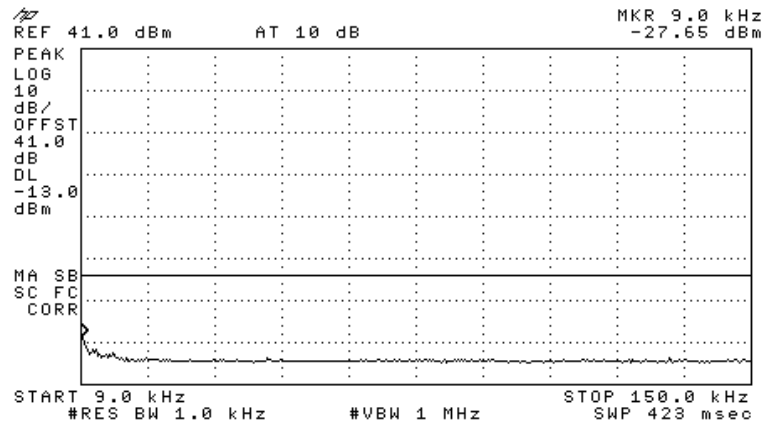


Figure 240.— 2135.00 MHz W-CDMA





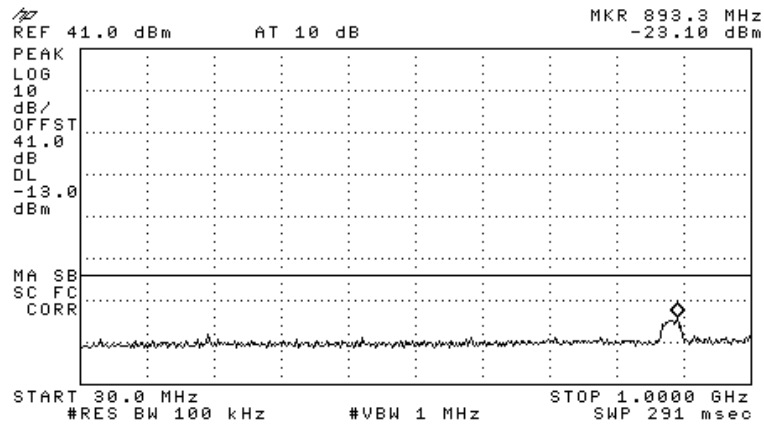


Figure 243.— 2135.00 MHz W-CDMA

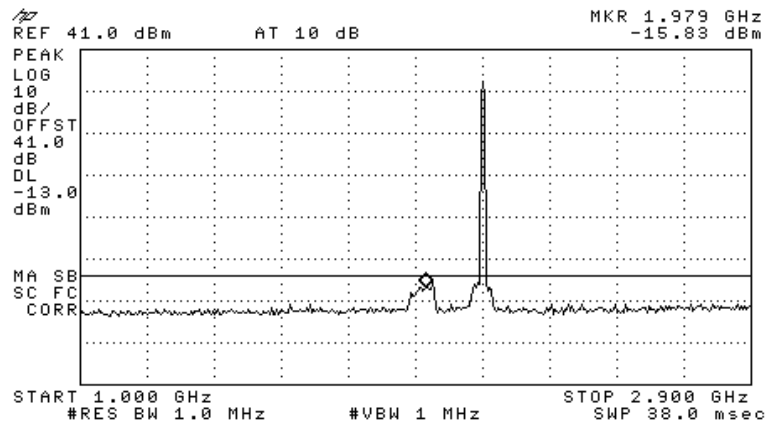


Figure 244.— 2135.00 MHz W-CDMA

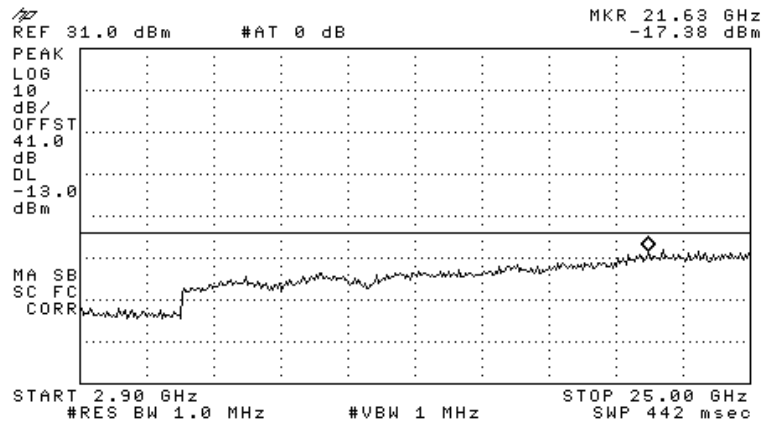


Figure 245.— 2135.00 MHz W-CDMA

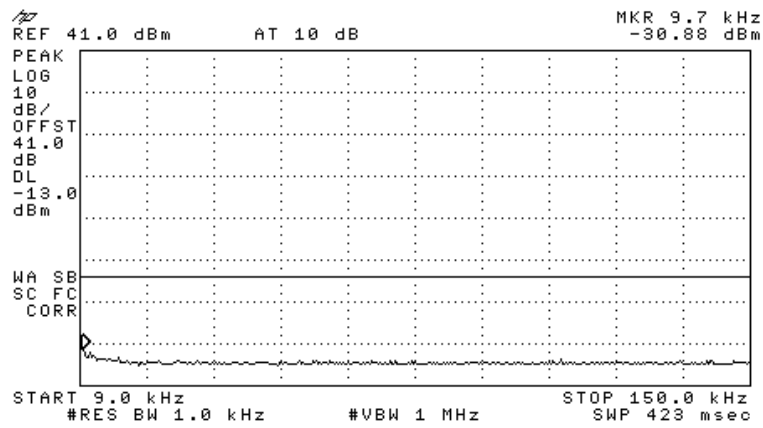


Figure 246.— 2152.50 MHz W-CDMA



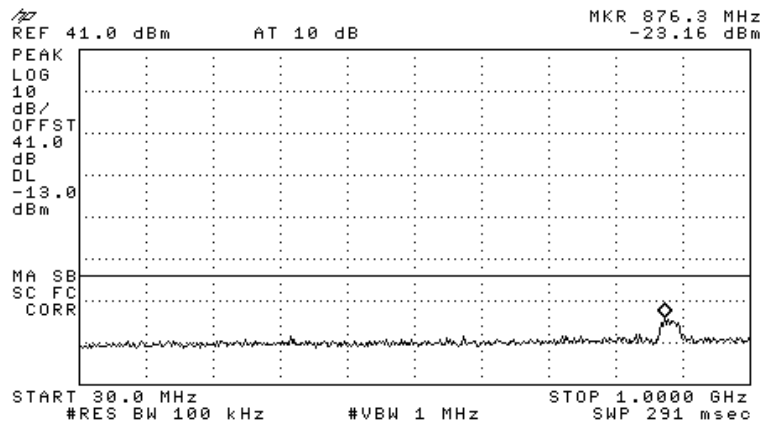


Figure 249.— 2152.50 MHz W-CDMA

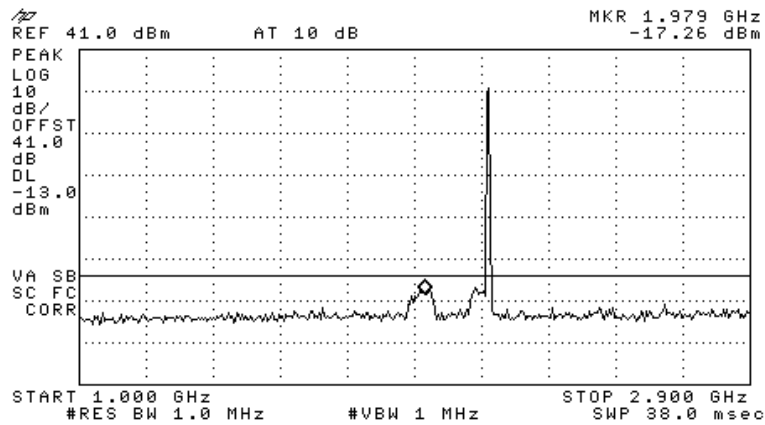


Figure 250.— 2152.50 MHz W-CDMA

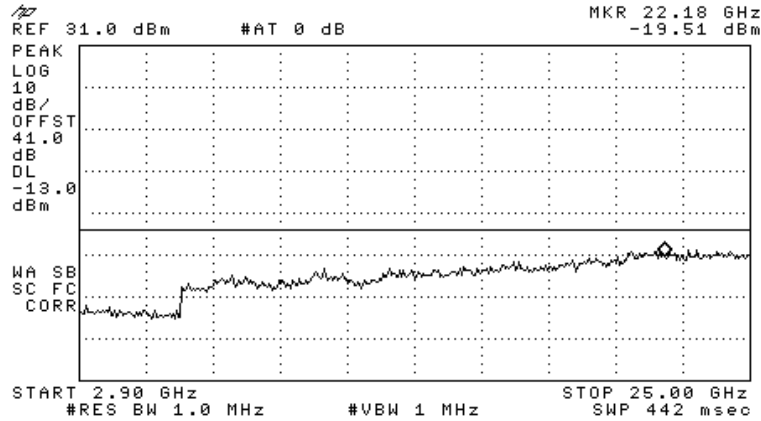


Figure 251.— 2152.50 MHz W-CDMA

### 16.3 Results


E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 27, Subpart C, Section 27.53 (g)

	Operation Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
CDMA	2111.20	-15.65	-13.0	-2.65
	2135.00	-15.00	-13.0	-2.00
	2153.80	-16.12	-13.0	-3.12
WCDMA	2112.50	-17.05	-13.0	-4.05
	2135.00	-15.83	-13.0	-2.83
	2152.50	-17.26	-13.0	-4.26

Figure 252 Spurious Emissions at Antenna Terminals Results AWS

JUDGEMENT: Passed by 2.00 dB

TEST PERSONNEL:

Tester Signature: 

Date: 31.05.11

Typed/Printed Name: A. Sharabi

## 16.4 Test Equipment Used.

### Spurious Emissions at Antenna Terminals AWS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8529L	3826A01204	February 21, 2011	1 year
Signal Generator	HP	E4438C ESG-	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 253 Test Equipment Used**

## 17. Band Edge Spectrum AWS

### 17.1 Test Specification

FCC Part 27, Subpart C, Section 27.53 (m 4-6)

### 17.2 Test procedure

Enclosed are spectrum analyzer plots for the lowest operation frequency and the highest operation frequency in which the E.U.T. is planned to be used.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding  $-13\text{dBm}$ .

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (41.0 dB).

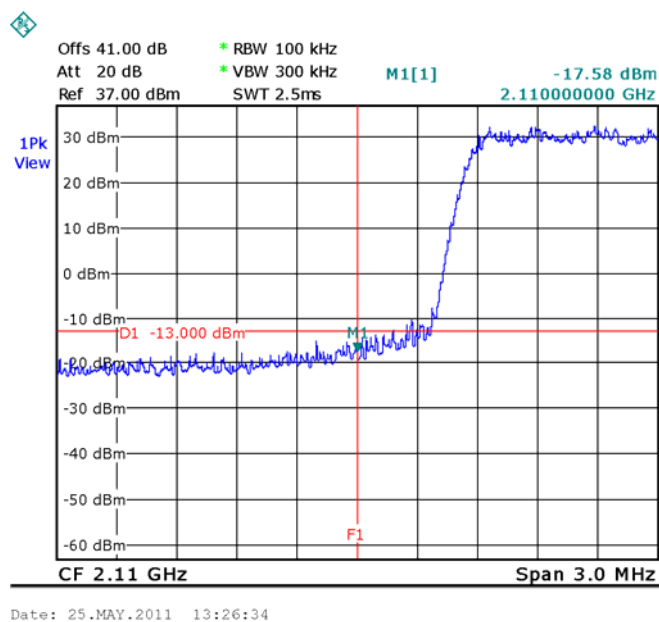


Figure 254.— CDMA 2111.20 MHz



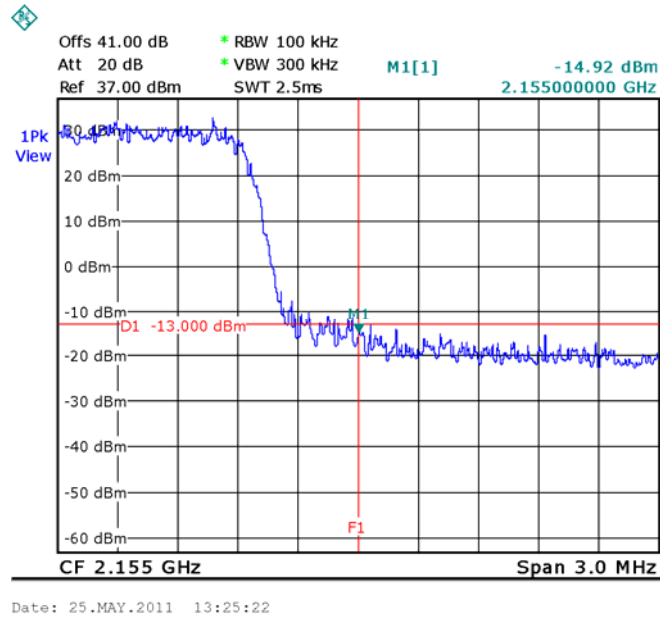


Figure 255.— CDMA 2153.80 MHz

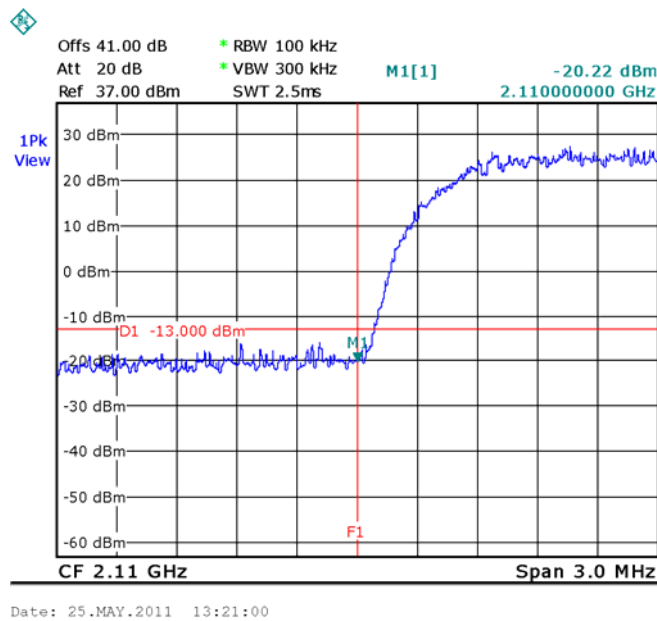


Figure 256.— W-CDMA 2112.50 MHz

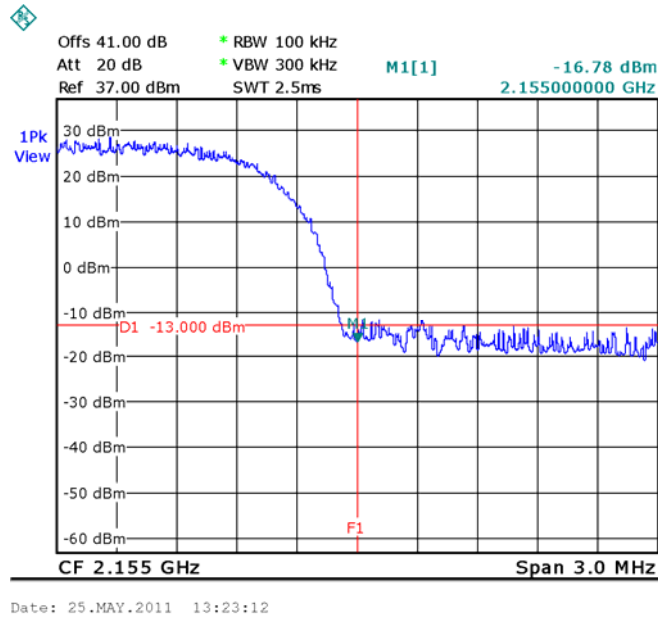


Figure 257.— W-CDMA 2152.50 MHz

### 17.3 Results

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit  
 Model No.: HX-C85P19A17-AC-A (C85=CELL; P19=PCS; A17=AWS)  
 Serial Number: Not Designated  
 Specification: FCC Part 27, Subpart C, Section 27.53 (m 4-6)

Modulation	Operation Frequency (MHz)	Band Edge Frequency (MHz)	Reading (dBm)	Specification (dBm)
CDMA	2111.20	2110.00	-17.58	-13.0
CDMA	2153.80	2155.00	-14.92	-13.0
W-CDMA	2112.50	2110.00	-20.22	-13.0
W-CDMA	2152.50	2155.00	-16.78	-13.0

Figure 258 Band Edge Spectrum Results AWS

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: \_\_\_\_\_

Date: 31.05.11

Typed/Printed Name: A. Sharabi

### 17.4 Test Equipment Used.

#### Band Edge Spectrum AWS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 259 Test Equipment Used**

## 18. Spurious Radiated Emission AWS

### 18.1 Test Specification

FCC, Part 27, Subpart C Section 27.53 (g)

### 18.2 Test Procedure

The test method was based on ANSI/TIA-603-C: 2004, Section 2.2.12

Unwanted Emissions: Radiated Spurious.

The power of any emission outside of the authorized operating frequency ranges (2110-2155 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding  $-13\text{dBm}$ .

(a) The E.U.T. operation mode and test set-up are as described in Section 2. A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground.

The frequency range 9 kHz-20 GHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

(b) The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:  
 $P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dB)}$

$P_d$  = Dipole equivalent power (result).


$P_g$  = Signal generator output level.

### 18.3 Test Results

JUDGEMENT: Passed by 28.03 dB

The E.U.T met the requirements of the FCC, Part 27, Subpart C, Section 27.53 (g) specifications.

TEST PERSONNEL:

Tester Signature:  Date: 31.05.11

Typed/Printed Name: A. Sharabi

Carrier Channel (MHz)	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB $\mu$ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
2111.20	4222.40	V	55.68	-47.71	4.45	9.12	-43.04	-13.0	-30.04
2111.20	4222.40	H	52.9	-50.25	4.45	9.12	-45.58	-13.0	-32.58
2135.00	4270.00	V	56.1	-47.97	4.45	9.38	-43.04	-13.0	-30.04
2135.00	4270.00	H	53.5	-50.11	4.45	9.38	-45.18	-13.0	-32.18
2153.80	4307.60	V	58.11	-45.96	4.45	9.38	-41.03	-13.0	-28.03
2153.80	4307.60	H	53.85	-49.76	4.45	9.38	-44.83	-13.0	-31.83

#### 18.4 Test Instrumentation Used, Radiated Measurements AWS

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Active Loop Antenna	Emco	6502	2950	October 19, 2010	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 27, 2011	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A
Spectrum Analyzer	HP	8592L	3826A01204	February 21, 2011	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 5, 2010	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 4, 2011	1 Year
Signal Generator	HP	E4432B ESG-D	GB40050702	July 22, 2010	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2010	2 year

## 19. Intermodulation Conducted

### 19.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable(loss = 41.0 dB). The spectrum analyzer was set to 1 kHz resolution BW for the frequency range 9.0-150.0 kHz, 10kHz for the frequency range 10kHz–10.0MHz, 100kHz for the frequency range 10.0MHz-2.4385GHz, and 1MHz for the frequency range 2.4385-26.0GHz.

3 input signals were sent simultaneously to the E.U.T. as follows:

CELL 811 MHz CW 10 dBm

PCS 1960 MHz CW 10 dBm

AWS: 2135 MHz W-CDMA 10 dBm

The frequency range of 9 kHz – 26.0GHz was scanned for unwanted signals.

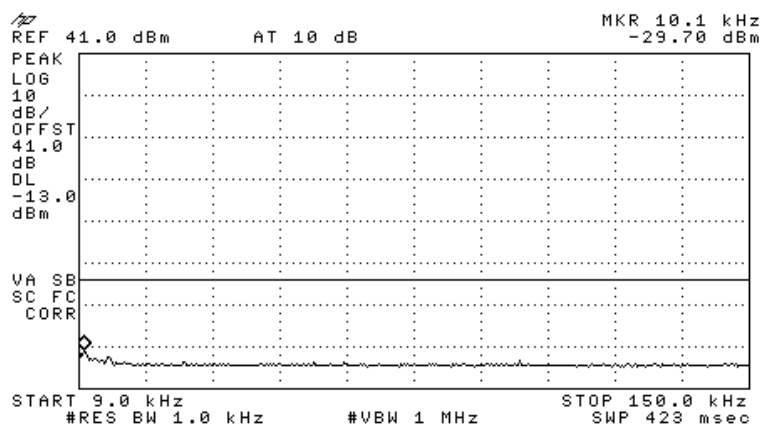


Figure 260 Intermodulation

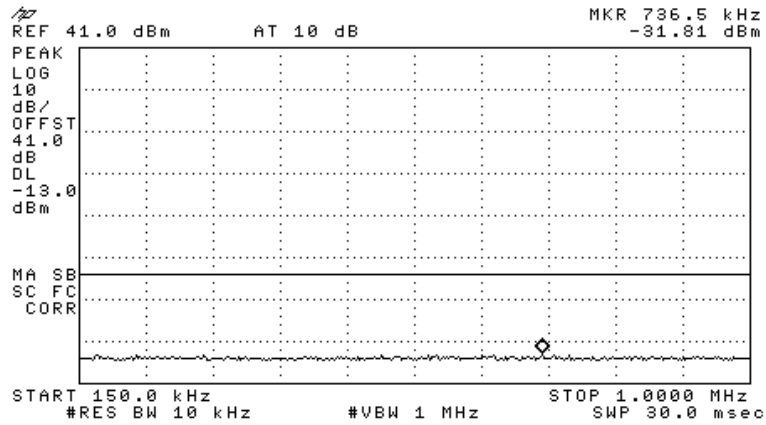


Figure 261 Intermodulation

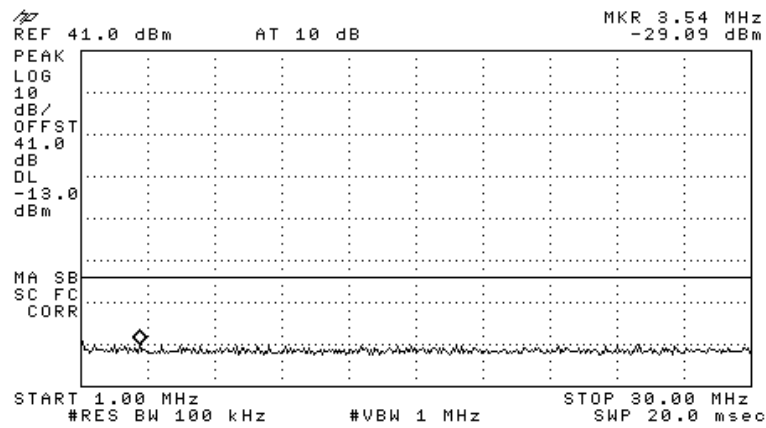


Figure 262 Intermodulation



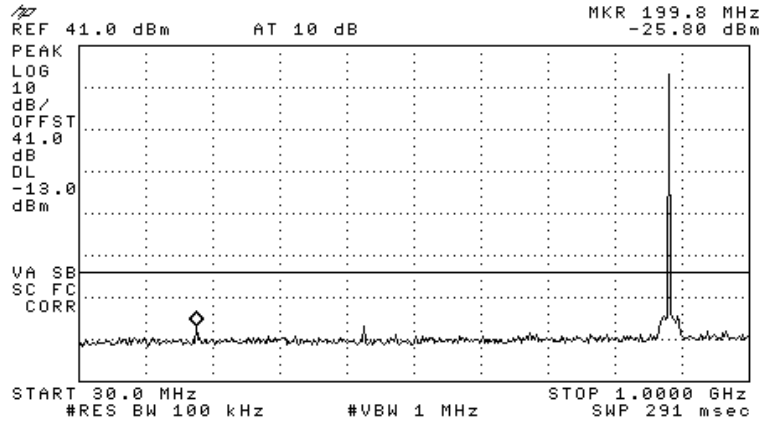


Figure 263 Intermodulation

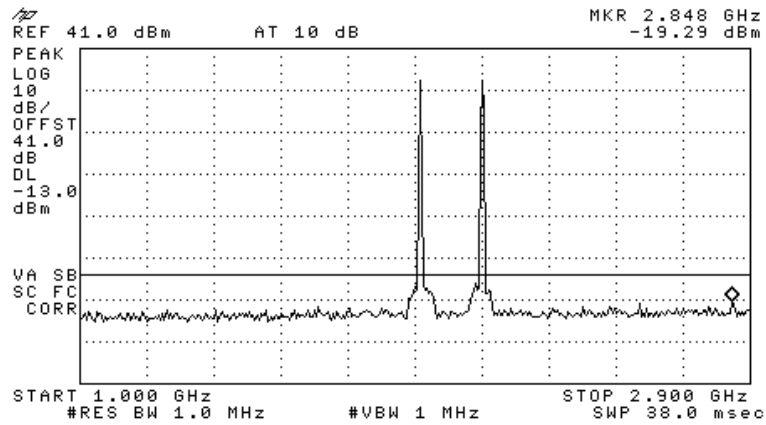
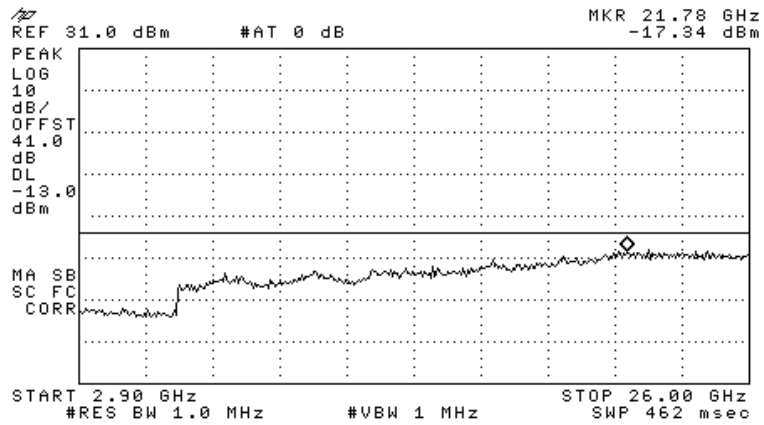


Figure 264 Intermodulation



**Figure 265 Intermodulation**

## 19.2 Test Equipment Used.

### Intermodulation Conducted

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8529L	3826A01204	February 21, 2011	1 year
Signal Generator	HP	E4438C ESG	MY45091956	July 22, 2010	1 year
Signal Generator	HP	E4433B ESG-D	GB40050702	July 22, 2010	1 year
Signal Generator	HP	E4438C	MY42082734	July 21, 2010	1 year
Signal Generator	HP	83731B	US37100653	February 21, 2011	1 year
Attenuator	Narda	MOD 766-10	9409	December 22, 2010	1 year
Attenuator	Mini-Circuits	BW-S30W5	0533	December 22, 2010	1 year
Cable	Mini-Circuits	30091		February 10, 2011	1 year

**Figure 266 Test Equipment Used**

## 20. Intermodulation Radiated

### 20.1 Test procedure

The test method was based on ANSI/TIA-603-C: 2004, Section 2.2.12  
Unwanted Emissions: Radiated Spurious.

The power of any emission outside of the authorized operating frequency ranges (869 - 894; 1930 – 1990; 2110 - 2155 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding – 13dBm.

The E.U.T. was operated in Downlink mode at 3 different channels at center frequency of each band at the same time, transmitting at CW signal.

- (a) The E.U.T. operation mode and test set-up are as described in Section 2.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground.

- (b) The frequency range 9 kHz-25 GHz was scanned, and the list of the highest emissions was verified and updated accordingly. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

- (c) The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dB)}$$

$P_d$  = Dipole equivalent power (result).

$P_g$  = Signal generator output level.

### 20.2 Test Results

JUDGEMENT: Passed

Carrier Channel (MHz)	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB $\mu$ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
2*1960-2135	1785.00	V	51.8	-47.99	5.6	7.66	-45.93	-13.0	-32.93
3*1960-2*2135	1610.00	H	49.9	-51.54	5.3	7.62	-49.22	-13.0	-36.22
3*881-2135	508.00	V	33.3	-62.9	3.1	1.39	-64.61	-13.0	-51.61
2*1960-3*881	1277.00	H	44.4	-54.9	4.85	6.72	-53.03	-13.0	-40.03
2135-1960	175.00	V	34.8	-59.74	1.62	1.82	-59.54	-13.0	-46.54
2135-2*881	373.00	H	35.5	-63.1	2.5	0.75	-64.85	-13.0	-51.85
2*1960-2135	1785.00	V	51.8	-47.99	5.6	7.66	-45.93	-13.0	-32.93

### 20.3 Test Instrumentation Used, Radiated Measurements Intermodulation

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Active Loop Antenna	Emco	6502	2950	October 19, 2010	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 27, 2011	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A
Spectrum Analyzer	HP	8592L	3826A01204	February 21, 2011	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 5, 2010	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 4, 2011	1 Year
Signal Generator	HP	E4432B ESG-D	GB40050702	July 22, 2010	1 year
Signal Generator	HP	E4432B ESG-D	GB40050702	July 22, 2010	1 year
Signal Generator	HP	E4438C	MY42082734	July 21, 2010	1 year
Signal Generator	HP	83731B	US37100653	February 21, 2011	1 year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2010	2 year

## 21. APPENDIX A - CORRECTION FACTORS

**21.1 Correction factors for CABLE  
from EMI receiver  
to test antenna  
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

**NOTES:**

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

**21.2 Correction factors for CABLE**  
**from EMI receiver**  
**to test antenna**  
**at 3 meter range.**

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

*NOTES:*

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*



**21.3 Correction factors for CABLE**  
**from spectrum analyzer**  
**to test antenna above 2.9 GHz**

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

**NOTES:**

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

**21.4 Correction factors for LOG PERIODIC ANTENNA**

**Type LPD 2010/A  
at 3 and 10 meter ranges.**

**Distance of 3 meters**

<b>FREQUENCY (MHz)</b>	<b>AFE (dB/m)</b>
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

**Distance of 10 meters**

<b>FREQUENCY (MHz)</b>	<b>AFE (dB/m)</b>
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

**NOTES:**

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,  
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission  
Test EMI Receiver".

**21.5 Correction factors for LOG PERIODIC ANTENNA**

**Type SAS-200/511  
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

*NOTES:*

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**21.6 Correction factors for BICONICAL ANTENNA  
Type BCD-235/B,  
at 3 meter range**

<b>FREQUENCY (MHz)</b>	<b>AFE (dB/m)</b>
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

**NOTES:**

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

**21.7 Correction factors for Double-Ridged Waveguide Horn**

**Model: 3115, S/N 29845  
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

**21.8 Correction factors for ACTIVE LOOP ANTENNA**  
**Model 6502**  
**S/N 9506-2950**

<b>FREQUENCY</b> (MHz)	<b>Magnetic Antenna Factor</b> (dB)	<b>Electric Antenna Factor</b> (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2