



Hermon Laboratories Ltd.  
Harakevet Industrial Zone, Binyamina 30500,  
Israel  
Tel. +972-4-6288001  
Fax. +972-4-6288277  
E-mail: mail@hermonlabs.com

# TEST REPORT

ACCORDING TO: FCC 47CFR part 27

FOR:

**Corning Optical Communication Wireless  
AWS ADD-ON Unit**

**Model: 1200-AWS-AO**

**FCC ID:OJFMA1200AWS**

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Transmitter characteristics .....	5
7	Transmitter tests according to 47CFR part 27.....	6
7.1	Automatic gain control (AGC) threshold test .....	6
7.2	Occupied bandwidth test.....	11
7.3	Mean output power and booster gain test .....	16
7.4	Out-of-band rejection test.....	27
7.5	Out-of-band emissions at RF connector test.....	30
7.6	Spurious emissions at RF antenna connector test .....	40
7.7	Radiated spurious emission measurements.....	60
8	APPENDIX A Test equipment and ancillaries used for tests.....	72
8.1	Test equipment and ancillaries used for tests .....	72
9	APPENDIX B Measurement uncertainties.....	73
10	APPENDIX C Test facility description .....	74
11	APPENDIX D Specification references .....	74
12	APPENDIX E Test equipment correction factors.....	75
13	APPENDIX F Abbreviations and acronyms.....	82

## 1 Applicant information

**Client name:** Corning Optical Communication Wireless  
**Address:** 13221 Woodland Park Rd Suite 400, VA, USA  
**Telephone:** +001 (703) 714-7920  
**Fax:** +001 (703) 848-0280  
**E-mail:** riazih@corning.com  
**Contact name:** Mr. Habib Riazhi

## 2 Equipment under test attributes

**Product name:** AWS ADD-ON Unit  
**Product type:** Industrial Booster  
**Model(s):** 1200-AWS-AO  
**Part number:** 703A013701  
**Serial number:** 5D4651A  
**Software release:** 7.4  
**Receipt date:** 10-Aug-16

## 3 Manufacturer information

**Manufacturer name:** Corning Optical Communication Wireless  
**Address:** 13221 Woodland Park Rd Suite 400, VA, USA  
**Telephone:** +001 (703) 714-7920  
**Fax:** +001 (703) 848-0280  
**E-Mail:** riazih@corning.com  
**Contact name:** Mr. Habib Riazhi




## 4 Test details

**Project ID:** 28707  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 10-Aug-16  
**Test completed:** 22-Aug-16  
**Test specification(s):** FCC 27 with RF connector

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
Section 27.50, Automatic gain control (AGC) threshold	Pass
Section 2.1049, Occupied bandwidth	Pass
Section 27.50(d), Mean output power and booster gain	Pass
Section 2.1049, Out-of-band rejection	Pass
Section 27.53, Out-of-band emissions at RF connector	Pass
Section 27.53, Conducted spurious emissions	Pass
Section 27.53, Radiated spurious emissions	Pass
Section 27.52, RF exposure	Pass, exhibit provided in Application for certification

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.  
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. S. Samokha, test engineer	August 22, 2016	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	August 30, 2016	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and Radio group manager	September 8, 2016	



## 6 EUT description

### 6.1 General information

The EUT is an Add-On module, supporting a single frequency band 2110 -2180 MHz (AWS-1 and AWS-3) in the Downlink mode and 1710-1780 MHz in the Uplink mode.

### 6.2 Transmitter characteristics

<b>Type of equipment</b>			
V	Stand-alone (Equipment with or without its own control provisions)		
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)		
	Plug-in card (Equipment intended for a variety of host systems)		
<b>Intended use</b>		<b>Condition of use</b>	
V	fixed	Always at a distance more than 2 m from all people	
	mobile	Always at a distance more than 20 cm from all people	
	portable	May operate at a distance closer than 20 cm to human body	
<b>Assigned frequency range</b>		2110.0 – 2180.0 MHz	
<b>Operating frequency</b>		2110.0 – 2180.0 MHz DL 1710-1780 MHz UL	
<b>Maximum rated output power</b>		At maximum gain, Output port	21±2 dBm
<b>Is transmitter output power variable?</b>		No	
		V	Yes
			continuous variable
			V stepped variable with stepsize
		minimum RF power	NA
		maximum RF power at antenna connector	23 dBm
<b>Antenna connection</b>			
unique coupling	V	standard connector	Integral with temporary RF connector without temporary RF connector
<b>Antenna/s technical characteristics</b>			
Type	Manufacturer	Model number	Gain
External	Any	Any	12.5 dBi
<b>Transmitter aggregate data rate/s, MBps</b>			
Transmitter 99% power bandwidth	Type of modulation		
	AWGN	GSM	WCDMA
	NA	NA	NA
<b>Transmitter power source</b>			
		Nominal rated voltage	Battery type
V	DC	Nominal rated voltage	48 VDC
	AC mains	Nominal rated voltage	Frequency
<b>Common power source for transmitter and receiver</b>		V	yes no



<b>Test specification:</b> Section 27.50, AGC threshold test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 27

### 7.1 Automatic gain control (AGC) threshold test

#### 7.1.1 General

This test was performed to measure the peak output power at RF antenna connector. Specification test limits are given in Table 7.1.1.

Table 7.1.1 AGC threshold level limits

Transmitter type	Assigned frequency range, MHz	Maximum peak output power, EIRP	
		W	dBm
Base and fixed stations	2110 – 2180	1640.0	62.0

#### 7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was adjusted to produce maximum available to the end user RF output power.

7.1.2.3 The peak output power was measured with spectrum analyzer as provided in Table 7.1.2 and the associated plots.

Figure 7.1.1 AGC threshold level test setup





<b>Test specification:</b> Section 27.50, AGC threshold test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Table 7.1.2 AGC threshold level test results

ASSIGNED FREQUENCY RANGE: 2110 – 2180 MHz  
DETECTOR USED: Average  
MODULATING SIGNAL: PRBS  
MEASUREMENT METHOD: Spectrum Analyzer

CONFIGURATION: Downlink transmit mode

Frequency, MHz	Input port	Input level, dBm	SA reading, dBm	AGC threshold level, dBm	Margin*, dB	Verdict
<b>MODULATING SIGNAL: AWGN</b>						
2145.0	-16.4 dBm	-15.91	21.53	-15.91	NA	Pass
<b>MODULATING SIGNAL: GSM</b>						
2145.0	-16.4 dBm	-17.24	21.69	-17.24	NA	Pass
<b>MODULATING SIGNAL: WCDMA</b>						
2145.0	-16.4 dBm	-17.17	21.36	-17.17	NA	Pass

Reference numbers of test equipment used

HL 2909	HL 3767	HL 3780	HL 4278	HL 4354			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.







HERMON LABORATORIES

<b>Test specification:</b> Section 27.50, AGC threshold test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.1.1 AGC threshold test results at mid frequency carrier, Port AWS**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT POWER: -16.4dBm

2110.0 – 2180.0 MHz  
AWGN downlink transmit  
Single Channel  
OUTPUT POWER:

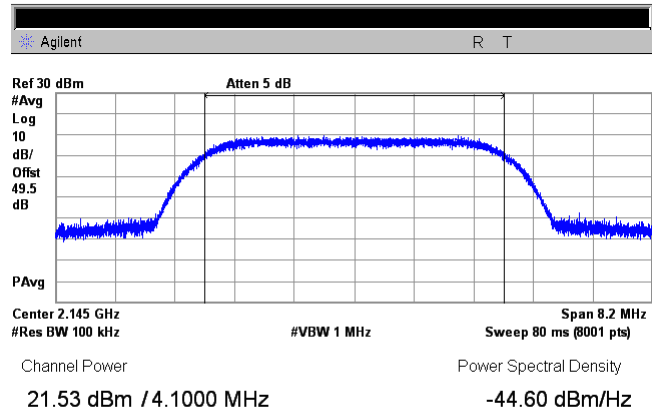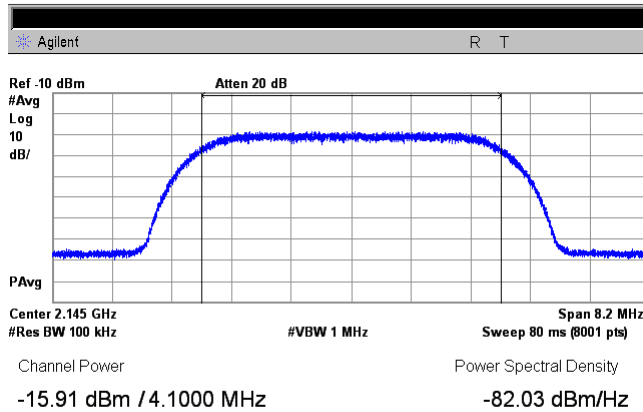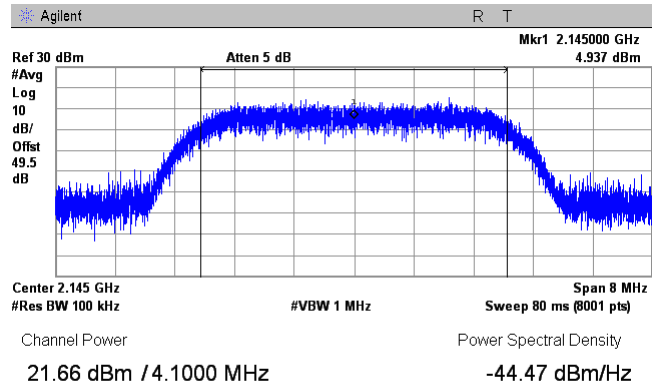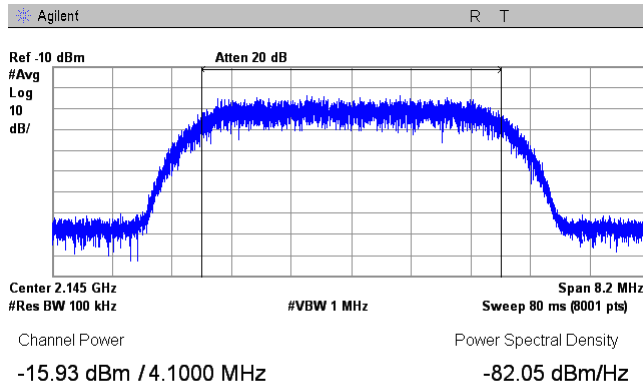









HERMON LABORATORIES

<b>Test specification:</b> Section 27.50, AGC threshold test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.1.2 AGC threshold test results at mid frequency carrier, Port AWS**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT POWER: -16.4 dBm

2110.0 – 2180.0 MHz  
GSM downlink transmit  
Single Channel  
OUTPUT POWER:

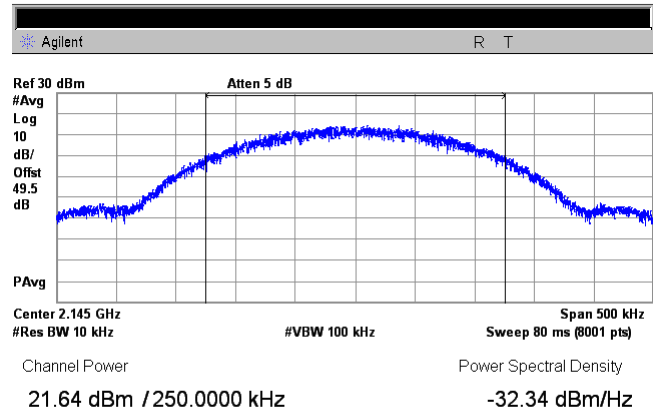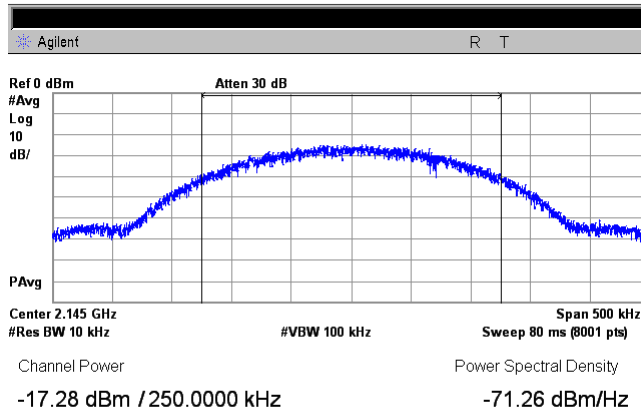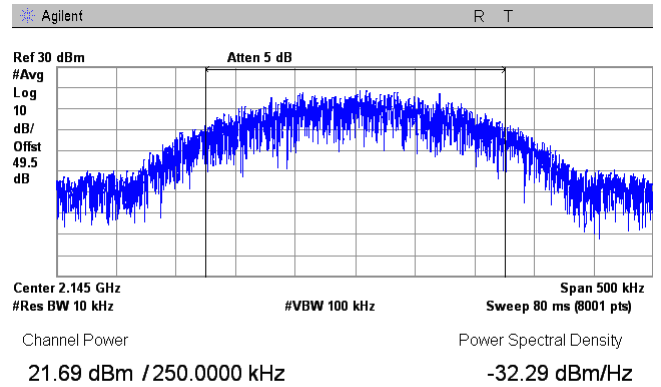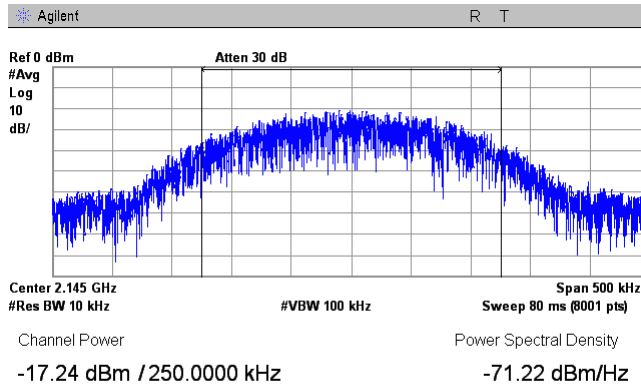







HERMON LABORATORIES

<b>Test specification:</b> Section 27.50, AGC threshold test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 10-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.1.3 AGC threshold test results at mid frequency carrier, Port AWS**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT POWER: -16.4 dBm

2110.0 – 2180.0 MHz  
WCDMA downlink transmit  
Single Channel  
OUTPUT POWER:

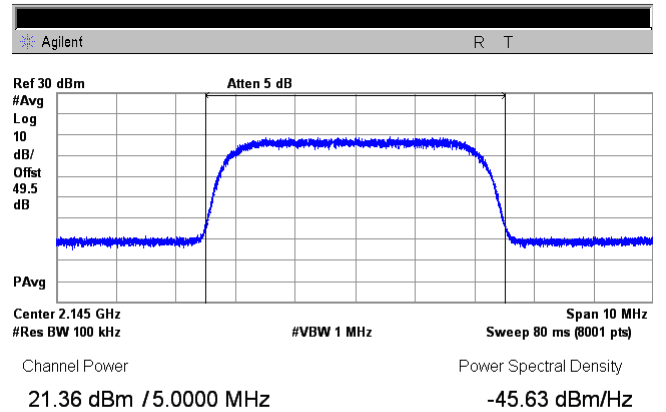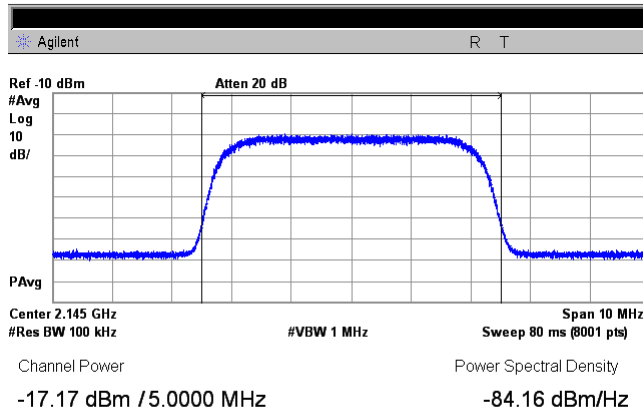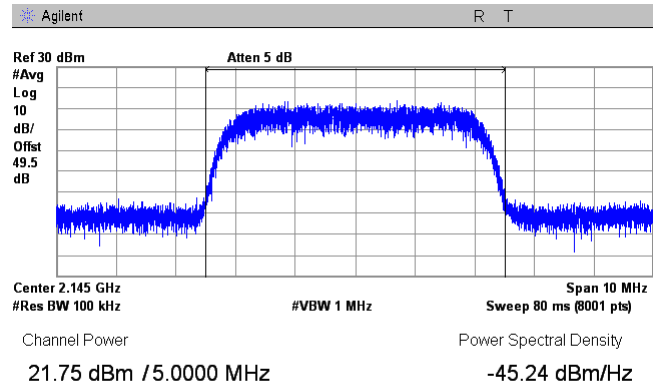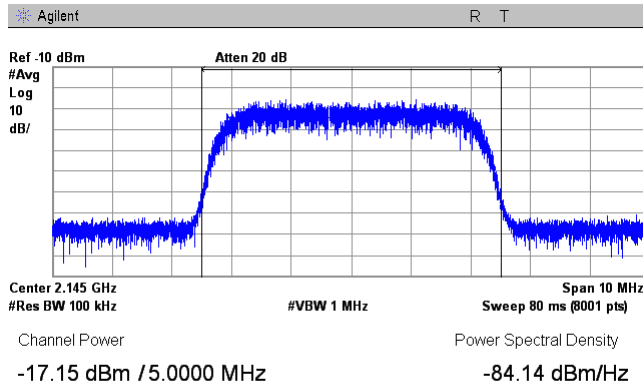



<b>Test specification: Section 2.1049, Occupied bandwidth</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 11-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.2 Occupied bandwidth test

### 7.2.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points, %	Maximum allowed bandwidth, kHz
2110.0 – 2180.0	99	NA

### 7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was set to transmit the normally modulated carrier.

7.2.2.3 The transmitter occupied bandwidth was measured with power bandwidth function of the spectrum analyzer as a frequency delta between the reference points on modulation envelope and provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Occupied bandwidth test setup





<b>Test specification: Section 2.1049, Occupied bandwidth</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict: PASS</b>	
<b>Date(s):</b> 11-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Table 7.2.2 Occupied bandwidth test results**

DETECTOR USED: Peak hold  
MODULATION ENVELOPE REFERENCE POINTS: 99%

RESOLUTION BANDWIDTH: 100 kHz (0.5-2% of OBW)  
VIDEO BANDWIDTH: 1000 kHz

Carrier frequency, MHz	99% Occupied bandwidth, kHz		Limit, kHz	Margin, kHz	Verdict
	Below AGC	Above AGC			
<b>MODULATION: AWGN</b>					
2145.0	4279.9	4270.1	NA	NA	Pass
<b>MODULATION: WCDMA</b>					
2145.0	4181.8	4189.96	NA	NA	Pass

RESOLUTION BANDWIDTH: 3 kHz (0.5-2% of OBW)  
VIDEO BANDWIDTH: 30 kHz

Carrier frequency, MHz	Occupied bandwidth, kHz		Limit, kHz	Margin, kHz	Verdict
	Below AGC	Above AGC			
<b>MODULATION: GSM</b>					
2145.0	247.405	245.403	NA	NA	Pass

**Reference numbers of test equipment used**

HL 2909	HL 3234	HL 3345	HL 3767	HL 3780	HL 4354		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

<b>Test specification: Section 2.1049, Occupied bandwidth</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict: PASS</b>	
<b>Date(s):</b> 11-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.2.1 Occupied bandwidth test result at mid frequency carrier, AWS+AWS3 Bands



FREQUENCY RANGE:  
OPERATIONAL MODE:  
INPUT PORT:  
CONFIGURATION:  
INPUT POWER: -16.4 dBm

2110.0 – 2180.0 MHz  
AWGN uplink transmit  
AWS  
Below AGC threshold  
OUTPUT SIGNAL:

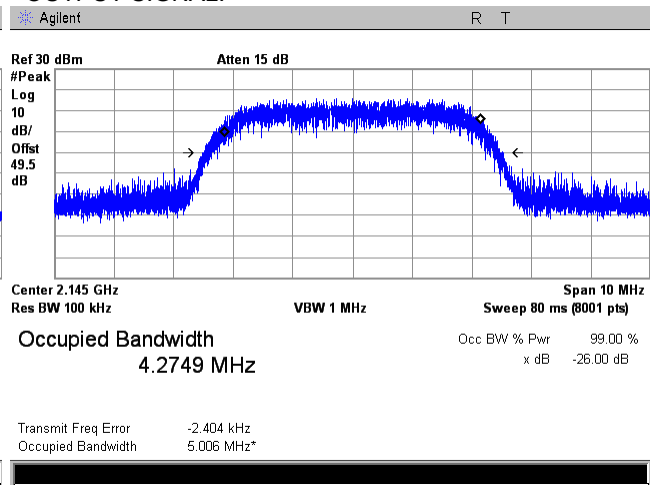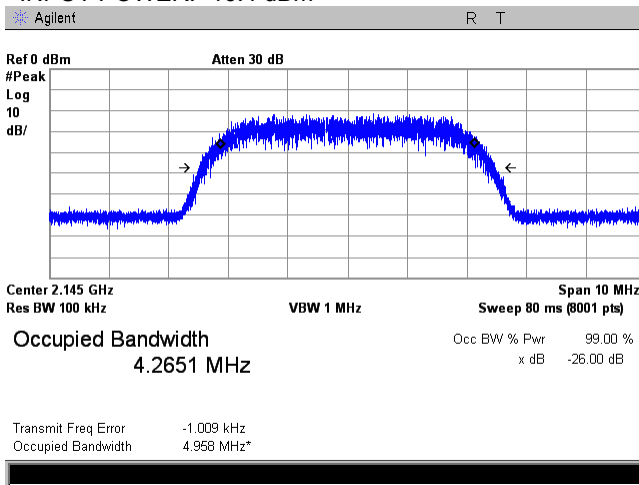

CONFIGURATION:  
INPUT POWER: -51 dBm

Above AGC threshold +3 dB  
OUTPUT SIGNAL:

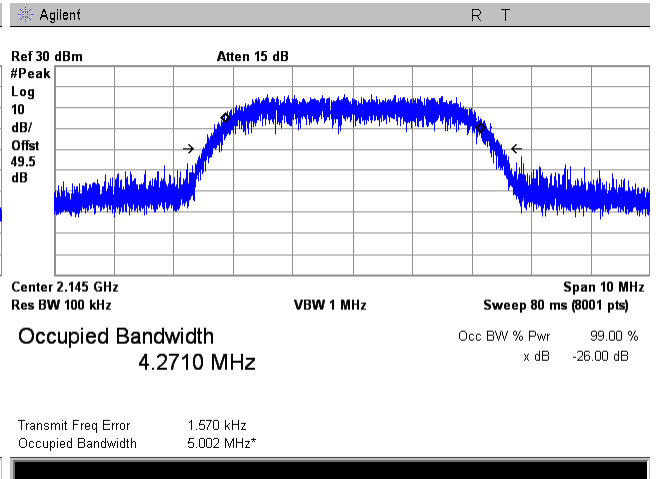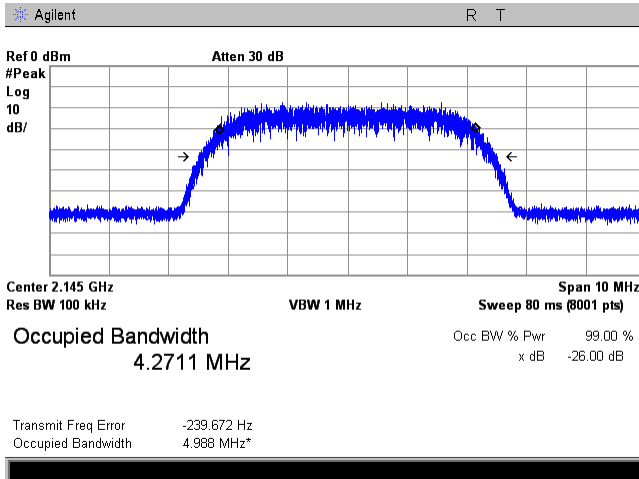



HERMON LABORATORIES

<b>Test specification: Section 2.1049, Occupied bandwidth</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 11-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



**Plot 7.2.2 Occupied bandwidth test result at mid frequency carrier, AWS+AWS3 Bands**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
INPUT PORT:  
CONFIGURATION:  
INPUT POWER: -16.4 dBm

2110.0 – 2180.0 MHz  
GSM uplink transmit  
AWS  
Single Channel  
INPUT POWER: -26 dBm

Agilent R T

Agilent R T

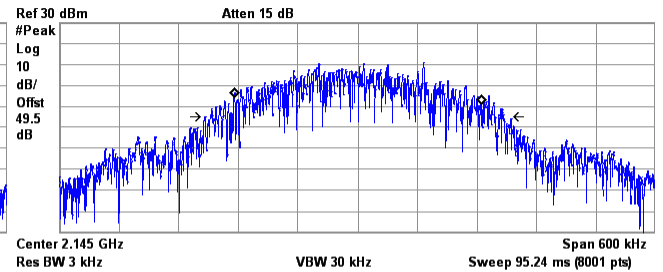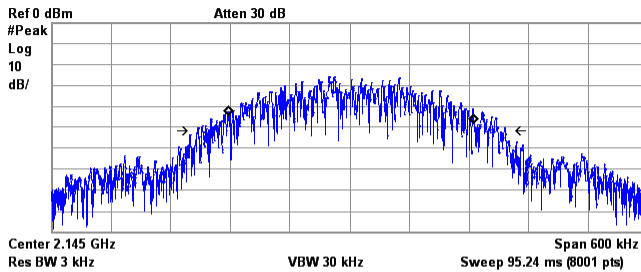

Occupied Bandwidth 246.2291 kHz  
Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Occupied Bandwidth 247.4056 kHz  
Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error 1.628 kHz  
Occupied Bandwidth 308.890 kHz\*



Transmit Freq Error 449.045 Hz  
Occupied Bandwidth 294.869 kHz\*

CONFIGURATION:  
INPUT POWER: -12.4 dBm

Single Channel  
INPUT POWER: -51 dBm

Agilent R T

Agilent R T

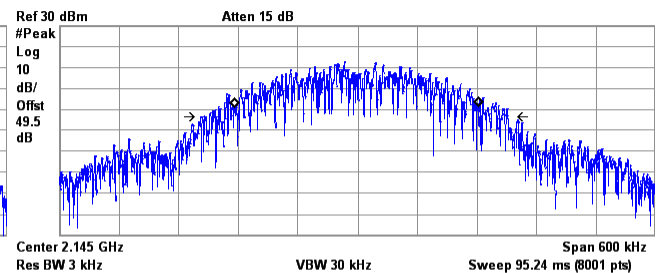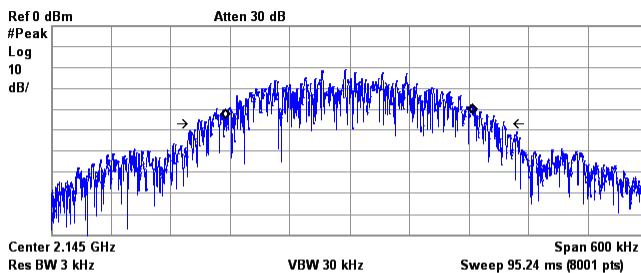

Occupied Bandwidth 248.5922 kHz  
Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Occupied Bandwidth 245.4037 kHz  
Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error -541.933 Hz  
Occupied Bandwidth 307.629 kHz\*

Transmit Freq Error -1.009 kHz  
Occupied Bandwidth 304.686 kHz\*





HERMON LABORATORIES

<b>Test specification: Section 2.1049, Occupied bandwidth</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 11-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.2.3 Occupied bandwidth test result at mid frequency carrier, AWS+AWS3 Bands**



FREQUENCY RANGE:  
OPERATIONAL MODE:  
INPUT PORT:  
CONFIGURATION:  
INPUT POWER: -56 dBm

2110.0 – 2180.0 MHz  
WCDMA uplink transmit  
AWS  
Below AGC threshold  
OUTPUT SIGNAL:

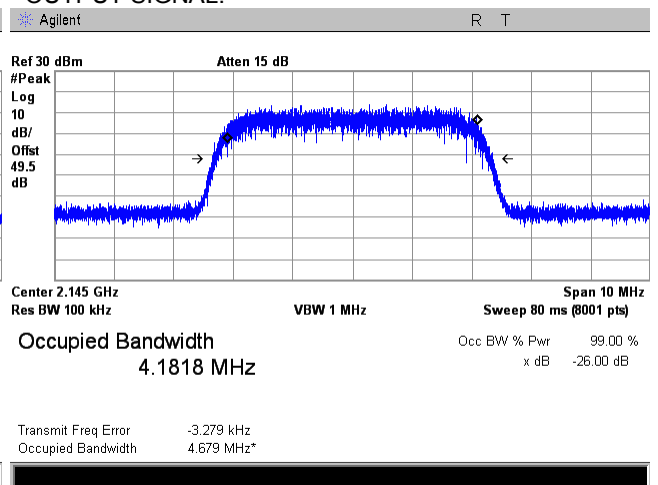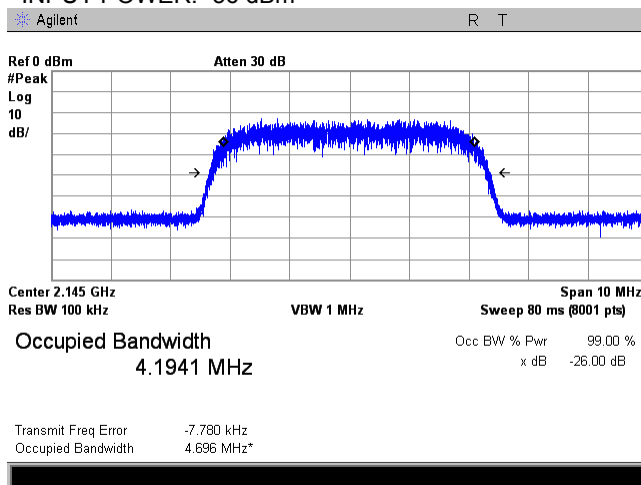

CONFIGURATION:  
INPUT POWER: -51 dBm

Above AGC threshold +3 dB  
OUTPUT SIGNAL:

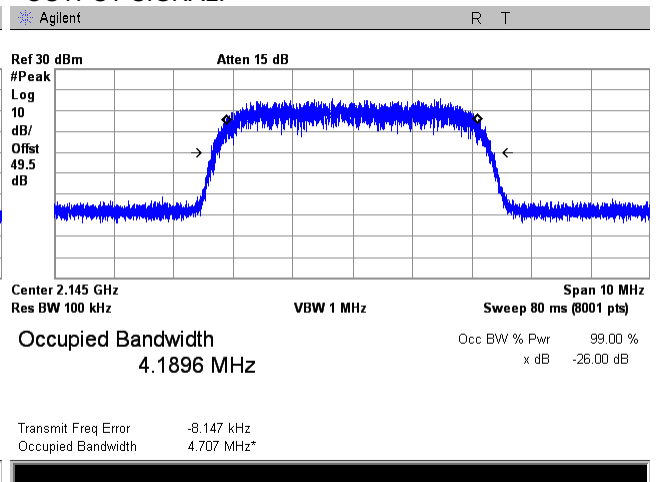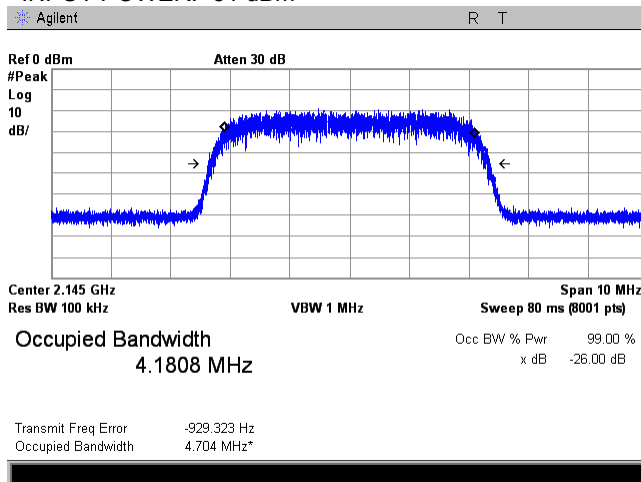



<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

### 7.3 Mean output power and booster gain test

#### 7.3.1 General

This test was performed to measure the peak output power at RF antenna connector. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Mean output power and booster gain test limits

Transmitter type	Assigned frequency range, MHz	Maximum peak output power, EIRP	
		W	dBm
Base and fixed stations	2110 – 2180	1640.0	62.0

Assigned frequency range, MHz	Tested frequency range	Maximum allowed Gain versus frequency response, dB
2110.0 – 2180.0	$F_0 \pm 250\% BW$	Output power (dBm) – input power (dBm)


#### 7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was adjusted to produce maximum available to the end user RF output power.

7.3.2.3 The peak output power was measured with spectrum analyzer as provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 Mean output power and booster gain test test setup

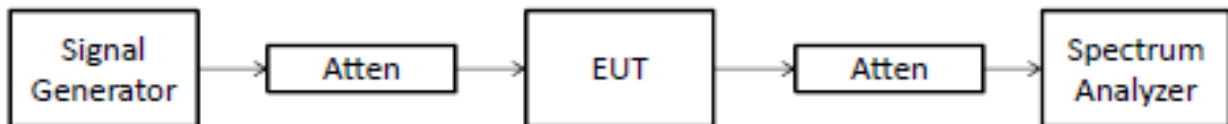





<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Table 7.3.2 Mean output power and booster gain test test results

ASSIGNED FREQUENCY RANGE: 2110.0 – 2180.0 MHz  
 DETECTOR USED: Average  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

MODULATION: AWGN

Carrier frequency, MHz	Input signal	SA reading, dBm		Booster gain**, dB	Antenna assembly gain***, dBi	EIRP***, dBm	Limit, dBm	Margin*, dB	Verdict
		Input	Output						
2112.5	Below AGC	-19.01	21.38	40.39	12.5	33.88	62.4	-28.52	Pass
	Above AGC	-14.97	22.13	37.10	12.5	34.63	62.4	-27.77	Pass
2145.0	Below AGC	-17.87	21.68	39.55	12.5	34.18	62.4	-28.22	Pass
	Above AGC	-13.95	21.58	35.53	12.5	34.08	62.4	-28.32	Pass
2177.5	Below AGC	-18.89	21.27	40.16	12.5	33.77	62.4	-28.63	Pass
	Above AGC	-14.78	22.02	36.80	12.5	34.52	62.4	-27.88	Pass

MODULATION: GSM

Carrier frequency, MHz	Input signal	SA reading, dBm		Booster gain**, dB	Antenna assembly gain***, dBi	EIRP***, dBm	Limit, dBm	Margin*, dB	Verdict
		Input	Output						
2110.0	Below AGC	-19.87	21.32	41.19	12.5	33.82	62.4	-28.58	Pass
	Above AGC	-16.28	21.12	37.40	12.5	33.62	62.4	-28.78	Pass
2145.0	Below AGC	-19.85	21.40	41.25	12.5	33.90	62.4	-28.50	Pass
	Above AGC	-16.47	21.78	38.25	12.5	34.28	62.4	-28.12	Pass
2180.0	Below AGC	-18.92	21.12	40.04	12.5	33.62	62.4	-28.78	Pass
	Above AGC	-15.23	21.62	36.85	12.5	34.12	62.4	-28.28	Pass

MODULATION: W-CDMA

Carrier frequency, MHz	Input signal	SA reading, dBm		Booster gain**, dB	Antenna assembly gain, dBi	EIRP***, dBm	Limit, dBm	Margin*, dB	Verdict
		Input	Output						
2112.5	Below AGC	-18.91	21.46	40.37	12.5	33.96	62.4	-28.44	Pass
	Above AGC	-15.01	21.31	36.32	12.5	33.81	62.4	-28.59	Pass
2145.0	Below AGC	-18.92	21.41	40.33	12.5	33.91	62.4	-28.49	Pass
	Above AGC	-15.15	21.90	37.05	12.5	34.40	62.4	-28.00	Pass
2177.5	Below AGC	-18.89	21.00	39.89	12.5	33.50	62.4	-28.90	Pass
	Above AGC	-15.00	21.69	36.69	12.5	34.19	62.4	-28.21	Pass

\* - Margin, dB = Limit EIRP, dBm - RF output power EIRP\*\*\*, dBm  
 \*\* - Booster Gain = Output SA reading – Input SA reading  
 \*\*\* - RF output power EIRP, dBm = SA reading average, dBm + Antenna gain, dBi

Reference numbers of test equipment used

HL 2909	HL 3234	HL 3345	HL 3767	HL 3780	HL 4354		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.3.1 Mean output power and booster gain test results at low frequency



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL: -19.4 dBm

2110 – 2180 MHz  
AWGN downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL:

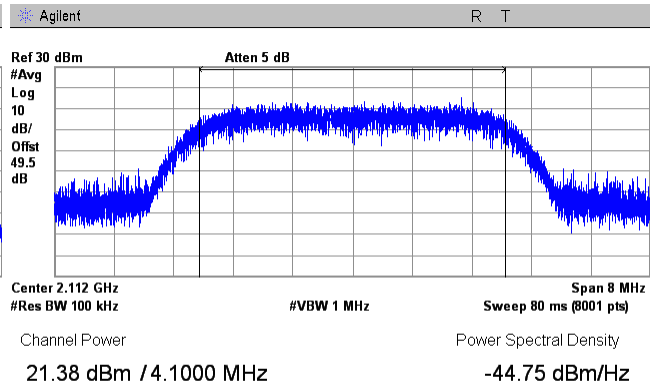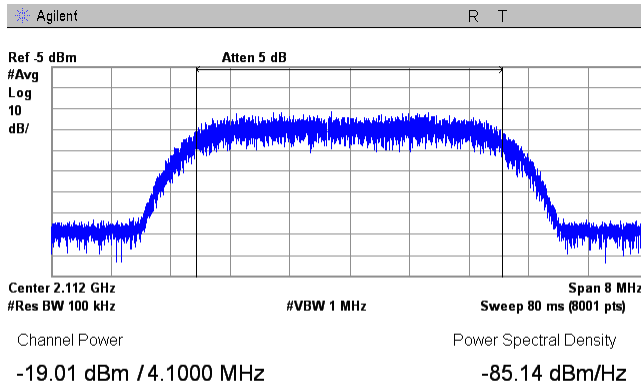

CONFIGURATION:  
INPUT SIGNAL: -15.4 dBm

Above AGC threshold +3dB  
OUTPUT SIGNAL:

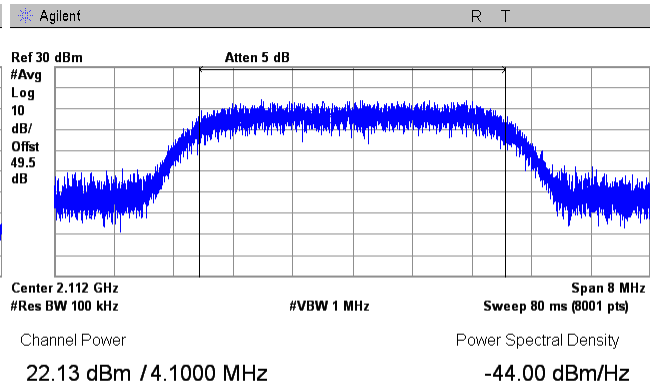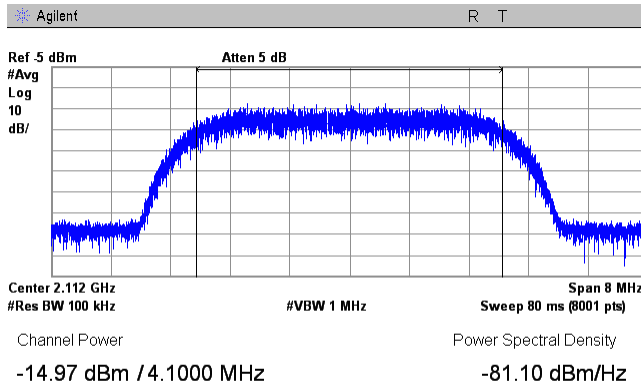





HERMON LABORATORIES

<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.3.2 Mean output power and booster gain test results at mid frequency**



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL: -18.4 dBm

2110 – 2180 MHz  
AWGN downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL:

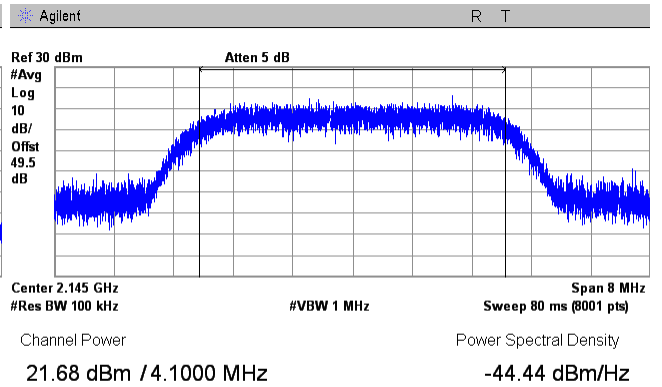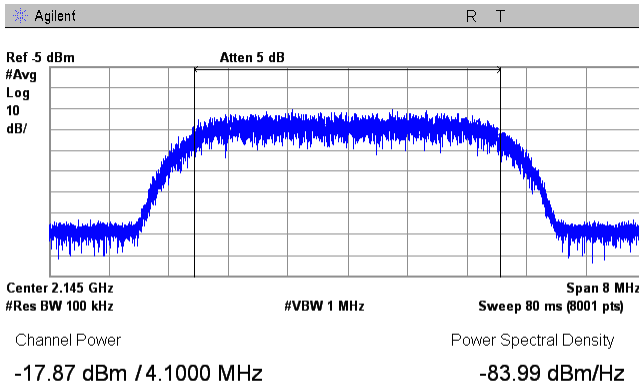

CONFIGURATION:  
INPUT SIGNAL: --14.4 dBm

Above AGC threshold +3dB  
OUTPUT SIGNAL:

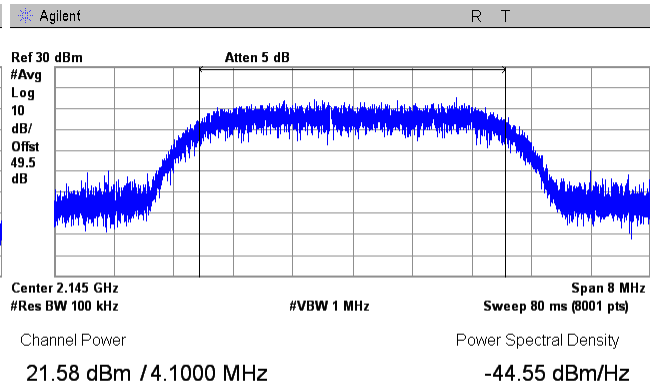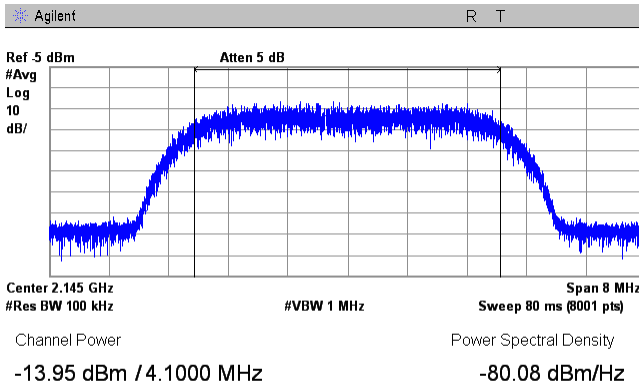





<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.3.3 Mean output power and booster gain test results at high frequency**



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL: -19.4 dBm

2110 – 2180 MHz  
AWGN downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL:

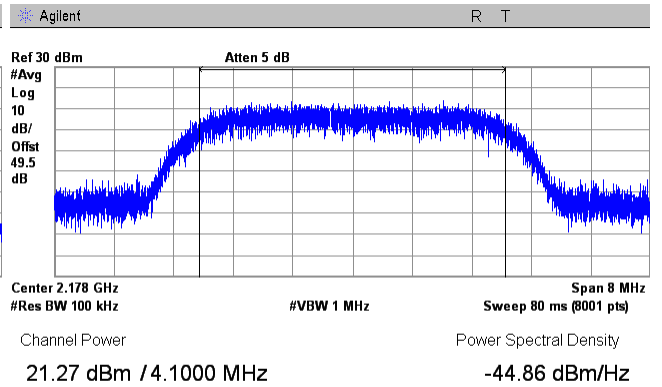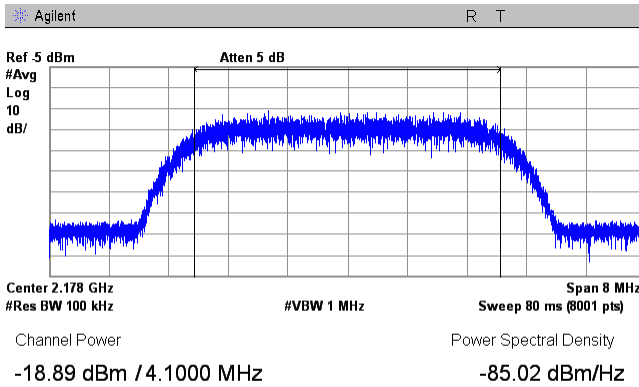

CONFIGURATION:  
INPUT SIGNAL: --14.4 dBm

Above AGC threshold +3dB  
OUTPUT SIGNAL:

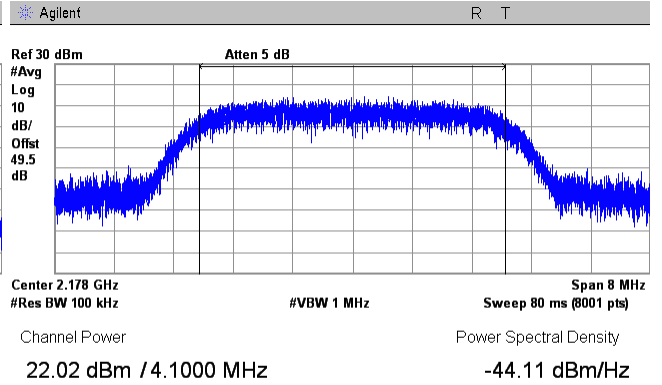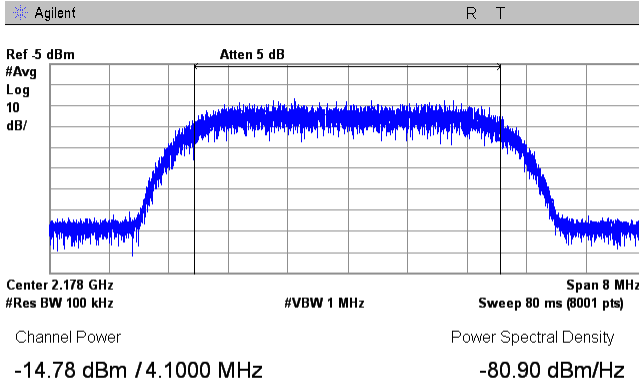





HERMON LABORATORIES

<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.3.4 Mean output power and booster gain test results at low frequency



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL: -19.4 dBm

2110 – 2180 MHz  
GSM downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL:

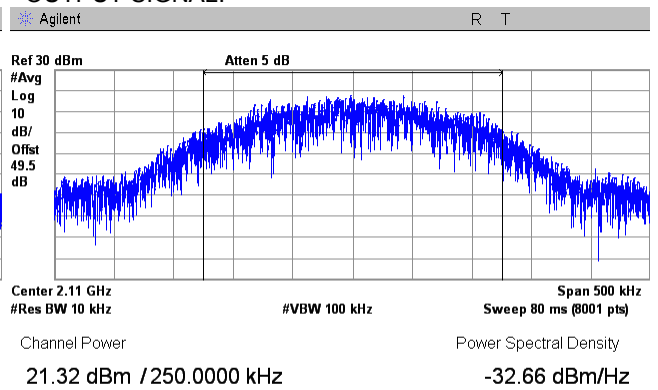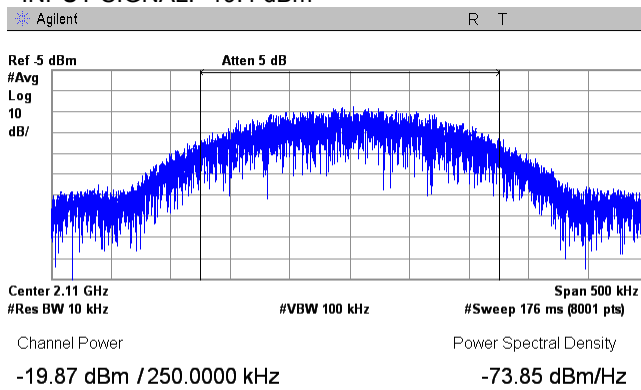

CONFIGURATION:  
INPUT SIGNAL: --15.4 dBm

Above AGC threshold +3dB  
OUTPUT SIGNAL:

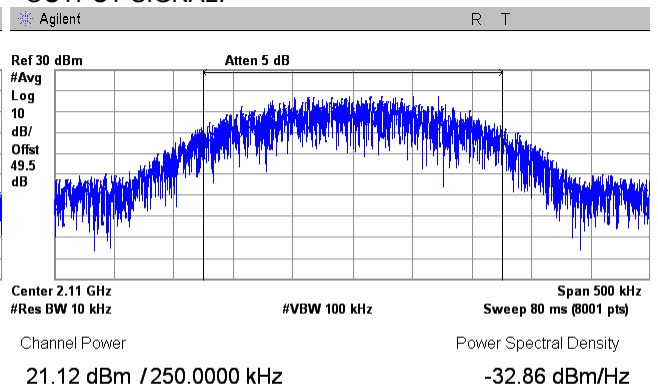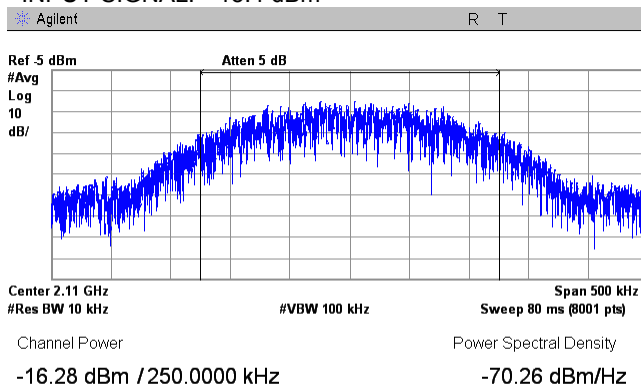





HERMON LABORATORIES

<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.3.5 Mean output power and booster gain test results at mid frequency**



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL: -19.4 dBm

2110 – 2180 MHz  
GSM downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL:

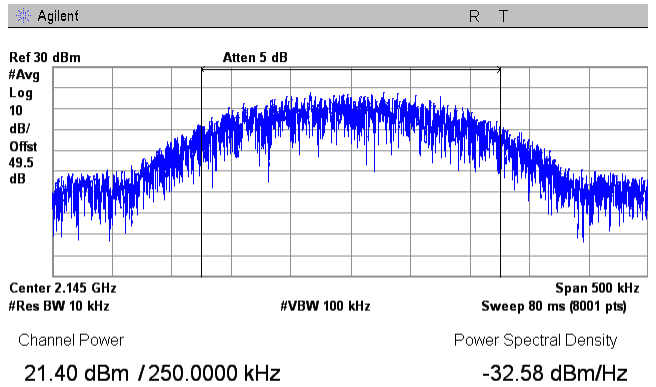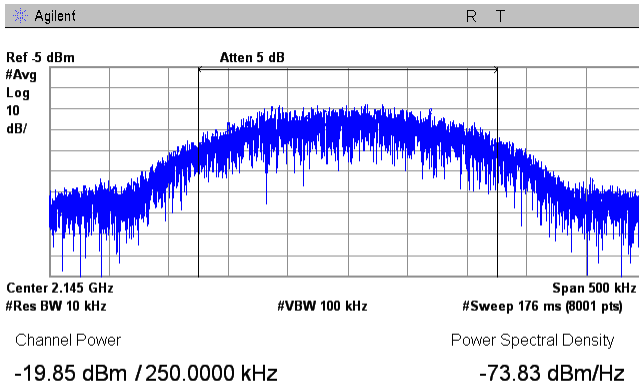

CONFIGURATION:  
INPUT SIGNAL: --15.4 dBm

Above AGC threshold +3dB  
OUTPUT SIGNAL:

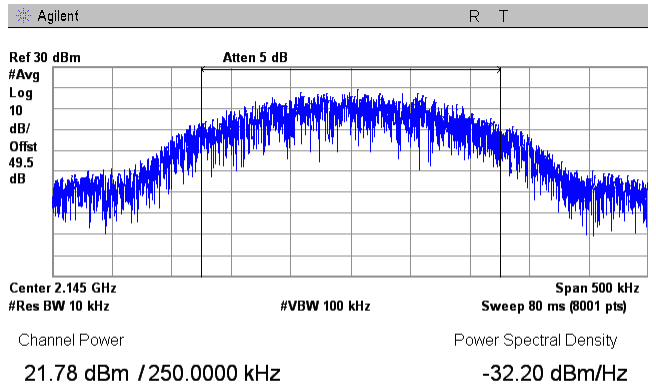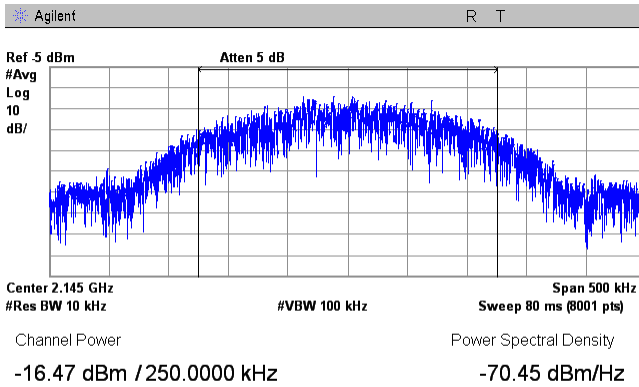





HERMON LABORATORIES

<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.3.6 Mean output power and booster gain test results at high frequency**



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL: -18.4 dBm

2110 – 2180 MHz  
GSM downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL:

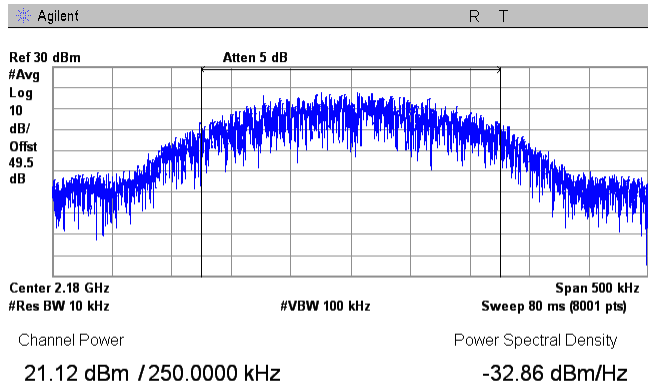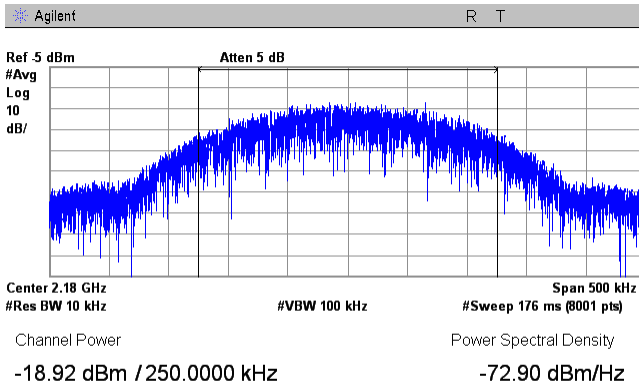

CONFIGURATION:  
INPUT SIGNAL: --14.4 dBm

Above AGC threshold +3dB  
OUTPUT SIGNAL:

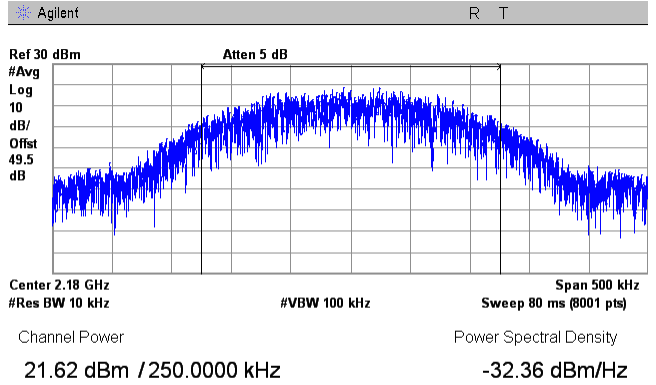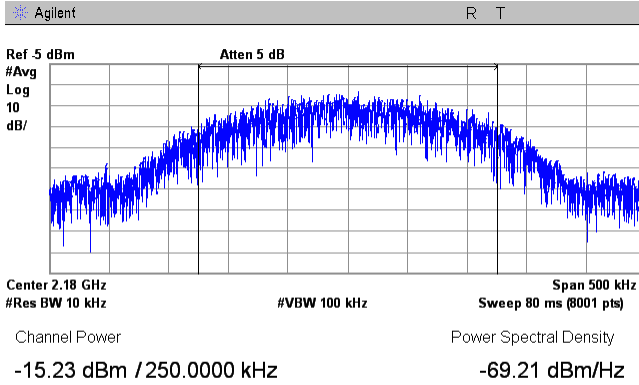





HERMON LABORATORIES

<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.3.7 Mean output power and booster gain test results at low frequency



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL: -19.4 dBm

2110 – 2180 MHz  
W-CDMA downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL:

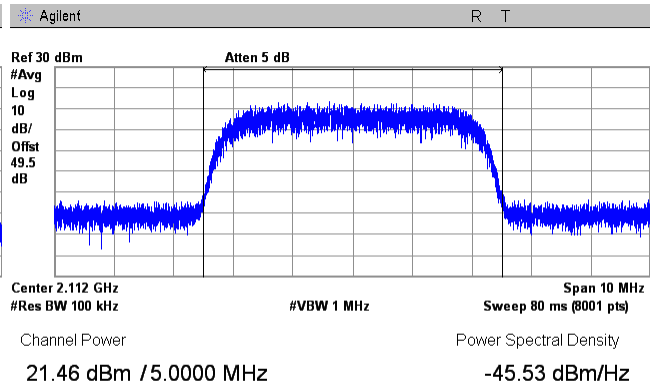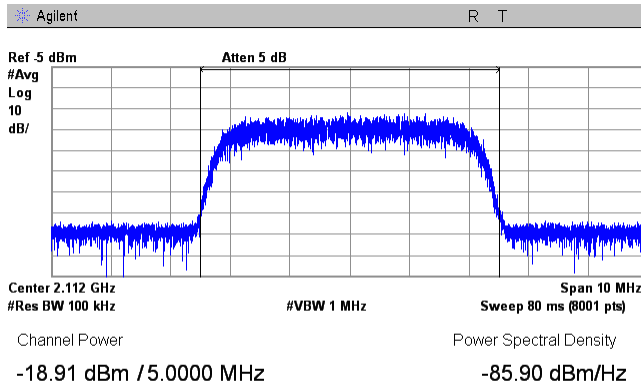

CONFIGURATION:  
INPUT SIGNAL: -15.4 dBm

Above AGC threshold +3dB  
OUTPUT SIGNAL:

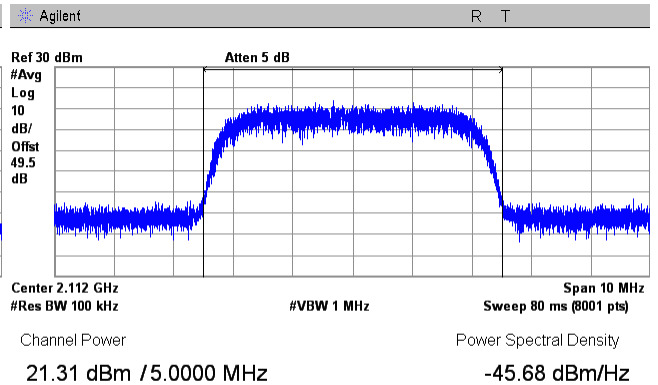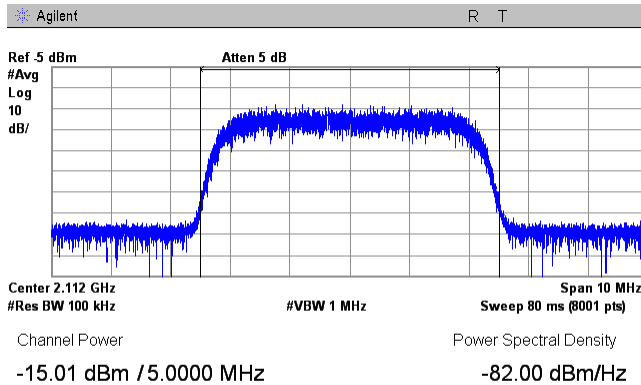







HERMON LABORATORIES

<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.3.8 Mean output power and booster gain test results at mid frequency**



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL: -19.4 dBm

2110 – 2180 MHz  
W-CDMA downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL:

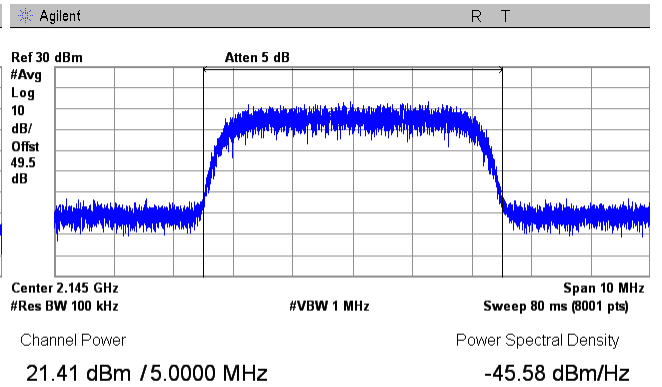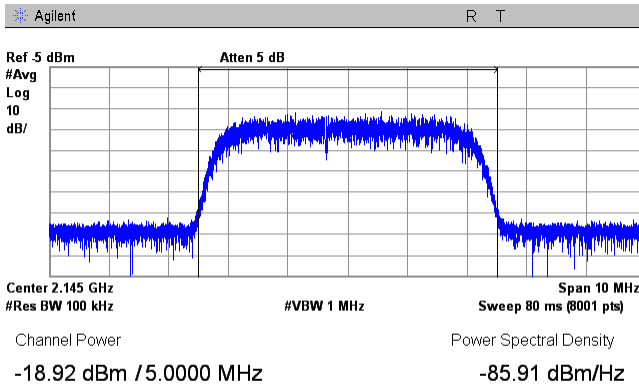

CONFIGURATION:  
INPUT SIGNAL: --15.4 dBm

Above AGC threshold +3dB  
OUTPUT SIGNAL:

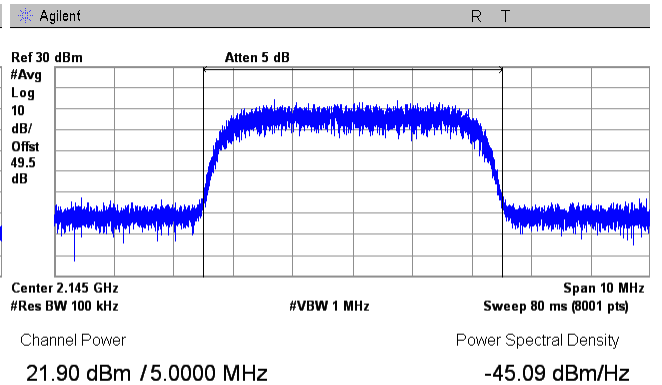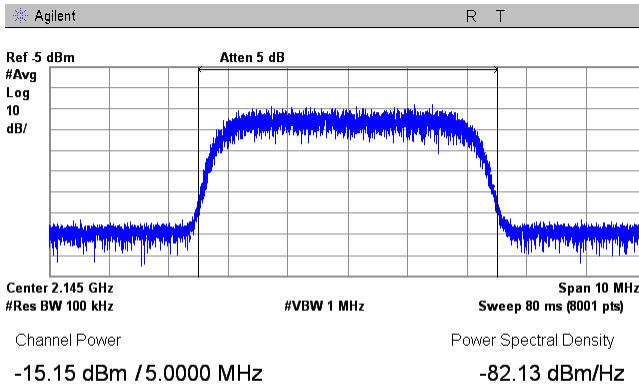





<b>Test specification:</b> Section 27.50(d), Mean output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b>	
<b>Date(s):</b> 15-Aug-16			
<b>Temperature:</b> 24.1 °C	<b>Relative Humidity:</b> 49 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.3.9 Mean output power and booster gain test results at high frequency**



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL: -19.4 dBm

2110 – 2180 MHz  
W-CDMA downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL:

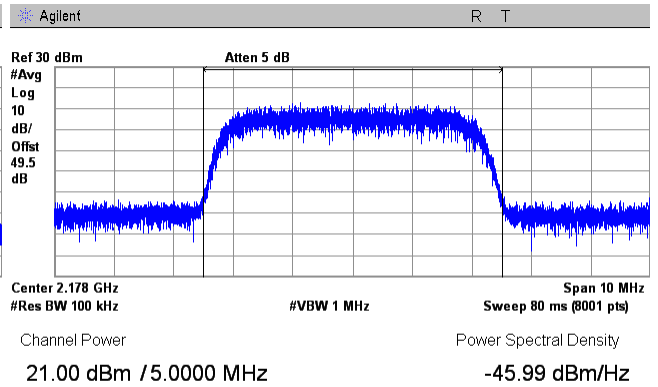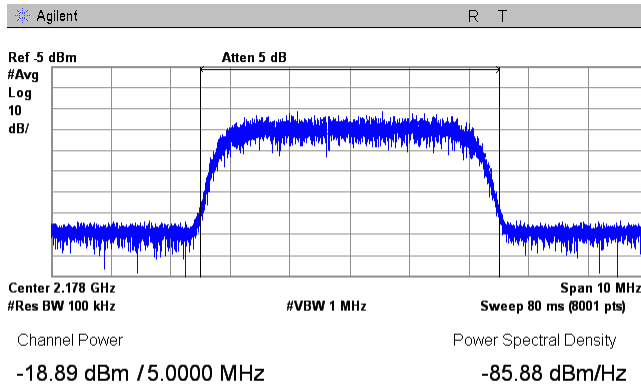

CONFIGURATION:  
INPUT SIGNAL: --15.4 dBm

Above AGC threshold +3dB  
OUTPUT SIGNAL:

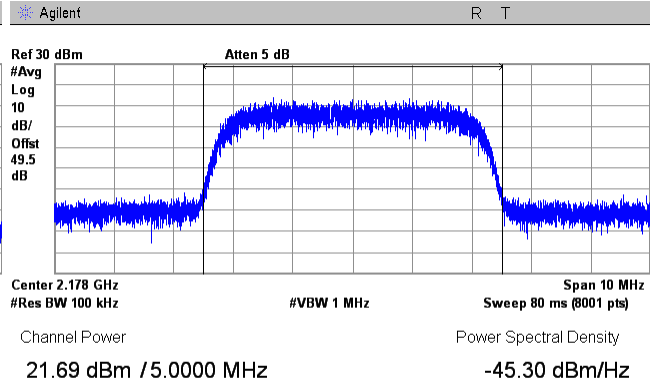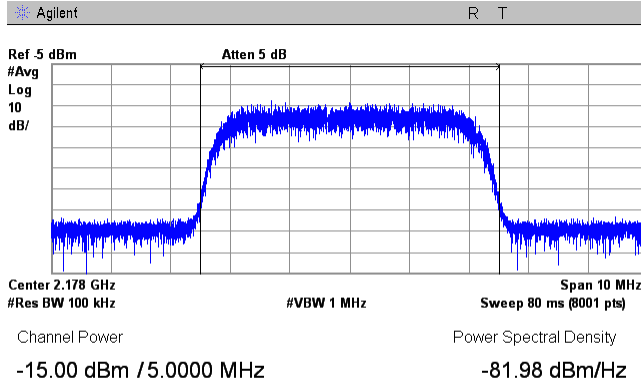



<b>Test specification: Section 2.1049, Out-of-band rejection test</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16 - 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.4 Out-of-band rejection test

### 7.4.1 General

This test was performed to measure amplifier pass bandwidth. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Out-of-band rejection limits

Assigned frequency range, MHz	Tested frequency range	Modulation envelope reference points*, dBc
2110.0 – 2180.0	$F_0 \pm 250\% BW$	20

\* - Modulation envelope reference points are provided in terms of attenuation below the unmodulated carrier.


### 7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The EUT was set to amplify the unmodulated carrier and the reference peak power level was measured.

7.4.2.3 The amplifier 20dB bandwidth was measured with spectrum analyzer as a frequency delta between the reference points on modulation envelope and provided in Table 7.4.2 and the associated plots.

Figure 7.4.1 Out-of-band rejection test setup

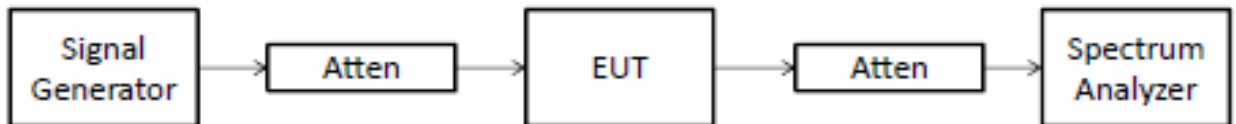



<b>Test specification: Section 2.1049, Out-of-band rejection test</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16 - 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Table 7.4.2 Out-of-band rejection test results

FREQUENCY RANGE: 2110.0 – 2180.0 MHz Downlink  
 MIDBAND FREQUENCY: 2145.0 MHz  
 SWEEP FREQUENCY RANGE: 1970.0 – 2320.0 MHz  
 DETECTOR USED: Peak hold  
 RESOLUTION BANDWIDTH: 1 MHz  
 VIDEO BANDWIDTH: 3 MHz  
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Input Power, dBm	Start Band frequency, MHz	Stop Band frequency, MHz	Occupied bandwidth, MHz	Limit, MHz	Verdict
-23.1	2086.81	2197.18	110.43	NA	Comply

Reference numbers of test equipment used

HL 2909	HL 3234	HL 3345	HL 3767	HL 3780			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification: Section 2.1049, Out-of-band rejection test</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16 - 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.4.1 Out-of-band rejection test result at low frequency

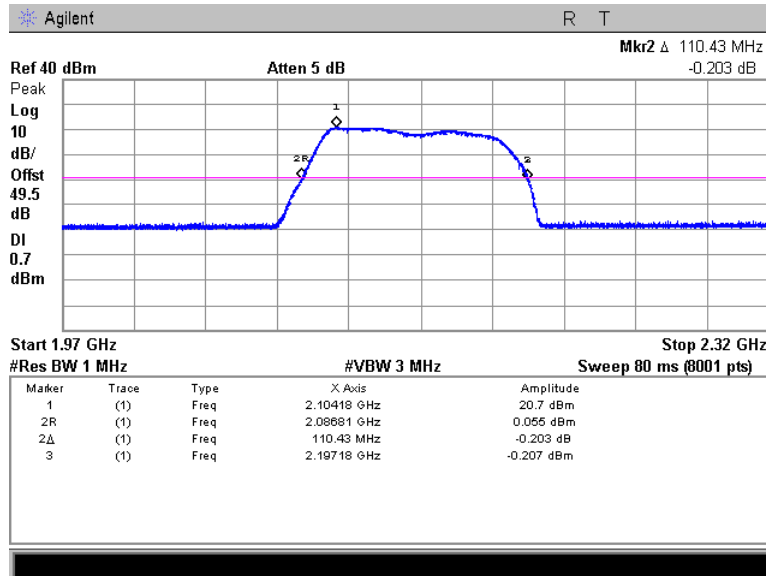

Plot 7.4.2 Out-of-band rejection test result at low frequency

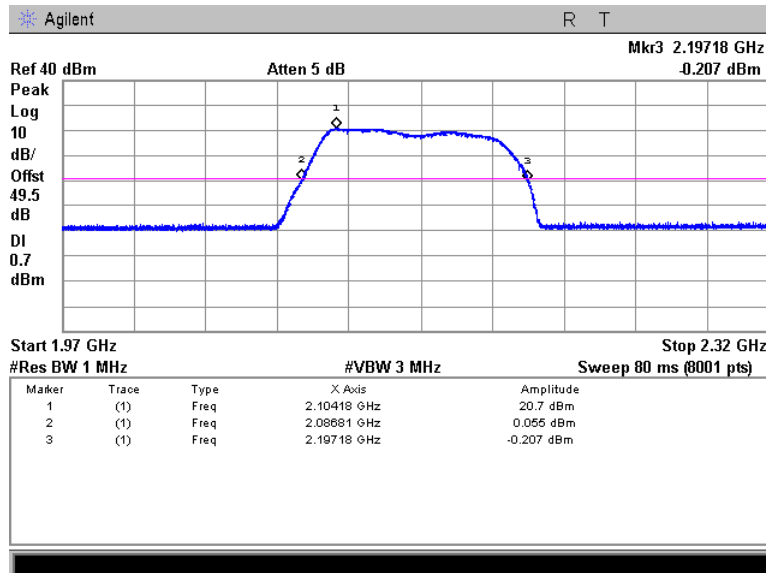



<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.5 Out-of-band emissions at RF connector test

### 7.5.1 General

This test was performed to measure out-of-band spurious emissions at the channel edge at the RF antenna connector. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Out-of-band spurious emission limits

Channel	Frequency range	Attenuation below carrier, dBc	RBW	Limit, dBm
<b>Modulation AWGN/WCDMA</b>				
Low	2109 - 2110	43+ 10*Log (P*)	100 kHz	-13.0
	2107 - 2109	43+ 10*Log (P*)	1 MHz	-13.0
High	2180 - 2181	43+ 10*Log (P*)	100 kHz	-13.0
	2181 - 2183	43+ 10*Log (P*)	1 MHz	-13.0
<b>Modulation GSM</b>				
Low	2109 - 2110	43+ 10*Log (P*)	3 kHz	-13.0
	2107 - 2109	43+ 10*Log (P*)	1 MHz	-13.0
High	2180 - 2181	43+ 10*Log (P*)	3 kHz	-13.0
	2181 - 2183	43+ 10*Log (P*)	1 MHz	-13.0


\* - P is transmitter output power in Watts

### 7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The spurious emission was measured with spectrum analyzer as provided in Table 7.5.2 and the associated plots.

Figure 7.5.1 Out-of-band spurious emission test setup

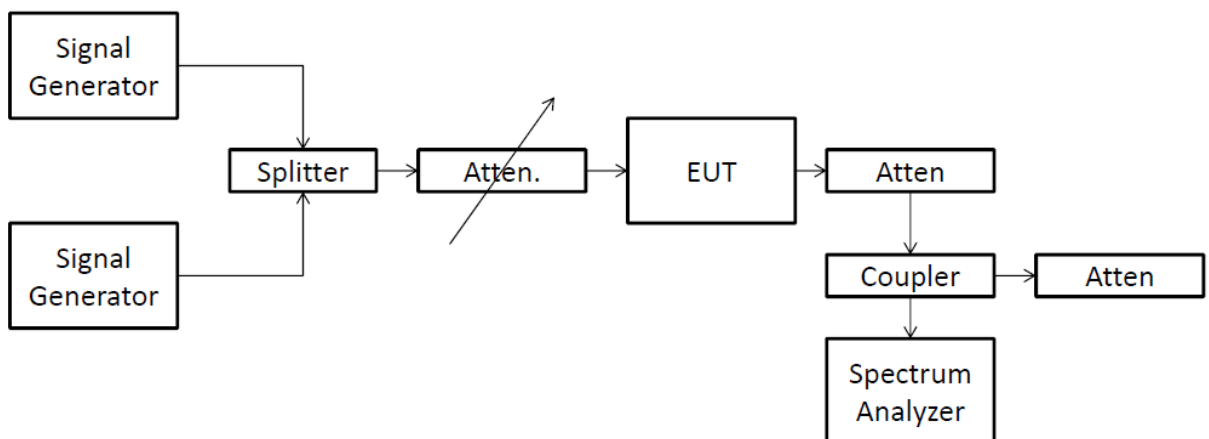



<b>Test specification:</b> Section 27.53, Out-of-band emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Table 7.5.2 Out-of-band spurious emission test results

ASSIGNED FREQUENCY RANGE: 2110 – 2180 MHz  
 DETECTOR USED: Average  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	SA reading, dBm		RBW, kHz	Integrated over bandwidth, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
	Below AGC	Above AGC						
<b>Modulation AWGN</b>								
2109.50	-18.76	-16.23	100	1000	-16.23	-13.0	-3.23	Pass
2180.50	-20.25	-14.85	100	1000	-14.85	-13.0	-1.85	Pass
<b>Modulation GSM</b>								
2109.998	-17.18	-17.16	3	NA	-17.16	-13.0	-4.16	Pass
2180.000	-17.95	-15.28	3	NA	-15.28	-13.0	-2.28	Pass
<b>Modulation WCDMA</b>								
2109.50	-31.86	-32.74	100	1000	-32.74	-13.0	-19.74	Pass
2180.50	-29.67	-29.71	100	1000	-29.71	-13.0	-16.71	Pass

**Reference numbers of test equipment used**

HL 2909	HL 3234	HL 3345	HL 3767	HL 3780			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.1 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge**

OPERATING FREQUENCY RANGE:

2110 – 2180 MHz

DETECTOR USED:

Average

CONFIGURATION:

Downlink

MODULATION:

AWGN/AWGN

COMPOSITE INPUT SIGNAL:



-19.4 dBm

CONFIGURATION: Below AGC threshold

CONFIGURATION: Above AGC threshold +3dB

Agilent R T

Agilent R T

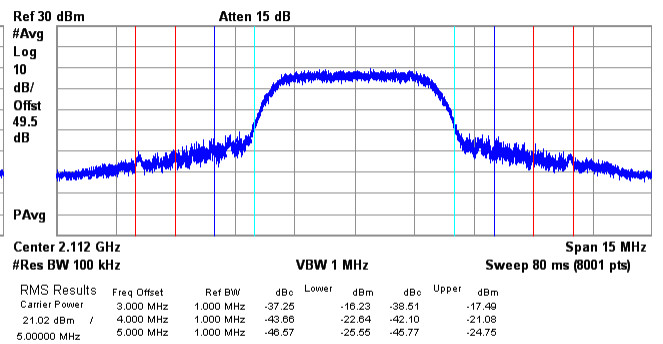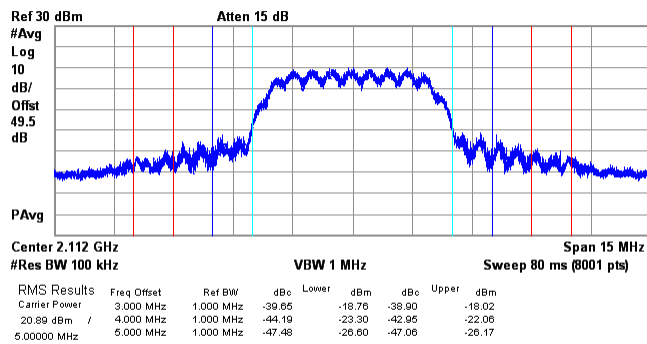

SINGLE TEST SIGNAL INPUT:



-19.4 dBm

CONFIGURATION: Below AGC threshold

CONFIGURATION: Above AGC threshold +3dB

Agilent R T

Agilent R T

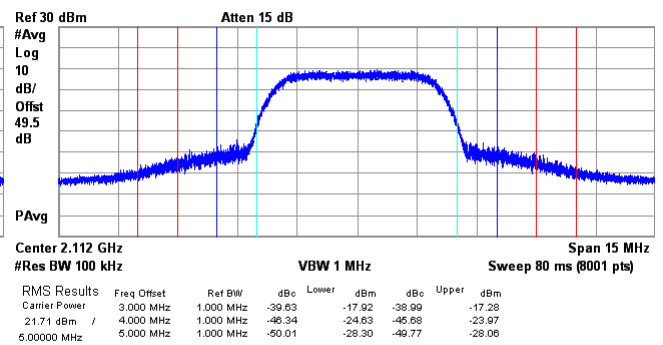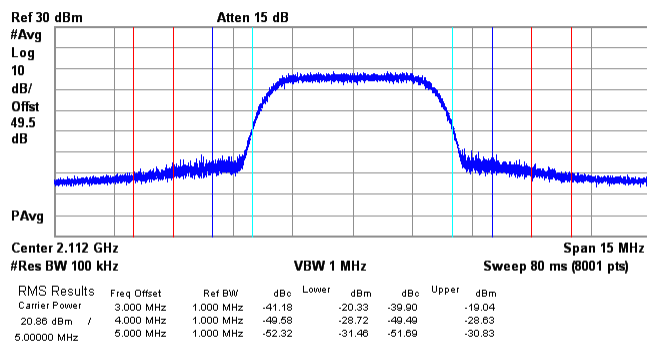







HERMON LABORATORIES

<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.5.2 Out-of-band spurious emission test results at high carrier frequency, Upper band Edge



OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
COMPOSITE INPUT SIGNAL:  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
AWGN/AWGN  
-19.4 dBm  
CONFIGURATION: Above AGC threshold +3dB

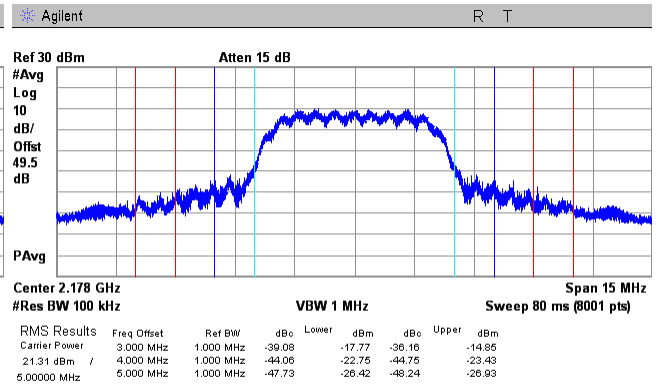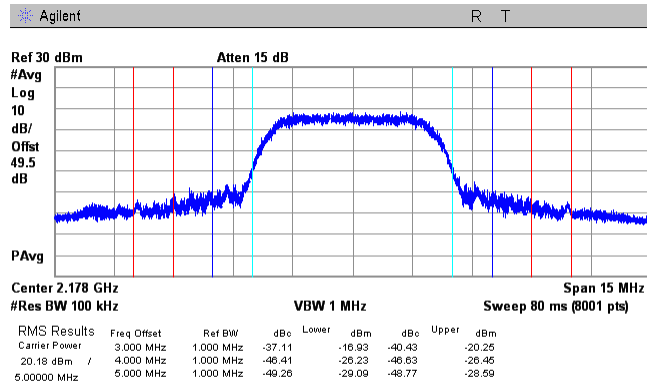

SINGLE TEST SIGNAL INPUT:  
CONFIGURATION: Below AGC threshold

-19.4 dBm  
CONFIGURATION: Above AGC threshold +3dB

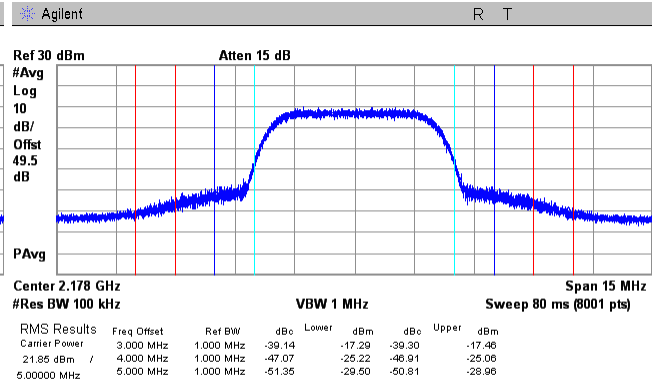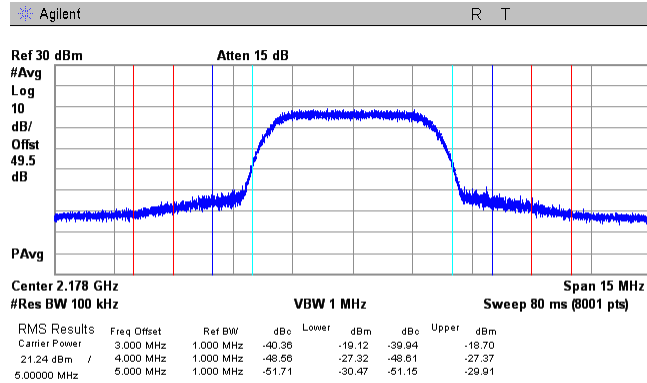





HERMON LABORATORIES

<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.3 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge**

OPERATING FREQUENCY RANGE: 2110 – 2180 MHz  
DETECTOR USED: Average  
CONFIGURATION: Downlink  
MODULATION: GSM/GSM  
COMPOSITE INPUT SIGNAL: -19.4 dBm  
CONFIGURATION: Below AGC threshold

CONFIGURATION: Above AGC threshold +3dB

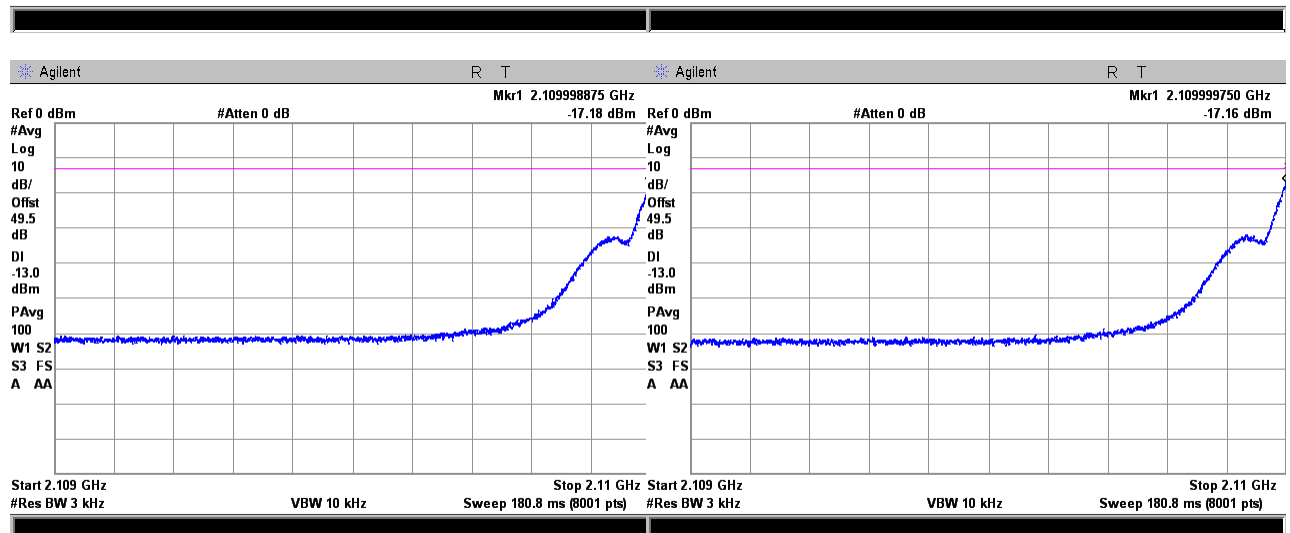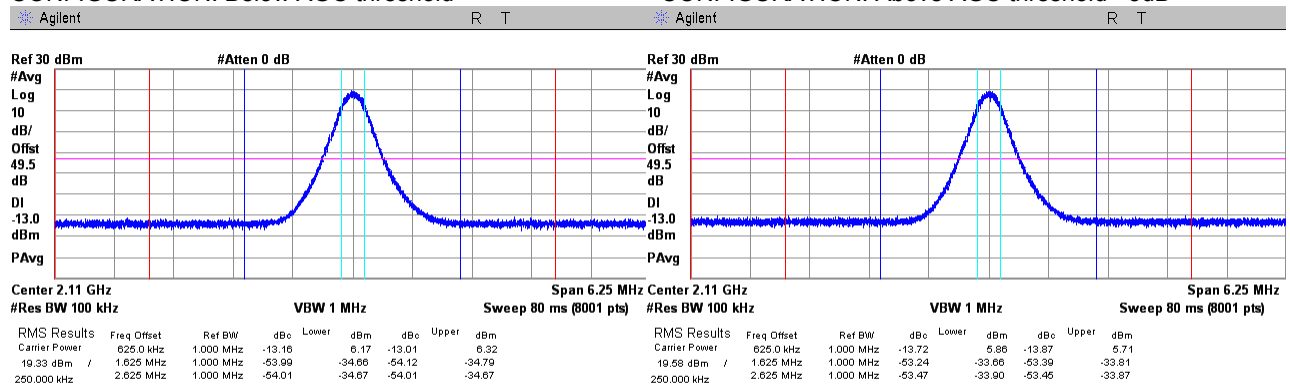





HERMON LABORATORIES

<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.4 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge**

OPERATING FREQUENCY RANGE:	2110 – 2180 MHz
DETECTOR USED:	Average
CONFIGURATION:	Downlink
MODULATION:	GSM/GSM
SINGLE TEST SIGNAL INPUT:	-19.4 dBm
CONFIGURATION: Below AGC threshold	CONFIGURATION: Above AGC threshold +3dB

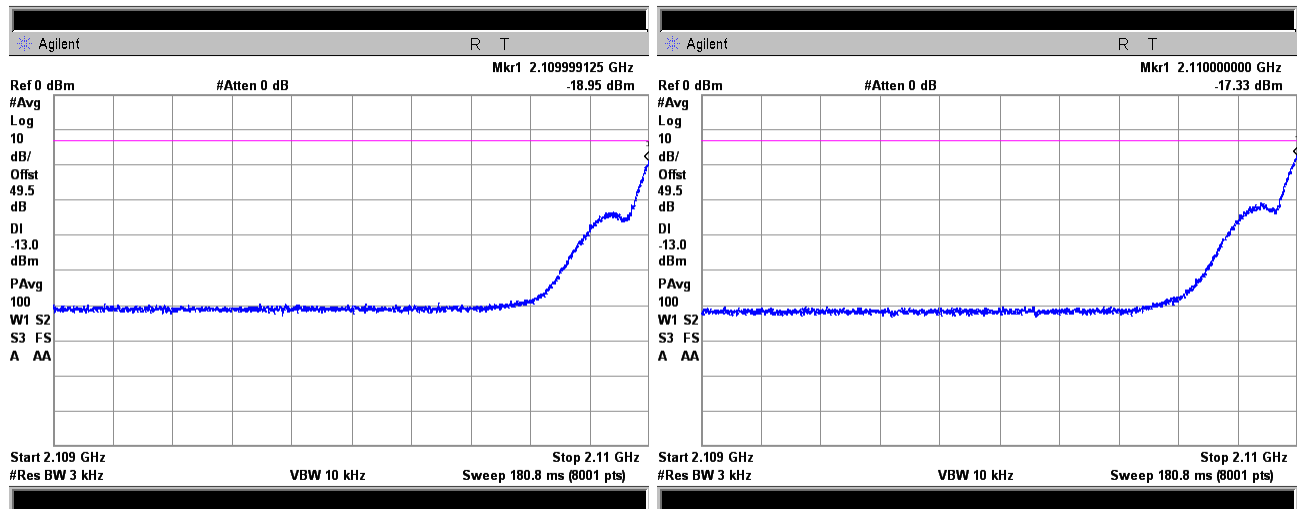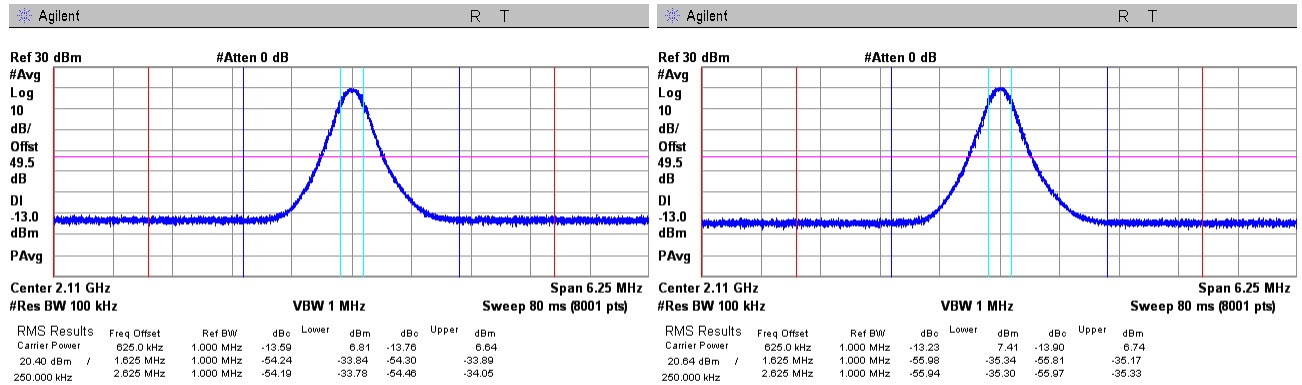



HERMON LABORATORIES

<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.5 Out-of-band spurious emission test results at high carrier frequency, Upper band Edge**

OPERATING FREQUENCY RANGE:

2110 – 2180 MHz

DETECTOR USED:

Average

CONFIGURATION:

Downlink

MODULATION:

GSM/GSM

COMPOSITE INPUT SIGNAL:



-19.4 dBm

CONFIGURATION: Below AGC threshold

CONFIGURATION: Above AGC threshold +3dB

Agilent R T

Agilent R T

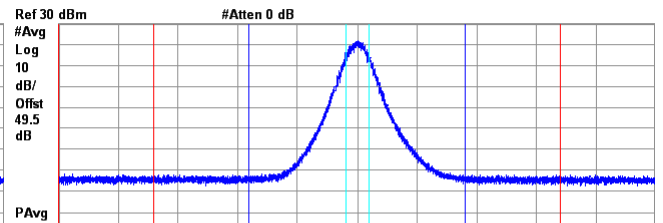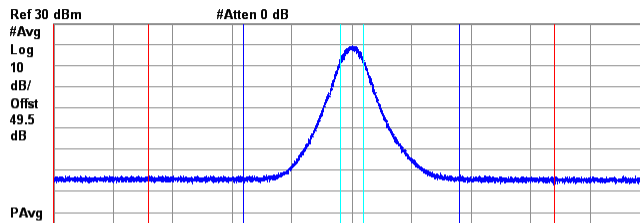

Center 2.18 GHz #Res BW 100 kHz VBW 1 MHz Sweep 80 ms (8001 pts)



RMS Results		Freq Offset	Ref BW	dBc	Lower	dBm	Upper	dBm
Carrier Power	625.0 kHz	1.000 MHz	-13.95	6.09	-14.06	6.97		
20.04 dBm	/	1.625 MHz	1.000 MHz	-54.87	-34.84	-55.01	-34.98	
250.000 kHz		2.625 MHz	1.000 MHz	-54.96	-34.92	-55.32	-35.28	

Center 2.18 GHz #Res BW 100 kHz VBW 1 MHz Sweep 80 ms (8001 pts)

RMS Results		Freq Offset	Ref BW	dBc	Lower	dBm	Upper	dBm
Carrier Power	625.0 kHz	1.000 MHz	-14.13	7.75	-13.72	8.16		
21.89 dBm	/	1.625 MHz	1.000 MHz	-56.83	-34.94	-56.94	-35.06	
250.000 kHz		2.625 MHz	1.000 MHz	-56.74	-34.85	-57.02	-35.14	

Agilent R T

Agilent R T

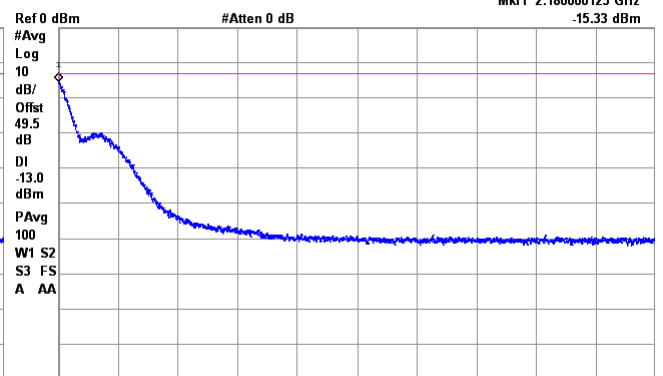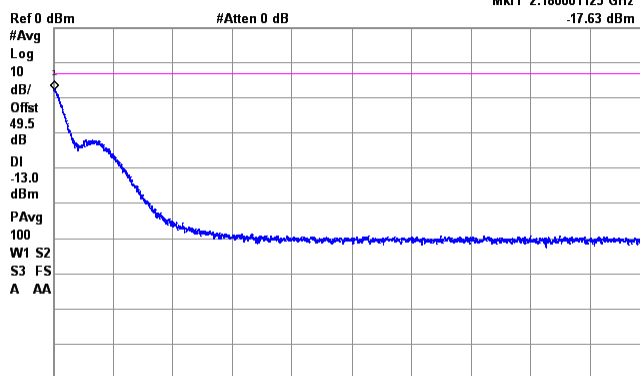

Start 2.18 GHz #Res BW 3 kHz VBW 10 kHz Sweep 180.8 ms (8001 pts)

Start 2.18 GHz #Res BW 3 kHz VBW 10 kHz Sweep 180.8 ms (8001 pts)







HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Out-of-band emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.5.6 Out-of-band spurious emission test results at high carrier frequency, Upper band Edge

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
SINGLE TEST SIGNAL INPUT:  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
GSM/GSM  
-19.4 dBm  
CONFIGURATION: Above AGC threshold +3dB

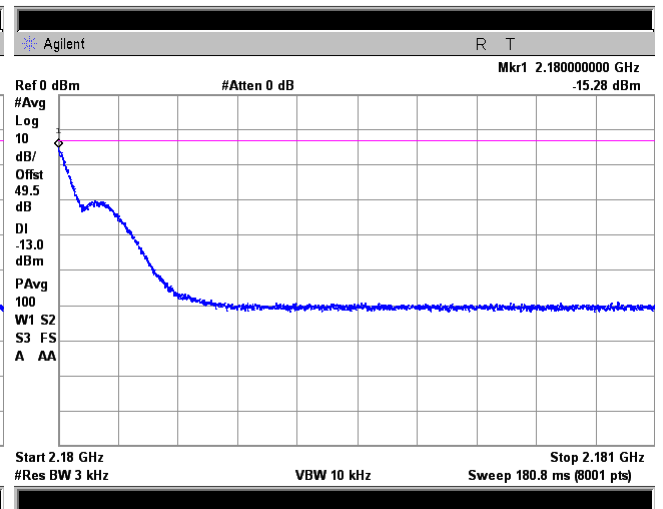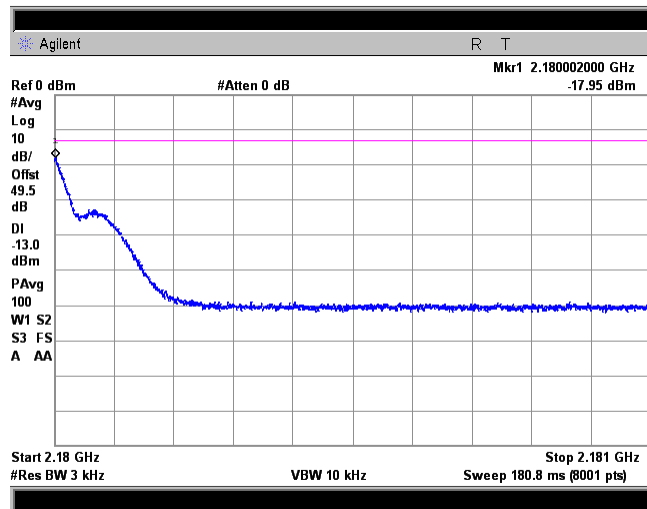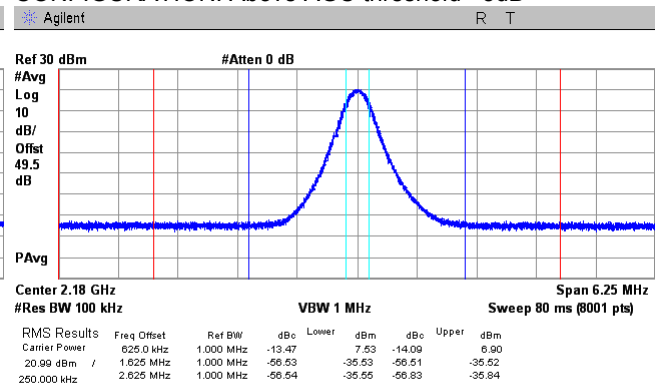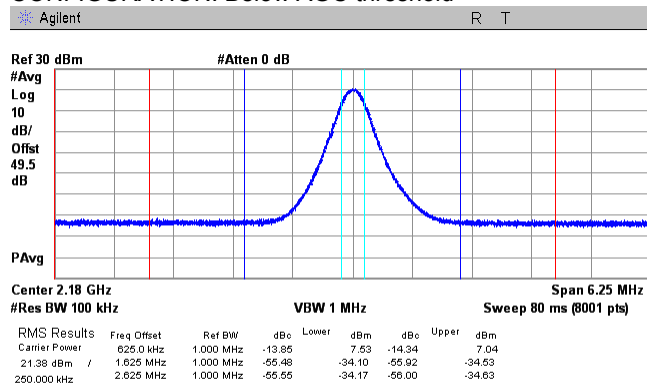




HERMON LABORATORIES

<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.7 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge**


OPERATING FREQUENCY RANGE: 2110 – 2180 MHz  
DETECTOR USED: Average  
CONFIGURATION: Downlink  
MODULATION: WCDMA/WCDMA  
COMPOSITE INPUT SIGNAL: -19.4 dBm  
CONFIGURATION: Below AGC threshold

OPERATING FREQUENCY RANGE: 2110 – 2180 MHz  
DETECTOR USED: Average  
CONFIGURATION: Downlink  
MODULATION: WCDMA/WCDMA  
COMPOSITE INPUT SIGNAL: -19.4 dBm  
CONFIGURATION: Above AGC threshold +3dB

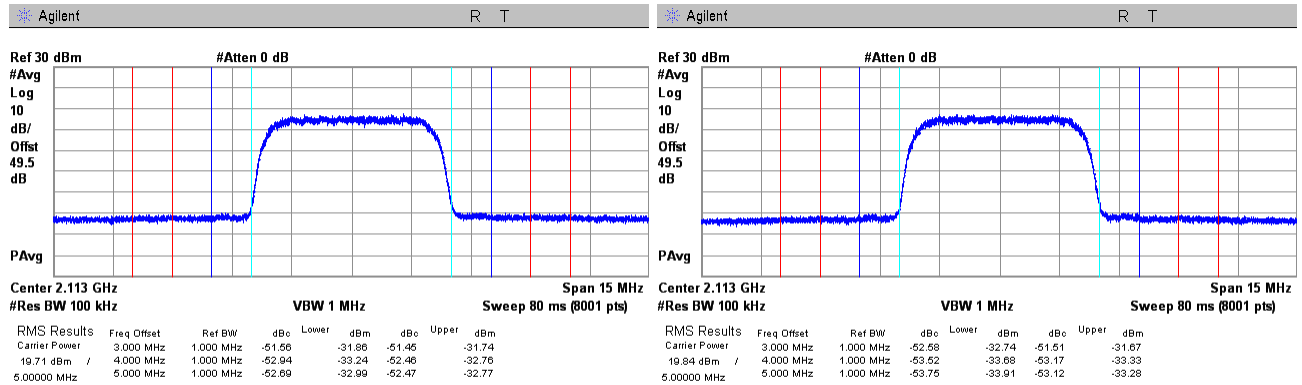

SINGLE TEST SIGNAL INPUT: -19.4 dBm  
CONFIGURATION: Below AGC threshold

SINGLE TEST SIGNAL INPUT: -19.4 dBm  
CONFIGURATION: Above AGC threshold +3dB

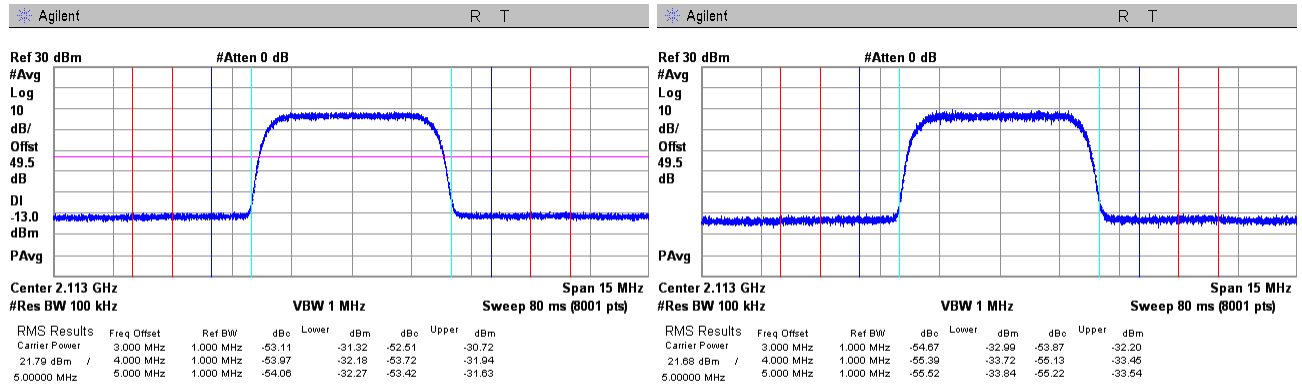




HERMON LABORATORIES

<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 17-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1005 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.5.8 Intermodulation test results in the 2110.0 – 2180.0 MHz frequency range, Upper band Edge


OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
COMPOSITE INPUT SIGNAL:  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
WCDMA/WCDMA  
-19.4 dBm  
CONFIGURATION: Above AGC threshold +3dB

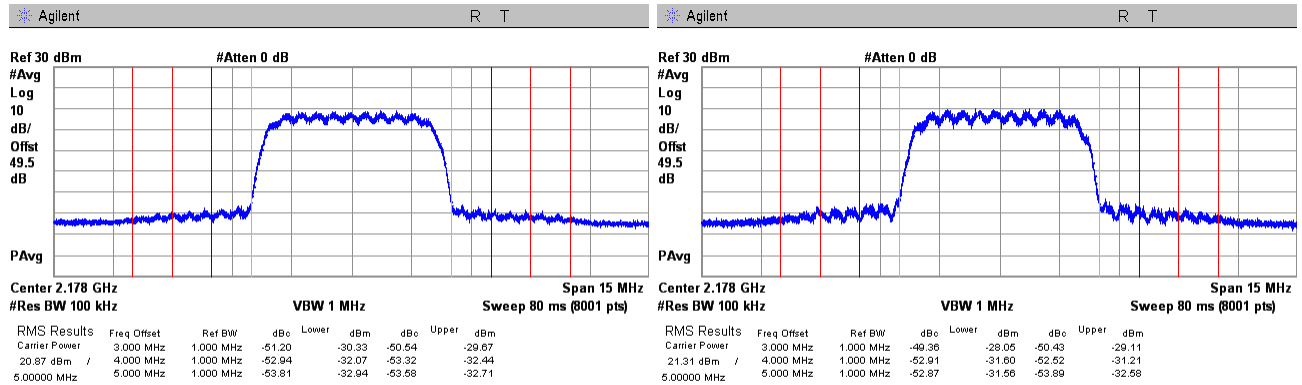

SINGLE TEST SIGNAL INPUT:  
CONFIGURATION: Below AGC threshold

-19.4 dBm  
CONFIGURATION: Above AGC threshold +3dB

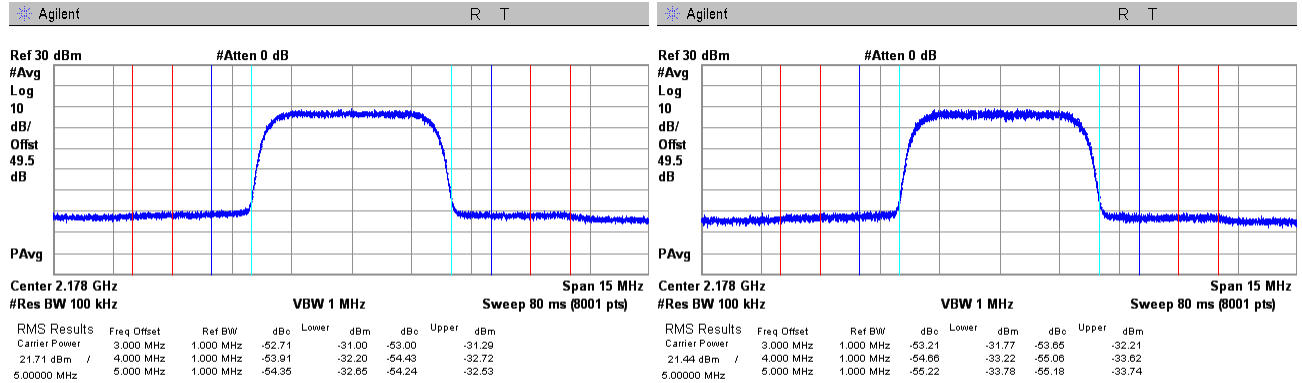



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.6 Spurious emissions at RF antenna connector test

### 7.6.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Spurious emission limits

Frequency, MHz	Attenuation below carrier, dBc	Spurious emissions, dBm
0.009 – 10th harmonic*	43+10logP**	-13.0

\* - spurious emission limits do not apply to the in band emission within ± 250 % of the authorized bandwidth from the carrier; investigated in course of emission mask testing

\*\* - P is a transmitter output power in watts.

### 7.6.2 Test procedure

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.

7.6.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.6.2.3 The spurious emission was measured with spectrum analyzer as provided in Table 7.6.2 and associated plots.

Figure 7.6.1 Spurious emission test setup, single output







<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Table 7.6.2 Spurious emission test results

ASSIGNED FREQUENCY RANGE: 2110.0 – 2180.0 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 22000 MHz  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

MODULATION: AWGN

Frequency, MHz	SA reading, dBm	Attenuation, dB	Cable loss, dB	RBW, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
<b>Low carrier frequency</b>								Pass
No emissions were found								
<b>Mid carrier frequency</b>								Pass
No emissions were found								
<b>High carrier frequency</b>								Pass
No emissions were found								

MODULATION: GSM

Frequency, MHz	SA reading, dBm	Attenuation, dB	Cable loss, dB	RBW, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
<b>Low carrier frequency</b>								Pass
No emissions were found								
<b>Mid carrier frequency</b>								Pass
No emissions were found								
<b>High carrier frequency</b>								Pass
No emissions were found								

MODULATION: WCDMA

Frequency, MHz	SA reading, dBm	Attenuation, dB	Cable loss, dB	RBW, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
<b>Low carrier frequency</b>								Pass
No emissions were found								
<b>Mid carrier frequency</b>								Pass
No emissions were found								
<b>High carrier frequency</b>								Pass
No emissions were found								

\*- Margin = Spurious emission – specification limit.

Reference numbers of test equipment used

HL 2909	HL 3234	HL 3345	HL 3767	HL 3780	HL 4354	HL	HL
---------	---------	---------	---------	---------	---------	----	----

Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.6.1 Spurious emission measurements in 9 - 150 kHz range at carrier frequency**

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: AWGN downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm


**CARRIER FREQUENCY: Low**

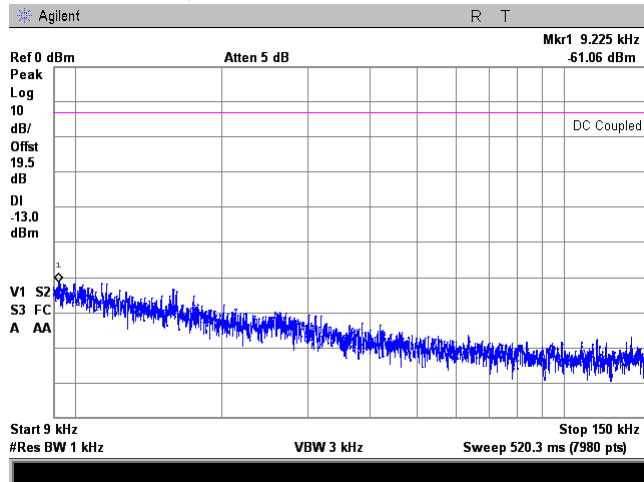

**CARRIER FREQUENCY: Mid**

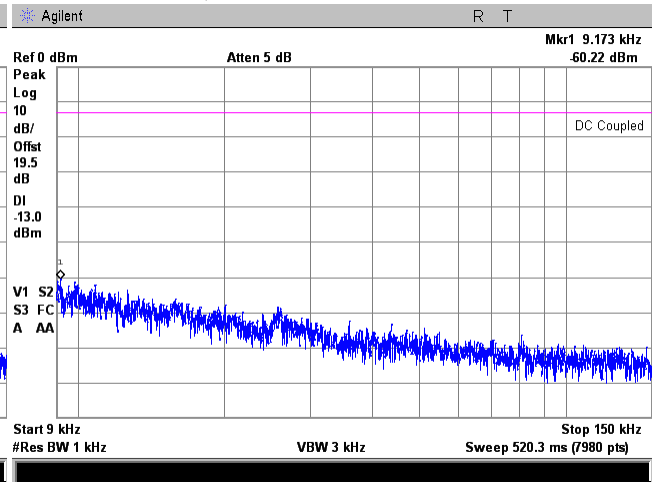

**CARRIER FREQUENCY: High**

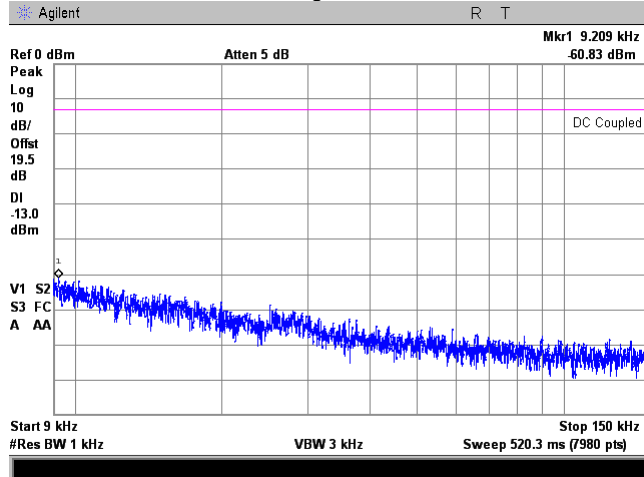




HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.6.2 Spurious emission measurements in 0.15 - 30.0 MHz range at low carrier frequency**

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: AWGN downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm


**CARRIER FREQUENCY: Low**

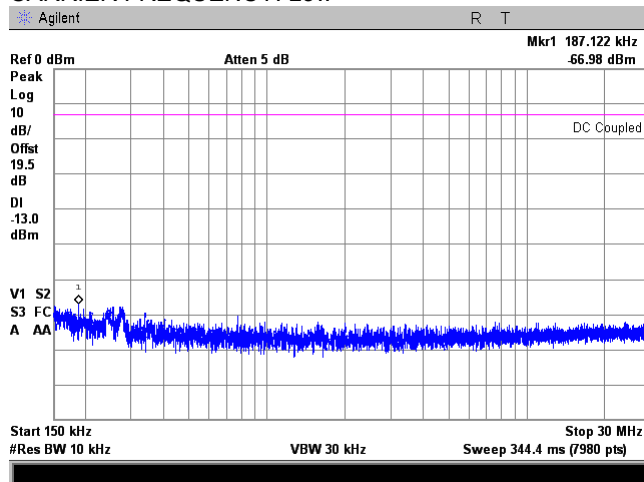

**CARRIER FREQUENCY: Mid**

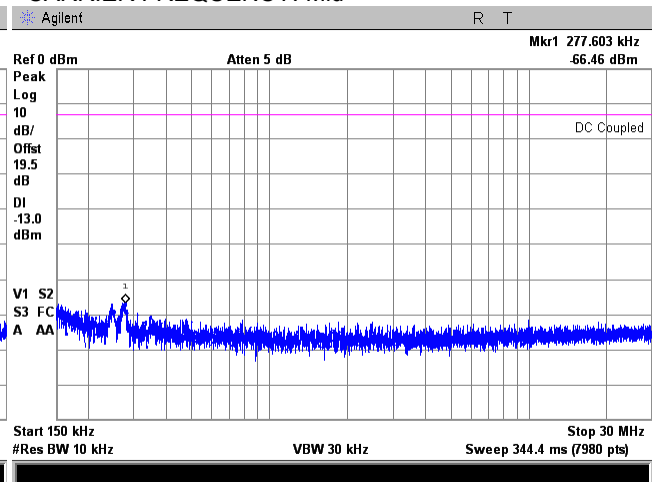

**CARRIER FREQUENCY: High**

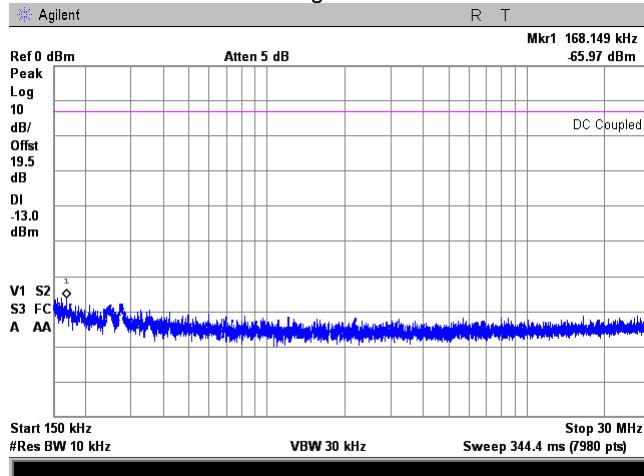




HERMON LABORATORIES

<b>Test specification: Section 27.53, Spurious emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.6.3 Spurious emission measurements in 30.0 - 1000 MHz range at low carrier frequency**

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: AWGN downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm


**CARRIER FREQUENCY: Low**

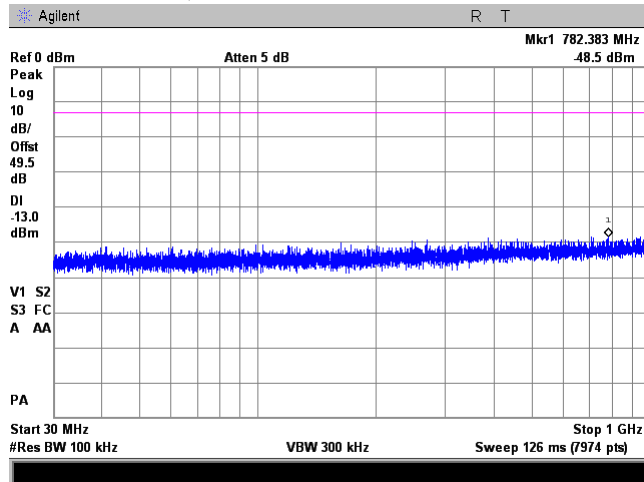

**CARRIER FREQUENCY: Mid**

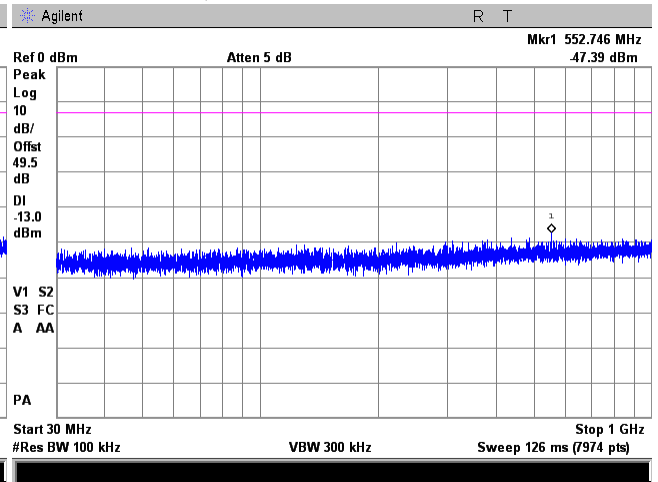

**CARRIER FREQUENCY: High**

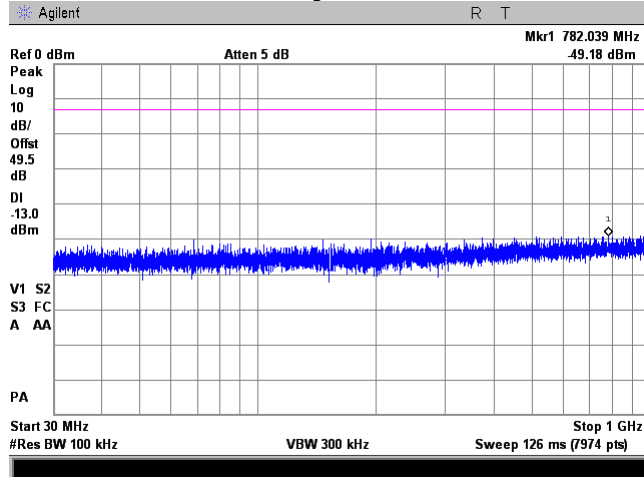



HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.4 Spurious emission measurements in 1000 - 3000 MHz range at low carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: AWGN downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

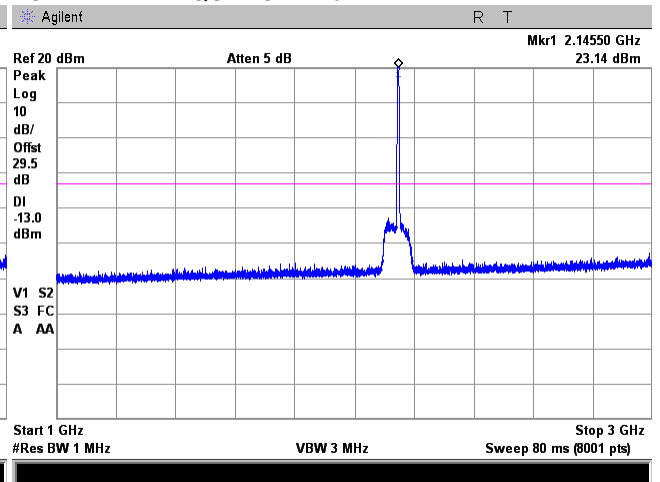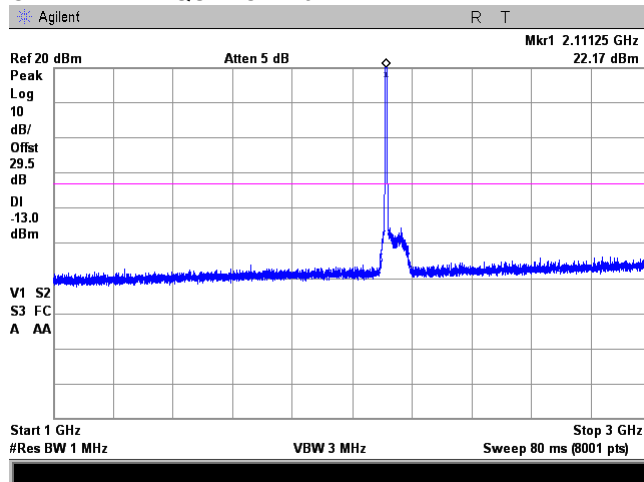

CARRIER FREQUENCY: High

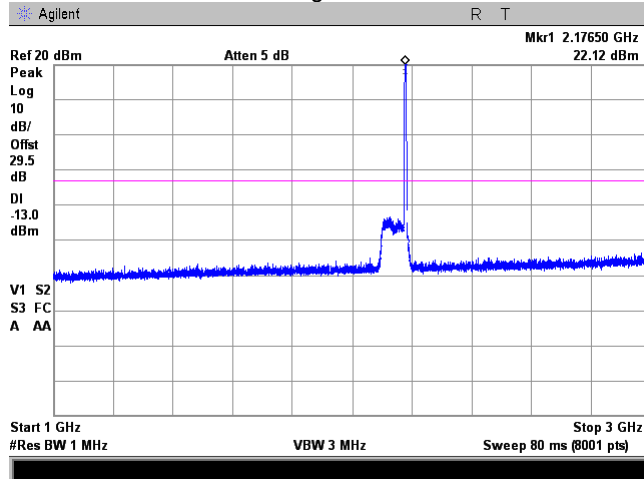



HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.5 Spurious emission measurements in 3000 - 10000 MHz range at carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: AWGN downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

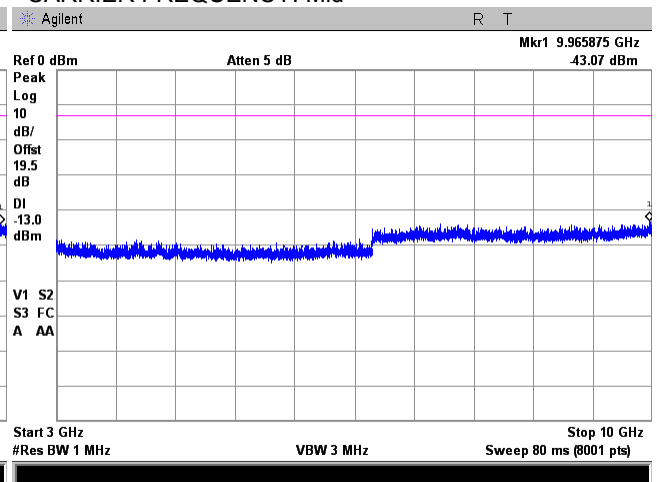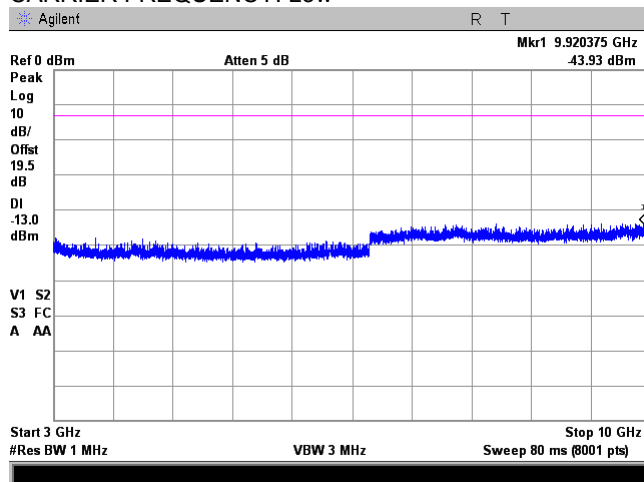

CARRIER FREQUENCY: High

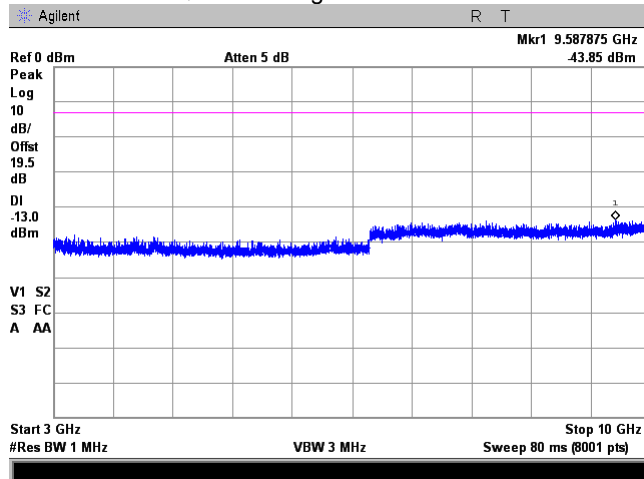



HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.6 Spurious emission measurements in 10000 - 22000 MHz range at carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: AWGN downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

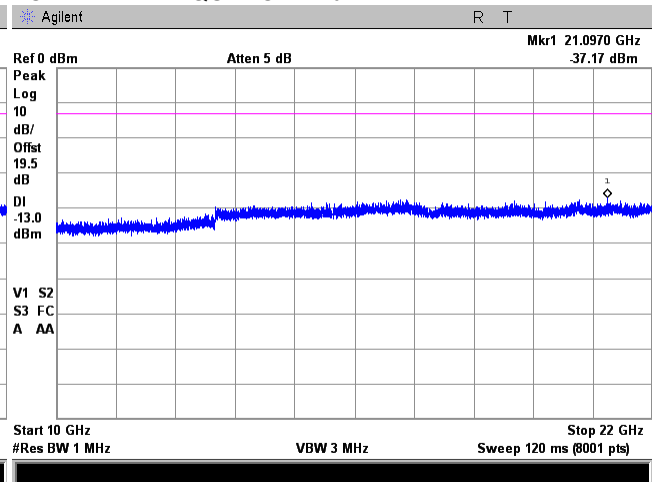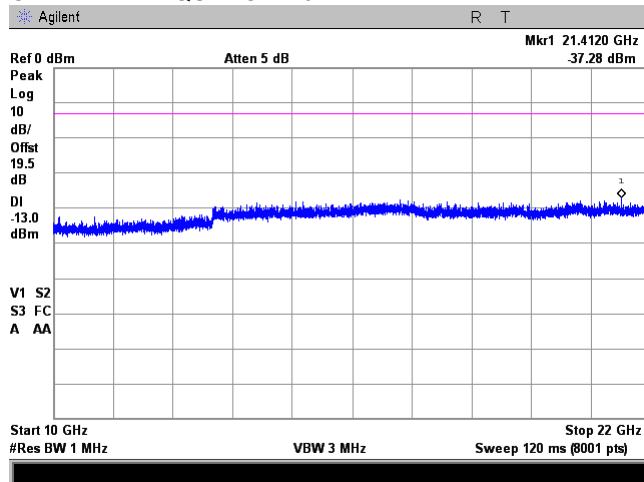

CARRIER FREQUENCY: High

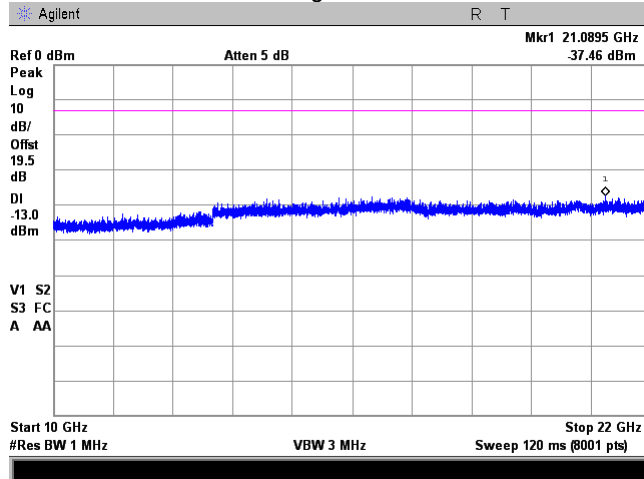



HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.7 Spurious emission measurements in 9 - 150 kHz range at carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: GSM downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

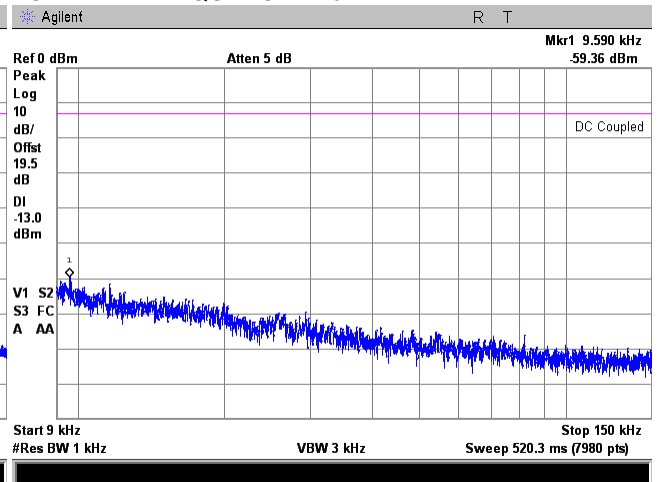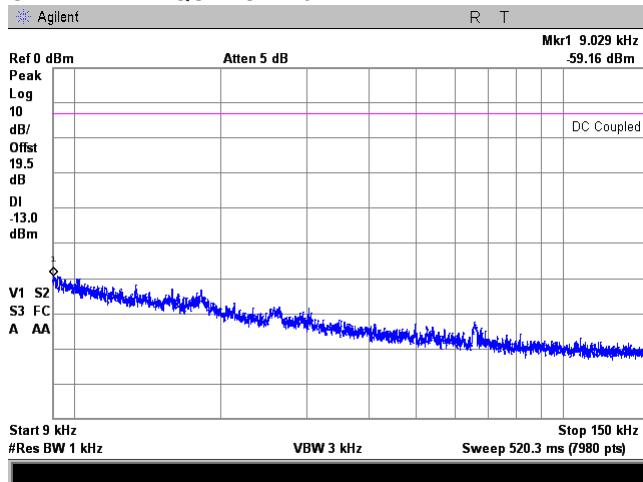

CARRIER FREQUENCY: High

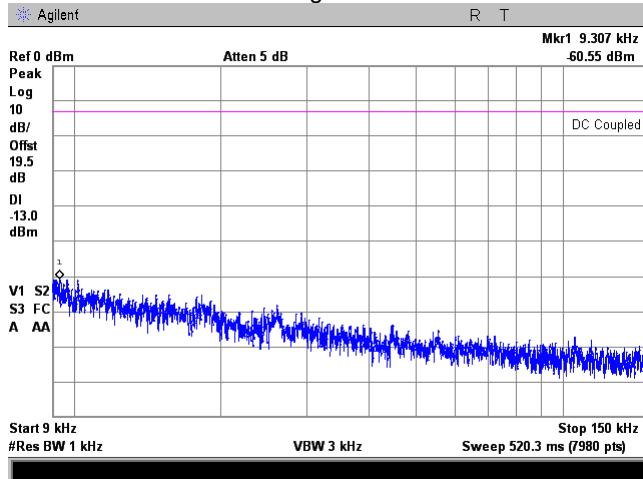





HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.8 Spurious emission measurements in 0.15 - 30.0 MHz range at carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: GSM downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

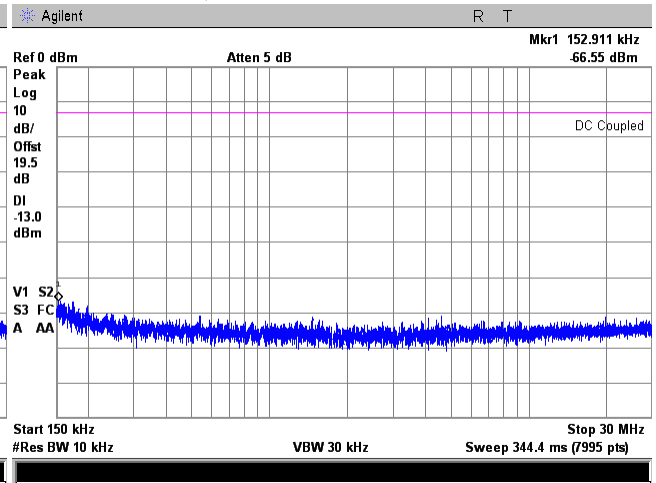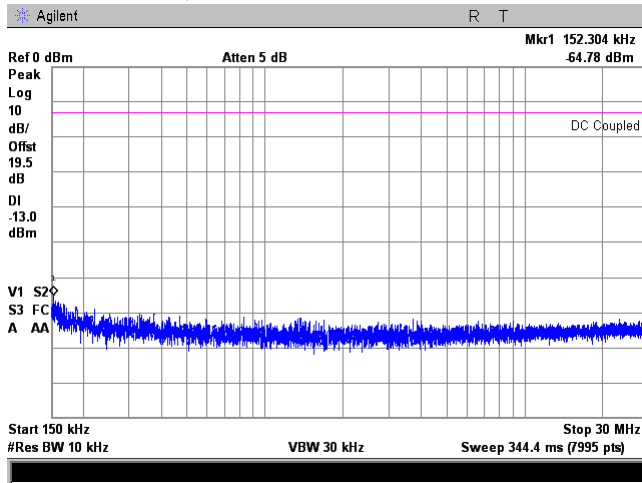

CARRIER FREQUENCY: High

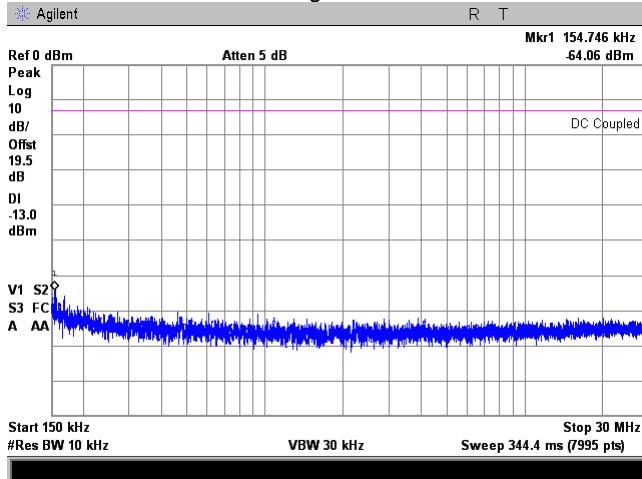



HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.9 Spurious emission measurements in 30.0 - 1000 MHz range at carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: GSM downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

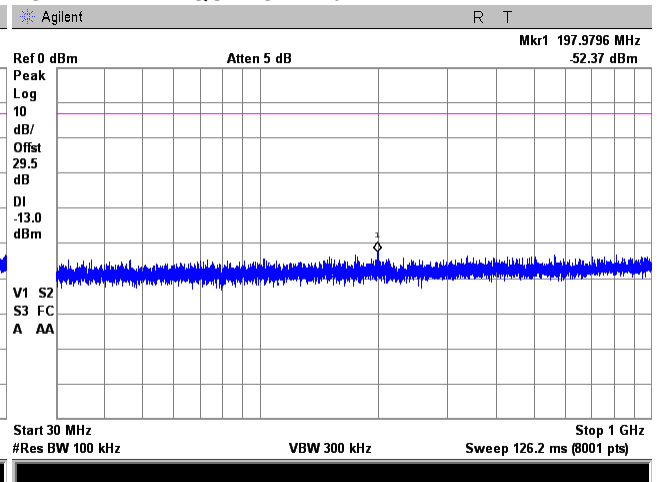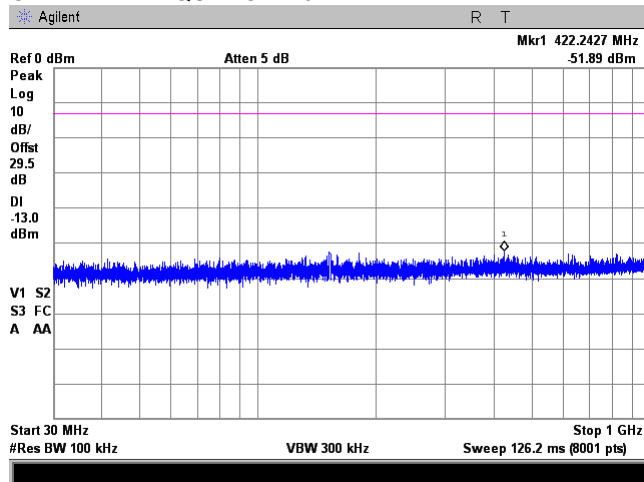

CARRIER FREQUENCY: High

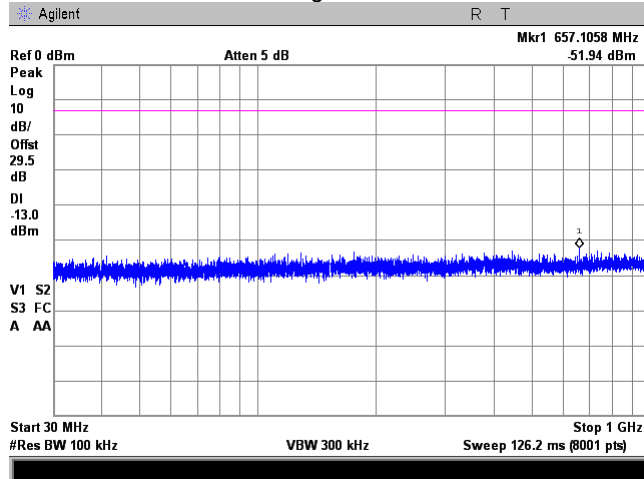



HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.10 Spurious emission measurements in 1000 - 3000 MHz range at carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: GSM downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

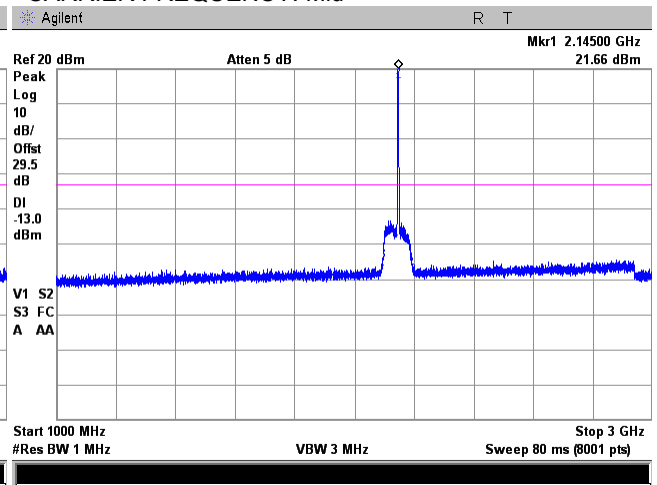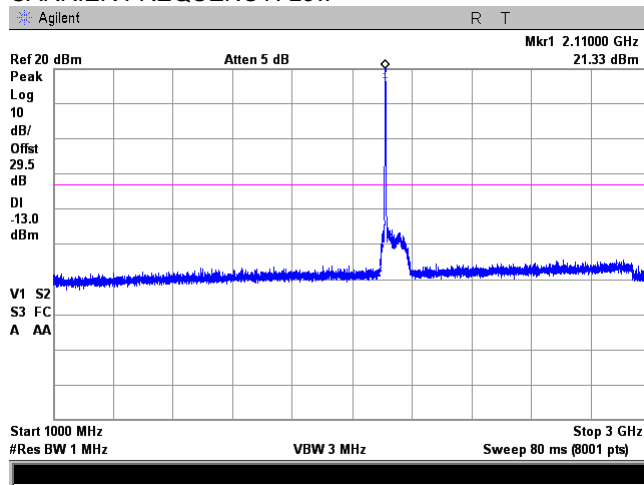

CARRIER FREQUENCY: High

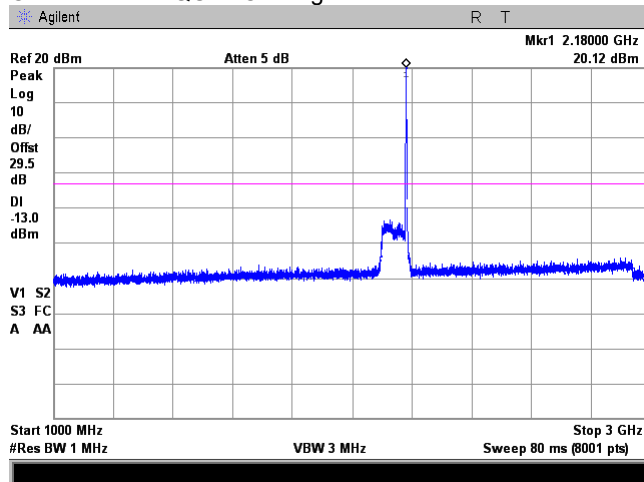



HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.11 Spurious emission measurements in 3000 - 10000 MHz range at carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: GSM downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

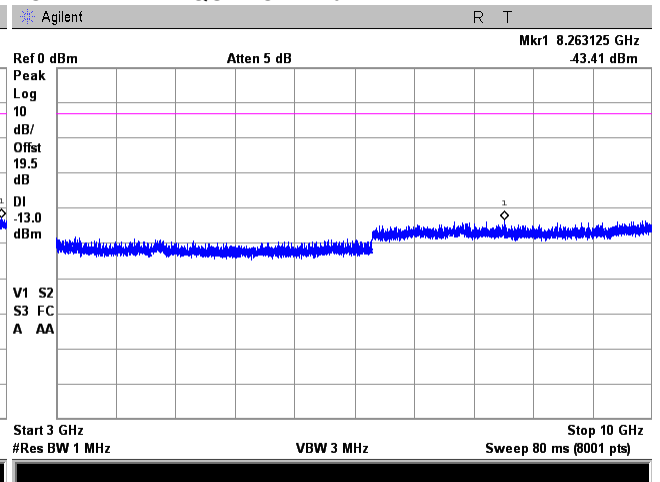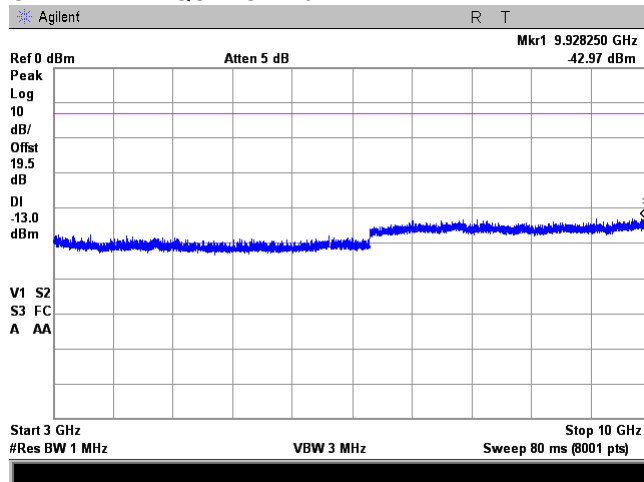

CARRIER FREQUENCY: High

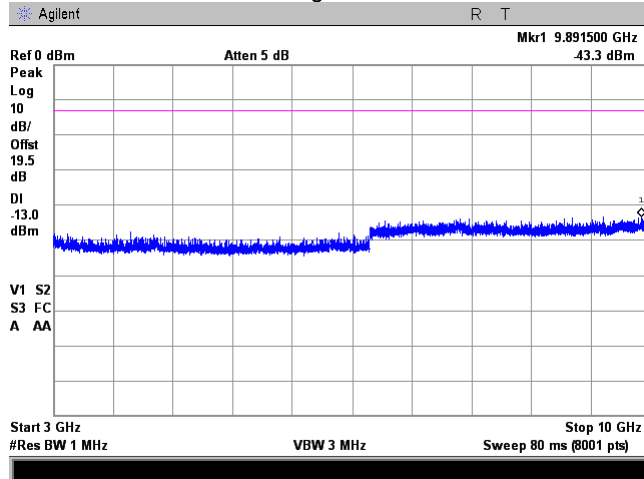



HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.12 Spurious emission measurements in 10000 - 22000 MHz range at carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: GSM downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

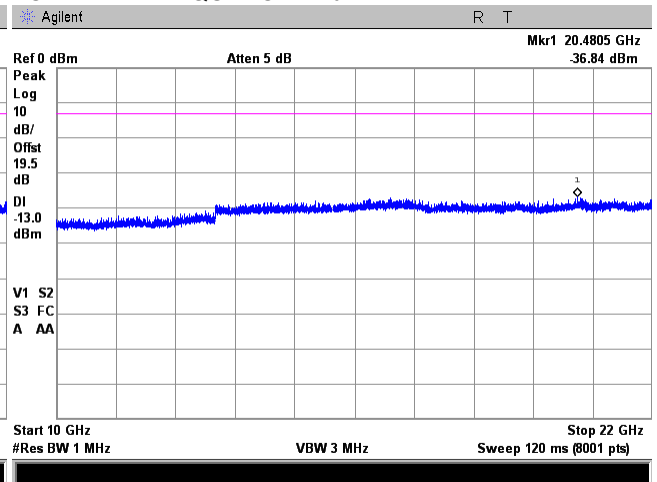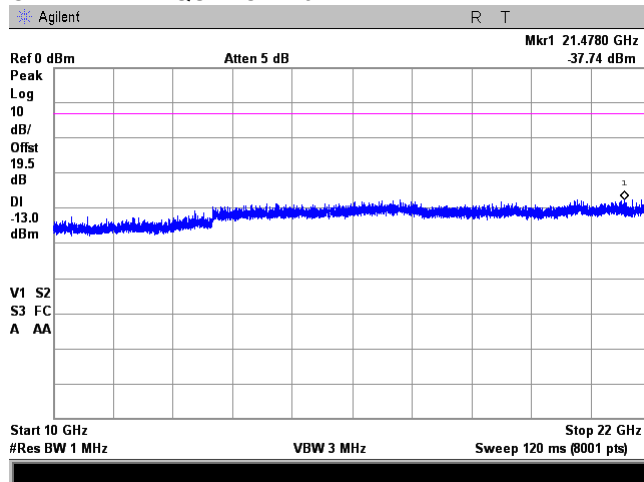

CARRIER FREQUENCY: High

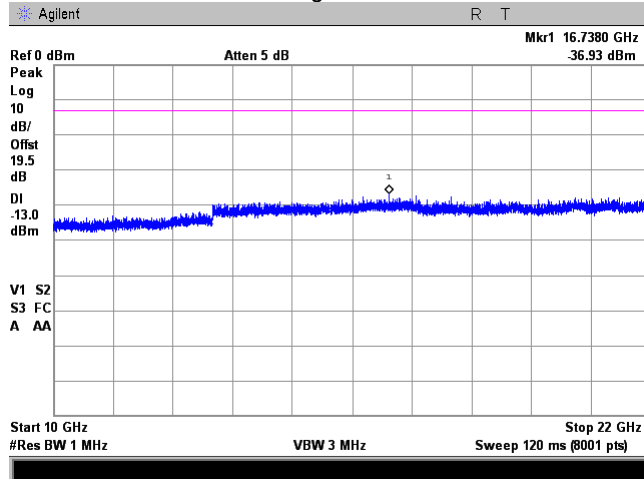




HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


Plot 7.6.13 Spurious emission measurements in 9 - 150 kHz range at carrier frequency

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: WCDMA downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm


CARRIER FREQUENCY: Low

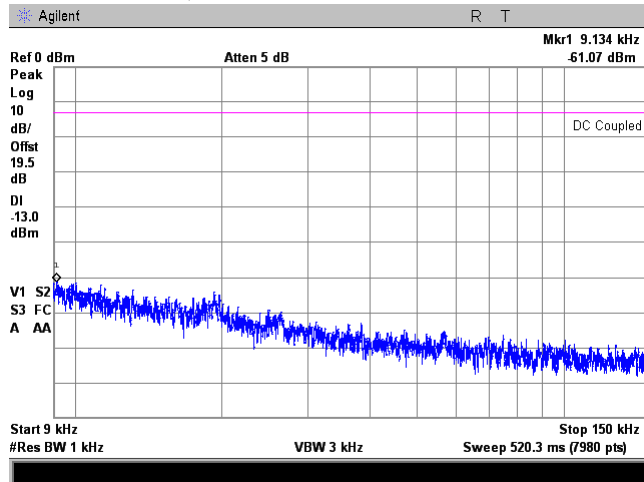

CARRIER FREQUENCY: Mid

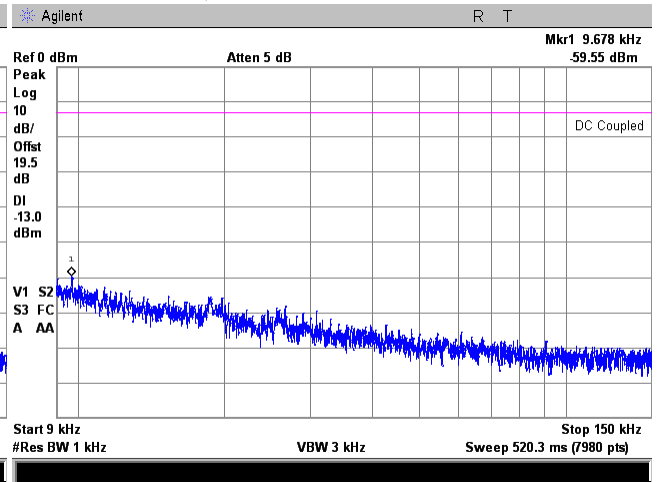

CARRIER FREQUENCY: High

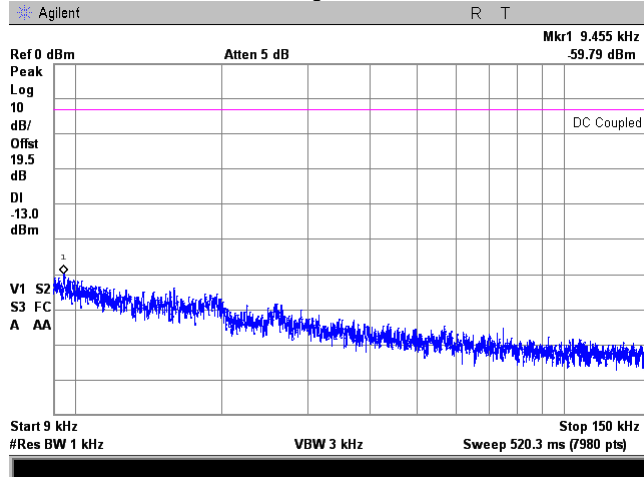




HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.6.14 Spurious emission measurements in 0.15 - 30.0 MHz range at carrier frequency**

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: WCDMA downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm


**CARRIER FREQUENCY: Low**

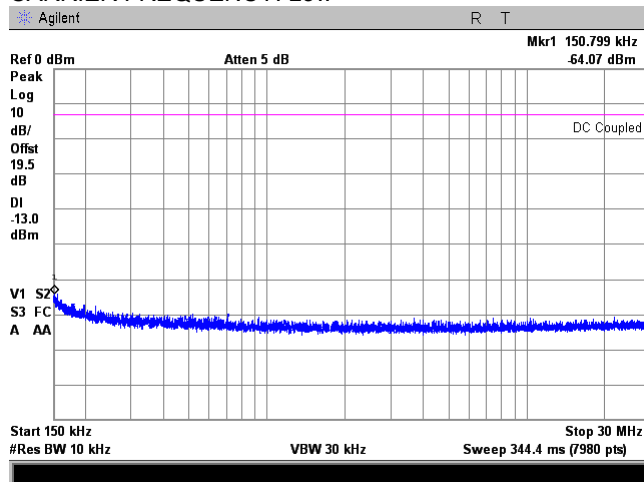

**CARRIER FREQUENCY: Mid**

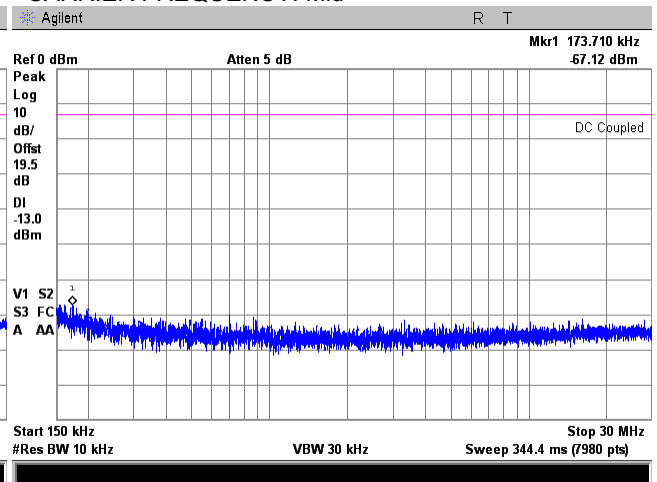

**CARRIER FREQUENCY: High**

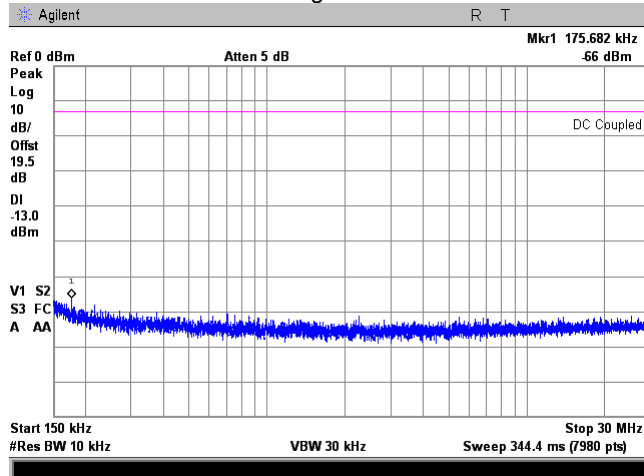




HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.6.15 Spurious emission measurements in 30.0 - 1000 MHz range at carrier frequency**

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: WCDMA downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm


**CARRIER FREQUENCY: Low**

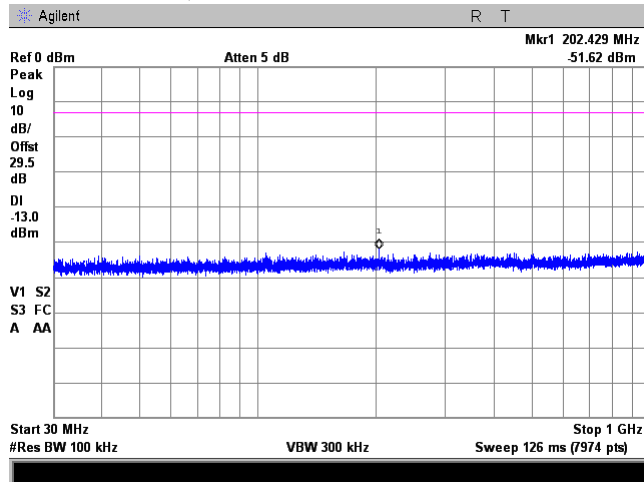

**CARRIER FREQUENCY: Mid**

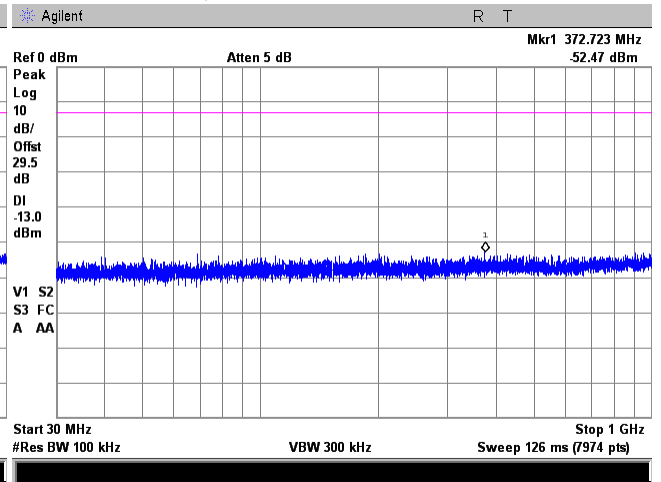

**CARRIER FREQUENCY: High**

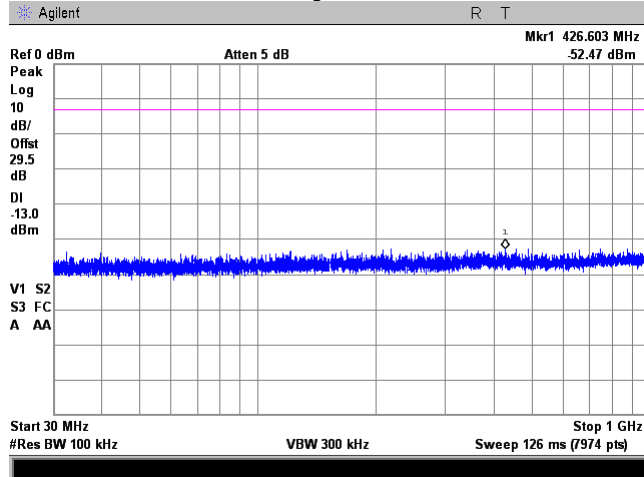





HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.6.16 Spurious emission measurements in 1000 - 3000 MHz range at carrier frequency


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: WCDMA downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

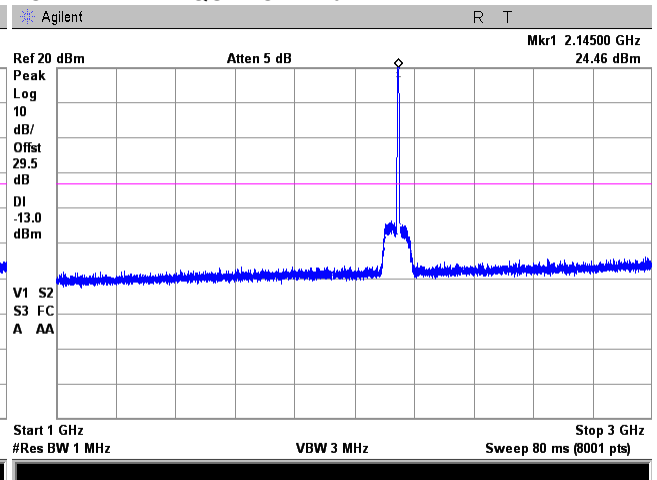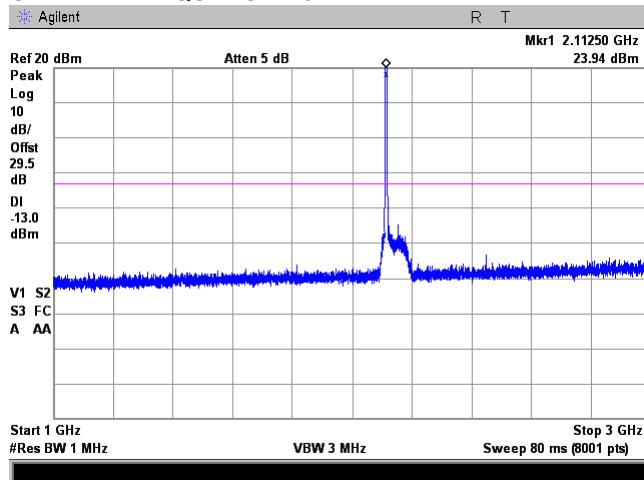

CARRIER FREQUENCY: High

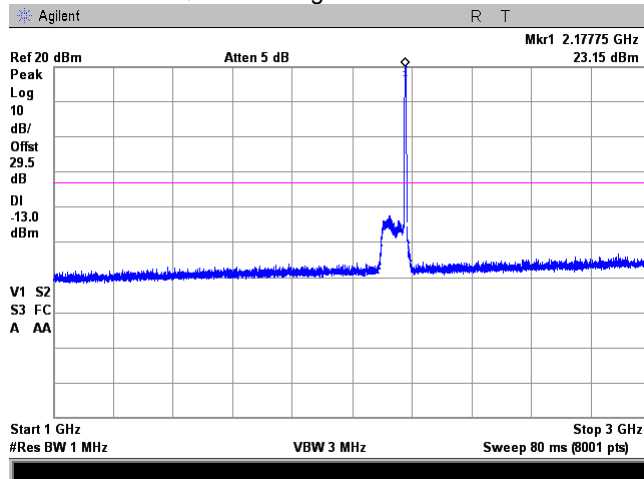



HERMON LABORATORIES



<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.17 Spurious emission measurements in 3000 - 10000 MHz range at carrier frequency**


FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: WCDMA downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

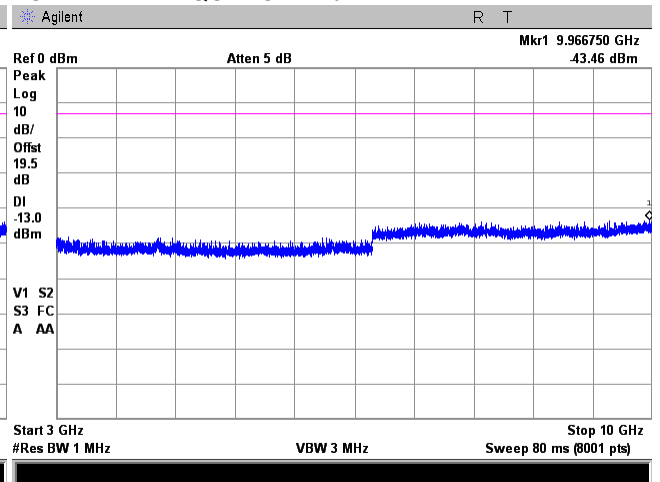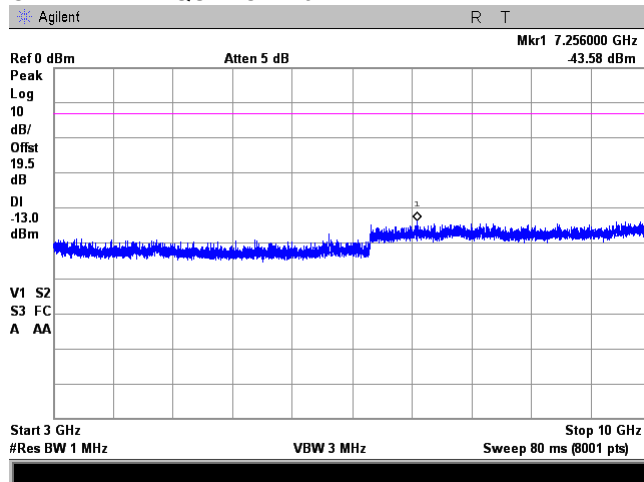

CARRIER FREQUENCY: High

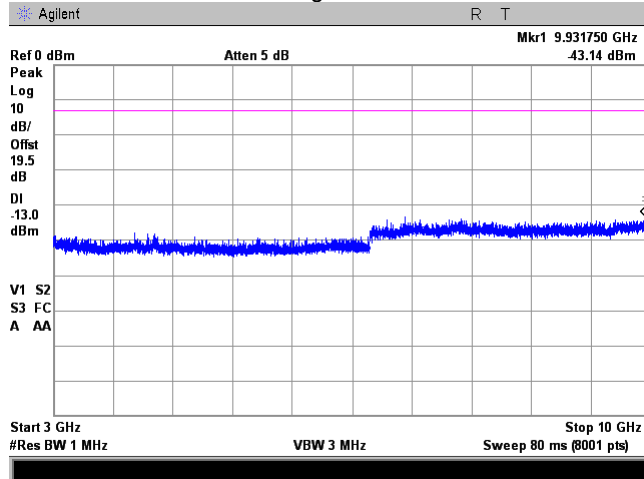






HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16			
<b>Temperature:</b> 24.2 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.6.18 Spurious emission measurements in 10000 - 22000 MHz range at carrier frequency**

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: WCDMA downlink transmit  
 INPUT PORT:  
 CONFIGURATION: Below AGC level  
 INPUT POWER: -19.4 dBm  
 CARRIER FREQUENCY: Low  
 CARRIER FREQUENCY: Mid

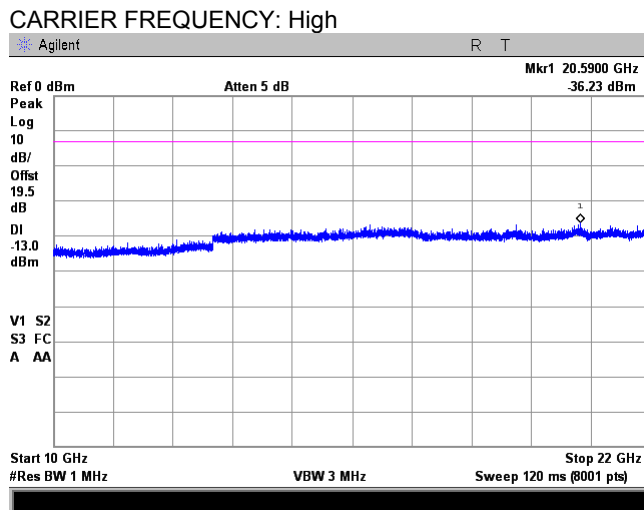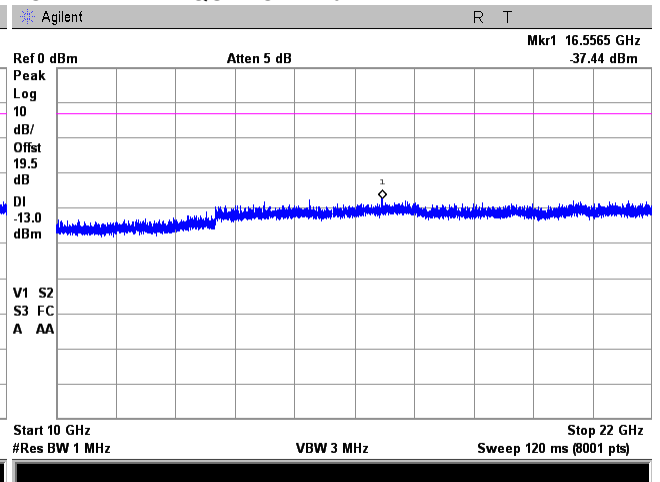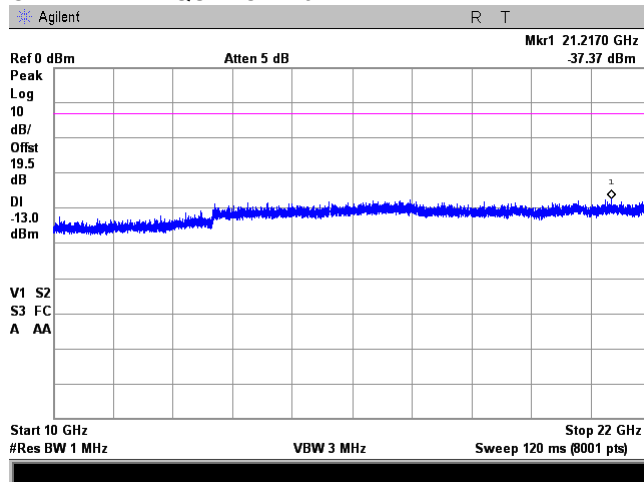



<b>Test specification:</b> Section 27.53, Radiated spurious emissions			
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16			
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.7 Radiated spurious emission measurements

### 7.7.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emission test limits

Frequency, MHz	Attenuation below carrier, dBc	ERP of spurious, dBm	Equivalent field strength limit @ 3m, dB( $\mu$ V/m) <sup>***</sup>
0.009 – 10 <sup>th</sup> harmonic*	43+10logP**	-13	84.4

\* - Excluding the band emission

\*\* - P is transmitter output power in Watts

\*\*\* - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows:  $E = \sqrt{30 \times P \times 1.64} / r$ , where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

### 7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded in Table 7.7.2 and shown in the associated plots.

### 7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.7.3.3 The worst test results (the lowest margins) were recorded in Table 7.7.2 and shown in the associated plots.



<b>Test specification:</b> Section 27.53, Radiated spurious emissions			
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16			
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Figure 7.7.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


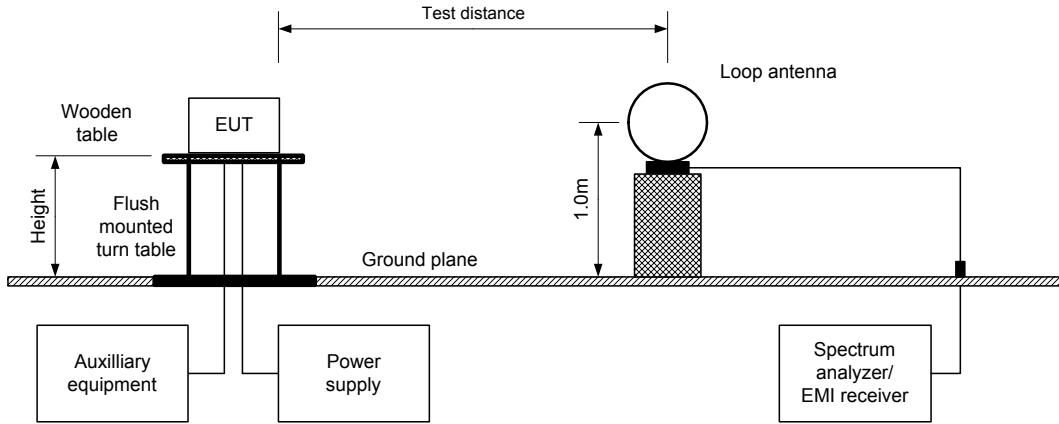


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz



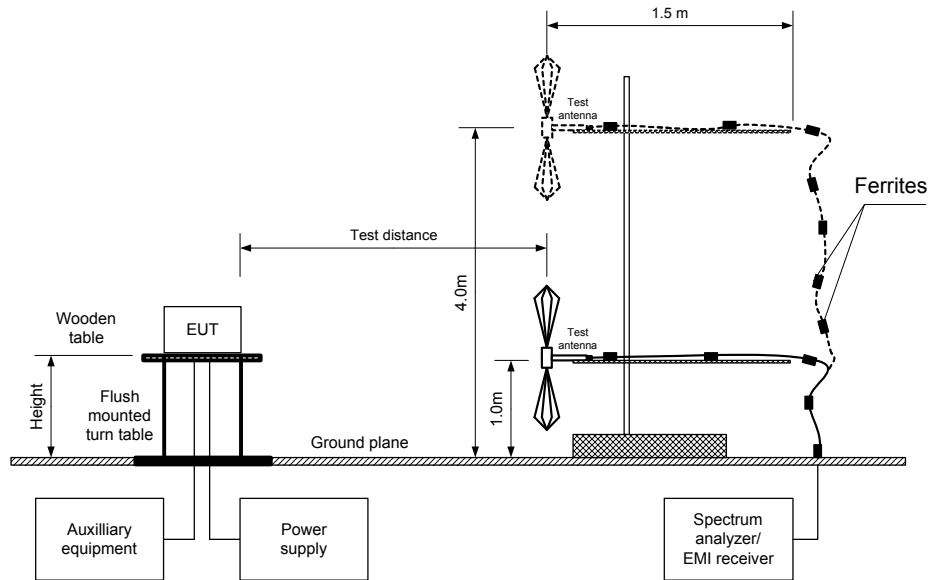

<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict: PASS</b>	
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16			
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Table 7.7.2 Spurious emission field strength test results**

ASSIGNED FREQUENCY RANGE: 2110.0 – 2180 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: Semi anechoic chamber / OATS  
 EUT HEIGHT: 0.8 m  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 22 000 MHz  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 Horn (above 1000 MHz)  
 MODULATION: Unmodulated  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
<b>Low carrier frequency</b>								
4219.95	64.67	84.40	-19.73	1000	Vertical	1.1	335	Pass
<b>Mid carrier frequency</b>								
All emissions were found more than 20 dB below limit								Pass
<b>High carrier frequency</b>								
All emissions were found more than 20 dB below limit								Pass

\*- Margin = Field strength of spurious – calculated field strength limit.

\*\* - EUT front panel refers to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 0604	HL 2909	HL 4222	HL 4278	HL 4353	HL 4372
HL 4933	HL 4956	HL 5112					

Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Radiated spurious emissions	
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16	
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %
<b>Remarks:</b>	


**Plot 7.7.1 Radiated emission measurements in 9 - 150 kHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low


Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 11.4 kHz  
69.00 dBµV/m

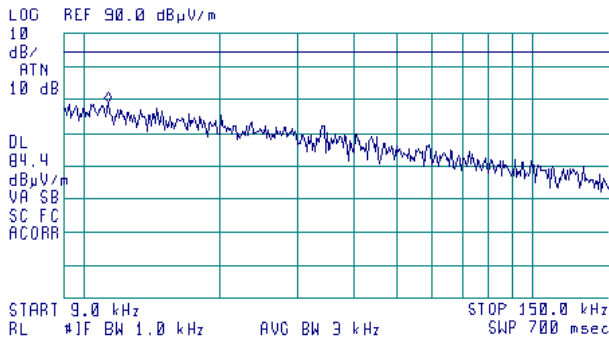


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 10.1 kHz  
68.15 dBµV/m

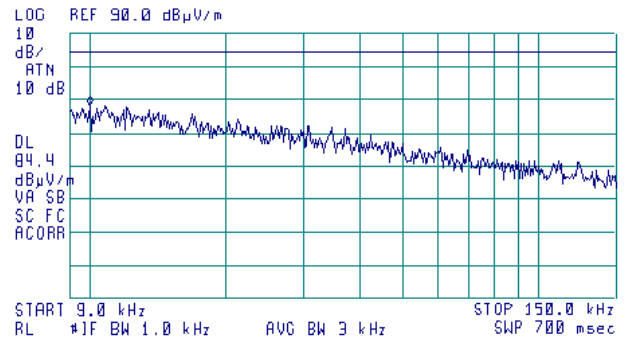

CARRIER FREQUENCY: High



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 9.5 kHz  
70.36 dBµV/m

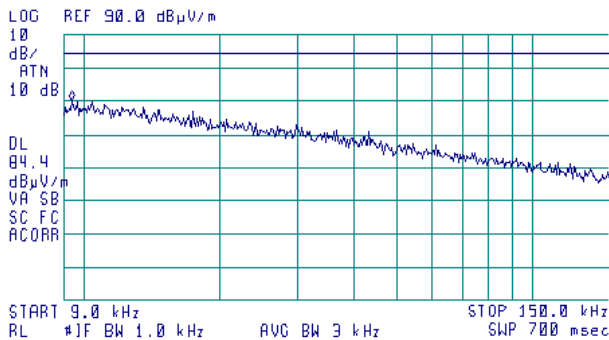





HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Radiated spurious emissions	
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16	
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %
<b>Remarks:</b>	


**Plot 7.7.2 Radiated emission measurements in 0.15 - 30 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

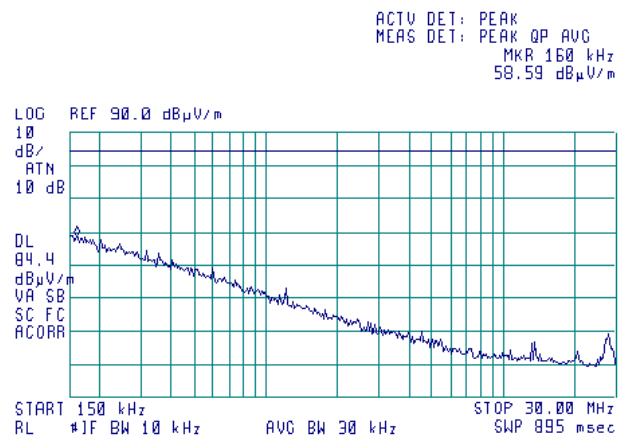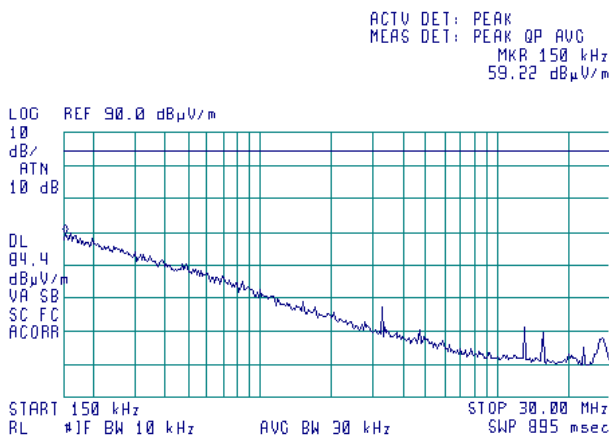

CARRIER FREQUENCY: High

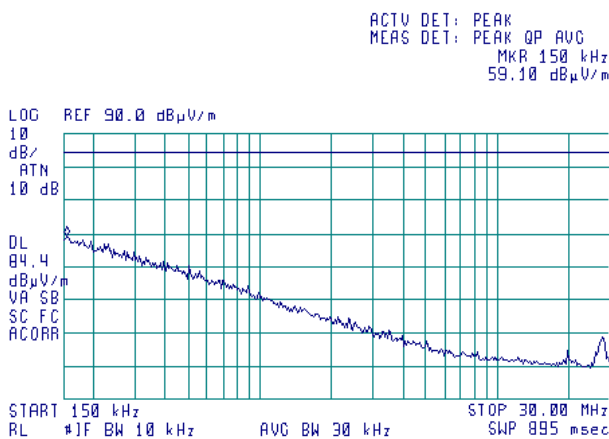







HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Radiated spurious emissions			
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16			
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.3 Radiated emission measurements in 30 - 1000 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

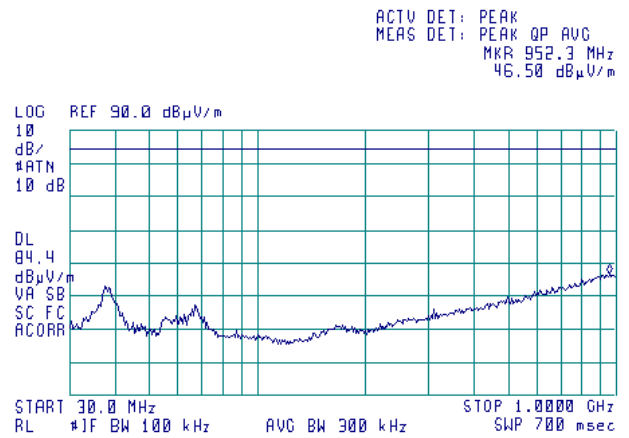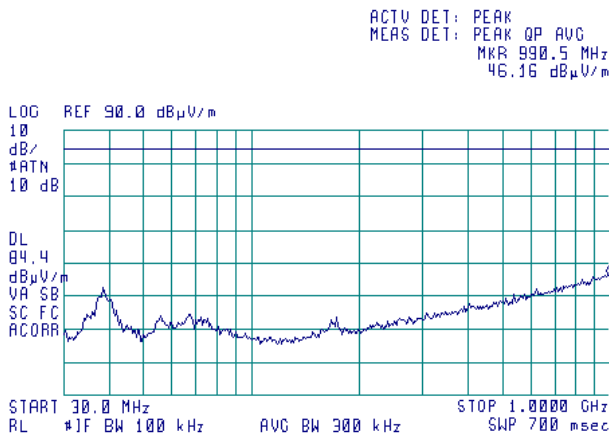

CARRIER FREQUENCY: High

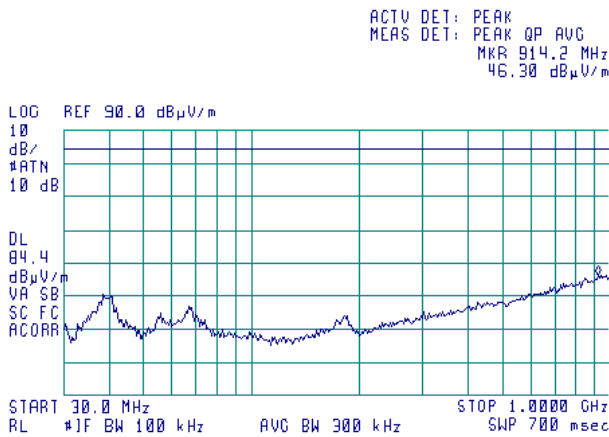





HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Radiated spurious emissions			
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16			
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.4 Radiated emission measurements in 1000 – 3000 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

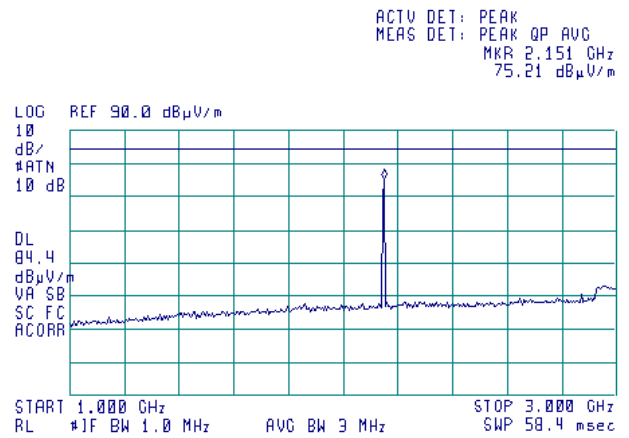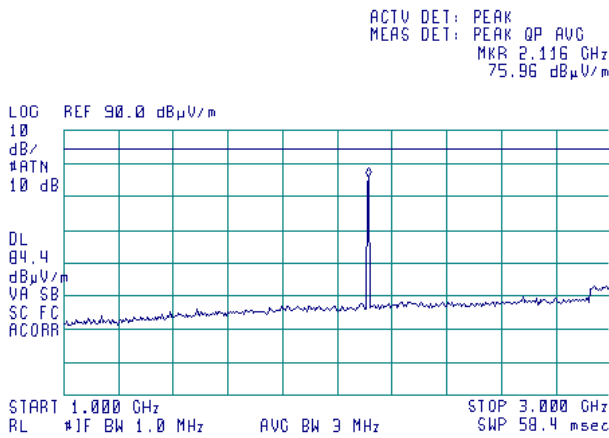

CARRIER FREQUENCY: High

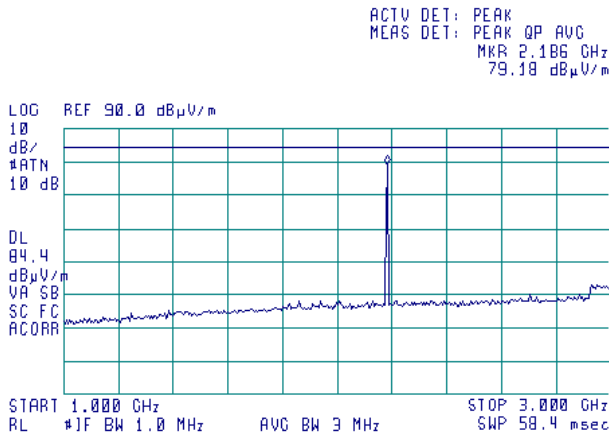





HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Radiated spurious emissions			
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16			
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


Plot 7.7.5 Radiated emission measurements in 3000 – 8000 MHz range

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

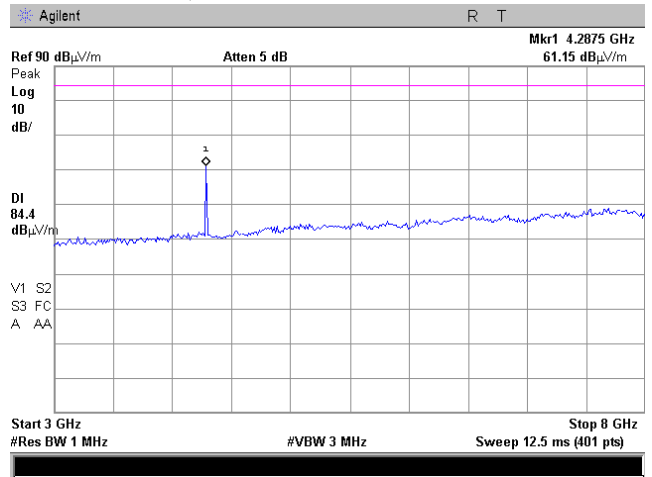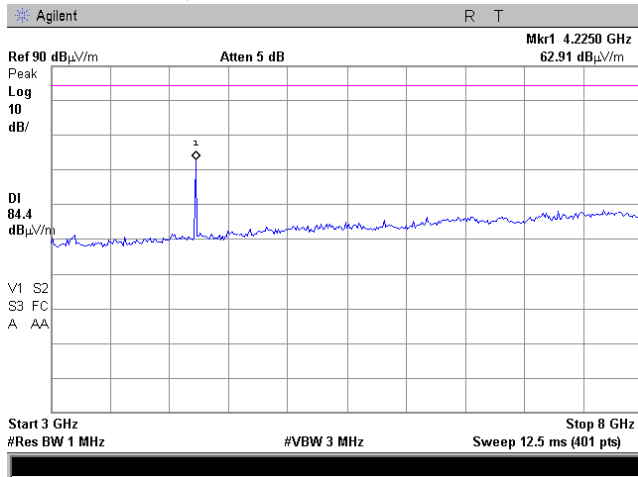

CARRIER FREQUENCY: High

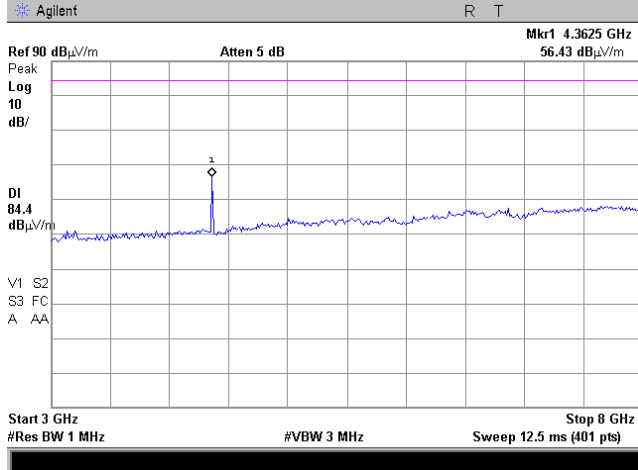





HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Radiated spurious emissions			
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16			
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.6 Radiated emission measurements in 8000 – 18000 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

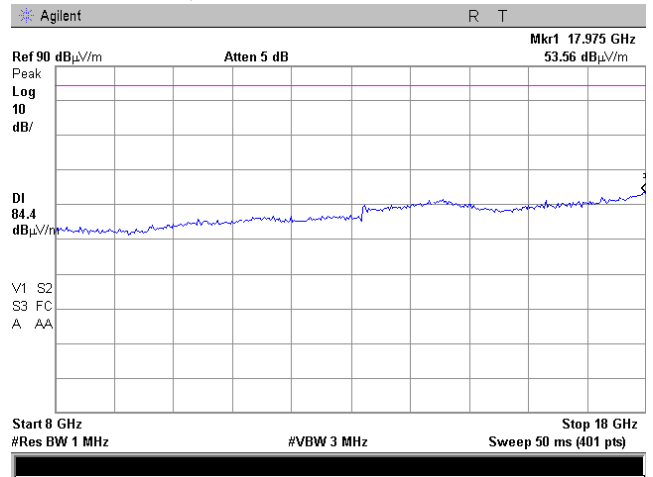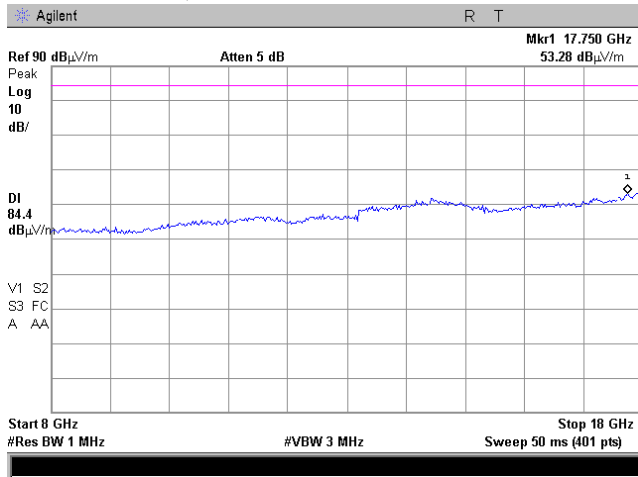

CARRIER FREQUENCY: High

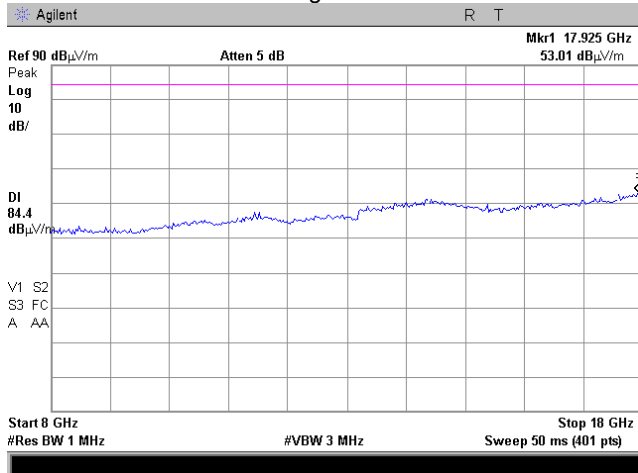





HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Radiated spurious emissions			
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16			
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.7 Radiated emission measurements in 18000 – 22000 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

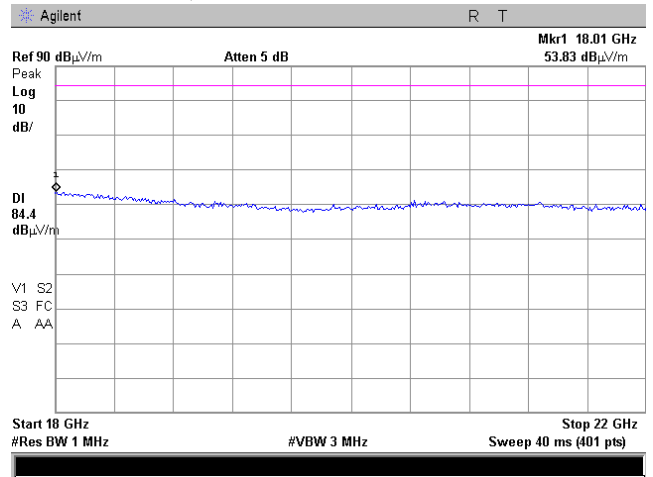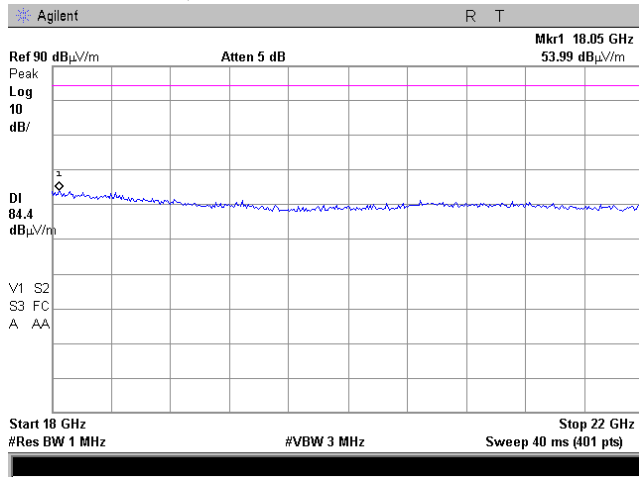

CARRIER FREQUENCY: High

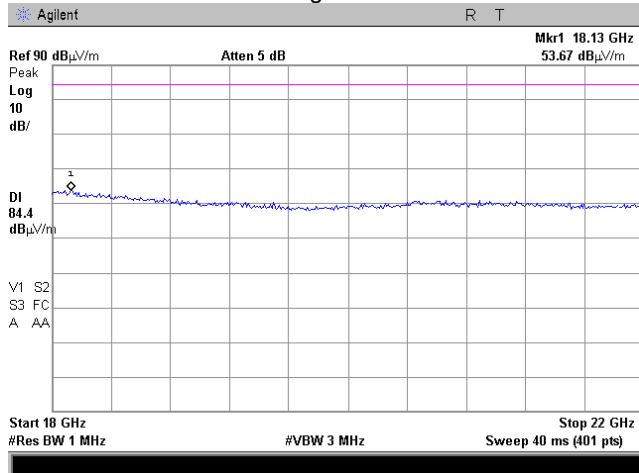





HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Radiated spurious emissions	
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16	
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %
<b>Remarks:</b>	

**Plot 7.7.8 Radiated emission measurements at the 2<sup>nd</sup> harmonic**

TEST SITE:  
CARRIER FREQUENCY:  
TEST DISTANCE:  
ANTENNA POLARIZATION: Vertical



Semi anechoic chamber  
Low  
3 m  
ANTENNA POLARIZATION: Horizontal

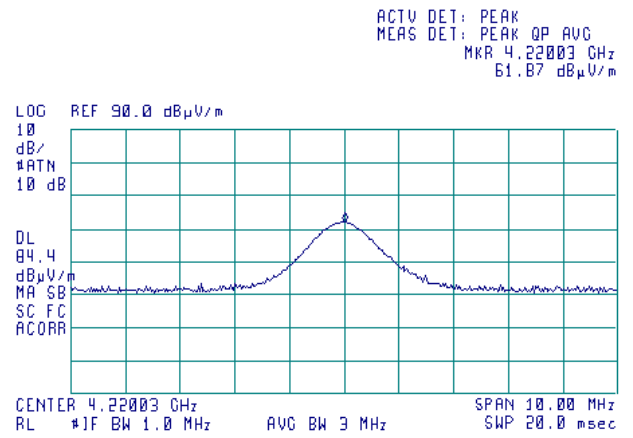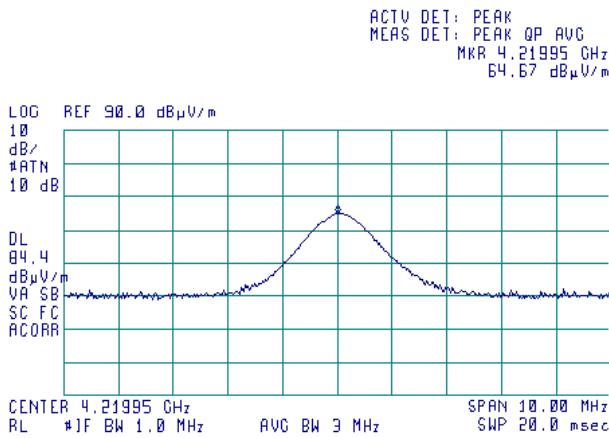

**Plot 7.7.9 Radiated emission measurements at the 2<sup>nd</sup> harmonic**

TEST SITE:  
CARRIER FREQUENCY:  
TEST DISTANCE:  
ANTENNA POLARIZATION: Vertical

Semi anechoic chamber  
Mid  
3 m  
ANTENNA POLARIZATION: Horizontal

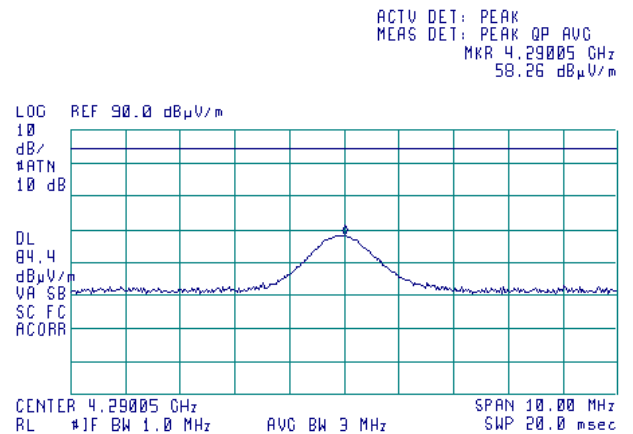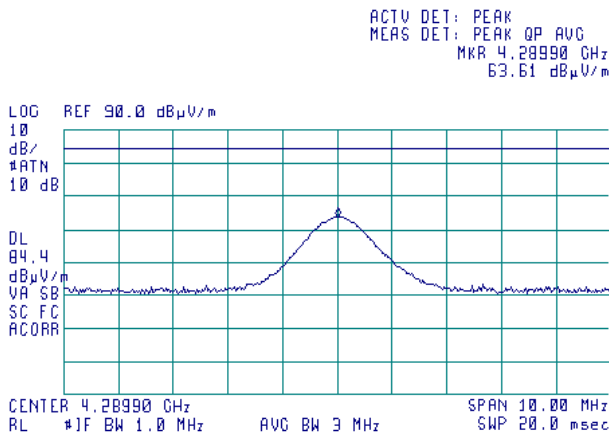





HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Radiated spurious emissions	
<b>Test procedure:</b> 47 CFR, Sections 2.1053; KDB 935210 D05 v01r01 section 3.6.3	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Aug-16 - 22-Aug-16	
<b>Temperature:</b> 25.7 °C	<b>Relative Humidity:</b> 48 %
<b>Remarks:</b>	

Plot 7.7.10 Radiated emission measurements at the 2<sup>nd</sup> harmonic

TEST SITE:  
CARRIER FREQUENCY:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
ANTENNA POLARIZATION: Vertical

Semi anechoic chamber  
High  
Vertical  
3 m  
ANTENNA POLARIZATION: Horizontal

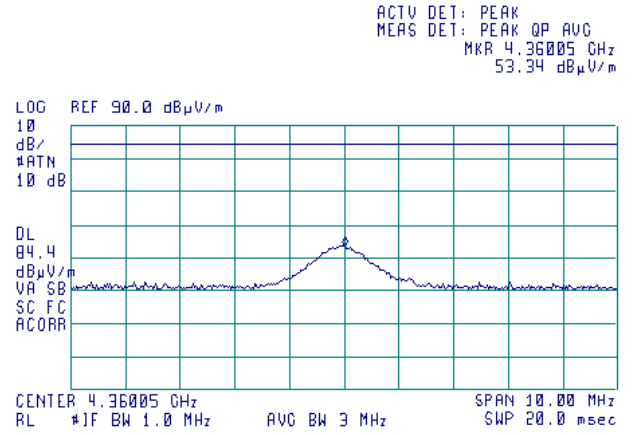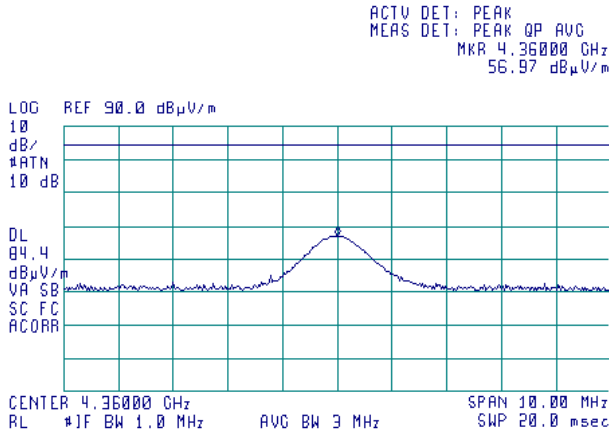



## 8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-15	27-Oct-16
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	21-Feb-16	21-Feb-17
3234	Signal generator, 9 kHz - 3.3 GHz	Rohde & Schwarz	SML03	103387	03-May-16	03-May-17
3345	High Pass Filter, 50 Ohm, 4250 to 10000 MHz	Mini-Circuits	VHF-3800+	NA	30-Dec-15	30-Dec-16
3767	Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N20W5+	NA	25-Aug-16	25-Aug-17
3780	Attenuator, N-type, 10 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N10W5+	NA	25-Aug-16	25-Aug-17
4222	High Pass Filter, 50 Ohm, 3150 to 6500 MHz	Mini-Circuits	VHF-2700+	NA	01-Oct-15	01-Oct-17
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	22-Nov-15	22-Nov-16
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-16	15-Mar-17
4354	Vector Signal Generator, 100 kHz to 6.0 GHz	Rohde & Schwarz	SMJ 100A	1403.4507 K02- 101777-rc	27-Jun-14	27-Jun-17
4372	High Pass Filter, 50 Ohm, 8.0 to 18.0 GHz, SMA-FM / SMA-FM	Tiger Micro-Electronics Institute	TGF-A2118-001	r- JSFG308-001	08-May-16	08-May-17
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	04-Sep-15	04-Sep-16
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	09-Nov-15	09-Nov-16
5112	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/11SK/11SK/5500M	502494/2EA	26-Jul-16	26-Jul-17

### 8.1 Test equipment and ancillaries used for tests

HL No.	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
NA	EXG Vector Signal Generator	Agilent	N5172B	??	??	??



**9 APPENDIX B Measurement uncertainties****Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements**

Test description	Expanded uncertainty
<b>Transmitter tests</b>	
Carrier power conducted at antenna connector	± 1.7 dB
Carrier power radiated (substitution method)	± 4.5 dB
Occupied bandwidth	±8%
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Spurious emissions radiated 30 MHz – 40 GHz (substitution method)	± 4.5 dB
Frequency error	30 – 300 MHz: ± 50.5 Hz (1.68 ppm) 300 – 1000 MHz: ± 168 Hz (0.56 ppm)
Transient frequency behaviour	187 Hz ± 13.9 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

## **10 APPENDIX C Test facility description**

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is IL1001.

Address: P.O. Box 23, Binyamina 30500, Israel.  
 Telephone: +972 4628 8001  
 Fax: +972 4628 8277  
 e-mail: mail@hermonlabs.com  
 website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## **11 APPENDIX D Specification references**

47CFR part 27: 2015	Private land mobile radio services
47CFR part 1: 2015	Practice and procedure
47CFR part 2: 2015	Frequency allocations and radio treaty matters; general rules and regulations
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI/TIA/EIA-603-D:2010	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
KDB 935210 D05 v01r01:12.02.2016	Measurements Guidance for Industrial and Non-consumer Signal Booster, Repeater and Amplifier Devices



## 12 APPENDIX E Test equipment correction factors

Antenna factor  
Active loop antenna  
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



Antenna factor, HL 4933



### Active Horn Antenna Factor Calibration

1 GHz to 18 GHz

<b>Equipment:</b>	<b>ACTIVE HORN ANTENNA</b>
<b>Model:</b>	<b>AHA-118</b>
<b>Serial Number:</b>	<b>701046</b>
<b>Calibration Distance:</b>	<b>3 Meter</b>
<b>Polarization:</b>	<b>Horizontal</b>
<b>Calibration Date:</b>	<b>11/12/2014</b>

Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			

Calibration according to ARP 958

**Antenna Factor to be added to receiver reading:**

Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)



HERMON LABORATORIES

Antenna factor, HL 4956



### Active Horn Antenna Factor Calibration

18 GHz to 40 GHz

<b>Equipment:</b>			<b>ACTIVE HORN ANTENNA</b>		
<b>Model:</b>			<b>AHA-840</b>		
<b>Serial Number:</b>			<b>105004</b>		
<b>Calibration Distance:</b>			<b>3 meter</b>		
<b>Polarization:</b>			<b>Horizontal</b>		
<b>Calibration Date:</b>			<b>1/26/2015</b>		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21
<p>Calibration per ANSI C63.5: 2006  <b>Standard Site Method, Equations 1-6 (3-antenna)</b></p> <p>Corrected Reading (dBµV/m) = Meter Reading (dBµV) + AFE(dB/m)</p>					





**Cable loss**  
Test cable, Mini-Circuits, S/N 0755A, 18 GHz, 4.6 m, N/M - N/M  
APC-15FT-NMNM+, HL 4278

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.24	4900	4.19	10000	6.47	15100	8.33
30	0.26	5000	4.25	10100	6.50	15200	8.35
50	0.34	5100	4.29	10200	6.52	15300	8.37
100	0.50	5200	4.32	10300	6.57	15400	8.40
200	0.72	5300	4.38	10400	6.59	15500	8.42
300	0.90	5400	4.41	10500	6.61	15600	8.46
400	1.06	5500	4.46	10600	6.64	15700	8.50
500	1.20	5600	4.51	10700	6.64	15800	8.52
600	1.32	5700	4.56	10800	6.65	15900	8.56
700	1.44	5800	4.59	10900	6.68	16000	8.61
800	1.54	5900	4.64	11000	6.68	16100	8.64
900	1.64	6000	4.69	11100	6.69	16200	8.66
1000	1.74	6100	4.72	11200	6.70	16300	8.70
1100	1.83	6200	4.77	11300	6.74	16400	8.73
1200	1.92	6300	4.80	11400	6.78	16500	8.74
1300	2.01	6400	4.83	11500	6.81	16600	8.75
1400	2.09	6500	4.89	11600	6.84	16700	8.78
1500	2.18	6600	4.90	11700	6.87	16800	8.79
1600	2.25	6700	4.95	11800	6.92	16900	8.81
1700	2.33	6800	5.01	11900	6.98	17000	8.85
1800	2.39	6900	4.99	12000	7.02	17100	8.90
1900	2.47	7000	5.04	12100	7.08	17200	8.95
2000	2.53	7100	5.11	12200	7.15	17300	8.99
2100	2.60	7200	5.14	12300	7.20	17400	9.03
2200	2.67	7300	5.21	12400	7.26	17500	9.07
2300	2.73	7400	5.29	12500	7.31	17600	9.11
2400	2.80	7500	5.33	12600	7.36	17700	9.15
2500	2.87	7600	5.38	12700	7.41	17800	9.19
2600	2.93	7700	5.46	12800	7.46	17900	9.24
2700	3.00	7800	5.52	12900	7.51	18000	9.28
2800	3.06	7900	5.58	13000	7.55		
2900	3.12	8000	5.64	13100	7.59		
3000	3.18	8100	5.69	13200	7.65		
3100	3.24	8200	5.75	13300	7.69		
3200	3.30	8300	5.80	13400	7.72		
3300	3.35	8400	5.84	13500	7.78		
3400	3.42	8500	5.90	13600	7.82		
3500	3.46	8600	5.97	13700	7.86		
3600	3.52	8700	5.99	13800	7.91		
3700	3.57	8800	6.04	13900	7.96		
3800	3.61	8900	6.10	14000	8.01		
3900	3.67	9000	6.13	14100	8.06		
4000	3.71	9100	6.17	14200	8.10		
4100	3.77	9200	6.23	14300	8.13		
4200	3.83	9300	6.27	14400	8.16		
4300	3.89	9400	6.30	14500	8.19		
4400	3.94	9500	6.35	14600	8.21		
4500	4.00	9600	6.37	14700	8.23		
4600	4.05	9700	6.40	14800	8.26		
4700	4.10	9800	6.44	14900	8.28		
4800	4.16	9900	6.45	15000	8.30		



**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244S/N 12025101 003,**  
**HL 4353**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		





**Cable loss**  
**RF Cable, Huber-Suhner, 40 GHz, 5.5 m, K type,**  
**SF102EA/11SK/11SK/5500MM, S/N 502494/2EA**  
**HL 5112**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
100	0.69	20500	10.18
200	0.97	21000	10.32
300	1.18	21500	10.47
500	1.52	22000	10.60
1000	2.14	22500	10.75
1500	2.62	23000	10.87
2000	3.03	23500	11.00
2500	3.40	24000	11.12
3000	3.73	24500	11.23
3500	4.04	25000	11.35
4000	4.33	25500	11.52
4500	4.60	26000	11.64
5000	4.86	26500	11.73
5500	5.10	27000	11.84
6000	5.34	27500	11.93
6500	5.57	28000	12.05
7000	5.79	28500	12.19
7500	6.00	29000	12.33
8000	6.21	29500	12.44
8500	6.43	30000	12.53
9000	6.62	30500	12.58
9500	6.82	31000	12.71
10000	7.01	31500	12.86
10500	7.17	32000	13.00
11000	7.34	32500	13.11
11500	7.51	33000	13.24
12000	7.68	33500	13.33
12500	7.84	34000	13.44
13000	8.00	34500	13.58
13500	8.16	35000	13.69
14000	8.32	35500	13.81
14500	8.48	36000	13.93
15000	8.63	36500	14.05
15500	8.77	37000	14.24
16000	8.92	37500	14.28
16500	9.08	38000	14.38
17000	9.23	38500	14.50
17500	9.37	39000	14.61
18000	9.51	39500	14.70
18500	9.66	40000	14.83
19000	9.78		
19500	9.92		
20000	10.07		



## 13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
BB	broad band
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
$\Omega$	Ohm
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT