


-20 dB BANDWIDTH

DATA SHEETS




Ref Lvl 122 dBμV
Delta 2 [T2] 0.08 dB
274.54909820 kHz
RBW 10 kHz
VBW 30 kHz
SWT 25 ms
RF Att 30 dB
Unit dBμV

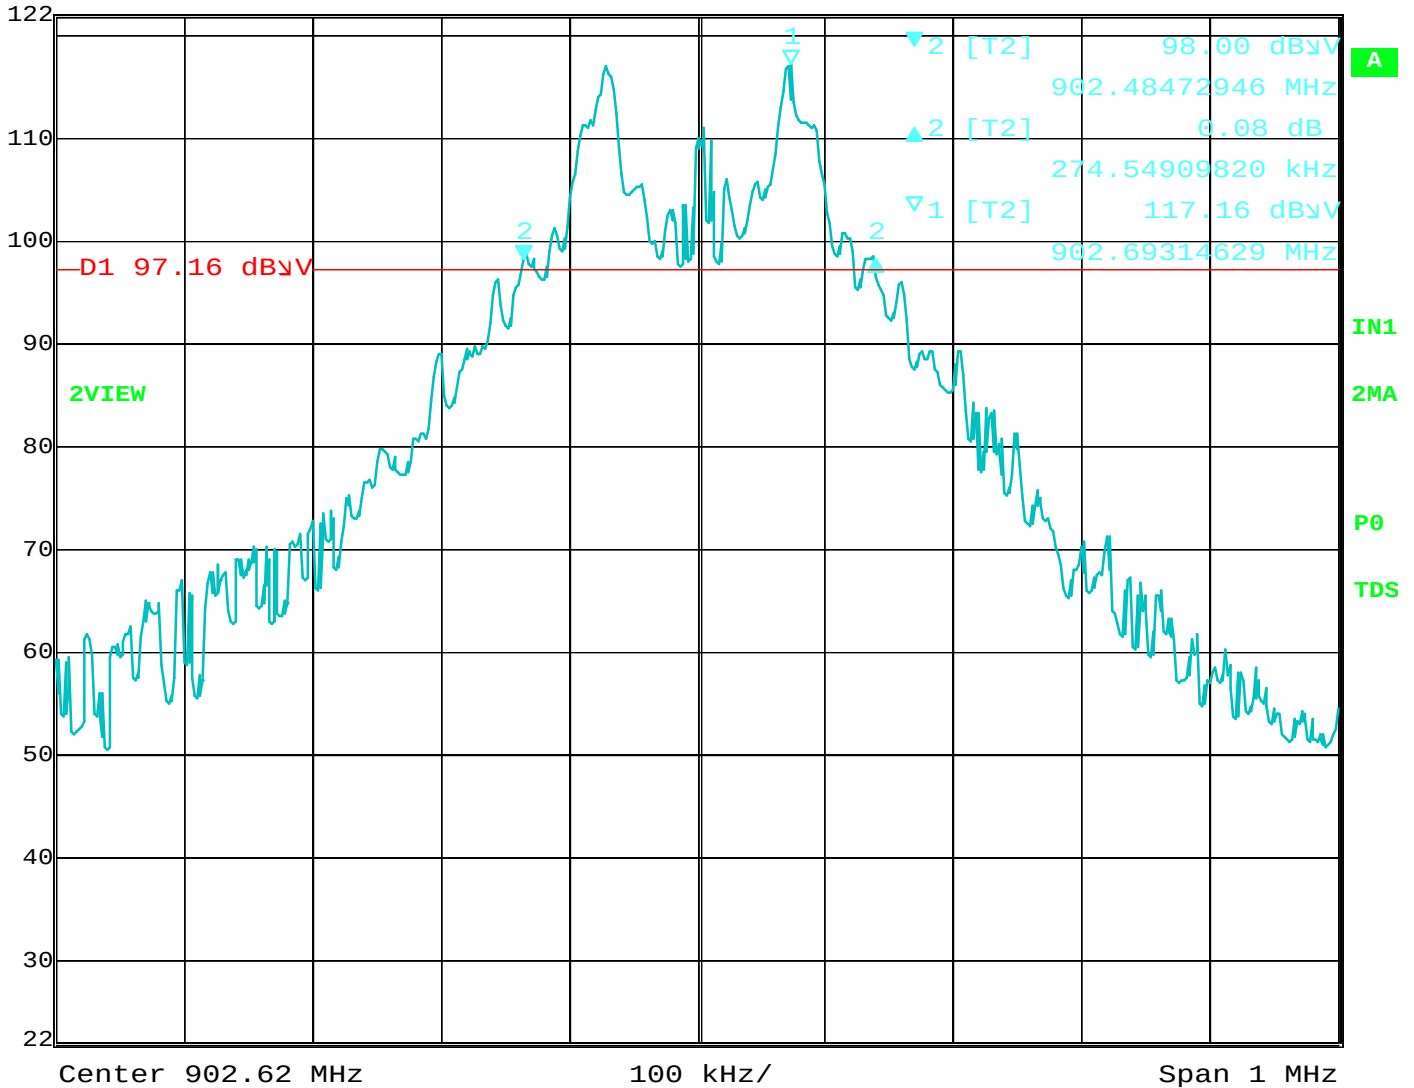

Date: 29.NOV.2012 16:57:47

20 dB Bandwidth of Fundamental – Low Channel

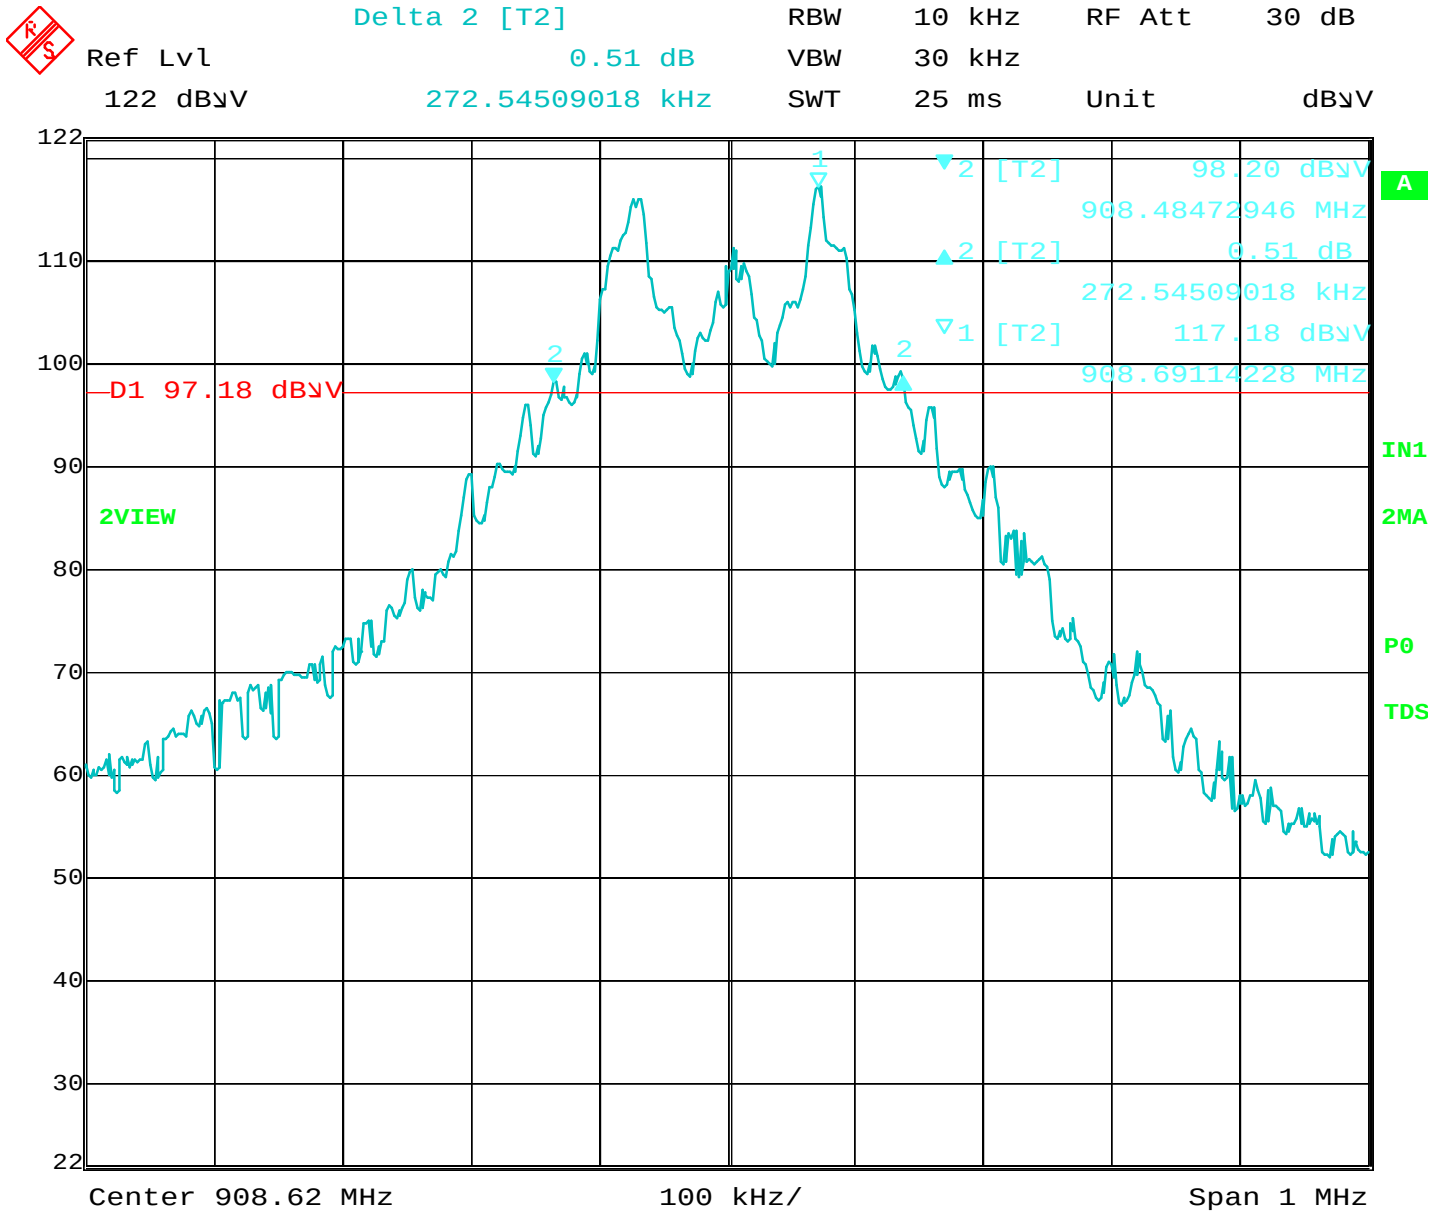


Date: 29.NOV.2012 16:59:23

20 dB Bandwidth of Fundamental – Middle Channel



Delta 2 [T2] RBW 10 kHz RF Att 30 dB
 Ref Lvl 0.28 dB VBW 30 kHz
 122 dBμV 272.54509018 kHz SWT 25 ms Unit dBμV

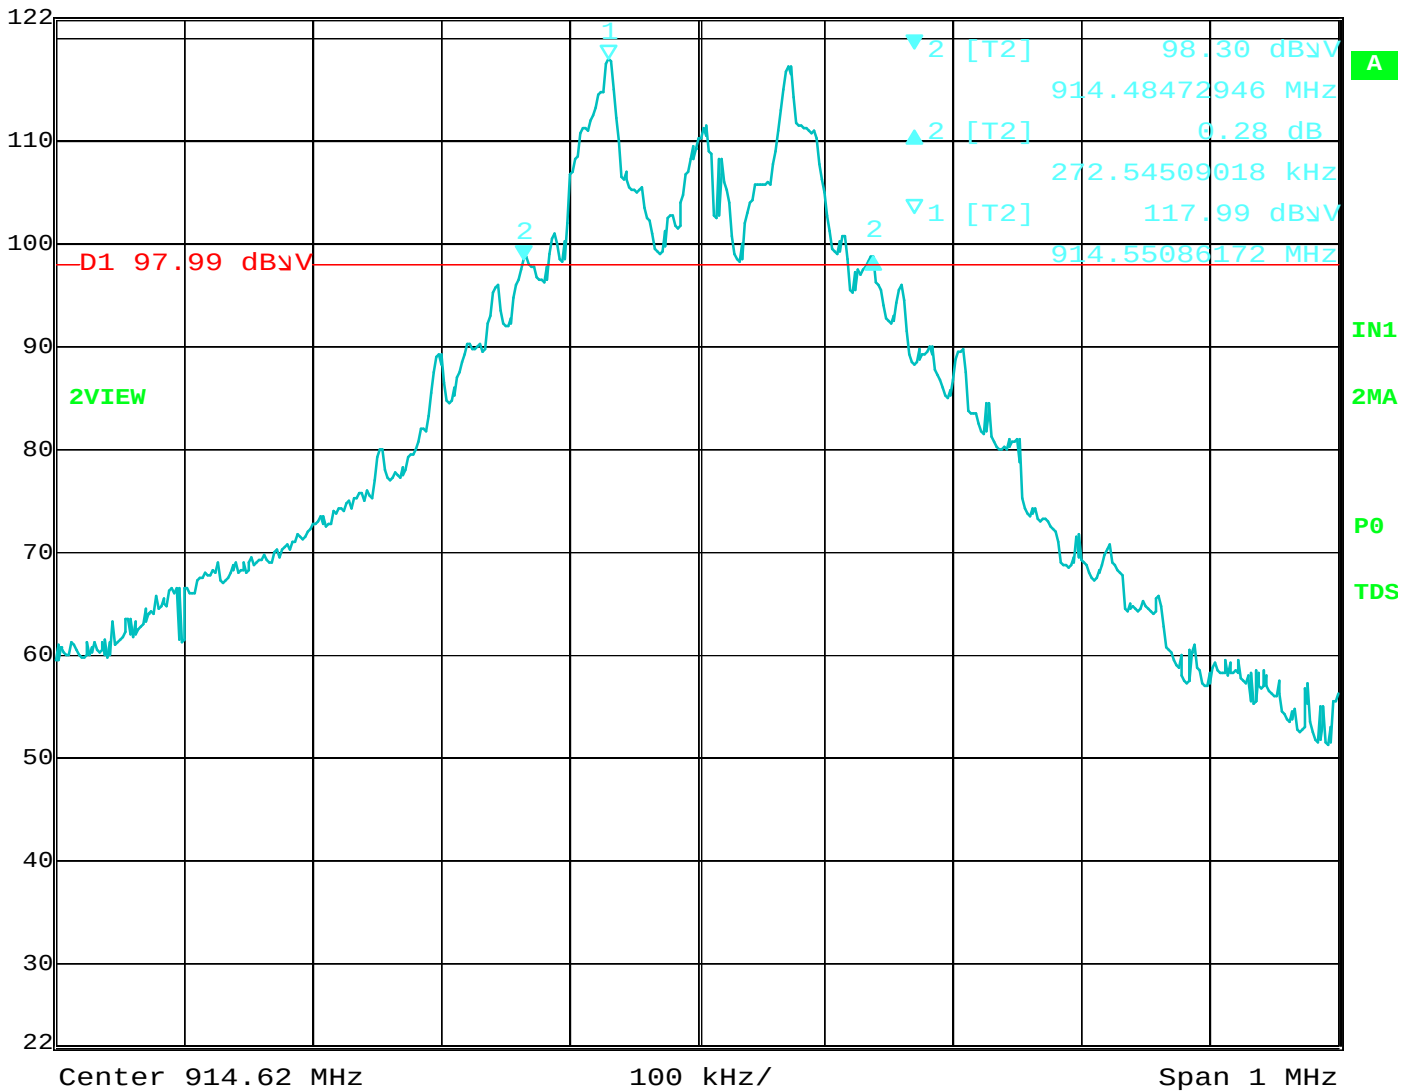


Date: 29.NOV.2012 17:00:58

20 dB Bandwidth of Fundamental – High Channel


PEAK POWER

DATA SHEETS

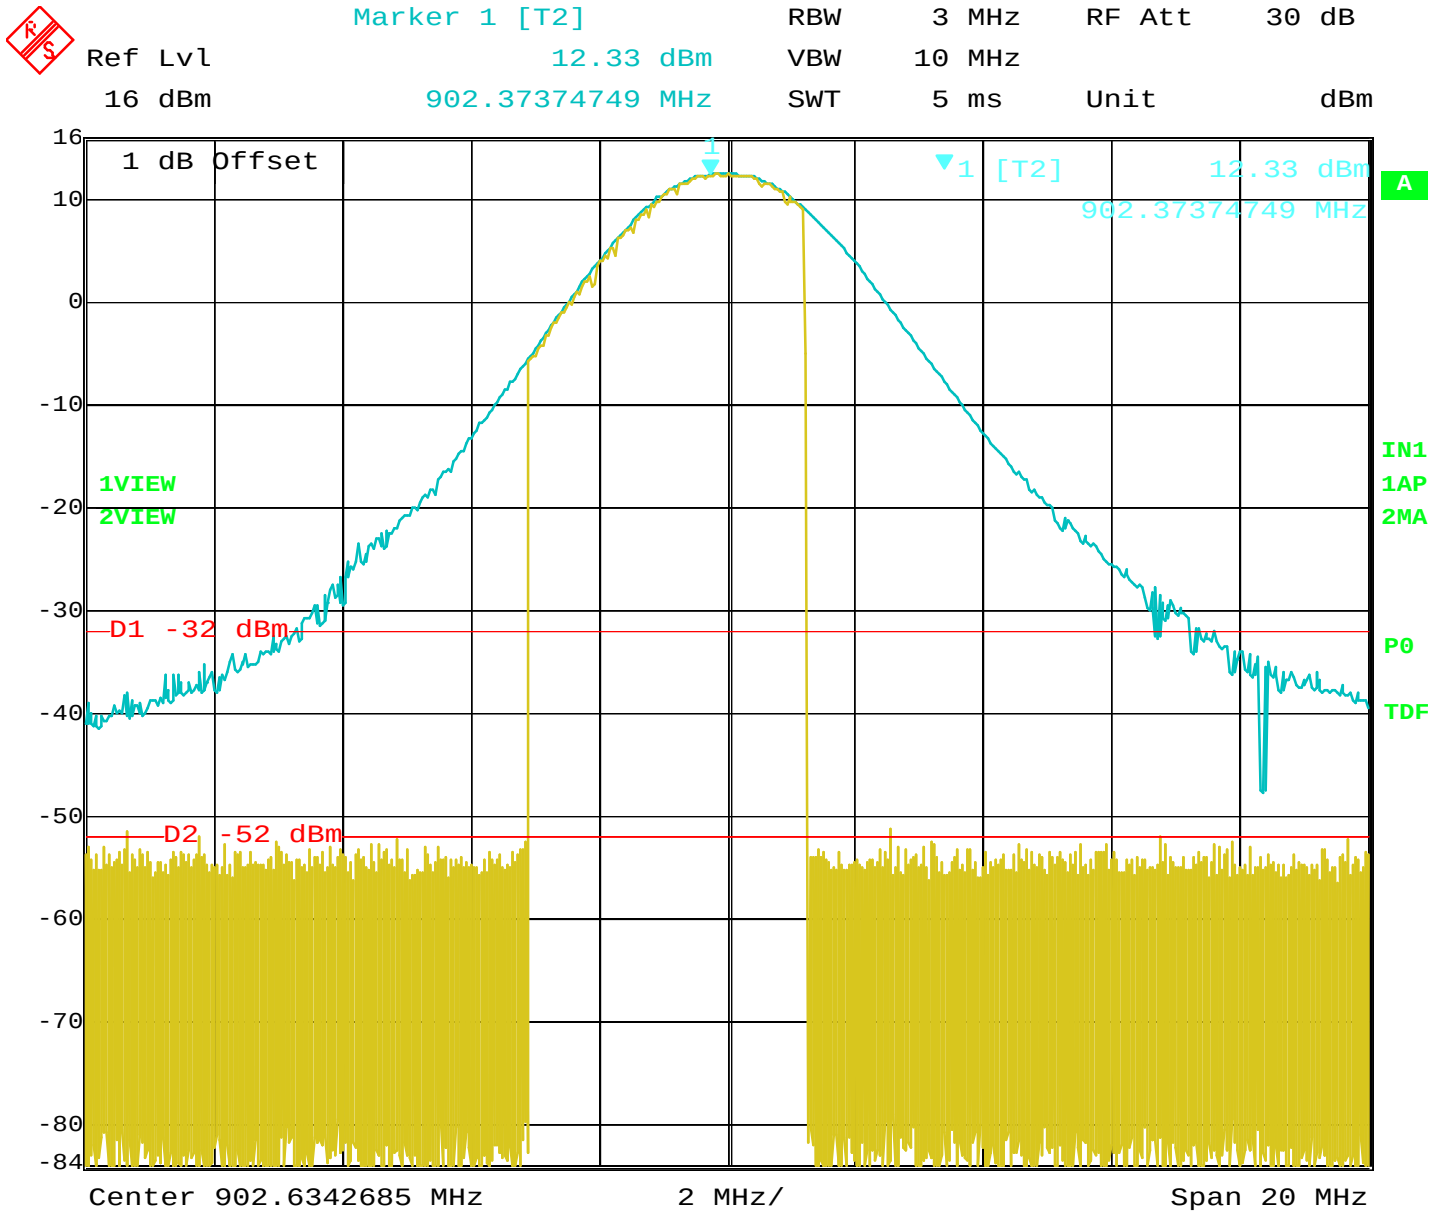


Date: 6.DEC.2012 13:31:53

Peak Power Output – Low Channel

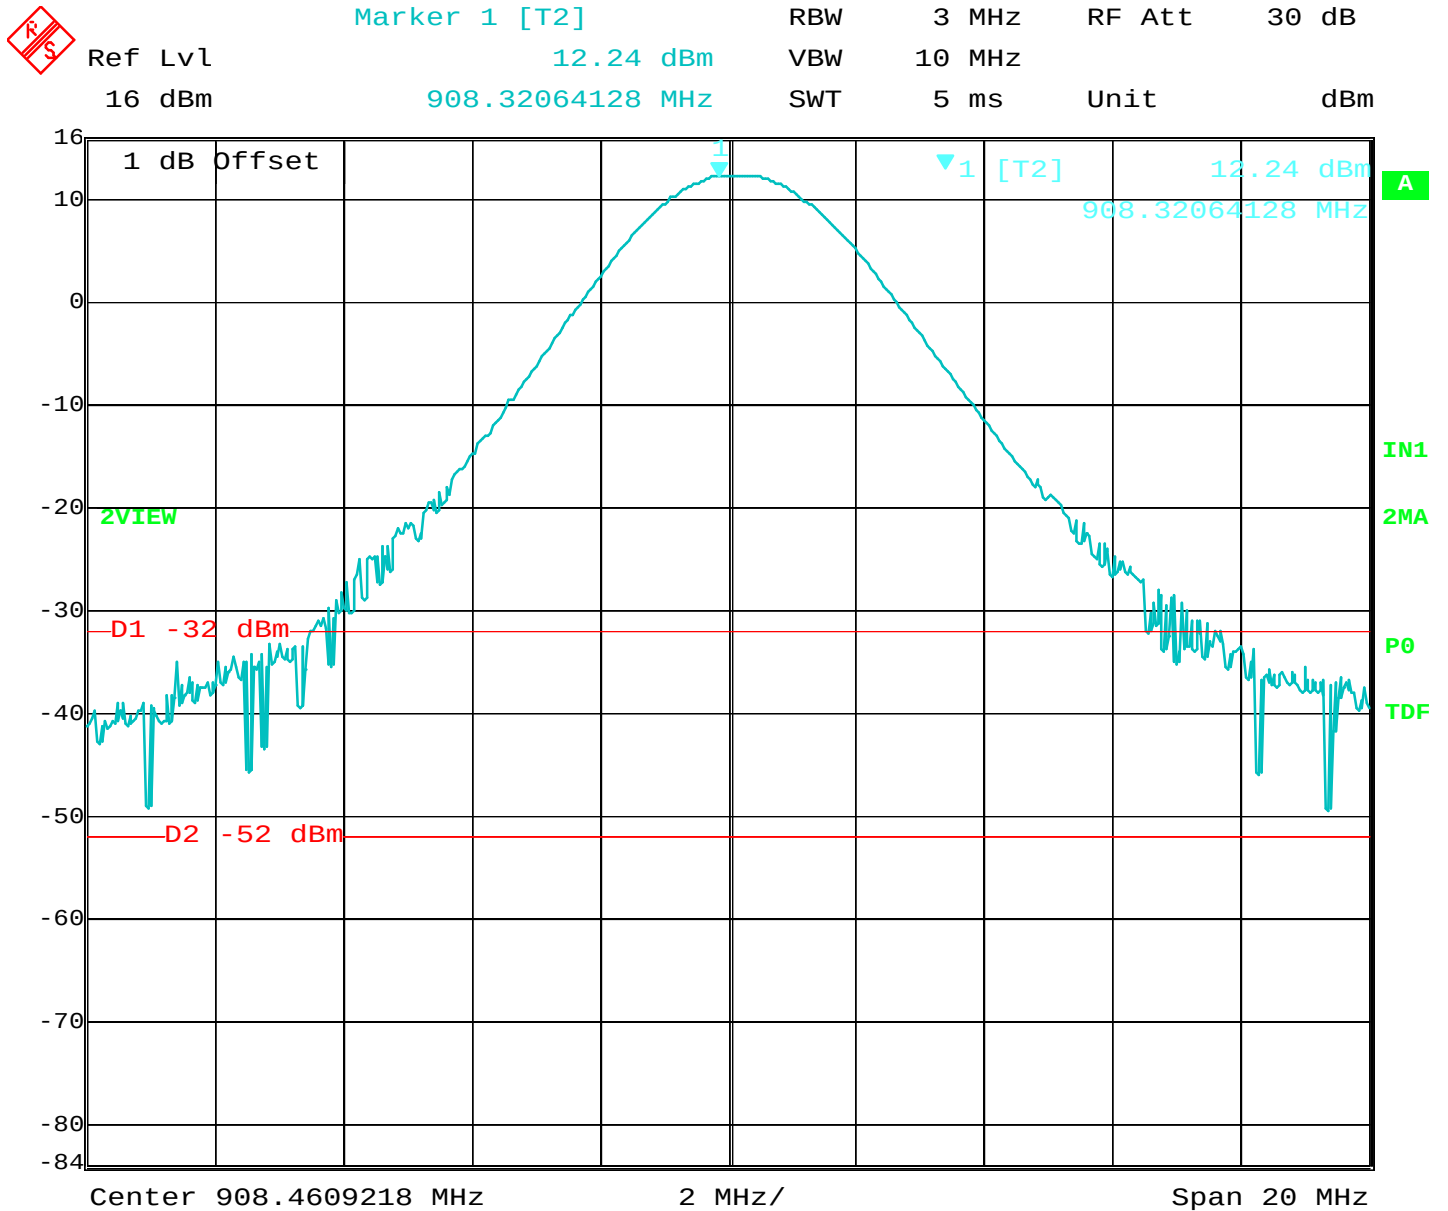

Date: 6.DEC.2012 13:33:20

Peak Power Output – Middle Channel

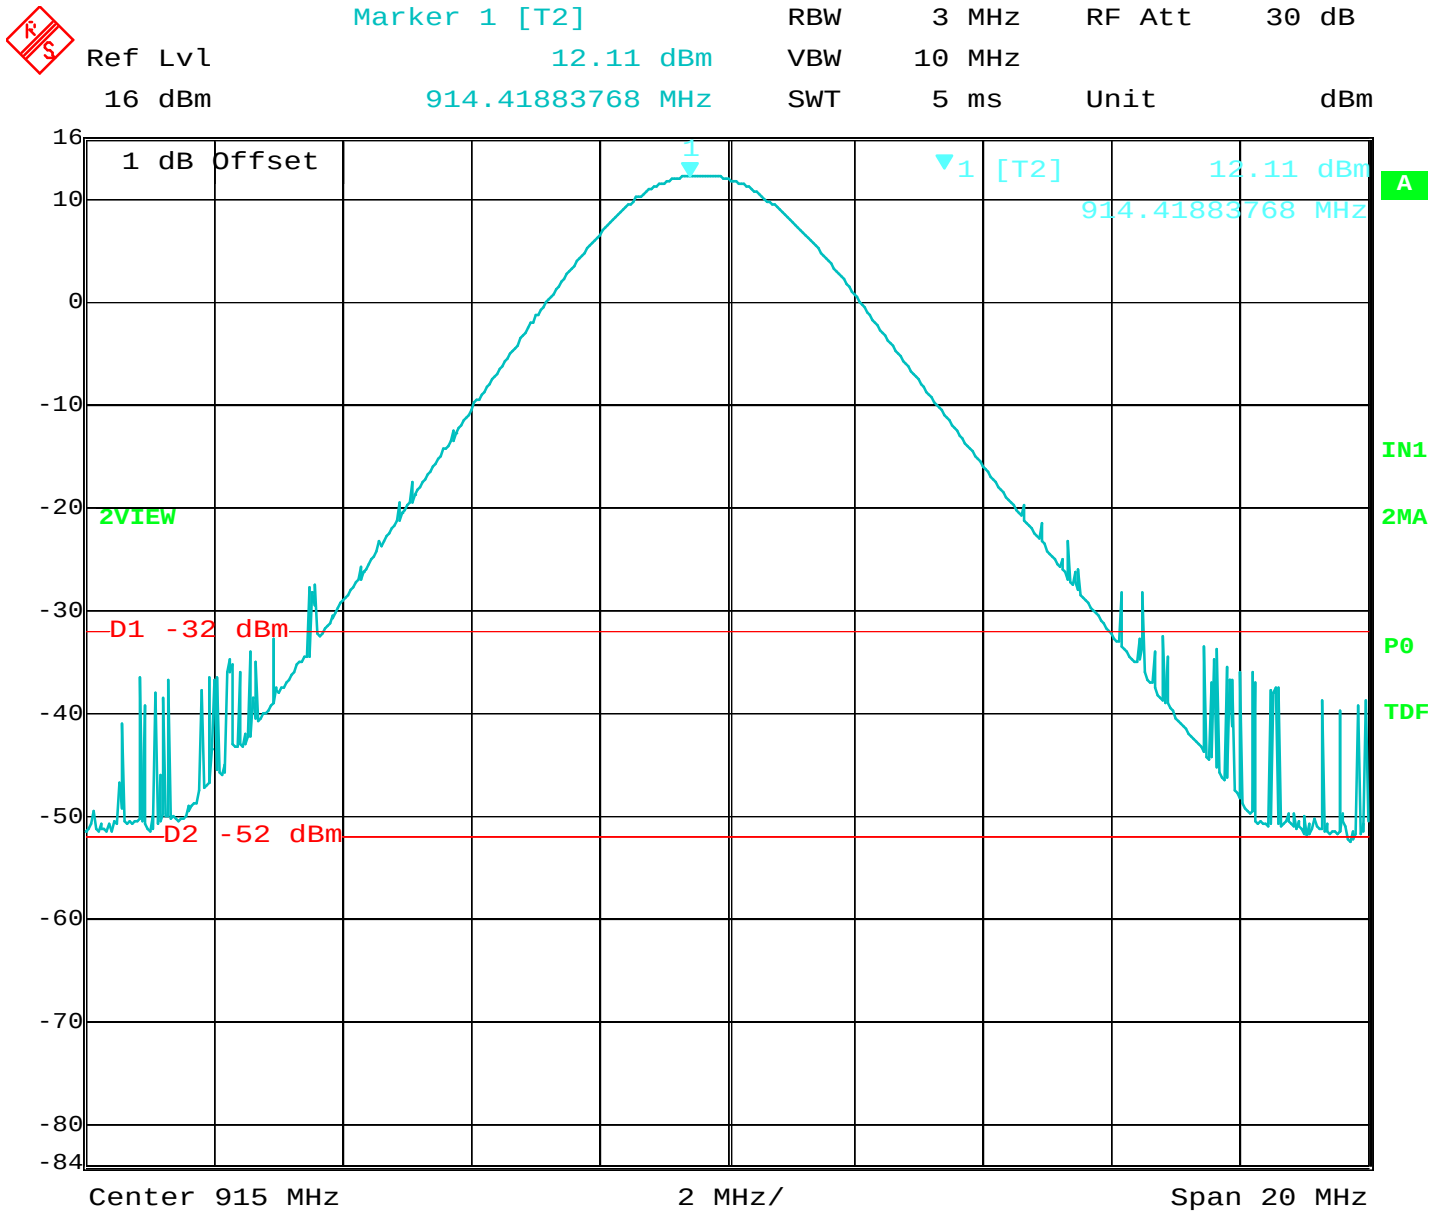


Date: 6.DEC.2012 13:52:22

Peak Power Output – High Channel

CHANNEL SEPARATION TEST

DATA SHEET

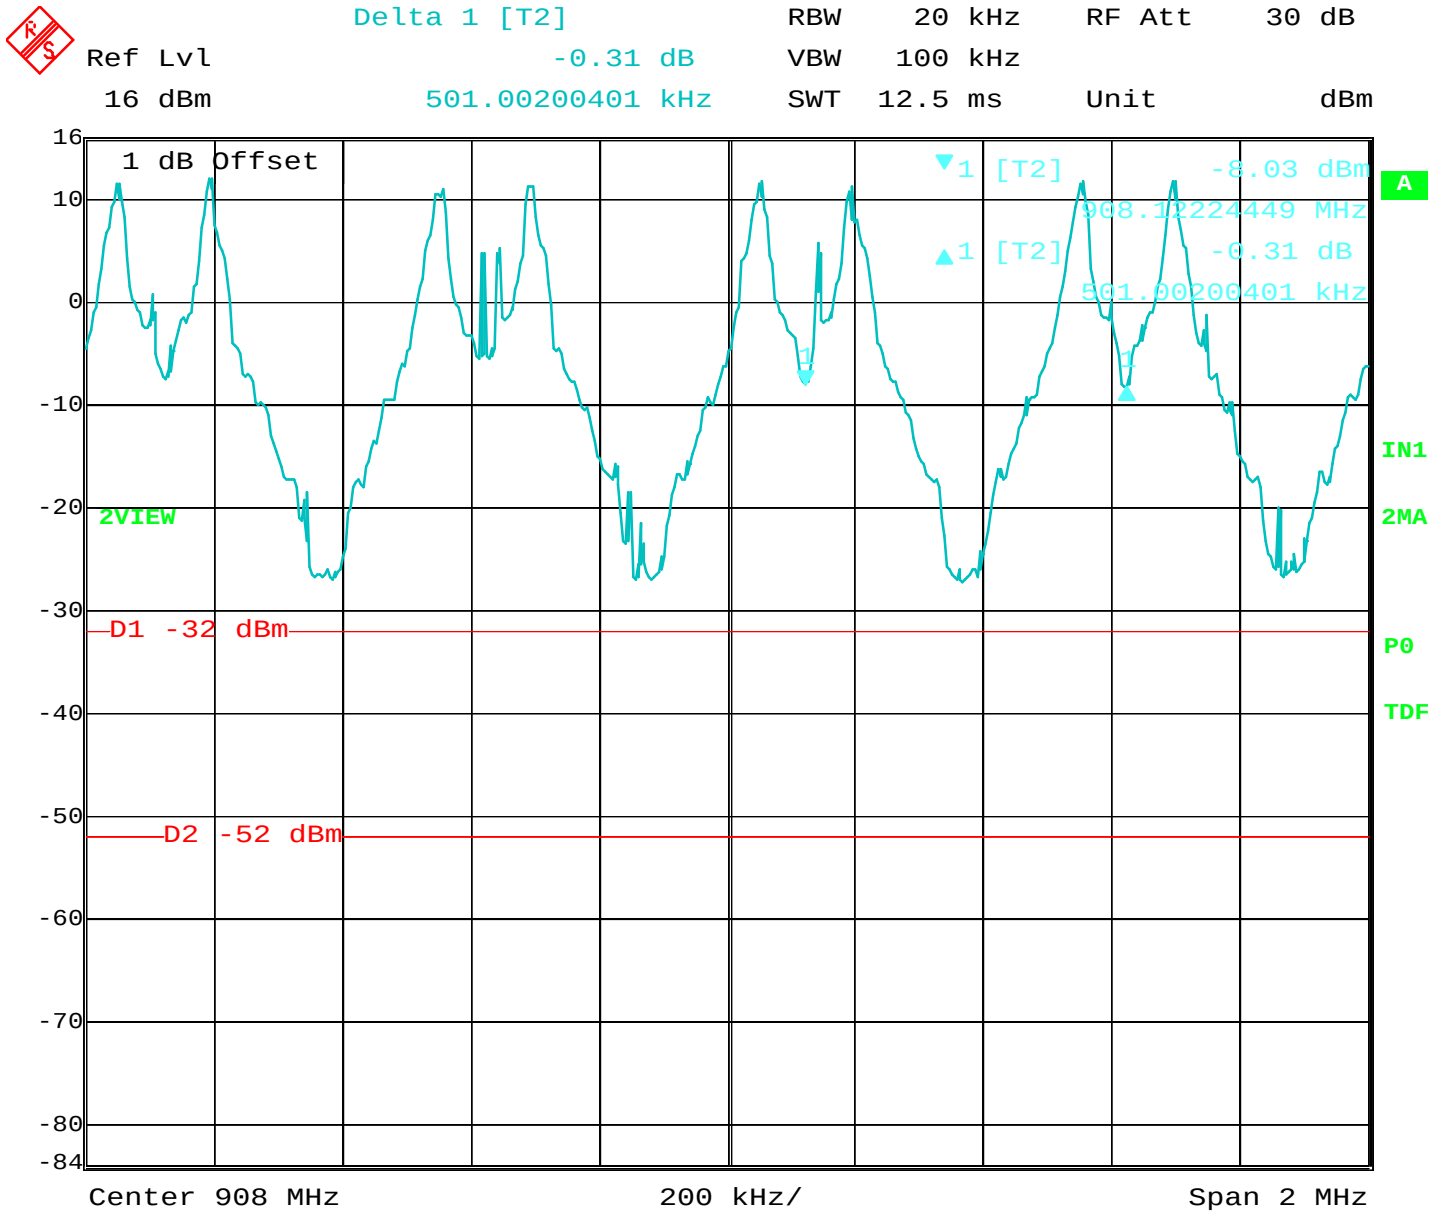

Date: 6.DEC.2012 13:13:34


Channel Frequency Separation Test

NUMBER OF FREQUENCIES

DATA SHEETS



Marker 1 [T2] RBW 30 kHz RF Att 30 dB
 Ref Lvl 12.12 dBm VBW 100 kHz
 16 dBm 906.06813627 MHz SWT 39 ms Unit dBm

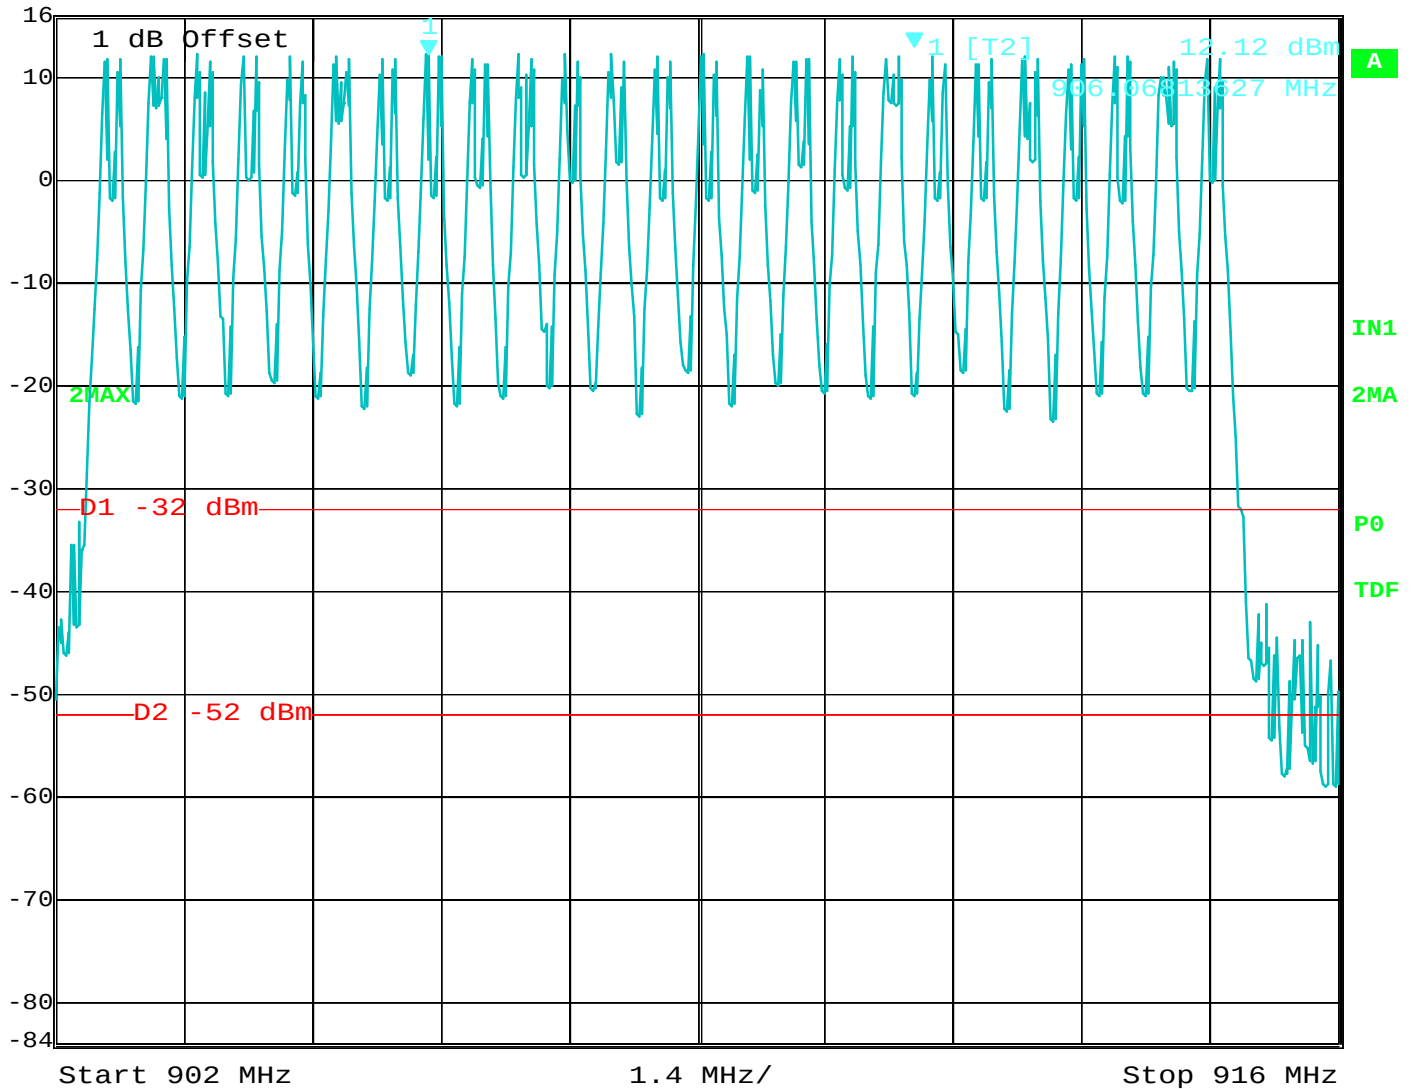


Date: 6.DEC.2012 13:19:50

Number of Frequencies (25 Total)


TIME OF OCCUPANCY

DATA SHEETS

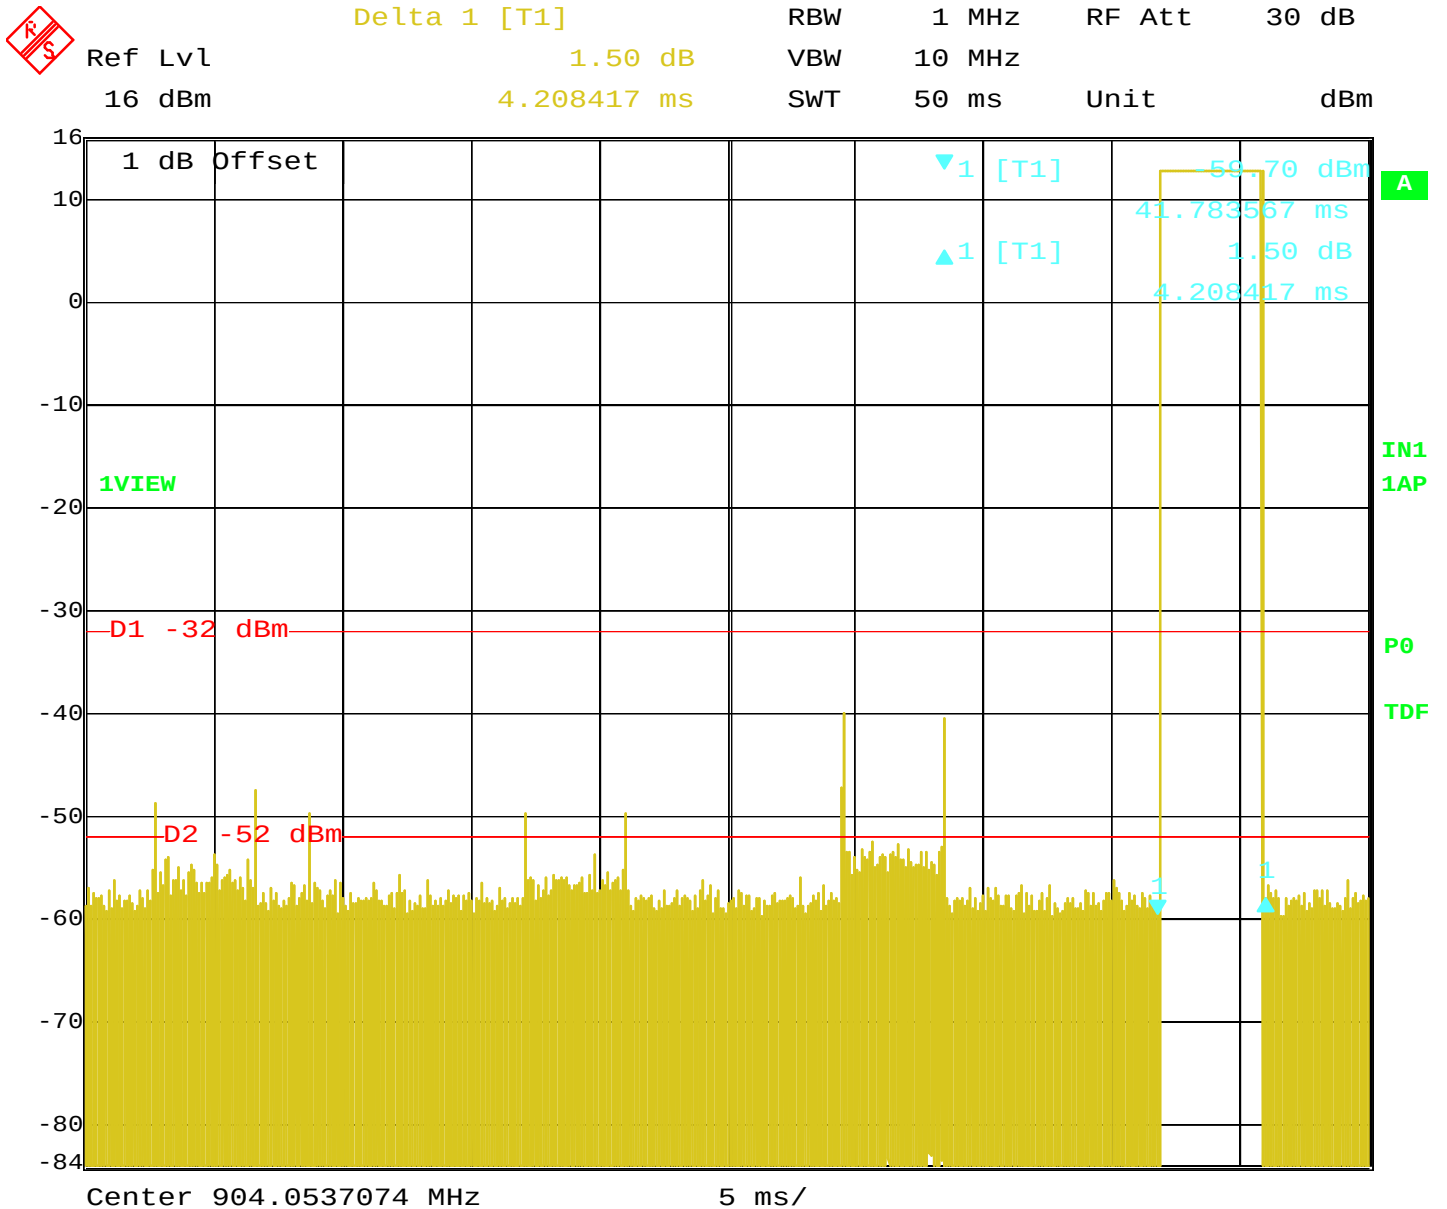

Date: 6.DEC.2012 11:23:54

Time of One Pulse = 4.208417 mS

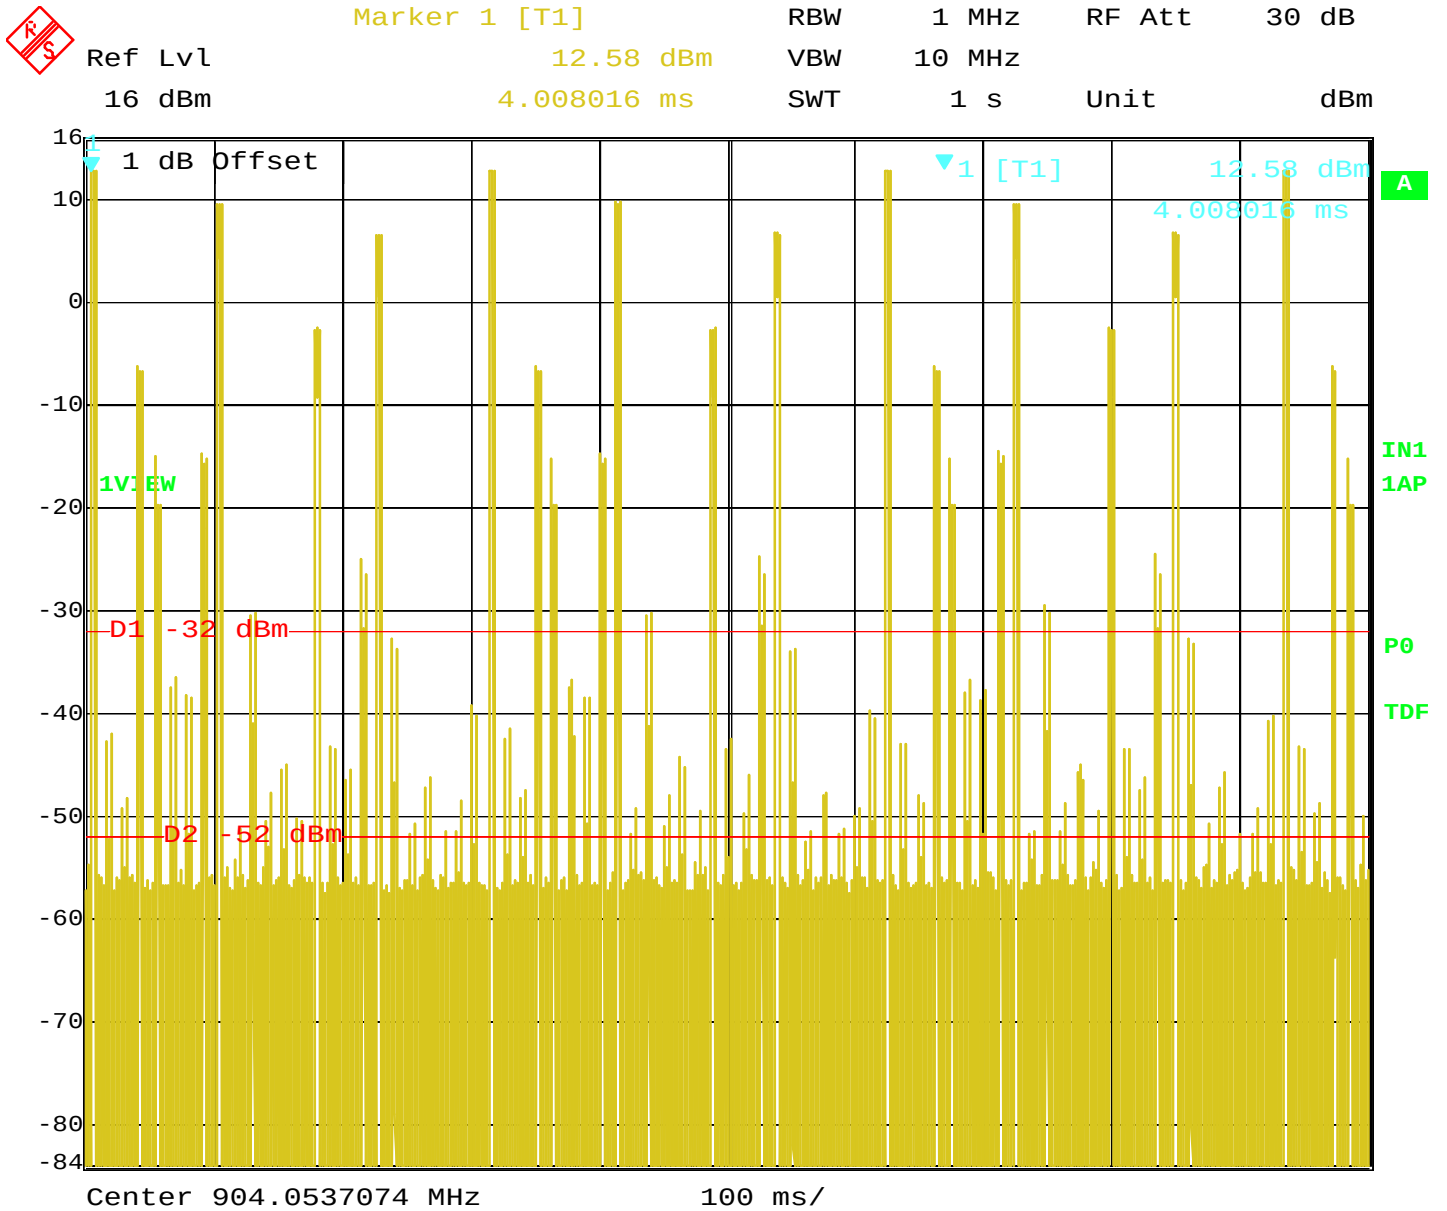


Date: 6.DEC.2012 11:26:26

Number of Pulses in 1 Seconds = 4
Total Number of Pulses in 10 Seconds = 40
Time of Occupancy = 4.208417 mS * 40 = 168.33668 mS
Limit = 400 mS in a 10 Second Period


BAND EDGES

DATA SHEETS

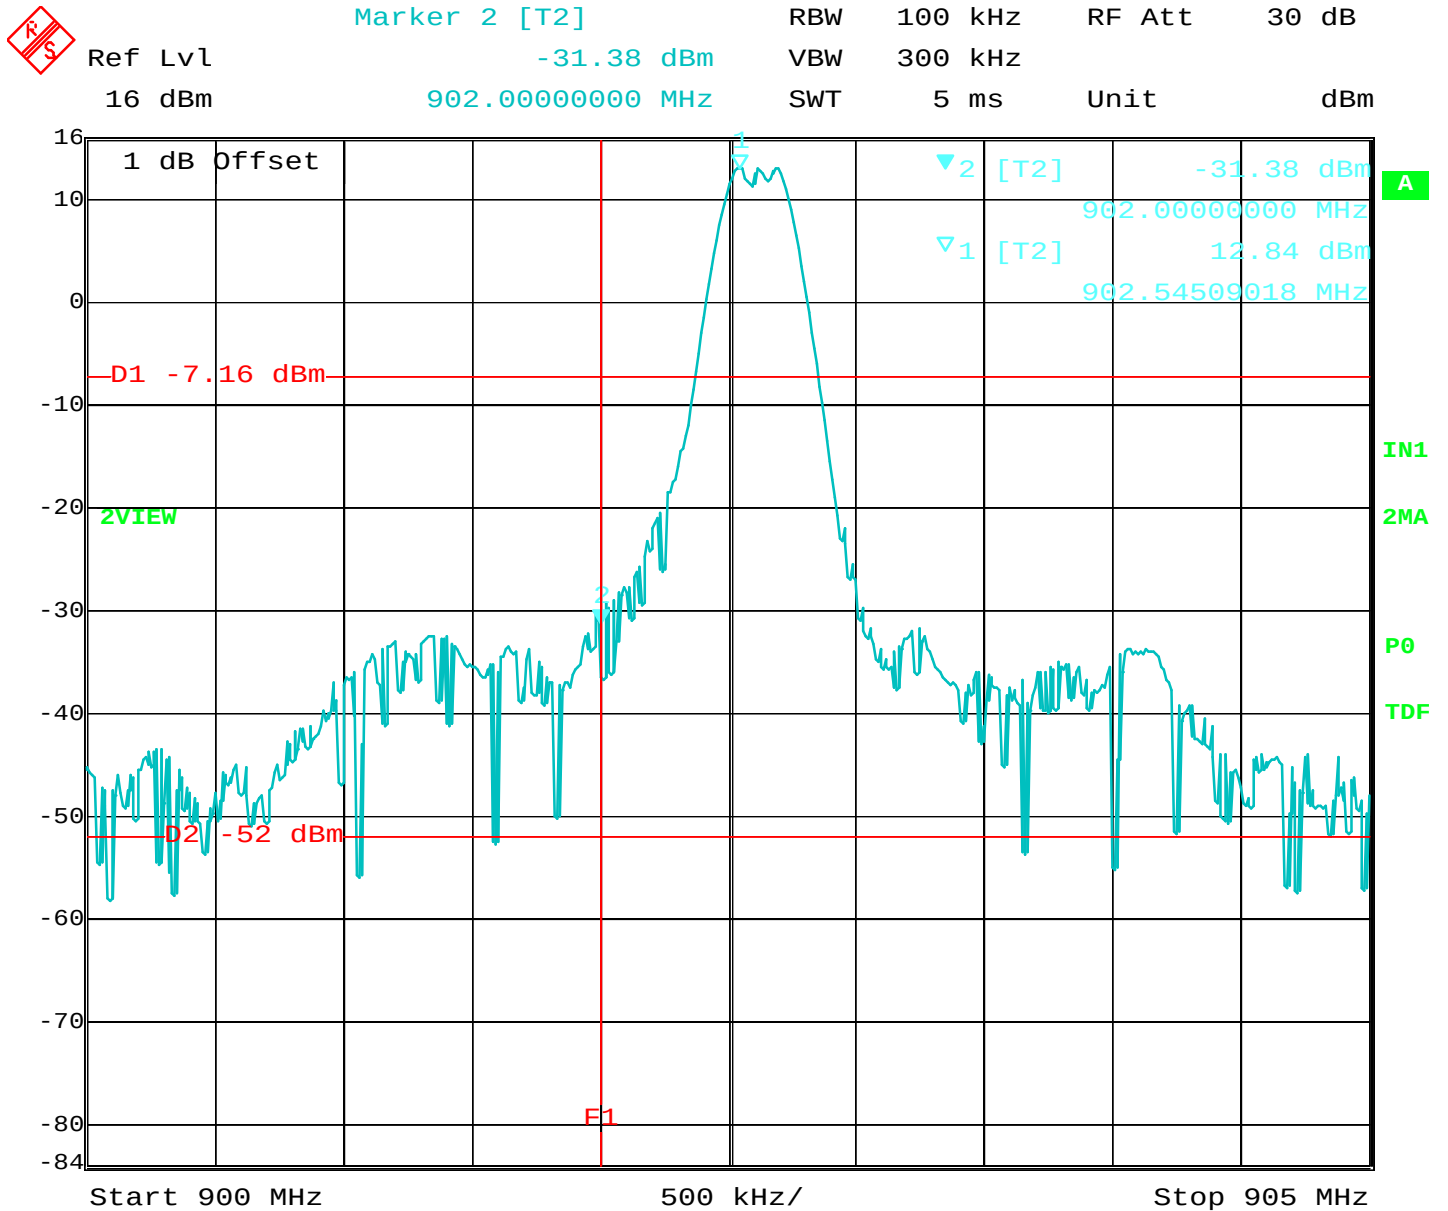

Date: 6.DEC.2012 14:06:00

Band Edge – Low Channel

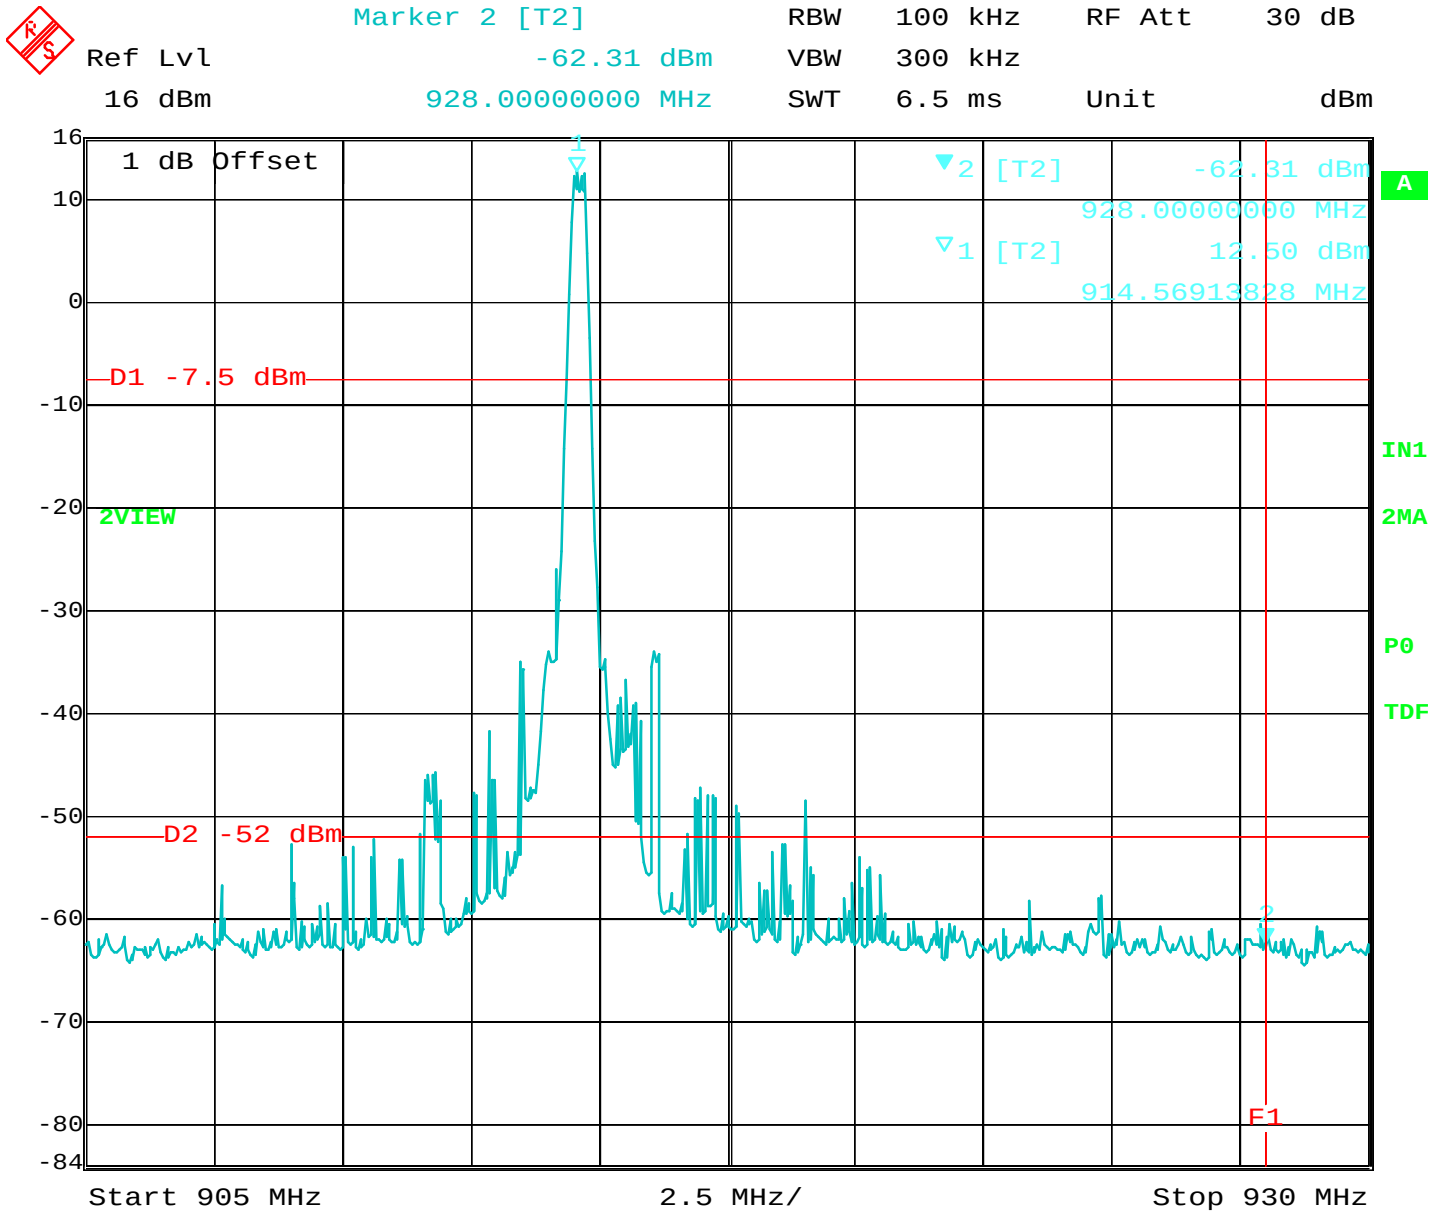


Date: 6.DEC.2012 13:59:35

Band Edge – High Channel

RF ANTENNA CONDUCTED


DATA SHEETS



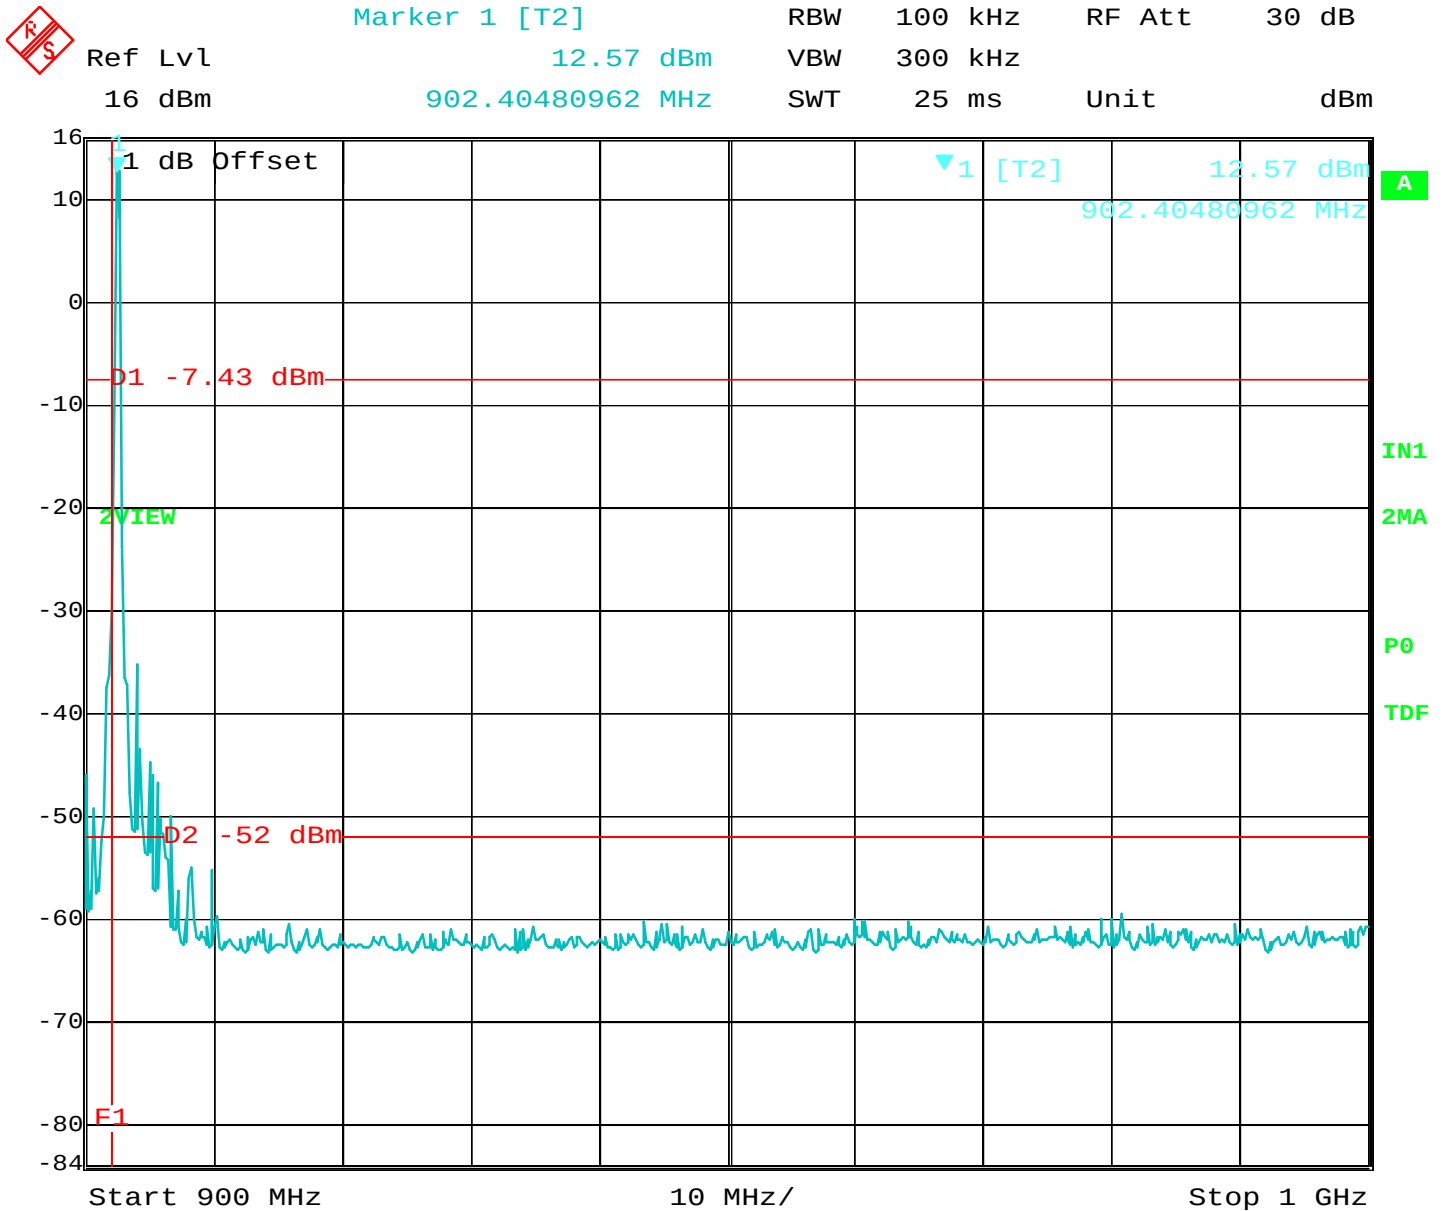

Date: 6.DEC.2012 16:01:24

RF Antenna Conducted Test – Low Channel – 900 MHz to 1 GHz

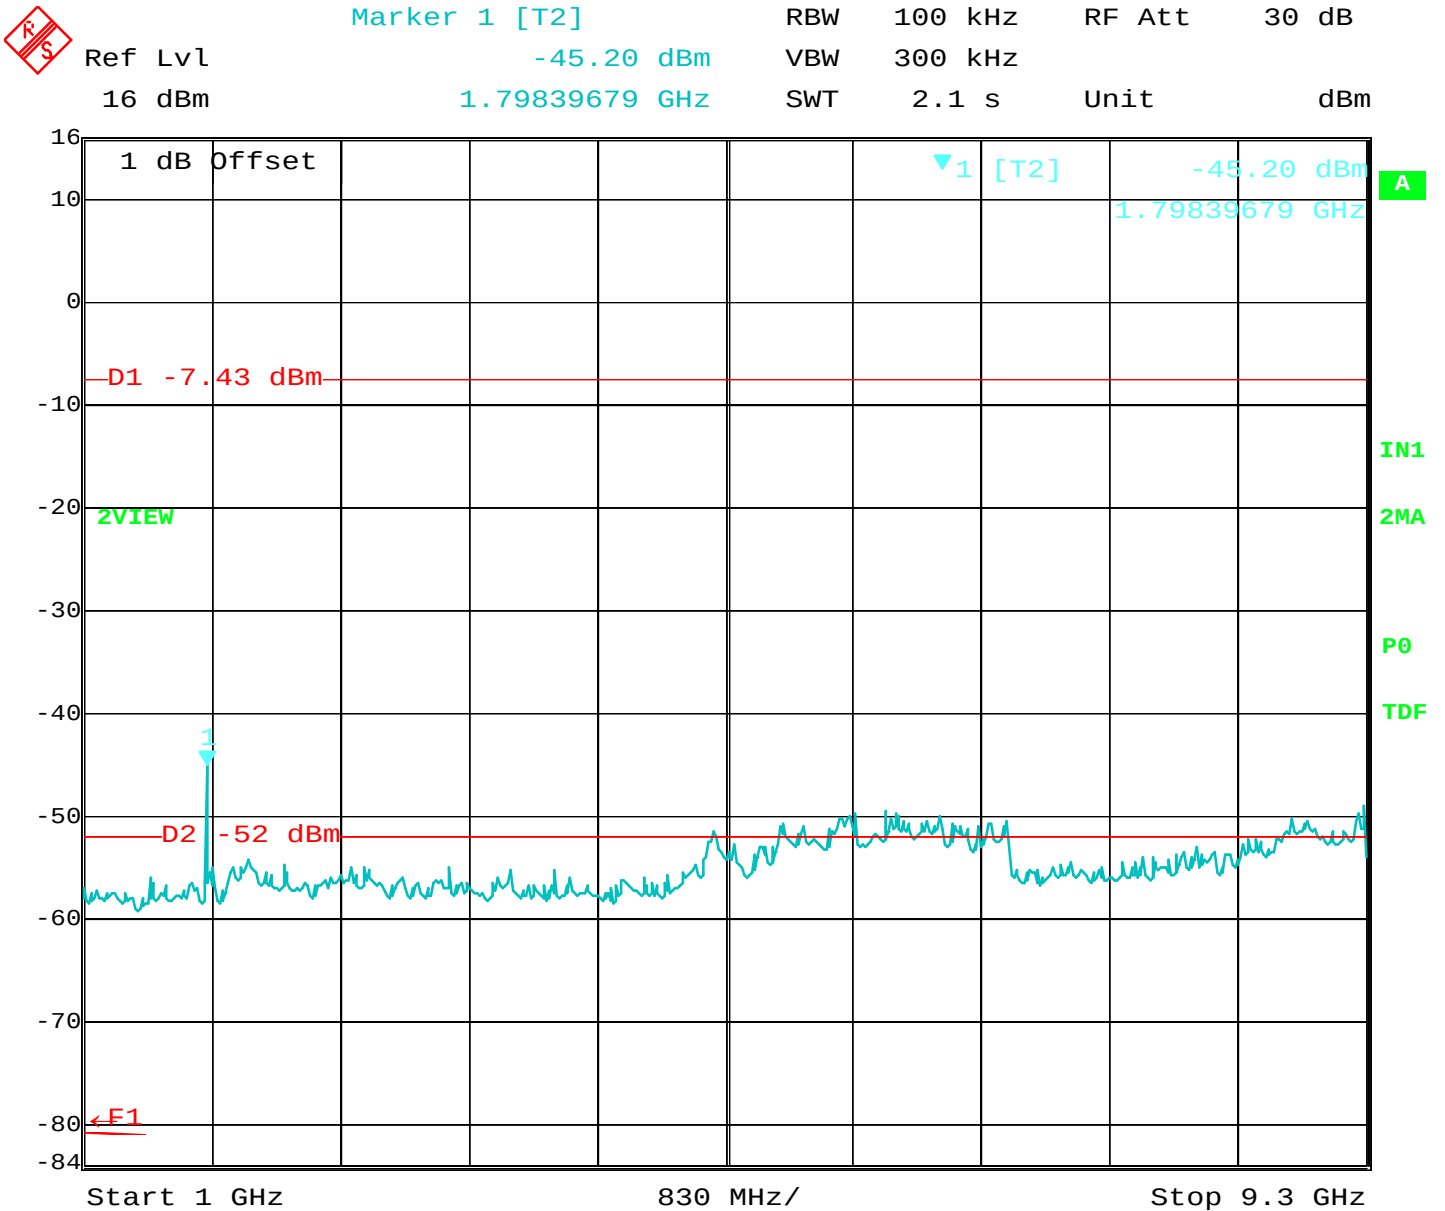


Date: 6.DEC.2012 16:02:57

RF Antenna Conducted Test – Low Channel – 1 GHz to 9.3 GHz



Marker 1 [T2] RBW 100 kHz RF Att 30 dB
 Ref Lvl -60.58 dBm VBW 300 kHz
 16 dBm 158.72567134 MHz SWT 840 ms Unit dBm

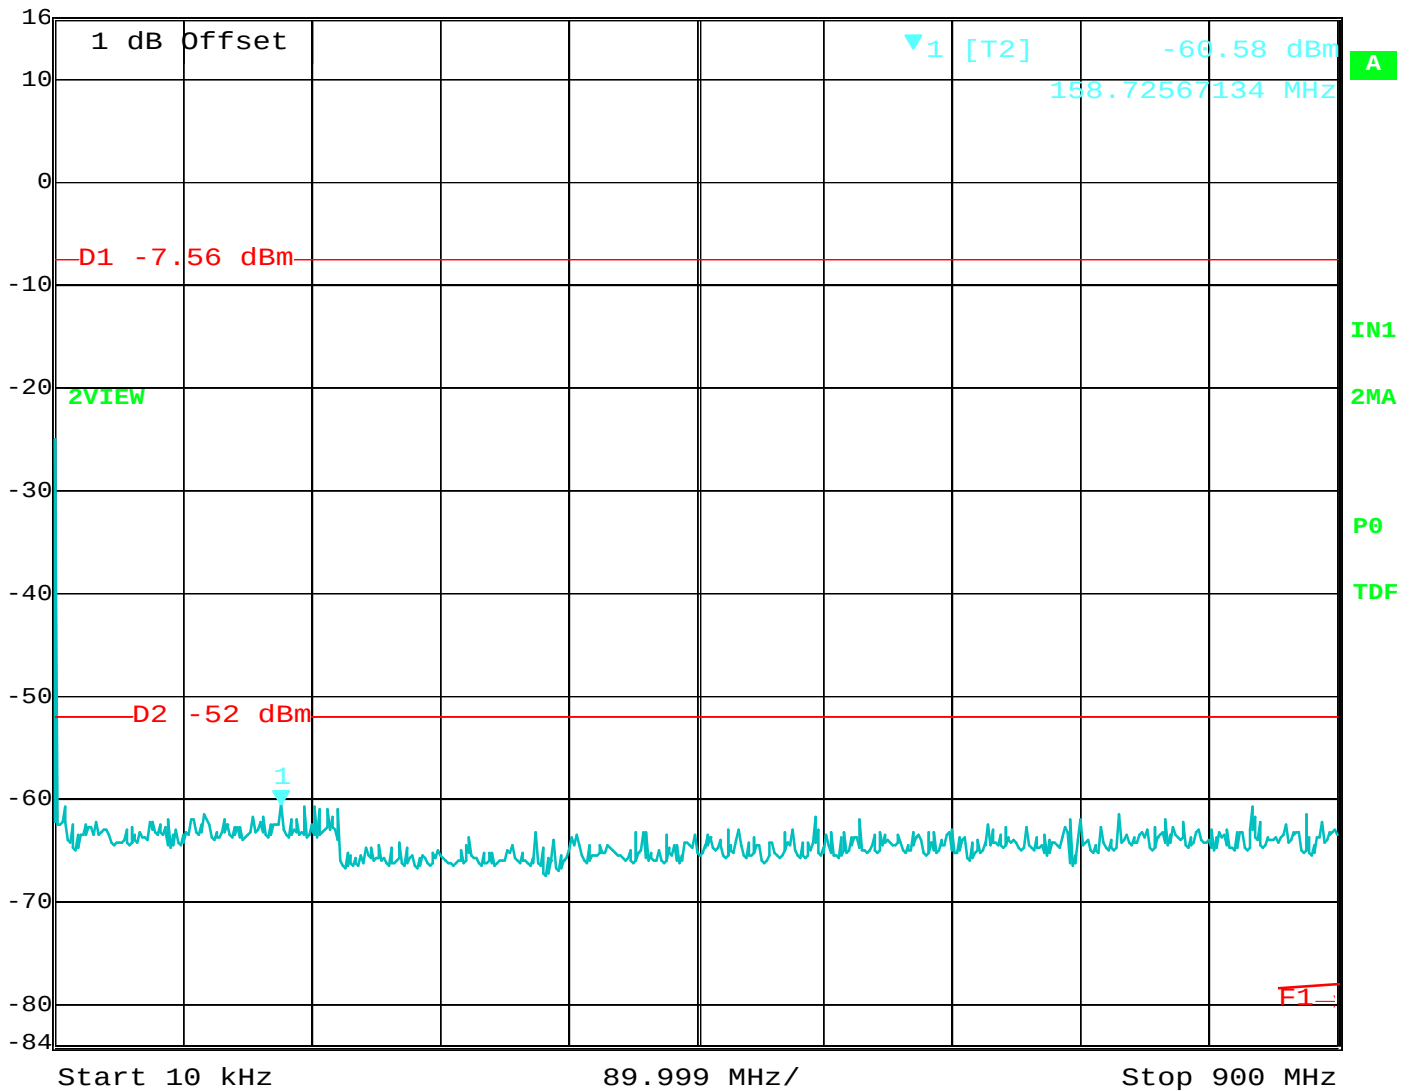

Date: 6.DEC.2012 16:06:18

RF Antenna Conducted Test – Middle Channel – 10 kHz to 900 MHz



Ref Lvl
16 dBm

Marker 1 [T2]

12.44 dBm
908.41683367 MHz


RBW 100 kHz RF Att 30 dB

VBW 300 kHz

SWT 25 ms


Unit

dBm

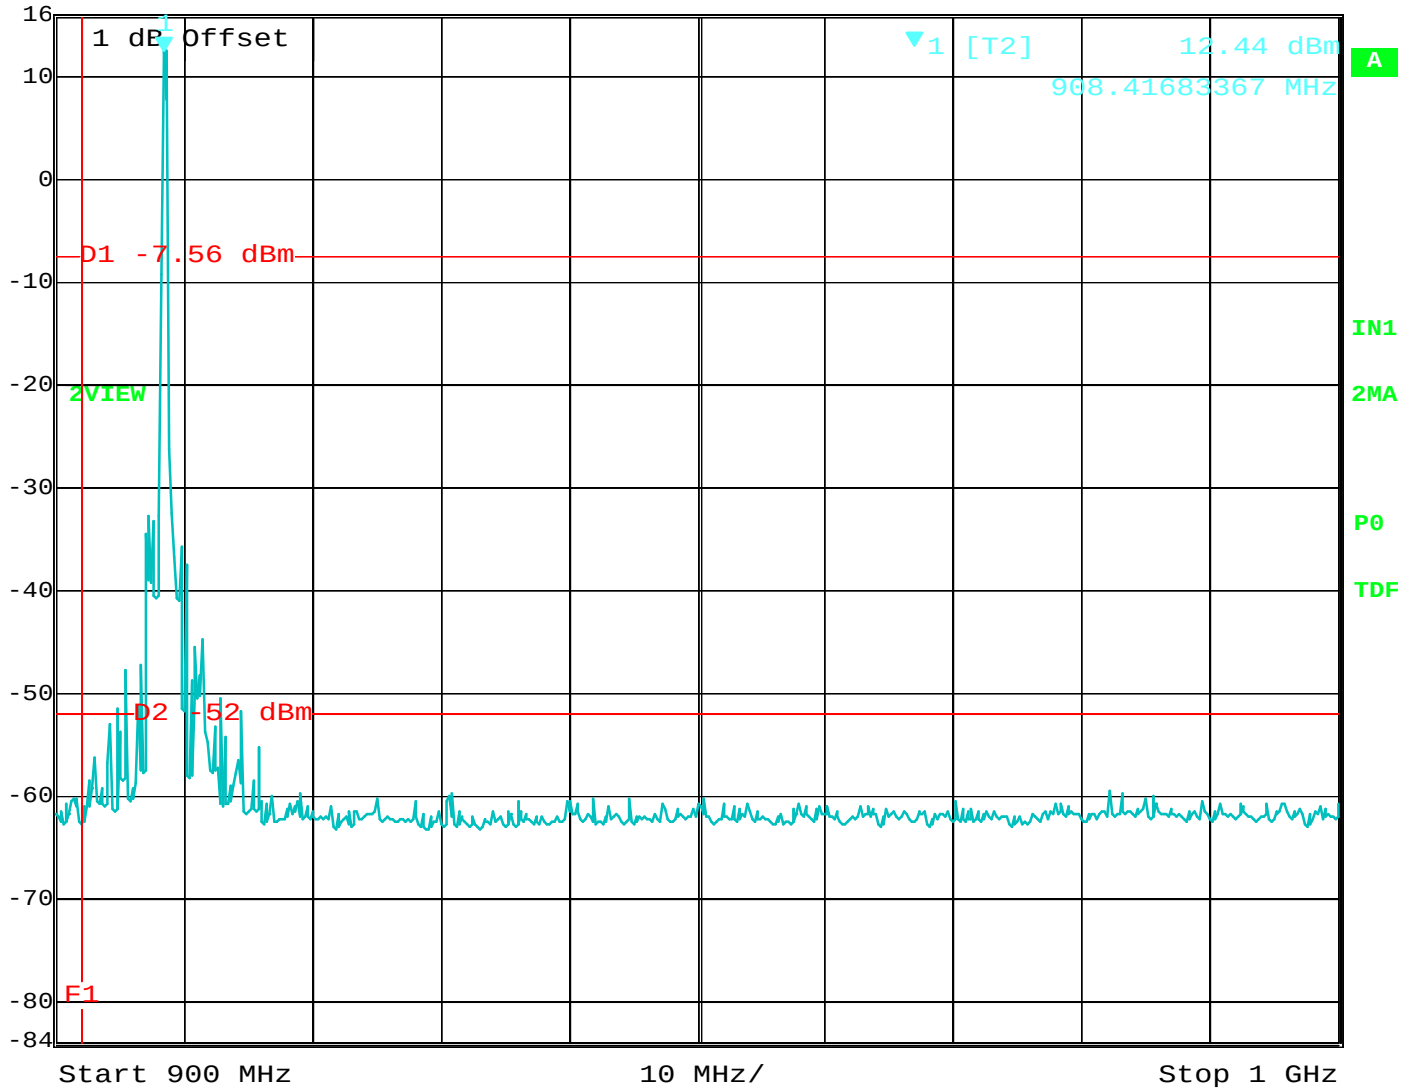


Date: 6.DEC.2012 16:05:47

RF Antenna Conducted Test – Middle Channel – 900 MHz to 1 GHz

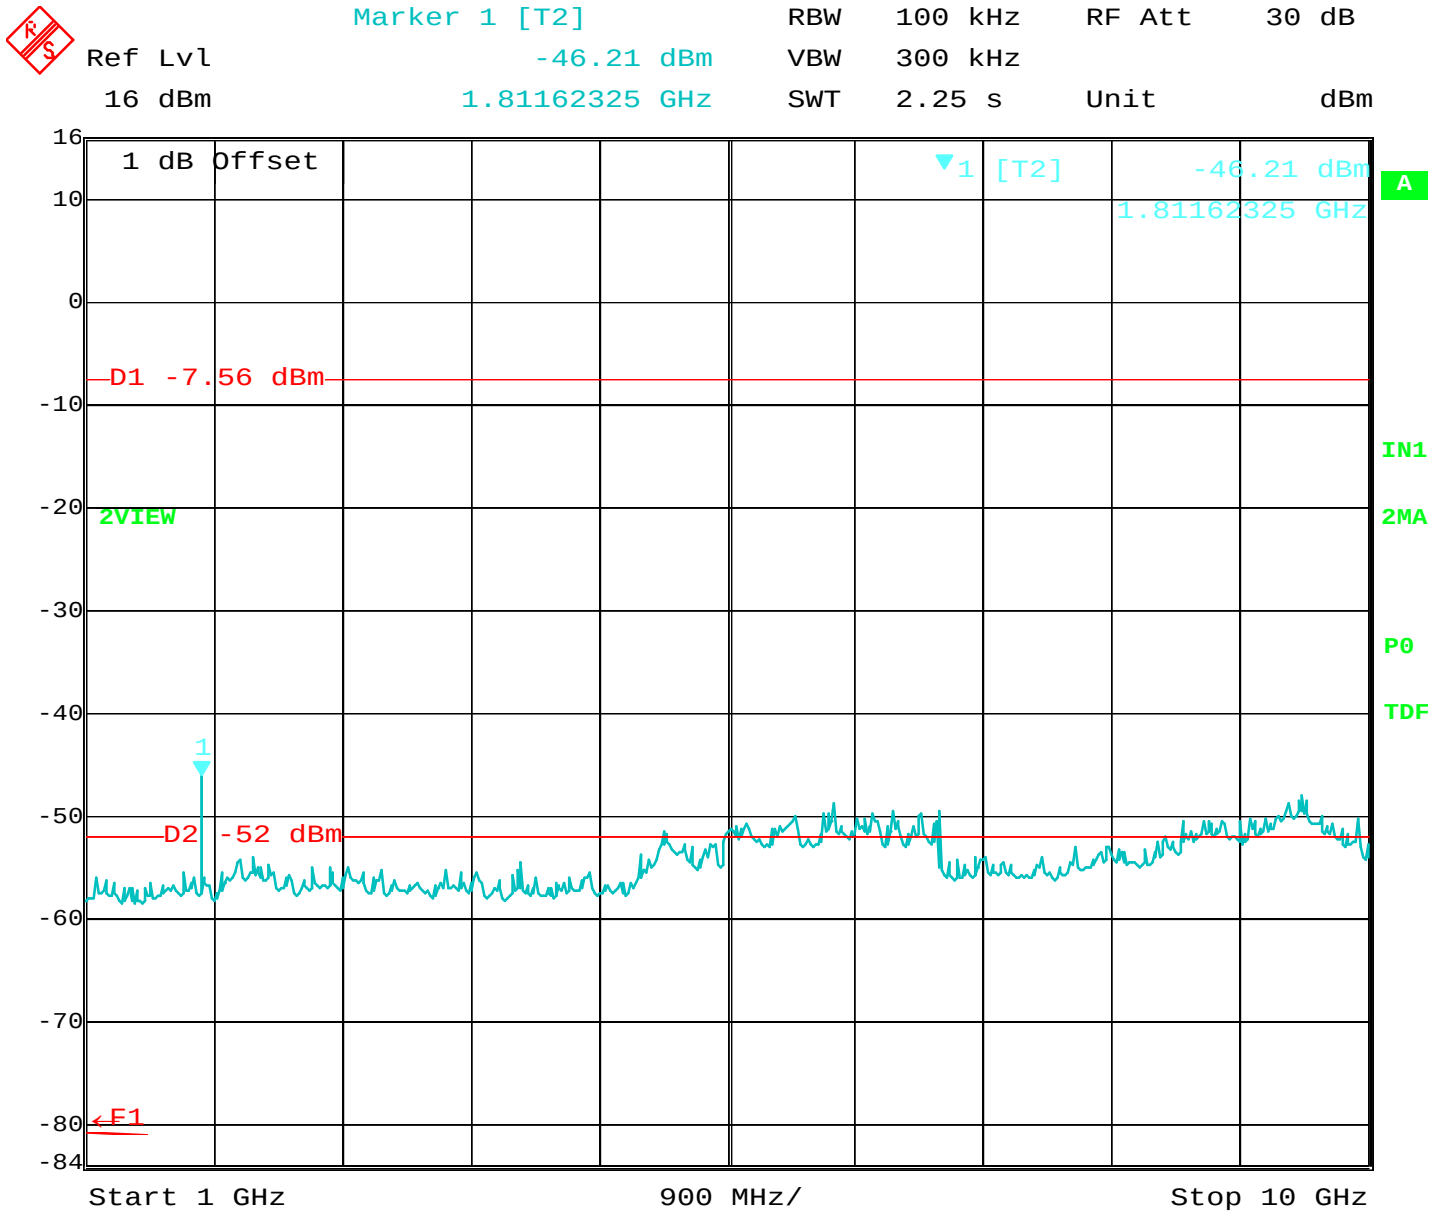


Date: 6.DEC.2012 16:06:50

RF Antenna Conducted Test – Middle Channel – 1 GHz to 10 GHz

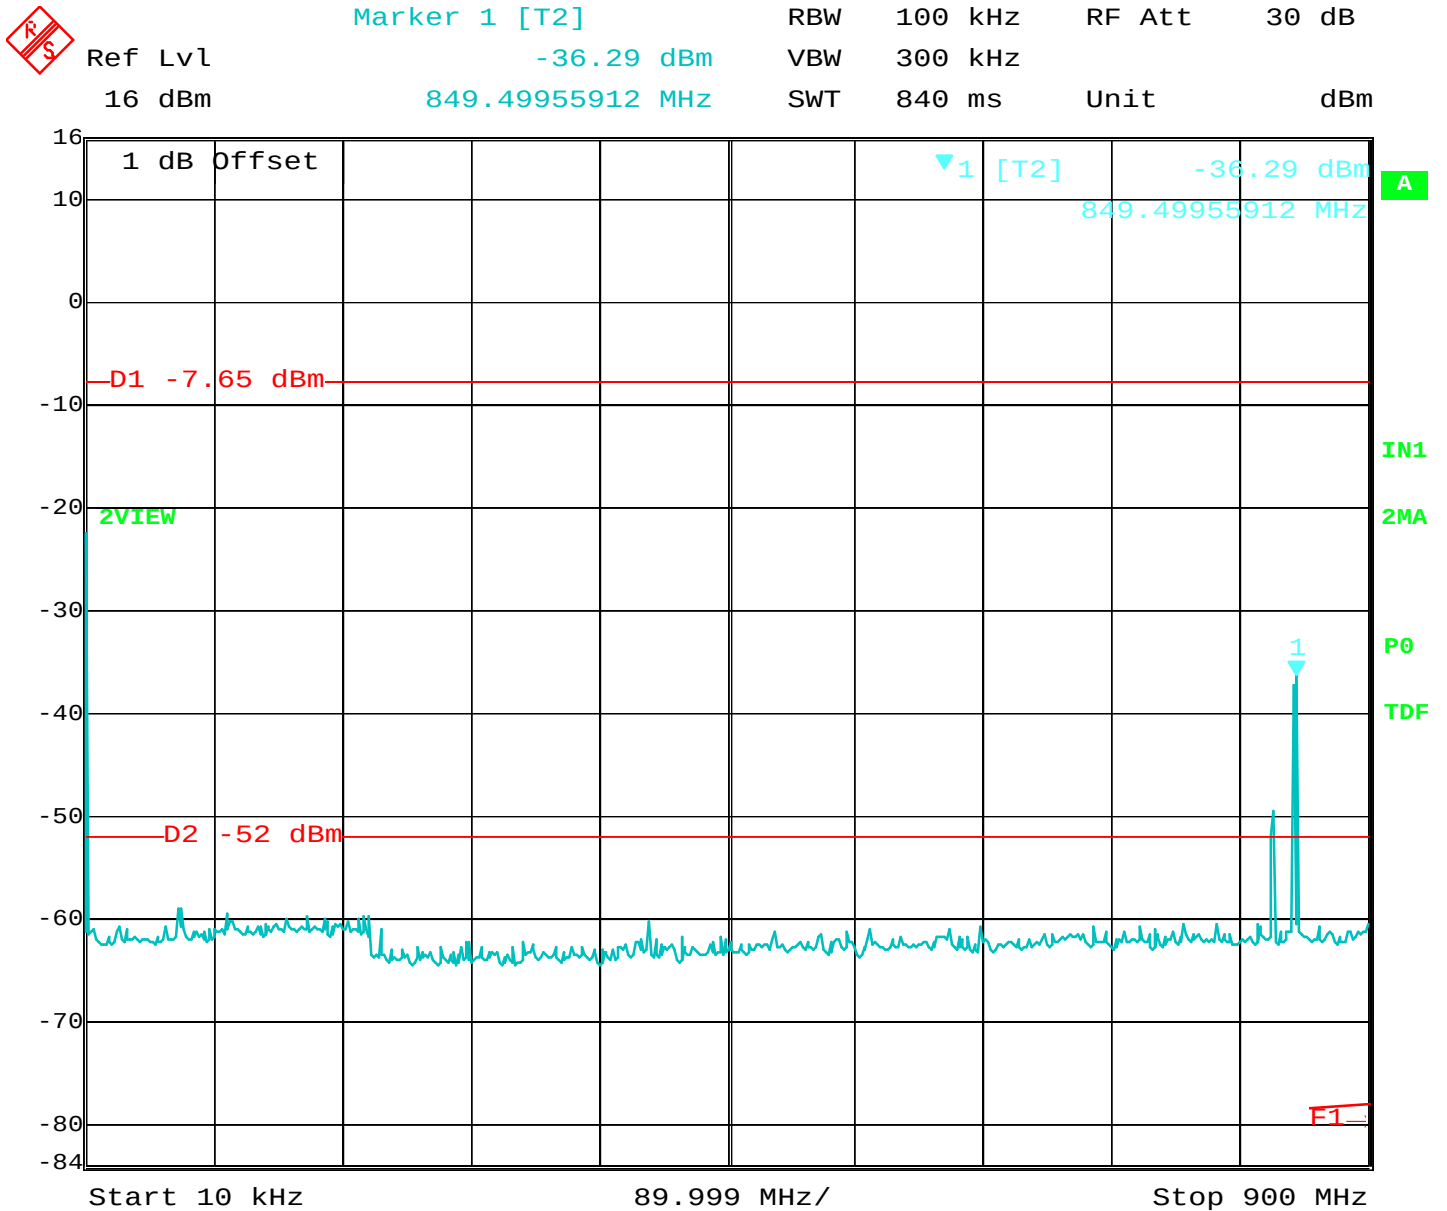

Date: 6.DEC.2012 16:19:00

RF Antenna Conducted Test – High Channel – 10 kHz to 900 MHz

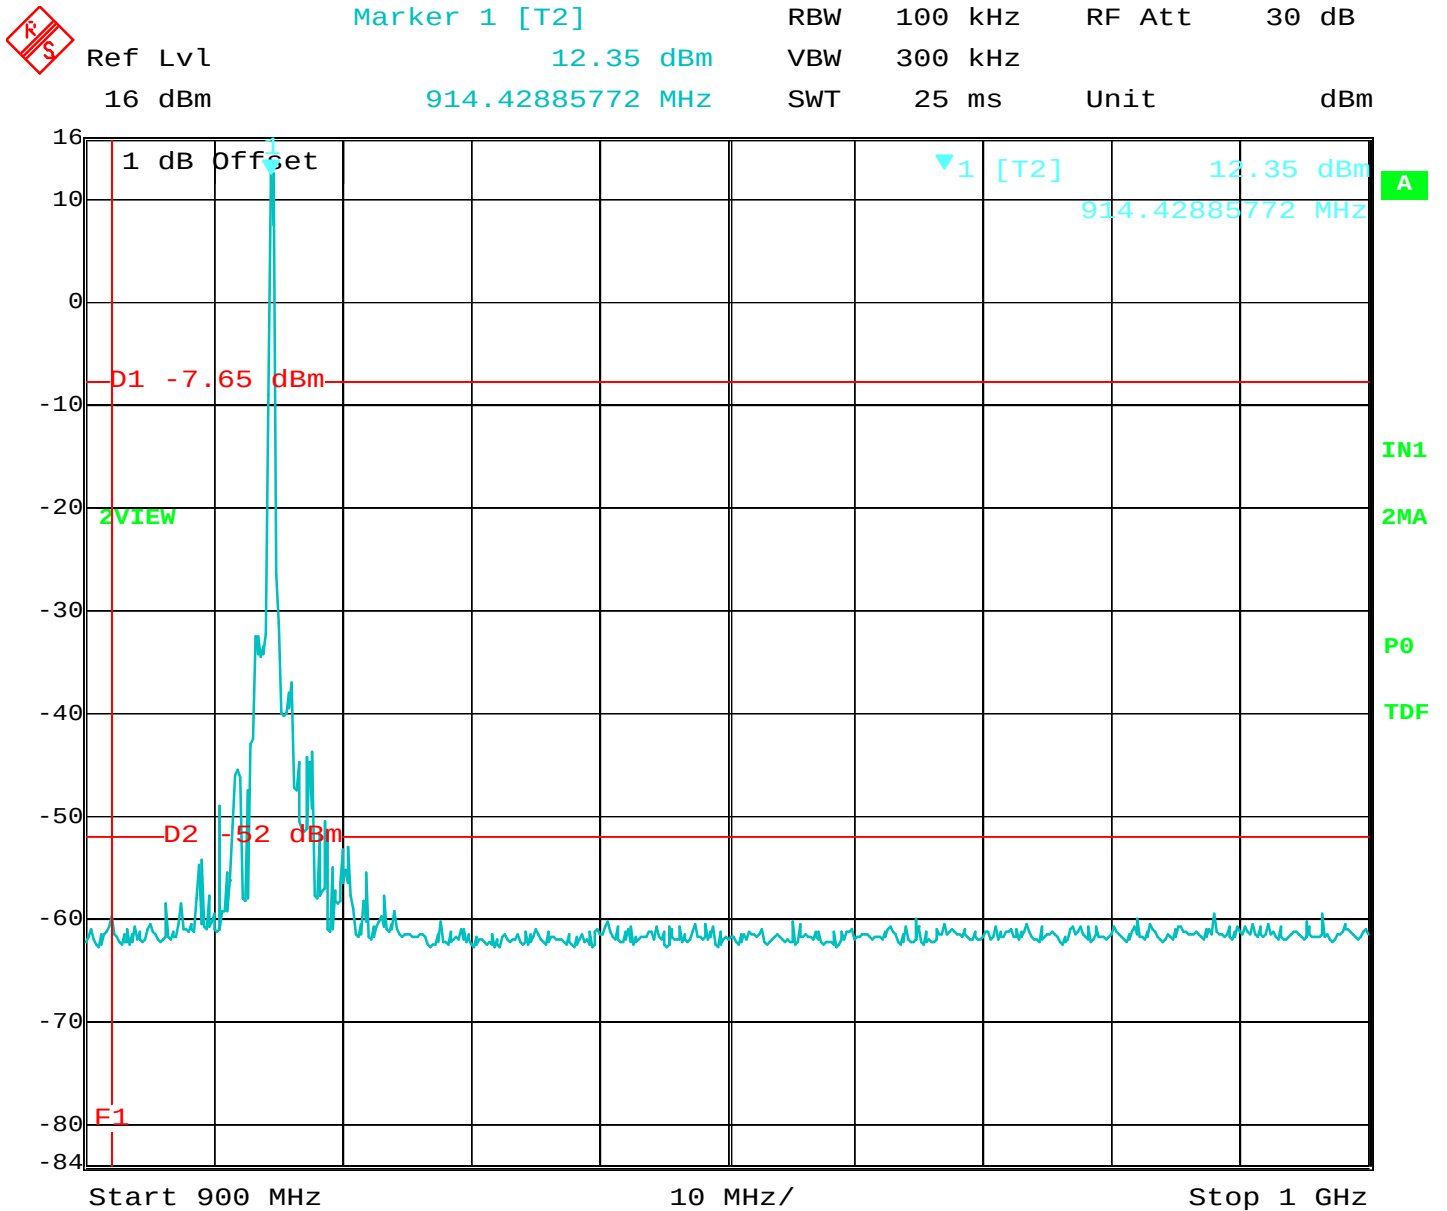

Date: 6.DEC.2012 16:09:26

RF Antenna Conducted Test – High Channel – 900 MHz to 1 GHz



Ref Lvl

16 dBm

Marker 1 [T2]

-47.50 dBm

1.81503006 GHz

RBW 100 kHz


VBW 300 kHz

SWT 2.1 s

RF Att 30 dB

Unit

dBm

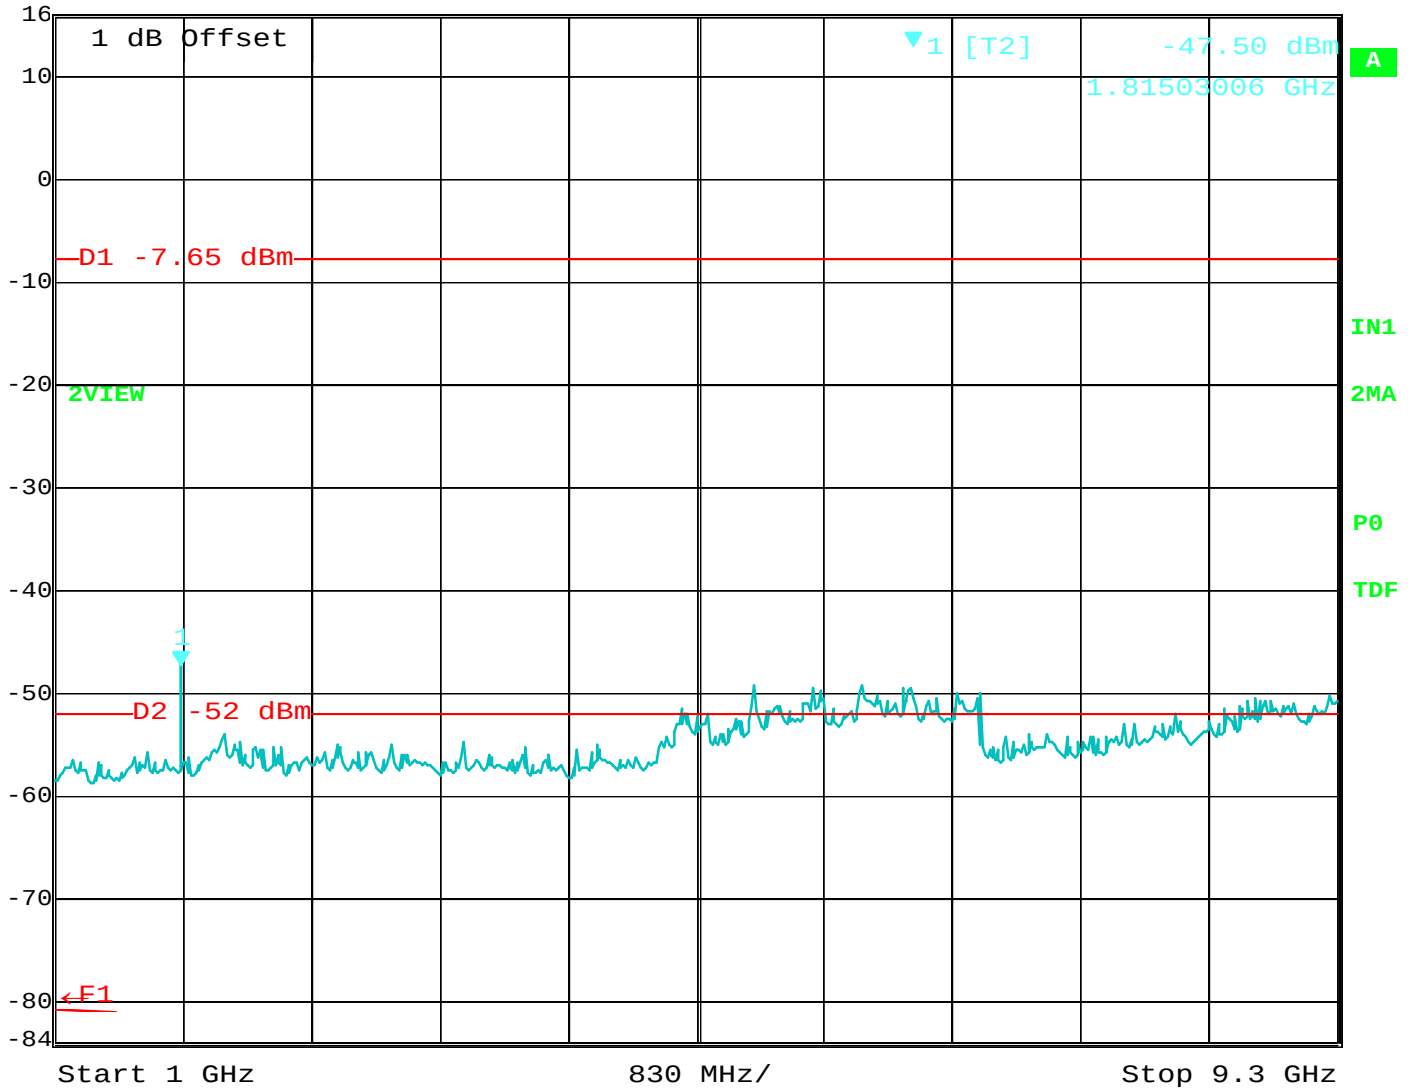


Date: 6.DEC.2012 16:12:10

RF Antenna Conducted Test – High Channel – 1 GHz to 9.3 GHz

CONDUCTED EMISSIONS

DATA SHEETS

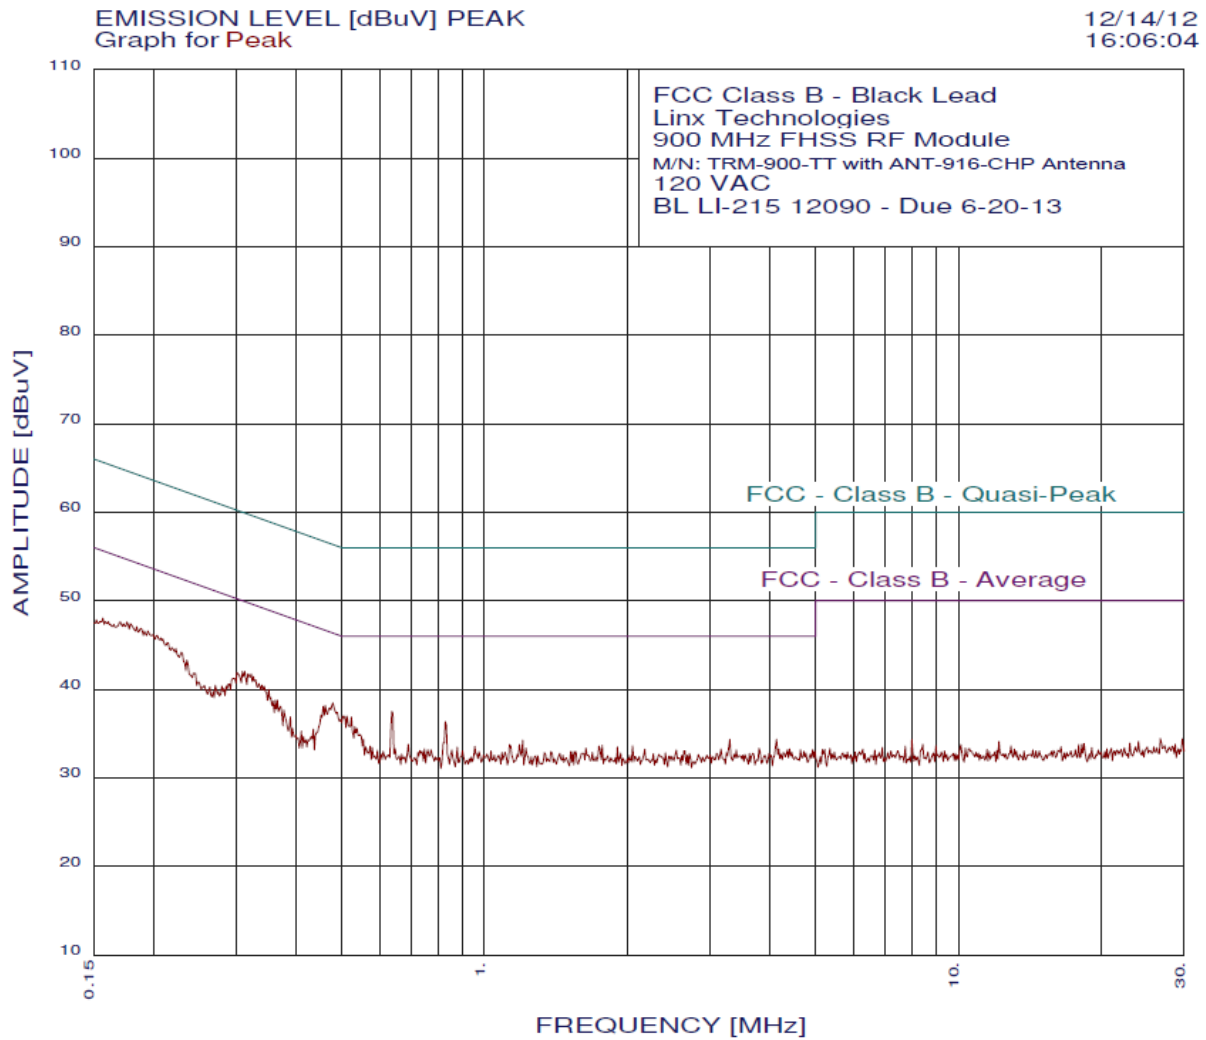


FCC Class B - Black Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-CHP Antenna
120 VAC
BL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.479	38.46	46.36	-7.90
2	0.312	42.02	49.92	-7.91
3	0.322	41.73	49.66	-7.93
4	0.300	41.90	50.23	-8.33
5	0.461	38.17	46.67	-8.50
6	0.637	37.48	46.00	-8.52
7	0.457	38.07	46.76	-8.69
8	0.235	43.30	52.25	-8.95
9	0.350	39.96	48.95	-8.99
10	0.513	36.96	46.00	-9.04
11	0.524	36.87	46.00	-9.13
12	0.826	36.35	46.00	-9.65
13	0.365	38.77	48.61	-9.84
14	0.532	35.77	46.00	-10.23
15	0.279	40.37	50.85	-10.48
16	0.270	40.45	51.11	-10.66
17	0.377	37.67	48.34	-10.67
18	0.389	36.87	48.08	-11.20
19	3.294	34.35	46.00	-11.65
20	4.137	34.34	46.00	-11.66
21	0.435	35.47	47.15	-11.68
22	1.204	34.26	46.00	-11.74
23	0.690	33.77	46.00	-12.23
24	1.184	33.76	46.00	-12.24
25	1.130	33.76	46.00	-12.24
26	1.772	33.67	46.00	-12.33
27	0.411	35.27	47.63	-12.36
28	2.055	33.60	46.00	-12.40
29	0.393	35.57	47.99	-12.42
30	0.573	33.58	46.00	-12.42

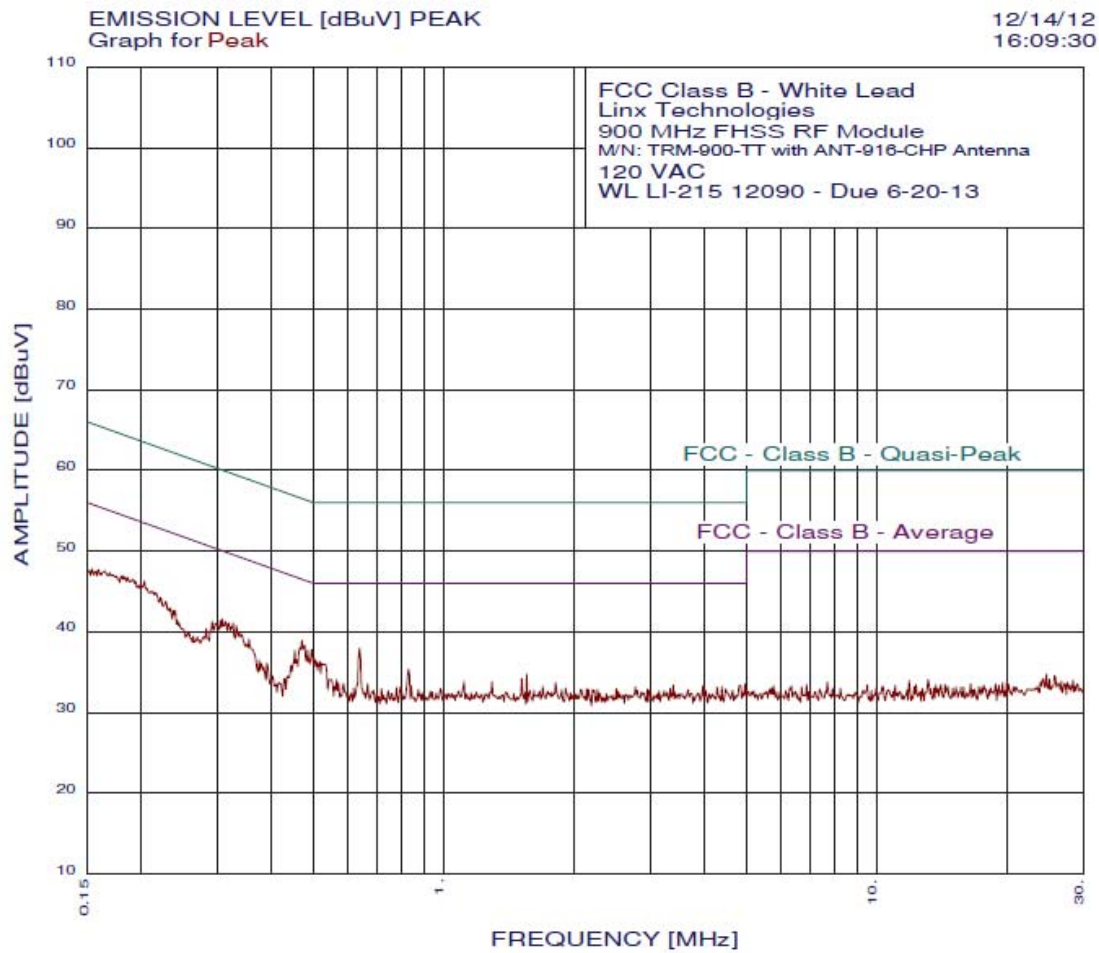

page 1/1


12/14/12 16:09:30

FCC Class B - White Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-CHP Antenna
120 VAC
WL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.469	38.92	46.53	-7.62
2	0.637	37.99	46.00	-8.01
3	0.494	37.82	46.09	-8.27
4	0.307	41.59	50.05	-8.47
5	0.325	41.09	49.57	-8.48
6	0.484	37.72	46.27	-8.56
7	0.331	40.79	49.44	-8.64
8	0.452	37.71	46.85	-9.13
9	0.291	41.28	50.49	-9.21
10	0.239	42.66	52.12	-9.46
11	0.516	36.32	46.00	-9.68
12	0.354	39.10	48.87	-9.77
13	0.521	36.12	46.00	-9.88
14	0.282	40.38	50.76	-10.38
15	0.826	35.35	46.00	-10.65
16	1.552	34.73	46.00	-11.27
17	1.512	34.23	46.00	-11.77
18	0.544	34.11	46.00	-11.89
19	0.564	34.11	46.00	-11.89
20	0.373	36.50	48.43	-11.92
21	0.389	36.11	48.08	-11.97
22	1.112	33.82	46.00	-12.18
23	1.290	33.82	46.00	-12.18
24	1.810	33.73	46.00	-12.27
25	0.586	33.60	46.00	-12.40
26	0.665	33.59	46.00	-12.41
27	4.954	33.56	46.00	-12.44
28	3.383	33.39	46.00	-12.61
29	0.839	33.35	46.00	-12.65
30	4.825	33.35	46.00	-12.65

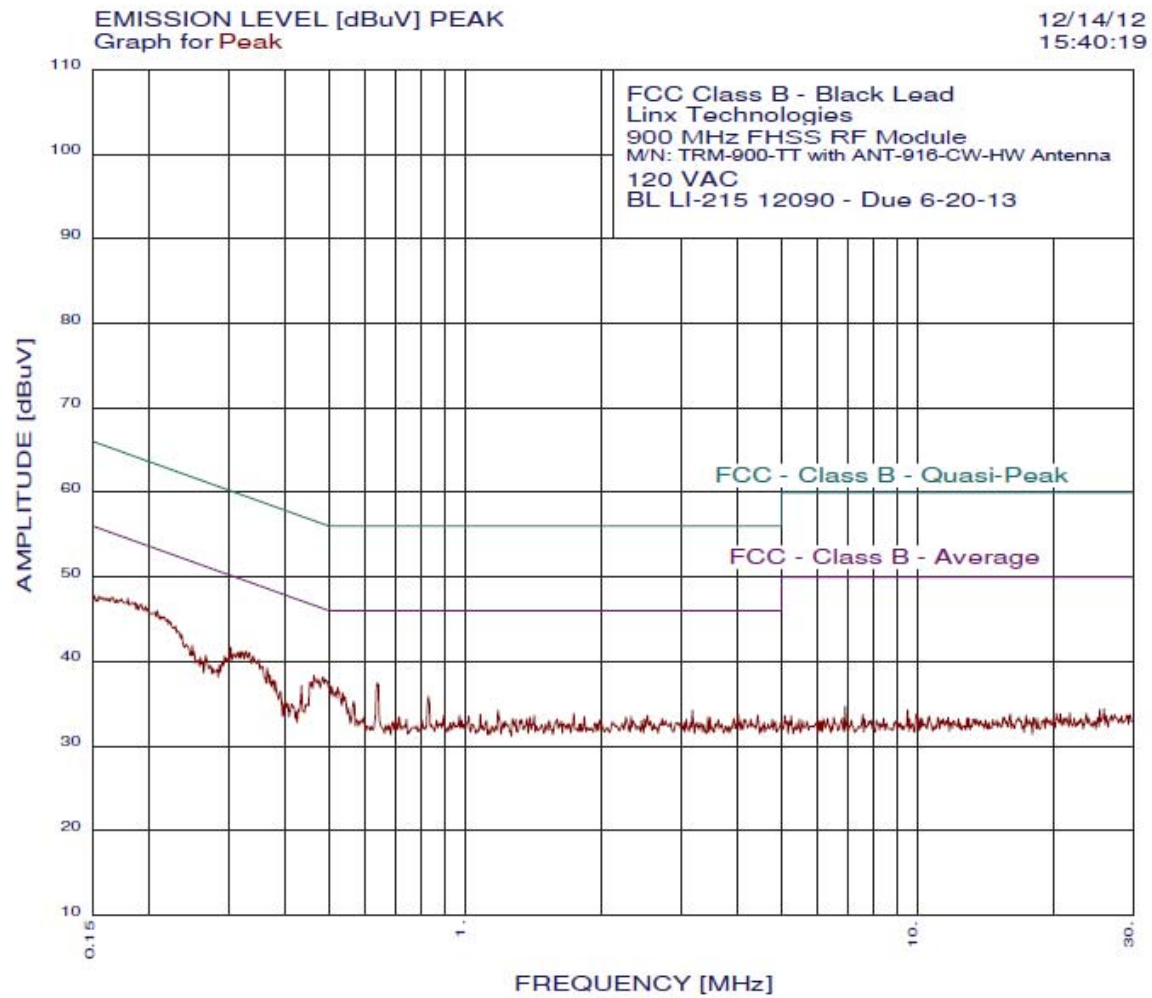


12/14/12 15:40:19

FCC Class B - Black Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-CW-HW Antenna
120 VAC
BL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.484	38.16	46.27	-8.11
2	0.327	41.23	49.53	-8.29
3	0.461	38.37	46.67	-8.30
4	0.302	41.71	50.19	-8.48
5	0.637	37.48	46.00	-8.52
6	0.505	37.06	46.00	-8.94
7	0.521	36.97	46.00	-9.03
8	0.363	39.26	48.65	-9.38
9	0.535	36.27	46.00	-9.73
10	0.248	41.92	51.82	-9.90
11	0.433	37.17	47.19	-10.02
12	0.826	35.85	46.00	-10.15
13	0.266	40.74	51.24	-10.50
14	0.379	37.67	48.29	-10.62
15	0.564	35.28	46.00	-10.72
16	0.259	40.53	51.47	-10.93
17	0.389	36.47	48.08	-11.60
18	1.178	34.26	46.00	-11.74
19	3.175	34.25	46.00	-11.75
20	1.735	33.87	46.00	-12.13
21	1.077	33.75	46.00	-12.25
22	4.008	33.74	46.00	-12.26
23	4.432	33.66	46.00	-12.34
24	0.895	33.65	46.00	-12.35
25	0.969	33.65	46.00	-12.35
26	1.419	33.65	46.00	-12.35
27	2.527	33.63	46.00	-12.37
28	1.016	33.55	46.00	-12.45
29	2.322	33.52	46.00	-12.48
30	1.830	33.48	46.00	-12.52

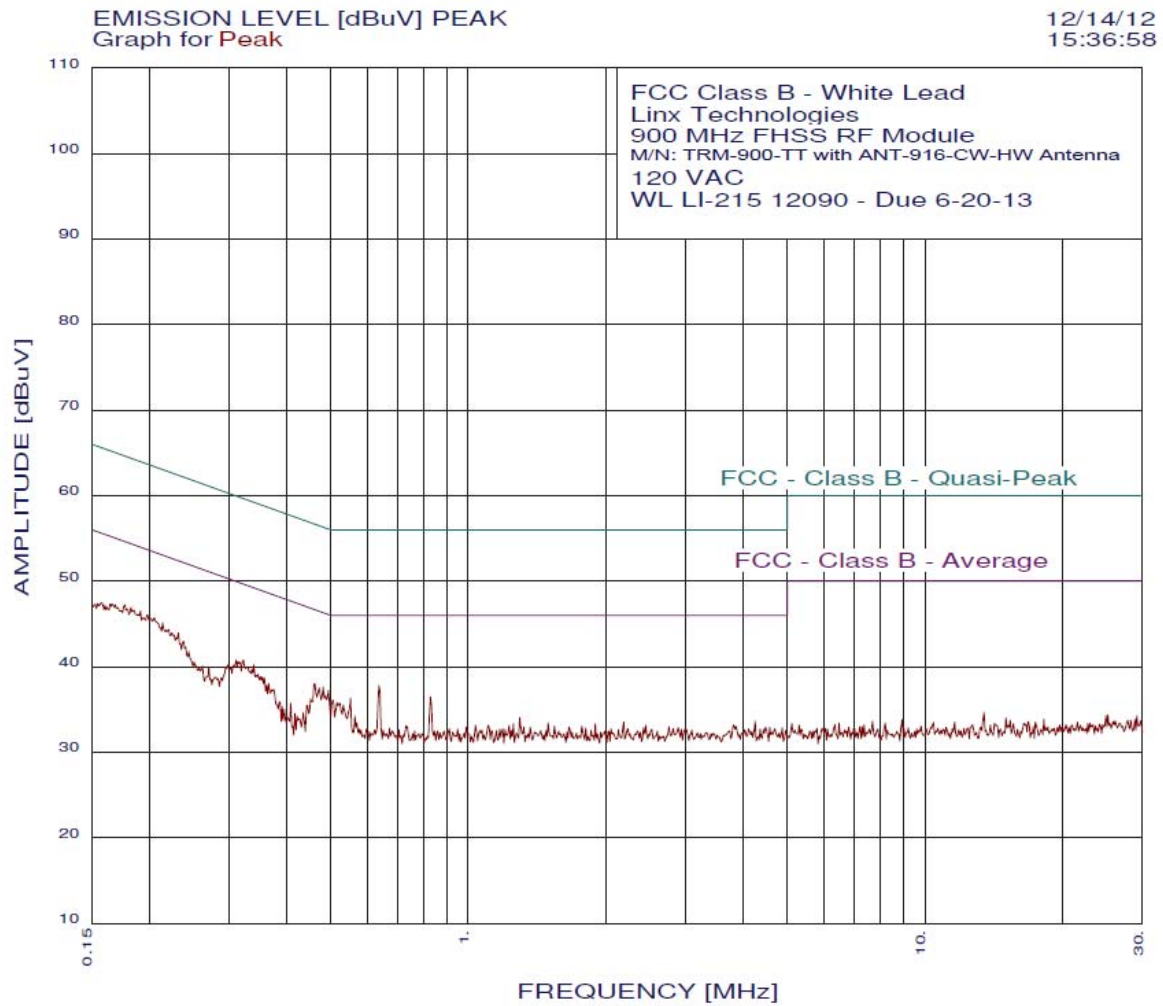

page 1/1


12/14/12 15:36:58

FCC Class B - White Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-CW-HW Antenna
120 VAC
WL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.214	45.14	53.05	-7.91
2	0.637	37.79	46.00	-8.21
3	0.461	38.01	46.67	-8.65
4	0.481	37.62	46.32	-8.70
5	0.322	40.79	49.66	-8.87
6	0.494	37.22	46.09	-8.87
7	0.471	37.52	46.49	-8.97
8	0.339	40.20	49.22	-9.02
9	0.310	40.79	49.97	-9.18
10	0.238	42.96	52.17	-9.20
11	0.826	36.45	46.00	-9.55
12	0.552	36.31	46.00	-9.69
13	0.505	36.12	46.00	-9.88
14	0.516	35.82	46.00	-10.18
15	0.532	35.51	46.00	-10.49
16	0.365	38.00	48.61	-10.60
17	0.270	39.98	51.11	-11.13
18	0.564	34.21	46.00	-11.79
19	0.409	35.71	47.68	-11.97
20	1.297	34.02	46.00	-11.98
21	4.249	33.62	46.00	-12.38
22	2.190	33.54	46.00	-12.46
23	0.435	34.61	47.15	-12.54
24	1.496	33.43	46.00	-12.57
25	1.899	33.33	46.00	-12.67
26	1.256	33.32	46.00	-12.68
27	0.391	35.31	48.03	-12.73
28	3.820	33.20	46.00	-12.80
29	2.449	33.14	46.00	-12.86
30	1.038	33.13	46.00	-12.87

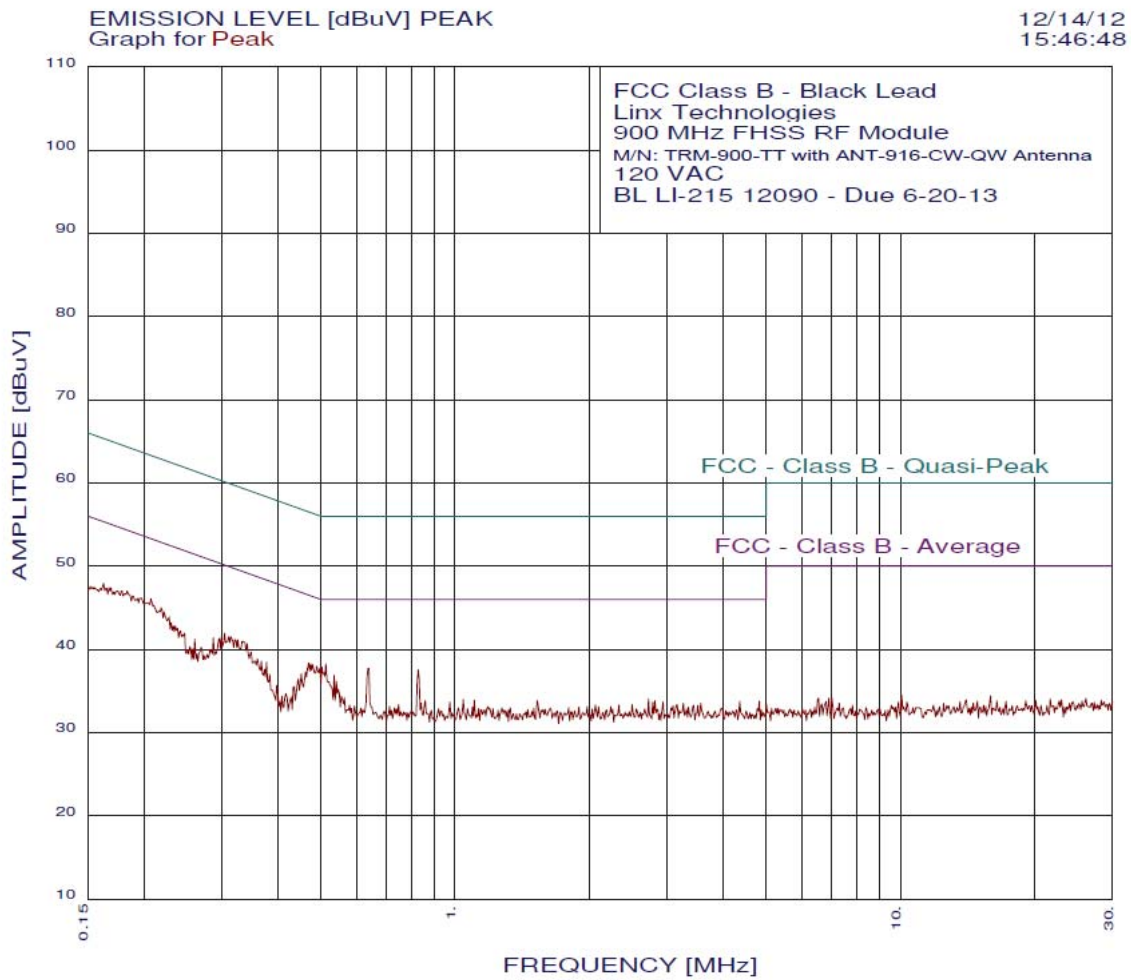


FCC Class B - Black Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-CW-QW Antenna
120 VAC
BL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.513	38.26	46.00	-7.74
2	0.502	37.86	46.00	-8.14
3	0.469	38.37	46.53	-8.17
4	0.304	41.91	50.14	-8.24
5	0.637	37.68	46.00	-8.32
6	0.826	37.55	46.00	-8.45
7	0.299	41.50	50.28	-8.78
8	0.296	41.30	50.36	-9.07
9	0.535	36.87	46.00	-9.13
10	0.286	41.38	50.63	-9.25
11	0.452	37.07	46.85	-9.78
12	0.541	36.17	46.00	-9.83
13	0.377	38.47	48.34	-9.87
14	0.367	38.57	48.56	-10.00
15	0.260	41.23	51.42	-10.19
16	0.445	36.47	46.98	-10.51
17	0.269	40.25	51.15	-10.91
18	0.258	40.03	51.51	-11.48
19	0.555	34.38	46.00	-11.62
20	0.433	35.47	47.19	-11.72
21	2.722	34.04	46.00	-11.96
22	1.043	33.95	46.00	-12.05
23	1.106	33.86	46.00	-12.14
24	0.858	33.85	46.00	-12.15
25	1.528	33.84	46.00	-12.16
26	2.811	33.84	46.00	-12.16
27	4.825	33.78	46.00	-12.22
28	0.398	35.68	47.90	-12.22
29	4.361	33.76	46.00	-12.24
30	0.974	33.65	46.00	-12.35

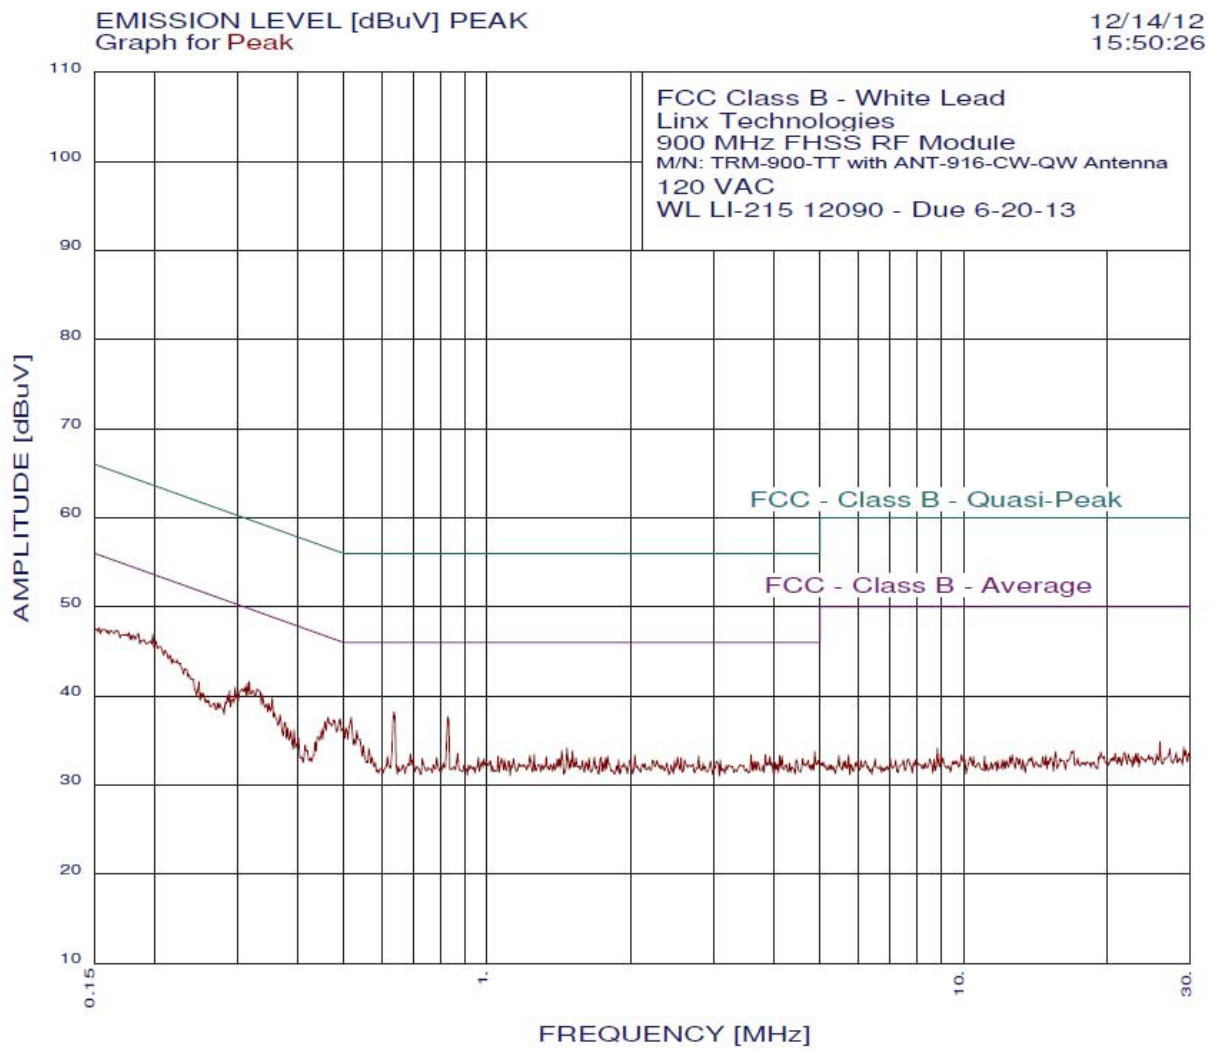


12/14/12 15:50:26

FCC Class B - White Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-CW-QW Antenna
120 VAC
WL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak


Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.199	46.92	53.67	-6.75
2	0.637	38.19	46.00	-7.81
3	0.317	41.59	49.79	-8.20
4	0.826	37.65	46.00	-8.35
5	0.518	37.62	46.00	-8.38
6	0.313	41.39	49.88	-8.49
7	0.492	37.42	46.14	-8.72
8	0.464	37.62	46.62	-9.01
9	0.354	39.80	48.87	-9.07
10	0.338	40.20	49.26	-9.07
11	0.296	40.98	50.36	-9.38
12	0.505	36.42	46.00	-9.58
13	0.532	36.11	46.00	-9.89
14	0.288	40.58	50.58	-10.00
15	0.248	41.57	51.82	-10.24
16	0.367	37.90	48.56	-10.66
17	0.449	36.21	46.89	-10.68
18	0.377	37.00	48.34	-11.33
19	0.550	34.41	46.00	-11.59
20	0.393	36.21	47.99	-11.78
21	0.381	36.40	48.25	-11.85
22	1.472	34.13	46.00	-11.87
23	0.564	34.11	46.00	-11.89
24	0.387	36.10	48.12	-12.01
25	1.512	33.83	46.00	-12.17
26	1.434	33.83	46.00	-12.17
27	4.877	33.75	46.00	-12.25
28	0.867	33.55	46.00	-12.45
29	0.402	35.31	47.81	-12.50
30	0.690	33.48	46.00	-12.52

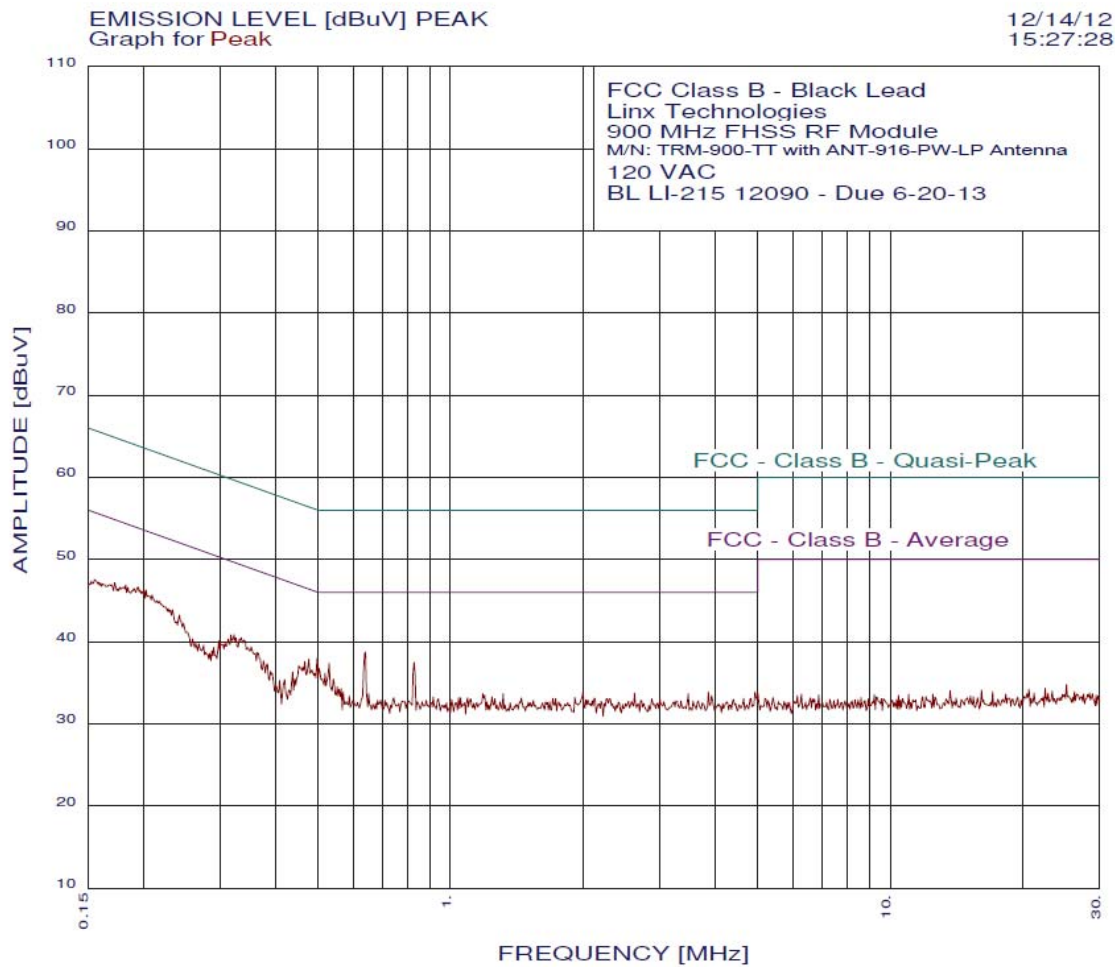

FCC Class B - Black Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-PW-LP Antenna
120 VAC
BL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.203	46.27	53.49	-7.21
2	0.641	38.68	46.00	-7.32
3	0.497	37.96	46.05	-8.09
4	0.476	37.86	46.40	-8.54
5	0.826	37.45	46.00	-8.55
6	0.530	37.37	46.00	-8.63
7	0.242	43.21	52.04	-8.83
8	0.322	40.83	49.66	-8.83
9	0.334	40.44	49.35	-8.91
10	0.466	37.57	46.58	-9.01
11	0.502	36.76	46.00	-9.24
12	0.518	36.17	46.00	-9.83
13	0.363	38.66	48.65	-9.98
14	0.297	40.10	50.32	-10.22
15	0.541	35.47	46.00	-10.53
16	0.375	37.67	48.38	-10.71
17	0.438	36.27	47.11	-10.84
18	0.383	37.27	48.21	-10.94
19	0.290	39.29	50.54	-11.25
20	0.552	34.48	46.00	-11.52
21	0.389	36.37	48.08	-11.70
22	0.564	34.28	46.00	-11.72
23	0.419	35.37	47.46	-12.09
24	2.002	33.90	46.00	-12.10
25	4.928	33.89	46.00	-12.11
26	0.570	33.88	46.00	-12.12
27	3.862	33.84	46.00	-12.16
28	2.624	33.73	46.00	-12.27
29	0.651	33.68	46.00	-12.32
30	1.184	33.66	46.00	-12.34

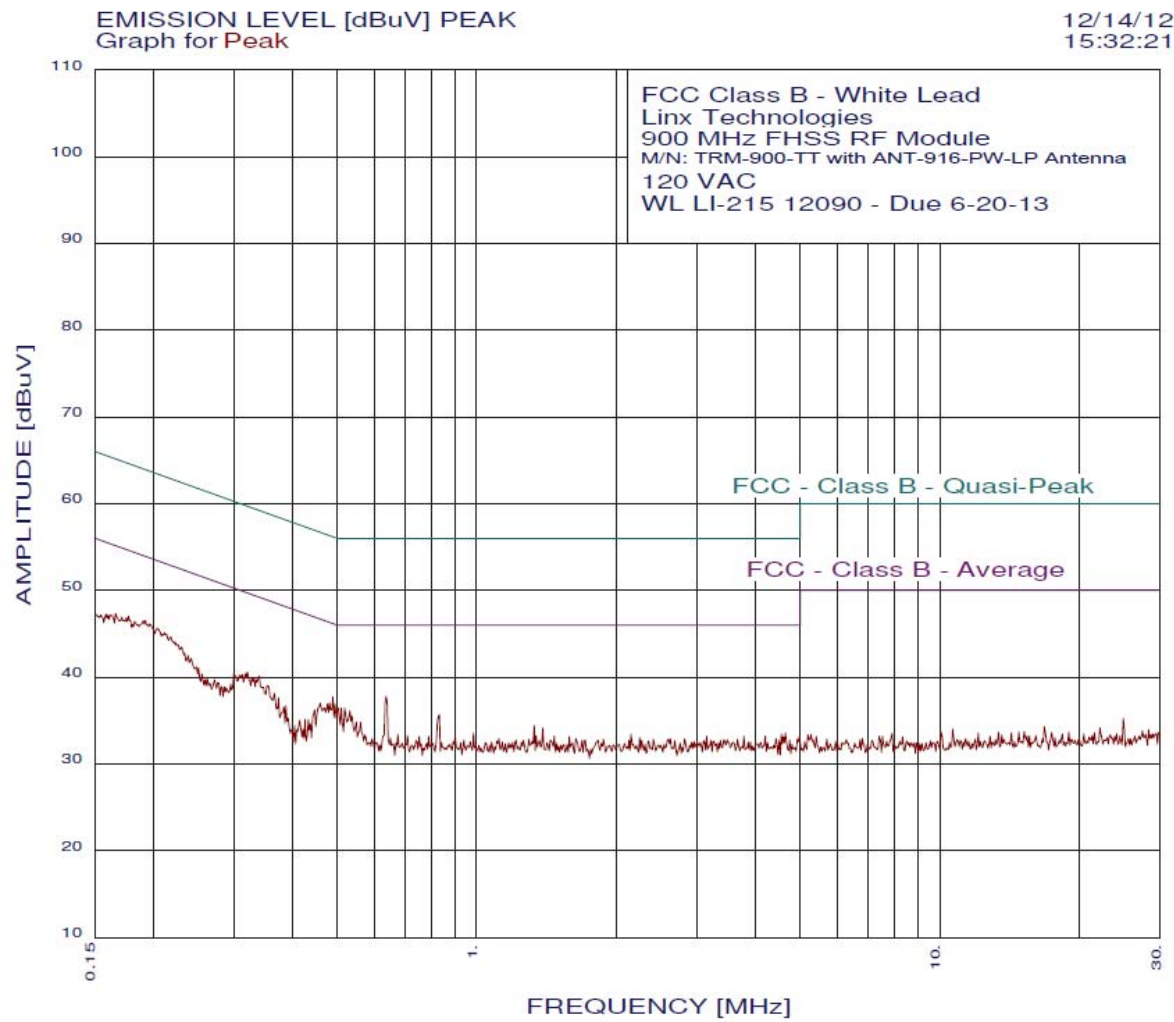

page 1/1


12/14/12 15:32:21

FCC Class B - White Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-PW-LP Antenna
120 VAC
WL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.166	47.33	55.16	-7.83
2	0.637	37.79	46.00	-8.21
3	0.489	37.72	46.18	-8.47
4	0.320	40.59	49.71	-9.12
5	0.339	40.10	49.22	-9.12
6	0.494	36.92	46.09	-9.17
7	0.327	39.99	49.53	-9.53
8	0.502	36.42	46.00	-9.58
9	0.510	36.42	46.00	-9.58
10	0.518	36.42	46.00	-9.58
11	0.459	37.01	46.71	-9.70
12	0.354	39.00	48.87	-9.87
13	0.532	36.11	46.00	-9.89
14	0.831	35.65	46.00	-10.35
15	0.447	36.21	46.93	-10.72
16	0.373	37.60	48.43	-10.82
17	0.550	34.81	46.00	-11.19
18	0.561	34.81	46.00	-11.19
19	0.272	39.68	51.07	-11.39
20	0.262	39.98	51.38	-11.40
21	0.387	36.70	48.12	-11.41
22	1.331	34.42	46.00	-11.58
23	0.383	36.60	48.21	-11.60
24	1.389	34.13	46.00	-11.87
25	0.282	38.88	50.76	-11.88
26	0.433	35.11	47.19	-12.08
27	0.426	35.11	47.33	-12.22
28	4.648	33.54	46.00	-12.46
29	0.984	33.53	46.00	-12.47
30	0.415	35.01	47.55	-12.54

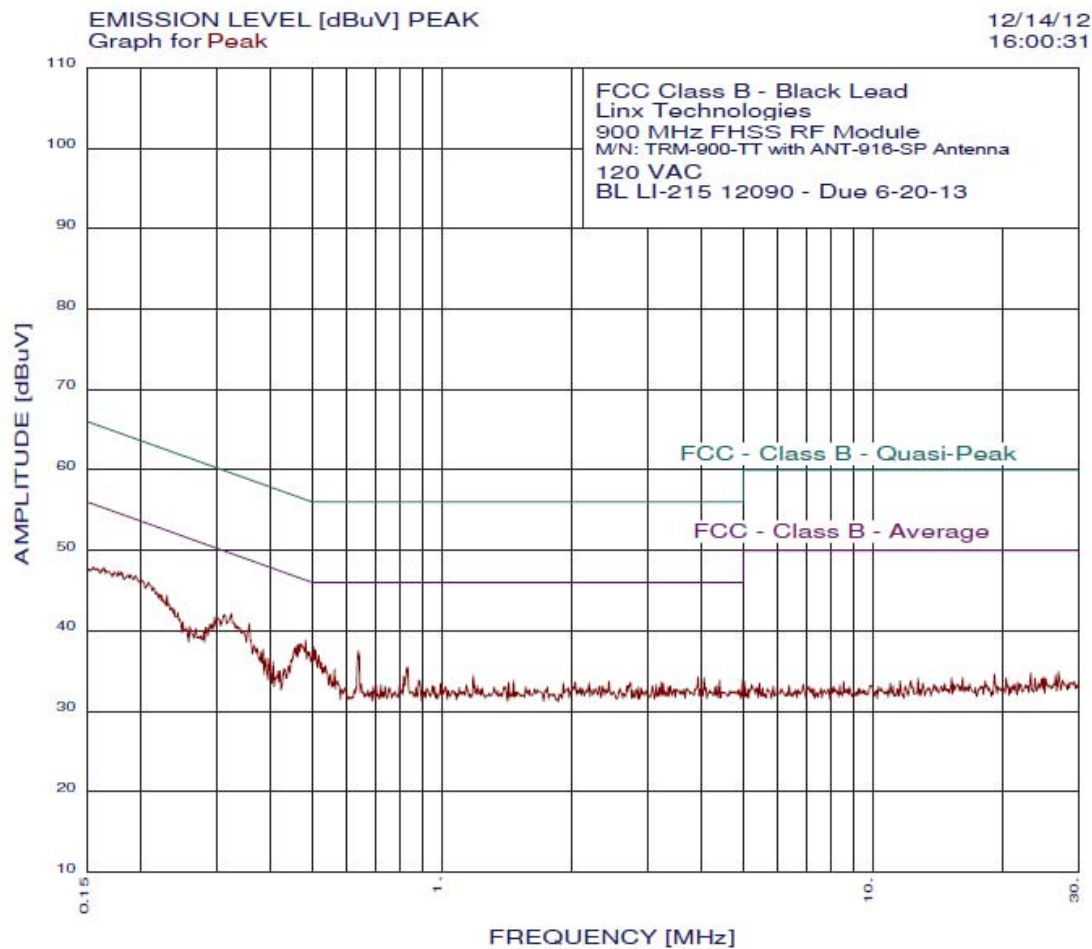


FCC Class B - Black Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-SP Antenna
120 VAC
BL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.481	38.86	46.32	-7.45
2	0.324	42.13	49.62	-7.49
3	0.312	42.02	49.92	-7.91
4	0.356	40.86	48.82	-7.96
5	0.502	37.96	46.00	-8.04
6	0.229	44.40	52.48	-8.08
7	0.464	38.37	46.62	-8.26
8	0.508	37.56	46.00	-8.44
9	0.637	37.48	46.00	-8.52
10	0.459	38.17	46.71	-8.54
11	0.296	41.70	50.36	-8.67
12	0.454	37.87	46.80	-8.93
13	0.516	36.96	46.00	-9.04
14	0.535	35.67	46.00	-10.33
15	0.365	38.17	48.61	-10.44
16	0.383	37.67	48.21	-10.54
17	0.826	35.45	46.00	-10.55
18	0.250	41.12	51.77	-10.65
19	0.561	35.18	46.00	-10.82
20	0.279	39.97	50.85	-10.88
21	0.379	37.37	48.29	-10.92
22	0.259	40.53	51.47	-10.93
23	0.267	40.25	51.20	-10.95
24	0.550	34.57	46.00	-11.43
25	0.396	36.48	47.95	-11.47
26	0.389	36.57	48.08	-11.50
27	1.178	34.46	46.00	-11.54
28	0.404	36.18	47.77	-11.59
29	0.814	34.35	46.00	-11.65
30	3.924	34.24	46.00	-11.76

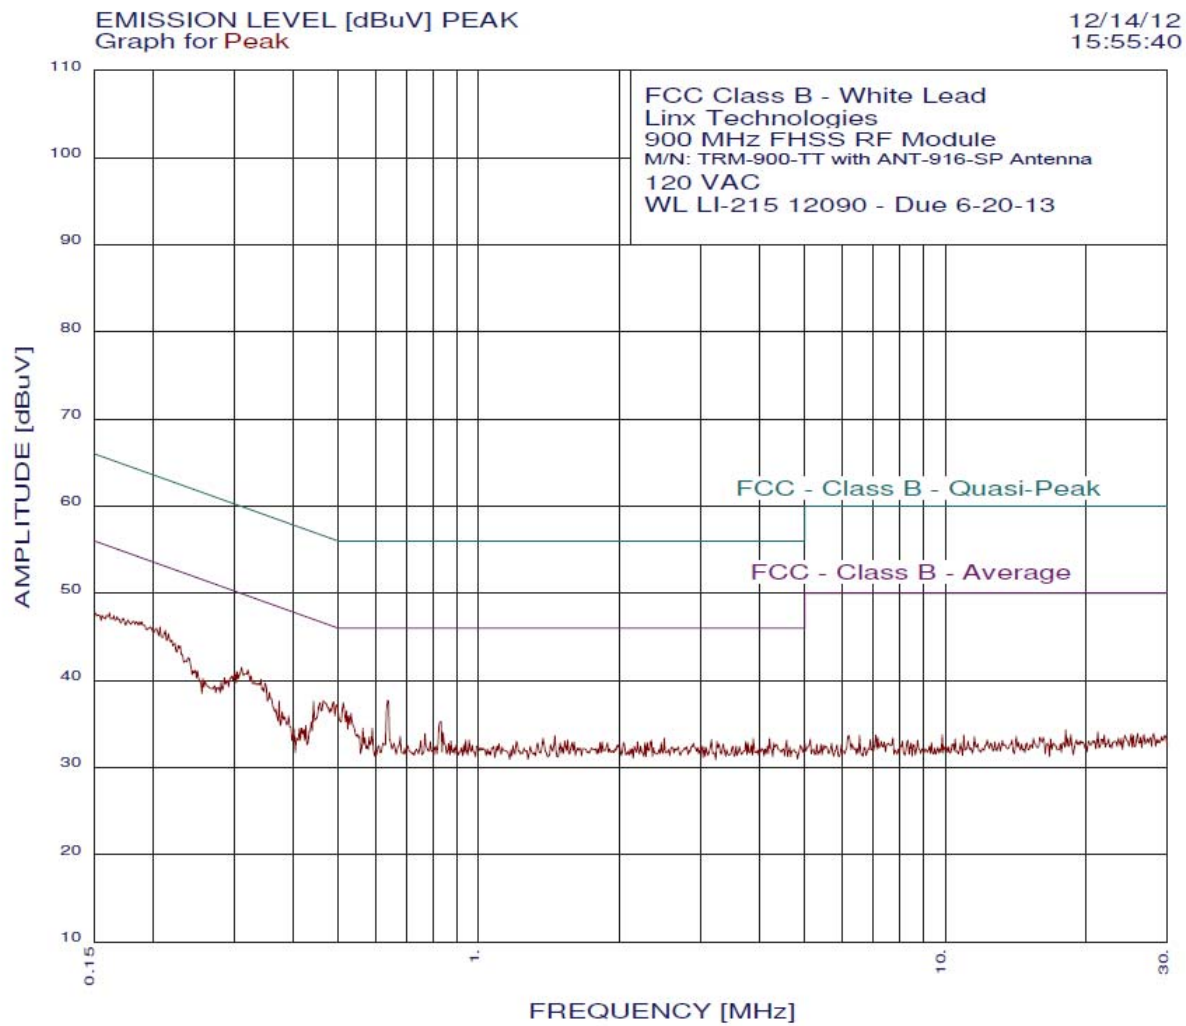


FCC Class B - White Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-SP Antenna
120 VAC
WL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.207	46.13	53.31	-7.18
2	0.637	37.69	46.00	-8.31
3	0.310	41.49	49.97	-8.48
4	0.513	37.42	46.00	-8.58
5	0.489	37.52	46.18	-8.67
6	0.497	37.22	46.05	-8.83
7	0.466	37.62	46.58	-8.96
8	0.300	40.98	50.23	-9.25
9	0.348	39.70	49.00	-9.30
10	0.442	37.61	47.02	-9.41
11	0.521	36.52	46.00	-9.48
12	0.532	36.21	46.00	-9.79
13	0.527	35.91	46.00	-10.09
14	0.356	38.60	48.82	-10.22
15	0.826	35.25	46.00	-10.75
16	0.373	37.60	48.43	-10.82
17	0.256	40.18	51.55	-11.37
18	0.564	34.51	46.00	-11.49
19	0.592	34.50	46.00	-11.50
20	0.379	36.40	48.29	-11.89
21	0.839	33.95	46.00	-12.05
22	0.391	35.91	48.03	-12.13
23	0.767	33.87	46.00	-12.13
24	1.456	33.63	46.00	-12.37
25	0.679	33.58	46.00	-12.42
26	0.426	34.81	47.33	-12.52
27	2.501	33.35	46.00	-12.65
28	1.374	33.33	46.00	-12.67
29	4.204	33.32	46.00	-12.68
30	3.882	33.30	46.00	-12.70

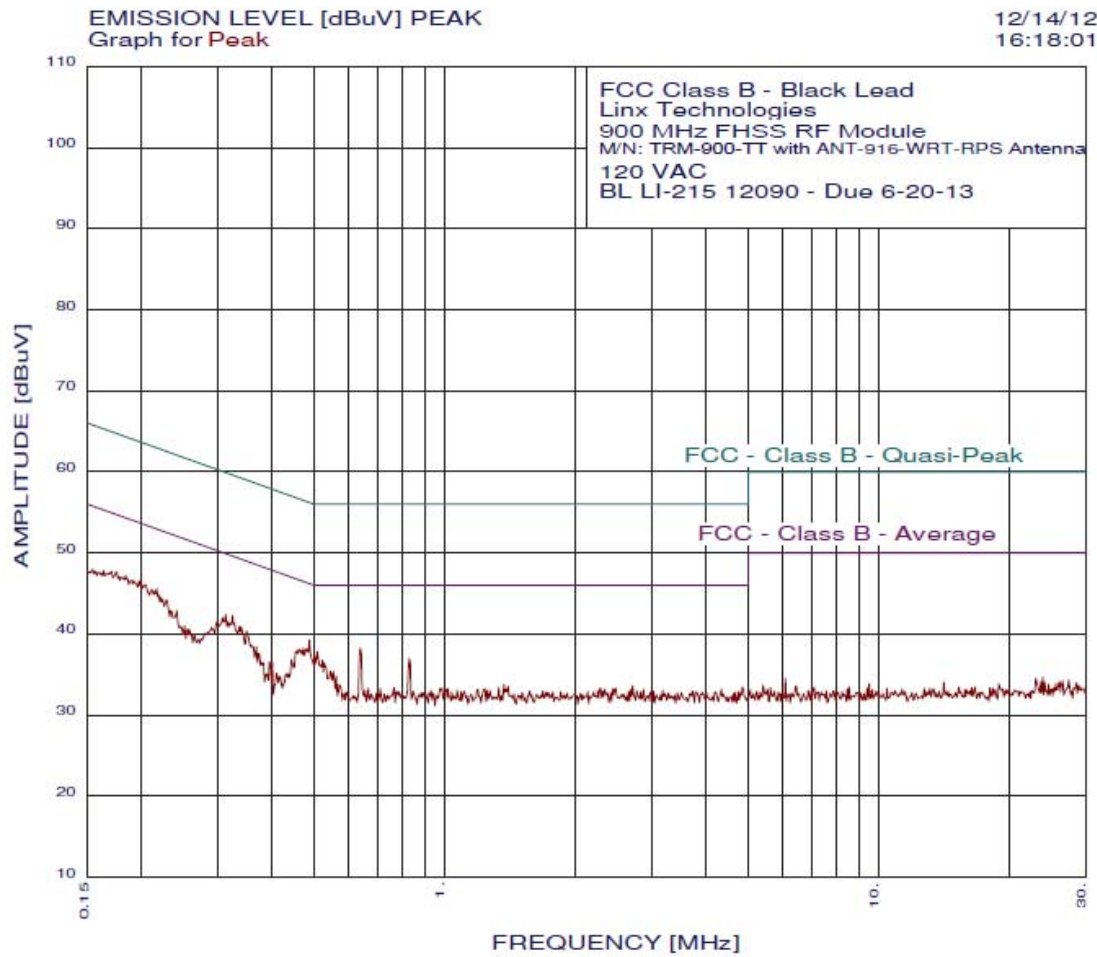

page 1/1


12/14/12 16:18:01

FCC Class B - Black Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-WRT-RPS Antenna
120 VAC
BL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.486	39.26	46.23	-6.97
2	0.324	42.23	49.62	-7.39
3	0.312	42.42	49.92	-7.51
4	0.637	38.28	46.00	-7.72
5	0.508	37.86	46.00	-8.14
6	0.336	40.94	49.31	-8.36
7	0.500	37.46	46.01	-8.55
8	0.348	40.36	49.00	-8.64
9	0.826	36.95	46.00	-9.05
10	0.527	36.47	46.00	-9.53
11	0.367	38.47	48.56	-10.10
12	0.442	36.87	47.02	-10.15
13	0.552	35.38	46.00	-10.62
14	0.251	41.02	51.73	-10.71
15	0.371	37.57	48.47	-10.91
16	0.255	40.63	51.60	-10.97
17	0.561	34.78	46.00	-11.22
18	0.265	39.94	51.29	-11.35
19	0.400	36.48	47.86	-11.38
20	0.393	36.57	47.99	-11.42
21	0.570	33.78	46.00	-12.22
22	1.367	33.75	46.00	-12.25
23	2.707	33.64	46.00	-12.36
24	0.409	35.18	47.68	-12.50
25	4.851	33.48	46.00	-12.52
26	1.331	33.45	46.00	-12.55
27	0.763	33.36	46.00	-12.64
28	0.984	33.35	46.00	-12.65
29	2.475	33.33	46.00	-12.67
30	2.286	33.32	46.00	-12.68

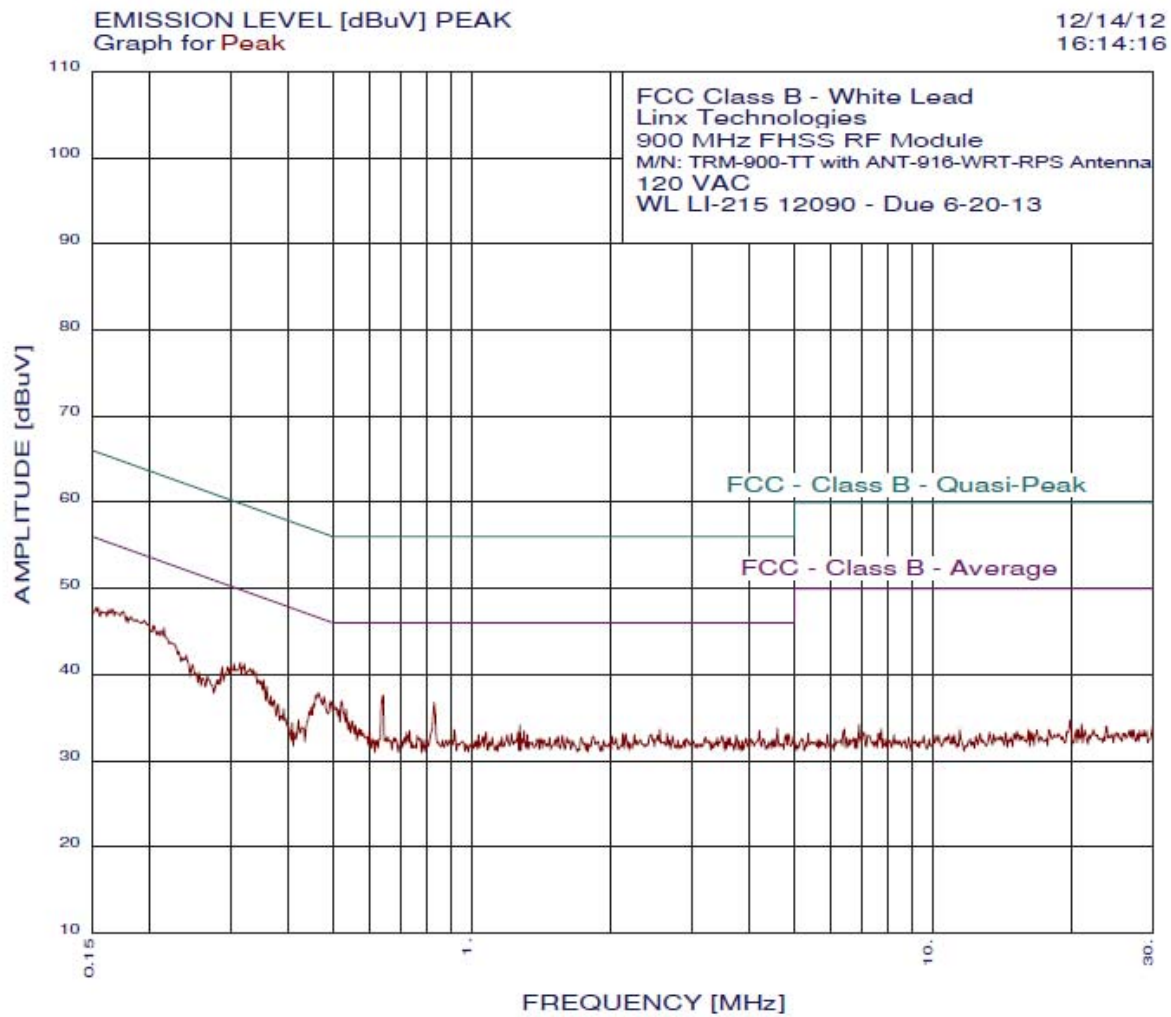

page 1/1

12/14/12 16:14:16

FCC Class B - White Lead
Linx Technologies
900 MHz FHSS RF Module
M/N: TRM-900-TT with ANT-916-WRT-RPS Antenna
120 VAC
WL LI-215 12090 - Due 6-20-13
Test Engineer : Alex Benitez

30 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.214	45.44	53.05	-7.61
2	0.641	37.59	46.00	-8.41
3	0.320	41.29	49.71	-8.42
4	0.313	41.39	49.88	-8.49
5	0.464	37.92	46.62	-8.71
6	0.521	36.92	46.00	-9.08
7	0.492	36.92	46.14	-9.22
8	0.826	36.75	46.00	-9.25
9	0.352	39.40	48.91	-9.51
10	0.286	40.88	50.63	-9.74
11	0.532	36.01	46.00	-9.99
12	0.358	38.60	48.78	-10.18
13	0.247	41.17	51.86	-10.69
14	0.365	37.50	48.61	-11.10
15	0.255	40.28	51.60	-11.32
16	0.266	39.88	51.24	-11.36
17	0.550	34.61	46.00	-11.39
18	0.379	36.60	48.29	-11.69
19	1.269	34.12	46.00	-11.88
20	0.389	36.01	48.08	-12.07
21	4.600	33.74	46.00	-12.26
22	0.567	33.71	46.00	-12.29
23	2.554	33.65	46.00	-12.35
24	0.914	33.64	46.00	-12.36
25	0.598	33.60	46.00	-12.40
26	1.297	33.52	46.00	-12.48
27	4.204	33.52	46.00	-12.48
28	0.731	33.47	46.00	-12.53
29	1.072	33.33	46.00	-12.67
30	1.256	33.32	46.00	-12.68
