

MEASUREMENT/TECHNICAL REPORT

Micro Enhanced Technology, Inc. Model 990002

FCC ID: OJS990002

APPLICATION FOR CERTIFICATION

**RF Emission Measurements Performed For Determination of
Compliance with the US Code of Federal Regulations**

Title 47, Chapter I, FCC Part 15 Subpart C

As Required for Certification for Intentional Radiators

Radiometrics Midwest Corporation Test Document RP-3997A

Issue Date: May 7, 1999

This report concerns: Original grant

Equipment type: Periodic Transmitter

Transition Rules per 15.37 are not requested.


Tests Performed For

Micro Enhanced Technology, Inc.
100 W. Plainfield Rd., Suite 202
Countryside, IL 60525

Test Facility


Radiometrics Midwest Corporation
12 East Devonwood
Romeoville, IL 60446
Phone: (815) 293-0772
FAX: (815) 293-0820
radiomet@ix.netcom.com

Test Report Written By



Joseph Strzelecki
Senior EMC Engineer
NARTE EMC-000877-NE

Test Report Approved By



Chris W. Carlson
Director of Engineering
NARTE EMC-000921-NE

<i>Tests Performed For</i> Micro Enhanced Technology, Inc	<i>FCC ID</i> OJS990002	<i>Radiometrics Test Document</i> RP-3997A	<i>Page</i> 2 of 10
---	-----------------------------------	--	-------------------------------

Table of Contents

1.0 General Information	3
1.1 Product Description	3
1.2 Related Submittals	3
1.3 Tested System Details.....	3
1.4 Test Methodology	3
1.5 Test Facility.....	3
1.6 Test Equipment	4
2.0 System Test Configuration.....	4
2.1 Test System and Justification.....	4
2.2 EUT Test Configuration	4
2.3 Special Accessories.....	4
2.4 Equipment Modifications.....	4
Figure 2.1 Configuration of Tested System	5
3.0 Occupied Bandwidth Data	6
Figure 3.1 Occupied Bandwidth Plot	7
4.0 Radiated Emissions Data.....	8
4.1 Field Strength Calculation.....	9
4.2 Peak to Average Calculations.....	9
Figure 4.1 Duty Cycle Plot	10

Notice: This report must not be reproduced (except in full) without the written approval of
Radiometrics Midwest Corporation.

<i>Tests Performed For</i> Micro Enhanced Technology, Inc	<i>FCC ID</i> OJS990002	<i>Radiometrics Test Document</i> RP-3997A	<i>Page</i> 3 of 10
---	-----------------------------------	--	-------------------------------

1.0 General Information

1.1 Product Description

The Model 99002 (referred to as the EUT in this report) is a 418 MHz Transmitter. The EUT is manufactured by Micro Enhanced Technology, Inc.

The EUT consists of four momentary push button switches, an RF oscillator (418 MHz SAW based), a single 3V lithium coin cell battery, and a custom IC. In normal use nothing occurs until one of the four buttons is pressed. The RF oscillator is a simple ON-OFF Keyed stage. Once the transmission is complete the custom IC goes into a standby mode and remains inactive until the next button is pressed.

1.2 Related Submittals

The associated receiver is currently being submitted pursuant to the Certification equipment authorization as FCC ID: OJS990001.

1.3 Tested System Details

The identification for the EUT is as follows.

Model Number Serial Number	FCC ID	Manufacturer & Description	Cable Descriptions
M/N: 990002 (EUT)	OJS990002	Micro Enhanced Technology Inc. 418 MHz Transmitter	No cables can be connected to the EUT

1.4 Test Methodology

The test procedures used are in accordance with the ANSI document C63.4-1992, (July 17, 1992) "Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The specific procedures are described herein. Radiated testing was performed at an antenna to EUT distance of 3 meters. The antenna was raised and lowered from 1 to 4 meters.

1.5 Test Facility

The open area test site used to collect the radiated data is located on 8625 Helmar Road in Newark, Illinois. The open field test site has a metal ground screen. Details of the site characteristics are on file with the FCC. Conducted emission measurements and preliminary radiated emission scans were performed in shielded enclosure "B" at Radiometrics' Romeoville, Illinois EMI test lab. These sites have been fully described in a report and accepted by the FCC in a letter dated October 1, 1996 (31040/SIT 1300F2).

Tests Performed For Micro Enhanced Technology, Inc	FCC ID OJS990002	Radiometrics Test Document RP-3997A	Page 4 of 10
--	----------------------------	---	------------------------

1.6 Test Equipment

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. Below 1 GHz, when a radiated emission is detected approaching the specification limit, the measurement of the emission is repeated using a tuned dipole antenna with a Roberts Balun.

The radiated emission measurements were performed with a spectrum analyzer. The bandwidths of the spectrum analyzers are adjusted to the correct bandwidths as specified by the FCC Rules. The bandwidth used from 450 kHz to 30 MHz is 10 kHz and the bandwidth from 30 MHz to 1000 MHz is 100 or 120 kHz. Above 1 GHz a 1 MHz bandwidth is used. In order to increase the sensitivity of the spectrum analyzer, a preamplifier was used. The preamplifiers used had sufficient dynamic range that ensured that an overload condition was not present during the tests.

2.0 System Test Configuration

2.1 Test System and Justification

The system was configured for testing in a typical fashion (as a customer would normally use it).

2.2 EUT Test Configuration

The EUT was tested as a stand-alone device. The button was taped down for continuous operation for testing

2.3 Special Accessories

No special accessories were used during the tests in order to achieve compliance.


2.4 Equipment Modifications

The following modifications were made to the EUT by Radiometrics Midwest Corp. prior to the testing in order to achieve compliance with limits.

- 1) Resistor R3 was changed to 100 Ohms.
- 2) Capacitor C1 was changed to 6 pF.
- 3) Capacitor C2 was changed to 15 pF.

No PCB Layout changes were needed for the above modifications. Production units will have the above modifications made to them.

Authorized Signature




Date 5/7/1999

Joseph Strzelecki


Authorized Agent for Micro Enhanced Technology

Tests Performed For Micro Enhanced Technology, Inc	FCC ID OJS990002	Radiometrics Test Document RP-3997A	Page 5 of 10
--	----------------------------	---	------------------------

Figure 2.1 Configuration of Tested System

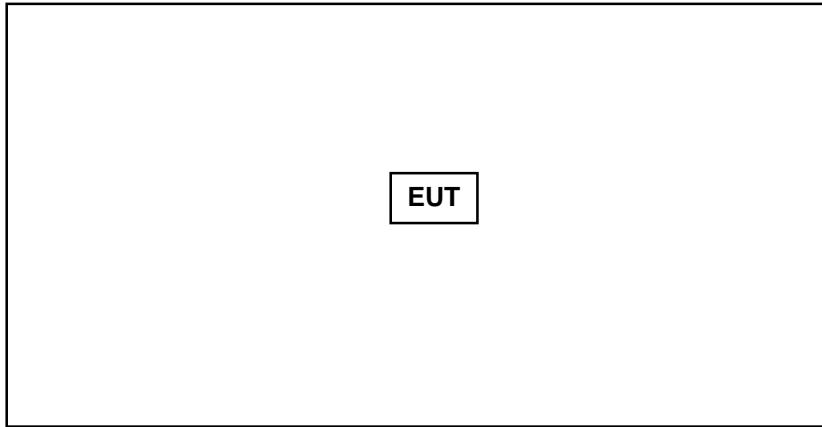

Rotating Platform:
1x1.5m surface above
GND plane

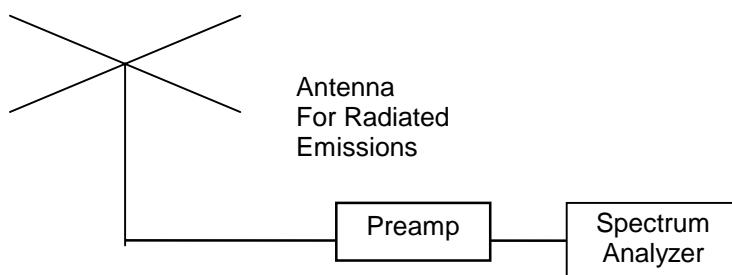

Radiated Emissions:

- LISN's not used
- AC outlet with low-pass filter at the base of the turntable
- No vertical conductive wall
- Antenna height varied from 1 to 4 meters
- Distance from antenna to tested system is 3 meters

- Not to Scale


<i>Tests Performed For</i> Micro Enhanced Technology, Inc	<i>FCC ID</i> OJS990002	<i>Radiometrics Test Document</i> RP-3997A	<i>Page</i> 6 of 10
---	-----------------------------------	--	-------------------------------

3.0 Occupied Bandwidth Data

The occupied bandwidth of the RF output was measured using an HP8566A spectrum analyzer. The bandwidth was measured using the peak detector function and a narrow resolution bandwidth.

A broadband antenna was used to receive the modulated signal. The spectrum analyzer was set to the "MAX HOLD" mode to record the worst case of the modulation. The spectrum analyzer display was digitized and plotted. A limit was drawn on the plots based on the level of the modulated carrier. The plots of the occupied bandwidth for the EUT are supplied on the following page.

Figure 3.1 Occupied Bandwidth Plot

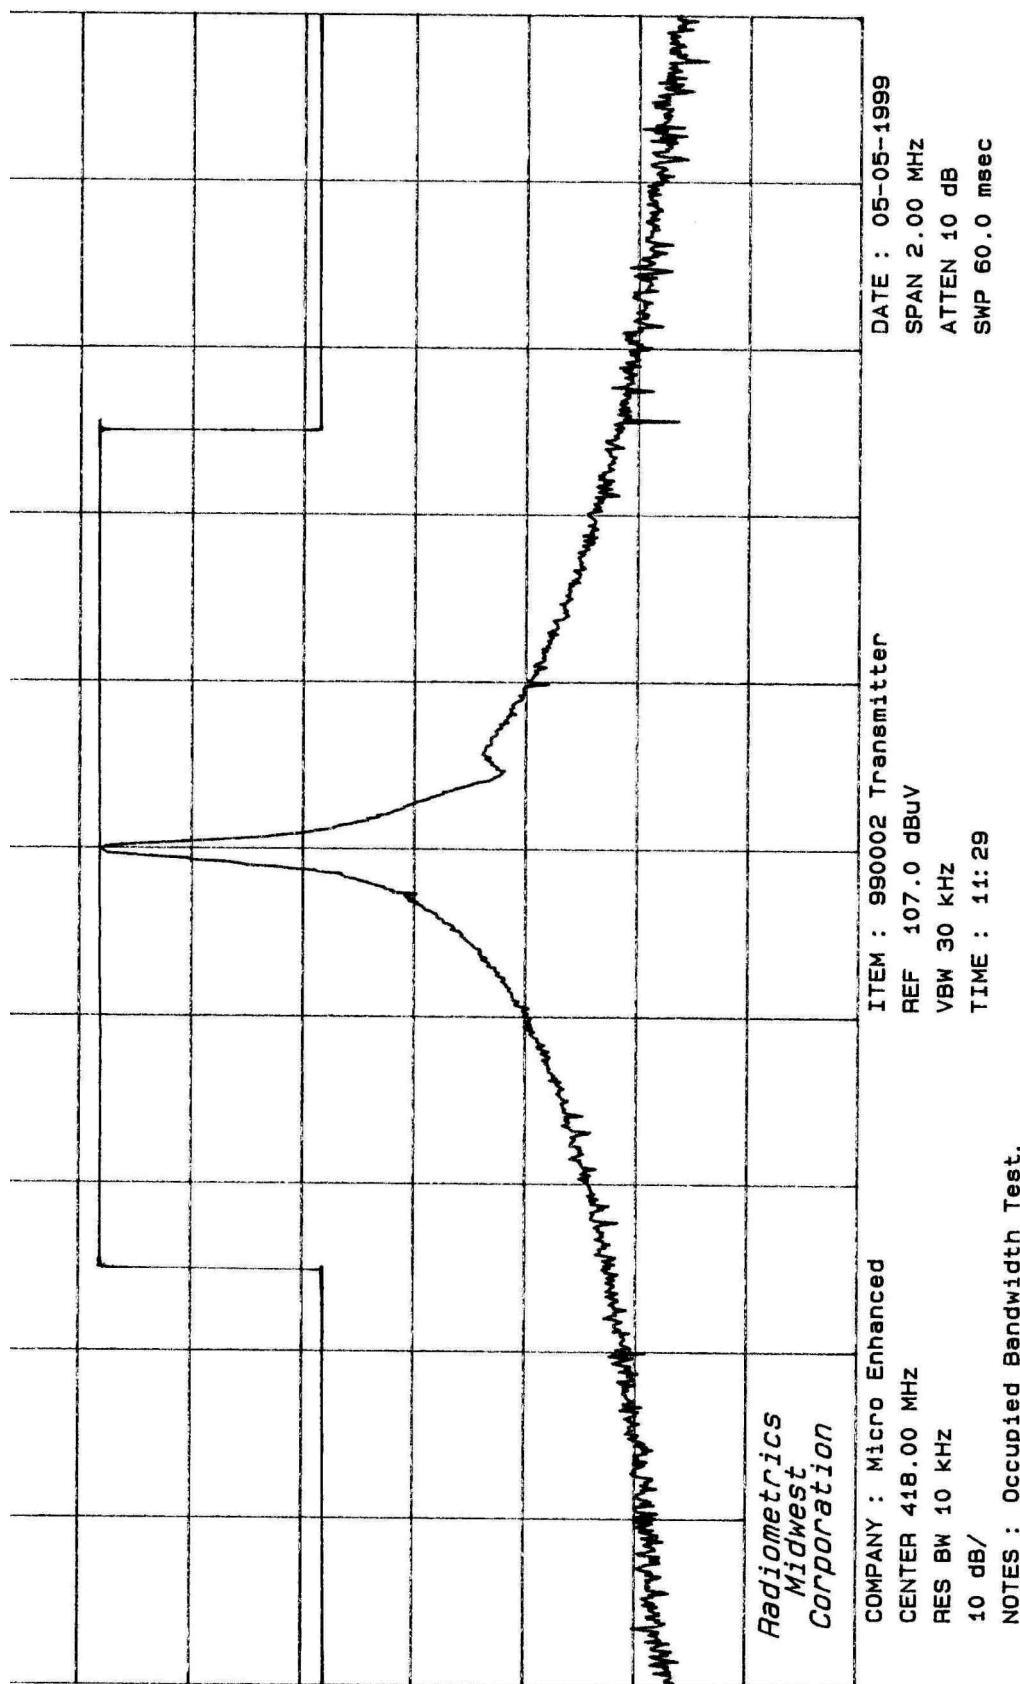

Tests Performed For Micro Enhanced Technology, Inc	FCC ID OJS990002	Radiometrics Test Document RP-3997A	Page 8 of 10
--	----------------------------	---	------------------------

4.0 Radiated Emissions Data

The following table lists the highest measured emission frequencies, and measured levels and the limit. A sample calculation is given in paragraph 4.1.

Model : 990002
 Test Date : 4-30-99
 Notes : Pol = Antenna Polarization; V = Vertical; H = Horizontal
 : BC = Biconical; LP = Log Periodic; DP = Dipole; HN = Horn
 Test Distance : 3 Meters
 Notes : Low-loss coax cable was used above 1000 MHz.

Freq. (MHz)	Meter Reading dBuV	Ant Pol/Type	Peak to Ave (dB)	Antenna Factor	Cable Loss (dB)	Amp Gain (dB)	Field Strength dBuV/m	Limit dBuV/m	Results Margin (dB)
418.0	68.9	V/DP	-4.7	21.0	5.3	27.1	63.4	75.4	12.0
836.0	45.2	V/DP	-4.7	27.0	8.9	26.9	49.5	55.4	5.9
1254.0	40.1	V/LP	-4.7	25.4	0.9	29.1	32.6	55.4	22.8
1672.0	38.4	V/LP	-4.7	26.9	1.4	29.5	32.5	55.4	23.0
2090.0	35.0	V/LP	-4.7	28.8	1.8	29.5	31.4	55.4	24.0
2508.0	34.5	V/LP	-4.7	29.8	2.3	29.8	32.1	55.4	23.3
2926.0	34.1	V/LP	-4.7	30.8	2.8	29.0	34.0	55.4	21.5
3344.0	33.0	V/LP	-4.7	32.1	3.3	28.9	34.8	55.4	20.7
418.0	66.5	H/DP	-4.7	21.0	5.3	27.1	61.0	75.4	14.4
836.0	46.2	H/DP	-4.7	27.0	8.9	26.9	50.5	55.4	4.9
1254.0	38.4	H/LP	-4.7	25.4	0.9	29.1	30.9	55.4	24.5
1672.0	39.1	H/LP	-4.7	26.9	1.4	29.5	33.2	55.4	22.3
2090.0	35.0	H/LP	-4.7	28.8	1.8	29.5	31.4	55.4	24.0
2508.0	35.0	H/LP	-4.7	29.8	2.3	29.8	32.6	55.4	22.8
2926.0	35.0	H/LP	-4.7	30.8	2.8	29.0	34.9	55.4	20.6

No Emissions were detected from 250 to 2000 MHz within 15 dB of the limits.

*Peak Reading

Judgment: Passed by 4.9 dB

Test Personnel: Joseph Strzelecki
Senior EMC Engineer

Tests Performed For Micro Enhanced Technology, Inc	FCC ID OJS990002	Radiometrics Test Document RP-3997A	Page 9 of 10
--	----------------------------	---	------------------------

4.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

Assume a receiver reading of 49.5 dBuV is obtained. The Antenna Factor of 8.1 and a Cable Factor of 1.7 is added. The Amplifier Gain of 23.3 dB is subtracted, giving a field strength of 36 dBuV/m. The 36 dBuV/m can be mathematically converted to its corresponding level in uV/m.

$$FS = 49.5 + 8.1 + 1.7 - 23.3 = 36.0 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(36 \text{ dBuV/m})/20] = 63.1 \text{ uV/m}$$

4.2 Peak to Average Calculations

As required by section 15.35, the Peak to Average correction factor was calculated with the data supplied by the EUT manufacturer.

The following is an analysis to determine the MAXIMUM on time over a sampling of 100 mSec.

	Total time	RF On Time
Initial Pulse	10.2 mSec	5.3 mSec
No activity	4.5 mSec	0 mSec
Data stream	85.3 mSec The last 1.6 mSec of the data stream is not used for duty cycle Calculation	52.8 mSec
SUM TOTAL	100 mSec	58.1 mSec

Tests Performed For Micro Enhanced Technology, Inc	FCC ID OJS990002	Radiometrics Test Document RP-3997A	Page 10 of 10
--	----------------------------	---	-------------------------

Figure 4.1 Duty Cycle Plot

Shows 20 mSec of the data train

