

Sub-part 2.1033 (c):

Equipment Identification

FCC ID: OJY-KAG11

Date of Report

Friday, October 31, 2003

Supervised By:
RD:kg

Thomas J. Funk

The applicant has been cautioned as to the following:

15.21 Information to User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27 (a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Table of Contents

<u>Rule</u>	<u>Description</u>
2.1033	List of General Information Required
2.1046	R.F. Power Output
2.1049	Occupied Bandwidth
22.917	Emission Requirements
2.1051 22.917 (e)	Spurious Emissions at Antenna Terminals
2.1053	Field Strength of Spurious Radiation
2.1055	Frequency Stability - Temperature & Voltage Variation
2.202 (g)	Necessary Bandwidth and Emission Bandwidth
2.906	Testimonial & Statement of Certification
	Radio Frequency Radiation Exposure Limits
	Exhibits:
	Appendix:

List of General Information Required for Type Acceptance

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and to
Part 22 sub-part H

Sub-part

2.1033 (c)(1)	<u>Name and Address of Applicant:</u> Ericsson Wireless Communications 6210 Spine Rd. Boulder, CO 80301 <u>Vendor:</u> Applicant	
2.1033(c)(2):	<u>FCC ID:</u>	OJY-KAG11
2.924	<u>Model #'s</u>	RBS1130 RBS1140 RBS1141
	<u>Technical Description:</u>	
2.1033(c)(4):	<u>Type of Emission:</u>	1M25F9W
2.1033(c)(5)	<u>Frequency Range, MHz:</u>	869 MHz 894 MHz
2.1033(c)(6)	<u>Power Rating, Watts:</u> _____ Switchable _____ Adjustable x__ N/A _____	5-60
2.1033(c)(7)	<u>Maximum Power Rating, Watts:</u>	60
2.1033(c)(8)	<u>Voltages & Currents in all Elements in Final R.F. Stage, Including Final Transistor or Solid State Device:</u> Collector Current, A = 8.6 Amp per RF Stage Collector Voltage, Vdc = 48VDC Supply Voltage, Vac = N/A	

Exhibits

- 2.1033 Block Diagram:
Please see Attached Exhibit 1
- 2.1033 Circuit Diagram:
Please see Attached Exhibit 2
- 2.1033 Parts List:
Please see Attached Exhibit 3
- 2.1033 Manual:
Please see Attached Exhibit 4
- 2.1033 Photographs:
Please see Attached Exhibits 5
- 2.1033 Tune-Up Procedure/Alignment Procedure:
Please see Attached Exhibit 6
- 2.1033 Label Information:
Please see Attached Exhibit 7

- 2.1033(c)(14) **Test Report:**

Test Report Follows

Sub-part
2.1033 (c) : Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.1046, 2.1049, 2.1051, 2.1053, 2.1055 and the following individual Parts:

<u>21</u>	Domestic Public Radio Services	—
<u>24</u>	Personal Communications Services	—
<u>22E</u>	Broadband PCS	—
22.901 (d)	Special Provisions for Alternative Cellular Technologies and and Auxiliary Services	<u>X</u>
<u>23</u>	International Fixed Public Radio Communications Service	—
<u>74</u>	Experimental, Auxiliary & Special Broadcast and Other Program Distribution Services	—
<u>74H</u>	Low Power Auxiliary Stations	—
<u>80</u>	Stations in the Maritime Service	—
<u>80.209 (5)(l)</u>	Transmitter Frequency Tolerances, 156–162 MHz, Coast Stations	—
<u>80K</u>	Private Coast Stations & Marine Utility Stations	—
<u>80S</u>	Compulsory R/T Installations for Small Passenger Boats	—
<u>80T</u>	Radio Telegraph Installation Required for Vessels on the Great Lakes	—
<u>80U</u>	Radio Telegraph Installation Required by the Bridge-to-Bridge Act	—
<u>87</u>	Aviation Services	—
<u>90</u>	Private Land Mobile Radio Services	—
<u>94</u>	Private Operational–Fixed microwave Services	—
<u>95</u>	General Mobile Radio Service	—

General Information

1. Spurious radiation was measured at three (3) meters.

2. The normal modes of modulation are:
 - (a) Voice _____
 - (b) Wideband Data _____
 - (c) SAT _____
 - (d) ST _____
 - (e) SAT + Voice _____
 - (f) SAT + DTMF _____
 - (g) 64-Ary Orthogonal CDMA X
 - (h) Pi/4 DQPSK _____
 - (i) NAMPS Voice _____
 - (j) NAMPS DSAT _____
 - (k) NAMPS ST _____

Standard Test Conditions
and
Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

Room Temperature	=	$25 \pm 5^{\circ} \text{ C}$
Room Humidity	=	20–50%
Supply Voltage, Vdc, Vac	=	- 48VDC, +24VDC, 120VAC

Prior to testing, the E.U.T. was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.


Name of Test: R.F. Power Output & Occupied Bandwidth
Paragraph: 47 CFR 2.1046 & 2.1049
Guide: TIA/EIA -97-D & 3GPPS C.S0010-B
Test Condition: Standard Temperature & Humidity
Test Equipment: As per Attached Appendix J

Measurement Procedures

1. The E.U.T. was connected to a directional coupler and a resistive coaxial attenuator of normal load impedance, and the modulated output power was measured by means of an R.F. power meter.
2. Measurement accuracy is ±3%.

Measurement Results


Nominal, MHz	Channel	Band	R.F. Power Output, Watts	
			Low Power	High Power
880.68	356		5.0	60.0
893.31	777		5.0	60.0
869.70	1013		5.0	60.0

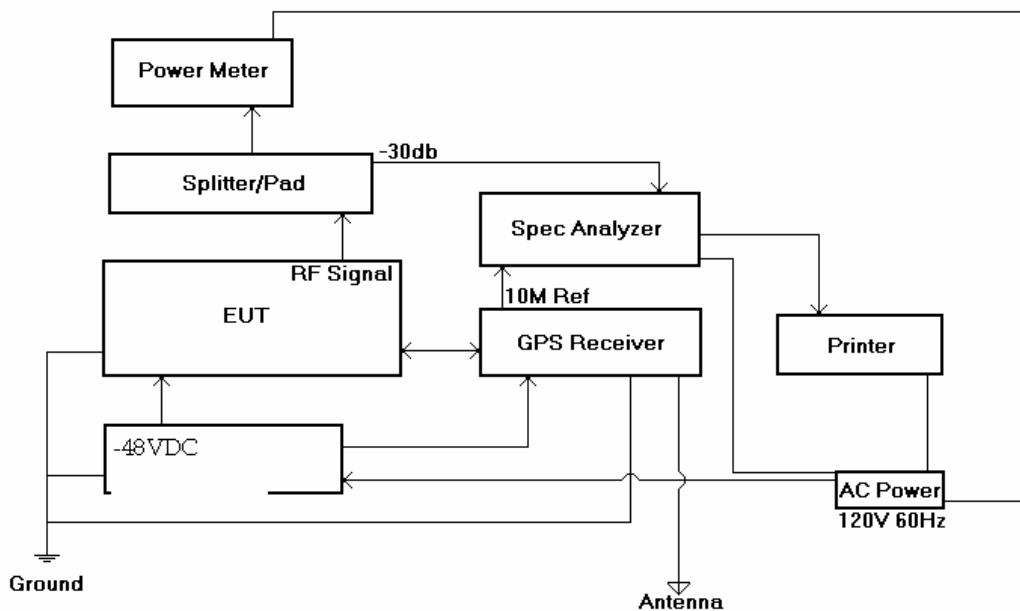

OJY-KAG11



Ref Lvl 39.1 dBm
 Marker 1 [T1] -32.94 dBm 872.95000000 MHz
 RBW 30 kHz RF Att 30 dB
 VBW 300 kHz Mixer -10 dBm
 SWT 3 s Unit dBm

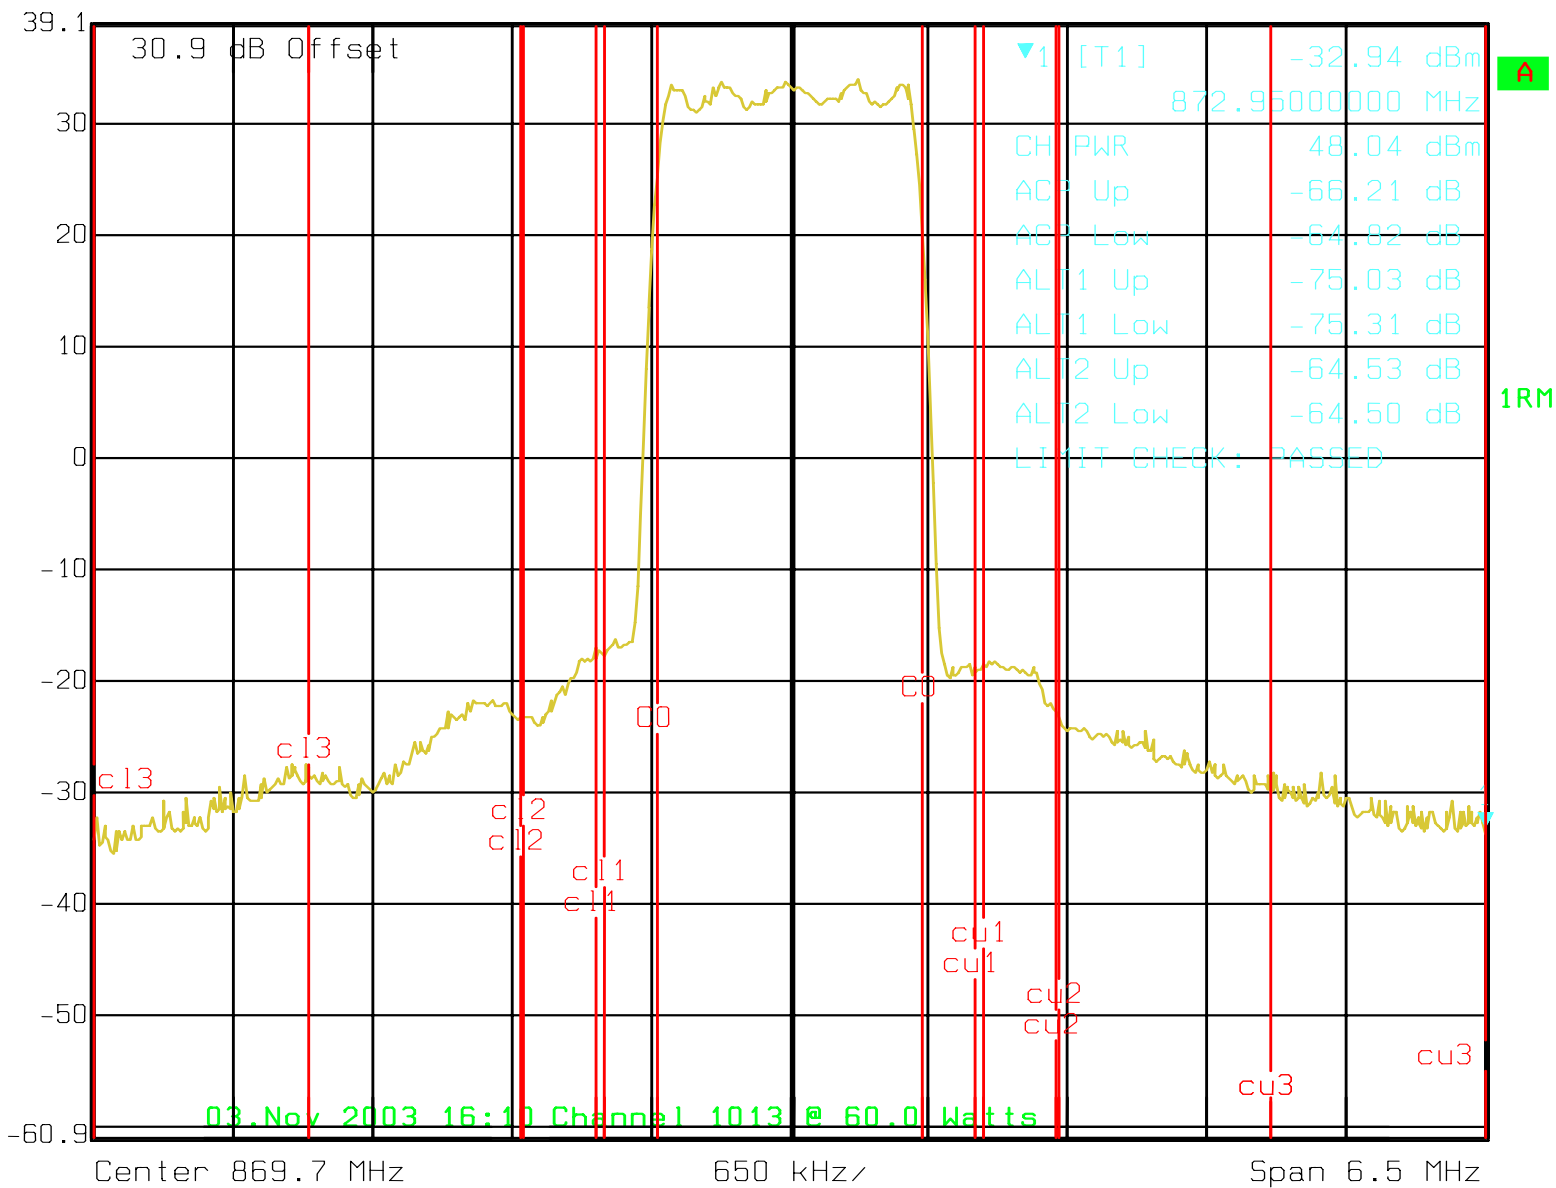


Date: 03.NOV.2003 16:11:02

OJY-KAG11



Marker 1 [T1] RBW 30 kHz RF Att 30 dB
 Ref Lvl -33.54 dBm VBW 300 kHz Mixer -10 dBm
 39.1 dBm 883.93000000 MHz SWT 3 s Unit dBm

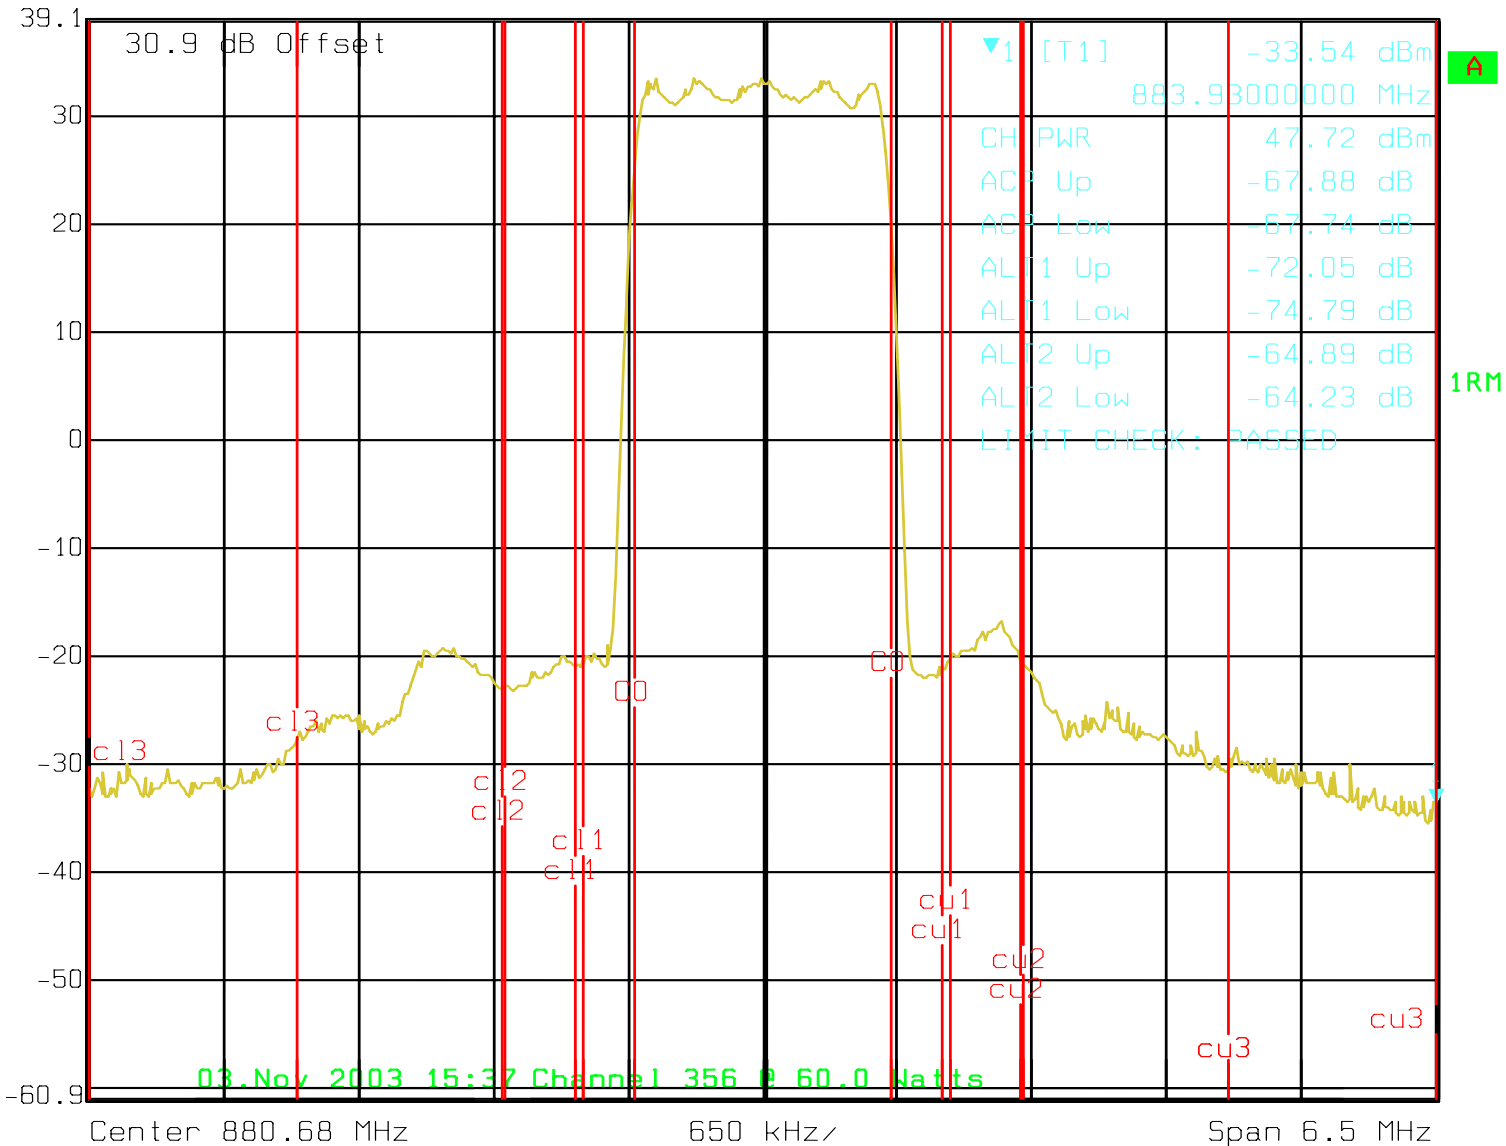


Date: 03.NOV.2003 15:37:31

OJY-KAG11



Marker 1 [T1] RBW 30 kHz RF Att 30 dB
 Ref Lvl -30.89 dBm VBW 300 kHz Mixer -10 dBm
 39.1 dBm 890.06000000 MHz SWT 3 s Unit dBm

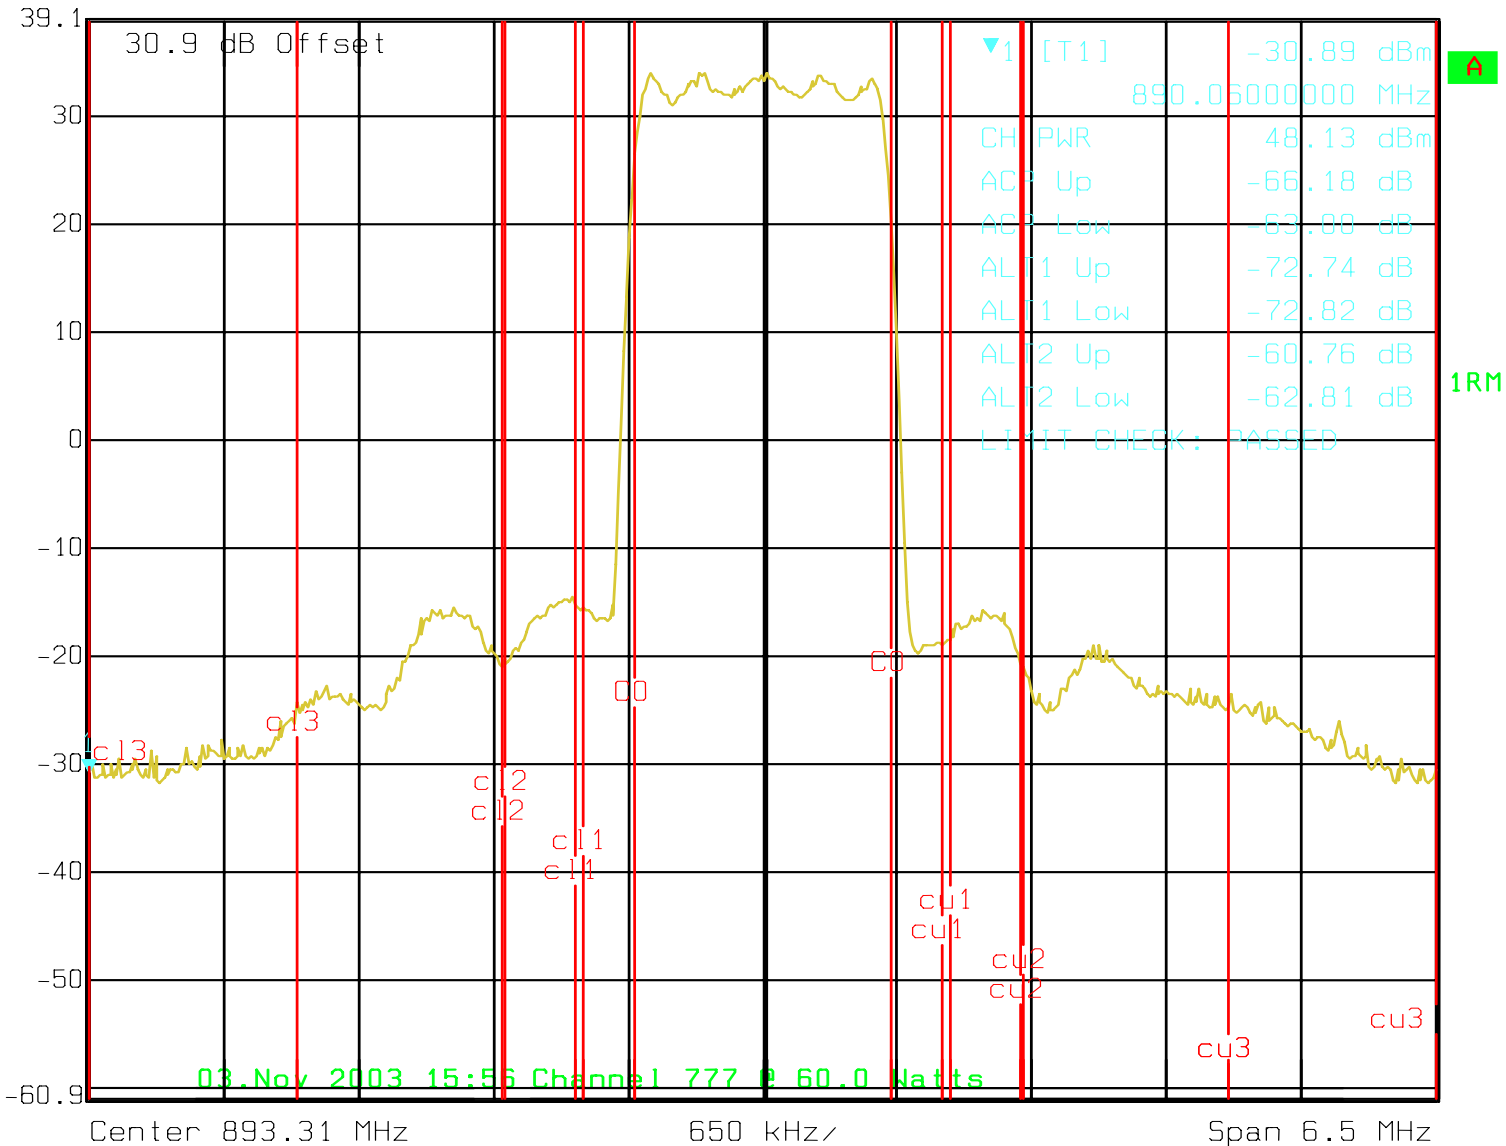

Date: 03.NOV.2003 15:56:04

Name of Test: Spurious Emissions at Antenna Terminals
Paragraph: 47 CFR 2.1051, 22.917(e)
Guide: EIA Standard RS 152B, Paragraph 17
Test Condition: Standard Temperature & Humidity
Test Equipment: As per Attached Appendix J

Measurement Procedures

1. The E.U.T. was connected, through a directional coupler, a 30 dB coaxial attenuator then to a Rohde & Schwarz Spectrum Analyzer.
2. Measurements were made over the range from 1Ghz to 12 GHz for the worst-case modulation at the highest R.F. power settings.
3. All other emissions were 20 dB or more below the limit.
4. Spectrum analyzer bandwidth was set to section 22.917 (h)(1) & (2) as applicable.
5. Measurement Results: ***All emissions are 30dB below and more.***



OJY-KAG11

Marker 4 [T1]

RBW 3 MHz RF Att 10 dB

Ref Lvl

-78.66 dBm

VBW 10 MHz


-20 dBm

3.46292000 GHz

SWT 5 s

Unit

dBm

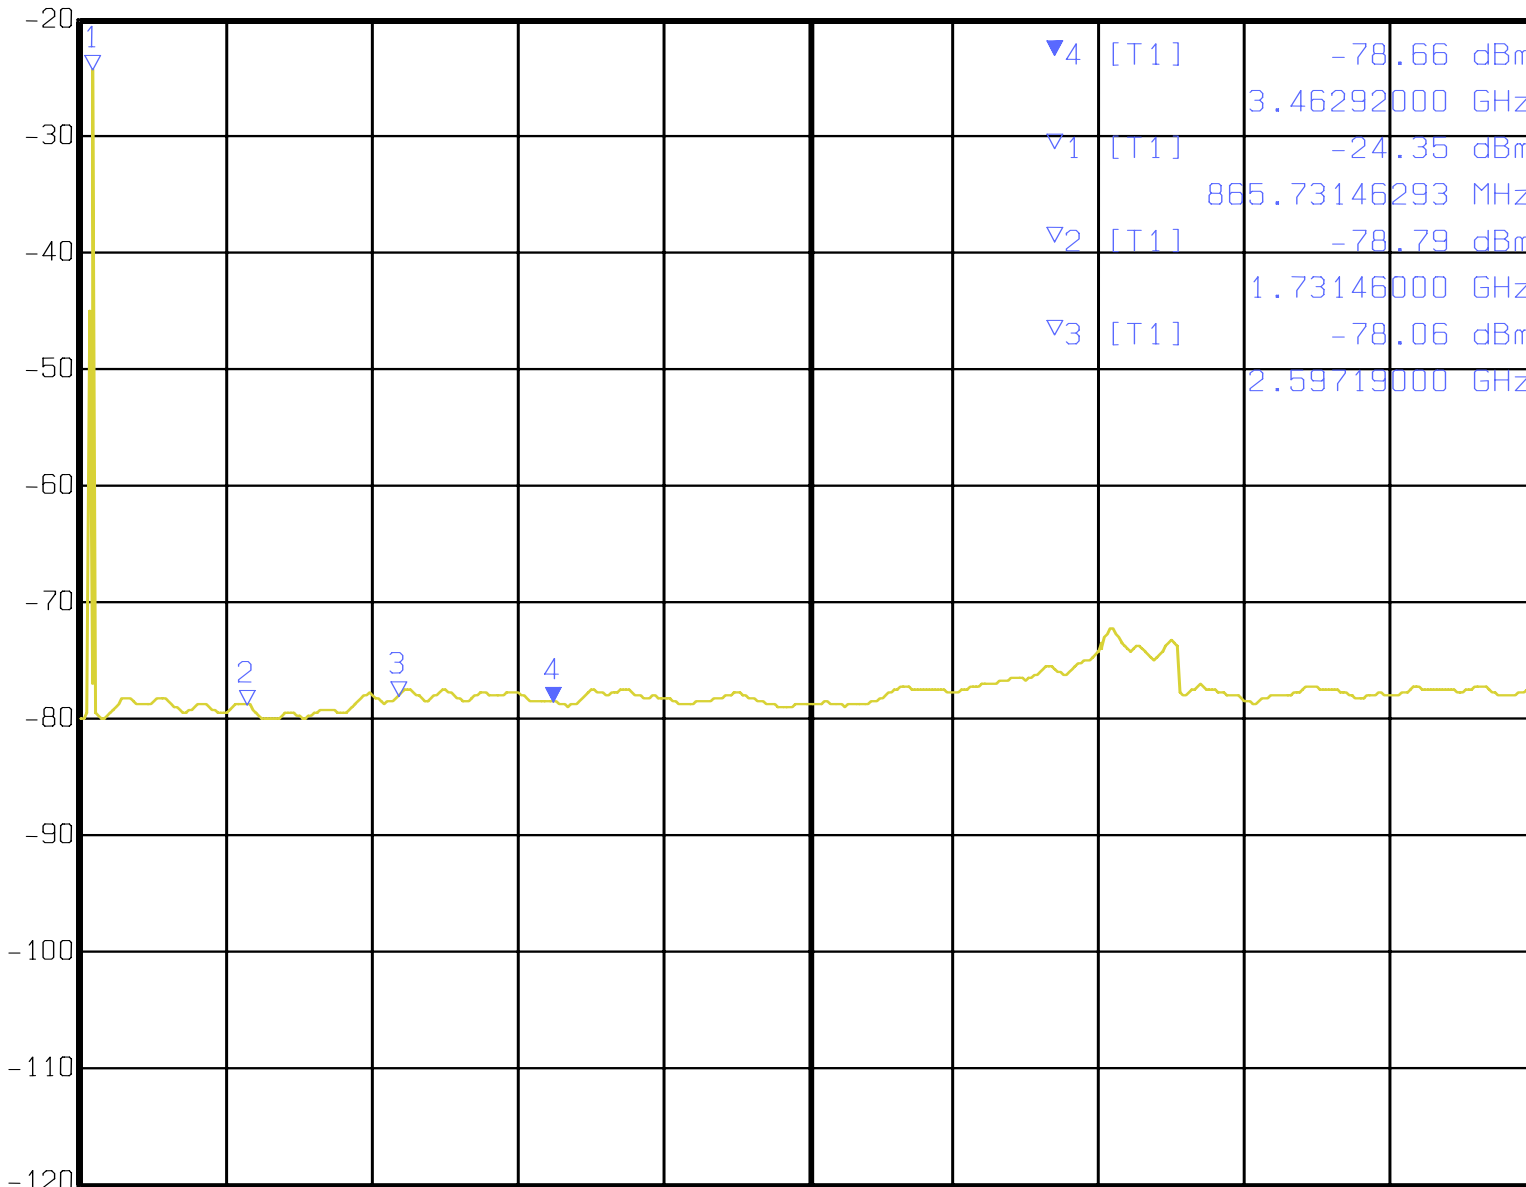

Center 4.9 GHz


820 MHz

Span 8.2 GHz

Date: 16.DEC.2003 09:06:02

Spurious Emissions at Antenna Terminals

Test 1: Spurious Emissions at Antenna Terminals

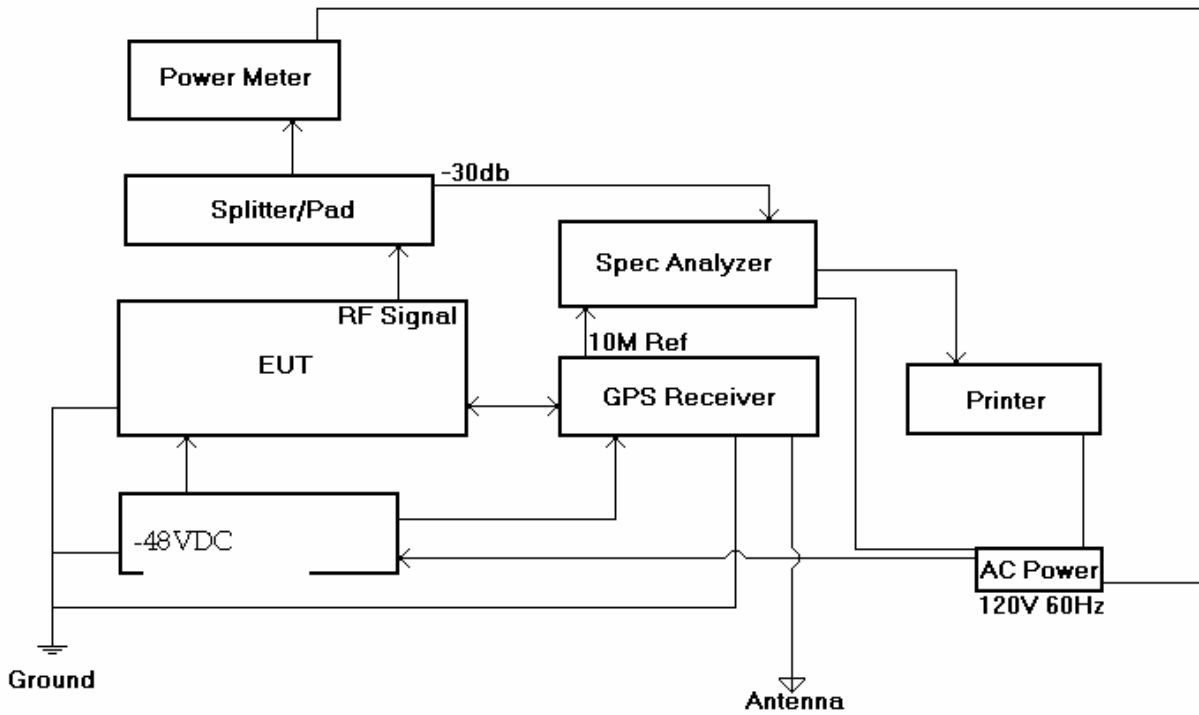

Name of Test: Field Strength of Spurious Radiation

Paragraph: 47 CFR 2.1053

Guide: See Measurement Procedure Below

Test Condition: Standard Temperature & Humidity

Test Equipment: As per Attached Appendix J

Measurement Procedures

1. A description of the measurement facilities was filed with the F.C.C. and was found to be in compliance with the requirements of Section 15.38, by letter from the F.C.C. The test facility used was Criterion Technologies, Rollinsville Co.
2. In the field, the test sample was placed on a turntable at ten and three meters away from the search antenna. The test sample was connected to an R.F. wattmeter and a 50 ohm dummy load, and adjusted to its rated output.

In order to obtain the maximum response at each spurious frequency, the turntable was rotated. Also, the Search Antennas were raised and lowered vertically, and all cables were oriented. Excess power lead was coiled above the system.

3. Measurement Results:

Frequency	dB μ V/M Reading	Signal down from carrier	Convett dB μ V/M to dBm	Total O/P Power	dBm down from Carrier
872.4 MHz	154.77 dBμV/m	00.00 μV/m	47.77 dBm	77.75 dBm	00.00 dB
1739.90 MHz	135.21 dB μ V/m	-19.56 μ V/m	28.21 dBm	47.75 dBm	19.56 dB
2609.50 MHz	140.14 dB μ V/m	-14.63 μ V/m	33.14 dBm	47.75 dBm	14.63 dB
3479.30 MHz	139.01 dB μ V/m	-15.76 μ V/m	32.01 dBm	47.75 dBm	15.76 dB
4349.00 MHz	142.46 dB μ V/m	-12.31 μ V/m	35.46 dBm	47.75 dBm	12.31 dB
5218.80 MHz	144.03 dB μ V/m	-10.74 μ V/m	37.03 dBm	47.75 dBm	10.74 dB

1. The field strength of spurious radiation over the above noted range measured 20 dB or more below the limit, except where noted.
2. Spurious emission bandwidth settings per 22.907 (j)(1) & (2) as applicable.

Supervised By:

Thomas J. Funk

Name of Test: Frequency Stability – Temperature and Voltage Variation

Paragraph: 47 CFR 2.1055

Guide: EIA Standard RS 152B, Paragraph 10

Test Condition: Standard

Test Equipment:

1. Measurement Results: No data was taken due to the fact that this CDMA Radio Base Station cannot operate without a 1 Pulse per Second signal that is produced off of GPS timing. So if the present of GPS is lost the RBS signal will wilt to a point that it is no longer operational. With GSP timing the RF portion of the system can operate and will not vary more than a few hertz, otherwise the system will wilt and shut down.

Name of Test: Necessary Bandwidth and Emission Bandwidth

Paragraph: 47 CFR 2.202 (g)

Modulation = CDMA (F9W)

Emission Bandwidth Calculation:

Necessary Bandwidth, kHz = 1250.00

Justification for CDMA bandwidth of 1.25 MHz

Reference: TIA/EIA/IS-95

Chip rate is 1.228 MHz, per IS-97. When we look 3 dB down from the signal we find 1.25 MHz. Channel spacing is normally set at this 1.25 MHz. Also, one can reference base band filtering requirements for filtering frequency response limits.

Testimonial
and
Statement of Certification

This is to certify:

1. That the application was prepared either by, or under the direct supervision of, the undersigned.
2. That the technical data supplies with the application were taken under my direction and supervision.
3. That the data was obtained on representative units, randomly selected.
4. That, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer: Keith A. Goshia

Radio Frequency Radiation Exposure Limits

The device is installed in a permanent location. It is not operator accessible, and is contained in a secured environment that is accessible by field service engineers or installation engineers only. The ERP of the device is less than 1000 Watts. The Antenna's used on this device are a typical 16dB gain antenna, with this configuration and the maximum RF output of the device set to 60 Watts the exposure limit is less than 1000 Watts.