

4

3

2

1

D

D

C

C

B

B

A

A

- NOTES: UNLESS OTHERWISE SPECIFIED.
- 1. INTERPRET DRAWING PER ASME Y14.100-2000.
 - 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
 - 3. ALTER TCI PART NUMBER 2401204-4.
 - 4. REF DOCUMENT 3900005-12 FORMAT LAYOUT FOR -501;
REF DOCUMENT 3900005-11 FORMAT LAYOUT FOR -502.
 - 5. INK, COLOR BLACK, PER TCI PART NUMBER WS1102 OR WS1106.
 - 6. THIS DRAWING SHALL BE USED WITH MODEL 2600312-XXX"
FOR COMPLETE PRODUCT DEFINITION.
 - 7. EXCEPT WHERE INDICATED, BACKGROUND TO BE INK. A
PLAIN BORDER OF .06 AT THE LABEL EDGES IS PERMISSIBLE.

ALTERED ITEM DRAWING
SEE SEPARATE PARTS LIST

THALES PROPRIETARY


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES; TOL'S ARE: FRACTIONS: DECIMALS: ± .xx ±.01 ANGLES: ±2° .xxx ±.005 DO NOT SCALE DRAWING		THALES THALES COMMUNICATIONS, INC. CLARKSBURG, MARYLAND 20871	
STATE: In Work		TITLE: LABEL FCC	
ITERATION: A.1		SIZE B	CAGE CODE 23386
DRAWN: NJ		DATE: 11/6/08	DWG. NO. 2600312
		SCALE: 4.000	REV A
		SHEET: 1 of 2	

4

3

2

1

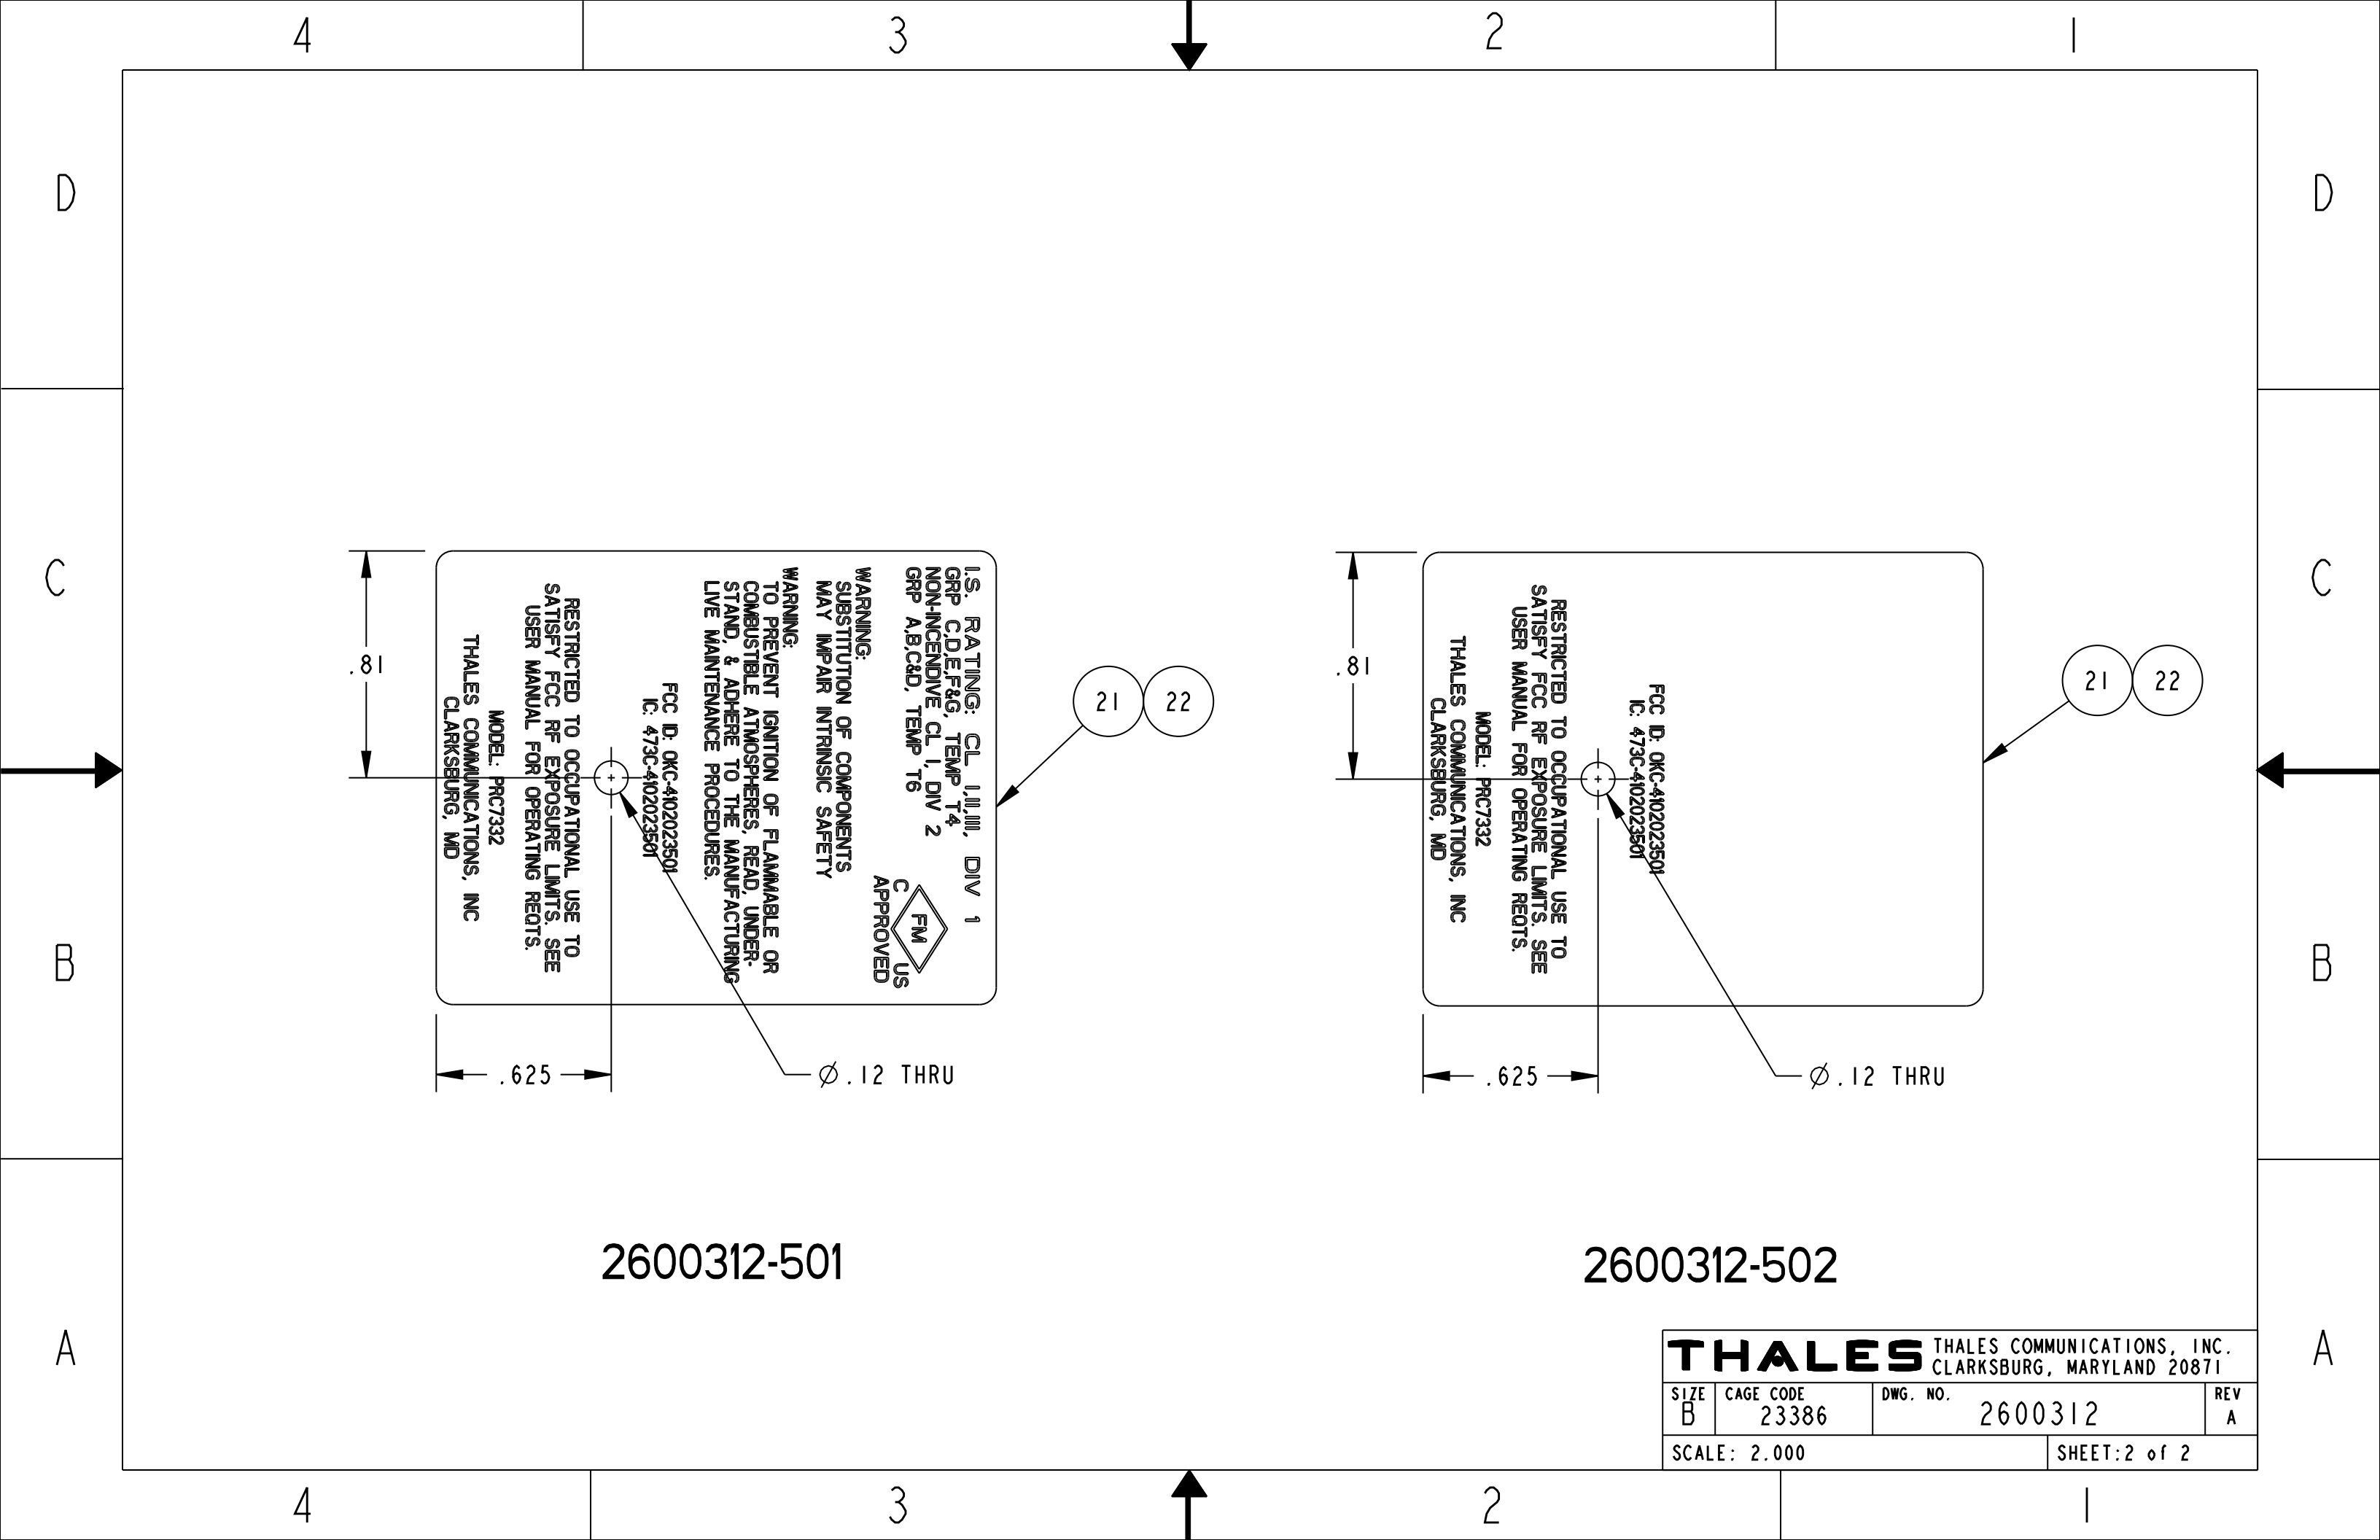

IS. RATING: CL I,II,III, DIV 1
GRP C,D,E,F&G, TEMP T4
NON-INCENDIVE CL I, DIV 2
GRP A,B,C&D, TEMP T6

FM
C US
APPROVED

WARNING:
SUBSTITUTION OF COMPONENTS
MAY IMPAIR INTRINSIC SAFETY

WARNING:
TO PREVENT IGNITION OF FLAMMABLE OR
COMBUSTIBLE ATMOSPHERES, READ UNDER-
STAND, & ADHERE TO THE MANUFACTURING
LIVE MAINTENANCE PROCEDURES.

FCC ID: OKC-4102023501
IC: 473C-4102023501

MODEL: PRC7332
THALES COMMUNICATIONS, INC
CLARKSBURG, MD

RESTRICTED TO OCCUPATIONAL USE TO
SATISFY FCC RF EXPOSURE LIMITS. SEE
USER MANUAL FOR OPERATING REQTS.

2600312-501

RESTRICTED TO OCCUPATIONAL USE TO
SATISFY FCC RF EXPOSURE LIMITS. SEE
USER MANUAL FOR OPERATING REQTS.

MODEL: PRC7332
THALES COMMUNICATIONS, INC
CLARKSBURG, MD

FCC ID: OKC-4102023501
IC: 473C-4102023501

Ø .12 THRU

2600312-502

THALES		THALES COMMUNICATIONS, INC. CLARKSBURG, MARYLAND 20871	
SIZE B	CAGE CODE 23386	DWG. NO. 2600312	REV A
SCALE: 2.000			SHEET: 2 of 2