

849 NW STATE ROAD 45 NEWBERRY, FL 32669 USA

PH: 888.472.2424 OR 352.472.5500

FAX: 352.472.2030

EMAIL: linfo@timcoengr.com HTTP://WWW.TIMCOENGR.COM

FCC PART 15.235 TEST REPORT LOW POWER UNLICENSED TRANSMITTER

Applicant	WowWee Group Limited			
Address	Energy Plaza, Suite 301A-C			
	92 Granville Road, TST EAST			
	Kowloon HONG KONG			
FCC ID	OKP0216A			
Product Description	49.860 MHz TX			
Date Sample Received	6/30/2009			
Date Tested	7/01/2009			
Tested By	Nam Nguyen			
Approved By	Mario de Aranzeta			
Timco Report No.	1474AUT9TestReport.doc			
Test Results	⊠ Pass ☐ Fail			

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



TABLE OF CONTENTS

ENERAL REMARKS3
EPORT SUMMARY4
EST ENVIRONMENT4
EST SETUP4
UT SPECIFICATION5
EST EQUIPMENT LIST6
EST PROCEDURES7
ADIATION INTERFERENCE8
CCUPIED BANDWIDTH9
ADIATED EMISSIONS TEST SET UP PHOTO10

APPLICANT: WOW WEE GROUP LIMITED

FCC ID: OKP0216A

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc. 849 NW State Road 45 Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T. Compliance Engineer/ Lab. Supervisor

Date: 7/2/2009

APPLICANT: WOW WEE GROUP LIMITED

FCC ID: OKP0216A

REPORT: W\WOW_OKP\1474AUT9\1474AUT9TestReport.doc

Page 3 of 10 mdea 09.20.2007

REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.	
Applicable Rule(s)	FCC Pt 15.235, ANSI C63.4: 2003	

TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 26°C
	Relative humidity: 50%

TEST SETUP

Test Exercise (e.g software description, test signal, etc.):	The DUT was placed in continuous transmit mode of operation.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control.

APPLICANT: WOW WEE GROUP LIMITED

FCC ID: OKP0216A

DUT SPECIFICATION

Applicant	WowWee Group Limited				
Description	49.860 MHz TX				
FCC ID	OKP0216A				
Frequency Range	49.86 MHz				
DUT Power Source	☐ 110-120Vac/50- 60Hz				
	☐ DC Power				
	☐ Battery Operated Exclusively				
Test Item	☐ Prototype		☐ Production		
Type of Equipment	Fixed	Mobile	⊠ Portable		

APPLICANT: WOW WEE GROUP LIMITED

FCC ID:

REPORT:

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 2/5/09	2/5/12
3-Meter Semi- Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
Analyzer Tan Tower Quasi-Peak Adapter	НР	85650A	3303A01690	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	НР	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan Tower Spectrum Analyzer	НР	8566B Opt 462	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Analyzer Tan Tower Preamplifier	НР	8449B-H02	3008A00372	CAL 11/30/07	11/30/09
Frequency Counter	HP	5385A	2730A03025	CAL 7/6/07	7/6/09
Hygro- Thermometer	Extech	445703	0602	CAL 11/15/07	11/15/09
Antenna: Log- Periodic	Electro-Metrics	LPA-30	409	CAL 7/18/08	7/18/09
Measuring Tape- 7.5M	Kraftixx	7.5M PROFI		CHAR 11/13/07	11/13/09
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

APPLICANT: WOW WEE GROUP LIMITED

FCC ID: OKP0216A

TEST PROCEDURES

Spurious Emissions: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW. The spectrum was searched to at least the 10th harmonic.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the following plot was generated. The vertical scale is set to 10 dB per division.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq	Meter Reading	ACF	Cable Loss	Field Strength
MHz	dBuV	dB/m	dB	dBuV/m@3 m
33	20	+10.36	+1.2	= 31.56

ANSI C63.4-2003 Measurement: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: WOW WEE GROUP LIMITED

FCC ID: OKP0216A

RADIATION INTERFERENCE

Rules Part No.: 15.235

Requirements:

Frequency MHz	Limits
Fundamental Frequency	80.0 dBµV/m measured @ 3 meters
30 – 88	40.0 dBμV/m measured @ 3 meters
80 - 216	43.5 dBμV/m measured @ 3 meters
216 – 960	46.0 dBμV/m measured @ 3 meters
Above 960	54.0 dBμV/m measured @ 3 meters

Test Data:

Tuned	Emission	Meter	Ant.	Coax	Correction	Field	Margin
Frequency	Frequency	Reading	Po1	Loss	Factor	Strength	dB
MHz	MHz	dBuV		dB	dB	dBuV/m	
49.9	49.86	21.3	Н	0.50	10.90	32.70	47.30
49.9	49.86	39.8	V	0.50	10.79	51.09	28.91
49.9	99.72	3.8	Н	0.65	11.19	15.64	27.86
49.9	99.72	5.7	V	0.65	11.63	17.98	25.52
49.9	149.58	3.7	Н	0.70	13.87	18.27	25.23
49.9	149.58	5.3	V	0.70	14.24	20.24	23.26
49.9	199.44	5.2	Н	0.90	17.02	23.12	20.38
49.9	199.44	8.7	V	0.90	17.04	26.64	16.86
49.9	249.30	4.1	Н	1.00	12.47	17.57	28.43
49.9	249.30	4.8	V	1.00	12.46	18.26	27.74
49.9	299.16	4.0	Н	1.10	14.37	19.47	26.53
49.9	299.16	4.2	V	1.10	14.36	19.66	26.34

APPLICANT: WOW WEE GROUP LIMITED

FCC ID: OKP0216A

OCCUPIED BANDWIDTH


Rules Part No.: 15.235

Requirements: The field strength of any emissions appearing between the band

edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the un-modulated carrier or to the general limits of 15.209, whichever permits the higher

emission levels.


Test Data: Please refer to the following plot.

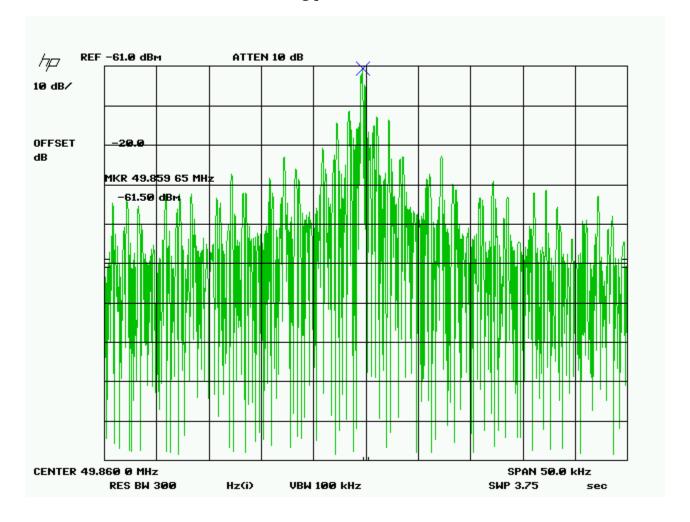

APPLICANT: WOW WEE GROUP LIMITED

FCC ID: OKP0216A

RADIATED EMISSIONS TEST SET UP PHOTO

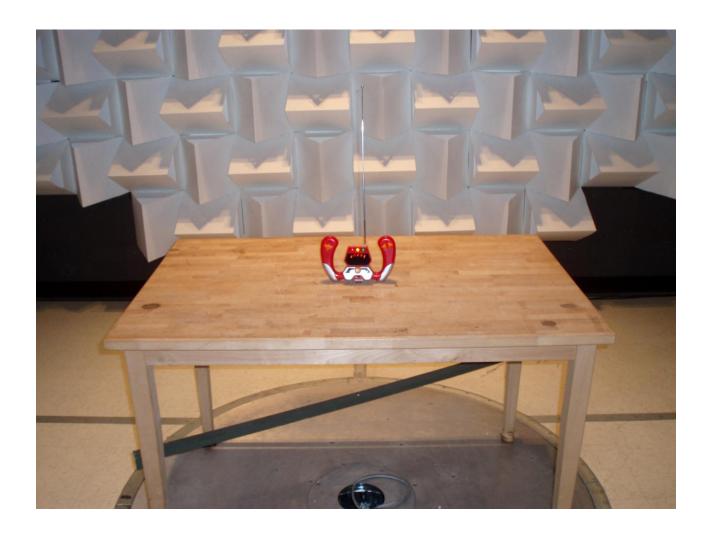

APPLICANT: WOW WEE GROUP LIMITED

FCC ID: OKP0216A

REPORT: W\WOW_OKP\1474AUT9\1474AUT9TestReport.doc

Page 10 of 10 mdea 09.20.2007