

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM150500230401 Page: 1 of 53

FCC REPORT

Application No:	SZEM1505002304CR
Applicant:	WowWee Group Limited
Manufacturer:	WowWee Group Limited
Factory:	Everwin Toys (Dongguan) Co, Ltd.
Product Name:	R.E.V. Smart Ramp Accessory
Model No.(EUT):	0435
Add Model No.:	0438, 0439
Trade Mark:	WowWee
FCC ID:	OKP0435
Standards:	47 CFR Part 15, Subpart C (2014)
Date of Receipt:	2015-05-05
Date of Test:	2015-05-11 to 2015-05-13
Date of Issue:	2015-06-08
Test Result:	PASS *

^{*} In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150500230401 Page: 2 of 53

2 Version

Revision Record					
Version	Chapter	Date	Modifier	Remark	
00		2015-06-08		Original	

Authorized for issue by:		
Tested By	Eric Fu	2015-05-13
	(Eric Fu) /Project Engineer	Date
Prepared By	Hedy Wen.	2015-06-08
	(Hedy Wen) /Clerk	Date
Checked By	Emen-Li	2015-06-08
	(Emen Li) /Reviewer	Date

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150500230401 Page: 3 of 53

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2009	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2009	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2009	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.: 0435, 0438, 0439

Only the model 0435 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on the model number and color.



Report No.: SZEM150500230401 Page: 4 of 53

4 Contents

1	COVER PAGE	1
2	VERSION	2
3	TEST SUMMARY	
4		-
-		
5	GENERAL INFORMATION	5
	5.1 CLIENT INFORMATION	
	5.2 GENERAL DESCRIPTION OF EUT	
	5.3 TEST ENVIRONMENT	
	 5.4 DESCRIPTION OF SUPPORT UNITS 5.5 TEST LOCATION 	
	5.6 Test Facility	
	5.7 DEVIATION FROM STANDARDS	8
	5.8 ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10 EQUIPMENT LIST	
6	TEST RESULTS AND MEASUREMENT DATA	11
	6.1 ANTENNA REQUIREMENT	11
	6.2 CONDUCTED PEAK OUTPUT POWER	
	6.3 6DB OCCUPY BANDWIDTH	
	6.4 POWER SPECTRAL DENSITY	
	 6.5 BAND-EDGE FOR RF CONDUCTED EMISSIONS 6.6 SPURIOUS RF CONDUCTED EMISSIONS 	
	6.7 RADIATED SPURIOUS EMISSIONS	-
	6.7.1 Spurious Emissions	
	6.8 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	42
7	PHOTOGRAPHS - EUT TEST SETUP	52
	7.1 RADIATED EMISSION	52
	7.2 RADIATED SPURIOUS EMISSION	52
8	PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	53



Report No.: SZEM150500230401 Page: 5 of 53

5 General Information

5.1 Client Information

Applicant:	WowWee Group Limited		
Address of Applicant:	3/F, Energy Plaza, Suite 301 A-C, 92 Granville Road, T.S.T. East, Hong Kong.		
Manufacturer:	WowWee Group Limited		
Address of Manufacturer:	3/F, Energy Plaza, Suite 301 A-C, 92 Granville Road, T.S.T. East, Hong Kong.		
Factory:	Everwin Toys (Dongguan) Co, Ltd.		
Address of Factory:	Xie Keng Village, Qing Xi Town, Dongguan City, Guangdong Province, China.		

5.2 General Description of EUT

Product Name:	R.E.V. Smart Ramp Accessory
Model No.:	0435
Trade Mark:	WowWee
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.0 Single mode
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Portable production
Test Power Grade:	Class II (manufacturer declare)
Test Software of EUT:	N/A
Antenna Type:	Integral
Antenna Gain:	-3.1dBi
Battery:	DC 6.0V (4*1.5V "AAA" Size Batteries)



Report No.: SZEM150500230401 Page: 6 of 53

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz





Report No.: SZEM150500230401 Page: 7 of 53

5.3 Test Environment

Operating Environment:		
Temperature:	24.0 °C	
Humidity:	52 % RH	
Atmospheric Pressure:	1010 mbar	

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM150500230401 Page: 8 of 53

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150500230401 Page: 9 of 53

5.10Equipment List

	RE in Chamber					
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2016-05-13	
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24	
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24	
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24	
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2016-05-13	
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24	
9	Coaxial cable	SGS	N/A	SEL0027	2016-05-29	
10	Coaxial cable	SGS	N/A	SEL0189	2016-05-29	
11	Coaxial cable	SGS	N/A	SEL0121	2016-05-29	
12	Coaxial cable	SGS	N/A	SEL0178	2016-05-29	
13	Band filter	Amindeon	82346	SEL0094	2016-05-13	
14	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13	
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24	
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2016-05-13	
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24	
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2016-05-13	



Report No.: SZEM150500230401 Page: 10 of 53

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0179	2016-05-13
6	Barometer	ChangChun	DYM3	SEL0088	2016-05-13
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2016-04-25
8	Band filter	amideon	82346	SEL0094	2016-05-13
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2016-04-25
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150500230401 Page: 11 of 53

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.





The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -3.1dBi.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150500230401 Page: 12 of 53

6.2 Conducted Peak Output Power


Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)					
Test Method:	ANSI C63.10 2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table					
	Ground Reference Plane					
Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer						
Limit:	30dBm					
Test Mode:	Transmitting with GFSK modulation.					
Instruments Used:	Refer to section 5.10 for details.					
Test Results:	Pass					

Measurement Data

GFSK mode					
Test channel	Test channel Peak Output Power (dBm) Limit (dBm)				
Lowest	0.23	30.00	Pass		
Middle	0.44	30.00	Pass		
Highest	0.15	30.00	Pass		




Report No.: SZEM150500230401 Page: 13 of 53

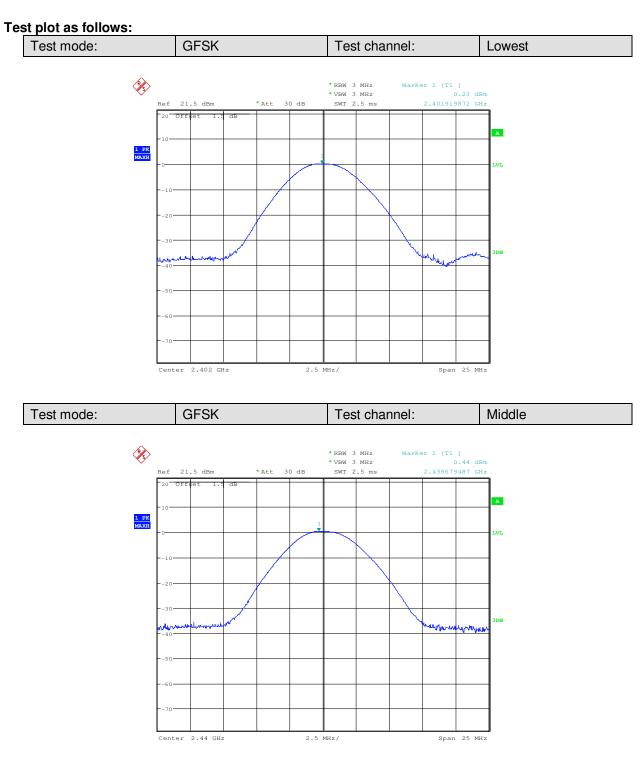



Report No.: SZEM150500230401 Page: 14 of 53

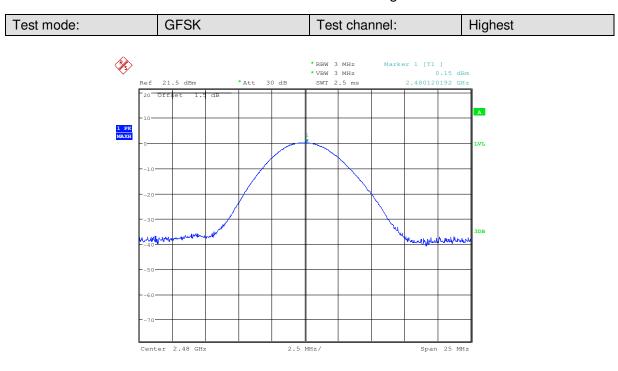



Report No.: SZEM150500230401 Page: 15 of 53

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)		
Test Method:	ANSI C63.10 2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	≥ 500 kHz		
Test Mode:	Transmitting with GFSK modulation.		
Instruments Used:	Refer to section 5.10 for details.		
Test Results:	Pass		

6.3 6dB Occupy Bandwidth


Measurement Data

	GFSK mode		
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.683	≥500	Pass
Middle	0.692	≥500	Pass
Highest	0.692	≥500	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150500230401 Page: 16 of 53

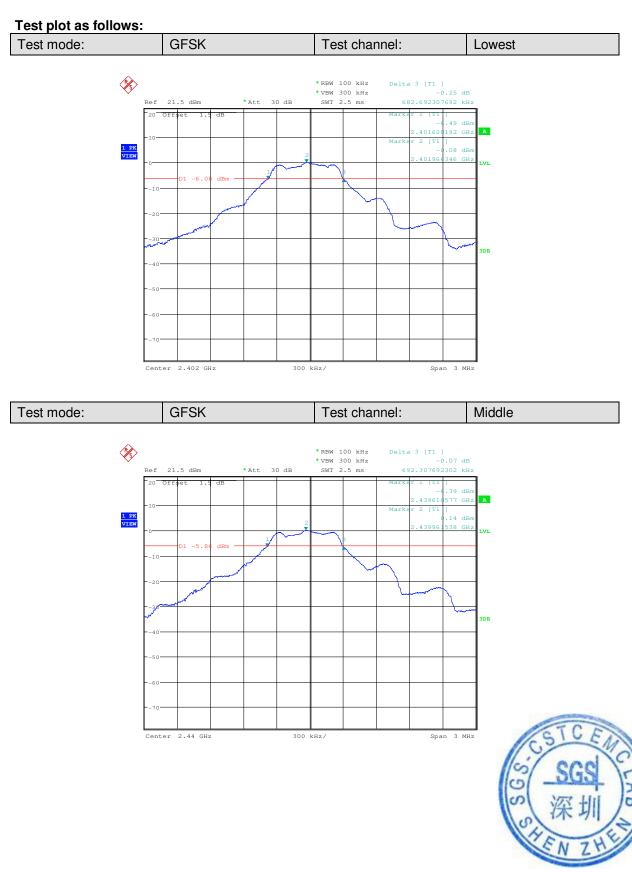



Report No.: SZEM150500230401 Page: 17 of 53

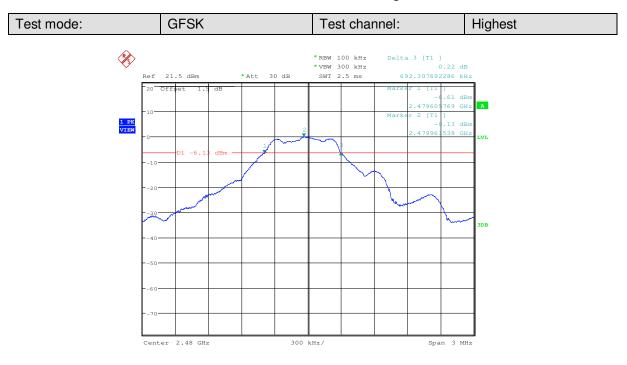



Report No.: SZEM150500230401 Page: 18 of 53

47 CFR Part 15C Section 15.247 (e) **Test Requirement:** Test Method: ANSI C63.10 2009 Test Setup: Spectrum Analyzer E.U.T Non-Conducted Table **Ground Reference Plane** Limit: ≤8.00dBm/3KHz Test Mode: Transmitting with GFSK modulation. Instruments Used: Refer to section 5.10 for details. **Test Results:** Pass


6.4 Power Spectral Density


Measurement Data

	GFSK mode		
Test channel	Power Spectral Density (dBm)	Limit (dBm/3KHz)	Result
Lowest	-13.60	≤8.00	Pass
Middle	-13.87	≤8.00	Pass
Highest	-12.93	≤8.00	Pass




Report No.: SZEM150500230401 Page: 19 of 53

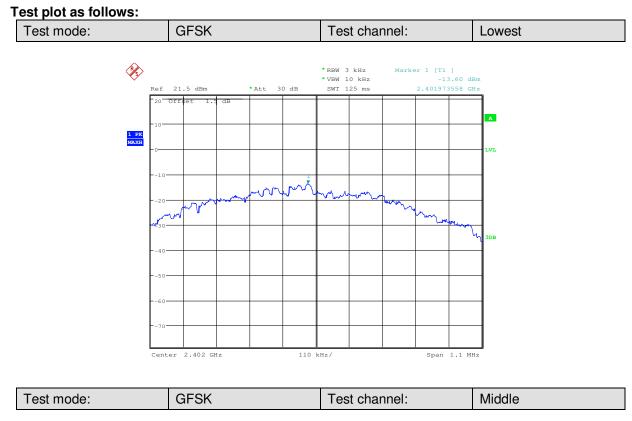

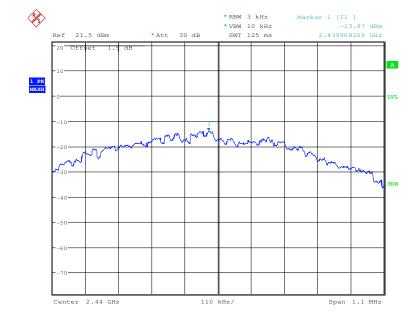



Report No.: SZEM150500230401 Page: 20 of 53

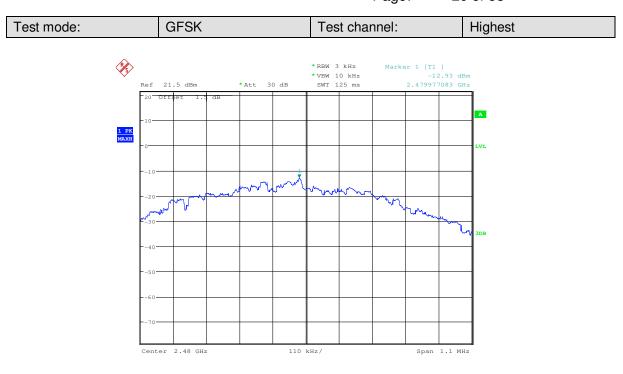



Report No.: SZEM150500230401 Page: 21 of 53


6.5 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	ANSI C63.10 2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test Mode:	Transmitting with GFSK modulation.					
Instruments Used:	Refer to section 5.10 for details.					
Test Results:	Pass					

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150500230401 Page: 22 of 53

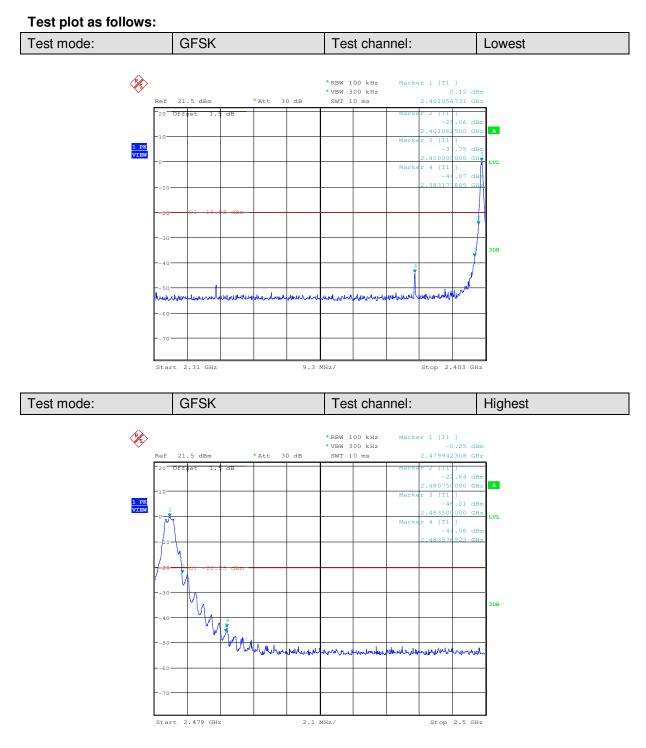



Report No.: SZEM150500230401 Page: 23 of 53


6.6 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10 2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table			
	Ground Reference Plane			
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Transmitting with GFSK modulation.			
Instruments Used:	Refer to section 5.10 for details.			
Test Results:	Pass			




Report No.: SZEM150500230401 Page: 24 of 53

Test plot as follows:

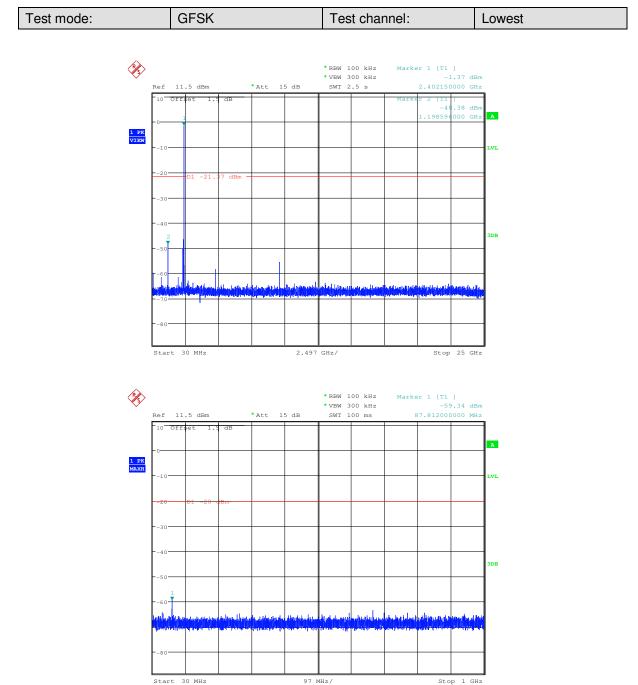




Report No.: SZEM150500230401 Page: 25 of 53

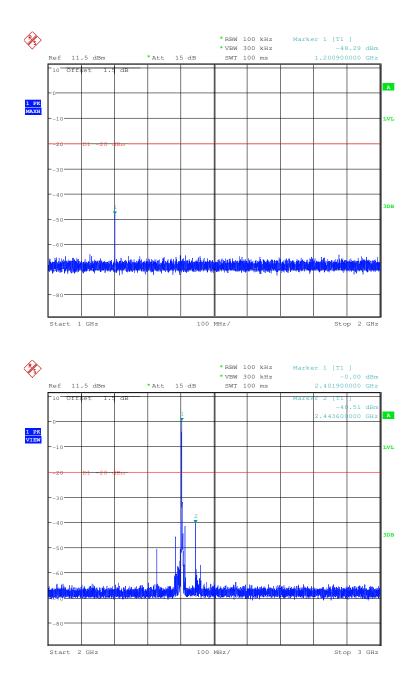




Report No.: SZEM150500230401 Page: 26 of 53

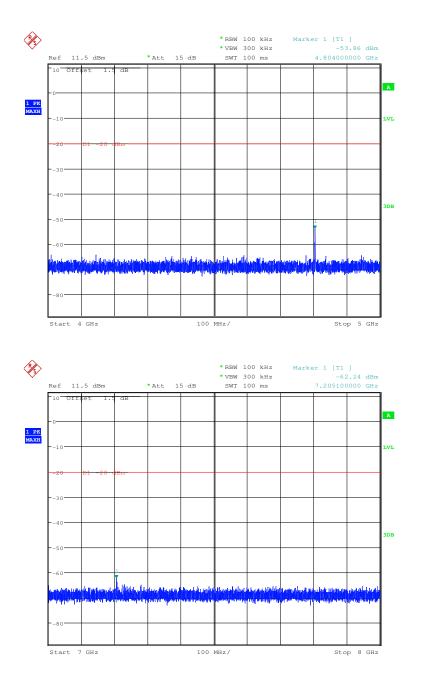






Report No.: SZEM150500230401 Page: 27 of 53

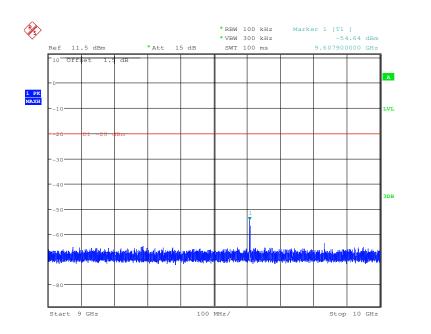


|--|

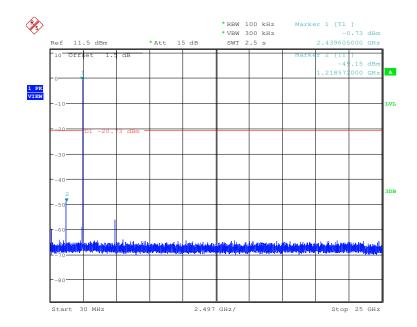




Report No.: SZEM150500230401 Page: 28 of 53

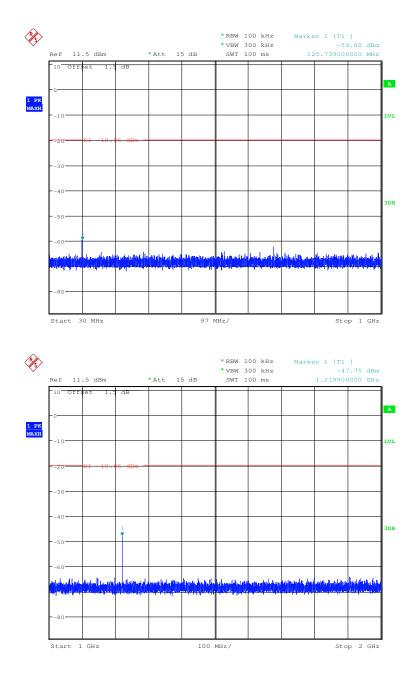




Report No.: SZEM150500230401 Page: 29 of 53

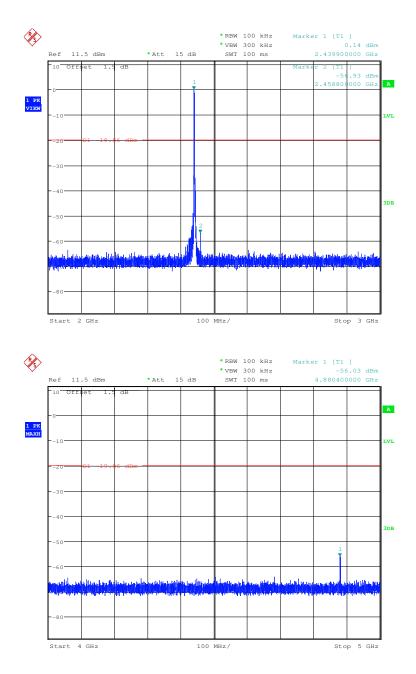




Report No.: SZEM150500230401 Page: 30 of 53

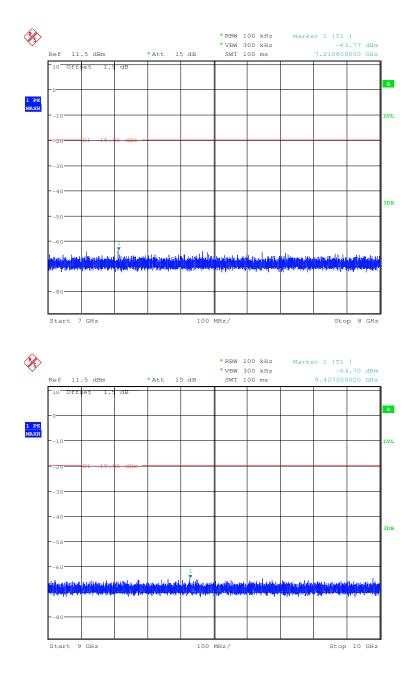




Report No.: SZEM150500230401 Page: 31 of 53

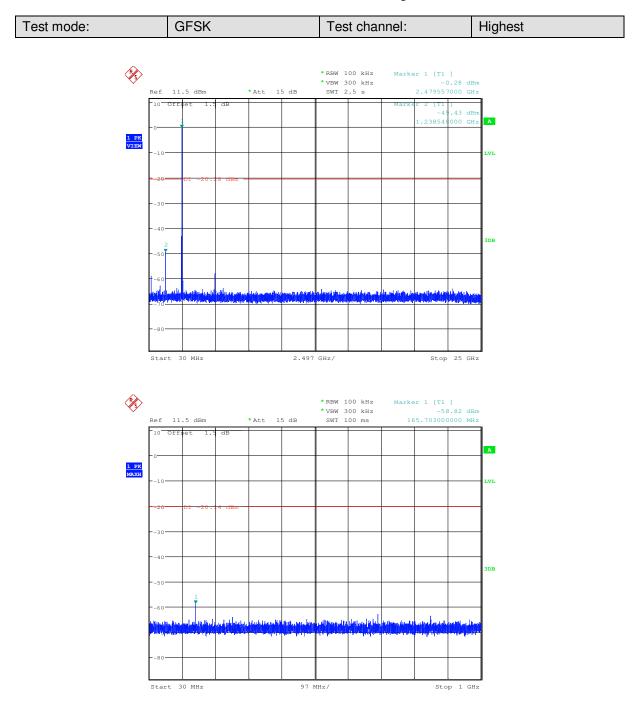




Report No.: SZEM150500230401 Page: 32 of 53

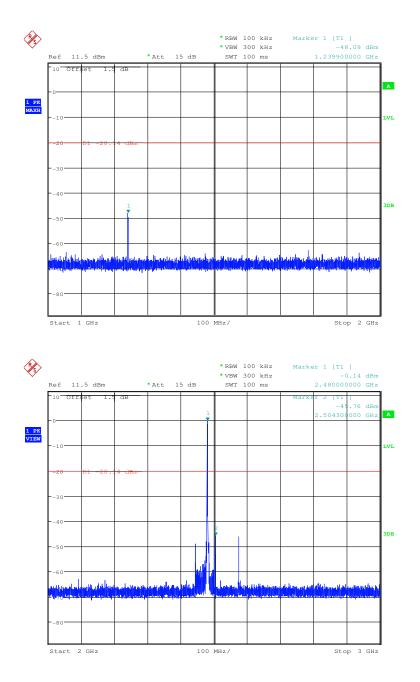




Report No.: SZEM150500230401 Page: 33 of 53

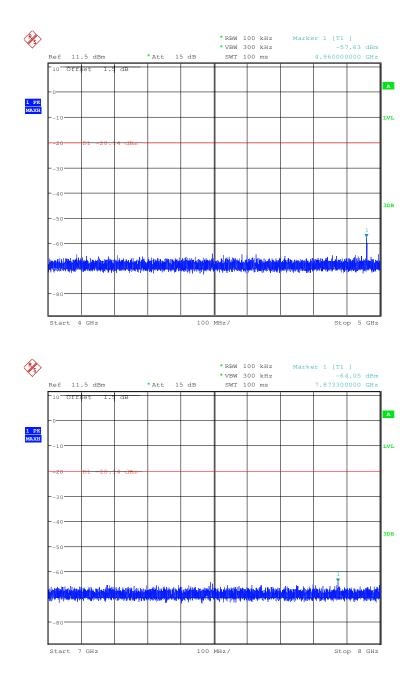



Report No.: SZEM150500230401 Page: 34 of 53

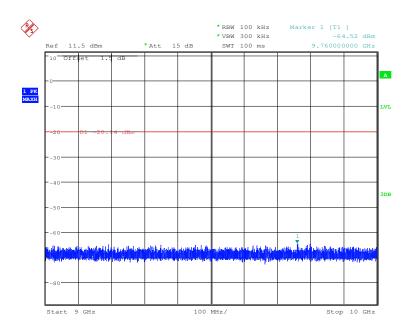

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150500230401 Page: 35 of 53

6.7 Radiated Spurious Emission

6.7.1 Spurious Emiss	ions							
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2009							
Test Site:	Measurement Distance	: 3n	n (Semi-Anecł	noic Cham	iber)			
Receiver Setup:	Frequency		Detector	RBW		VBW	Remark	Ī
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz		Peak	
	0.009MHz-0.090MH	z	Average	10kHz	z	30kHz	Average	
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z	30kHz	Quasi-peak	
	0.110MHz-0.490MH	z	Peak	10kHz	z	30kHz	Peak	
	0.110MHz-0.490MH	z	Average	10kHz	z	30kHz	Average	
	0.490MHz -30MHz		Quasi-peak	10kHz	z	30kHz	Quasi-peak	
	30MHz-1GHz		Quasi-peak	100 k⊢	lz :	300kHz	Quasi-peak	
	Above 1GHz		Peak	1MHz	<u>,</u>	3MHz	Peak	
			Peak	1MHz	2	10Hz	Average	
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark		Measureme distance (n	
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-		300	
	0.490MHz-1.705MHz	24	4000/F(kHz)	-		-	30	
	1.705MHz-30MHz		30	-	-		30	
	30MHz-88MHz		100	40.0	Quasi-peak		3	
	88MHz-216MHz		150	43.5	Quasi-peak		3	
	216MHz-960MHz		200	46.0	Quasi-peak		3	
	960MHz-1GHz	500		54.0	Quasi-peak		3	
	Above 1GHz	500		54.0	A	verage	3	
	Note: 15.35(b), frequency emissions is limit applicable to the e peak emission level rac	20c quip	B above the poment under t	maximum est. This p	pern	nitted ave	erage emissio	n



Report No.: SZEM150500230401 Page: 36 of 53

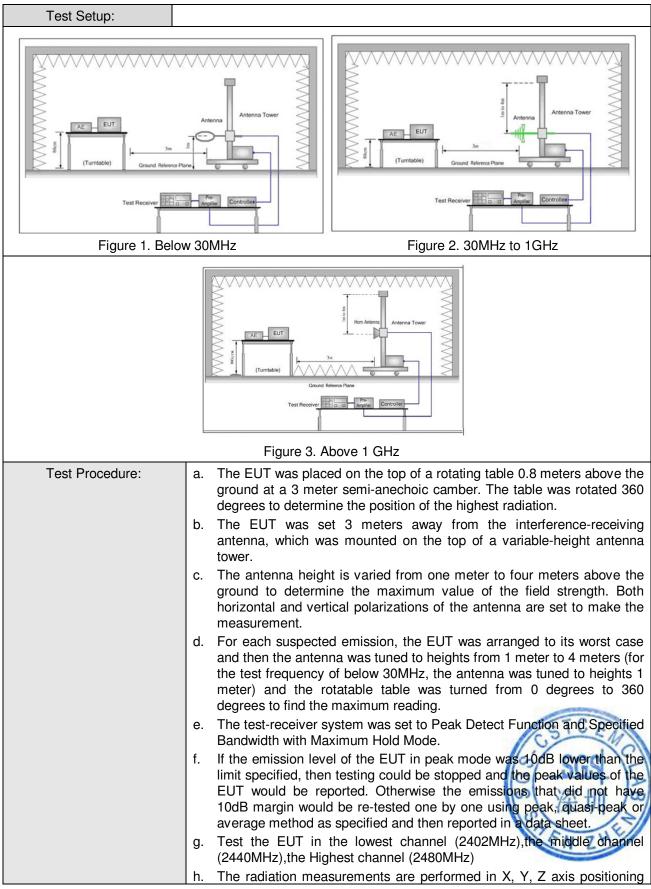



Report No.: SZEM150500230401 Page: 37 of 53


	for Transmitting mode, and found the X axis positioning which it is the worst case.i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Transmitting mode.
Final Test Mode:	For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150500230401 Page: 38 of 53

Radiated Emission below 1GHz						
30MHz~1GHz (QP)						
Test mode:	Transmitting	Vertical				

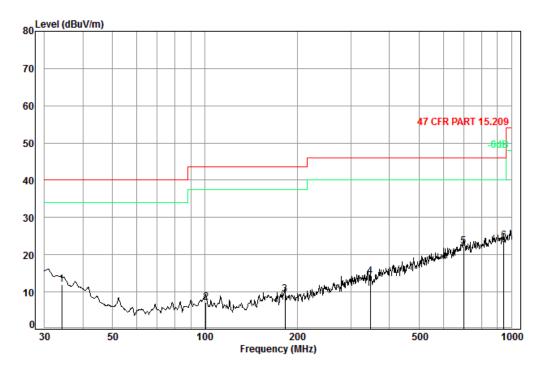

Condition: 47 CFR PART 15.209 3m Vertical Job No. : 2304CR Test mode: TX mode


	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	34.16	0.60	16.37	27.34	22.40	12.03	40.00	-27.97
2	100.93	1.20	9.05	27.19	24.22	7.28	43.50	-36.22
3	182.56	1.37	9.95	26.77	24.80	9.35	43.50	-34.15
4	346.81	2.05	14.01	26.77	24.79	14.08	46.00	-31.92
5	699.30	2.90	21.59	27.41	25.20	22.28	46.00	-23.72
6	945.44	3.65	23.30	26.58	23.43	23.80	46.00	-22.20



Report No.: SZEM150500230401 Page: 39 of 53

Test mode: Transmitting

Horizontal

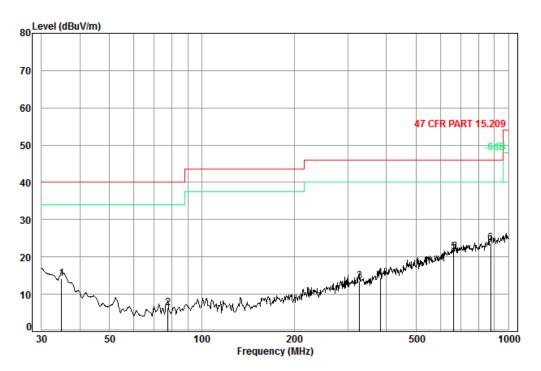

Condition: 47 CFR PART 15.209 3m Horizontal Job No. : 2304CR Test mode: TX mode

est	Freq	Cable		Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	34.88 77.59			27.34 27.23				
3	326.74	1.99	14.74	26.60	23.46	13.59	46.00	-32.41
4 5	382.59 663.47			27.01 27.46				
6	875.25	3.51	23.00	26.89	24.15	23.77	46.00	-22.23



Report No.: SZEM150500230401 Page: 40 of 53

Transmitter	Transmitter Emission above 1GHz									
Test mode:	Test mode: GFSK		Test	channel:	Lowest	Rema	ırk:	Peak		
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
3815.033	5.71	33.18	38.88	46.08	46.09	74	-27.91	Vertical		
4804.000	5.49	34.70	39.24	52.02	52.97	74	-21.03	Vertical		
5910.798	7.31	36.13	39.19	47.79	52.04	74	-21.96	Vertical		
7206.000	8.27	35.63	39.07	47.10	51.93	74	-22.07	Vertical		
9608.000	9.26	37.33	37.93	43.38	52.04	74	-21.96	Vertical		
11370.050	9.96	38.15	38.40	42.52	52.23	74	-21.77	Vertical		
3598.087	5.85	33.00	38.78	46.74	46.81	74	-27.19	Horizontal		
4804.000	5.49	34.70	39.24	50.05	51.00	74	-23.00	Horizontal		
6017.064	7.50	36.28	39.18	47.04	51.64	74	-22.36	Horizontal		
7206.000	8.27	35.63	39.07	47.00	51.83	74	-22.17	Horizontal		
9608.000	9.26	37.33	37.93	43.64	52.30	74	-21.70	Horizontal		
11312.310	9.91	38.14	38.38	44.10	53.77	74	-20.23	Horizontal		

Test mode:		GFSK		Test	channel:	Middle	Remark:		rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	fac	amp tor B)	Reading Level (dBµV)	Emission Level (dBµV/m)	Lin (dBµ\		Over limit (dB)	Polarization
3570.714	5.86	32.97	38.	77	46.44	46.50	74	1	-27.50	Vertical
4880.000	5.69	34.78	39.	26	48.57	49.78	74	1	-24.22	Vertical
6187.929	7.37	36.09	39.	16	46.18	50.48	74	1	-23.52	Vertical
7320.000	8.41	35.51	39.	06	46.67	51.53	74	1	-22.47	Vertical
9760.000	9.18	37.80	37.	84	43.17	52.31	74	1	-21.69	Vertical
11140.850	9.76	38.11	38.	29	43.86	53.44	74	1	-20.56	Vertical
3489.840	5.91	32.88	38.	74	46.74	46.79	74	1	-27.21	Horizontal
4880.000	5.69	34.78	39.	26	51.92	53.13	74	1	-20.87	Horizontal
5925.863	7.35	36.16	39.	19	46.78	51.10	74	1	-22.90	Horizontal
7320.000	8.41	35.51	39.	06	45.98	50.84	74	1	-23.16	Horizontal
9760.000	9.18	37.80	37.	84	43.61	52.75	74	1	-21.25	Horizontal
11027.980	9.66	38.10	38.	24	43.55	53.07	74	1	-20.93	Horizontal



Report No.: SZEM150500230401 Page: 41 of 53

Test mode:		GFSK	Test	channel:	Highest	Rema	ırk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
3489.840	5.91	32.88	38.74	46.46	46.51	74	-27.49	Vertical
4960.000	5.89	34.86	39.29	51.68	53.14	74	-20.86	Vertical
5865.832	7.21	36.04	39.20	47.43	51.48	74	-22.52	Vertical
7440.000	8.54	35.43	39.05	45.39	50.31	74	-23.69	Vertical
9920.000	9.09	38.27	37.75	43.80	53.41	74	-20.59	Vertical
11722.720	10.15	38.42	38.57	43.70	53.70	74	-20.30	Vertical
3616.451	5.83	33.01	38.79	47.53	47.58	74	-26.42	Horizontal
4960.000	5.89	34.86	39.29	48.82	50.28	74	-23.72	Horizontal
6047.776	7.47	36.25	39.18	46.96	51.50	74	-22.50	Horizontal
7440.000	8.54	35.43	39.05	46.55	51.47	74	-22.53	Horizontal
9920.000	9.09	38.27	37.75	42.64	52.25	74	-21.75	Horizontal
11112.520	9.74	38.11	38.28	44.13	53.70	74	-20.30	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Report No.: SZEM150500230401 Page: 42 of 53

6.8 Restricted bands around fundamental frequency

6.8 Restricted band	as around fundame	mai frequency				
Test Requirement:	47 CFR Part 15C Section 1	5.209 and 15.205				
Test Method:	ANSI C63.10 2009					
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)					
Limit:	Frequency	Limit (dBuV/m @3m)	Remark			
	30MHz-88MHz	40.0	Quasi-peak Value			
	88MHz-216MHz	43.5	Quasi-peak Value			
	216MHz-960MHz	46.0	Quasi-peak Value			
	960MHz-1GHz	54.0	Quasi-peak Value			
	Above 1GHz	54.0	Average Value			
	Above TGHZ	74.0	Peak Value			
T 101						
Test Setup:						
Figure 1. 30MHz Test Procedure:	to 1GHz a. The EUT was place the ground at a 3 rotated 360 degree radiation. b. The EUT was set antenna, which was tower. c. The antenna height the ground to dete Both horizontal and make the measuren d. For each suspected case and then the a meters and the rot degrees to find the re- specified Bandwidth f. Place a marker at transmit frequency emissions in the re-	d emission, the EUT was antenna was tuned to he atable table was turned t	1 GHz table 0.8 meters above amber. The table was osition of the highest e interference-receiving variable-height antenna er to four meters above e of the field strength. the antenna are set to s arranged to its worst ights from 1 meter to 4 from 0 degrees to 360 a Detect Function and de. d band closest to the Also measure any spectrum analyzer plot.			



Report No.: SZEM150500230401 Page: 43 of 53


	 g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. 			
Test Mode:	Transmitting with GFSK modulation.			
	Transmitting mode.			
Instruments Used:	Refer to section 5.10 for details.			
Test Results:	Pass			



Report No.: SZEM150500230401 Page: 44 of 53

Test plot as follows:

Test mode: GFSK Test channel: Lowest Remark: Peak Vertical

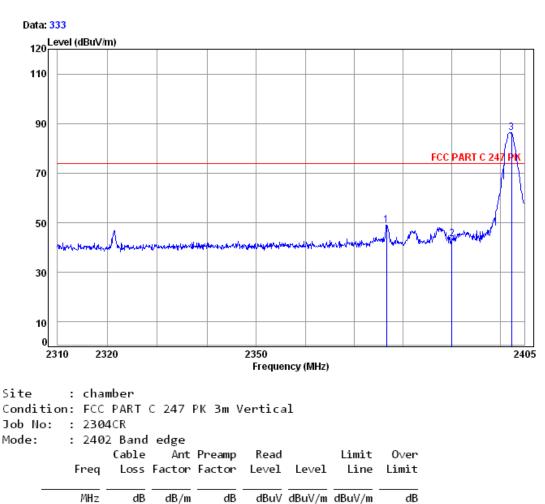


1	2376.58	4.88	32.26	38.46	50.48	49.16	74.00	-24.84
2	2390.00	4.90	32.35	38.46	44.81	43.60	74.00	-30.40
Зрр	2402.38	4.92	32.41	38.46	87.36	86.23	74.00	12.23



Report No.: SZEM150500230401 Page: 45 of 53

Test mode: GFSK Test ch	annel: Lowest	Remark: Peak	Horizontal
-------------------------	---------------	--------------	------------

Data: <mark>331</mark>

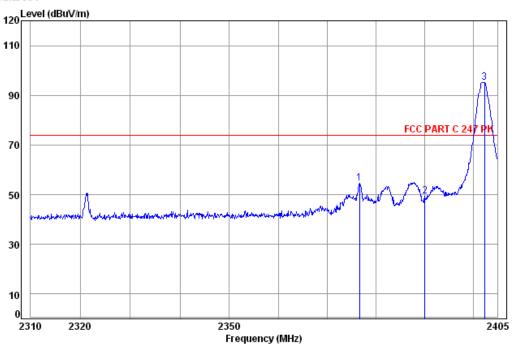

Site :	:	chamber
Condition:	:	FCC PART C 247 PK 3m Horizontal
Job No: :	:	2304CR
Mode: :	:	2402 Band edge


		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
			-			-	-	
1	2376.58	4.88	32.26	38.46	56.02	54.70	74.00	-19.30
2	2390.00	4.90	32.35	38.46	50.62	49.41	74.00	-24.59
Зрр	2402.38	4.92	32.41	38.46	96.37	95.24	74.00	21.24



Report No.: SZEM150500230401 Page: 46 of 53

Test mode: GFSK	Test channel:	Lowest	Remark:	Average	Vertical
-----------------	---------------	--------	---------	---------	----------

Data: 334

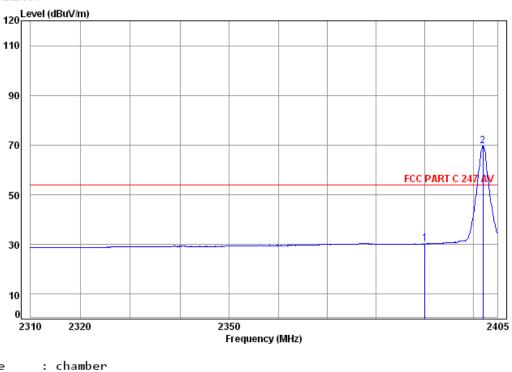


Site	: cha	mber						
Condit	ion: FCC	PART	C 247	AV 3mr∖	/ertica	1		
Job No	o: : 2304	4CR						
Mode:	: 240	2 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
							_	
1	2390.00		32.35				54.00	
2 pp	2402.00	4.92	32.41	38.46	70.81	69.68	54.00	15.68





Report No.: SZEM150500230401 Page: 47 of 53

Data: 332

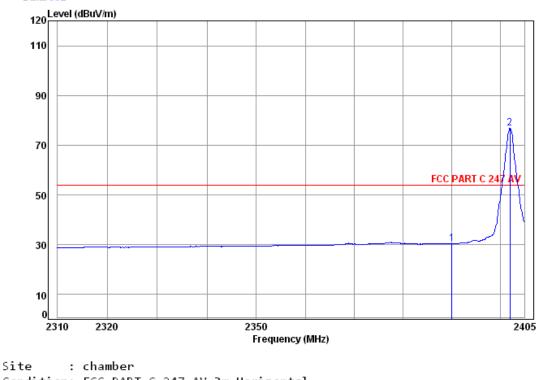

DI CC	. спа	ino e r						
Condi	tion: FCC	PART	C 247	AV 3m H	lorizor	ntal		
Job Ne	o: : 230	4CR						
Mode:	: 240	2 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	4.90	32.35	38.46	31.62	30.41	54.00	-23.59
2 pp	2402.00	4.92	32.41	38.46	78.06	76.93	54.00	22.93


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150500230401 Page: 48 of 53

Test mode: GFSK	Test channel:	Highest	Remark:	Peak	Vertical
-----------------	---------------	---------	---------	------	----------

Data: 335

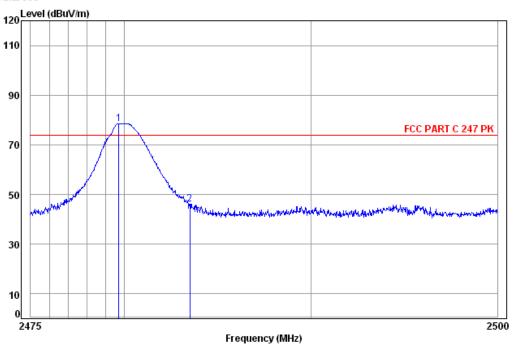


Job No	ion:	FCC 230			PK 3m ∖	/ertica	1		
			Cable	Ant	Preamp Factor			Limit Line	0∨er Limit
-		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 2		79.71 33.50			38.47 38.47				4.61 -27.91

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150500230401 Page: 49 of 53

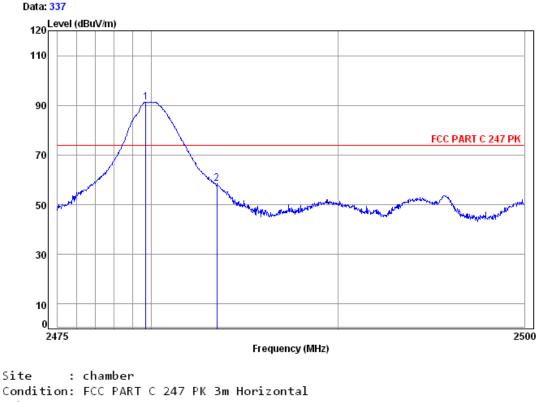


COULT	cron.	100	LANT	C 24/	1 1 2 11 1	011201	i car		
Job N	o: :	2304	4CR						
Mode:	:	248	0 Band	edge					
			Cable	Ant	Preamp	Read		Limit	0∨er
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp					38.47				
2	248	3.50	5.03	32.44	38.47	59.57	58.57	74.00	- 15.43



Report No.: SZEM150500230401 Page: 50 of 53

Test mode: GFSK	Test channel:	Highest	Remark:	Average	Vertical
-----------------	---------------	---------	---------	---------	----------

Data: 336

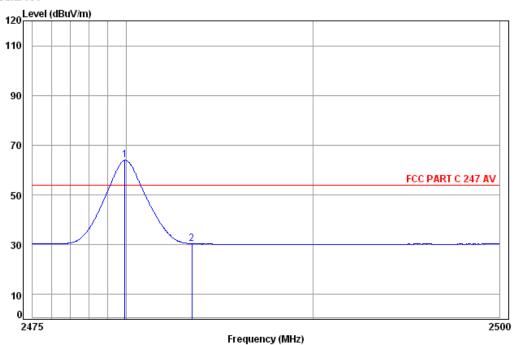


Site	: cha	mber						
Condit	ion: FCC	PART	C 247	AV 3m \	/ertica	1		
Job No	: : 2304	4CR						
Mode:	: 248	0 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
4	2470 02	F 00	22.44	70 47	64.00	C2.0F	F4 00	0.05
1 pp	2479.93			38.47			54.00	9.95
2	2483.50	5.03	32.44	38.47	31.39	30.39	54.00	-23.61




Report No.: SZEM150500230401 Page: 51 of 53

Test mode: GFSK	Test channel:	Highest	Remark:	Average	Horizontal
-----------------	---------------	---------	---------	---------	------------

Data: <mark>338</mark>

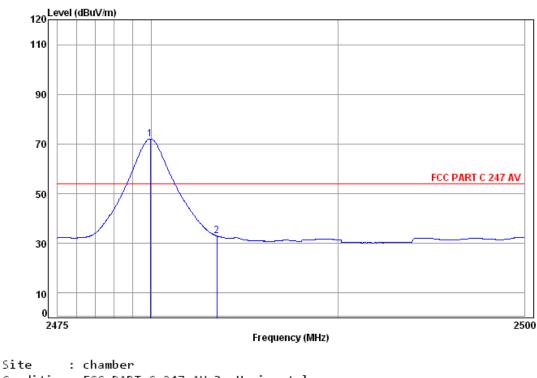

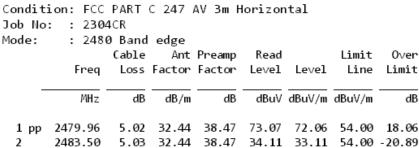

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor



Report No.: SZEM150500230401 Page: 52 of 53


7 Photographs - EUT Test Setup

Test model No.: 0435

7.1 Radiated Emission



7.2 Radiated Spurious Emission

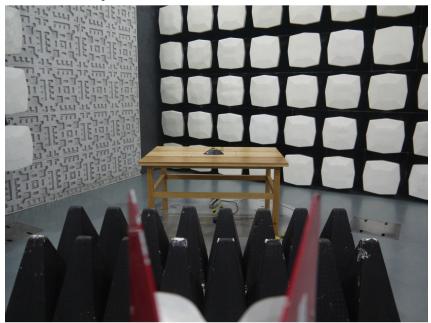



Report No.: SZEM150500230401 Page: 53 of 53

8 Photographs - EUT Constructional Details

Test model No.: 0435

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1505002304CR.