

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM140900493901

Email: ee.shenzhen@sqs.com Page: 1 of 50

# **FCC REPORT**

**Application No:** SZEM1409004939RF

**Applicant:** WowWee Group Limited **Manufacturer:** Wah Shing Toys Co., Ltd.

Factory: Everwin Toys (Dongguan) Co. Ltd.

Product Name: Rovio Pivot

Model No.(EUT): 0850

Trade Mark: WowWee FCC ID: OKP0850

Standards: 47 CFR Part 15, Subpart C (2013)

**Date of Receipt:** 2014-09-09

**Date of Test:** 2014-09-23 to 2014-10-09

**Date of Issue:** 2014-10-14

Test Result: PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

## Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140900493901

Page: 2 of 50

## 2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2014-10-14		Original		

Authorized for issue by:		
Tested By	Gack Huang) /Project Engineer	2014-10-09  Date
Prepared By	Sade Luo .  (Sade Luo) /Clerk	2014-10-14  Date
Checked By	Emen _ Li (Emen Li) /Reviewer	2014-10-16  Date



Report No.: SZEM140900493901

Page: 3 of 50

# 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207  ANSI C63.10 20		PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r02	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r02	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r02	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.: 0850

Only the model 0850 which has remote controller was tested, others have no remote controller, since the circuit design, PCB layout, electrical components used, internal wiring and functions were identical.



Report No.: SZEM140900493901

Page: 4 of 50

## 4 Contents

			Page
1	CC	OVER PAGE	1
2	VF	ERSION	2
3		EST SUMMARY	
4	CC	ONTENTS	4
-			
5	GE	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	7
	5.5	TEST LOCATION	7
	5.6	TEST FACILITY	8
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TE	EST RESULTS AND MEASUREMENT DATA	12
	6.1	Antenna Requirement	12
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	17
	6.4	6DB OCCUPY BANDWIDTH	20
	6.5	Power Spectral Density	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	26
	6.7	Spurious RF Conducted Emissions	
	6.8	RADIATED SPURIOUS EMISSION	
		8.1 Spurious Emissions	
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	41-50



Report No.: SZEM140900493901

Page: 5 of 50

## 5 General Information

## 5.1 Client Information

Applicant:	WowWee Group Limited				
Address of Applicant:	3/F, Energy Plaza, Suite 301 A-C, 92 Granville Road, T.S.T. East, Hong Kong.				
Manufacturer:	Wah Shing Toys Co., Ltd.				
Address of Manufacturer:	5/F., Wah Shing Centre, 5 Fung Yip street, Chai Wan, Hong Kong				
Factory:	Everwin Toys (Dongguan) Co. Ltd.				
Address of Factory:	Xie Keng Village, Qing Xi Town, Dongguan City, Guangdong Province, China.				

# 5.2 General Description of EUT

Product Name:	Rovio Pivot	
Model No.	0850	
Trade Mark:	WowWee	
Operation Frequency:	2402MHz~2480MHz	
Bluetooth Version:	4.0	
Modulation Type:	GFSK	
Number of Channel:	40	
Sample Type:	Portable production	
Test Power Grade:	Manufacturer declare	
Test Software of EUT:	Manufacturer declare	
Antenna Type and Gain:	Type :Integral	
	Gain :1.4dBi	
AC Adapter:	Model No.:RSS1006-150050-S	
	Input: 100-240V ~ 50/60Hz 0.6A	
	Output: 5.0V 3.0A	
	Output Power:15.0W MAX.	
Adapter cable:	190cm	



Report No.: SZEM140900493901

Page: 6 of 50

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	
The Lowest channel	2402MHz	
The Middle channel	2440MHz	
The Highest channel	2480MHz	



Report No.: SZEM140900493901

Page: 7 of 50

## 5.3 Test Environment

Operating Environment:				
Temperature:	20.0 °C			
Humidity:	55 % RH			
Atmospheric Pressure:	1005 mbar			

# 5.4 Description of Support Units

The EUT has been tested independent unit.

## 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

# SGS

#### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140900493901

Page: 8 of 50

# 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

## 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

## 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM140900493901

Page: 9 of 50

# 5.10 Equipment List

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16	
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16	



Report No.: SZEM140900493901

Page: 10 of 50

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10	
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24	
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24	
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24	
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16	
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24	
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29	
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29	
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29	
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29	
13	Band filter	Amindeon	82346	SEL0094	2015-05-16	
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16	
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24	
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16	
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24	
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04	



Report No.: SZEM140900493901

Page: 11 of 50

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM140900493901

Page: 12 of 50

## 6 Test results and Measurement Data

## 6.1 Antenna Requirement

Standard requirement:

47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

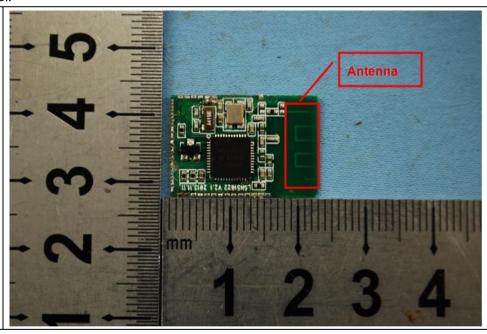

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.4dBi.



Report No.: SZEM140900493901

Page: 13 of 50


## 6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207						
Test Method:	ANSI C63.10: 2009						
Test Frequency Range:	150kHz to 30MHz						
Limit:	Limit (dBuV)						
	Frequency range (MHz)	Quasi-peak	Average				
	0.15-0.5 66 to 56* 56 to 46*						
	0.5-5	46					
	5-30	60	50				
	* Decreases with the logarithm	n of the frequency.					
Test Procedure:	<ol> <li>The mains terminal disturb room.</li> </ol>	· ·					
	<ul> <li>room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω line impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT will placed on the horizontal ground reference plane.</li> <li>4) The test was performed with a vertical ground reference plane. The real of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of</li> </ul>						



Report No.: SZEM140900493901

Page: 14 of 50

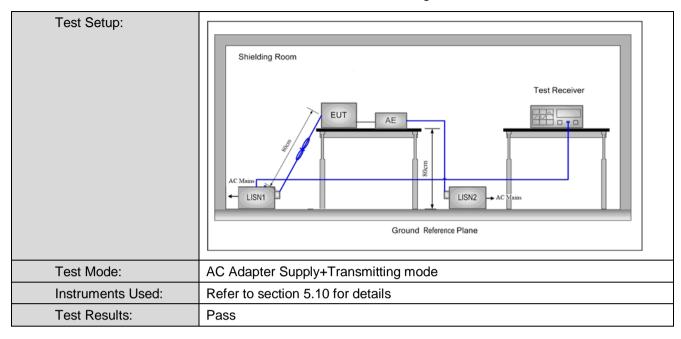



Report No.: SZEM140900493901


Page: 15 of 50

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

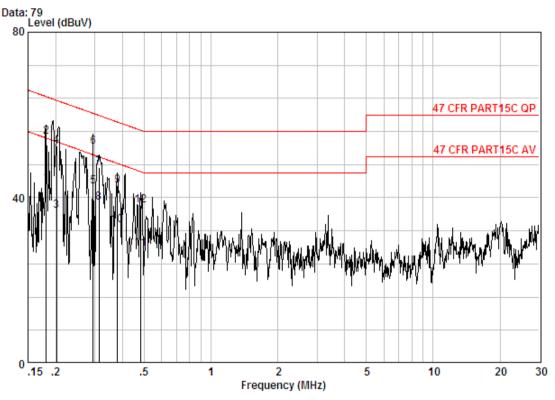

Site : Shielding Room

Condition : 47 CFR PART15C QP CE LINE

Job.No : 4939RF

Mode : AC adapter supply+TX mode


	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 2	0.18152 0.18152	0.02	9.70 9.70		43.40 54.65			Average
3	0.20200	0.02		27.20		53.53	-16.61	Average
5 @ 6	0.29398	0.01		33.08		50.41	-7.62	Average
7	0.31328	0.01	9.72	37.54	47.27	59.88	-12.61	
9	0.37912	0.01	9.78	33.23	43.02	58.30	-15.28	QP
10 11 12	0.37912 0.48119 0.48119	0.01	9.78 9.80 9.80	17.83		46.32	-18.67	Average Average OP



Report No.: SZEM140900493901

Page: 16 of 50

#### Neutral line:

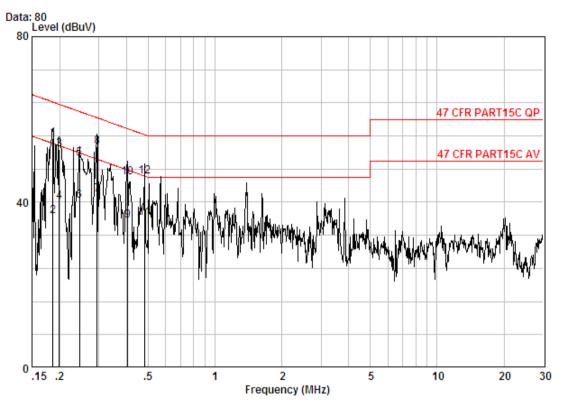

Site : Shielding Room

Condition : 47 CFR PART15C QP CE NEUTRAL

Job.No : 4939RF

Mode : AC adapter supply+TX mode

	Frea	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18600	0.02	9.70	45.70	55.42	64.21	-8.79	QP
2	0.18600	0.02	9.70	26.80	36.52	54.21	-17.69	Average
3	0.19863	0.02	9.70	42.99	52.71	63.67	-10.95	QP
4	0.19863	0.02	9.70	30.48	40.20	53.67	-13.47	Average
5	0.24552	0.02	9.70	40.78	50.49	61.91	-11.42	QP
6	0.24552	0.02	9.70	30.72	40.43	51.91	-11.48	Average
7	0.29398	0.01	9.70	32.16	41.87	50.41	-8.55	Average
8 @	0.29398	0.01	9.70	43.79	53.50	60.41	-6.91	QP
9	0.40400	0.01	9.80	25.64	35.45	47.77	-12.32	Average
10	0.40400	0.01	9.80	36.20	46.01	57.77	-11.76	QP
11	0.48119	0.01	9.80	26.29	36.10	46.32	-10.21	Average
12	0.48119	0.01	9.80	36.40	46.21	56.32	-10.11	QP

#### Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140900493901

Page: 17 of 50

## 6.3 Conducted Peak Output Power

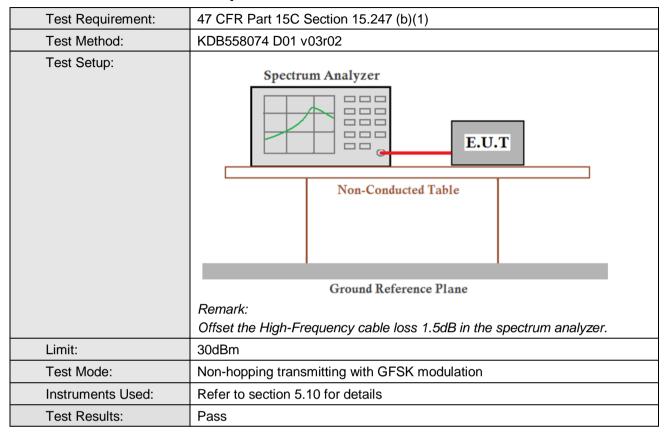

#### **Measurement Data**

GFSK mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	4.42	30.00	Pass			
Middle	4.21	30.00	Pass			
Highest	3.92	30.00	Pass			




Report No.: SZEM140900493901


Page: 18 of 50

## Test plot as follows:

Test mode: GFSK Test channel: Lowest

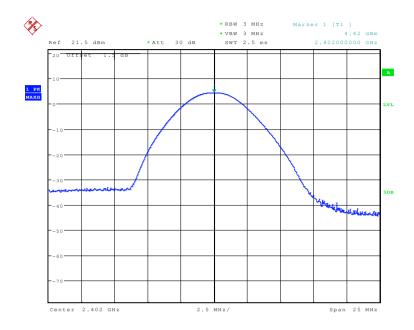

Test mode: GFSK Test channel: Middle

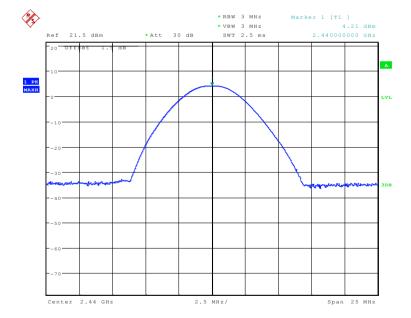




Report No.: SZEM140900493901

Page: 19 of 50

Test mode: GFSK Test channel: Highest

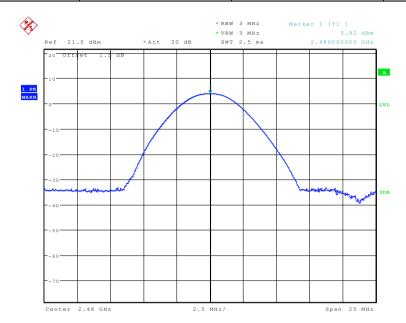




Report No.: SZEM140900493901

Page: 20 of 50

# 6.4 6dB Occupy Bandwidth

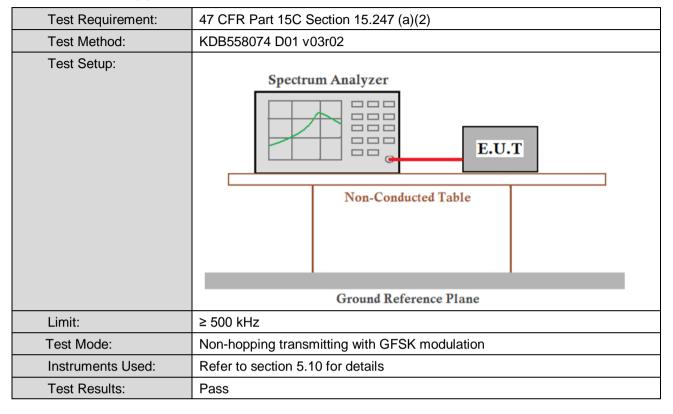

#### **Measurement Data**

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.668269230769	≥500	Pass
Middle	0.677884615385	≥500	Pass
Highest	0.673076923077	≥500	Pass






Report No.: SZEM140900493901


Page: 21 of 50

## Test plot as follows:

Test mode: GFSK Test channel: Lowest

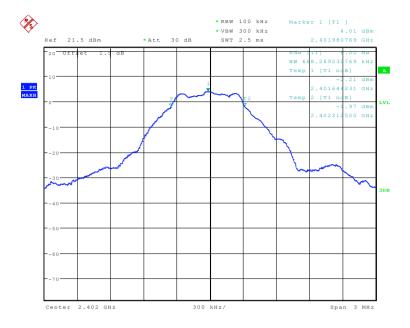

Test mode: GFSK Test channel: Middle

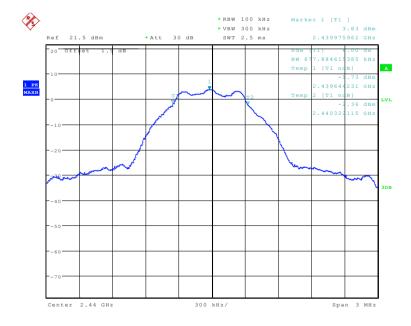




Report No.: SZEM140900493901

Page: 22 of 50

Test mode: GFSK Test channel: Highest

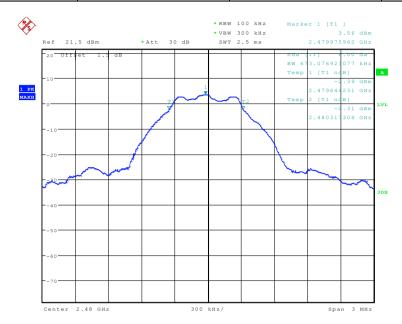




Report No.: SZEM140900493901

Page: 23 of 50

# 6.5 Power Spectral Density

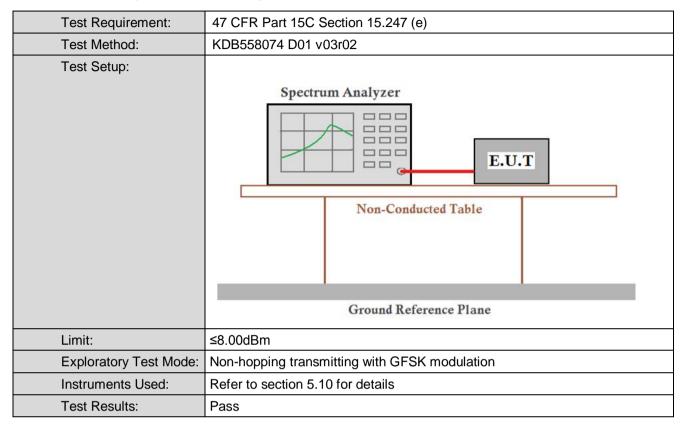

#### **Measurement Data**

	GFSK mode		
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	3.99	≤8.00	Pass
Middle	3.81	≤8.00	Pass
Highest	3.50	≤8.00	Pass




Report No.: SZEM140900493901


Page: 24 of 50

## Test plot as follows:

Test mode: GFSK Test channel: Lowest

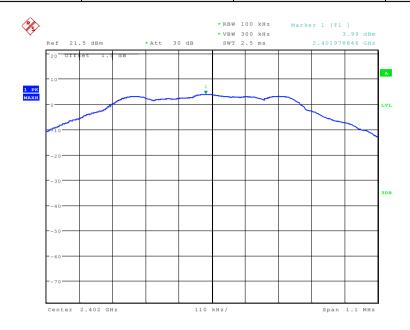

Test mode: GFSK Test channel: Middle

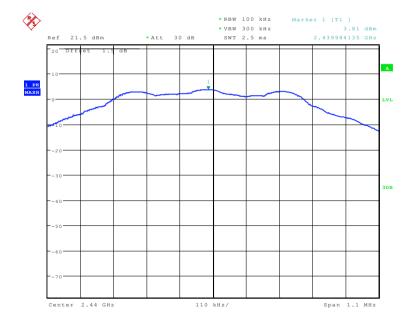




Report No.: SZEM140900493901

Page: 25 of 50

Test mode: GFSK Test channel: Highest

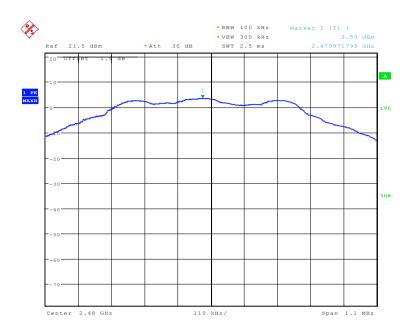




Report No.: SZEM140900493901

Page: 26 of 50

## 6.6 Band-edge for RF Conducted Emissions

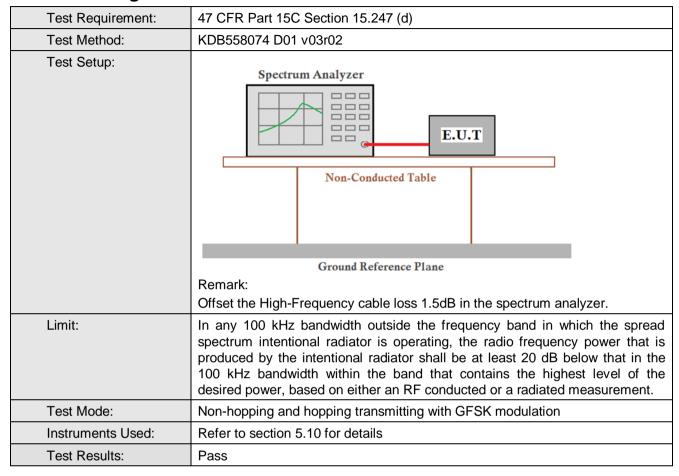




Report No.: SZEM140900493901


Page: 27 of 50

## Test plot as follows:

Test mode: GFSK Test channel: Lowest

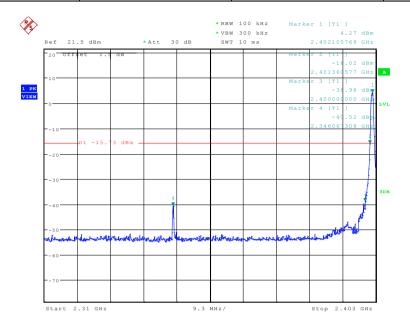

Test mode: GFSK Test channel: Highest

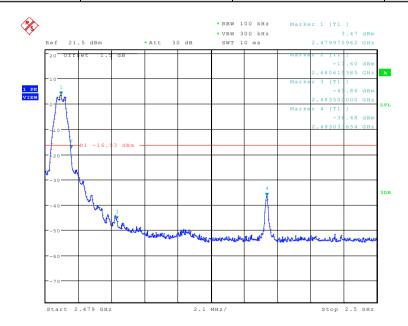



Report No.: SZEM140900493901

Page: 28 of 50

# 6.7 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01 v03r02
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Non-hopping transmitting with GFSK modulation
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM140900493901

Page: 29 of 50

## Test plot as follows:

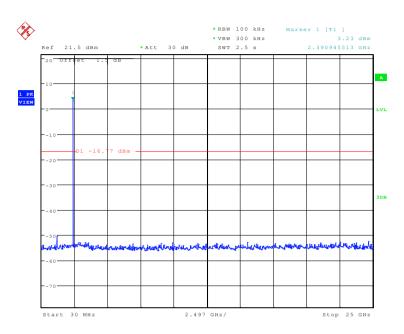


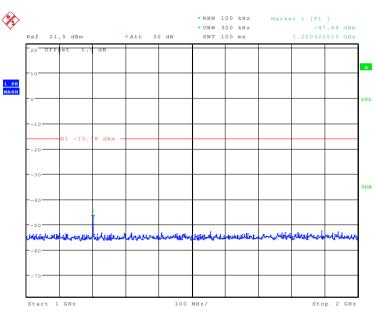




Report No.: SZEM140900493901

Page: 30 of 50

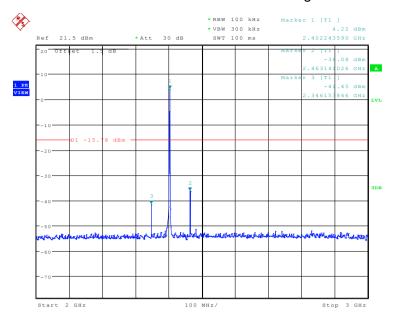

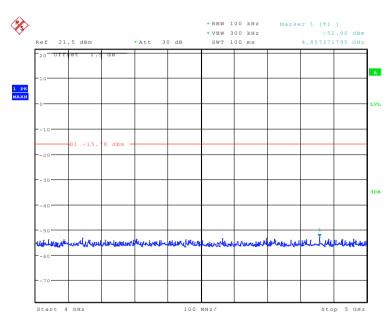







Report No.: SZEM140900493901

Page: 31 of 50

Test mode: GFSK Test channel: Middle

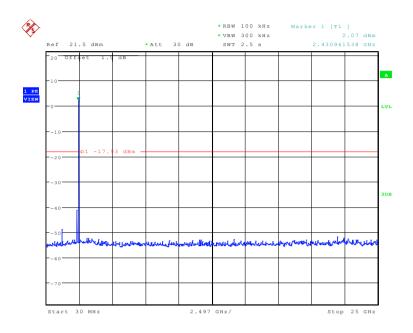


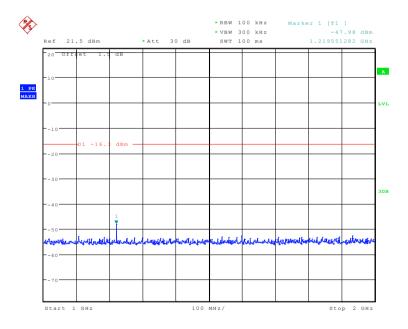




Report No.: SZEM140900493901

Page: 32 of 50

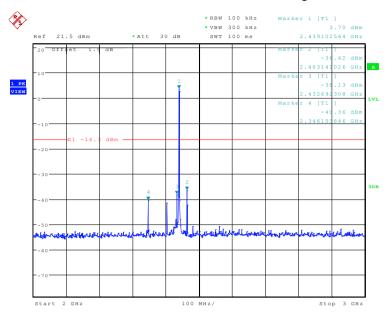

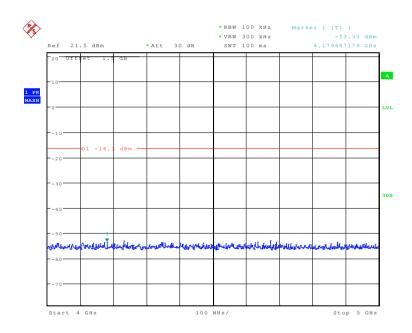





Report No.: SZEM140900493901

Page: 33 of 50

Test mode: GFSK Test channel: Highest

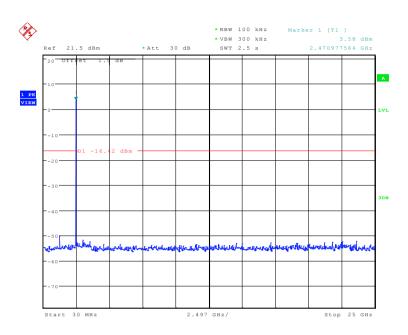

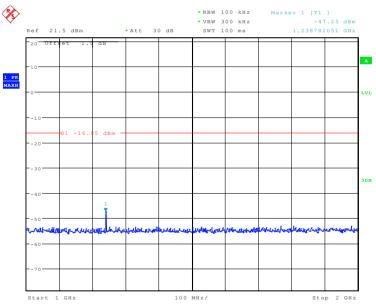




Report No.: SZEM140900493901

Page: 34 of 50

Stop 5 GHz

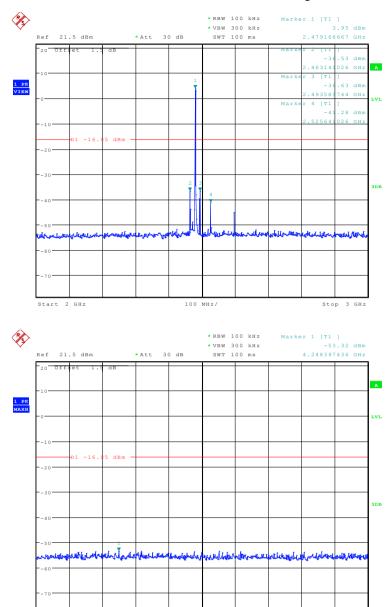

#### Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.

100 MHz/

4 GHz





Report No.: SZEM140900493901

Page: 35 of 50

# 6.8 Radiated Spurious Emission

6.8.1 Spurious Emissions							
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10 2009						
Test Site:	Measurement Distance	: 3n	n (Semi-Anech	noic Cham	ber)		
Receiver Setup:	Frequency Detector RBW				VBW	Remark	
	0.009MHz-0.090MH	Z	Peak	10kHz	z 30kHz	Peak	
	0.009MHz-0.090MH	Z	Average	10kHz	z 30kHz	Average	
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak	
	0.110MHz-0.490MH	Z	Peak	10kHz	z 30kHz	Peak	
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average	
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak	
	30MHz-1GHz Quasi		Quasi-peak	100 kH	Iz 300kHz	Quasi-peak	
	Above 1GHz		Peak	1MHz	3MHz	Peak	
	Above IGHZ		Peak	1MHz	10Hz	Average	
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)	
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300	
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30	
	1.705MHz-30MHz		30	-	-	30	
	30MHz-88MHz		100	40.0	Quasi-peal	k 3	
	88MHz-216MHz	MHz-216MHz 150		43.5	Quasi-peal	k 3	
	216MHz-960MHz	216MHz-960MHz 200		46.0	Quasi-peal	k 3	
	960MHz-1GHz	//Hz-1GHz 500		54.0	Quasi-peal	k 3	
	Above 1GHz 500 54.0 Average 3					3	
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.						
Test Setup:							

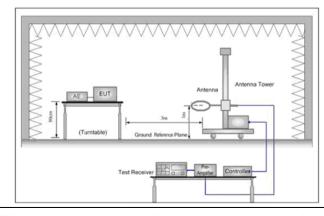

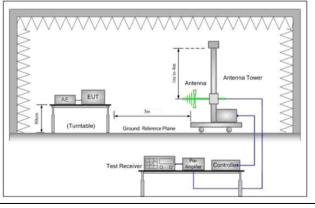



Report No.: SZEM140900493901

Page: 36 of 50

Figure 1. Below 30MHz Figure 2. 30MHz to 1GHz Figure 3. Above 1 GHz Test Procedure: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse Repeat above procedures until all frequencies measured was complete. **Exploratory Test** Non-hopping transmitting mode with all kind of modulation and all kind of data type AC Adapter Supply+Transmitting mode Mode: Instruments Used: Refer to section 5.10 for details Test Results: Pass




Report No.: SZEM140900493901

Page: 37 of 50

Radiated Emission below 1GHz							
30MHz~1GHz (QP)							
Test mode:	AC Adapter Supply+Transmitting	Vertical					



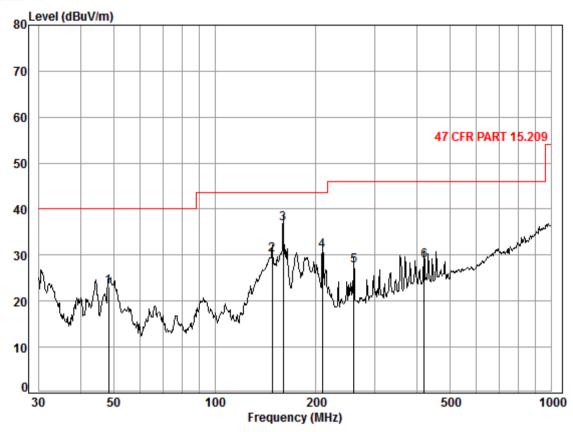

Condition: 47 CFR PART 15.209 3m 3142C Vertical

Job No. : 4939RF

Mode : AC adapter supply+TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	48.33	0.77	9.00	27.30	40.54	23.01	40.00	-16.99
2	147.92	1.31	8.81	26.91	46.97	30.18	43.50	-13.32
3	159.78	1.34	9.60	26.86	52.71	36.79	43.50	-6.71
4	208.58	1.45	10.65	26.67	45.43	30.86	43.50	-12.64
5	259.23	1.72	12.49	26.51	39.89	27.59	46.00	-18.41
6	419.11	2.28	16.38	27.25	37.45	28.86	46.00	-17.14




Report No.: SZEM140900493901

Page: 38 of 50

Test mode: AC Adapter Supply+Transmitting Horizontal

Data: 12

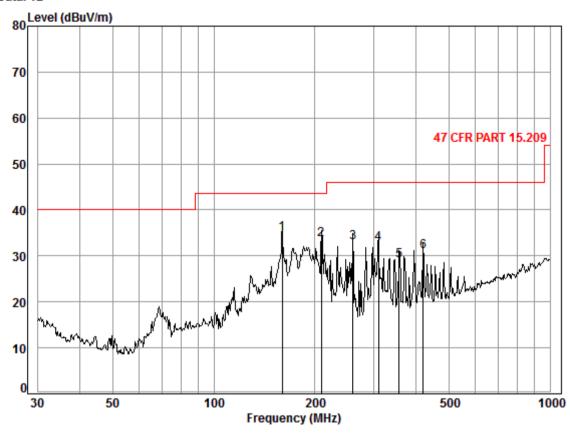

Condition: 47 CFR PART 15.209 3m 3142C Horizontal

Job No. : 4939RF

Mode : AC adapter supply+TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	159.78	1.34	9.60	26.86	50.77	34.85	43.50	-8.65
2	208.58	1.45	10.65	26.67	48.07	33.50	43.50	-10.00
3	259.23	1.72	12.49	26.51	45.22	32.92	46.00	-13.08
4	308.91	1.93	14.24	26.46	42.91	32.62	46.00	-13.38
5	355.43	2.08	15.56	26.83	38.28	29.09	46.00	-16.91
6	419.11	2.28	16.38	27.25	39.54	30.95	46.00	-15.05



Report No.: SZEM140900493901

Page: 39 of 50

Transmitte	er Emis	sion above	e 1GHz					
Test mode:		GFSK	Test	channel:	Lowest	Rer	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line	- I I imit	Polarization
3616.451	5.11	33.01	38.79	45.78	45.11	74	-28.89	Vertical
4804.000	5.63	34.70	39.24	46.85	47.94	74	-26.06	Vertical
6032.401	6.65	36.26	39.18	46.31	50.04	74	-23.96	Vertical
7206.000	6.80	35.63	39.07	45.95	49.31	74	-24.69	Vertical
9608.000	8.94	37.33	37.93	44.27	52.61	74	-21.39	Vertical
11994.380	9.31	38.69	38.70	44.24	53.54	74	-20.46	Vertical
3672.110	5.06	33.06	38.82	46.64	45.94	74	-28.06	Horizontal
4804.000	5.63	34.70	39.24	46.03	47.12	74	-26.88	Horizontal
6299.178	6.51	35.96	39.15	46.68	50.00	74	-24.00	Horizontal
7206.000	6.80	35.63	39.07	45.88	49.24	74	-24.76	Horizontal
9608.000	8.94	37.33	37.93	43.79	52.13	74	-21.87	Horizontal
12117.140	9.11	38.85	38.80	44.40	53.56	74	-20.44	Horizontal

Test mode:	(	3FSK	Test	channel:	Middle	Rema	rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB <sub>µ</sub> V)	Emission Level (dB <sub>µ</sub> V/m)	Limit (dBμV/m)	Over limit (dB)	Polarization
3607.257	5.12	33.01	38.79	46.55	45.89	74	-28.11	Vertical
4880.000	5.61	34.78	39.26	46.33	47.46	74	-26.54	Vertical
5925.863	6.27	36.16	39.19	46.02	49.26	74	-24.74	Vertical
7320.000	6.73	35.51	39.06	46.56	49.74	74	-24.26	Vertical
9760.000	8.84	37.80	37.84	43.48	52.28	74	-21.72	Vertical
11994.380	9.31	38.69	38.70	43.82	53.12	74	-20.88	Vertical
3662.775	5.07	33.05	38.81	45.92	45.23	74	-28.77	Horizontal
4880.000	5.61	34.78	39.26	45.77	46.90	74	-27.10	Horizontal
6017.064	6.68	36.28	39.18	45.73	49.51	74	-24.49	Horizontal
7320.000	6.73	35.51	39.06	45.94	49.12	74	-24.88	Horizontal
9760.000	8.84	37.80	37.84	44.21	53.01	74	-20.99	Horizontal
11903.140	9.35	38.60	38.66	44.35	53.64	74	-20.36	Horizontal



Report No.: SZEM140900493901

Page: 40 of 50

Test mode:		GFSK	Test	channel:	Highest		Remark:		Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB <sub>µ</sub> V)	Emission Level (dB <sub>µ</sub> V/m)		mit uV/m)	Over limit (dB)	Polarization
3983.750	5.19	33.47	38.94	46.02	45.74	7	74	-28.26	Vertical
4960.000	5.60	34.86	39.29	45.37	46.54	7	74	-27.46	Vertical
5986.509	6.63	36.27	39.19	45.83	49.54	7	74	-24.46	Vertical
7440.000	6.72	35.43	39.05	46.04	49.14	7	74	-24.86	Vertical
9920.000	9.19	38.27	37.75	43.24	52.95	7	74	-21.05	Vertical
11933.470	9.34	38.63	38.67	44.56	53.86	7	74	-20.14	Vertical
3681.469	5.05	33.06	38.82	46.83	46.12	7	74	-27.88	Horizontal
4960.000	5.60	34.86	39.29	45.34	46.51	7	74	-27.49	Horizontal
6331.329	6.56	35.91	39.15	46.15	49.47	7	74	-24.53	Horizontal
7440.000	6.72	35.43	39.05	46.12	49.22	7	74	-24.78	Horizontal
9920.000	9.19	38.27	37.75	42.63	52.34	7	74	-21.66	Horizontal
11515.680	9.71	38.24	38.47	43.66	53.14	7	74	-20.86	Horizontal

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
  - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.







Report No.: SZEM140900493901

Page: 41 of 50

# 6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15	5.209 and 15.205								
Test Method:	ANSI C63.10 2009									
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 10Hz	54.0	Average Value							
	Above 1GHz	74.0	Peak Value							
			_							
Test Setup:										

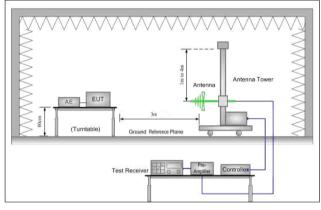

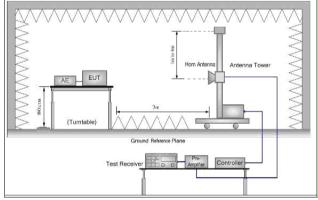

Repeat for each power and modulation for lowest and highest

Figure 1. 30MHz to 1GHz	Figure 2. Above 1 GHz
Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest
	radiation.
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength.  Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any
	emissions in the restricted bands. Save the spectrum analyzer plot.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

channel



Report No.: SZEM140900493901

Page: 42 of 50

	<ul> <li>g. Test the EUT in the lowest channel , the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type AC Adapter Supply+Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM140900493901

Page: 43 of 50

#### Test plot as follows:

Restricted bands around fundamental frequency								
Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Vertical		

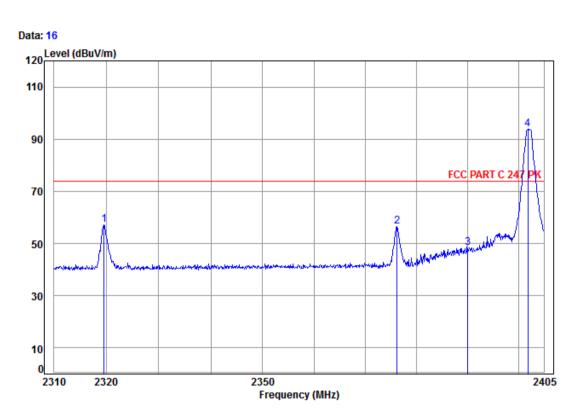

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 4939RF

Mode: : 2402 Bandedge

		Aux	Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Factor	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2319.52	0.00	3.31	31.88	38.45	60.60	57.34	74.00	-16.66
2	2376.10	0.00	3.35	32.25	38.46	59.35	56.49	74.00	-17.51
3	2390.00	0.00	3.36	32.35	38.46	51.13	48.38	74.00	-25.62
4 pp	2401.80	0.00	3.37	32.41	38.46	96.37	93.69	74.00	19.69




Report No.: SZEM140900493901

Page: 44 of 50

Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Horizontal	
------------	------	---------------	--------	---------	------	------------	--



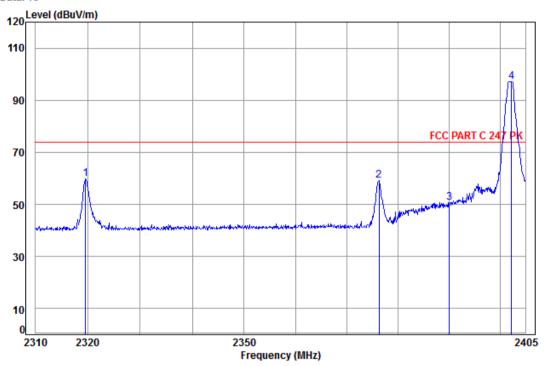

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 4939RF

Mode: : 2402 Bandedge

		Aux	Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Factor	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2319.52	0.00	3.31	31.88	38.45	63.00	59.74	74.00	-14.26
2	2376.19	0.00	3.35	32.26	38.46	62.14	59.29	74.00	-14.71
3	2390.00	0.00	3.36	32.35	38.46	53.39	50.64	74.00	-23.36
4 pp	2402.29	0.00	3.37	32.41	38.46	99.90	97.22	74.00	23.22


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140900493901

Page: 45 of 50



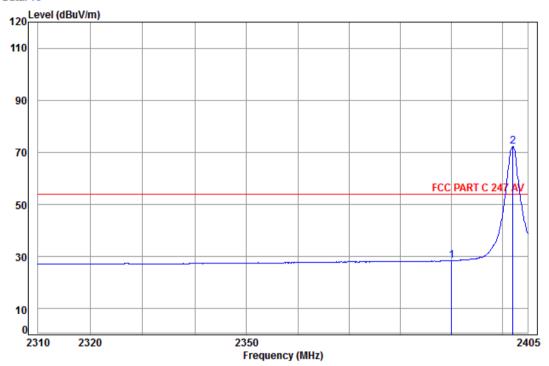

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 4939RF

Mode: : 2402 Bandedge

		Aux	Cable	Ant	Preamp	Kead		Limit	Over
	Freq	Factor	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	0.00	3.36	32.35	38.46	31.21	28.46	54.00	-25.54
2 pp	2402.09	0.00	3.37	32.41	38.46	74.91	72.23	54.00	18.23




Report No.: SZEM140900493901

Page: 46 of 50

Test	mode:	GFSK	Test channel:	Lowest	Remark:	Average	Horizontal
------	-------	------	---------------	--------	---------	---------	------------

Data: 17

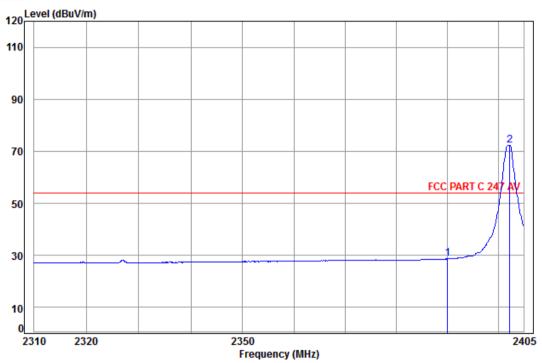

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 4939RF

1

Mode: : 2402 Bandedge

Ant Preamp Aux Cable Read Limit 0ver Loss Factor Factor Freq Factor Level Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB dB/m dB 2390.00 0.00 3.36 32.35 38.46 31.42 28.67 54.00 -25.33 3.37 32.41 38.46 75.06 72.38 54.00 18.38 2 pp 2402.29 0.00




Report No.: SZEM140900493901

Page: 47 of 50

|--|



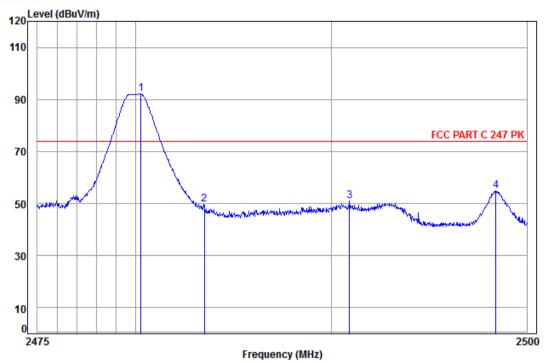

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 4939RF

Mode: : 2480 Bandedge

		Aux	Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Factor	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2480.28	0.00	3.46	32.44	38.47	94.68	92.11	74.00	18.11
2	2483.50	0.00	3.47	32.44	38.47	52.32	49.76	74.00	-24.24
3	2490.92	0.00	3.48	32.44	38.47	53.42	50.87	74.00	-23.13
4	2498.42	0.00	3.49	32.45	38.47	57.34	54.81	74.00	-19.19




Report No.: SZEM140900493901

Page: 48 of 50

Test mode:   GFSK   Test channel:   Highest   Remark:   Peak   Horizo	Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Horizontal
---	------------	------	---------------	---------	---------	------	------------



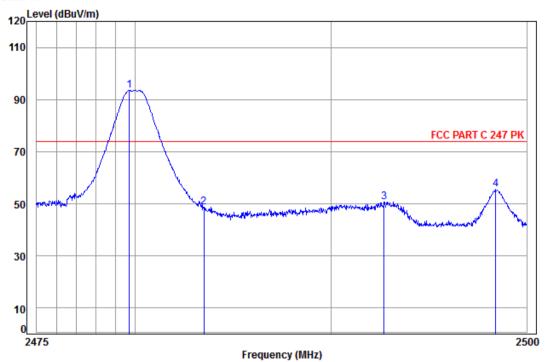

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 4939RF

Mode: : 2480 Bandedge

					Preamp				
	Freq	Factor	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2479.71	0.00	3.46	32.44	38.47	96.06	93.49	74.00	19.49
2	2483.50	0.00	3.47	32.44	38.47	51.19	48.63	74.00	-25.37
3	2492.70	0.00	3.48	32.44	38.47	53.17	50.62	74.00	-23.38
4	2498.42	0.00	3.49	32.45	38.47	58.03	55.50	74.00	-18.50

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140900493901

Page: 49 of 50

Test mode: GFSK Test channel: Highest Remark: Average Vertical
--



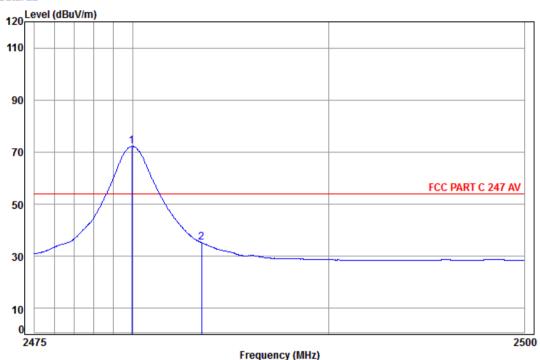

Trequency

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 4939RF

1 2

Mode: : 2480 Bandedge

	Frea					Limit
		 	 dB	 		
					,	
pp	2479.96 2483.50					




Report No.: SZEM140900493901

Page: 50 of 50

Test mode:	GFSK	Test channel:	Highest	Remark:	Average	Horizontal
------------	------	---------------	---------	---------	---------	------------



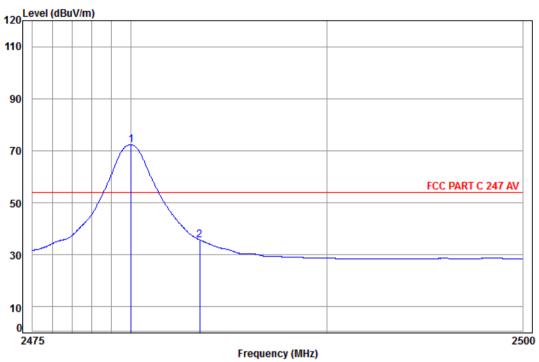

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 4939RF

Mode: : 2480 Bandedge

		Aux	Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Factor	Loss	Factor	Factor	Level	Level	Line	Limit	
	_									
	MHz	dB	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
							•	•		
מם	2480.01	0.00	3.46	32,44	38.47	74.85	72.28	54.00	18.28	
	2483.50									
	2.00.00	0.00	2.47	22.11	20.47	JU. JI	22.72	200	10.23	

#### Note:

1 2

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

