

APPENDIX 5


USER'S MANUAL OF EUT

The enclosed manual is for the EUT. As you will notice on the preceding page of this manual is the **FCC WARNING** about radio and television interference as per the requirement set forth in Part 15 of the FCC Rules.

User Manual

LCD Monitor

10.4"



FCC Statement :

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in & particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment of and on, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note : A shield-type video signal cable is required in order to meet FCC emission limits and to prevent interference with nearby radio and TV reception. It is essential that only the supplied signal cable be used.

Table of Contents

Chapter 1	Installation - Small Frame	1
Chapter 2	Operation	2
Chapter 3	OSD	3
Appendix A	Specifications	4
Appendix B	Timing	5



WARNING !

Please apply **ONLY** a small amount of water on the soft cloths or paper for monitor cleaning.

DO NOT USE ANY CHEMICAL SOLUTIONS.

警告！

請使用軟布或紙，沾少量水，輕輕擦拭顯示器。

勿使用任何化學溶劑。

Vorsich !


Bitte benutzen sie nur kleine menge wasser mit tuch oder papier, um bildschrim zauberzumachen.

Benutzen Sie Bitte Keine Kemikolische Stoff.



CH-1 Installation

This model is very versatile, so there are many options as follows : Frame, Terminal, Stand, Control button, Brightness.

Rear Panel

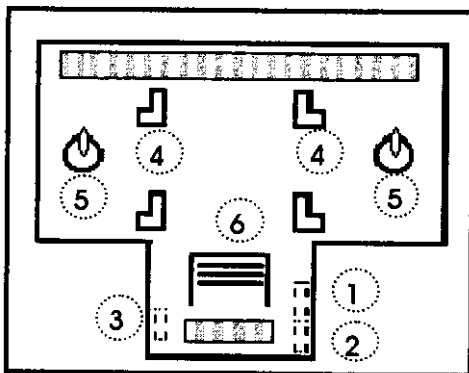

Stand



Vertical
25° tilt

Triangle
110° tilt

Type I : 1 RGB : Connect to port of VGA card in PC.
2 Adapter : Connect to Adapter's socket.
3 No connection.

Type II : 1 RGB
2 Adapter
3 RS232 : Connect to RS232 port in PC.
(For Touch screen)

Type III : 1 RCA : Connect to RCA port in Video Player or PC .
2 S-Video : Connect to S-Video port in Video Player or PC.
3 Adapter


4 Slots of fixed Stand.





5 Hanging holes for wall mounting

6 Locker : Press locker by hand or tool,
then the stand can be disassembled.

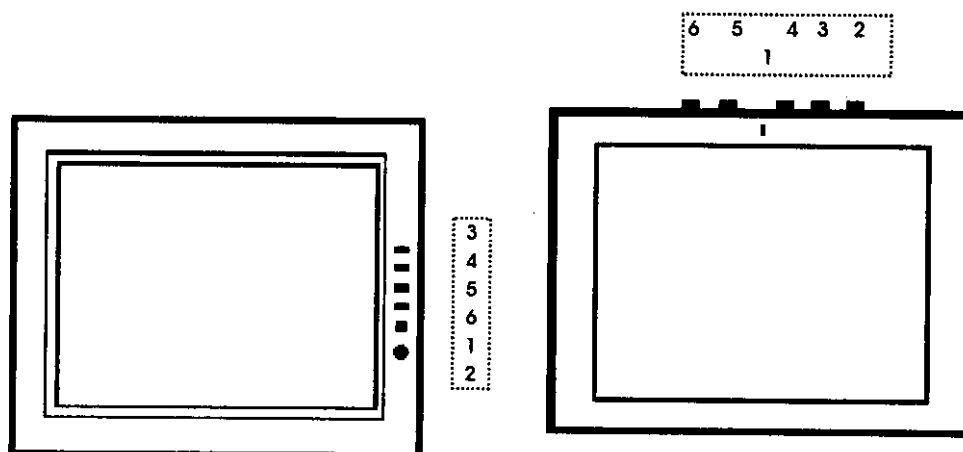CH-2 Operation

User Control Buttons on Front Panel



- 1 LED
LED will light green under normal state, if no signal input
the LED will flash red and Monitor will turn into
" Power saving Mode " after 5 seconds.
- 2  Power
- 3  i. Activate OSD or quit OSD.
ii. Select OSD's page.
- 4  Select sub item of OSD
- 5/6  Increase / decrease the value of item