

FCC RADIO TEST REPORT

FCC ID: OKUSB0307

Product Name : 37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL

Trade Mark : SYLVANIA, PROSCAN, MONSTER

Main Model : SB3713-OP

SB-0307,SB3713-XX,SB-XXXXXX

Additional Model : (X means unit color and Buyer different, it can A to Z or N/A, the number of "X" can vary according to actual demand)

Report No. : UNIA21081211ER-01

Prepared for

SHENZHEN JUNLAN ELECTRONIC LTD

No.277 PingKui Road, Shijing Community, Pingshan Street, Pingshan New District,
Shenzhen, China

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant..... : SHENZHEN JUNLAN ELECTRONIC LTD

Address..... : No.277 PingKui Road, Shijing Community, Pingshan Street,
Pingshan New District, Shenzhen, China

Manufacturer..... : SHENZHEN JUNLAN ELECTRONIC LTD

Address..... : No.277 PingKui Road, Shijing Community, Pingshan Street,
Pingshan New District, Shenzhen, China

Product description

Product Name..... : 37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL

Trade Mark..... : SYLVANIA, PROSCAN, MONSTER

Model Name..... : SB3713-OP

SB-0307,SB3713-XX,SB-XXXXXX

Test Methods..... : (X means unit color and Buyer different, it can A to Z or N/A, the number
of "X" can vary according to actual demand)

This device described above has been tested by Shenzhen United Testing Technology Co.,
Ltd., and the test results show that the equipment under test (EUT) is in compliance with the
FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this
document may be altered or revised by Shenzhen United Testing Technology Co., Ltd.,
personnel only, and shall be noted in the revision of the document.

Date of Test..... :

Date (s) of performance of tests..... : July 21 ~ July 31, 2021

Date of Issue : July 31, 2021

Test Result..... : Pass

kahn.yang

Prepared by:

Kahn yang/Editor

Sky dong

Reviewer:

Sky dong/Supervisor

Liuze

Approved & Authorized Signer:

Liuze/Manager

Table of Contents

1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST.....	6
1.2 RELATED SUBMITTAL(S) / GRANT (S)	8
1.3 TEST METHODOLOGY	8
1.4 EQUIPMENT MODIFICATIONS.....	8
1.5 SUPPORT DEVICE.....	8
1.6 TEST FACILITY AND LOCATION	9
1.7 SUMMARY OF TEST RESULTS	10
2. SYSTEM TEST CONFIGURATION	11
2.1 EUT CONFIGURATION	11
2.2 SPECIAL ACCESSORIES.....	11
2.3 DESCRIPTION OF TEST MODES.....	11
3. FREQUENCY HOPPING SYSTEM REQUIREMENTS.....	12
3.1 STANDARD AND LIMIT.....	12
3.2 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	12
3.3 FREQUENCY HOPPING SYSTEM	13
4. AC POWER LINE CONDUCTED EMISSIONS.....	14
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
4.2 TEST CONDITION.....	14
4.3 MEASUREMENT RESULTS	14
5. RADIATED EMISSION.....	19
5.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
5.2 MEASUREMENT PROCEDURE.....	20
5.3 LIMIT.....	21
5.4 MEASUREMENT RESULTS	21
6. CHANNEL SEPARATION	47
6.1 MEASUREMENT PROCEDURE.....	47
6.2 LIMIT.....	47
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	47
6.4 MEASUREMENT RESULTS	47
7. 20DB BANDWIDTH.....	52
7.1 MEASUREMENT PROCEDURE.....	52
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	52
7.3 MEASUREMENT RESULTS	52

8. HOPPING CHANNEL NUMBER.....	56
8.1 MEASUREMENT PROCEDURE.....	56
8.2 LIMIT.....	56
8.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	56
8.4 MEASUREMENT RESULTS	56
9. TIME OF OCCUPANCY (DWELL TIME)	58
9.1 MEASUREMENT PROCEDURE.....	58
9.2 LIMIT.....	58
9.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	58
9.4 MEASUREMENT RESULTS	58
10. MAXIMUM PEAK OUTPUT POWER.....	63
10.1 MEASUREMENT PROCEDURE	63
10.2 LIMIT.....	63
10.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	63
10.4 MEASUREMENT RESULTS.....	63
11. BAND EDGE.....	67
11.1 MEASUREMENT PROCEDURE	67
11.2 LIMIT.....	67
11.3 MEASUREMENT RESULTS.....	67
12. ANTENNA APPLICATION	78
12.1 ANTENNA REQUIREMENT	78
12.2 MEASUREMENT RESULTS.....	78
13. CONDUCTED SPURIOUS EMISSIONS.....	79
13.1 MEASUREMENT PROCEDURE	79
13.2 LIMIT.....	79
13.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	79
13.4 MEASUREMENT RESULTS.....	79
14. TEST EQUIPMENT LIST.....	83



Revision History of This Test Report

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

Product Name:	SHENZHEN JUNLAN ELECTRONIC LTD
Trade Mark:	SYLVANIA, PROSCAN, MONSTER
Main Model:	SB3713-OP
Additional Model:	SB-0307, SB3713-XX, SB-XXXXXX (X means unit color and Buyer different, it can A to Z or N/A, the number of "X" can vary according to actual demand)
Model Difference:	All models are identical in interior structure, electrical circuits and components, only different in model name and color, Therefore, only model SB3713-OP is for tests.
FCC ID:	OKUTSB0307
Operation	2402MHz~2480MHz
Number of Channels:	79CH
Modulation Type:	GFSK, π/4 DQPSK, 8DPSK
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Hardware Version:	V1.0
Software Version:	V1.0
Adapter:	Adapter 1: Model: GKYZD0200120US Input: AC100-240V 50/60Hz 1.5A Max Output: DC 12V/2.0A Adapter 2: Model: JY024120200AA-UL Input: AC100-240V 50/60Hz 1.5A Max Output: DC 12V/2.0A
Bluetooth Version:	5.0 BR+EDR

Bluetooth Channel List

Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461		

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency and test software see below:

Channel	Frequency (MHz)
1	2402
40	2441
79	2480

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: OKUSB0307 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

Description	Manufacturer	Model	S/N
Mobile phone	Xiaomi	M1906G7E	25838/09WA04445



1.6 Test Facility and Location

Test Firm : Shenzhen United Testing Technology Co., Ltd.

Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd,
Tiegang Community, Xixiang Str, Bao'an District, Shenzhen,
China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

The Designation Number is CN1227

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 21947

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

FCC Rules	Description Of Test	Uncertainty	Result
§15.207 (a)	AC Power Line Conducted Emission	±1.06dB	Compliant
§15.247(d),§15.209, §15.205	Radiated Emission	±3.70dB	Compliant
§15.247(a)(1)	Channel Separation	±1.42 x10 ⁻⁴ %	Compliant
§15.247(a)(1)	20dB Bandwidth	±1.42 x10 ⁻⁴ %	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	±1.42 x10 ⁻⁴ %	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	±5%	Compliant
§15.247(b)	Max Peak Output Power	±1.06dB	Compliant
§15.247(d)	Band Edge	±1.70dB	Compliant
§15.203	Antenna Requirement	N/A	Compliant
§15.247(d)	Conducted Spurious Emission	±1.70dB	Compliant

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3, DH5, 2-DH1, 2-DH3, 2-DH5, 3-DH1, 3-DH3, 3-DH5 mode in all modulation type GFSK, $\pi/4$ -DQPSK and 8DPSK were tested.

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

Test Item	Software	Description
Conducted RF Testing and Radiated testing	BT_Tool	Set the EUT to different modulation and channel

Output power setting table:

Test Mode	Set Tx Output Power	Data rate
GFSK	7dBm	DH1
$\pi/4$ -DQPSK	7dBm	2-DH1
8DPSK	7dBm	3-DH1



3. FREQUENCY HOPPING SYSTEM REQUIREMENTS

3.1 Standard and Limit

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2 EUT Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 34, 51, 72, 09, 01, 64, 22, 33, 41, 32, 47, 65, 73, 53, 69, 06, 17, 04, 20, 36, 52, 38, 66, 70, 78, 68, 76, 21, 29, 10, 26, 49, 00, 58, 44, 59, 75, 13, 03, 14, 11, 35, 43, 37, 50, 61, 77, 55, 71, 02, 23, 07, 27, 39, 54, 46, 48, 15, 63, 62, 67, 25, 31, 12, 28, 19, 60, 42, 57, 74, 16, 05, 18, 30, 45, etc.

The system receiving have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.


This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with a bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements FCC Part 15.247 rule.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 Test SET-UP (Block Diagram of Configuration)

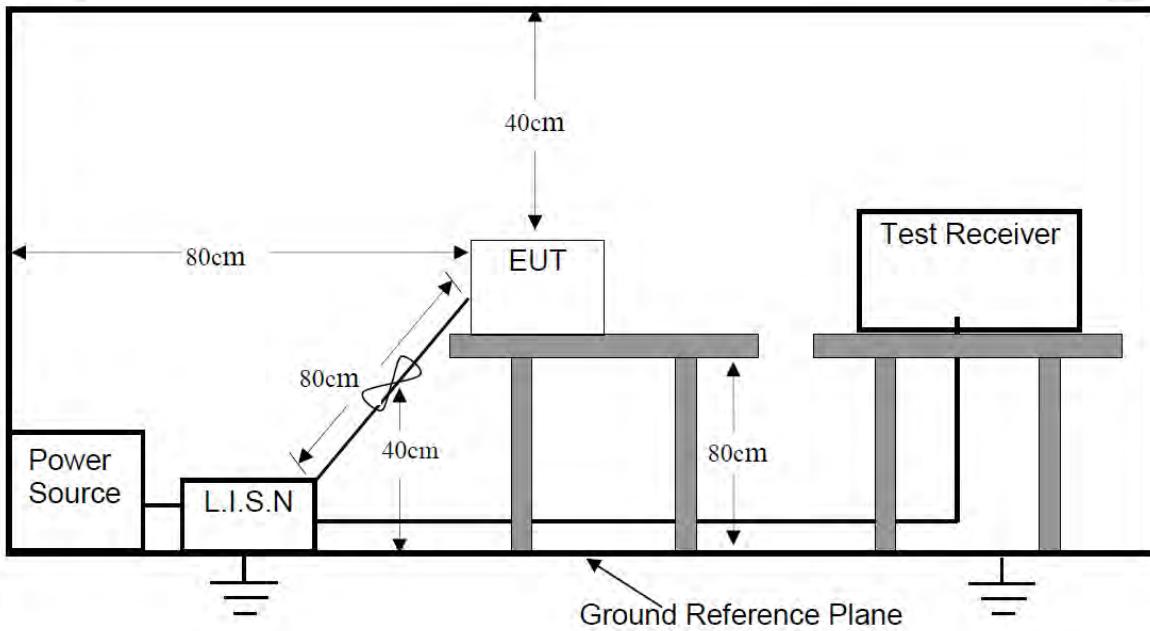

4.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150kHz ~ 30MHz

Detector: QP, AVG

Operation Mode: BT Communication

4.3 Measurement Results


PASS

Please refer to the following pages of the worst case

We have been tested for all available U.S. Voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/ 60Hz is shown in the report.

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Phase:	Line
Model No.:	SB3713-OP	Temperature:	25 °C
Test Mode:	On with Bluetooth	Humidity:	50 %
Test Voltage:	AC 120V/60Hz	Test By:	Liao
Test Results:	PASS		
Adapter	JY024120200AA-UL		

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

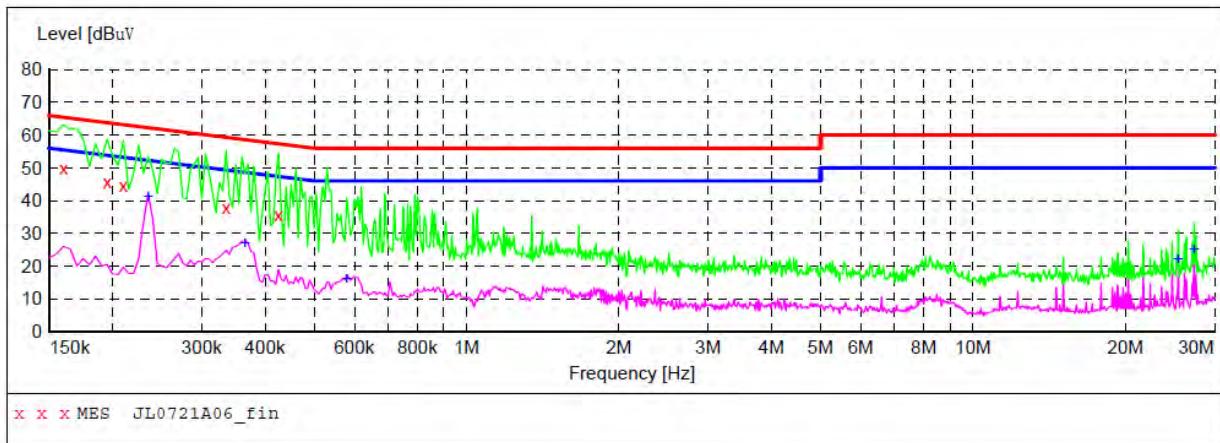

MEASUREMENT RESULT: "JL0721A06_fin"

2021-7-21 9:44

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.160000	49.90	10.1	66	15.6	QP	L1	GND
0.195000	45.90	10.1	64	17.9	QP	L1	GND
0.210000	44.50	10.1	63	18.7	QP	L1	GND
0.335000	37.70	10.3	59	21.6	QP	L1	GND
0.425000	35.60	10.3	57	21.7	QP	L1	GND


MEASUREMENT RESULT: "JL0721A06_fin2"

2021-7-21 9:44

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.235000	41.30	10.1	52	11.0	AV	L1	GND
0.365000	27.00	10.3	49	21.6	AV	L1	GND
0.580000	16.20	10.4	46	29.8	AV	L1	GND
25.433437	22.10	11.0	50	27.9	AV	L1	GND
27.328254	25.00	11.0	50	25.0	AV	L1	GND

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Phase:	Neutral
Model No.:	SB3713-OP	Temperature:	25 °C
Test Mode:	On with Bluetooth	Humidity:	50 %
Test Voltage:	AC 120V/60Hz	Test By:	Liao
Test Results:	PASS		
Adapter	JY024120200AA-UL		

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

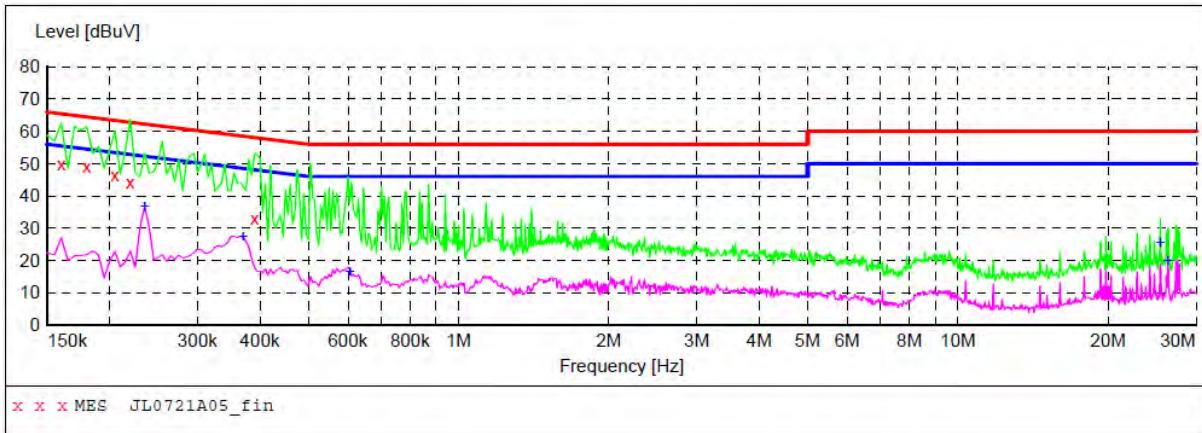

MEASUREMENT RESULT: "JL0721A05_fin"

2021-7-21 9:41

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.160000	49.80	10.1	66	15.7	QP	N	GND
0.180000	48.90	10.1	65	15.6	QP	N	GND
0.205000	46.50	10.1	63	16.9	QP	N	GND
0.220000	44.20	10.1	63	18.6	QP	N	GND
0.390000	33.10	10.3	58	25.0	QP	N	GND


MEASUREMENT RESULT: "JL0721A05_fin2"

2021-7-21 9:41

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.235000	36.60	10.1	52	15.7	AV	N	GND
0.370000	27.30	10.3	49	21.2	AV	N	GND
0.605000	16.50	10.4	46	29.5	AV	N	GND
25.433437	25.30	11.0	50	24.7	AV	N	GND
26.363828	19.70	11.0	50	30.3	AV	N	GND

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Phase:	Line
Model No.:	SB3713-OP	Temperature:	25 °C
Test Mode:	On with Bluetooth	Humidity:	50 %
Test Voltage:	AC 120V/60Hz	Test By:	Liao
Test Results:	PASS		
Adapter	GKYZD0200120US		

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

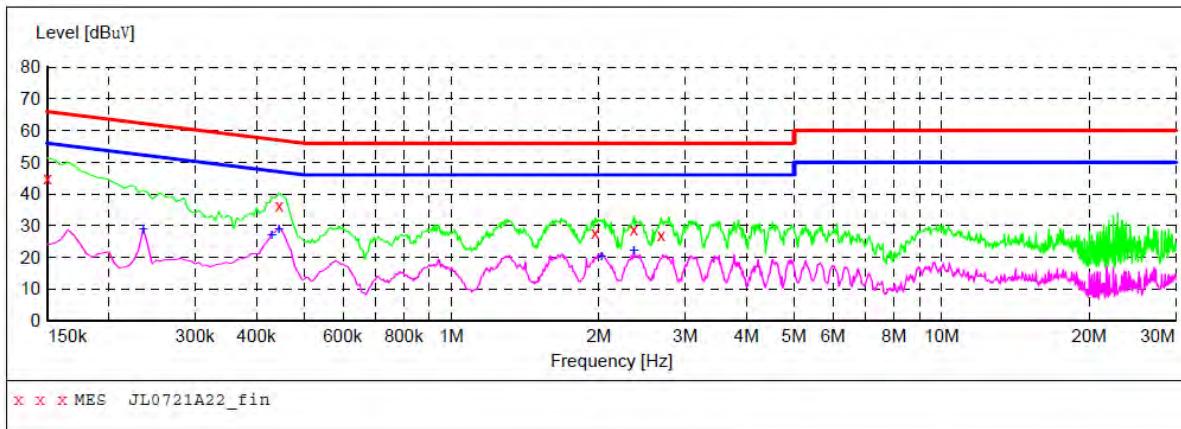

MEASUREMENT RESULT: "JL0721A22_fin"

2021-7-21 11:05

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	45.10	10.1	66	20.9	QP	L1	GND
0.445000	36.30	10.4	57	20.7	QP	L1	GND
1.965000	27.60	10.3	56	28.4	QP	L1	GND
2.355658	28.70	10.3	56	27.3	QP	L1	GND
2.676647	27.00	10.3	56	29.0	QP	L1	GND


MEASUREMENT RESULT: "JL0721A22_fin2"

2021-7-21 11:05

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.235000	29.00	10.1	52	23.3	AV	L1	GND
0.430000	26.80	10.3	47	20.5	AV	L1	GND
0.445000	28.80	10.4	47	18.2	AV	L1	GND
2.024096	20.40	10.3	46	25.6	AV	L1	GND
2.355658	22.00	10.3	46	24.0	AV	L1	GND

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Phase:	Neutral
Model No.:	SB3713-OP	Temperature:	25 °C
Test Mode:	On with Bluetooth	Humidity:	50 %
Test Voltage:	AC 120V/60Hz	Test By:	Liao
Test Results:	PASS		
Adapter	GKYZD0200120US		

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

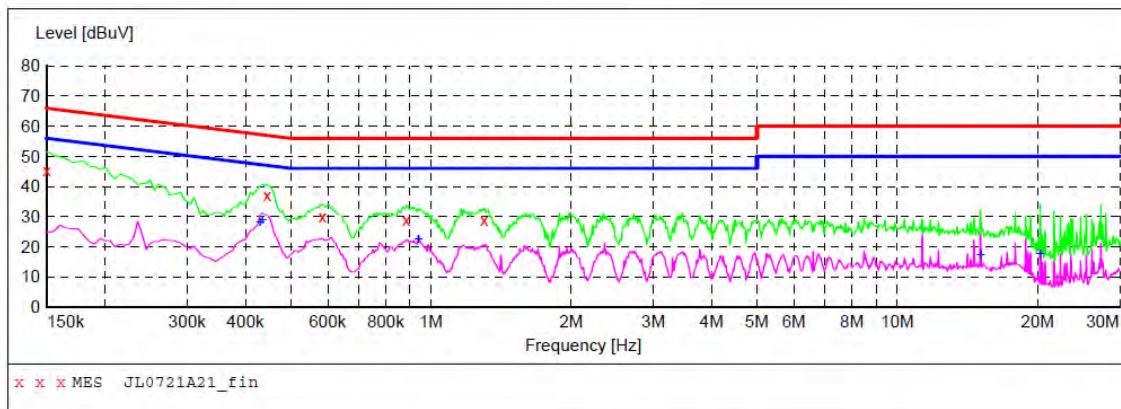

MEASUREMENT RESULT: "JL0721A21_fin"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	45.30	10.1	66	20.7	QP	N	GND
0.445000	37.20	10.4	57	19.8	QP	N	GND
0.585000	30.10	10.4	56	25.9	QP	N	GND
0.885000	29.00	10.3	56	27.0	QP	N	GND
1.300000	28.70	10.4	56	27.3	QP	N	GND



MEASUREMENT RESULT: "JL0721A21_fin2"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.430000	28.10	10.3	47	19.2	AV	N	GND
0.435000	29.00	10.3	47	18.2	AV	N	GND
0.940000	22.30	10.4	46	23.7	AV	N	GND
15.076088	17.40	10.6	50	32.6	AV	N	GND
20.257387	17.80	10.8	50	32.2	AV	N	GND


5. RADIATED EMISSION

5.1 Test SET-UP (Block Diagram of Configuration)

5.1.1 Radiated Emission Test Set-Up, Frequency below 30MHz

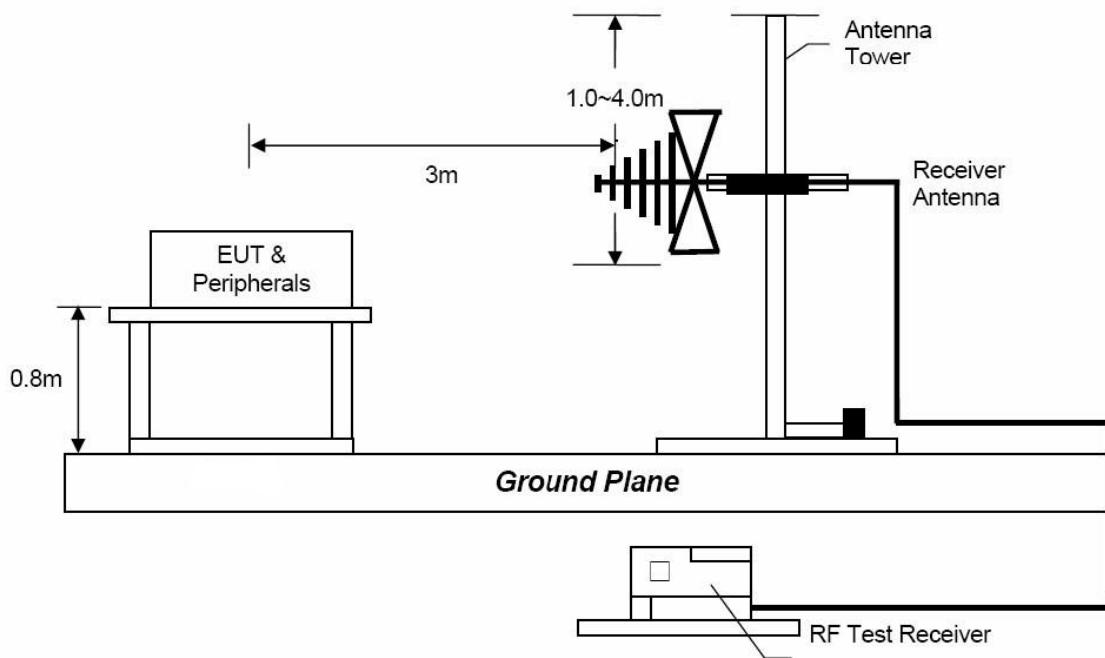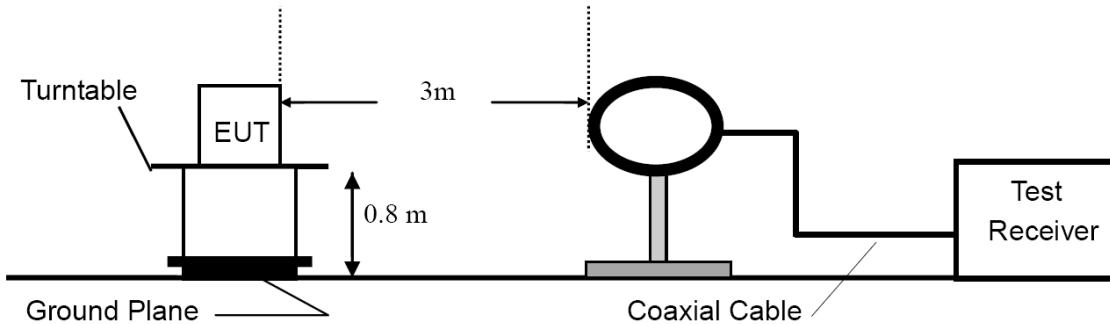

5.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

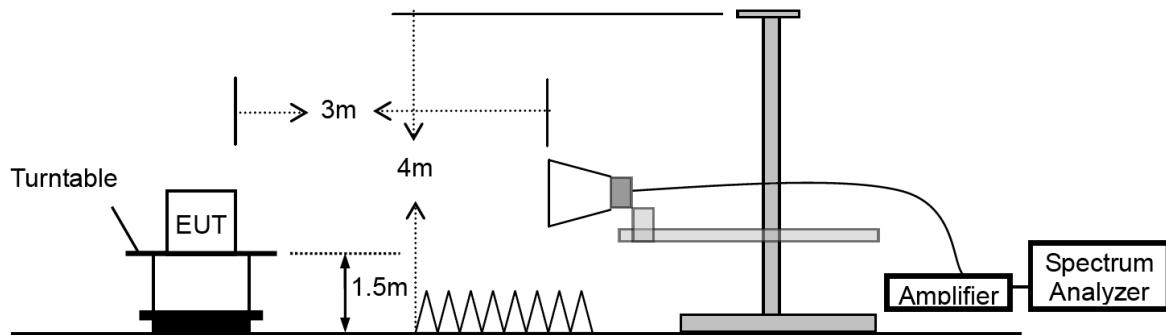

5.2 Measurement Procedure

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:

The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.
- g. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	If D≥98 then VBW ≥ 3*RBW, If D≤98 then VBW ≥1/T

5.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		μV/m
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark : (1) Emission level (dB) μ V = 20 log Emission level μ V/m

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.


5.4 Measurement Results

Please refer to following plots of the worst case: 8DPSK mode.


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Therefore, 9kHz-30MHz data were not recorded.


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

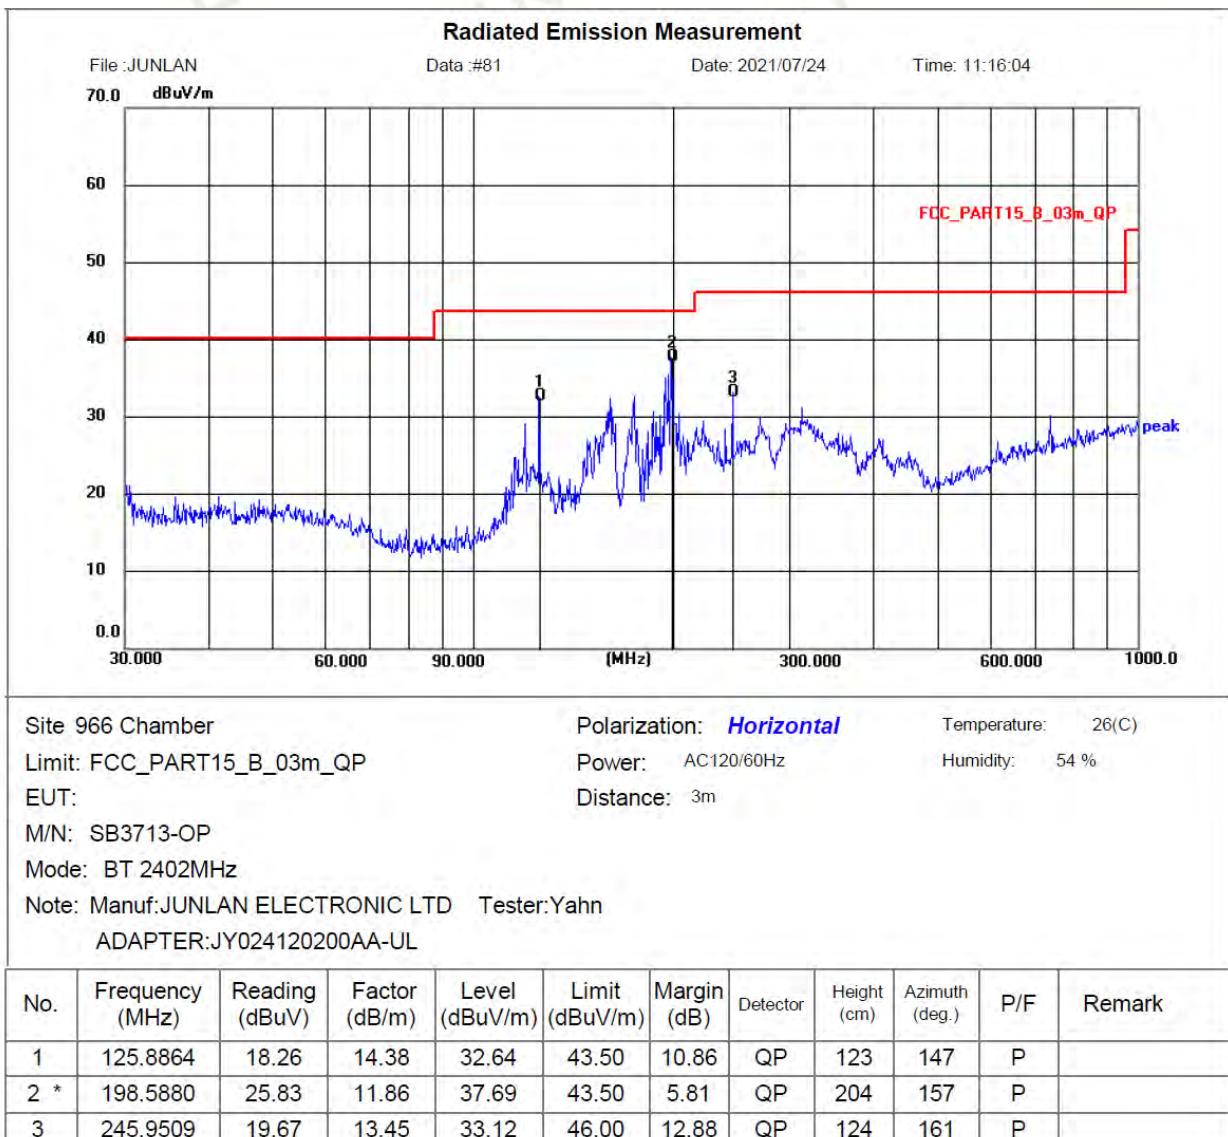

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization: Vertical
Model No.:	SB3713-OP	Temperature: 26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity: 54 %
Frequency Range:	30MHz-1GHz	Test By: Yahn
Test Distance:	3m	Test Voltage AC 120V/60Hz
Test Results:	PASS	
Adapter	JY024120200AA-UL	

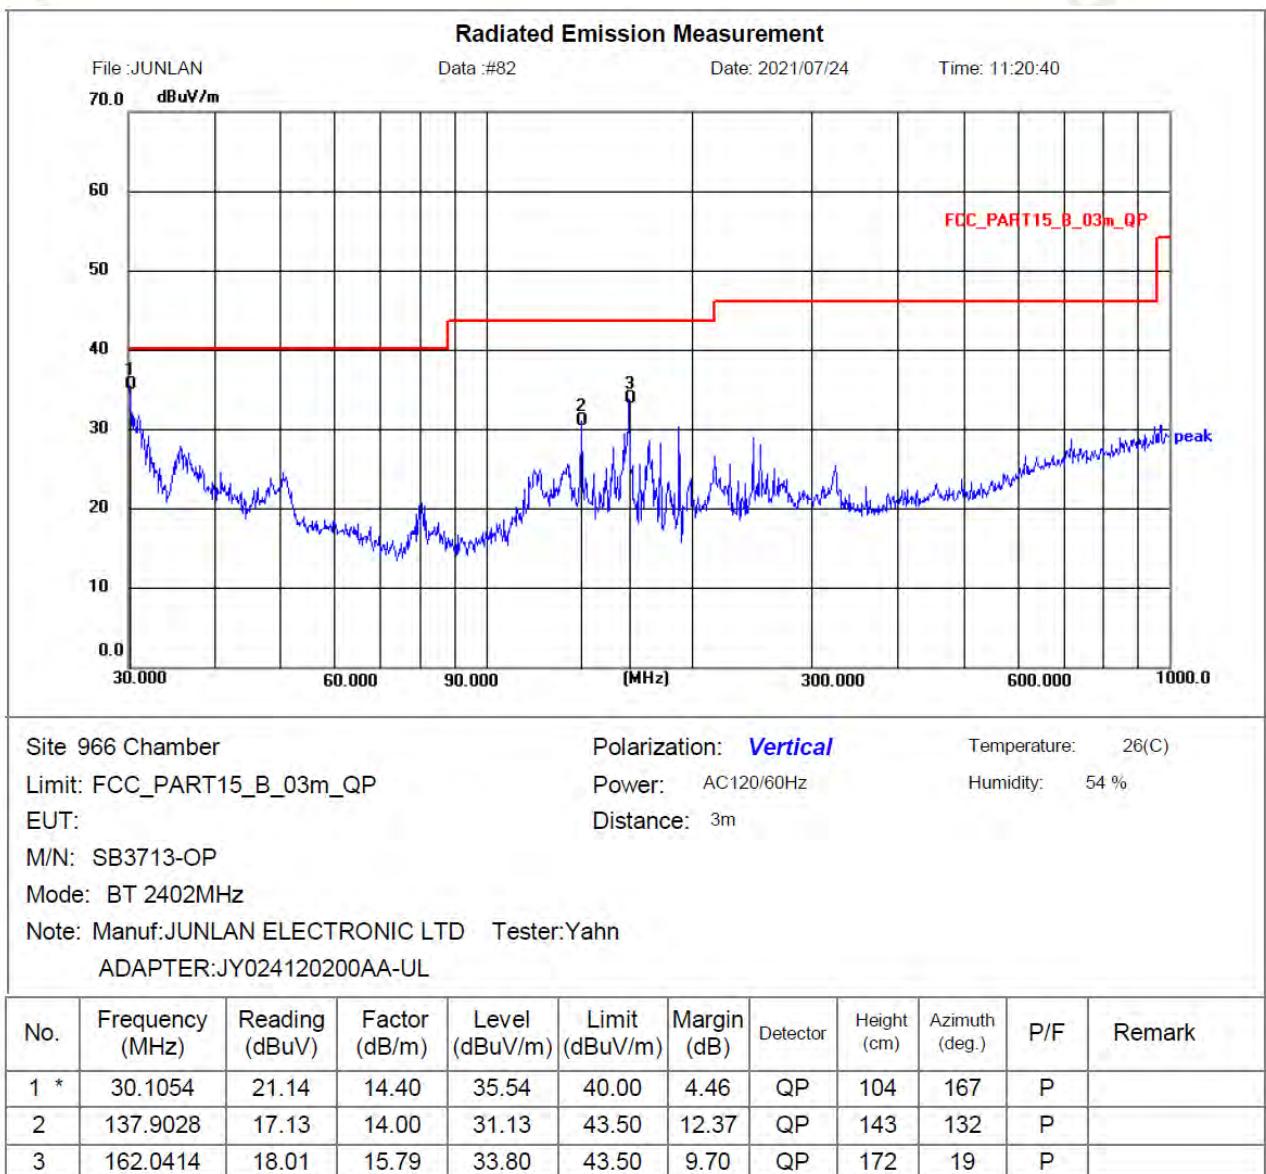


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2441MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

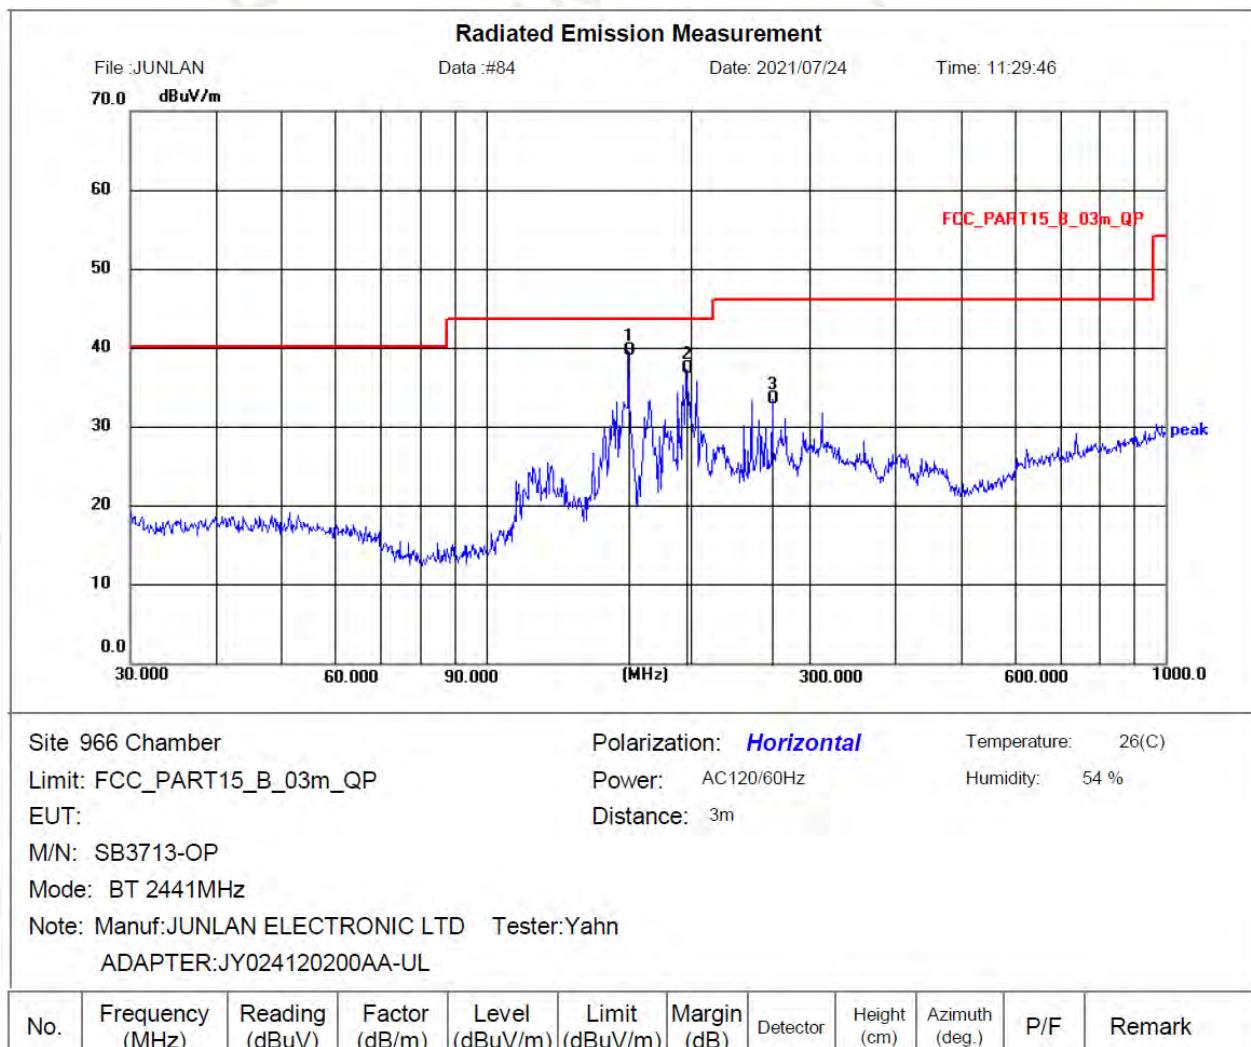

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	162.0414	23.91	15.79	39.70	43.50	3.80	QP	151	34	P	
2	197.2001	25.37	11.94	37.31	43.50	6.19	QP	107	147	P	
3	263.8190	19.67	13.81	33.48	46.00	12.52	QP	118	133	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2441MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

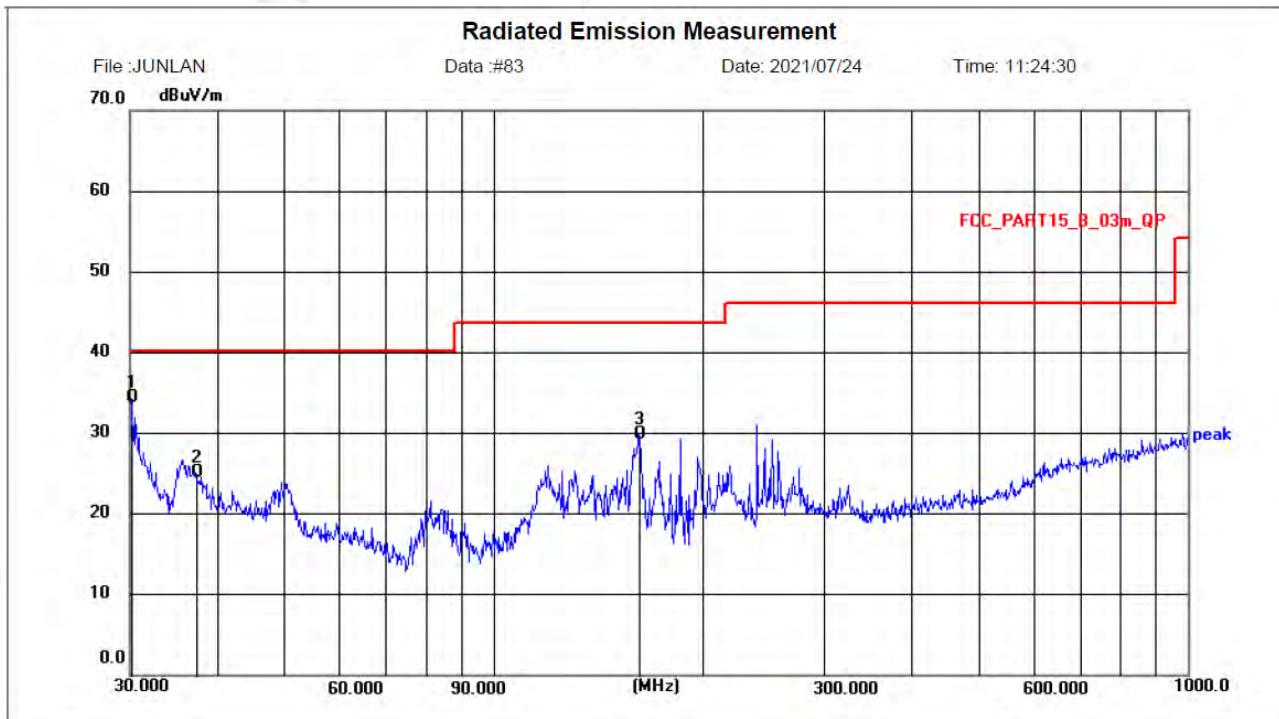

Site 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2441MHz		
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn		
ADAPTER:JY024120200AA-UL		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	30.1054	20.04	14.40	34.44	40.00	5.56	QP	103	215	P	
2	37.2855	10.19	14.94	25.13	40.00	14.87	QP	106	36	P	
3	162.0414	13.99	15.79	29.78	43.50	13.72	QP	157	149	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

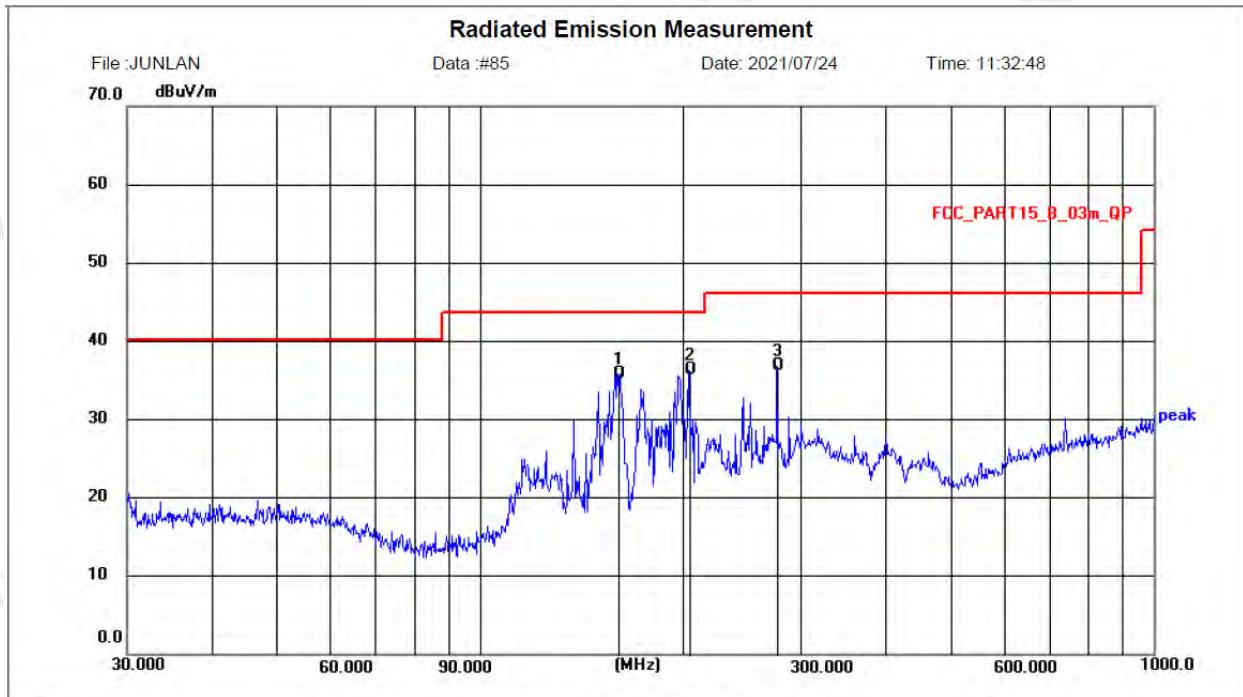

Site: 966 Chamber	Polarization: Horizontal	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2480MHz		
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn		
ADAPTER:JY024120200AA-UL		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	160.3456	19.76	15.96	35.72	43.50	7.78	QP	176	28	P	
2 *	204.2377	24.32	11.94	36.26	43.50	7.24	QP	127	135	P	
3	276.1235	22.61	14.19	36.80	46.00	9.20	QP	152	18	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

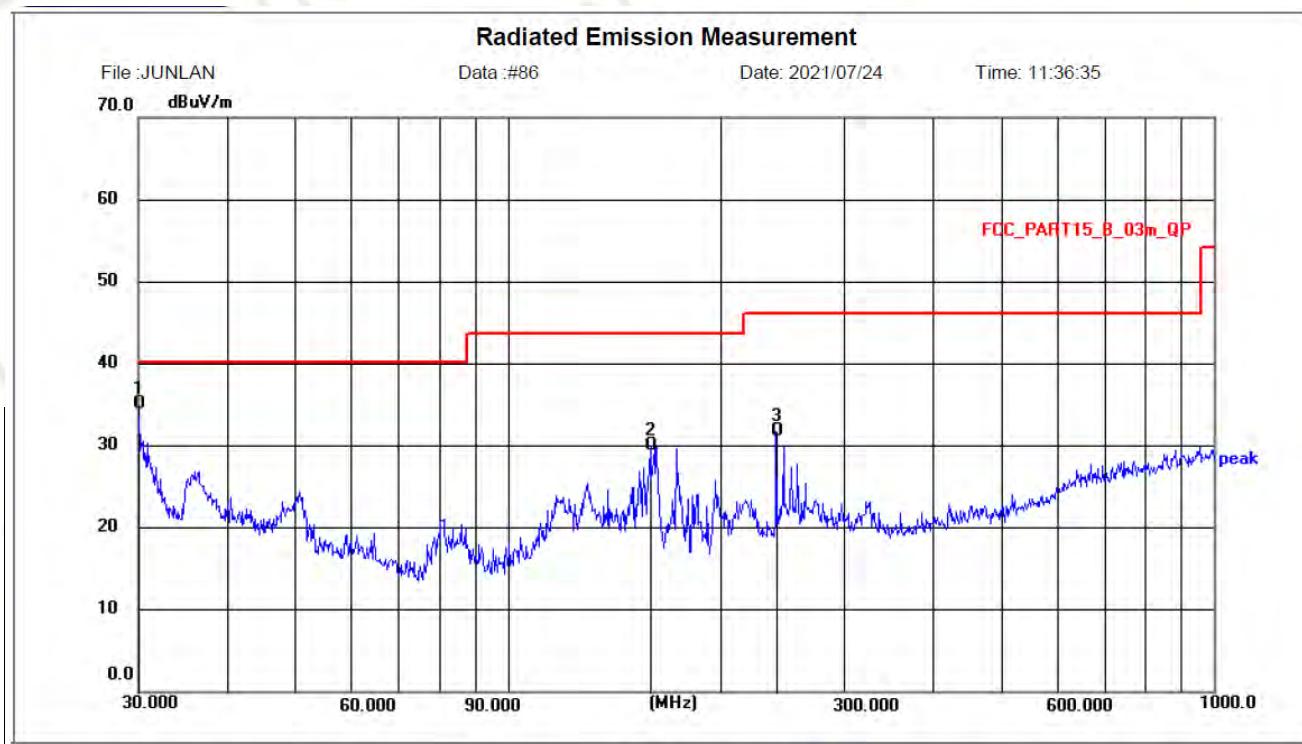

Site 966 Chamber Polarization: **Vertical** Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP Power: AC120/60Hz Humidity: 54 %
EUT: Distance: 3m
M/N: SB3713-OP
Mode: BT 2480MHz
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn
ADAPTER:JY024120200AA-UL

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	30.0000	20.77	14.40	35.17	40.00	4.83	QP	100	246	P	
2	159.2251	14.01	15.99	30.00	43.50	13.50	QP	109	52	P	
3	239.9874	18.32	13.36	31.68	46.00	14.32	QP	149	136	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	GKYZD0200120US		

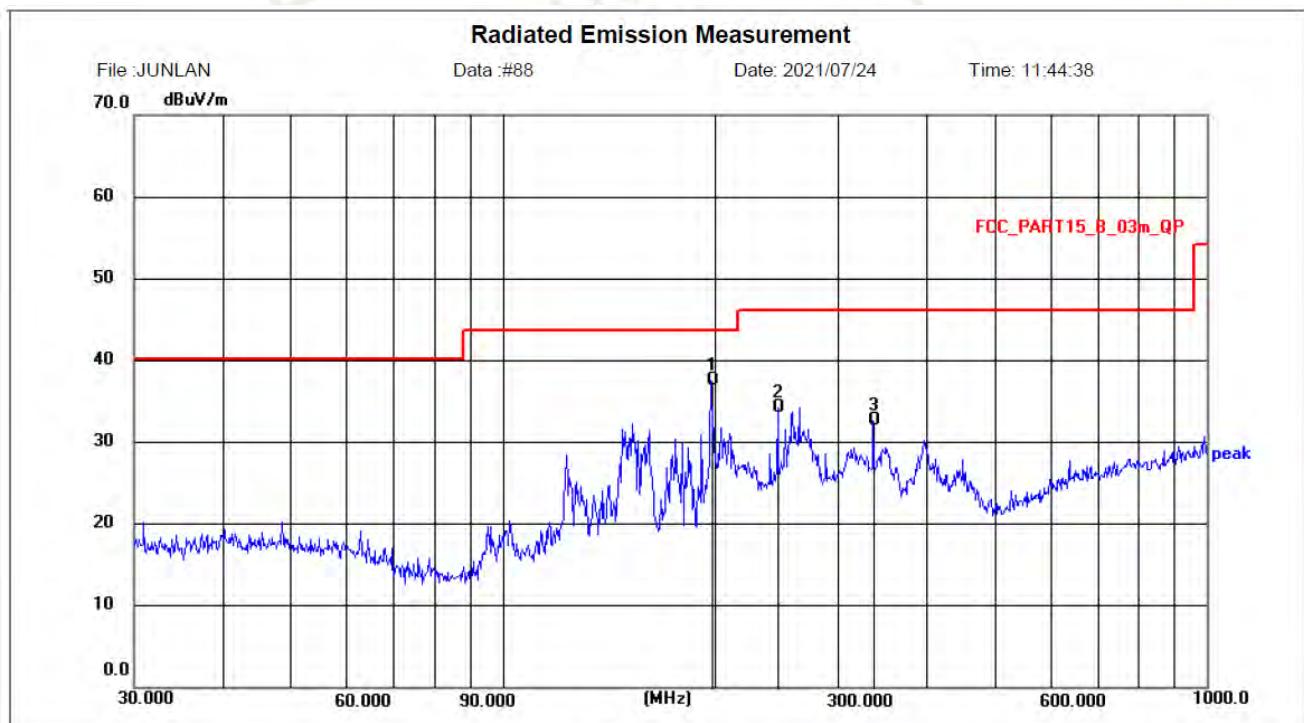

Site 966 Chamber	Polarization: <i>Horizontal</i>	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2402MHz		
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn		
ADAPTER:GKYZD0200120US		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	197.8928	25.69	11.90	37.59	43.50	5.91	QP	149	175	P	
2	245.9509	20.84	13.45	34.29	46.00	11.71	QP	103	147	P	
3	336.0352	16.97	15.59	32.56	46.00	13.44	QP	184	15	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	GKYZD0200120US		

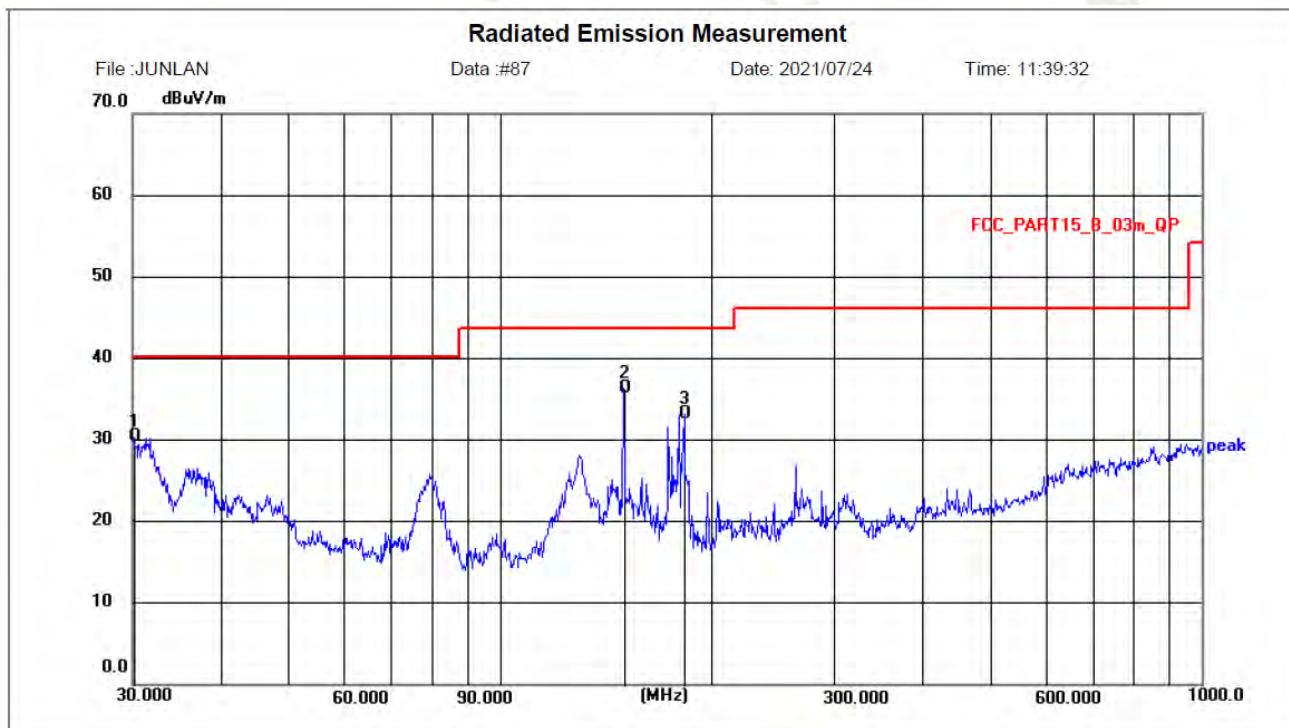

Site 966 Chamber	Polarization:	Vertical	Temperature:	26(C)
Limit: FCC_PART15_B_03m_QP	Power:	AC120/60Hz	Humidity:	54 %
EUT:	Distance:	3m		
M/N: SB3713-OP				
Mode: BT 2402MHz				
Note: Manuf:JUNLAN ELECTRONIC LTD	Tester:	Yahn		
ADAPTER:GKYZD0200120US				


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.1054	16.05	14.40	30.45	40.00	9.55	QP	102	125	P	
2 *	150.0108	20.30	16.00	36.30	43.50	7.20	QP	153	147	P	
3	183.2005	19.93	13.15	33.08	43.50	10.42	QP	254	269	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2441MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	GKYZD0200120US		

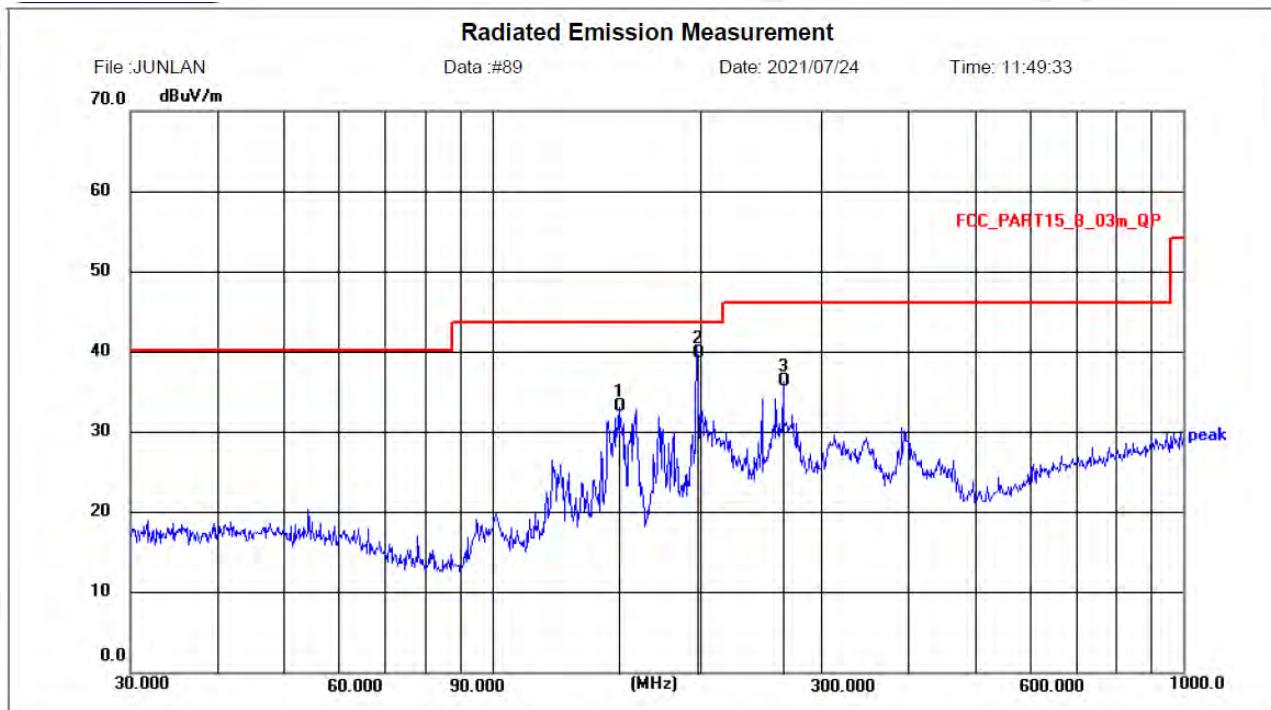

Site 966 Chamber		Polarization: Horizontal	Temperature: 26(C)								
Limit:	FCC_PART15_B_03m_QP	Power: AC120/60Hz	Humidity: 54 %								
EUT:		Distance: 3m									
M/N:	SB3713-OP										
Mode:	BT 2441MHz										
Note:	Manuf: JUNLAN ELECTRONIC LTD	Tester: Yahn									
ADAPTER: GKYZD0200120US											
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	152.6641	17.11	15.99	33.10	43.50	10.40	QP	184	32	P	
2 *	197.8928	27.83	11.90	39.73	43.50	3.77	QP	209	176	P	
3	263.8190	22.49	13.81	36.30	46.00	9.70	QP	134	130	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2441MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	GKYZD0200120US		

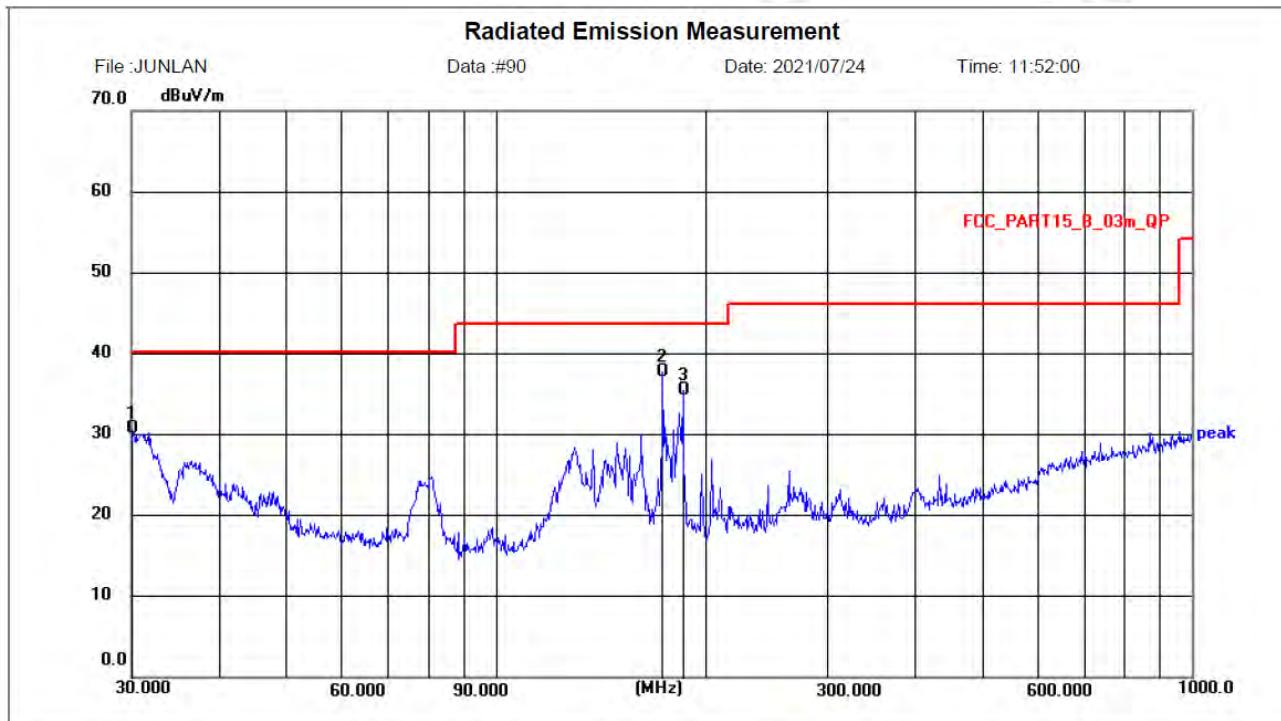

Site: 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2441MHz		
Note: Manuf: JUNLAN ELECTRONIC LTD Tester: Yahn		
ADAPTER: GKYZD0200120US		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.000	16.40	14.40	30.80	40.00	9.20	QP	102	35	P	
2 *	173.8135	23.29	14.47	37.76	43.50	5.74	QP	152	148	P	
3	185.7882	22.61	12.85	35.46	43.50	8.04	QP	172	159	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	GKYZD0200120US		

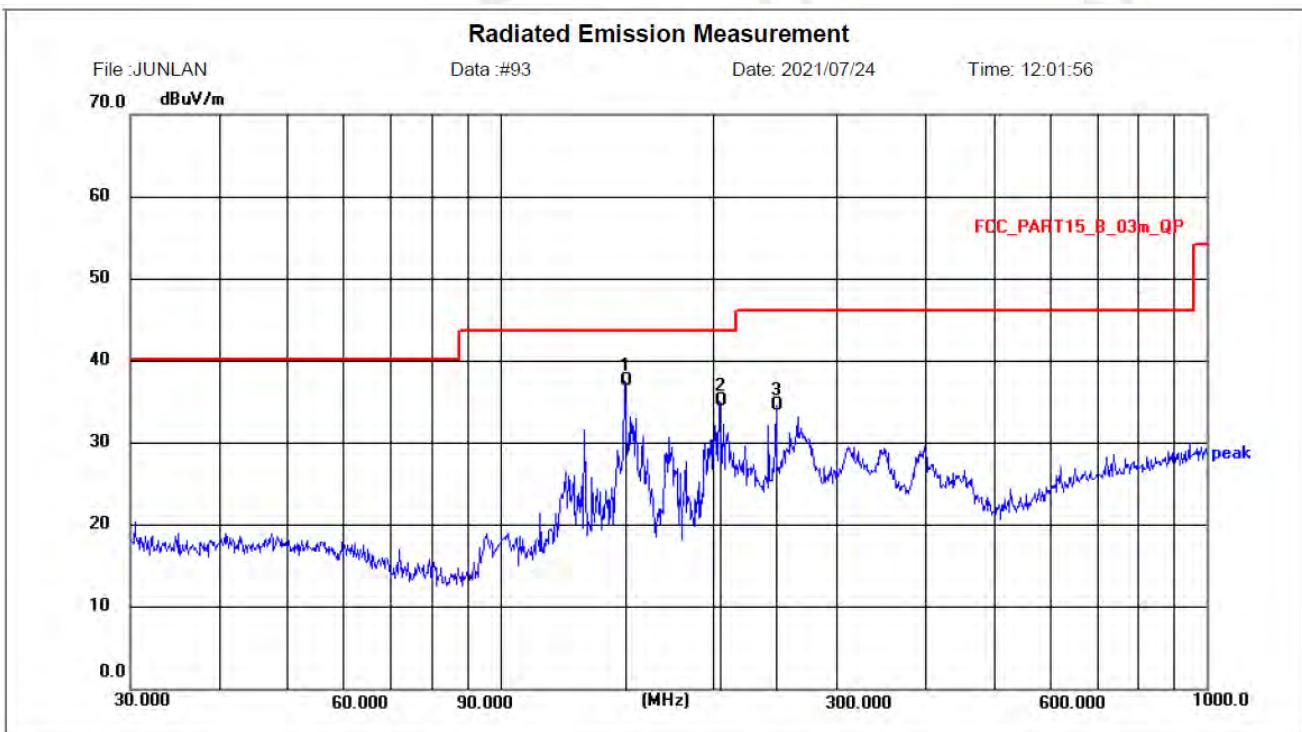

Site 966 Chamber	Polarization: Horizontal	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2480MHz		
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn		
ADAPTER:GKYZD0200120US		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	150.0108	21.59	16.00	37.59	43.50	5.91	QP	158	135	P	
2	204.2377	23.10	11.94	35.04	43.50	8.46	QP	126	104	P	
3	245.9509	21.08	13.45	34.53	46.00	11.47	QP	119	312	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Frequency Range:	30MHz-1GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	GKYZD0200120US		

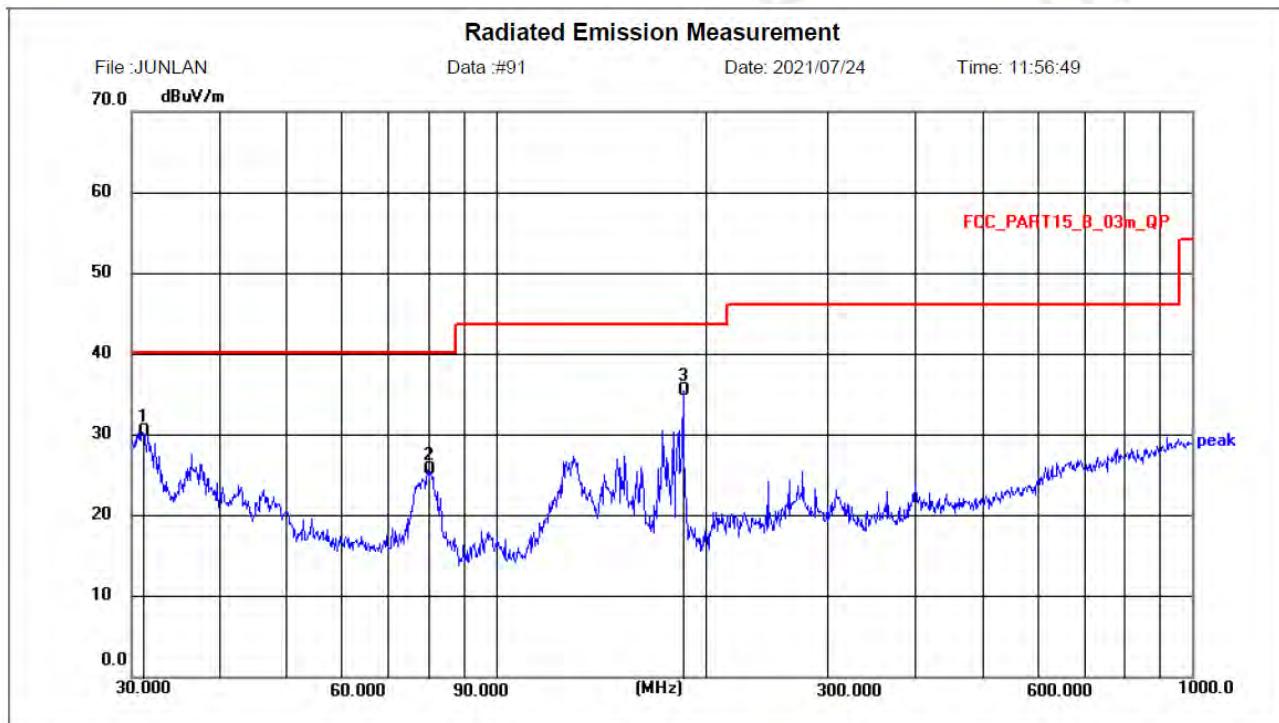

Site 966 Chamber Polarization: **Vertical** Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP Power: AC120/60Hz Humidity: 54 %
EUT: Distance: 3m
M/N: SB3713-OP
Mode: BT 2480MHz
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn
ADAPTER:GKYZD0200120US

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	31.0706	15.94	14.45	30.39	40.00	9.61	QP	106	246	P	
2	79.8003	14.66	10.94	25.60	40.00	14.40	QP	127	145	P	
3 *	185.7882	22.60	12.85	35.45	43.50	8.05	QP	231	56	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity:	54 %
Frequency Range:	1GHz-18GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

Radiated Emission Measurement


File : JUNLAN

Data : #66

Date: 2021/07/24

Time: 8:35:31

100.0 dBuV/m

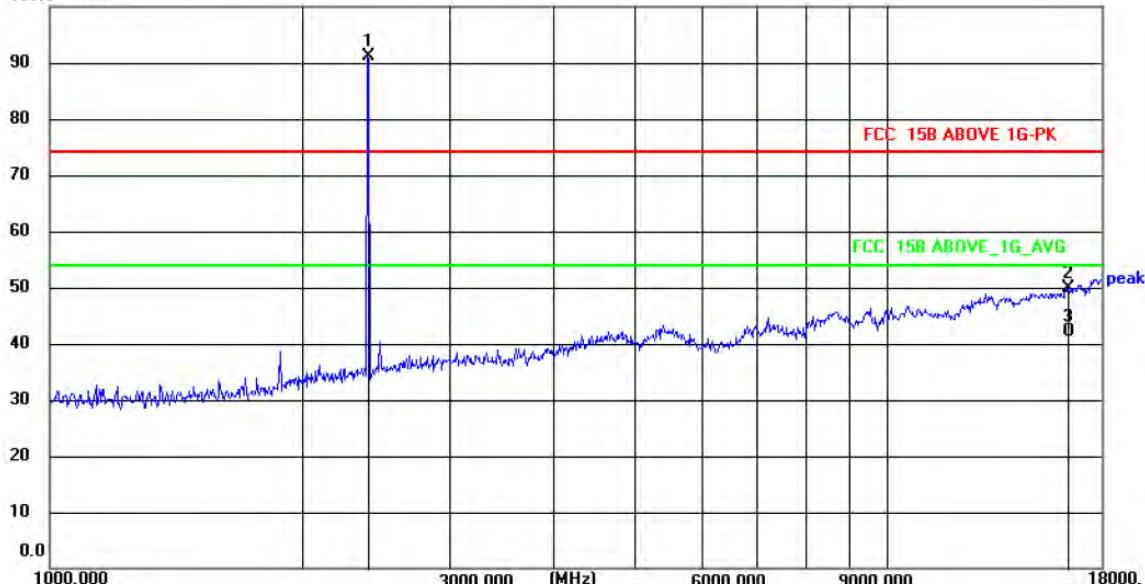

Site 966 Chamber

Polarization: **Horizontal**

Temperature: 26(C)

Limit: FCC 15B ABOVE 1G-PK

Power: AC120/60Hz

Humidity: 54 %

EUT:

Distance: 3m

M/N: SB3713-OP


Mode: BT 2402MHz

Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn

ADAPTER:JY024120200AA-UL

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2402.000	87.25	3.94	91.19	/	/	peak	106	31	/	
2	16447.333	21.00	28.94	49.94	74.00	24.06	peak	145	187	P	
3	16447.333	13.20	28.94	42.14	54.00	11.86	AVG	139	27	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity:	54 %
Frequency Range:	1GHz-18GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

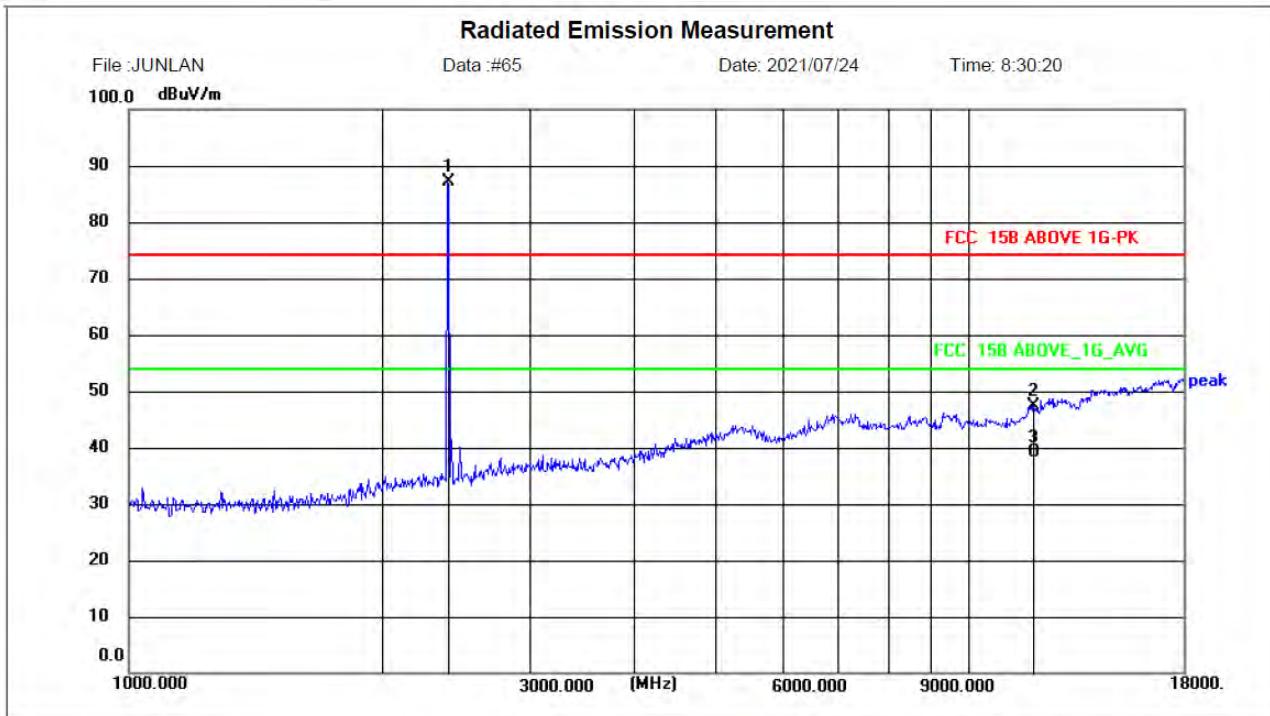

Site 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC 15B ABOVE 1G-PK	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2402MHz		
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn		
ADAPTER:JY024120200AA-UL		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2402.000	83.25	3.94	87.19	/	/	peak	151	21	/	
2	11919.667	20.24	27.07	47.31	74.00	26.69	peak	125	219	P	
3	11919.667	12.15	27.07	39.22	54.00	14.78	AVG	135	316	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2441MHz (8DPSK)	Humidity:	54 %
Frequency Range:	1GHz-18GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

Radiated Emission Measurement


File : JUNLAN

Data : #67

Date: 2021/07/24

Time: 8:40:33

100.0 dBuV/m

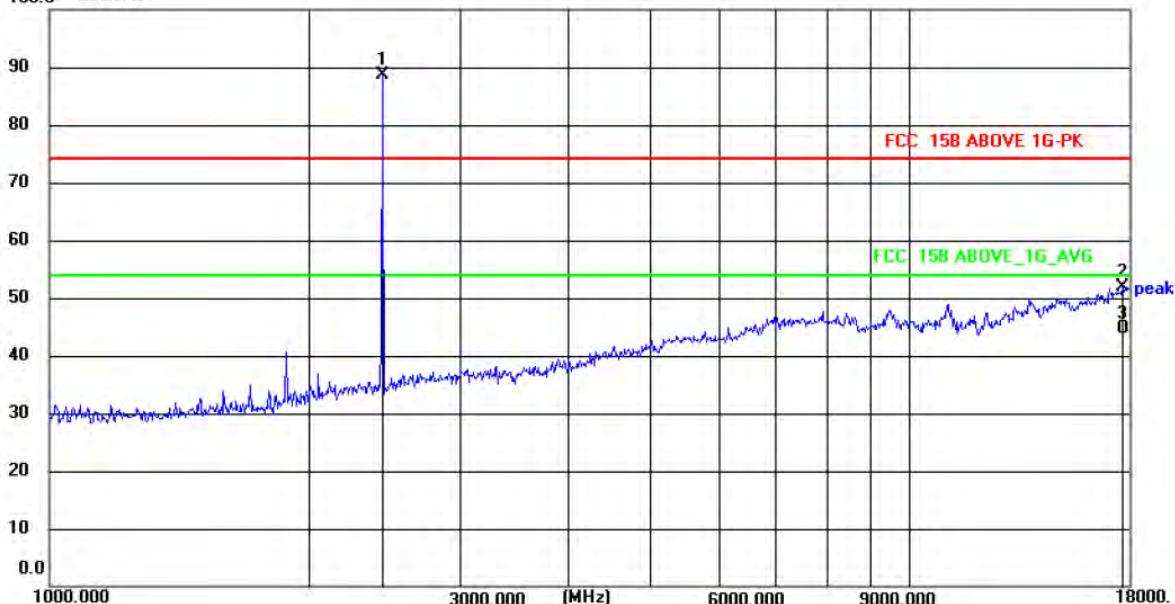

Site 966 Chamber

Polarization: **Horizontal**

Temperature: 26(C)

Limit: FCC 15B ABOVE 1G-PK

Power: AC120/60Hz

Humidity: 54 %

EUT:

Distance: 3m

M/N: SB3713-OP

Mode: BT 2441MHz

Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn

ADAPTER:JY024120200AA-UL

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2441.000	84.60	4.11	88.71	/	/	peak	107	215	/	
2	17728.000	17.40	34.53	51.93	74.00	22.07	peak	131	224	P	
3	17728.000	10.01	34.53	44.54	54.00	9.46	AVG	129	208	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2441MHz (8DPSK)	Humidity:	54 %
Frequency Range:	1GHz-18GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

Radiated Emission Measurement


File : JUNLAN

Data #: 68

Date: 2021/07/24

Time: 8:45:17

100.0 dBuV/m

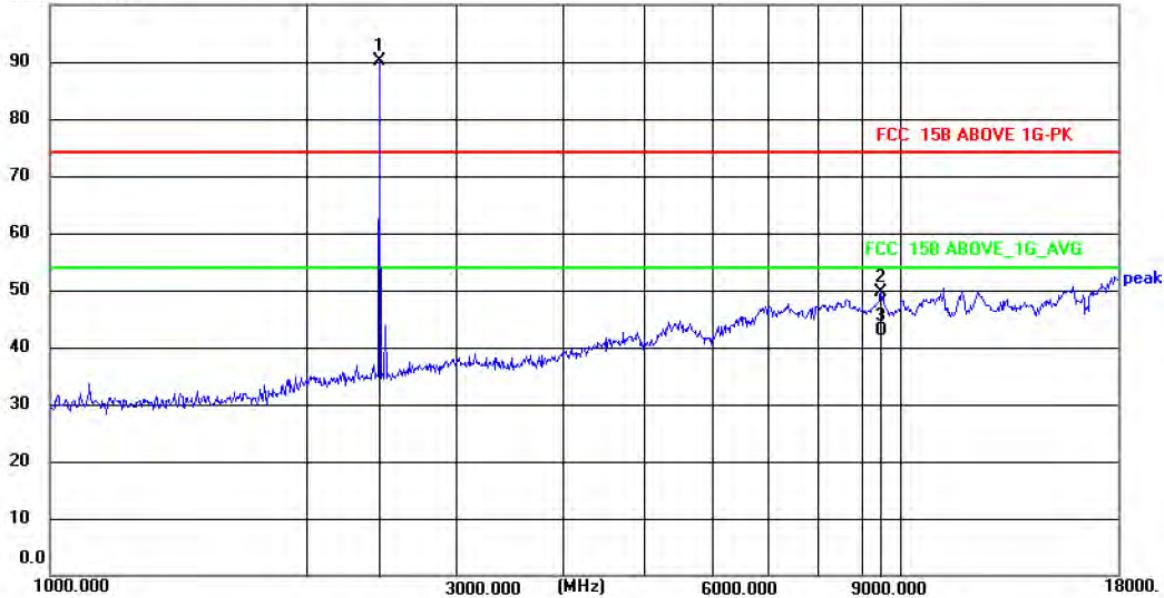

Site 966 Chamber

Polarization: Vertical

Temperature: 26(C)

Limit: FCC 15B ABOVE 1G-PK

Power: AC120/60Hz

Humidity: 54 %

EUT:

Distance: 3m

M/N: SB3713-OP


Mode: BT 2441MHz

Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn

ADAPTER:JY024120200AA-UL


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2441.000	86.12	4.11	90.23	/	/	peak	126	35	/	
2	9477.333	26.41	23.16	49.57	74.00	24.43	peak	144	178	P	
3	9477.333	19.82	23.16	42.98	54.00	11.02	AVG	139	58	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Frequency Range:	1GHz-18GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

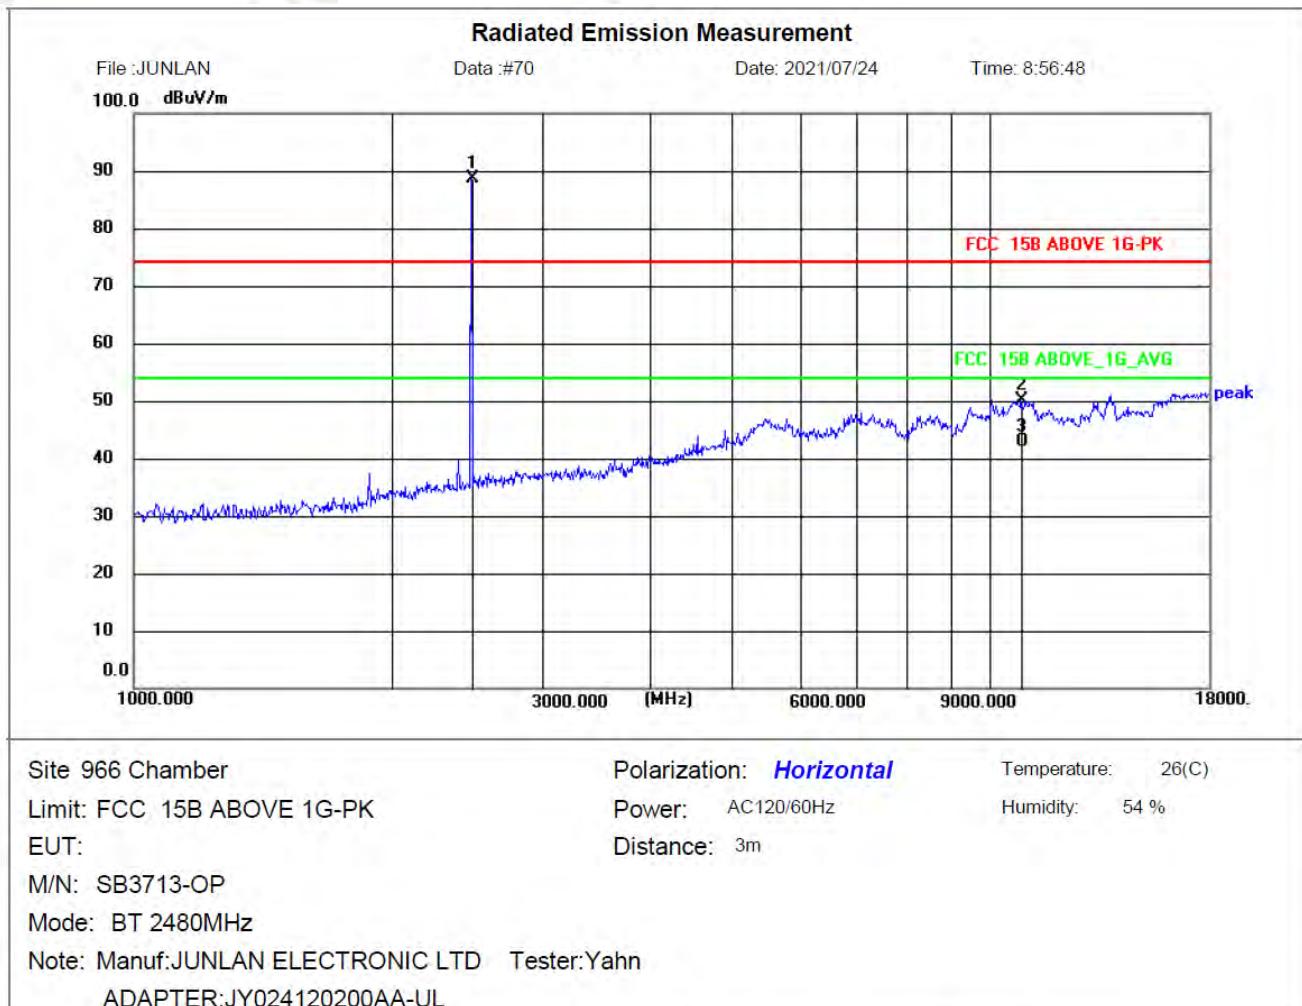

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2480.000	84.31	4.27	88.58	/	/	peak	134	53	/	
2	10865.667	23.90	26.26	50.16	74.00	23.84	peak	128	174	P	
3	10865.667	16.72	26.26	42.98	54.00	11.02	AVG	105	19	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Frequency Range:	1GHz-18GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

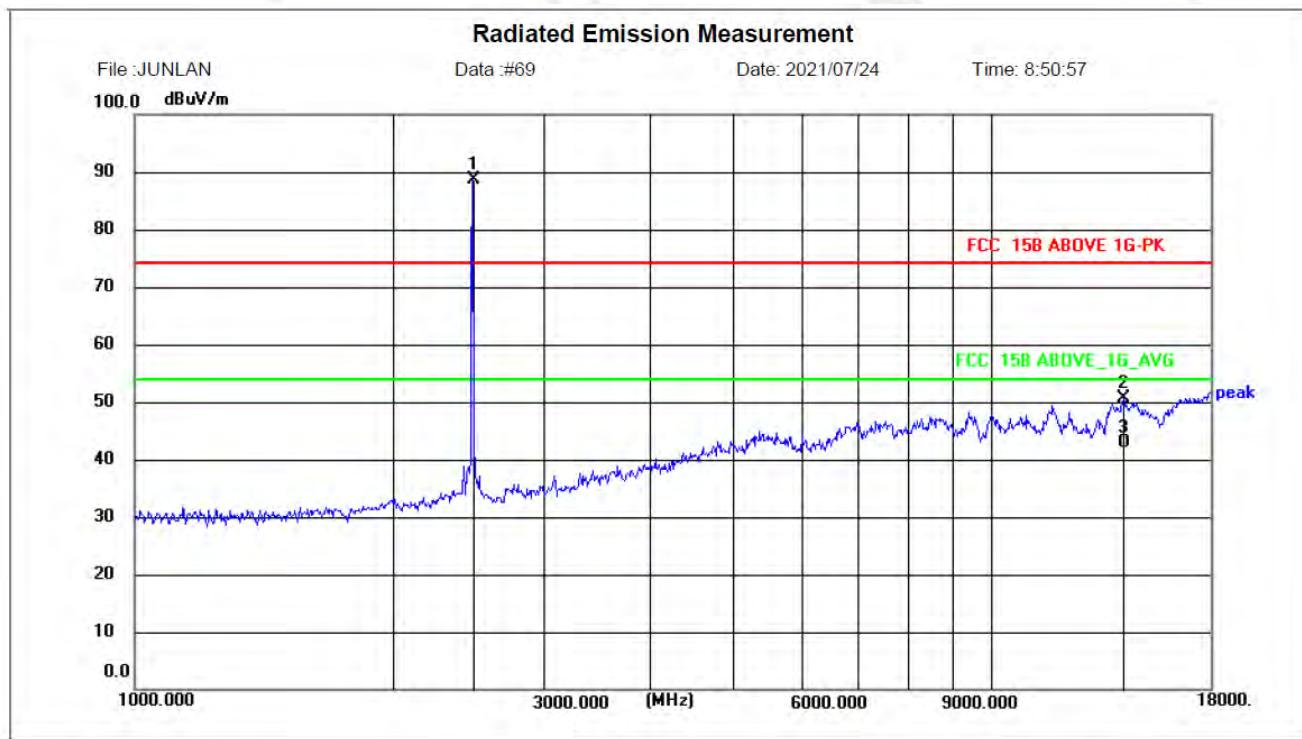


Site: 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC 15B ABOVE 1G-PK	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2480MHz		
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn		
ADAPTER:JY024120200AA-UL		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2480.000	84.43	4.27	88.70	/	/	peak	121	56	/	
2	14277.000	19.14	31.38	50.52	74.00	23.48	peak	102	23	P	
3	14277.000	11.57	31.38	42.95	54.00	11.05	AVG	118	154	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity:	54 %
Frequency Range:	18GHz-25GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

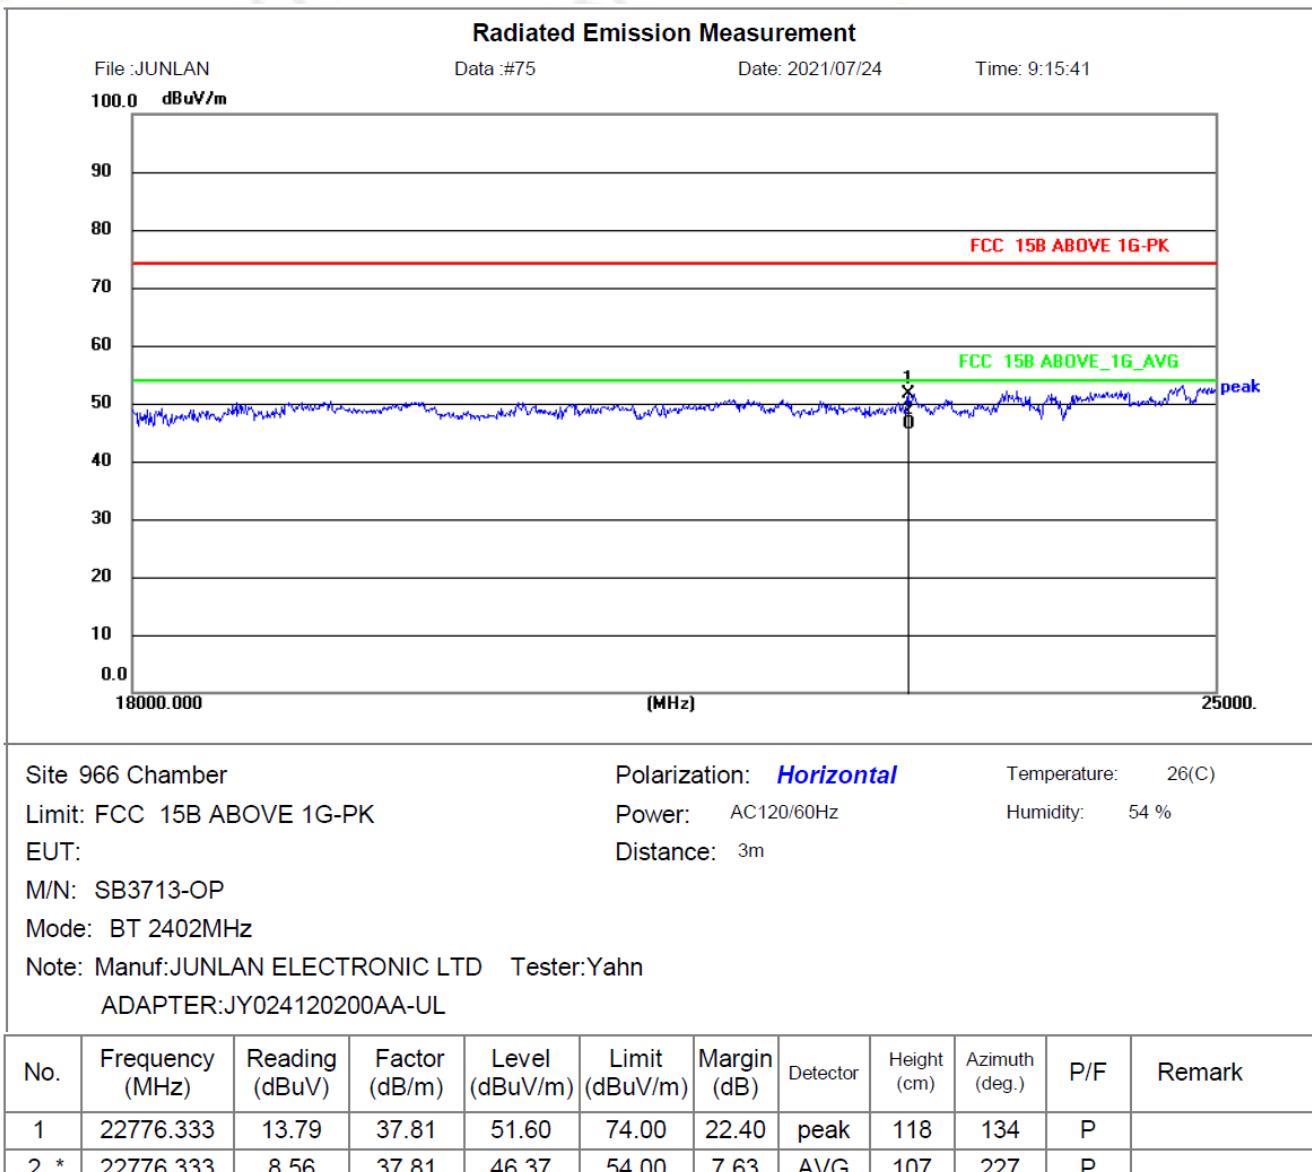


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity:	54 %
Frequency Range:	18GHz-25GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

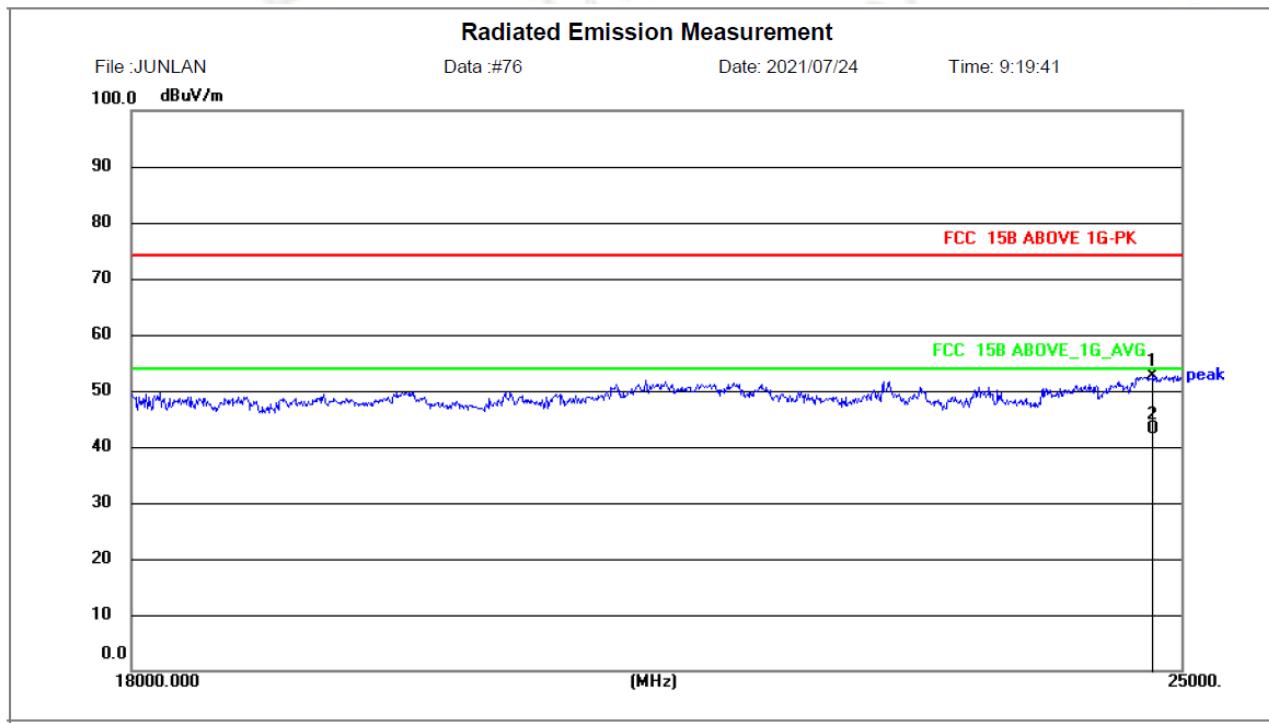

Site: 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC 15B ABOVE 1G-PK	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2402MHz		
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn		
ADAPTER:JY024120200AA-UL		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	24783.000	17.53	35.18	52.71	74.00	21.29	peak	125	312	P	
2 *	24783.000	7.98	35.18	43.16	54.00	10.84	AVG	113	214	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2441MHz (8DPSK)	Humidity:	54 %
Frequency Range:	18GHz-25GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

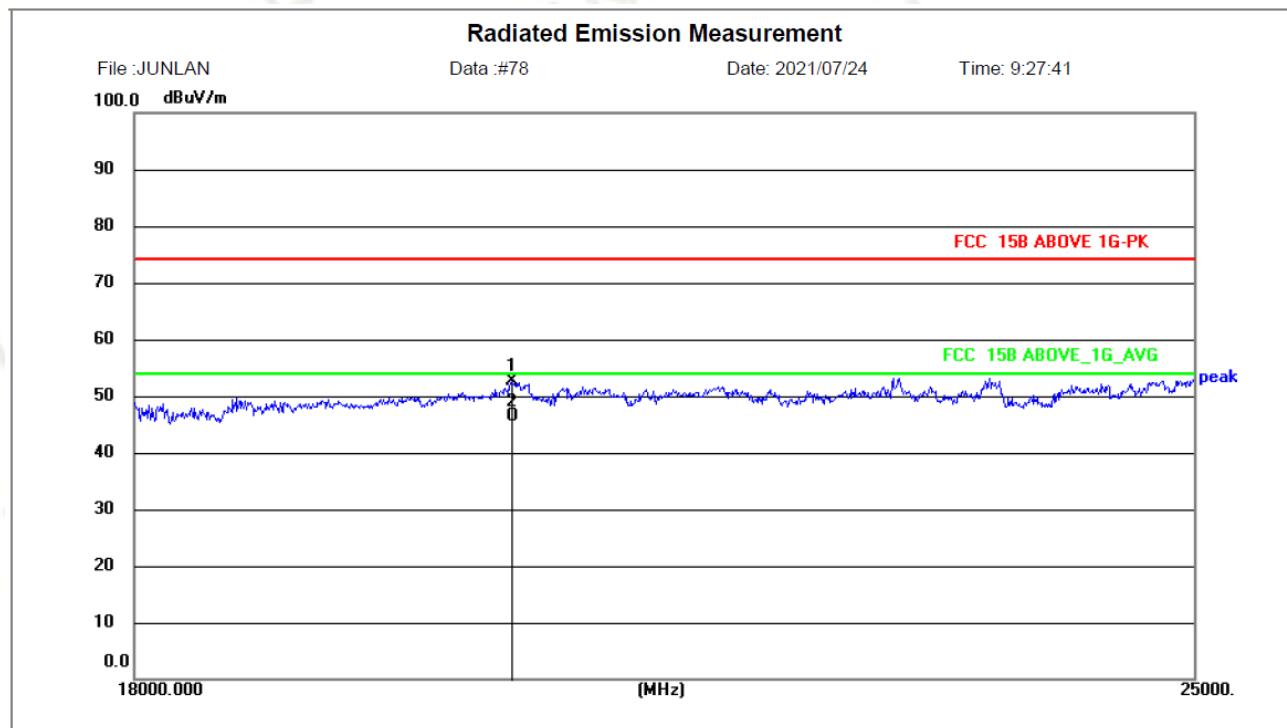


Site 966 Chamber	Polarization: <i>Horizontal</i>	Temperature: 26(C)
Limit: FCC 15B ABOVE 1G-PK	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2441MHz		
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn		
ADAPTER:JY024120200AA-UL		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	20235.333	16.24	36.37	52.61	74.00	21.39	peak	117	145	P	
2 *	20235.333	9.98	36.37	46.35	54.00	7.65	AVG	106	131	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2441MHz (8DPSK)	Humidity:	54 %
Frequency Range:	18GHz-25GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

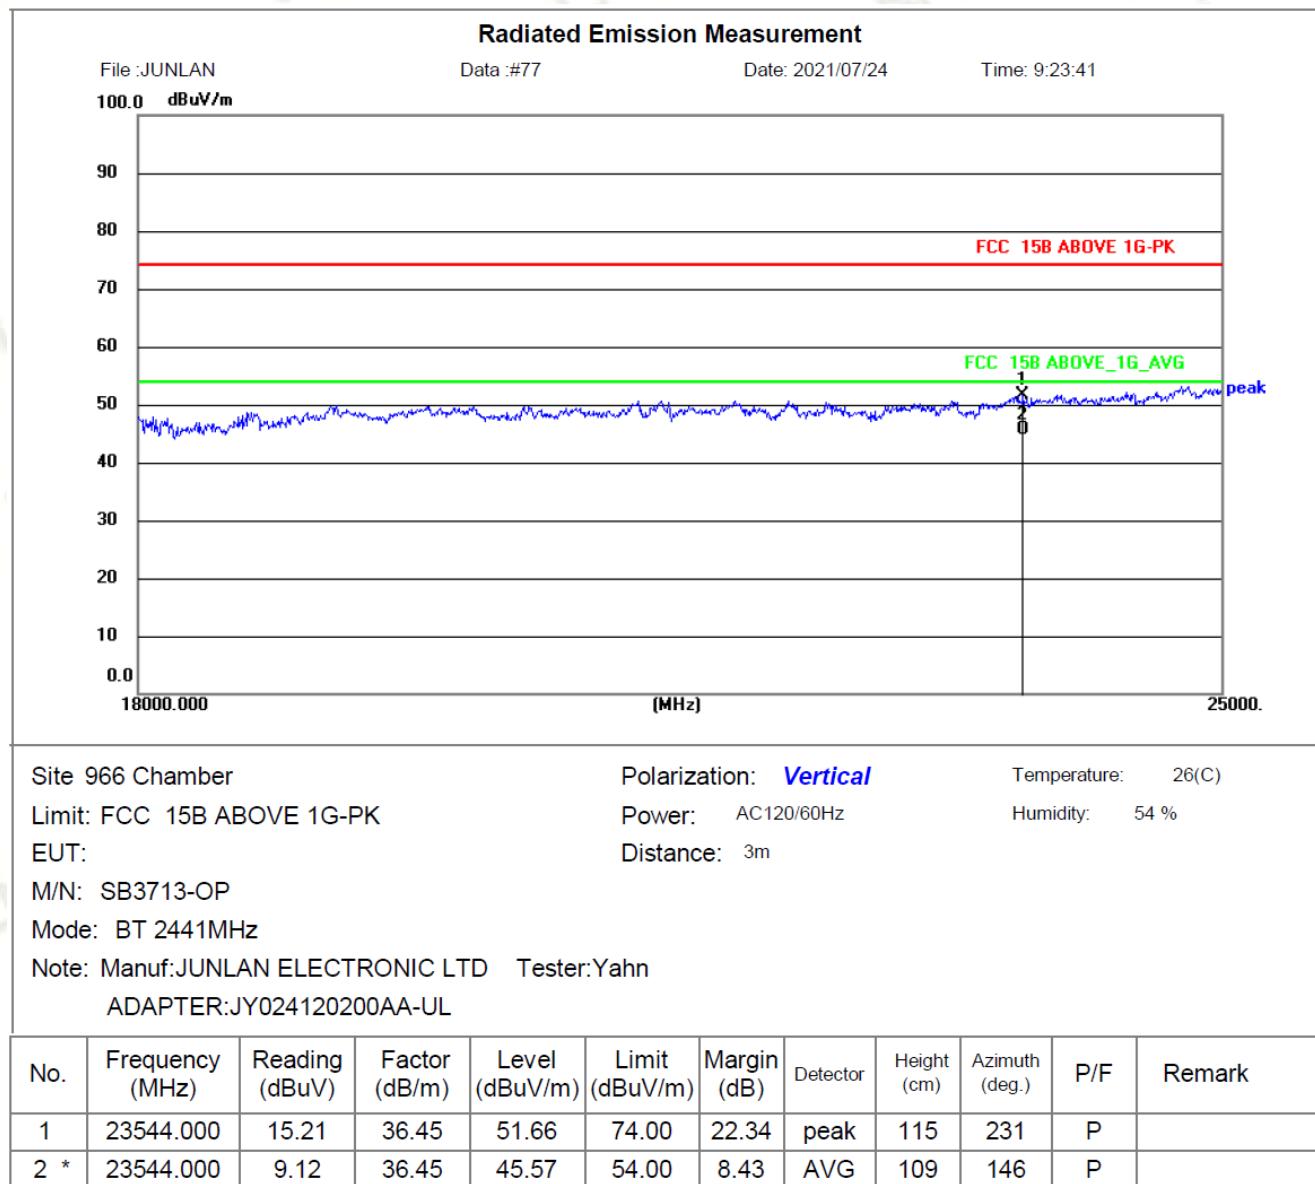


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Frequency Range:	18GHz-25GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

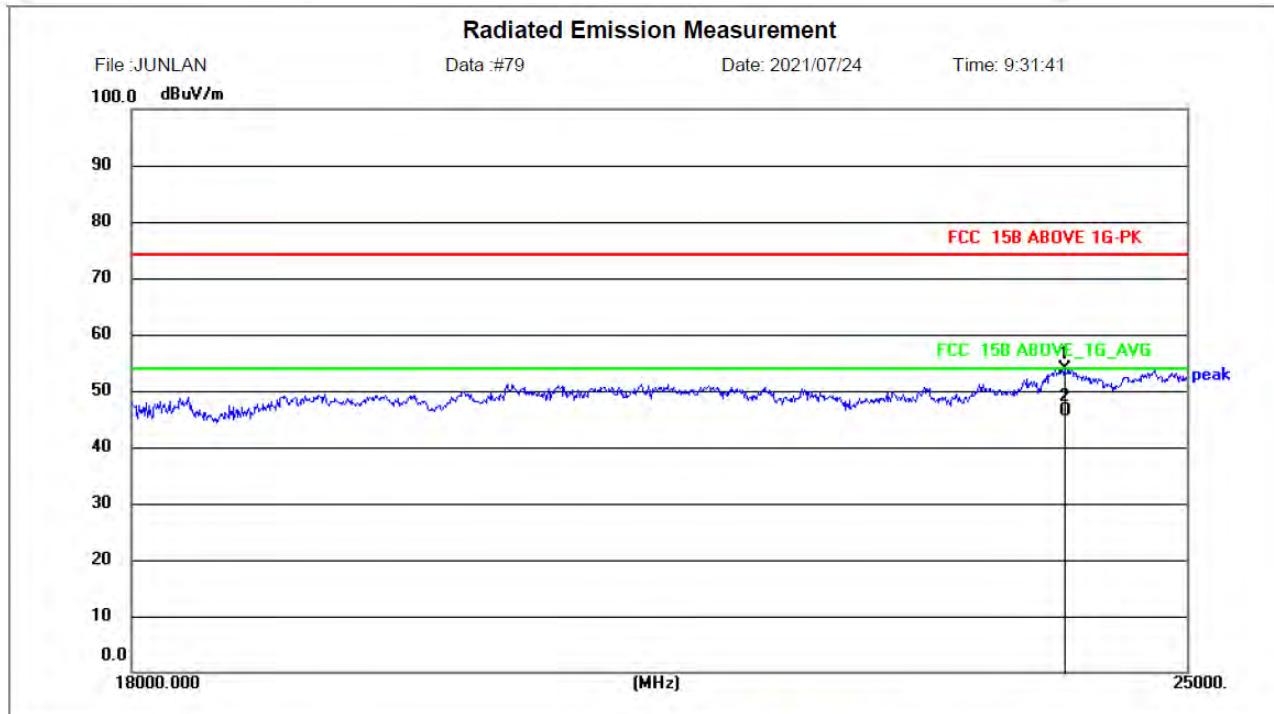

Site 966 Chamber		Polarization:	Horizontal	Temperature:	26(C)						
Limit: FCC 15B ABOVE 1G-PK		Power:	AC120/60Hz	Humidity:	54 %						
EUT:		Distance:	3m								
M/N: SB3713-OP											
Mode: BT 2480MHz											
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn											
ADAPTER:JY024120200AA-UL											
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	24071.333	18.66	35.23	53.89	74.00	20.11	peak	112	214	P	
2 *	24071.333	11.21	35.23	46.44	54.00	7.56	AVG	103	29	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Frequency Range:	18GHz-25GHz	Test By:	Yahn
Test Distance:	3m	Test Voltage	AC 120V/60Hz
Test Results:	PASS		
Adapter	JY024120200AA-UL		

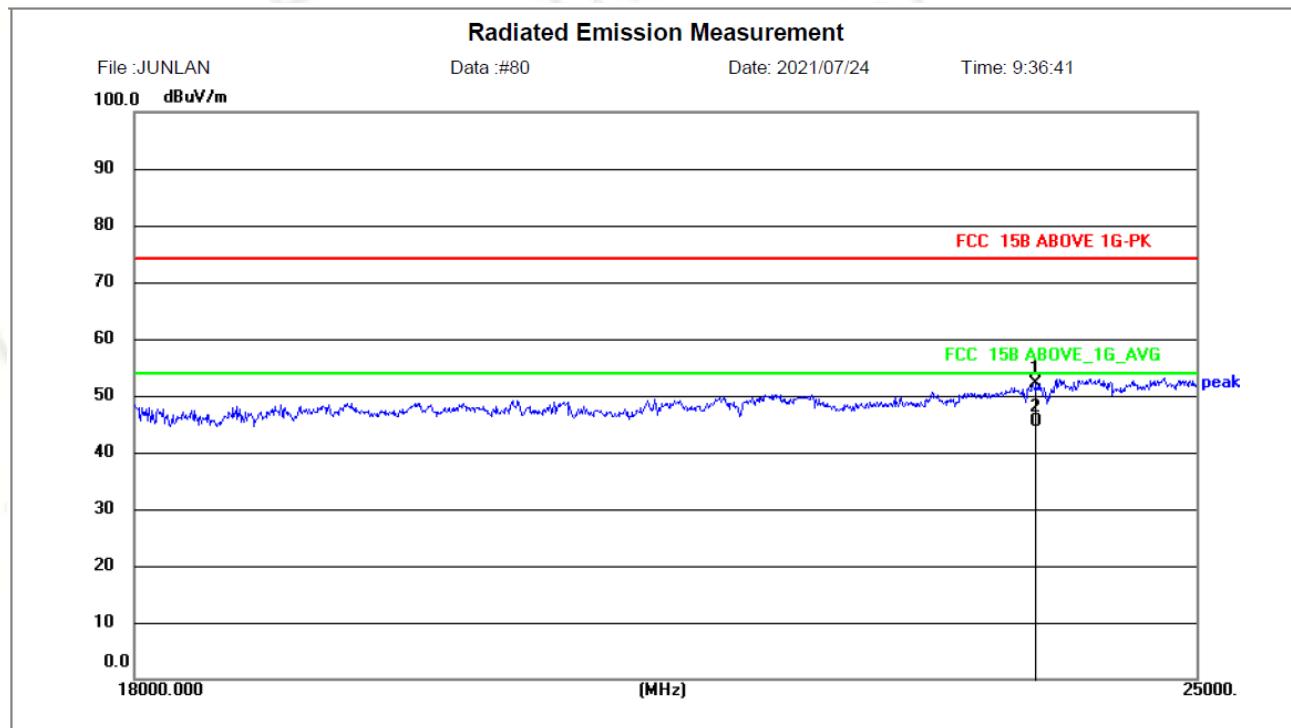

Site 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC 15B ABOVE 1G-PK	Power: AC120/60Hz	Humidity: 54 %
EUT:	Distance: 3m	
M/N: SB3713-OP		
Mode: BT 2480MHz		
Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn		
ADAPTER:JY024120200AA-UL		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	23791.333	16.39	35.79	52.18	74.00	21.82	peak	103	132	P	
2 *	23791.333	9.51	35.79	45.30	54.00	8.70	AVG	106	108	P	

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits, therefore, than 20 dB below the limit do no reported.
 - (5) Measurement uncertainty: $\pm 3.7\text{dB}$.
 - (6) Horn antenna used for the emission over 1000MHz.

6. CHANNEL SEPARATION

6.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the Marker and Max-Hold function to record the separation of two adjacent channels.

6.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

6.3 Test SET-UP (Block Diagram of Configuration)



6.4 Measurement Results

Refer to attached data chart.

RBW:	30kHz	Temperature:	24 °C
VBW:	100kHz	Humidity:	50 %
Spectrum Detector:	PK	Test By:	Liao
Packet:	DH1, 2DH1, 3DH1(Worst case)	Test Date:	July 21, 2021
Test Result:	PASS		

Channel	Test Frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Bandwidth (kHz)
GFSK			
Lowest	2402	0.936	>587.5
Middle	2441	1.002	>565.3
Highest	2480	0.987	>551.3
π/4-DQPSK			
Lowest	2402	1.164	>831.3
Middle	2441	0.993	>846.7
Highest	2480	1.011	>840.7
8DPSK			
Lowest	2402	0.846	>808.0
Middle	2441	1.005	>825.3
Highest	2480	1.161	>808.7

GFSK Lowest Channel



GFSK Middle Channel




GFSK Highest Channel




$\pi/4$ -DQPSK Lowest Channel



π/4-DQPSK Middle Channel

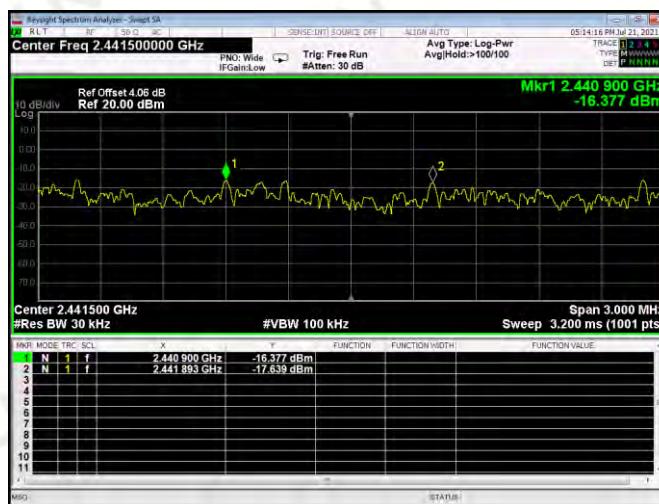


π/4-DQPSK Highest Channel

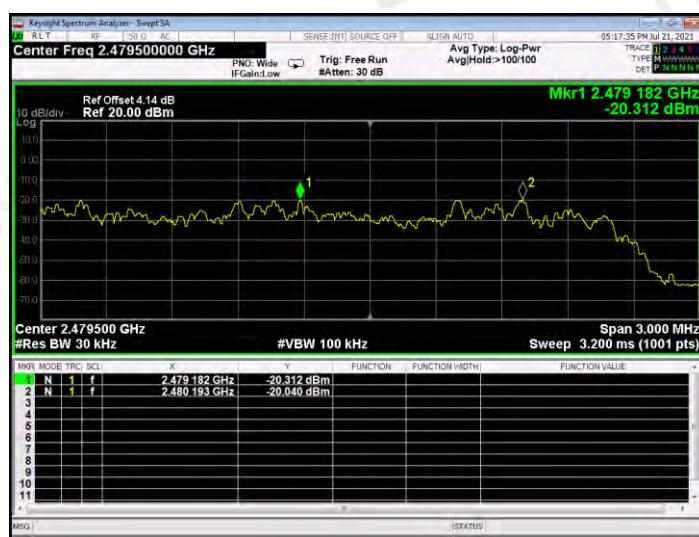

8DPSK Lowest Channel



8DPSK Middle Channel

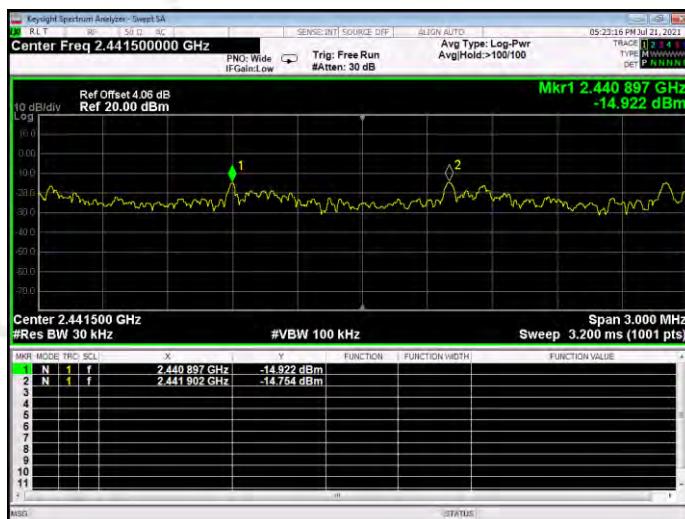

8DPSK Highest Channel



7. 20B BANDWIDTH

7.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Results

Refer to attached data chart.

RBW:	30kHz	Temperature:	24 °C
VBW:	100kHz	Humidity:	50 %
Spectrum Detector:	PK	Test By:	Liao
Packet:	DH1, 2DH1, 3DH1(Worst case)	Test Date:	July 21, 2021
Test Result:	PASS		

Channel	Test Frequency (MHz)	20dB BANDWIDTH(MHz)
GFSK		
Lowest	2402	0.869
Middle	2441	0.896
Highest	2480	0.899
$\pi/4$-DQPSK		
Lowest	2402	1.256
Middle	2441	1.258
Highest	2480	1.289
8DPSK		
Lowest	2402	1.210
Middle	2441	1.219
Highest	2480	1.215

GFSK Lowest Channel



GFSK Middle Channel



GFSK Highest Channel



π/4-DQPSK Lowest Channel



π/4-DQPSK Middle Channel



π/4-DQPSK Highest Channel




8DPSK Lowest Channel



8DPSK Middle Channel



DPSK Highest Channel

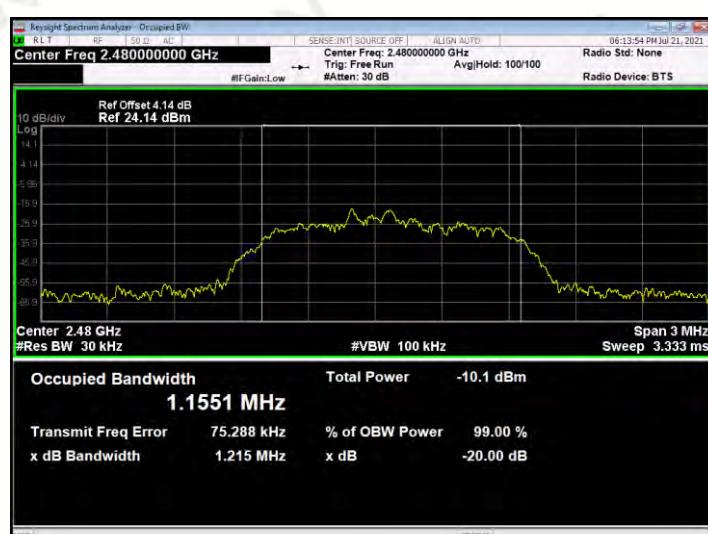

8. HOPPING CHANNEL NUMBER

8.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

8.2 Limit

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.




8.3 Test SET-UP (Block Diagram of Configuration)



8.4 Measurement Results

RBW:	100kHz	Temperature:	24 °C
VBW:	300kHz	Humidity:	50 %
Spectrum Detector:	PK	Test By:	Liao
Packet:	DH1, 2DH1, 3DH1(Worst case)	Test Date:	July 21, 2021
Test Result:	PASS		

Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2400-2483.5	79	≥15

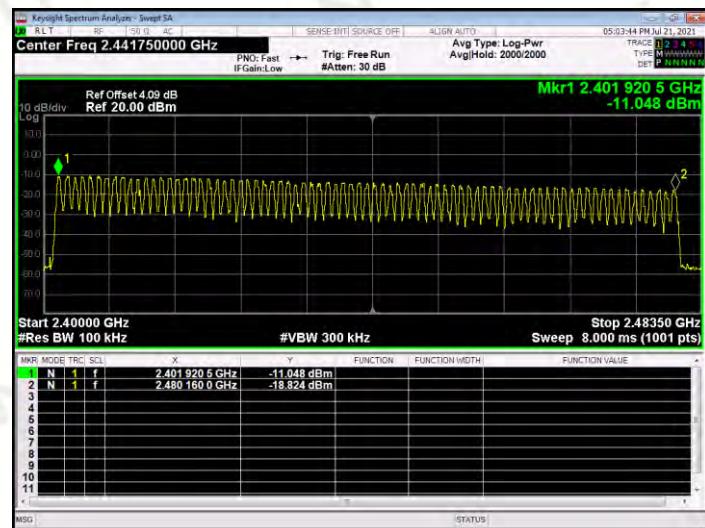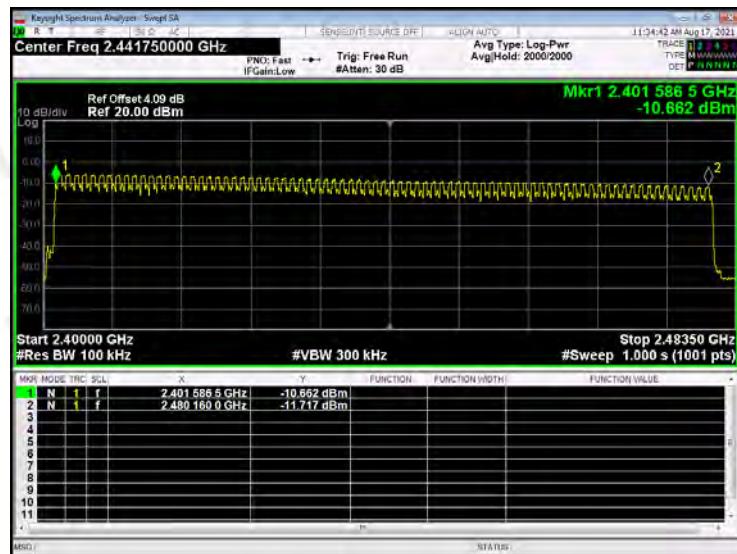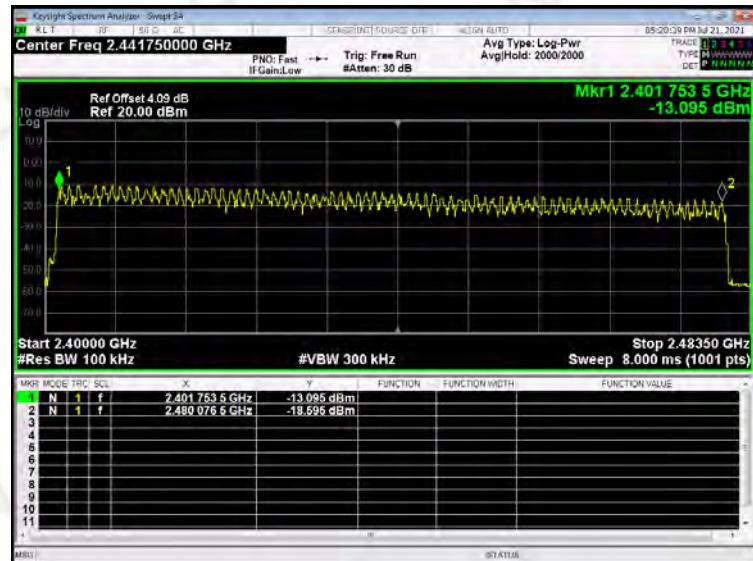GFSK **$\pi/4$ -DQPSK****8DPSK**

9. TIME OF OCCUPANCY (DWELL TIME)

9.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.

The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

9.2 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3 Test SET-UP (Block Diagram of Configuration)



9.4 Measurement Results


Refer to attached data chart.

The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)


RBW:	1MHz	Temperature:	24 °C
VBW:	3MHz	Humidity:	50 %
Spectrum Detector:	PK	Test By:	Liao
Test Result:	PASS	Test Date:	July 21, 2021

Packet	Frequency (MHz)	Result (msec)		Limit (msec)
GFSK				
DH1	2441	0.389	$(ms) * (1600 / (2 * 79)) * 31.6 =$	124.48
DH3	2441	1.644	$(ms) * (1600 / (4 * 79)) * 31.6 =$	263.2
DH5	2441	2.893	$(ms) * (1600 / (6 * 79)) * 31.6 =$	308.587
$\pi/4$-DQPSK				
2-DH1	2441	0.397	$(ms) * (1600 / (2 * 79)) * 31.6 =$	127.04
2-DH3	2441	1.650	$(ms) * (1600 / (4 * 79)) * 31.6 =$	264.00
2-DH5	2441	2.894	$(ms) * (1600 / (6 * 79)) * 31.6 =$	308.69
8DPSK				
3-DH1	2441	0.400	$(ms) * (1600 / (2 * 79)) * 31.6 =$	128.00
3-DH3	2441	1.650	$(ms) * (1600 / (4 * 79)) * 31.6 =$	264.00
3-DH5	2441	2.901	$(ms) * (1600 / (6 * 79)) * 31.6 =$	309.44


GFSK (DH1)

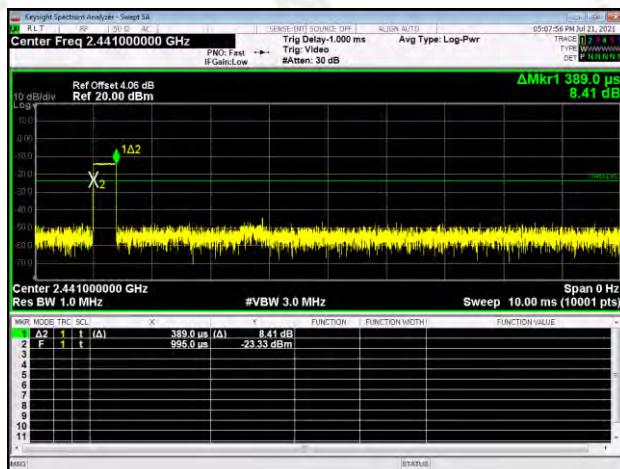


GFSK (DH3)

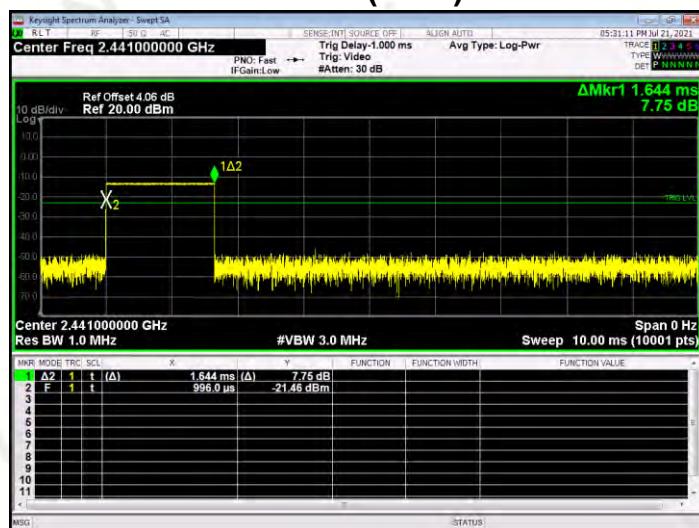


GFSK (DH5)

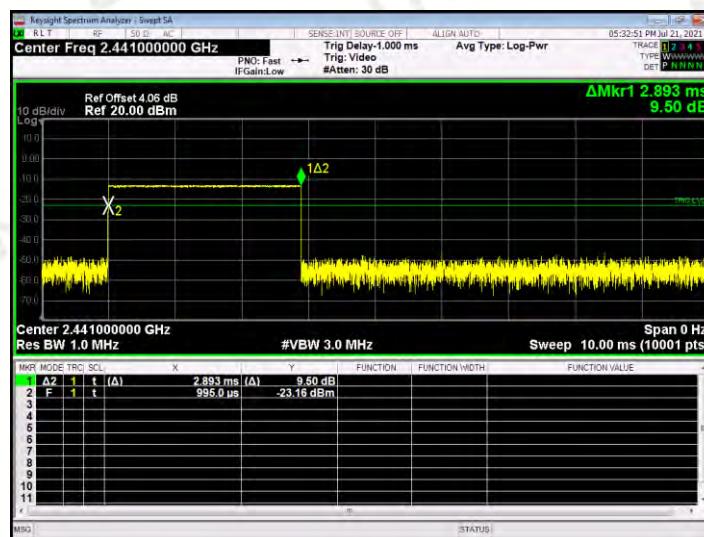


π/4-DQPSK (2-DH1)

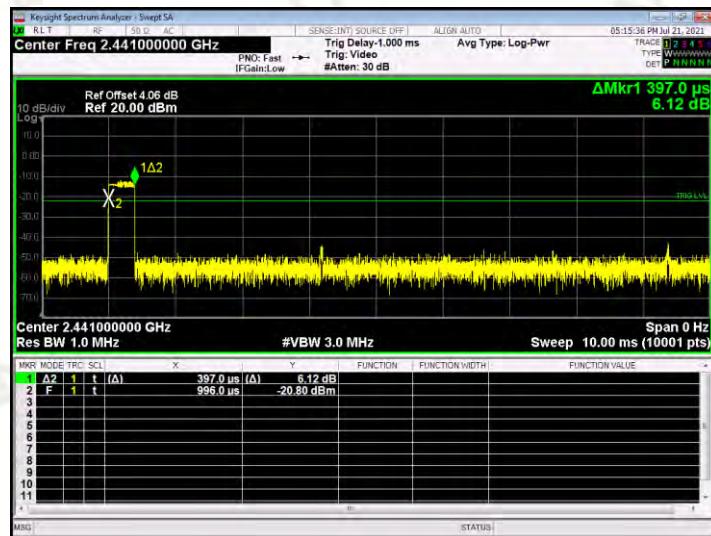


π/4-DQPSK (2-DH3)

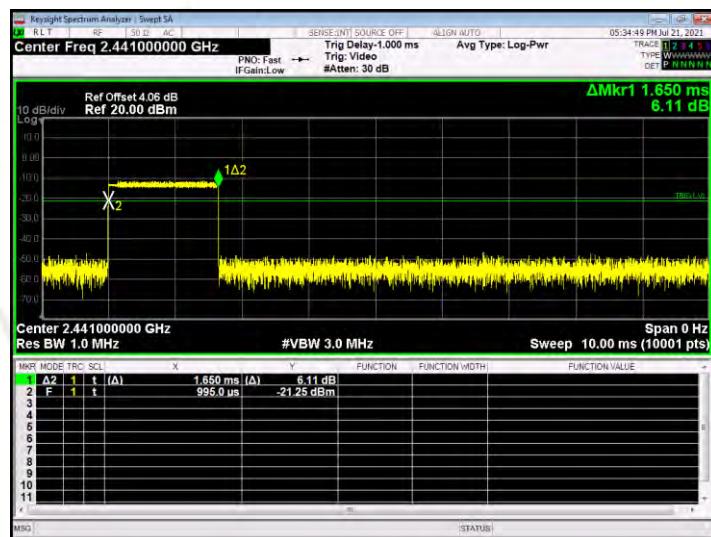


π/4-DQPSK (2-DH5)

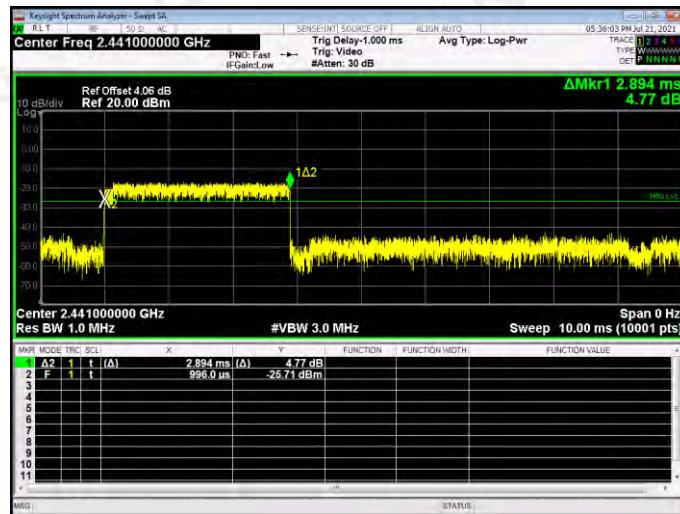


8DPSK (3-DH1)

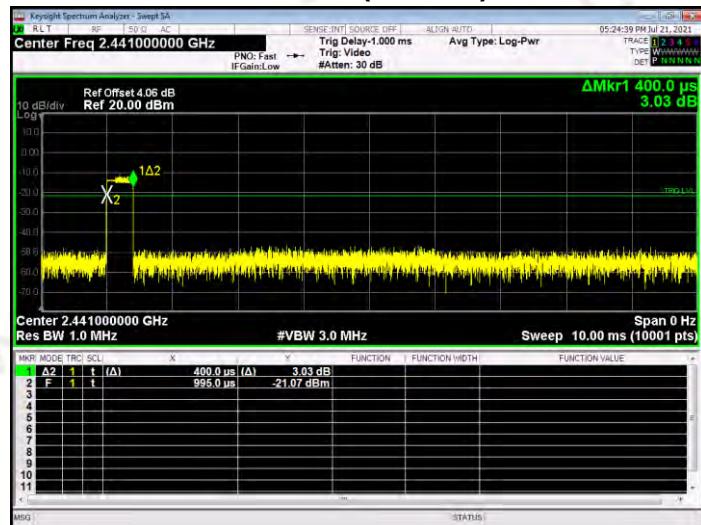

8DPSK (3-DH3)

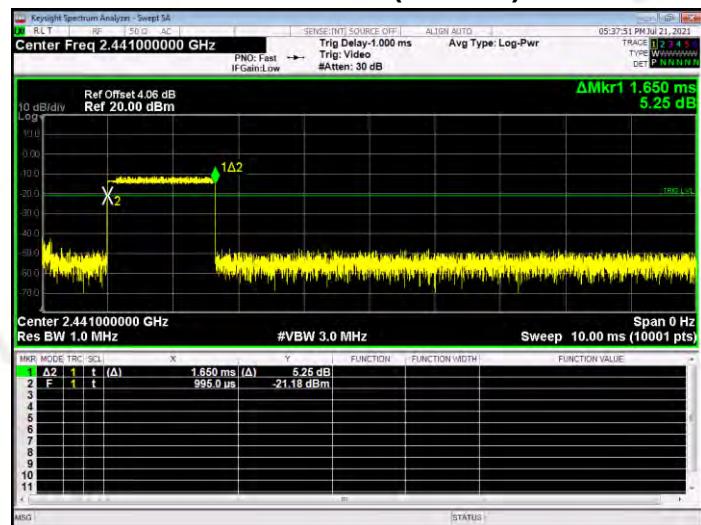

PSK (3-DH5)

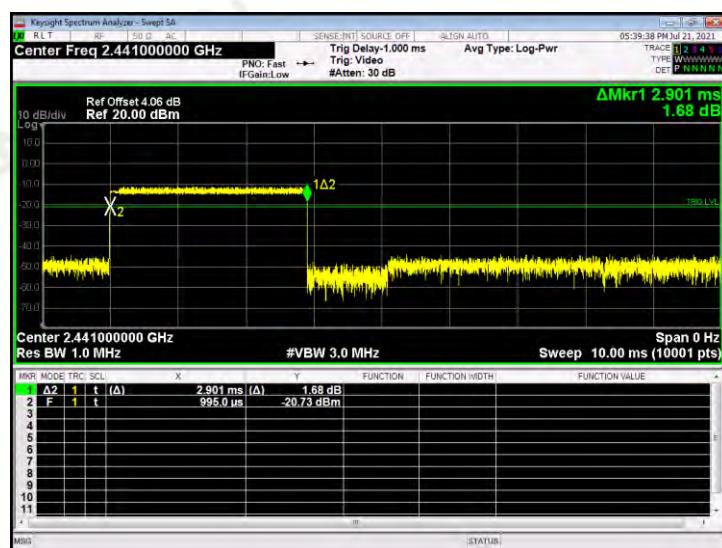

10. MAXIMUM PEAK OUTPUT POWER**10.1 Measurement Procedure**

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.

10.2 Limit

For all other frequency hopping systems in the 2400-2483.5MHz band: 0.125 watts .

10.3 Test SET-UP (Block Diagram of Configuration)**10.4 Measurement Results**


RBW:	2MHz	Temperature:	24 °C
VBW:	6MHz	Humidity:	50 %
Spectrum Detector:	PK	Test By:	Liao
Packet:	DH1, 2DH1, 3DH1(Worst case)	Test Date:	July 21, 2021

Channel Frequency (MHz)	Peak Power output (dBm)	Peak Power output (W)	Peak Power Limit (dBm/W)	Results
GFSK				
2402.00	-6.641	0.000217	21 / 0.125	PASS
2441.00	-8.829	0.000131	21 / 0.125	PASS
2480.00	-10.263	0.000094	21 / 0.125	PASS
π/4-DQPSK				
2402.00	-4.438	0.000360	21 / 0.125	PASS
2441.00	-6.609	0.000218	21 / 0.125	PASS
2480.00	-8.219	0.000151	21 / 0.125	PASS
8DPSK				
2402.00	-3.976	0.000400	21 / 0.125	PASS
2441.00	-6.141	0.000243	21 / 0.125	PASS
2480.00	-7.856	0.000164	21 / 0.125	PASS


GFSK Lowest Channel




GFSK Middle Channel

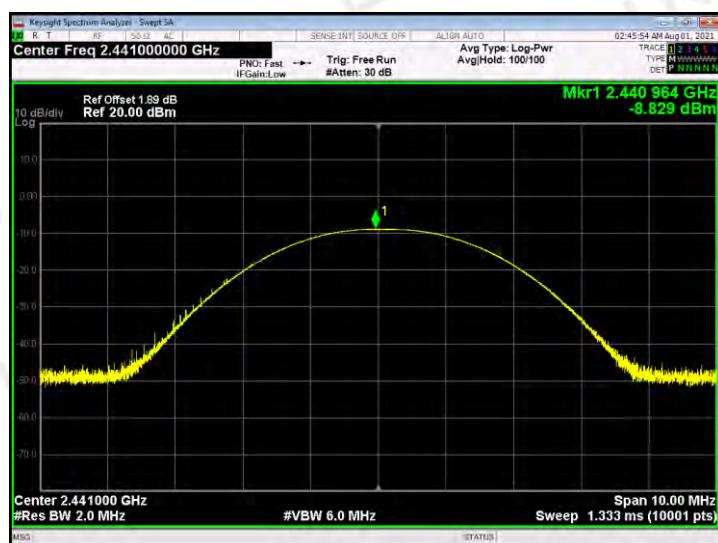


GFSK Highest Channel

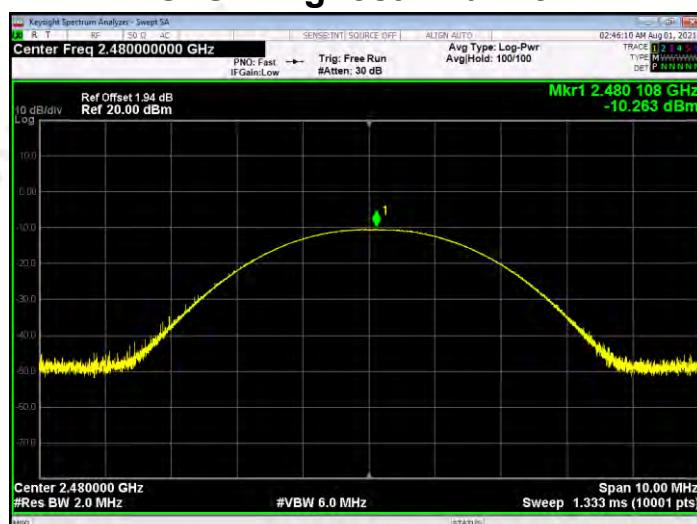


π/4-DQPSK Lowest Channel

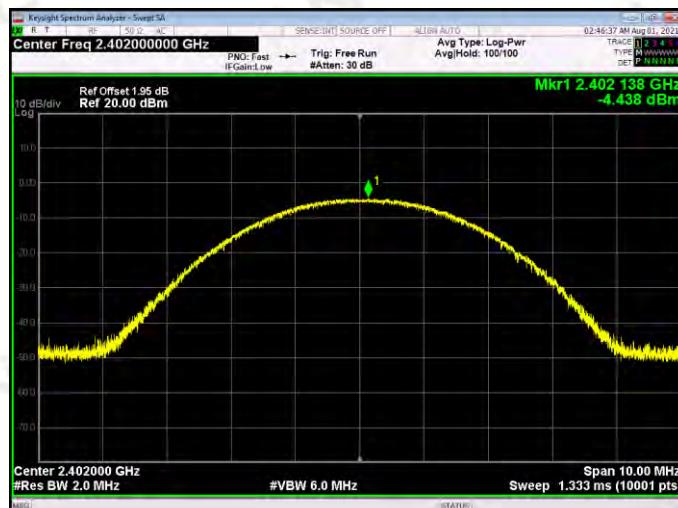


π/4-DQPSK Middle Channel

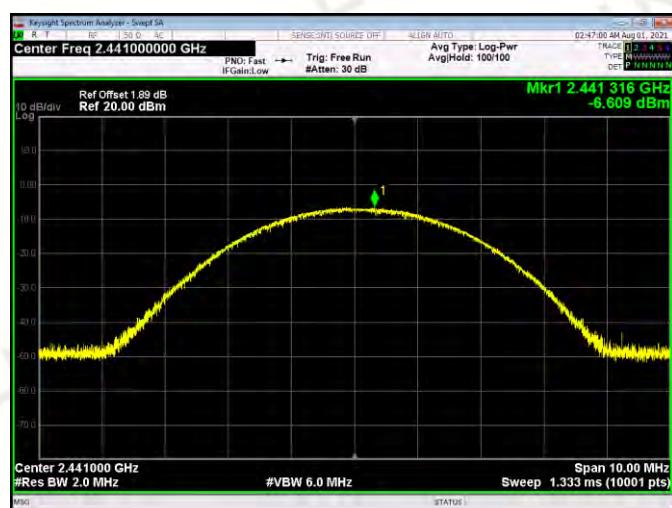


π/4-DQPSK Highest Channel

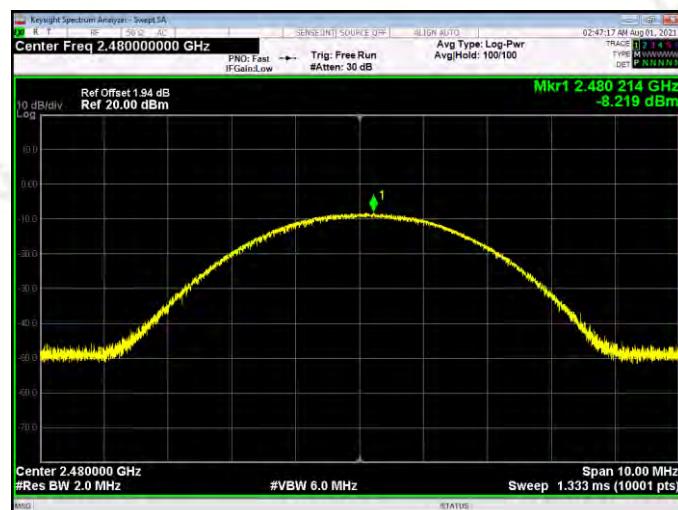

8DPSK Lowest Channel

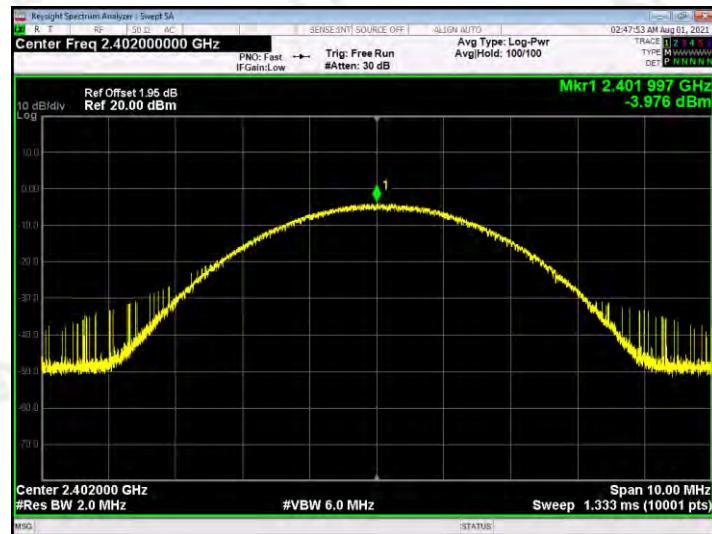

8DPSK Middle Channel

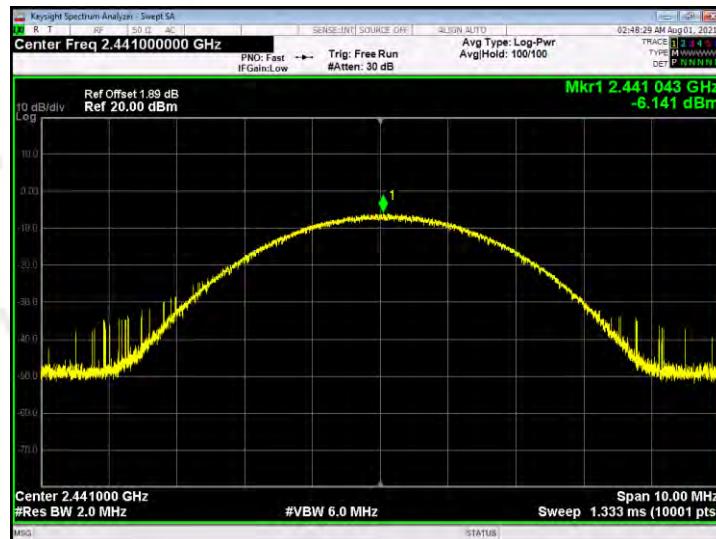

8DPSK Highest Channel





11.1 Measurement Procedure

Out of Band Emissions, FCC Rule 15.247(d):

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.

During the conducted emission test, the spectrum analyzer was set with the following configurations:

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to100KHz, and the video bandwidth set to 300kHz.

11.2 Limit

15.247(d)In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

11.3 Measurement Results

Please see below test table and plots.

Note: All modes of operation were investigated and the worst case (8DPSK Mode) emissions are reported.

For Radiated restricted band:

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity:	54 %
Test Distance:	3m	Test By:	Liao
Test Results:	PASS	Test Voltage	AC 120V/60Hz

Radiated Emission Measurement


File :JUNLAN

Data :#74

Date: 2021/07/24

Time: 9:11:56

100.0 dBuV/m

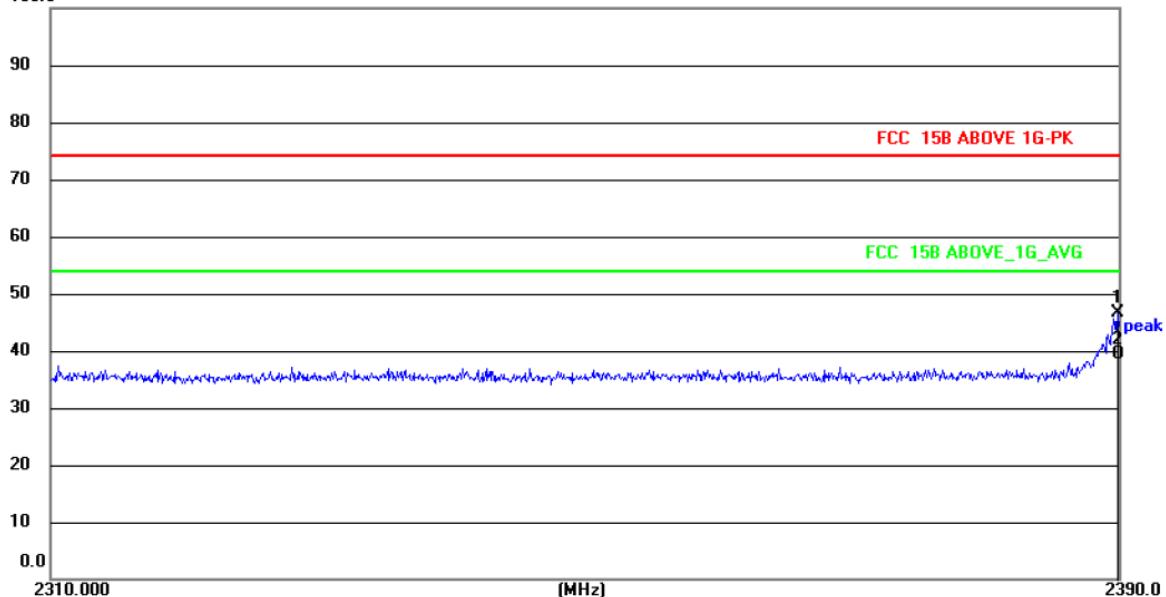

Site 966 Chamber

Polarization: **Horizontal**

Temperature: 26(C)

Limit: FCC 15B ABOVE 1G-PK

Power: AC120/60Hz

Humidity: 54 %

EUT:

Distance: 3m

M/N: SB3713-OP


Mode: BT 2402MHz

Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn

ADAPTER:JY024120200AA-UL

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2389.973	42.62	3.90	46.52	74.00	27.48	peak	143	25	P	
2 *	2389.973	35.40	3.90	39.30	54.00	14.70	AVG	138	106	P	


E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2402MHz (8DPSK)	Humidity:	54 %
Test Distance:	3m	Test By:	Liao
Test Results:	PASS	Test Voltage	AC 120V/60Hz

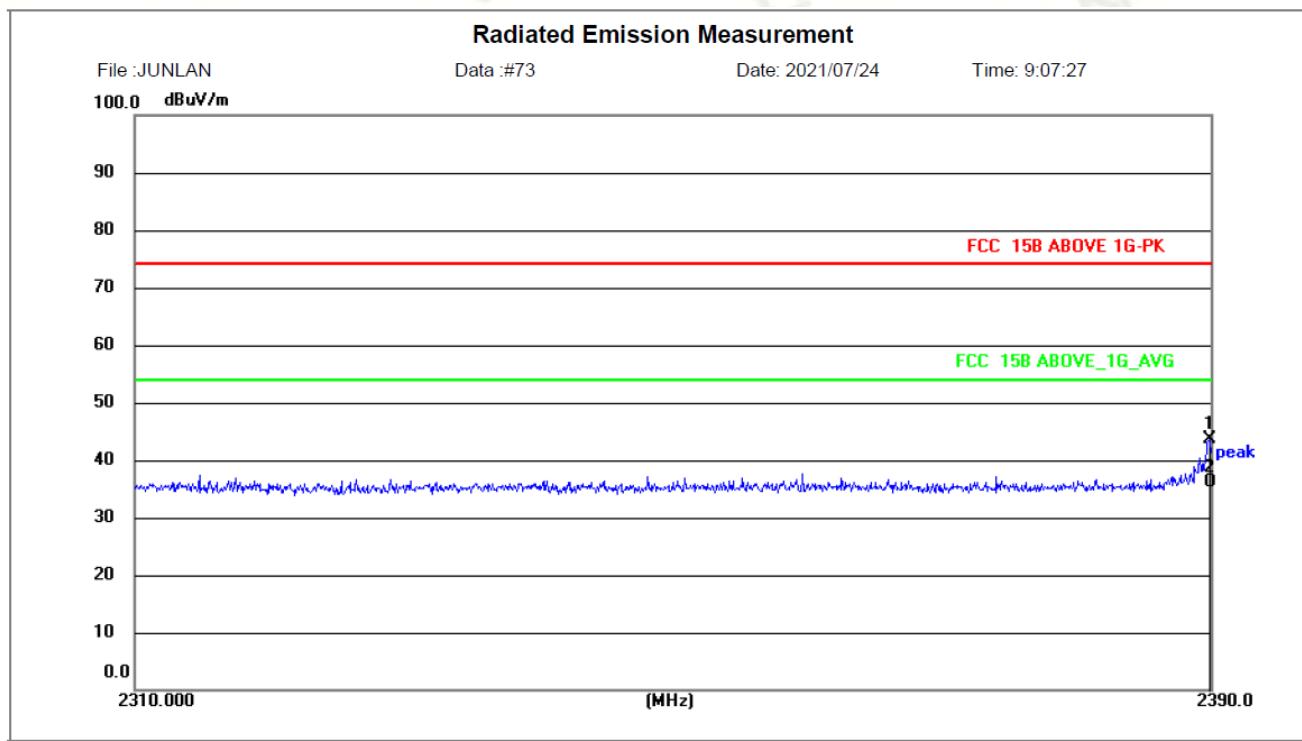


Site 966 Chamber Polarization: **Vertical** Temperature: 26(C)
 Limit: FCC 15B ABOVE 1G-PK Power: AC120/60Hz Humidity: 54 %
 EUT: Distance: 3m
 M/N: SB3713-OP
 Mode: BT 2402MHz
 Note: Manuf:JUNLAN ELECTRONIC LTD Tester:Yahn
 ADAPTER:JY024120200AA-UL

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2389.920	39.81	3.90	43.71	74.00	30.29	peak	114	129	P	
2 *	2389.920	32.15	3.90	36.05	54.00	17.95	AVG	133	277	P	

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Horizontal
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Test Distance:	3m	Test By:	Liao
Test Results:	PASS	Test Voltage	AC 120V/60Hz

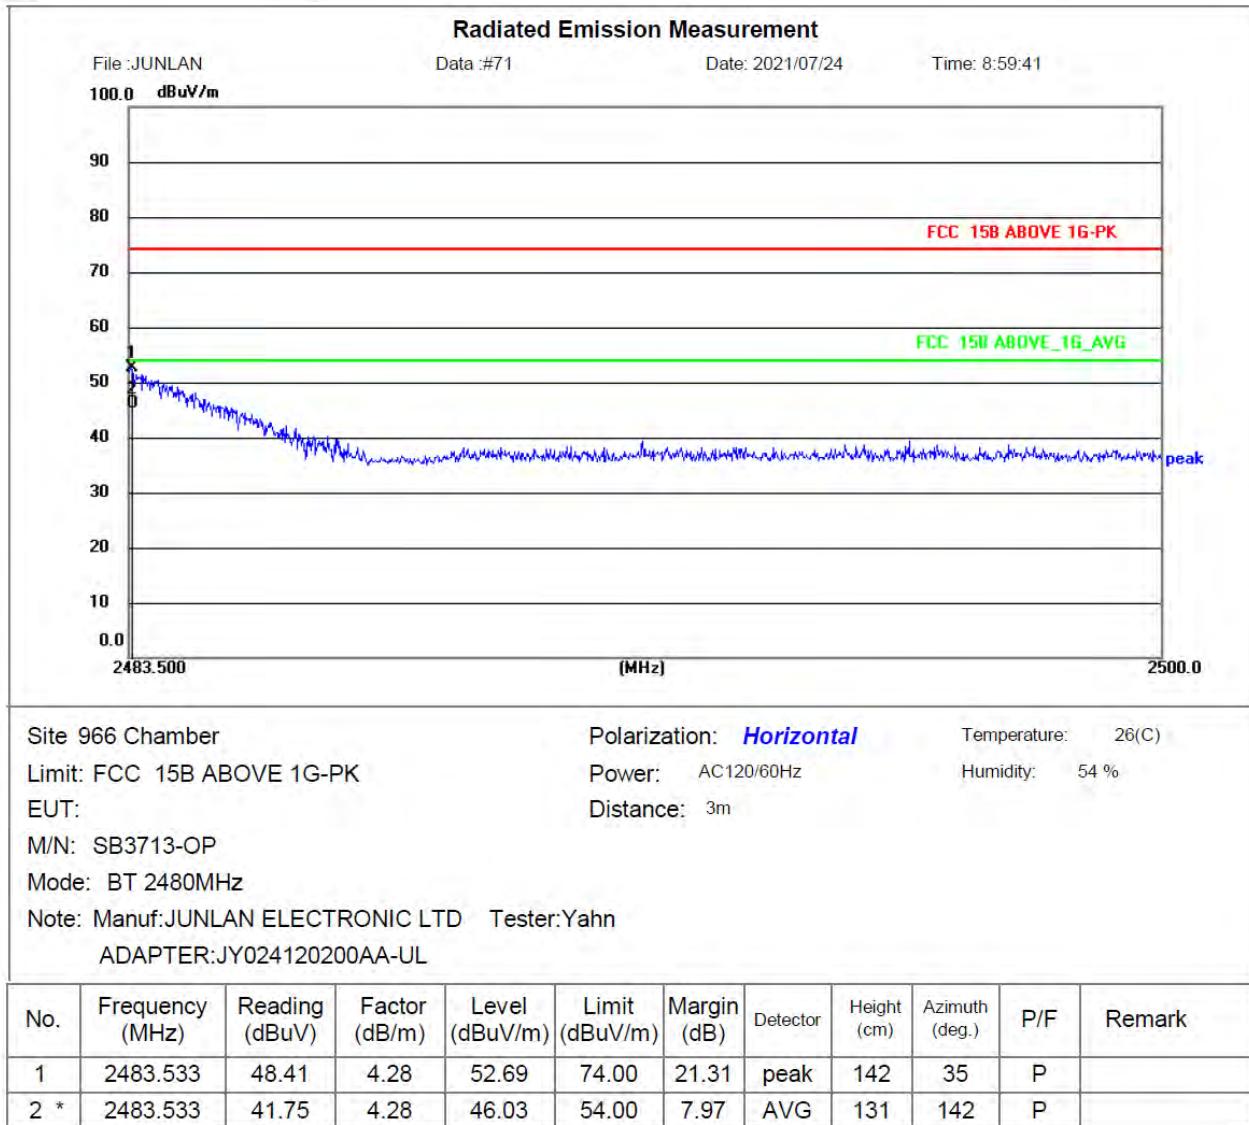

E.U.T:	37 INCH BLUETOOTH SOUNDBAR WITH OPTICAL	Polarization:	Vertical
Model No.:	SB3713-OP	Temperature:	26 °C
Test Mode:	TX 2480MHz (8DPSK)	Humidity:	54 %
Test Distance:	3m	Test By:	Liao
Test Results:	PASS	Test Voltage	AC 120V/60Hz


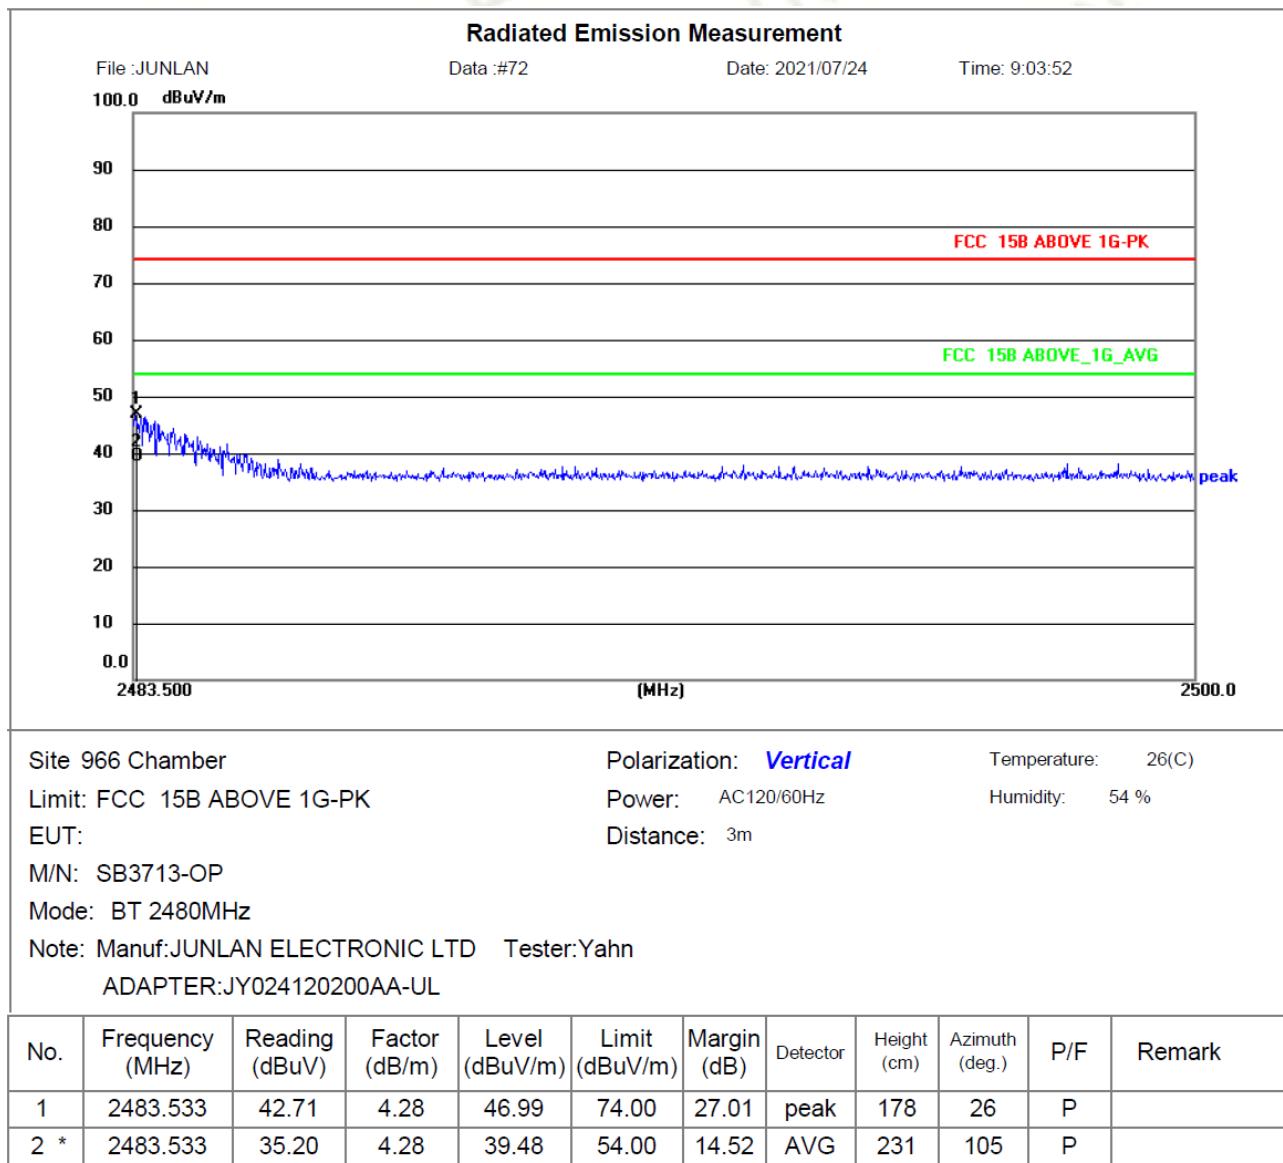


Note: (1) Result= Reading + Factor
(2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
(3) Horn antenna used for the emission over 1000MHz.





For RF Conducted restricted band:



GFSK Lowest Channel

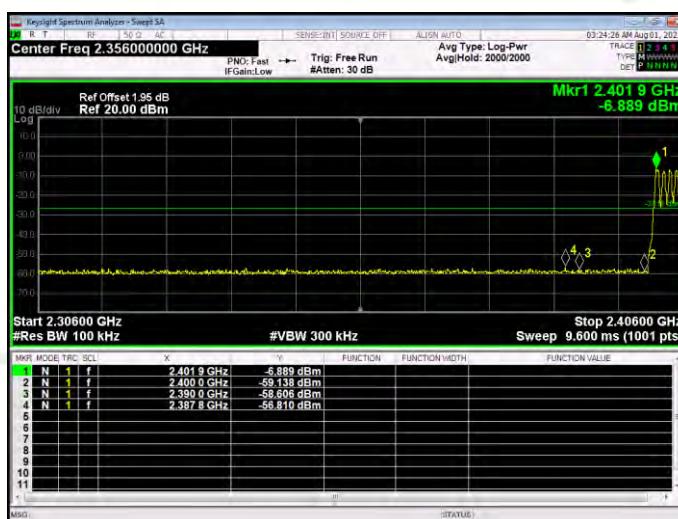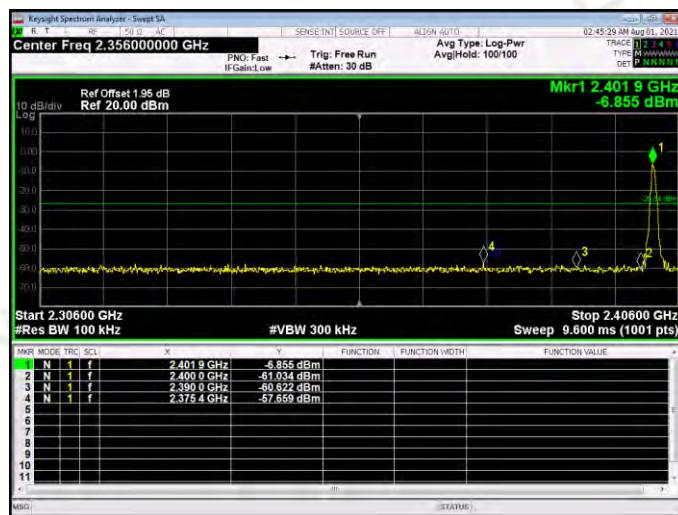



GFSK Highest Channel

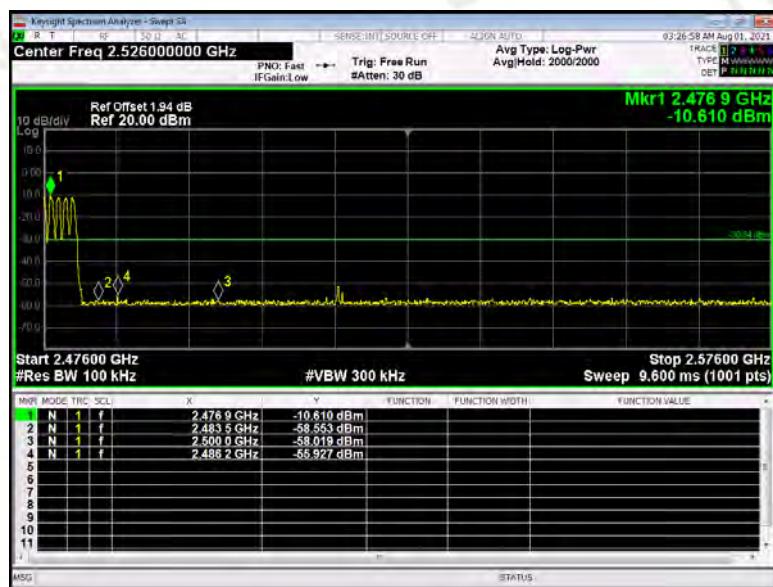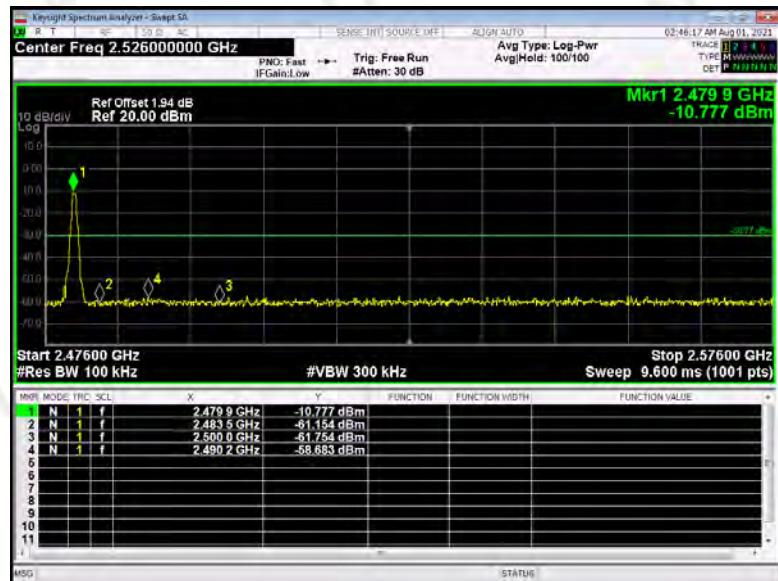



$\pi/4$ -DQPSK Lowest Channel

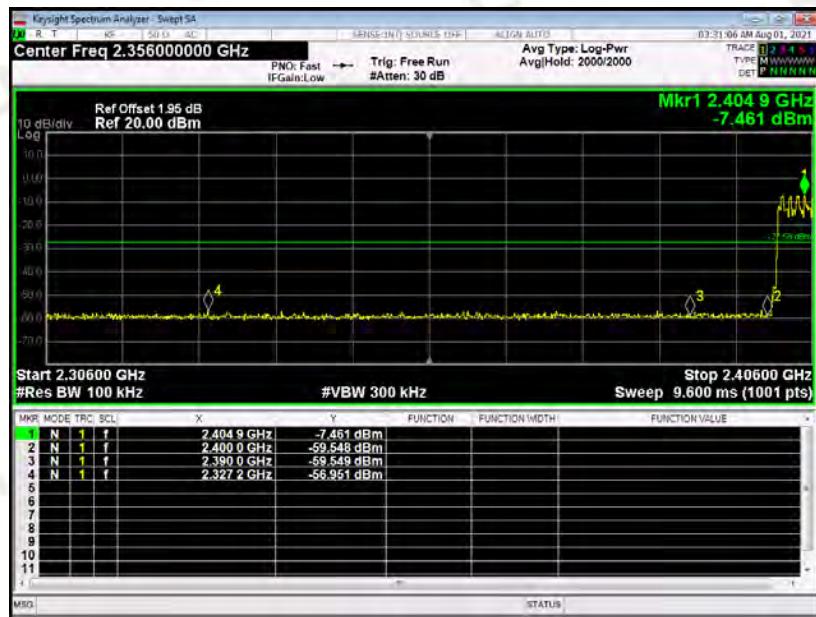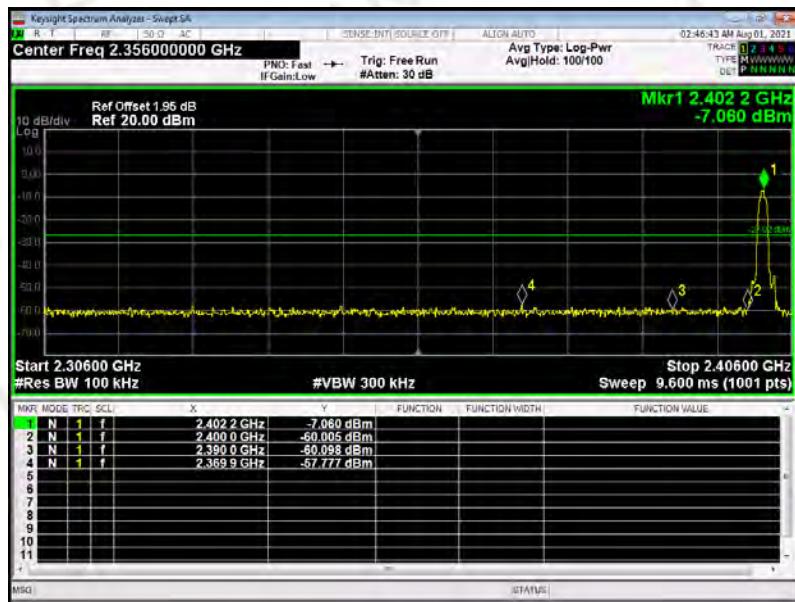



π/4-DQPSK Highest Channel

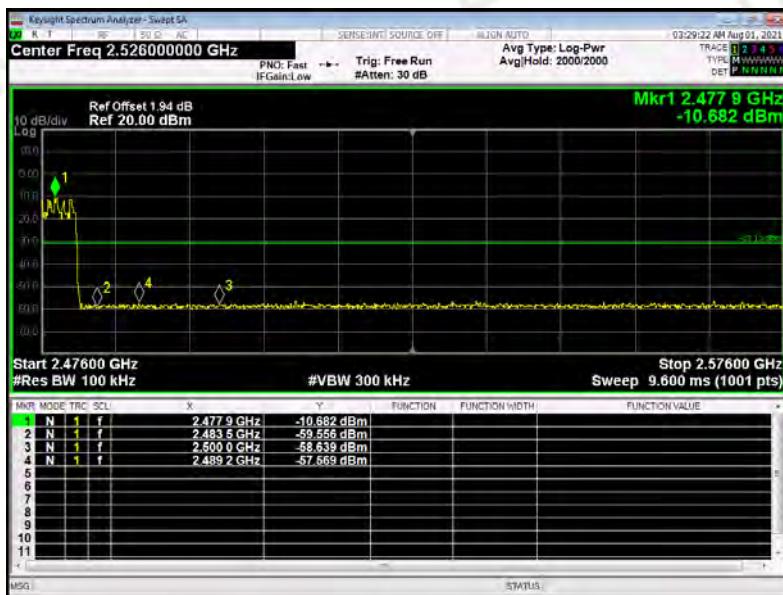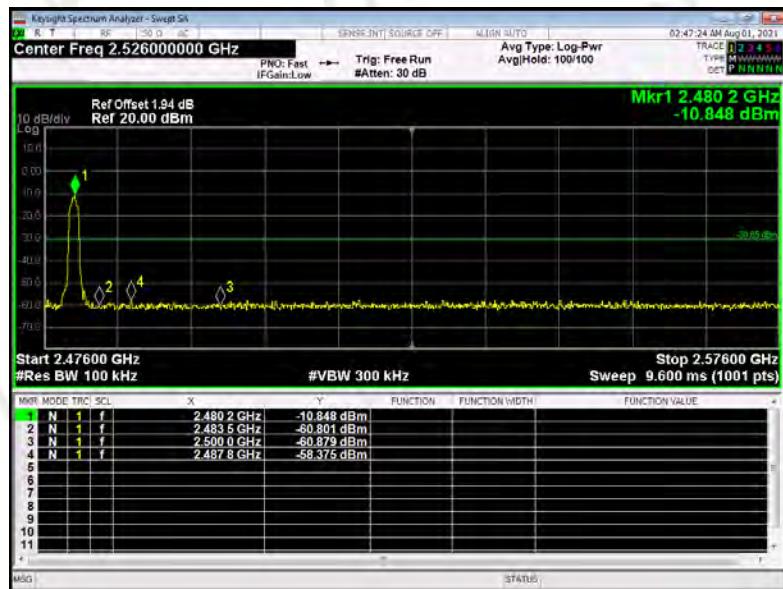

8DPSK Lowest Channel

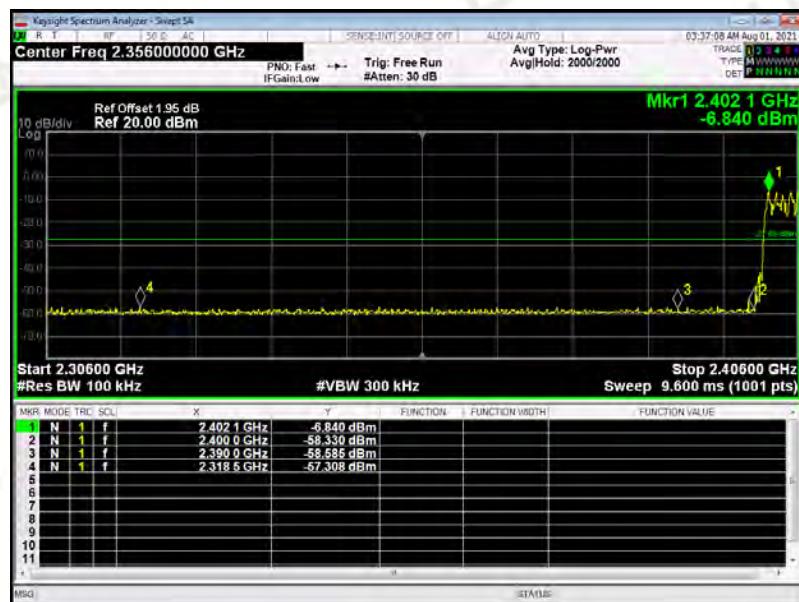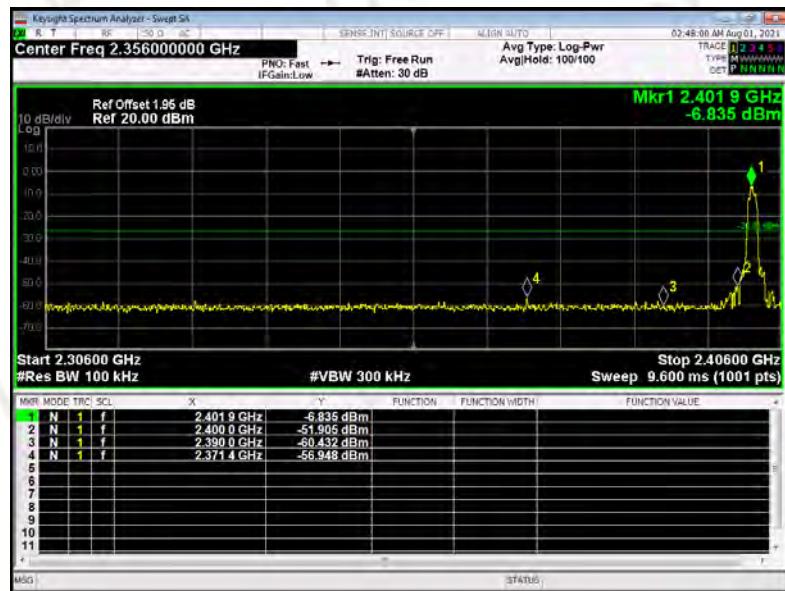

8DPSK Highest Channel

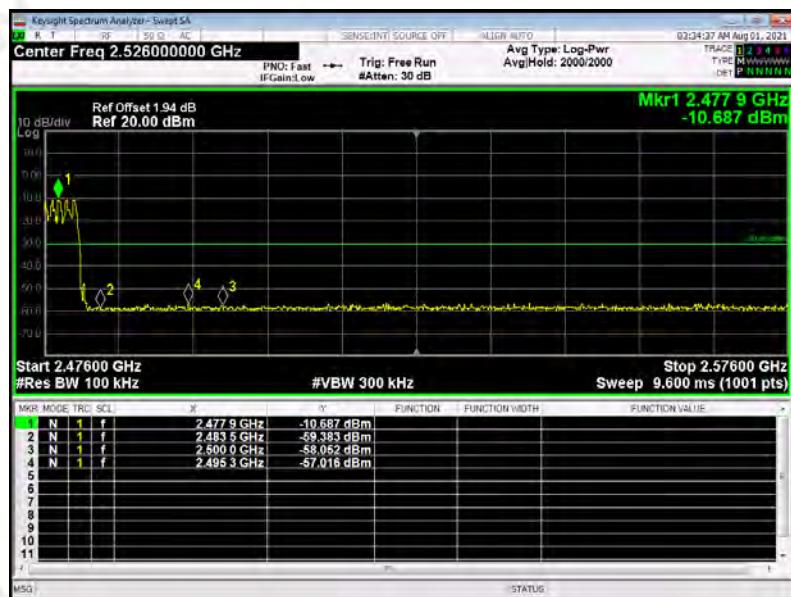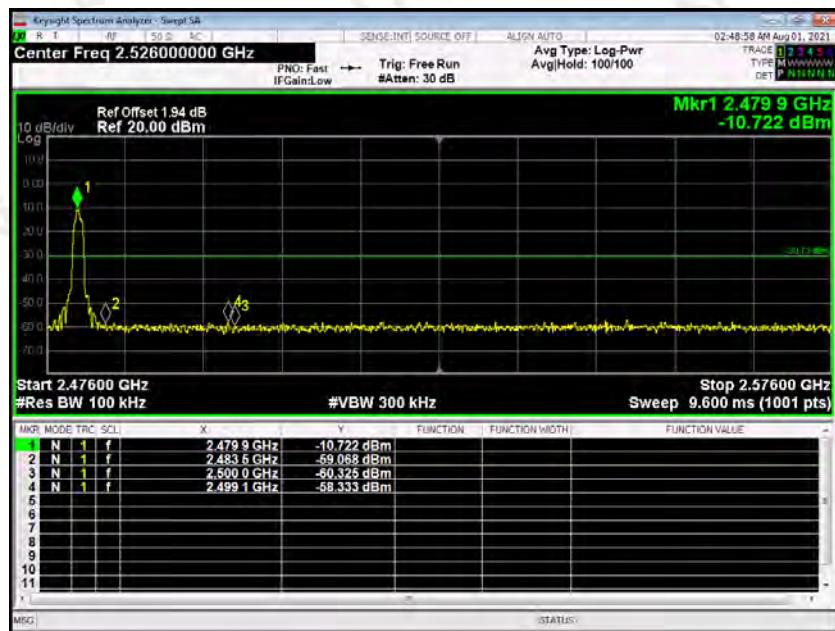

12. ANTENNA APPLICATION

12.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.204:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

12.2 Measurement Results

The EUT antenna is PCB antenna. It comply with the standard requirement.

13. CONDUCTED SPURIOUS EMISSIONS

13.1 Measurement Procedure

Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.

13.2 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

13.3 Test SET-UP (Block Diagram of Configuration)




13.4 Measurement Results


Pass

Please refer to following plots.


GFSK Lowest Channel

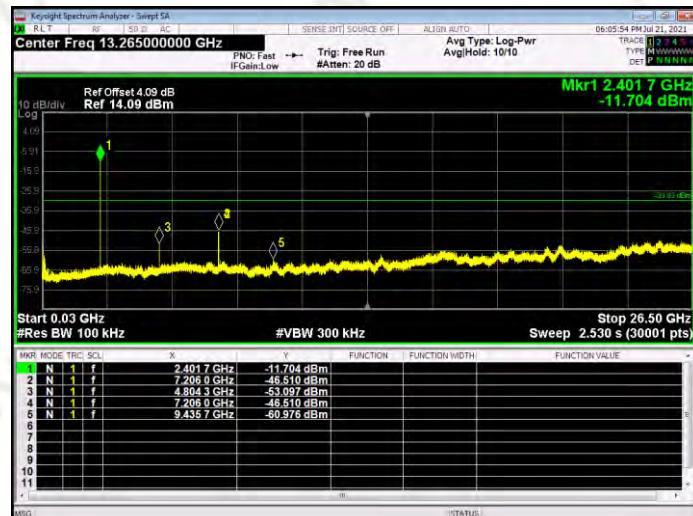


GFSK Middle Channel

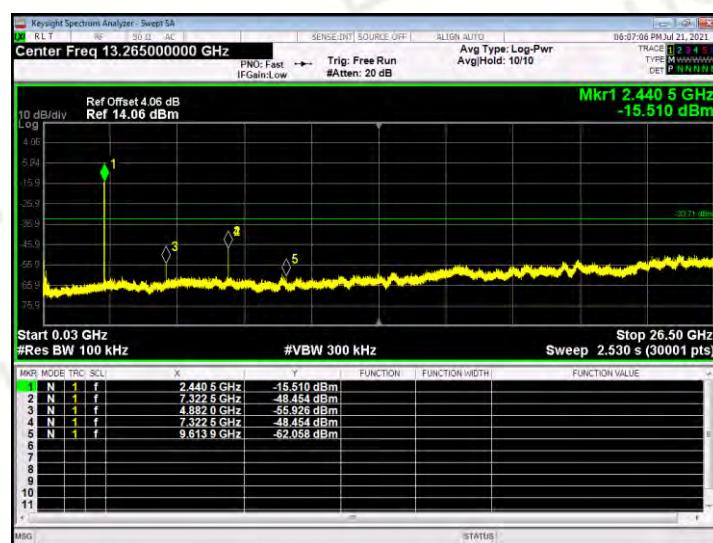


GFSK Highest Channel

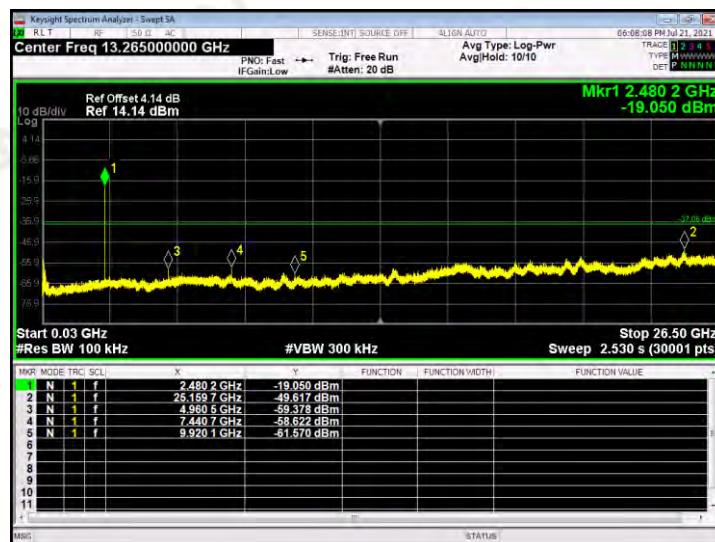


π/4-DQPSK Lowest Channel

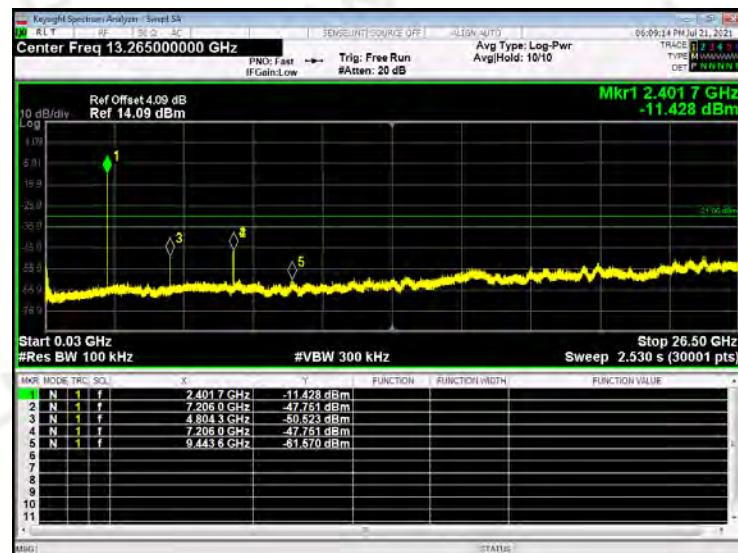


π/4-DQPSK Middle Channel

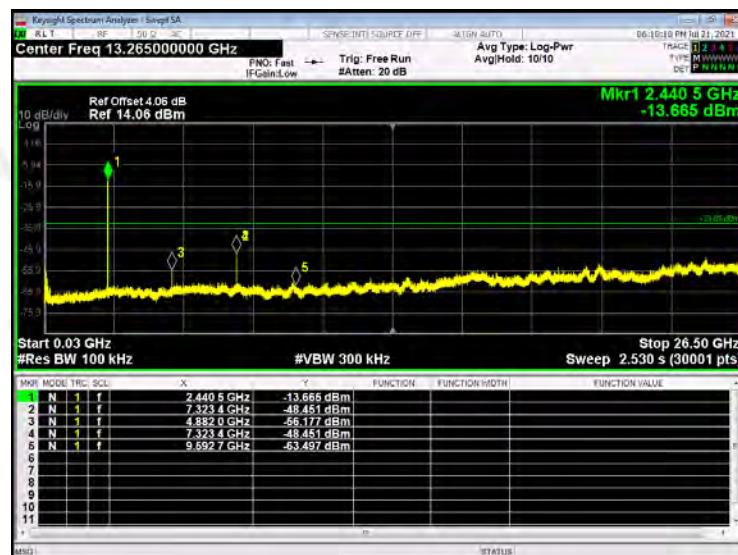

π/4-DQPSK Highest Channel

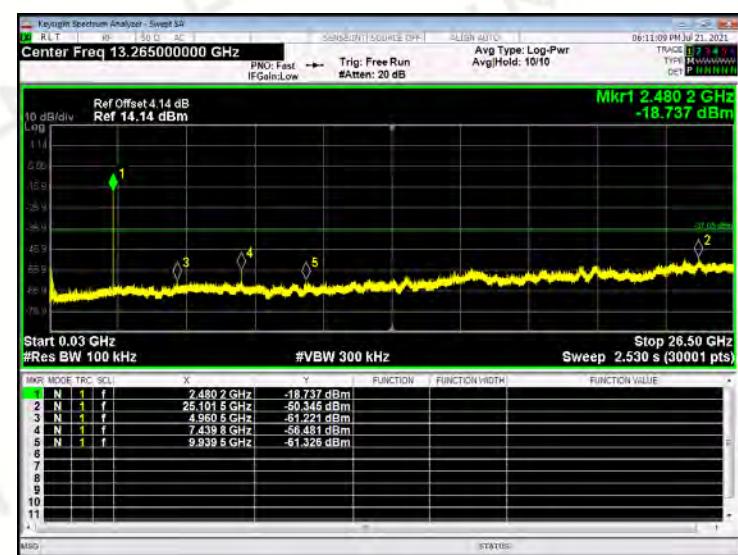

8DPSK Lowest Channel

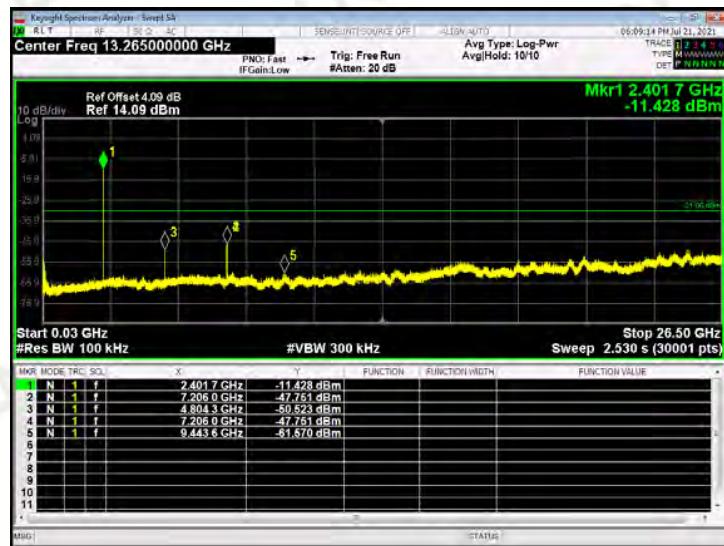

8DPSK Middle Channel



8DPSK Highest Channel





14. TEST EQUIPMENT LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated dates	Cal. Interval
1	Conducted Emission Test Software	EZ-EMC	Ver.CCS-3A1-CE	N/A	N/A	N/A
2	AMN	Schwarzbeck	NNLK8121	8121370	2020.10.13	1 Year
3	AMN	ETS	3810/2	00020199	2020.10.13	1 Year
4	AAN	TESEQ	T8-Cat6	38888	2020.10.13	1 Year
5	Pulse Limiter	CYBRTEK	EM5010	E115010056	2021.05.19	1 Year
6	EMI Test Receiver	Rohde&Schwarz	ESCI	101210	2020.10.13	1 Year
1	Radiated Emission Test Software	EZ-EMC	Ver.CCS-03A1	N/A	N/A	N/A
2	Horn Antenna	Sunol	DRH-118	A101415	2020.10.19	1 Year
3	Broadband Hybrid Antenna	Sunol	JB1	A090215	2021.03.02	1 Year
4	PREAMP	HP	8449B	3008A00160	2020.10.13	1 Year
5	PREAMP	HP	8447D	2944A07999	2021.05.19	1 Year
6	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2020.10.13	1 Year
7	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2020.10.13	1 Year
8	Signal Generator	Agilent	E4421B	MY4335105	2020.11.12	1 Year
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2020.10.13	1 Year
10	MXA Signal Analyzer	Keysight	N9020A	MY51110104	2020.10.13	1 Year
11	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2021.05.19	1 Year
12	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2021.05.19	1 Year
13	RF power divider	Anritsu	K241B	992289	2020.10.13	1 Year
14	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2020.10.13	1 Year
15	Active Loop Antenna	Com-Power	AL-130R	10160009	2021.05.19	1 Year
16	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2021.05.19	1 Year
17	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2021.05.19	1 Year
18	Horn Antenna	A-INFOMW	LB-180400-KF	J211060660	2020.11.05	1 Year
19	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2020.10.13	1 Year
20	Signal Generator	Agilent	N5183A	MY47420153	2020.10.13	1 Year
21	Spectrum Analyzer	Rohde&Schwarz	FSP 40	100501	2020.10.13	1 Year
22	Power Meter	KEYSIGHT	N1911A	MY50520168	2020.10.13	1 Year
23	Frequency Meter	VICTOR	VC2000	997406086	2020.10.13	1 Year
24	DC Power Source	HYELEC	HY5020E	055161818	2020.10.13	1 Year



APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

---END---