

Report on the FCC and IC Testing of the  
BALTECH AG  
Model: 10090-640  
In accordance with FCC 47 CFR Part 15C and  
Industry Canada RSS-210 and Industry Canada  
RSS-GEN

Prepared for: BALTECH AG  
Lilienthalstr. 27  
85399 Hallbergmoos - Germany

FCC ID: OKY10090640A03B  
IC: 7657A-10090640





Product Service

Choose certainty.  
Add value.

## COMMERCIAL-IN-CONFIDENCE

Date: 2022-05-20  
Document Number: TR-713254909-05 (Revision 1)

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Patrick Müller	2022-05-20	 SIGN-ID 651365 Patrick Müller
Authorised Signatory	Alex Fink	2022-05-20	 SIGN-ID 652891

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and Industry Canada RSS-210 and Industry Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Patrick Müller	2022-05-18	 SIGN-ID 651366 Patrick Müller

Laboratory Accreditation

DAkkS Reg. No. D-PL-11321-11-03

DAkkS Reg. No. D-PL-11321-11-04

Laboratory recognition

Registration No. BNetzA-CAB-16/21-15

Industry Canada test site registration

3050A-2

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C, Industry Canada RSS-210, Issue 10 (12-2019) and ISED Canada RSS-GEN, Issue 05 (03-2019).



#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2022 TÜV SÜD Product Service

#### ACCREDITATION

Our BNetzA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our BNetzA Accreditation.

Trade Register Munich  
HRB 85742  
VAT ID No. DE129484267  
Information pursuant to Section 2(1)  
DL-InfoV (Germany) at  
www.tuev-sued.com/imprint

Managing Directors:  
Walter Reithmaier (CEO)  
Dr. Jens Butenandt  
Patrick van Welij

Phone: +49 (0) 9421 55 22-0  
Fax: +49 (0) 9421 55 22-99  
[www.tuev-sued.de](http://www.tuev-sued.de)

TÜV SÜD Product Service GmbH  
Äußere Frühlingstraße 45  
94315 Straubing  
Germany



Contents

1      **Report Summary .....2**

1.1    Report Modification Record.....2

1.2    Introduction.....2

1.3    Brief Summary of Results .....3

1.4    Declaration of Build Status .....4

1.5    Product Information .....6

1.6    Deviations from the Standard.....7

1.7    EUT Modification Record .....8

1.8    Test Location .....8

2      **Test Setups .....9**

3      **Test Details ..... 13**

3.1    20 dB Bandwidth ..... 13

3.2    Field Strength of any Emission ..... 16

3.3    Frequency Tolerance Under Temperature Variations..... 22

3.4    AC Power Line Conducted Emissions ..... 24

4      **Measurement Uncertainty ..... 28**

**Annexes:**

TR-713254909-05 rev0 Annex A: Test setup Photos  
TR-713254909-05 rev0 Annex B: External Photos  
TR-713254909-05 rev0 Annex C: Internal Photos



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
0	First Issue	2022-05-04
1	Added comments to parameters RBW and VBW in spurious emissions and measuring distance.	2022-05-20

**Table 1**

## 1.2 Introduction

Applicant	BALTECH AG
Manufacturer	BALTECH AG
Model Number(s)	10090-640
Serial Number(s)	15000176 15000177
Hardware Version(s)	---
Software Version(s)	---
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15C : 2021 ISED RSS-210, Issue 10 : 2019 ISED RSS-GEN, Issue 05, Amd. 1, Amd. 2: 02-2021
Test Plan/Issue/Date	---
Order Number	5487175
Date	2022-03-28
Date of Receipt of EUT	2022-04-07
Start of Test	2022-04-07
Finish of Test	2022-04-22
Name of Engineer(s)	Patrick Müller
Related Document(s)	ANSI C63.10 (2013)



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, Industry Canada RSS-210 and Industry Canada RSS-GEN is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: Transmitting continuously				
2.1	15.215 (c), N/A and 6.6	20 dB Bandwidth	Pass	ANSI C63.10 (2013)
2.2	15.209, 4.3 and 6.13	Field Strength of any Emission	Pass	ANSI C63.10 (2013)
2.3	N/A and 6.11	Frequency Tolerance Under Temperature Variations	Pass	ANSI C63.10 (2013)
2.4	15.207, N/A and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.10 (2013)

**Table 2**



#### 1.4 Declaration of Build Status

General information	
Order number	5487175
Applicant (incl. address and contact person)	BALTECH AG Lilienthalstr. 27 85399 Hallbergmoos - Germany  Mr. Iftekhar Alam
Manufacturer (when different to applicant)	Applicant
Name and address of factory(ies)	Applicant

**Table 3**

Equipment characteristics:	
Type of equipment:	RFID Reader with BLE interface (2.4 GHz, 13,56 MHz, 125 kHz); (Note: 2.4 GHz BT and 13.56 MHz are separate reports)
Type designation*:	10090-640
Parts of the system:	Reference device is a single unit
Version of EUT	As received
Serial number:	15000176 15000177
Power supply:	DC on USB interface (5 V nom.)
highest frequency generated or used within the EUT	generated frequency < 108 MHz

**Table 4**



Marking plate	
<div><div><div><div>CE</div><div>FC</div></div><div><div>S/N: 15000176</div><div>M/N: 10090-640</div><div>A/N: 10090-640-62</div><div>BALTECH 2022-03</div><div>FCC ID OKY10090640A03B</div><div>IC 7657A-10090640</div><div>Contains FCC ID: Q0Q-BGM220S</div><div>Contains IC: 5123A-BGM220S</div><div>VOLTS: 5VDC  , AMPS: 0.3A</div><div>www.baltech.de</div><div>BALTECH AG Lilienthalstraße 27, 85399 Hallbergmoos, Germany</div></div><div></div></div></div> <tr><td><div><div><div><div>CE</div><div>FC</div></div><div><div>S/N: 15000177</div><div>M/N: 10090-640</div><div>A/N: 10090-640-62</div><div>BALTECH 2022-03</div><div>FCC ID OKY10090640A03B</div><div>IC 7657A-10090640</div><div>Contains FCC ID: Q0Q-BGM220S</div><div>Contains IC: 5123A-BGM220S</div><div>VOLTS: 5VDC  , AMPS: 0.3A</div><div>www.baltech.de</div><div>BALTECH AG Lilienthalstraße 27, 85399 Hallbergmoos, Germany</div></div><div></div></div></div></td></tr>	<div><div><div><div>CE</div><div>FC</div></div><div><div>S/N: 15000177</div><div>M/N: 10090-640</div><div>A/N: 10090-640-62</div><div>BALTECH 2022-03</div><div>FCC ID OKY10090640A03B</div><div>IC 7657A-10090640</div><div>Contains FCC ID: Q0Q-BGM220S</div><div>Contains IC: 5123A-BGM220S</div><div>VOLTS: 5VDC  , AMPS: 0.3A</div><div>www.baltech.de</div><div>BALTECH AG Lilienthalstraße 27, 85399 Hallbergmoos, Germany</div></div><div></div></div></div>
<div><div><div><div>CE</div><div>FC</div></div><div><div>S/N: 15000177</div><div>M/N: 10090-640</div><div>A/N: 10090-640-62</div><div>BALTECH 2022-03</div><div>FCC ID OKY10090640A03B</div><div>IC 7657A-10090640</div><div>Contains FCC ID: Q0Q-BGM220S</div><div>Contains IC: 5123A-BGM220S</div><div>VOLTS: 5VDC  , AMPS: 0.3A</div><div>www.baltech.de</div><div>BALTECH AG Lilienthalstraße 27, 85399 Hallbergmoos, Germany</div></div><div></div></div></div>	

Table 5



## 1.5 Product Information

### 1.5.1 Technical Description

The RFID Reader 10090-640 controls and monitors accesses.

### 1.5.2 EUT Port/Cable Identification

Port	Usage	Type	Screened
P1 – USB	approx. 1.0 m	DC power serial interface	Yes

**Table 6**

### 1.5.3 EUT Accessories / AE Identification

Accessory / AE description	Type designation	S/N or ID	Manufacturer
RFID Tag card	"TestCard"	---	Baltech AG
Notebook	E406	NA	lenovo

**Table 7**



#### 1.5.4 Test Configuration

Configuration	Description
DC Powered	Connected to Notebook for power supply

**Table 8**

#### 1.5.5 Modes of Operation

Mode	Description
Reading TAG continuously	Reading TAG continuously

**Table 9**

#### 1.6 Deviations from the Standard

none





## 1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.  
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Serial Number:			
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 10**

## 1.8 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing Test Laboratory.

Test Name	Name of Engineer(s)
Configuration and Mode: Transmitting continuously and waiting for badge (RFID card)	
20 dB Bandwidth	Patrick Müller
Field Strength of any Emission	Patrick Müller
Frequency Tolerance Under Temperature Variations	Patrick Müller
AC Power Line Conducted Emissions	Patrick Müller


**Table 11**

Office Address:

Äußere Frühlingstraße 45  
94315 Straubing  
Germany

## 2 Test Setups

### 2.1.1.1 Radiated Emission in Fully or Semi Anechoic Room

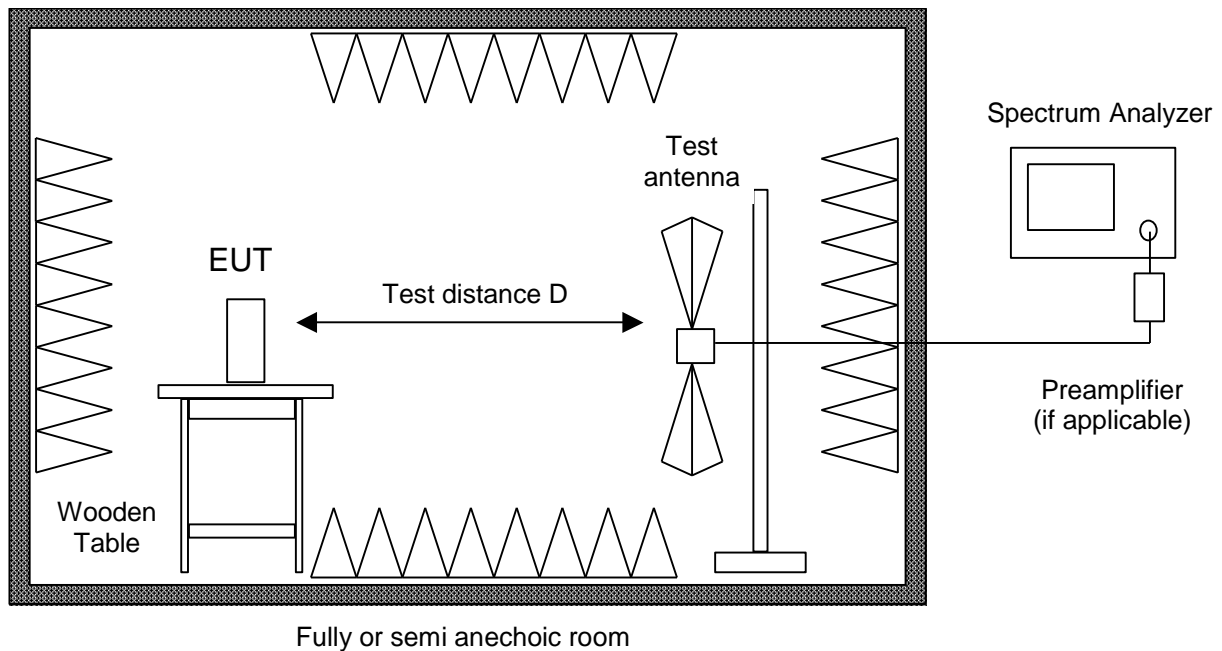

Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.

Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).

Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.

All tests below 8.2 GHz are performed at a test distance  $D$  of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 for alternative test sites is used (see 2.1.1.2). If prescans are recorded in fully anechoic room they are indicated appropriately.



According to section 13 of KDB558074 the requirement for radiated emissions on the band edges was performed with a reduced bandwidth of 100 kHz instead of 1 MHz.

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.


EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

### 2.1.1.2 Radiated Emission at Alternative Test Site

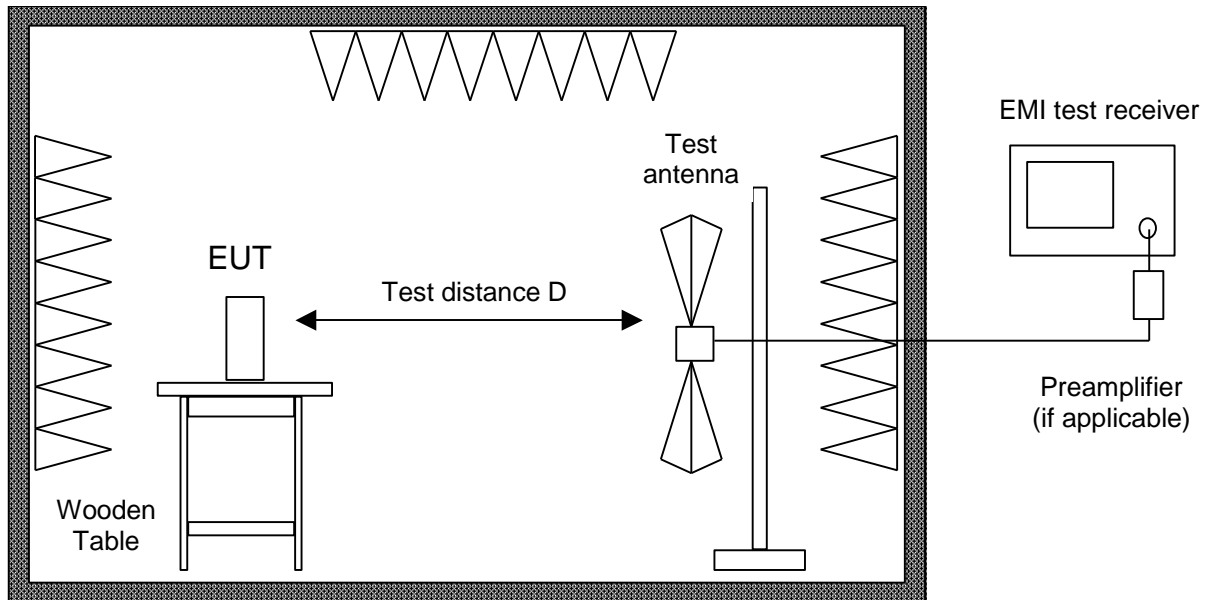

Alternate test site (semi anechoic room)

Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.

If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels. Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.

With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.



For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.



### 3 Test Details

#### 3.1 20 dB Bandwidth

##### 3.1.1 Specification Reference

FCC 47 CFR Part 15C, Industry Canada RSS-210 and Industry Canada RSS-GEN, Clause 15.215 (c), N/A and 6.6

##### 3.1.2 Equipment Under Test and Modification State

10090-640, S/N: 15000176 - Modification State 0

##### 3.1.3 Date of Test

2022-04-22

##### 3.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.9.1.

##### 3.1.5 Environmental Conditions

Ambient Temperature 21.0 °C  
Relative Humidity 32.0 %

##### 3.1.6 Test Results


Transmitting continuously and waiting for badge (RFID card)

Frequency (kHz)	20 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	F <sub>LOWER</sub> (kHz)	F <sub>UPPER</sub> (kHz)
125.00190	9.381	16.045	117.373	133.419

**Table 12**




Product Service

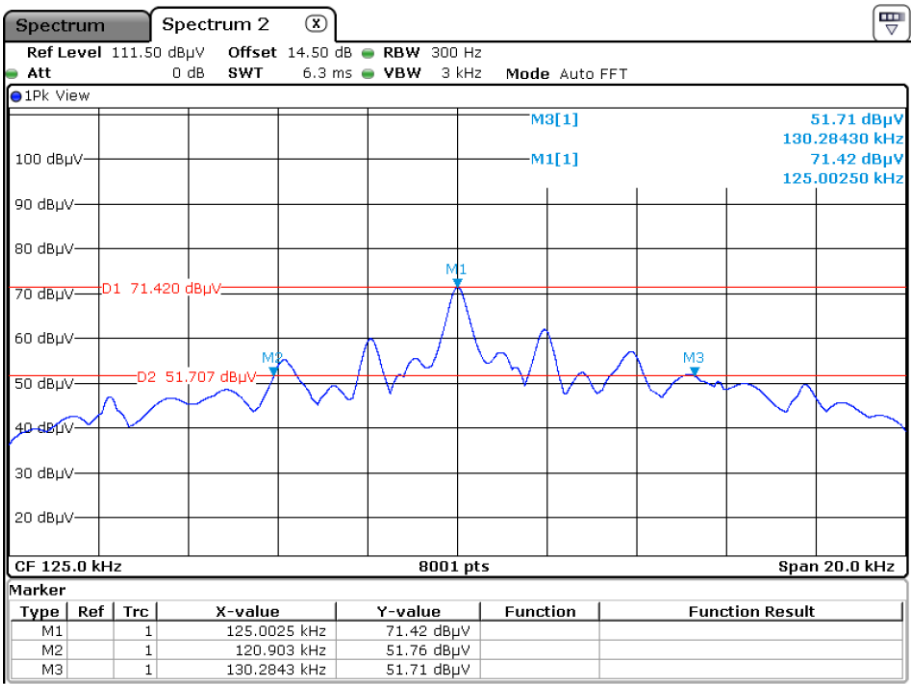

Date: 22.APR.2022 11:22:36

Figure 1 - 20 dB Bandwidth

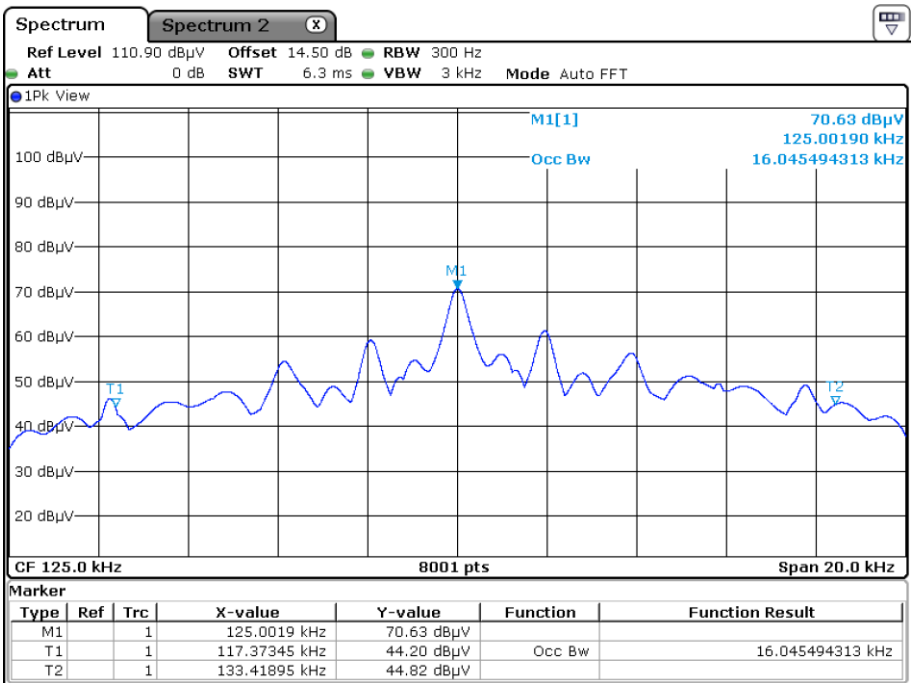

Date: 22.APR.2022 11:13:30

Figure 2 - 99% Occupied Bandwidth



FCC 47 CFR Part 15, Limit Clause 15.215 (c)

The 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Industry Canada RSS 210 and Industry Canada RSS GEN, Limit Clause

None specified.

**3.1.7 Test Location and Test Equipment Used**

This test was carried out in Non shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2024-02-29
Climatic test chamber	ESPEC	PL-2J	18843	24	2023-01-31

**Table 13**

TU - Traceability Unscheduled  
O/P Mon – Output Monitored using calibrated equipment  
N/A - Not Applicable



### 3.2 Field Strength of any Emission

#### 3.2.1 Specification Reference

FCC 47 CFR Part 15C, Industry Canada RSS-210 and Industry Canada RSS-GEN, Clause 15.209.

#### 3.2.2 Equipment Under Test and Modification State

10090-640, S/N: 15000176 - Modification State 0

#### 3.2.3 Date of Test


2022-04-21

#### 3.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.4 and 6.5. and ISED Canada RSS-Gen clause 6.13.


Measurements were made at a distance of 3 m. The limit lines shown on the plot were extrapolated from either 300 m or 30 m to the measurement distance of 3 m in accordance with ANSI C63.10 Clause 6.4.4.2.

#### Frequency range 9 kHz – 30 MHz

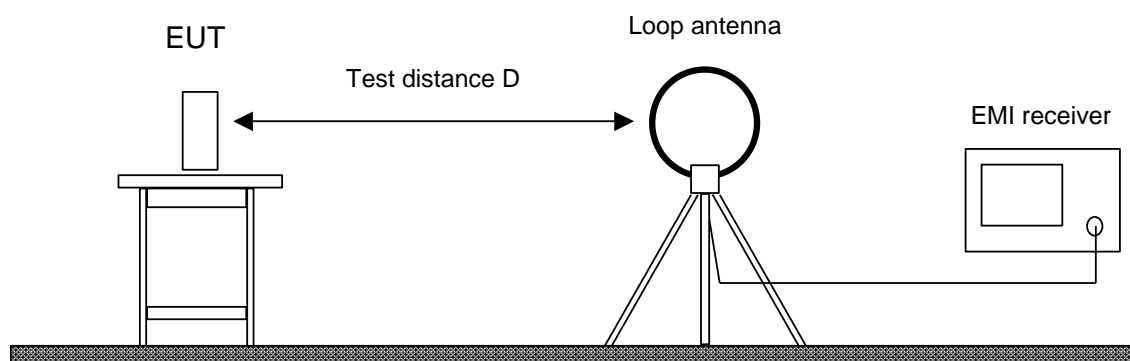

The EUT was placed on a non-conductive table, 0.8 m above the ground. Radiated emissions in the frequency 9 kHz – 30 MHz is measured within a semi-anechoic room with an active loop antenna with the measurement detector set to peak. In addition in the frequency range 9 kHz to 490 kHz also an average detector was used. The measurement bandwidth of the receiver was set to 300 Hz in the frequency range 9 kHz to 150 kHz and 10 kHz in the frequency range 150 kHz to 30 MHz. Prescans were performed in six positions of the EUT. For final measurements the detector was set to CISPR quasi-peak and in addition to CISPR average in the frequency range 9 kHz to 490 kHz with a resolution bandwidth 200 Hz in the frequency range 9 kHz to 150 kHz and 9 kHz in the frequency range 150 kHz to 30 MHz. Final tests were performed immediately after a final frequency and zoom (for drifting disturbances) and maximum adjustment.

### **Frequency range 30 MHz – 1 GHz**

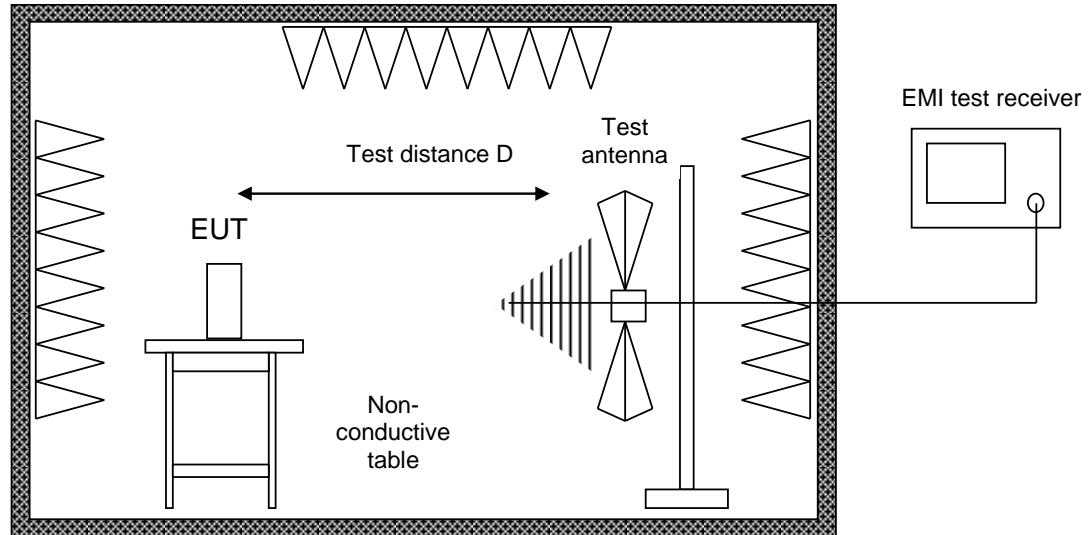

Alternate test site (semi anechoic room)

The EUT was placed on a non-conductive table, 0.8 m above the ground plane. Radiated emissions in the frequency range 30 MHz – 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4. for alternative test sites. A linear polarised logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. For prescan tests the test receiver is set to peak-detector with a bandwidth of 120 kHz. With the measurement bandwidth of the test receiver set to 120 kHz CISPR quasi-peak detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.

### **3.2.5 Environmental Conditions**


Ambient Temperature	21.0 °C
Relative Humidity	29.0 %



3.2.6 Test Results

Transmitting continuously


Measuring distance was 3m.

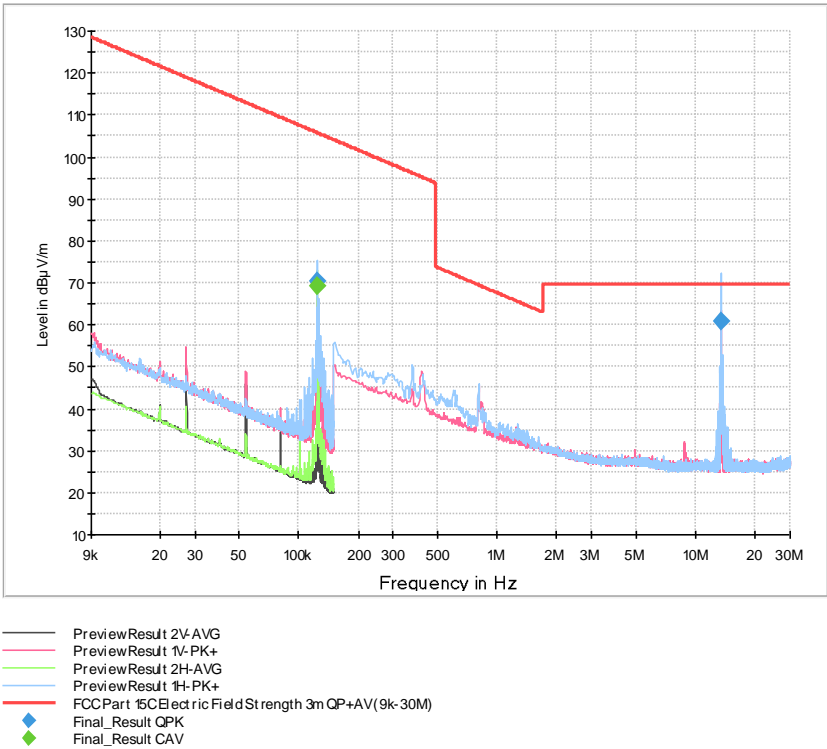

Final Results:

Frequency	QuasiPeak	CAverage	Limit	Margin	Meas. Time	Bandwidth (RBW)	VBW	Pol	Azimuth	Corr.
MHz	dBµV/m	dBµV/m	dBµV/m	dB	ms	kHz	kHz		deg	dB
0.125000	---	69.39	105.67	36.28	1000.0	0.200	#1	H	-158.0	19.3
0.125000	70.27	---	125.67	55.40	1000.0	0.200	#1	H	-157.0	19.3
13.560000	60.84	---	69.54	8.70	1000.0	9.000	#1	H	-157.0	18.9

#1: default setting is active, that means the ratio resolution bandwidth/video bandwidth (RBW/VBW) is 0.33.

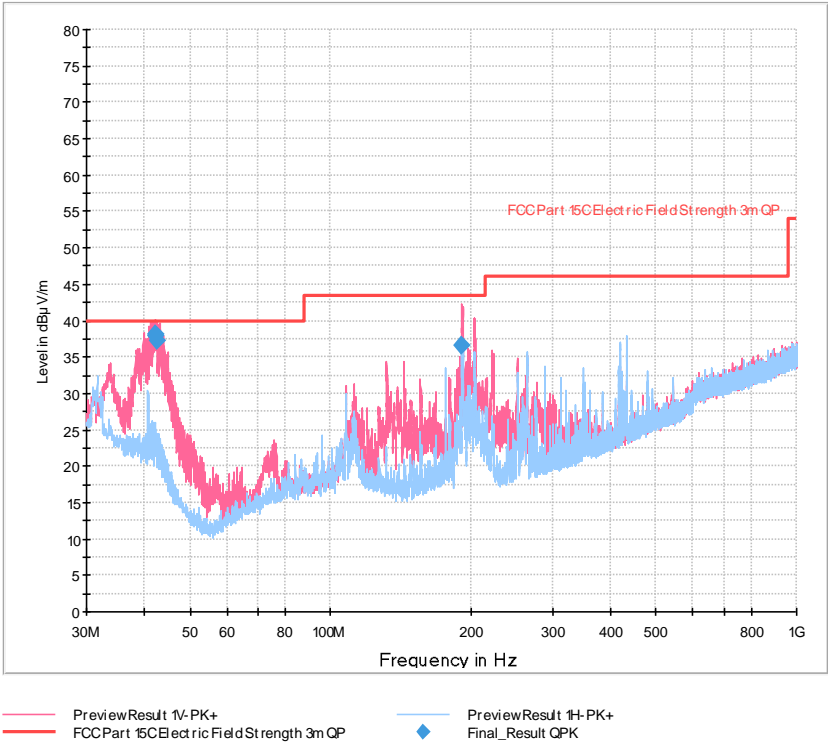

Final Results:

Frequency	QuasiPeak	Limit	Margin	Meas. Time	Bandwidth (RBW)	VBW	Height	Pol	Azimuth	Corr.
MHz	dBµV/m	dBµV/m	dB	ms	kHz	kHz	cm		deg	dB
42.000000	38.15	40.00	1.85	1000.0	120.000	#1	100.0	V	-79.0	18.4
42.240000	37.90	40.00	2.10	1000.0	120.000	#1	100.0	V	-7.0	18.2
42.510000	37.16	40.00	2.84	1000.0	120.000	#1	100.0	V	77.0	18.0
191.970000	36.48	43.50	7.02	1000.0	120.000	#1	100.0	V	-11.0	15.2

#1: default setting is active, that means the ratio resolution bandwidth/video bandwidth (RBW/VBW) is 0.33.



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 to 0.490	2400/F (kHz)	300
0.490 to 1.705	24000/F (kHz)	30
1705 to 30	30	30
30 to 88	100**	3
88 to 216	150**	3
216 to 960	200**	3
Above 960	500	5

**Table 10 - FCC Radiated Emission Limit**



#### Industry Canada RSS-GEN, Limit Clause

Frequency	Electric Field Strength (µV/m)	Magnetic Field Strength (H-Field) (µA/m)	Measurement Distance (m)
9 - 490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	300
490 - 1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1,705 kHz - 30 MHz	30	N/A	30

**Table 14 - Industry Canada Radiated Emission Limit - Less than 30 MHz**

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 - 88	100
88 - 216	150
216 - 960	200
> 960	500

**Table 15 - Industry Canada Radiated Emission Limit - 30 MHz to 1 GHz**

#### **3.2.7 Test Location and Test Equipment Used**

This test was carried out in a Semi anechoic room - cabin no. 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde&Schwarz	ESW44	39897	12	2023-04-30
ULTRALOG antenna	Rohde&Schwarz	HL562E	39969	36	2025-03-31
Loop antenna	Schwarzbeck	FMZB 1519B	44334	36	2023-01-31
EMC measurement software	Rohde&Schwarz	EMC32 V10.50.10	42986	N/A	N/A

**Table 16**

TU - Traceability Unscheduled  
 O/P Mon – Output Monitored using calibrated equipment  
 N/A - Not Applicable



### 3.3 Frequency Tolerance Under Temperature Variations

#### 3.3.1 Specification Reference

ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause N/A and 6.11

#### 3.3.2 Equipment Under Test and Modification State

10090-640, S/N: 15000176 - Modification State 0

#### 3.3.3 Date of Test

2022-04-21

#### 3.3.4 Test Method

The EUT is installed in an environmental test chamber, the carrier frequency and frequency stability is measured under temperatures of -20°C, +20°C and +50°C, and at the manufacturer's rated supply voltage.

#### 3.3.5 Environmental Conditions

Ambient Temperature 23.0 °C  
Relative Humidity 31.0 %

#### 3.3.6 Test Results

Transmitting continuously

Temperature	Voltage	Frequency
-20.0 °C	5 Vdc	125.00250 kHz
+20.0 °C	4.65 Vdc	125.00250 kHz
+20.0 °C	5 V	125.00190 kHz
+20.0 °C	5.35 Vdc	125.00250 kHz
+50.0 °C	5 Vdc	125.00250 kHz

**Table 17 - Frequency Tolerance Under Temperature Variation**



3.3.7 Test Location and Test Equipment Used

This test was carried out in Non shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2024-02-29
Climatic test chamber	Feutron Klimasimulation	KPK200-2	19868	18	2023-01-31

Table 18

TU - Traceability Unscheduled  
O/P Mon – Output Monitored using calibrated equipment  
N/A - Not Applicable





### **3.4 AC Power Line Conducted Emissions**

#### **3.4.1 Specification Reference**

FCC 47 CFR Part 15C, Industry Canada RSS-210 and Industry Canada RSS-GEN, Clause 15.207, N/A and 8.8

#### **3.4.2 Equipment Under Test and Modification State**

10090-640, S/N: 15000177 - Modification State 0

#### **3.4.3 Date of Test**

2022-04-27

#### **3.4.4 Environmental Conditions**

Ambient Temperature	23.0 °C
Relative Humidity	35.0 %




3.4.5 Test Results

Transmitting continuously)

Applied supply Voltage: 5 Vdc USB

Line L1 - 150 kHz to 30 MHz

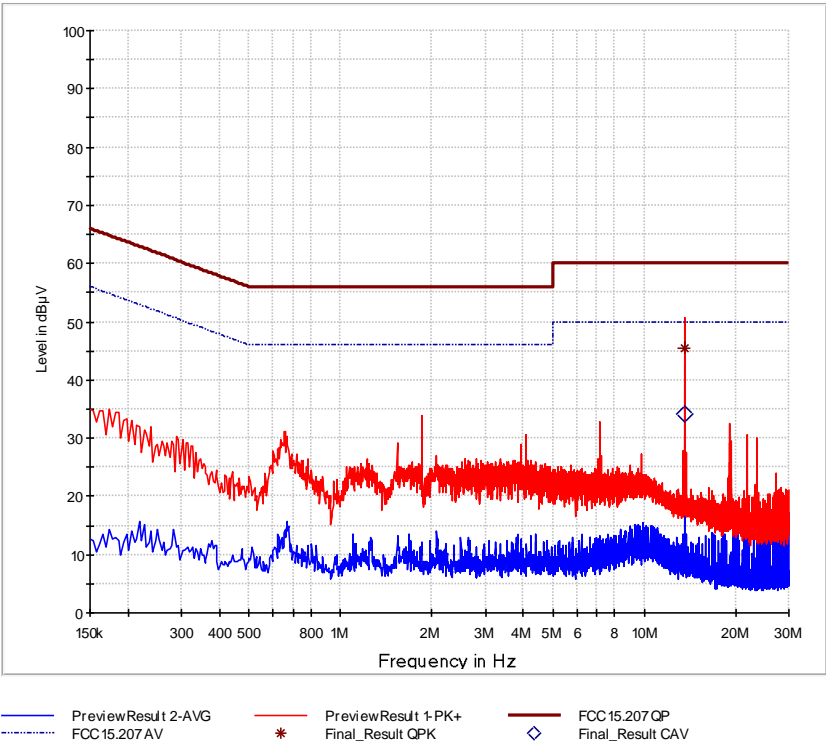


Final Results:

Frequency MHz	QuasiPeak dBµV	CAverage dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	Line	Corr. dB
13.562000	---	34.14	50.00	15.86	1000.0	9.000	L1	10.2
13.562000	45.40	---	60.00	14.60	1000.0	9.000	L1	10.2



Product Service

Line N - 150 kHz to 30 MHz

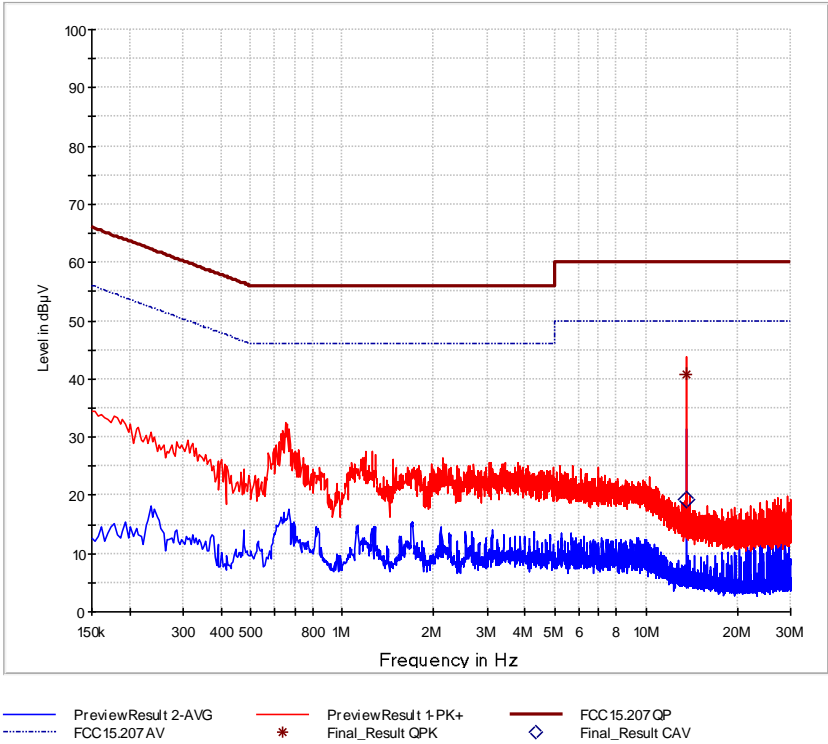

Final Results:

Frequency MHz	QuasiPeak dBµV	CAverage dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	Line	Corr. dB
13.554000	---	19.32	50.00	30.68	1000.0	9.000	N	10.2
13.558000	40.87	---	60.00	19.13	1000.0	9.000	N	10.2



#### Sample calculation of field final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{LISN Transducer Factor (dB)} + \text{Cable Correction Factor (dB)})$$

#### FCC 47 CFR Part 15, Limit Clause 15.207 and Industry Canada RSS-GEN, Limit Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

**Table 19**

\*Decreases with the logarithm of the frequency.

#### 3.4.6 Test Location and Test Equipment Used

This test was carried out in Shielded room - cabin no. 4.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde & Schwarz	ESCI3	19730	18	2022-05-31
V-network	Rohde & Schwarz	ENV216	39908	12	2023-03-31
EMC measurement software	Rohde & Schwarz	EMC32 V10.60.00	44377	N/A	N/A

**Table 20**

TU - Traceability Unscheduled  
 O/P Mon – Output Monitored using calibrated equipment  
 N/A - Not Applicable

## 4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Radio Testing			
Test Name	kp	Expanded Uncertainty	Note
Occupied Bandwidth	2.0	$\pm 1.14 \%$	2
RF-Frequency error	1.96	$\pm 1 \cdot 10^{-7}$	7
RF-Power, conducted carrier	2	$\pm 0.079 \text{ dB}$	2
RF-Power uncertainty for given BER	1.96	$+0.94 \text{ dB} / -1.05$	7
RF power, conducted, spurious emissions	1.96	$+1.4 \text{ dB} / -1.6 \text{ dB}$	7
RF power, radiated			
25 MHz – 4 GHz	1.96	$+3.6 \text{ dB} / -5.2 \text{ dB}$	8
1 GHz – 18 GHz	1.96	$+3.8 \text{ dB} / -5.6 \text{ dB}$	8
18 GHz – 26.5 GHz	1.96	$+3.4 \text{ dB} / -4.5 \text{ dB}$	8
40 GHz – 170 GHz	1.96	$+4.2 \text{ dB} / -7.1 \text{ dB}$	8
Spectral Power Density, conducted	2.0	$\pm 0.53 \text{ dB}$	2
Maximum frequency deviation			
300 Hz – 6 kHz	2	$\pm 2.89 \%$	2
6 kHz – 25 kHz	2	$\pm 0.2 \text{ dB}$	2
Maximum frequency deviation for FM	2	$\pm 2.89 \%$	2
Adjacent channel power 25 MHz – 1 GHz	2	$\pm 2.31 \%$	2
Temperature	2	$\pm 0.39 \text{ K}$	4
(Relative) Humidity	2	$\pm 2.28 \%$	2
DC- and low frequency AC voltage			
DC voltage	2	$\pm 0.01 \%$	2
AC voltage up to 1 kHz	2	$\pm 1.2 \%$	2
Time	2	$\pm 0.6 \%$	2

Table 21



Radio Interference Emission Testing			
Test Name	kp	Expanded Uncertainty	Note
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Fieldstrength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1
Harmonic Current Emissions			4
Voltage Changes, Voltage Fluctuations and Flicker			4

Table 22



Immunity Testing			
Test Name	kp	Expanded Uncertainty	Note
Electrostatic Discharges			4
Radiated RF-Field			
Pre-calibrated field level	2	+32.2 / -24.3 %	5
Dynamic feedback field level	2.05	+21.2 / -17.5 %	3
Electrical Fast Transients (EFT) / Bursts			4
Surges			4
Conducted Disturbances, induced by RF-Fields			
via CDN	2	+15.1 / -13.1 %	6
via EM clamp	2	+42.6 / -29.9 %	6
via current clamp	2	+43.9 / -30.5 %	6
Power Frequency Magnetic Field	2	+20.7 / -17.1 %	2
Pulse Magnetic Field			4
Voltage Dips, Short Interruptions and Voltage Variations			4
Oscillatory Waves			4
Conducted Low Frequency Disturbances			
Voltage setting	2	± 0.9 %	2
Frequency setting	2	± 0.1 %	2
Electrical Transient Transmission in Road Vehicles			4

**Table 23**

Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2$ , providing a level of confidence of  $p = 95.45\%$

Note 2:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2$ , providing a level of confidence of  $p = 95.45\%$

Note 3:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2.05$ , providing a level of confidence of  $p = 95.45\%$

Note 4:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence.

Note 5:

The expanded uncertainty reported according to IEC 61000-4-3 is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2$ , providing a level of confidence of  $p = 95.45\%$

Note 6:

The expanded uncertainty reported according to IEC 61000-4-6 is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2$ , providing a level of confidence of  $p = 95.45\%$

Note 7:

The expanded uncertainty reported according to ETSI TR 100 028 V1.4.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 1.96$ , providing a level of confidence of  $p = 95.45\%$

Note 8:

The expanded uncertainty reported according to ETSI TR 102 273 V1.2.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 1.96$ , providing a level of confidence of  $p = 95.45\%$