



**REPORT ON THE CERTIFICATION TESTING OF AN
ALCATEL BUSINESS SYSTEMS
MOBILE HANDSET
WITH RESPECT TO
FCC RULES CFR 47, PART 15D August 2006
INTENTIONAL RADIATOR SPECIFICATION**



TRL Compliance
part of **TRAC** global

TEST REPORT NO: RU1304/7506

COPY NO: 2 -----

ISSUE NO: 1

FCC ID: OL3300400

**REPORT ON THE CERTIFICATION TESTING OF AN
ALCATEL BUSINESS SYSTEMS
MOBILE HANDSET
WITH RESPECT TO
FCC RULES CFR 47, PART 15D August 2006
INTENTIONAL RADIATOR SPECIFICATION**

TEST DATE: 19th February – 14th March 2007

TESTED BY: ----- D WINSTANLEY

APPROVED BY: ----- J CHARTERS
RADIO SECTION
LEADER

DATE: 2nd July 2007 -----

Distribution:

Copy Nos: 1. ALCATEL BUSINESS SYSTEMS
2. FCC EVALUATION LABORATORIES
3. TRL COMPLIANCE Ltd

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

CONTENTS

	PAGE
CERTIFICATE OF CONFORMITY & COMPLIANCE	5
APPLICANT'S SUMMARY	6
TESTS REQUIRED	7
EQUIPMENT TEST CONDITIONS	8
SYSTEM DESCRIPTION	8
TEST RESULTS	9 – 28

ANNEX

PHOTOGRAPHS	A
-------------	---

- PHOTOGRAPH No. 1: Radiated Test Setup
- PHOTOGRAPH No. 2: Powerline Conduction Test Setup
- PHOTOGRAPH No. 3: MR300 Front Overview
- PHOTOGRAPH No. 4: MR300 Rear Overview
- PHOTOGRAPH No. 4: MR300 Rear Overview, Cover & Battery Removed
- PHOTOGRAPH No. 6: MR400 Front Overview
- PHOTOGRAPH No. 7: MR400 Rear Overview
- PHOTOGRAPH No. 8: MR400 Rear Overview, Cover & Battery Removed
- PHOTOGRAPH No. 9: MR300 PCB Keypad Side & Keypads
- PHOTOGRAPH No. 10: MR400 PCB Keypad Side & Keypads
- PHOTOGRAPH No. 11: PCB RF Side
- PHOTOGRAPH No. 12: PCB RF Side Cans Removed
- PHOTOGRAPH No. 13: Antenna

CONTENTS Continued

ANNEX

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B
AC POWERLINE CONDUCTION	C
EMISSION BANDWIDTH	D
PEAK TRANSMIT POWER	E
POWER SPECTRAL DENSITY	F
ACKNOWLEDGEMENTS	G
EMISSIONS OUTSIDE THE SUB-BAND - CONDUCTED	H
EMISSIONS INSIDE THE SUB-BAND - CONDUCTED	I
SPURIOUS EMISSIONS – RADIATED	J
FRAME PERIOD	K
EQUIPMENT DETAILS & CALIBRATION	L
MEASUREMENT UNCERTAINTY	M

Notes:

1. Component failure during test	YES <input type="checkbox"/>	NO <input checked="" type="checkbox"/>
2. If Yes, details of failure:		
3. The facilities used for the testing of the product contain in this report are FCC Listed.		
4. The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith.		



TRL Compliance

part of TRAC global

CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: OL3300400

PURPOSE OF TEST: Certification

TEST SPECIFICATION: FCC RULES CFR 47, Part 15D August 2006

TEST RESULT: Compliant to Specification

EQUIPMENT UNDER TEST: Mobile Handset

MODEL(s) TESTED

MR300 Conducted Sample
MR300 Radiated Sample
MR400 Radiated Sample

EQUIPMENT TYPE: UPCS Transceiver

PRODUCT USE: Personal communications

CARRIER POWER: 18.61 dBm (Conducted)

ANTENNA TYPE: Integral

ALTERNATIVE ANTENNA: Not Applicable

BAND OF OPERATION: 1920 MHz – 1930 MHz

CHANNEL SPACING: 1.728 MHz

NUMBER OF CHANNELS: 5 frequencies, 12 single time slots per frequency giving 60 channels

FREQUENCY GENERATION: SAW Resonator Crystal Synthesiser

MODULATION METHOD: Amplitude Digital Angle

POWER SOURCE(s): +3.7Vdc

TEST DATE(s): 19th February – 14th March 2007

ORDER No(s): Pro Forma Invoice

APPLICANT: Alcatel Business Systems

ADDRESS: 1 Route Du Dr Albert Schweitzer
67408 Illkirch
Cedex
France

TESTED BY:

D WINSTANLEY

APPROVED BY:

p.p. J CHARTERS
RADIO SECTION
LEADER

RU1304/7506

APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT): Mobile Handset

EQUIPMENT TYPE: UPCS Transceiver

PURPOSE OF TEST: Certification

TEST SPECIFICATION(s): FCC RULES CFR 47, Part 15D August 2006

TEST RESULT: COMPLIANT Yes No

APPLICANT'S CATEGORY: MANUFACTURER
IMPORTER
DISTRIBUTOR
TEST HOUSE
AGENT

APPLICANT'S ORDER No(s): Pro Forma Invoice

APPLICANT'S CONTACT PERSON(s): Mr Rainier Baltz

E-mail address: rainier.baltz@alcatel-lucent.fr

APPLICANT: Alcatel Business Systems

ADDRESS: 1 Route Du Dr Albert Schweitzer
67408 Illkirch
Cedex
France

TEL: +33 390 676790

FAX: +33 390 676541

TEST LABORATORY: TRL Compliance Ltd

UKAS ACCREDITATION No: 0728

TEST DATE(s): 19th February – 14th March 2007

TEST REPORT No: RU1304/7506

EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	RULE PART	APPLICABILITY
	Coordination with Fixed Microwave Service	15.307 (b)	No note 1
	Cross reference to Subpart B	15.309 (b)	Yes
	Labelling Requirements	15.311 15.19 (a)(3)	Yes
	Measurement Procedures	15.313	Yes
	Antenna Requirement	15.317 15.203	Yes
	Modulation Techniques	15.319 (b)	Yes
	Conducted AC Powerline	15.315 15.207	Yes
	Emission Bandwidth	15.323 (a)	Yes
	Peak Transmit Power	15.319 (c)	Yes
	Power Spectral Density	15.319 (d)	Yes
	Antenna Gain	15.319 (e)	Yes
	Automatic Discontinuation of Transmission	15.319 (f)	Yes
	Radio Frequency Radiation Exposure	15.319 (i)	Yes
	Monitoring Thresholds	15.323 (c)(2) 15.323 (c)(9)	Yes
	Monitoring of Intended Transmit Window and Maximum Reaction Time	15.323 (c)(1)	Yes
	Monitoring Bandwidth	15.323 (c)(7)	Yes
	Access Criteria Functional Test	15.323 (c)(6)	No Note 2
	Duration of Transmission	15.323 (c)(3)	Yes
	Connection Acknowledgement	15.323 (c)(4)	Yes
	Lower threshold Selected Channel, Power Accuracy, Segment Occupancy	15.323 (c)(5)	Yes
	Monitoring Antenna	15.323 (c)(8)	Yes
	Duplex Connections	15.323 (c)(10)	Yes
	Alternative Monitoring Interval for Co-located Devices	15.323 (c)(11)	No Note 3
	Fair Access to Spectrum Related to (c)(10) & (c)(11)	15.323 (c)(12)	Yes
	Emission Inside and Outside the Sub-band	15.323 (d)	Yes
	Frame Period	15.323 (e)	Yes
	Frequency Stability	15.323 (f)	Yes
Note:	1. Requirement removed April 4 th 2005 see public notice DX 05-1005. 2. The EUT does not transmit control and signalling information. 3. Not utilized by this EUT as devices will not be co-located within 1m of each other.		

2. Product Use:	Personal Communications	
3. Duty Cycle:	8.33%	
4. Transmitter bit or pulse rate and level:	2Mbps	
5. Temperatures:	Ambient (T _{nom})	22°C
6. Supply Voltages:	V _{nom}	+3.7Vdc

Note: V_{nom} voltages are as stated above unless otherwise shown on the test report page

7. Equipment Category:	Single channel	[]
	Two channel	[]
	Multi-channel	[X]
8. Channel spacing:	Narrowband	[]
	Wideband	[X]
9. System Description:		

The system is made up of two parts, a fixed part and a portable part. The portable part is a cordless telephone device. The portable part is capable of operating on a maximum of 60 channels (time spectrum windows). The fixed part is wall mounted and consists of two transmitters connected to an Alcatel OmniPCX exchange. One fixed part transmitter operates on odd time slots only and the second fixed part transmitter operates on even time slots only. This gives the portable part access to a maximum of 60 channels (time spectrum windows).

The system operates in the 1920MHz -1930MHz band. The system use 5 different frequency channels 1.728MHz apart using MC/TDMA/TDD (Multi Carrier / Time Division Multiple Access / Time Division Duplex) using QPSK modulation.

The system employs a 10ms frame, divided into 24 equal timeslots, numbered 0-23. The system uses single-slots only. The Base station always transmits in the first half of the frame, and the Portable always transmits on the duplex mate in the second half of the frame. A physical bearer is composed of a transmit single-slot and a receive single-slot. The two halves of a given bearer are always exactly half a frame (5ms, 12 slots) apart.

During the testing frequency administration was utilised to allow operation on only certain channels during the tests. The frequency administration was performed using a software interface. A portable part was supplied with a temporary antenna connector to allow conducted measurements where applicable.

This report covers two portable part models, the MR300 and the MR400. The radio and etiquette portions of these portable parts are identical. The MR300 has a monochrome screen and the MR400 has a colour screen. Due to differences in the non radio related circuitry emissions testing was performed on both models.

There are two type of charger available for the portable part a single charger holding portable part only and a dual charger holding the portable part and a spare battery.

CROSS REFERENCE TO SUBPART B – PART 15.309 (b)

The unit contains digital circuitry which is not directly related to the radio transmitter. See emissions outside the sub-band for results.

LABELLING INFORMATION – PART 15.311 & 15.19 (a)(3)

This information is contained in a separate document. See attached exhibit.

ANTENNA REQUIREMENTS – PART 15.317

The unit employs an integral antenna arrangement.

MODULATION TECHNIQUES – PART 15.319 (b)

The Alcatel Business Systems Mobile Handset is an isochronous device operating in the 1920 MHz – 1930 MHz frequency band.

The Alcatel Business Systems Mobile Handsets modulation technique is based on DECT technology as described in European standards EN 300 175-2 and EN 300 175-3.

The Alcatel Business Systems Mobile Handsets modulation techniques are MC/TDMA/TDD (Multi Carrier / Time Division Multiple Access / Time Division Duplex) using QPSK modulation.

TRANSMITTER CONDUCTED EMISSIONS – AC POWER LINE PART 15.315**MODEL NUMBER: MR300****SIGNIFICANT EMISSIONS**

MR300 in receive mode

FREQUENCY (MHz)	MEASUREMENT RECEIVER READING (dB μ V)	DETECTOR	CONDUCTOR (L or N)	Limit (dB μ V)
0.155	47.90	Quasi Peak	Live	65.73
0.225	49.47	Quasi Peak	Live	62.63
0.235	51.04	Quasi Peak	Live	62.27
0.240	41.86	Average	Neutral	52.10
0.275	43.24	Quasi Peak	Neutral	60.97
0.285	51.34	Quasi Peak	Neutral	60.67
0.465	40.33	Quasi Peak	Live	56.60
0.590	38.45	Quasi Peak	Live	56.00
0.825	37.51	Quasi Peak	Live	56.00
1.04	26.88	Average	Live	46.00

SIGNIFICANT EMISSIONS

MR300 Communications Channel Active

FREQUENCY (MHz)	MEASUREMENT RECEIVER READING (dB μ V)	DETECTOR	CONDUCTOR (L or N)	Limit (dB μ V)
0.155	46.41	Quasi Peak	Live	65.73
0.185	35.03	Average	Live	54.26
0.225	46.46	Quasi Peak	Neutral	62.63
0.240	41.55	Average	Neutral	52.10
0.285	52.62	Quasi Peak	Live	60.67
0.290	47.61	Quasi Peak	Neutral	60.52
0.310	30.26	Average	Neutral	49.97
0.465	36.78	Quasi Peak	Neutral	56.60
0.570	40.65	Quasi Peak	Live	56.00


Notes:

- 1 See Annex C for sample powerline plot.
- 2 Emissions that are 20 dB's or more below the limit are not necessarily recorded.
- 3 The EUT was tested seated in both single and dual chargers.
- 4 Results Recorded for Worst Case Charger.
- 5 The EUT was tested while in receive mode.
- 6 The EUT was tested while in communications with the companion device.
- 7 Closest emissions to the applicable limit are recorded.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.

AC Powerline Conduction
(Levels below the limit are only displayed if
within 20dB of the limit)

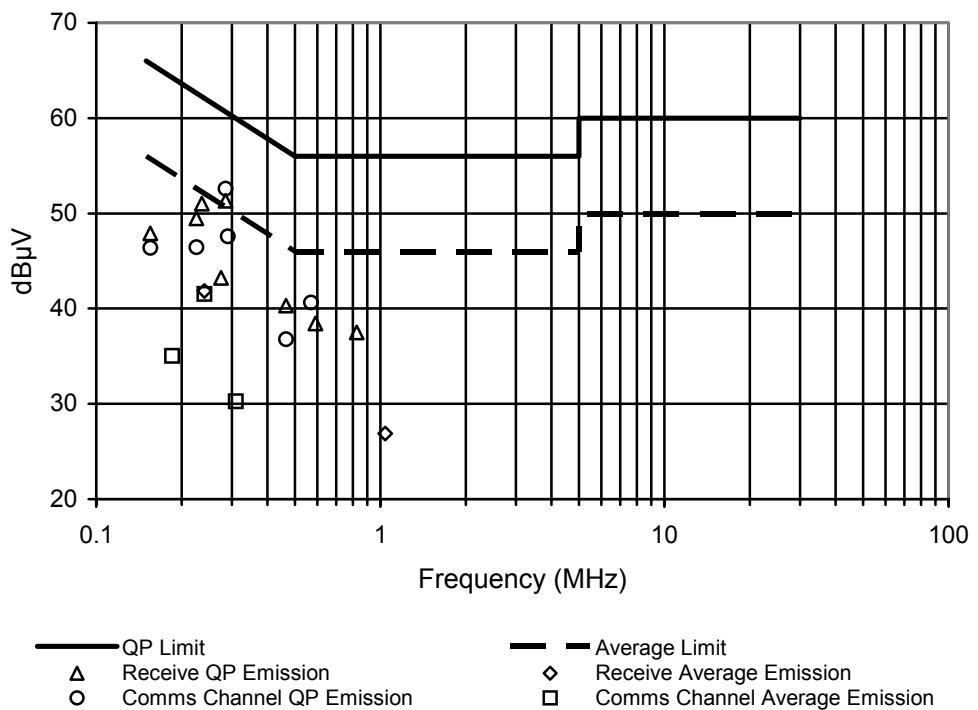

TRANSMITTER CONDUCTED EMISSIONS – AC POWER LINE PART 15.315**MODEL NUMBER: MR400****SIGNIFICANT EMISSIONS**

MR400 in receive mode

FREQUENCY (MHz)	MEASUREMENT RECEIVER READING (dB μ V)	DETECTOR	CONDUCTOR (L or N)	Limit (dB μ V)
0.150	48.92	Quasi Peak	Live	66.00
0.225	50.69	Quasi Peak	Live	62.63
0.235	48.29	Quasi Peak	Neutral	62.27
0.240	41.41	Average	Neutral	52.10
0.345	40.38	Quasi Peak	Live	59.08
0.450	37.77	Quasi Peak	Neutral	56.88
0.470	43.81	Quasi Peak	Live	56.51
0.695	36.30	Quasi Peak	Live	56.00
1.040	26.22	Average	Live	46.00
4.575	37.77	Quasi Peak	Neutral	56.00

SIGNIFICANT EMISSIONS

MR400 Communications Channel Active

FREQUENCY (MHz)	MEASUREMENT RECEIVER READING (dB μ V)	DETECTOR	CONDUCTOR (L or N)	Limit (dB μ V)
0.150	49.36	Quasi Peak	Live	66.00
0.225	44.51	Quasi Peak	Live	62.63
0.240	41.86	Average	Neutral	52.10
0.275	46.45	Quasi Peak	Neutral	60.97
0.280	50.27	Quasi Peak	Live	60.82
0.285	50.99	Quasi Peak	Live	60.67
0.470	37.51	Quasi Peak	Neutral	56.51
0.555	36.13	Quasi Peak	Neutral	56.00
0.560	40.18	Quasi Peak	Live	56.00


Notes:

- 1 See Annex C for sample powerline plot.
- 2 Emissions that are 20 dB's or more below the limit are not necessarily recorded.
- 3 The EUT was tested seated in both single and dual chargers.
- 4 Results Recorded for Worst Case Charger.
- 5 The EUT was tested while in receive mode.
- 6 The EUT was tested while in communications with the companion device.
- 7 Closest emissions to the applicable limit are recorded.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.

AC Powerline Conduction
(Levels below the limit are only displayed if
within 20dB of the limit)

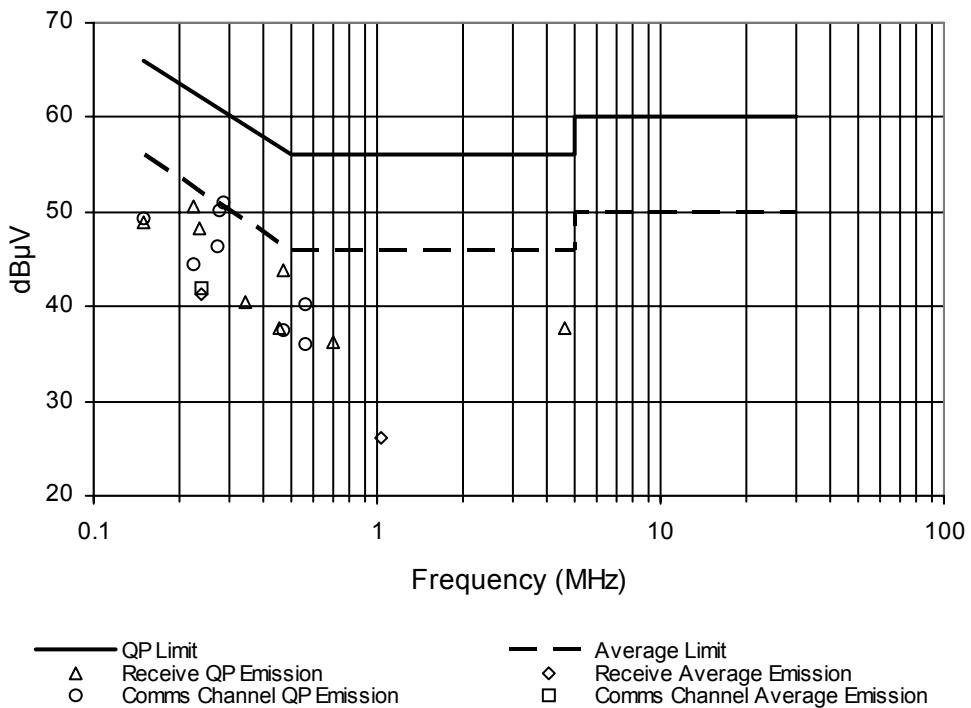


The test equipment used for the Transmitter Conducted Emissions – AC Power Line Part 15.207 tests was:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/01	UH03	X
LISN	ROHDE & SCHWARZ	ESH3-Z5	863906/018	UH05	X
RECEIVER	ROHDE & SCHWARZ	ESHS 10	841429/012	UH187	X
LISN	ROHDE & SCHWARZ	ESH3-Z5.831.5	8470 31/015	UH195	X

TRANSMITTER EMISSION BANDWIDTH – PART 15.323 (a)

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below

Test Setup 1:

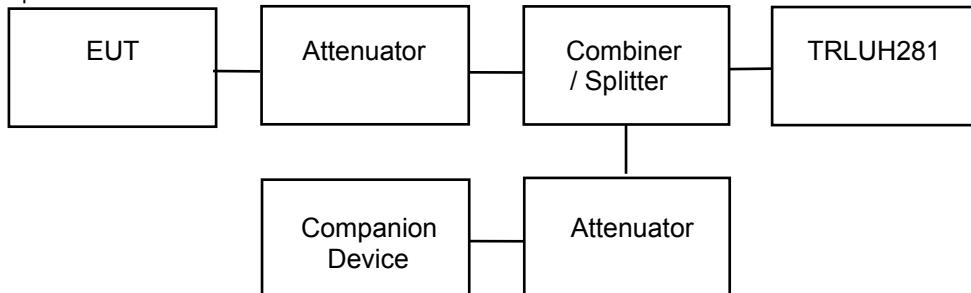

$f_x = 1921.536 \text{ MHz}$				
$\Delta P \text{ (dBc)}$	$f_l \text{ (MHz)}$	$f_h \text{ (MHz)}$	$\Delta f \text{ (MHz)}$	Limit
-26	1920.7715770	1922.2908080	1.52	50kHz > $\Delta f > 2.5\text{MHz}$
-12	1920.9590770	1922.1225380	1.16	N/A
-6	1921.1658080	1921.9590770	0.79	N/A

$f_x = 1924.992 \text{ MHz}$				
$\Delta P \text{ (dBc)}$	$f_l \text{ (MHz)}$	$f_h \text{ (MHz)}$	$\Delta f \text{ (MHz)}$	Limit
-26	1924.2516150	1925.7468080	1.49	50kHz > $\Delta f > 2.5\text{MHz}$
-12	1924.4343080	1925.5641150	1.13	N/A
-6	1924.6073850	1925.3814230	0.77	N/A

$f_x = 1928.448 \text{ MHz}$				
$\Delta P \text{ (dBc)}$	$f_l \text{ (MHz)}$	$f_h \text{ (MHz)}$	$\Delta f \text{ (MHz)}$	Limit
-26	1927.7076150	1929.0761500	1.50	50kHz > $\Delta f > 2.5\text{MHz}$
-12	1927.8758850	1929.0585770	1.18	N/A
-6	1928.0201150	1928.8890308	0.87	N/A

Notes:

- 1 See emission bandwidth plots in Annex D.
- 2 Emission bandwidth rounded up.

PEAK TRANSMIT POWER – PART 15.319 (c)

The peak transmit power is measured in accordance with ANSI C63.17 sub-clause 6.1.2 using test setup 1(page 10).

The limit for Peak Transmit Power (PTP) is calculated using the following formula:

$$PTP = 100\mu W \times \sqrt{EBW}$$

This limit must be corrected to take into account any gain of the antenna greater than 3dBi.
Where: EBW is the transmitter emission bandwidth in Hz as determined in the previous test.

Limit

$$EBW = 1.520 \text{ MHz}$$
$$PTP = 100\mu W \times \sqrt{1.520} \text{ MHz}$$
$$PTP = 20.93 \text{ dBm}$$

Results

Frequency (MHz)	Peak Transmit Power (dBm)	Limit (dBm)
1921.536	18.61	20.93
1924.992	18.60	20.93
1928.448	18.59	20.93

Note:

1. Permanent antenna was replaced with temporary antenna connector to enable conducted measurement.
2. Antenna gain < 3dBi and so correction of the limit is not required.
3. See Annex E for Peak Transmit Power Plots.

POWER SPECTRAL DENSITY – PART 15.319 (d)

The power spectral density is measured using test setup 1, (page 10). The peak emission level measured in a 3 kHz resolution bandwidth was compared directly to the limit.

Limit

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyser having a resolution bandwidth of 3 kHz.

Results

Frequency (MHz)	Power Spectral Density (mW/3kHz)	Limit (mW/3kHz)
1921.536	2.97	3
1924.992	2.62	3
1928.448	2.39	3

Note:

1. See Annex F for Power Spectral Density Plots.

ANTENNA GAIN – PART 15.319 (e)

Any directional gain of the antenna exceeding 3dBi has an effect on the limit applied to the measurements taken for the peak transmit power test. If the directional gain of the antenna is less than 3dBi it is not required to be taken into account.

Maximum Antenna Gain	Exceeds 3dBi by
+2dBi	N/A

Note: Statement by manufacturer declaring maximum antenna gain. See attached exhibit.

AUTOMATIC DISCONTINUATION OF TRANSMISSION – PART 15.319 (f)

Automatic discontinuation of transmission means break off of transmissions that are not control and signalling information.

This test is monitored using the test setup 1(page 10) as per transmitter emission bandwidth and an active channel.

The OL3300400 is a Portable part and as such does not transmit control and signalling information the counter part device is a fixed part device and does transmit control and signalling information.

Part	Transmits Control and Signaling Information	Equipment Under Test
Fixed Part	X	
Portable Part		X

Results

The following tests were performed after a connection had been established with the counter part device

Number	Test	Reaction of EUT	Pass / Fail
1	Power down EUT	C	Pass
2	Power removed from EUT	C	Pass
3	Power down counter part (exchange)	A	Pass
4	Power removed from counter part (exchange)	A	Pass
5	Disconnection of called extension from exchange	A	Pass
6	Disconnection of cable between counterpart and exchange	A	Pass

A – Connection breakdown, Cease of all transmissions.

B – Connection breakdown, EUT transmits control and signalling information.

C – Connection breakdown, Counterpart transmits control and signalling information.

RADIO FREQUENCY RADIATION EXPOSURE – PART 15.319 (i)

This information is contained in a separate document

MONITORING THRESHOLDS – PART 15.323 (c)(2); (c)(9)

The monitoring threshold calculations are carried out in accordance with ANSI C63.17 sub-clause 7.2.1 using the calculations laid out in ANSI C63.17 sub-clauses 4.3.3 and 4.3.4

Calculation of monitoring threshold limits for isochronous devices:

$$\text{Lower threshold: } T_L = -174 + 10\log_{10}B + M_U + P_{MAX} - P_{EUT} \text{ (dBm)}$$

$$\text{Upper threshold: } T_U = -174 + 10\log_{10}B + M_U + P_{MAX} - P_{EUT} \text{ (dBm)}$$

Where:

B = Emission bandwidth (Hz)

M_U = dBs the threshold may exceed thermal noise (30 for T_L & 50 for T_U)

P_{MAX} = Output Power Limit (dBm)


P_{EUT} = Transmitted power (dBm)

Monitor Threshold	B (MHz)	M_U (dB)	P_{MAX} (dBm)	P_{EUT} (dBm)	Threshold (dBm)
T_L	1.52	30	20.93	18.61	-59.8
T_U	1.52	50	20.93	18.61	-79.8

Note: 1. The upper threshold (T_U) is only applicable for systems with a minimum of 40 channels.

The monitoring threshold tests are carried out in accordance with ANSI C63.17 sub-clause 7.3 using the test setup 2. The lower threshold level was determined following the procedure as laid out in ANSI C63.17 sub-clause 7.3.2 (a) Frequency administration was used to allow operation on the carrier closest to the centre of the band.

Test Setup 2:

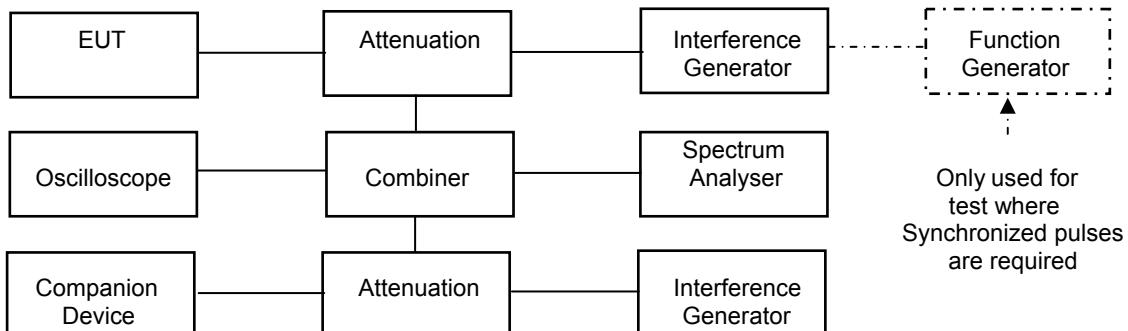

Limits

The EUT must not transmit until the interference level is less than or equal to:

$$\text{Measured Threshold Level} \leq T_U + U_M$$

Where: T_U = Calculated Upper threshold level

U_M = Margin of uncertainty in threshold measurements (6dB)

Results

Monitor threshold	Measured Threshold Level	Limit	Pass/Fail
Lower Threshold (dBm)	N/A	N/A	Pass
Upper threshold (dBm)	-64.8 dBm	-53.8 dBm	Pass

Notes: 1. The upper threshold is applicable as the EUT utilizes more than 40 system channels.

MONITORING OF INTENDED TRANSMIT WINDOW AND MAXIMUM REACTION TIME – PART 15.323 (c)(1)

The monitoring of intended transmit window was carried out in accordance with ANSI C63.17 sub-clause 7.5 using test setup 2 (page 13).

The EUT was frequency administered to only one operating frequency channel and only one of the interference generators in the test setup was utilized. The interference generator was fed pulses from the function generator to produce a pulsed carrier of the specified time length and the output of the interference generator was set to the required level. The pulse generator and companion device were synchronized so the position of the pulses corresponded to the time-slot pattern in the frame of the EUT. The test is performed with the unit frequency administered to operate only on bottom, middle or top frequency.

For each of the required tests the pulse width and interference level are as below:

Test c)

With the interference generator output set at the calculated threshold level (upper) plus measurement uncertainty (U_M) and the width of the pulse interference exceeds the largest of $50\mu s$ and $50\sqrt{1.25/B}\mu s$ verify that the EUT does not establish a connection.

Test d)

With the interference generator output set at 6dB above the calculated threshold level (upper) plus measurement uncertainty (U_M) and the width of the pulse interference exceeds the largest of $35\mu s$ and $35\sqrt{1.25/B}\mu s$ verify that the EUT does not establish a connection.

Where B = Emission bandwidth of the EUT in MHz

Results

Test Equation (μs)	Pulse Width (μs)	Interferer Level (dBm)	Connection Made			Pass/Fail
			F_L	F_M	F_H	
$50\sqrt{1.25/B}$	50	$T_U + U_M$	No	No	No	Pass
$35\sqrt{1.25/B}$	35	$T_U + U_M + 6$	No	No	No	Pass

Notes:

1. T_U is the calculated upper threshold.
2. U_M is Margin of uncertainty in threshold measurements (6dB).

MONITORING BANDWIDTH – PART 15.323 (c)(7)

The monitoring bandwidth test was carried out in accordance with ANSI C63.17 sub-clause 7.4.

ANSI C63.17 sub-clause 7.4 states that if the monitoring is made through the radio receiver used by the EUT for communication the intended bandwidth requirements for the monitoring system are met.

As declared by the manufacturer the EUT uses the radio receiver used for communication for monitoring therefore the intended bandwidth requirements for the monitoring system are met of ANSI C63.17 sub-clause 7.4 are met.

DURATION OF TRANSMISSION – PART 15.323 (c)(3)

The duration of transmission test was carried out in accordance with ANSI C63.17 sub-clause 8.2.2 using test setup 2.(page 13) (No interference generators were active during this test).

The time/spectrum window occupied by the connection was monitored using a spectrum analyzer for the spectrum window and an oscilloscope for the time slot. The connection was watched over a period of over 6 hours during this time the access criteria was repeated several times.

Result

Repetition of Access Criteria	Maximum Transmission Time	Maximum Transmission Time Limit	Pass/Fail
First	1 Hour	<8 Hours	Pass
Second	1 Hour	<8 Hours	Pass

Notes: 1. The portable part is the initiating device that repeats the access criteria.
2. The test was performed using a version V85-86 portable part.

CONNECTION ACKNOWLEDGEMENT – PART 15.323 (c)(4)

The connection acknowledgement test was carried out in accordance with ANSI C63.17 sub-clause 8.2.1 using test setup 2. (Page 13)(No interference generators were active during this test).

The test was carried out in two parts. The first was to verify that with the companion device off the EUT does not transmit on the same time/spectrum window for more than the limit. The second was to verify that after a connection is broken the EUT terminates its transmission on the current communication channel within 30 seconds or less.

Result

Test	Time Taken (seconds)	Limit (seconds)	Pass/Fail
Transmission on communications channel no acknowledgement received (note 1)	0.40	1	Pass
Established communication channel termination, acknowledgements blocked during communication (note 1)	5.00	30	Pass

Note: 1. The companion device transmits a beacon signal when acknowledgements are blocked.
2. The EUT does not transmit a control channel.
3. See Annex G Acknowledgement plots.

UPPER THRESHOLD SELECTED CHANNEL, POWER ACCURACY, SEGMENT OCCUPANCY – PART 15.323
(c)(5)

Least interfered Channel

The EUT utilizes more than 40 channels the least interfered channel testing is applicable. This test was carried out in accordance with ANSI C63.17 sub-clause 7.3.3 using test setup 2 (page 13).

The EUT was frequency administered to operating on two frequencies only, f1 and f2.

$$\begin{aligned}f_1 &= 1924.992 \text{ MHz} \\f_2 &= 1923.264 \text{ MHz}\end{aligned}$$

Test b)

Interference on f1 was set at $T_L + U_M + 7\text{dB}$ and at $T_L + U_M$ on f2. Initiate communication. The EUT should transmit on f2. Repeat 5 times. If the EUT transmits on f1 the test is failed.

Test c)

Interference on f1 was set at $T_L + U_M$ and at $T_L + U_M + 7\text{dB}$ on f2. Initiate communication. The EUT should transmit on f1. Repeat 5 times. If the EUT transmits on f2 the test is failed.

Test d)

Interference on f1 was set at $T_L + U_M + 1\text{dB}$ and at $T_L + U_M - 6\text{dB}$ on f2. Initiate communication. The EUT should transmit on f2. Repeat 5 times. If the EUT transmits on f1 the test is failed.

Test e)

Interference on f1 was set at $T_L + U_M - 6\text{dB}$ and at $T_L + U_M + 7\text{dB}$ on f2. Initiate communication. The EUT should transmit on f1. Repeat 5 times. If the EUT transmits on f2 the test is failed.

Result

Test	Transmit on f1	Transmit on f2	Wanted Transmit Channel	Pass/Fail
b	No	Yes	f2	Pass
c	Yes	No	f1	Pass
d	No	Yes	f2	Pass
e	Yes	No	f1	Pass

Note: 1. All tests were repeated 5 times.

Selected Channel Confirmation

This test was carried out in accordance with ANSI C63.17 sub-clause 7.3.4 using test setup 2 (page 13). The test is to ensure the EUT monitors the time/spectrum window immediately prior to transmission.

The EUT was frequency administered to operating on two frequencies only, f1 and f2.

$$\begin{aligned}f1 &= 1924.992 \text{ MHz} \\f2 &= 1923.264 \text{ MHz}\end{aligned}$$

Test a)

Interference is applied on f1 at a level of $T_U + U_M$. Verify a connection is established on f2.

Any connection is terminated.

Test b)

Interference is applied on f2 at a level of $T_U + U_M$ and immediately removed from f1 and the EUT is immediately caused to attempt transmission. In this case the EUT should transmit on f1

Result

Test	Transmit on f1	Transmit on f2	Wanted Transmit Channel	Pass/Fail
a	No	Yes	f2	Pass
b	Yes	No	f1	Pass

Power Accuracy

The power measurement resolution for the previous comparison must be accurate to within 6dB. The monitoring threshold test covered in Part 15.323 (c)(2) automatically proves that this requirement is met.

Segment Occupancy

This section is not applicable as no units will be located within 1 metre of each other.

MONITORING ANTENNA – PART 15.323 (c)(8)

The antenna of the EUT used for transmitting is the same antenna that is used for monitoring.

DUPLEX CONNECTIONS – PART 15.323 (c)(10)

The tests laid out in this section verify that the access criteria are met by two devices communicating over a duplex connection. For the purposes of this testing the EUT is the initiating device and the companion is the responding device. These tests are carried out in accordance with ANSI C63.17 sub-clause 8.3.2 using test setup 2 (page 13) Before all tests are carried out any connection is terminated.

Test b)

The system is restricted to operation on one frequency (1924.992 MHz) using administration. Verify that a connection between the EUT and its companion device can be made.

Test c) & d)

Apply interference at a level $T_L + U_M$ to all transmit time slots except one which has interference at least 10dB below T_L . Apply interference at a level $T_L + U_M + 10\text{dB}$ to all receive time slots except one which has interference at least 10dB below T_L . The interference free receive timeslot should not be the duplex mate of the interference free transmit timeslot. The EUT should establish a connection on the interference free receive slot and its duplex mate.

Test e) & f)

Apply interference at a level $T_L + U_M$ to all receive time slots except one which has interference at least 10dB below T_L . Apply interference at a level $T_L + U_M + 10\text{dB}$ to all transmit time slots except one which has interference at least 10dB below T_L . The interference free transmit timeslot should not be the duplex mate of the interference free receive timeslot. The EUT should establish a connection on the interference free transmit slot and its duplex mate.

Test g)

Apply interference at a level $T_U + U_M$ to all receive and transmit time slots except one which has interference at least 10dB below T_L . The interference free transmit and receive time slots shall not constitute a duplex pair. The EUT should not transmit or establish a connection.

Result

Test	Connection Made	Time Slot Selected	Required Time Slot	Pass/Fail
b	Yes	N/A	Any	Pass
c & d	Yes	Interference Free Receive Slot and Duplex Mate	Interference Free Receive Slot and Duplex Mate	Pass
e & f	Yes	Interference Free Transmit Slot and Duplex Mate	Interference Free Transmit Slot and Duplex Mate	Pass
g	No	None	None	Pass

ALTERNATIVE MONITORING INTERVAL FOR CO-LOCATED DEVICES – PART 15.323 (c)(11)

This test is carried out in accordance with ANSI C63.17 sub-clause 8.4.

The manufacturer declares that this provision is not utilized by the EUT.

FAIR ACCESS TO SPECTRUM RELATED TO (c)(10) & (c)(11) – PART 15.323 (c)(12)

The provisions of (c)(10) & (c)(11) shall not be used to extend the range of spectrum occupied over space or time for the purposes of denying fair access to the spectrum to other devices.

The manufacturer declares that this device does not work in a mode which denies fair access to the spectrum to others.

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED – PART 15.323 (d)

RF carrier set to the lowest carrier defined by the EUT.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.

Out-of-Band Emissions from UPCS bandedge	FREQ. (MHz)	MEAS. Rx. (dBm)	CABLE LOSS (dB)	ATTEN. LOSS (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
> - 2.5MHz					Note 10	-39.5
- 1.25 MHz – 2.5 MHz					Note 10	-29.5
- 1.25 MHz					Note 10	-9.5
+ 1.25 MHz					Note 10	-9.5
+ 1.25 MHz – 2.5 MHz					Note 10	-29.5
> + 2.5MHz	3843.703	-78.49	0.5	20.16	-57.99	-39.5
Limits	Out-of-Band Emissions from UPCS bandedge			Attenuation (dB) required below reference power of 112mW		
	± 1.25MHz			30		
	±1.25 MHz – 2.5 MHz			50		
	> ±2.5MHz			60		
	In band Emissions from centre of emission bandwidth			Attenuation (dB) required below permitted peak power for the EUT		
	1B – 2B			30		
	2B – 3B			50		
	3B – UPCS band edge			60		

Notes:

- 1 EUT fitted with temporary antenna connector.
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a.
- 3 New / Fully Charged batteries used for battery powered products.
- 4 See Annex H for out of band emissions compliance plots.
- 5 See Annex I for in band emissions compliance plots.
- 6 As per 15.323(g) attenuation to the requirements of 15.209 is not required.
- 7 Resolution bandwidth approximately 1% of emissions bandwidth.
- 8 Video bandwidth 3 x Resolution bandwidth.
- 9 Receiver detector = Peak detector, Max Hold Enabled.
- 10 Only emissions within 20 dB of the limit are recorded.

Test Method:

- 1 The EUT was connected to a spectrum analyser via suitable attenuation or filter.
- 2 The Spectrum analyser was tuned across the required frequency range in steps.
- 3 Any emissions found were measured with the required analyser settings.

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED – PART 15.323 (d)

RF carrier set to the highest carrier defined by the EUT.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.

Out-of-Band Emissions from UPCS bandedge	FREQ. (MHz)	MEAS. Rx. (dBm)	CABLE LOSS (dB)	ATTEN. LOSS (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
> - 2.5MHz					Note 10	-39.5
- 1.25 MHz – 2.5 MHz					Note 10	-29.5
- 1.25 MHz					Note 10	-9.5
+ 1.25 MHz					Note 10	-9.5
+ 1.25 MHz – 2.5 MHz					Note 10	-29.5
> + 2.5MHz	3856.251	-77.94	0.5	20.16	-57.34	-39.5
Limits	Out-of-Band Emissions from UPCS bandedge			Attenuation (dB) required below reference power of 112mW		
	± 1.25MHz			30		
	±1.25 MHz – 2.5 MHz			50		
	> ±2.5MHz			60		
	In band Emissions from centre of emission bandwidth			Attenuation (dB) required below permitted peak power for the EUT		
	1B – 2B			30		
	2B – 3B			50		
	3B – UPCS band edge			60		

Notes:

- 1 EUT fitted with temporary antenna connector.
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a.
- 3 New / Fully Charged batteries used for battery powered products.
- 4 See Annex H for out of band emissions compliance plots.
- 5 See Annex I for in band emissions compliance plots.
- 6 As per 15.323(g) attenuation to the requirements of 15.209 is not required.
- 7 Resolution bandwidth approximately 1% of emissions bandwidth.
- 8 Video bandwidth 3 x Resolution bandwidth.
- 9 Receiver detector = Peak detector, Max Hold Enabled.
- 10 Only emissions within 20 dB of the limit are recorded.

Test Method:

- 1 The EUT was connected to a spectrum analyser via suitable attenuation or filter.
- 2 The Spectrum analyser was tuned across the required frequency range in steps.
- 3 Any emissions found were measured with the required analyser settings.

EMISSIONS OUTSIDE THE SUB-BAND – RADIATED – PART 15.109

The MR300 and MR400 were tested for radiated spurious emissions from digital circuitry not directly related to the radio transmitter.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6

	FREQ. (MHz)	MEAS. Rx. (dB μ V)	CABLE LOSS (dB)	PRE AMP (dB)	ANT FACTOR	FIELD STRENGTH (dB μ V/m)	FIELD STRENGTH (μ V/m)	LIMIT (μ V/m)
1.705MHz - 30MHz							Note 9	30
30MHz - 88MHz							Note 9	100
88MHz - 216MHz							Note 9	150
216MHz - 960MHz							Note 9	200
960MHz - 1GHz							Note 9	500
1GHz - 20GHz							Note 9	500
Limits	1.705MHz to 30MHz		30 μ V/m @ 30m					
	30MHz to 88MHz		100 μ V/m @ 3m					
	88MHz to 216MHz		150 μ V/m @ 3m					
	216MHz to 960MHz		200 μ V/m @ 3m					
	960MHz to 1GHz		500 μ V/m @ 3m					
	1GHz to 20GHz		500 μ V/m @ 3m					

Notes:

- 1 Results quoted are extrapolated as indicated.
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a.
- 3 Emission due to digital circuitry not directly associated with the radio transmitter.
- 4 Measurements >1GHz @ 3m as per Part 15.31f(1).
- 5 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth.
- 6 Receiver detector >1GHz = Peak Hold, 1MHz resolution bandwidth.
- 7 New / Fully Charged batteries used for battery powered products.
- 8 See Annex J for scan plot 30MHz – 1GHz.
- 9 No significant emissions within 20 dB of the limit due to digital circuitry.

Test Method:


- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.
- 2 Measuring distances as Notes 1 to 4 above.
- 3 EUT 0.8 metre above ground plane.
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

The test equipment used for the Spurious Emissions – Radiated – Part 15.109 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
HORN ANTENNA	EMCO	3115	9010-3581	139	X
RECEIVER	ROHDE & SCHWARZ	ESVS 10	844594/003	352	X
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
PRE AMP	AGILENT	8449B	3008A016	572	X
RANGE 1	TRL	3 METRE	N/A	UH06	X
RANGE 1	TRL	10 METRE	N/A	UH07	X
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	X
RECEIVER	ROHDE & SCHWARZ	ESVS 10	841431/014	UH186	X
BILOG ANTENNA	YORK	CBL611/A	1618	UH191	X
SPECTRUM ANALYSER	ROHDE & SCHWARZ	FSU 46	200034	UH281	X
SIGNAL GENERATOR	HP	83630B	3722A00588	UH340	X

FRAME PERIOD 15.323 (e)

Frame repetition stability is tested according with ANSI C63.17 sub-clause 6.2.2. Frame period and jitter are tested in accordance with ANSI C63.17 sub-clause 6.2.3. The test setup below is used for the above measurements.

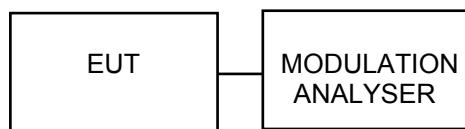

Test Setup 3:

Frame Repetition Stability

This is the mean value of the frame repetition rate recorded over 1000 samples. For devices that divide access in time the repetition rate shall not exceed 10ppm.

Result

Frame Repetition Stability (ppm)	Limit (ppm)	Pass/Fail
0.01 ppm	10ppm	Pass

Frame Period and Jitter

Jitter is the difference in time between the rising edges of consecutive pulses.

Result

Maximum Jitter (μ s)	3xSD Jitter (μ s)	Frame period (ms)	Limit (μ s)		Pass/Fail
			Frame Period (ms)	Jitter (μ s)	
-0.08	0.24	10.00024	2 or 10/X	25	Pass

Notes: 1. See Annex K for frame period plot.

FREQUENCY STABILITY – PART 15.323 (e)

The frequency stability tests are carried out according with ANSI C63.17 sub-clause 6.2.1 using test setup number 3(page 23). This testing is carried out with the following conditions over 5000 samples.

Results

Temperature (°C)	Voltage (Vdc)	Fc (MHz)	offset (kHz)	offset (ppm)	Limit (ppm)
+20	Vnom	1924.992	+1.0	+7.3	±10ppm
-20	Vnom	1924.992	-5.0	-2.6	±10ppm
+55	Vnom	1924.992	+3.0	+1.5	±10ppm

Note: 1. The EUT is battery powered therefore voltage variations are not required.

ANNEX A
PHOTOGRAPHS

PHOTOGRAPH No. 1

RADIATED TEST SETUP



PHOTOGRAPH No. 2 **POWERLINE CONDUCTION TEST SETUP**



PHOTOGRAPH No. 3

MR300 FRONT OVERVIEW



PHOTOGRAPH No. 4

MR300 REAR OVERVIEW



PHOTOGRAPH No. 5 MR300 REAR OVERVIEW COVER & BATTERY REMOVED



PHOTOGRAPH No. 6

MR400 FRONT OVERVIEW



PHOTOGRAPH No. 7

MR400 REAR OVERVIEW




PHOTOGRAPH No. 8 MR400 REAR OVERVIEW COVER & BATTERY REMOVED




PHOTOGRAPH No. 9

MR300 PCB KEYPAD SIDE & KEYPADS

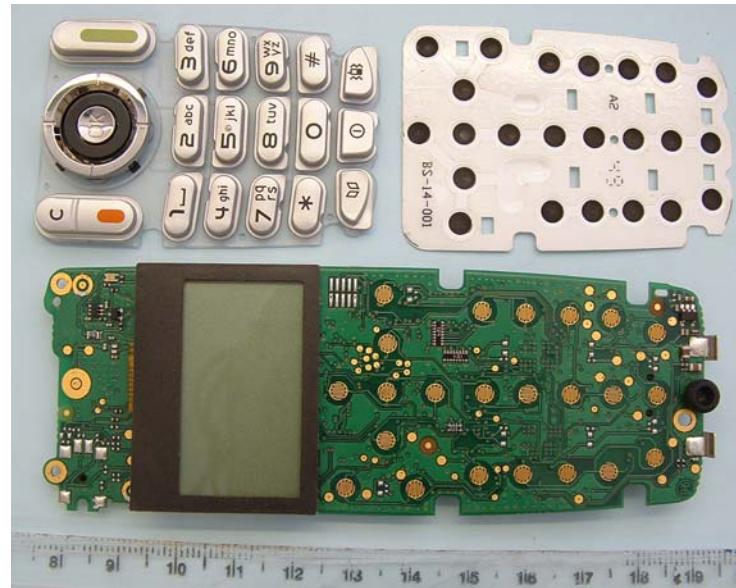


PHOTOGRAPH No. 10

MR400 PCB KEYPAD SIDE & KEYPADS

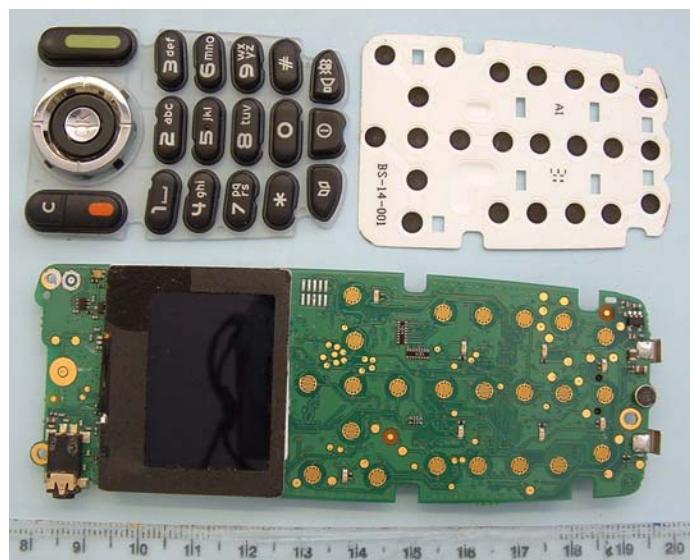


PHOTOGRAPH No. 11

PCB RF SIDE

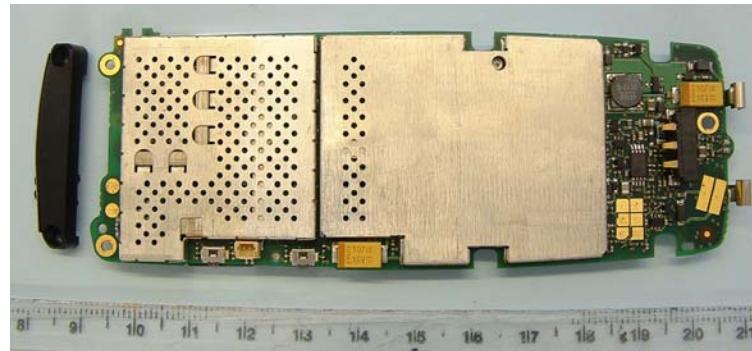

PHOTOGRAPH No. 12

PCB RF SIDE CANS REMOVED

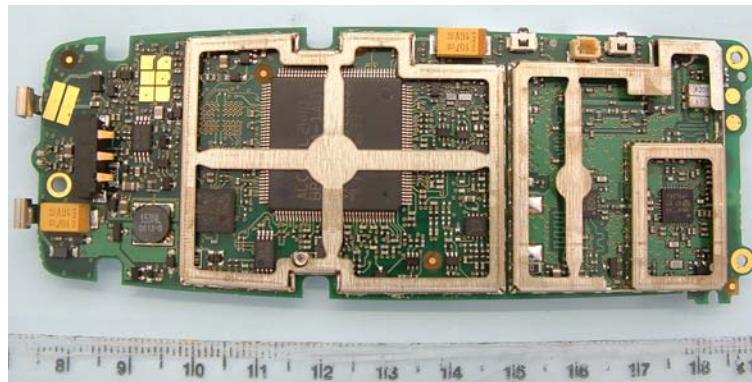

PHOTOGRAPH No. 13

ANTENNA



ANNEX B
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	[X]
		-	FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
c.	MODEL(s) vs IDENTITY	-		[]
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		[]
e.	LABELLING	-	PHOTOGRAPHS	[]
		-	DECLARATION	[]
		-	DRAWINGS	[X]
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
h.	CIRCUIT DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
i.	COMPONENT LOCATION	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
j.	PCB TRACK LAYOUT	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
k.	BILL OF MATERIALS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

ANNEX C

AC POWERLINE CONDUCTION

MR300 AC powerline Conduction Sample Scan


Powerline Conduction

26 Feb 2007 12:25

150kHz - 30MHz

EUT: M300
 Manuf: Alcatel-Lucent
 Op Cond: LISN UH195, cable UH21 & Receiver UH03
 Operator: D Winstanley
 Test Spec: Part 15
 Comment: Live Line, 110V, 60Hz, EUT seated in Single charger No transmissions.

Scan Settings		(1 Range) Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	5kHz	10kHz	PK+AV	50msec	Auto	OFF	60dB	
Transducer	No. 1	Start 10kHz	Stop 30MHz	Name UH21					
Final Measurement:		Detectors: X QP / + AV	Meas Time: 2sec	Subranges: 25	Acc Margin: 20 dB				

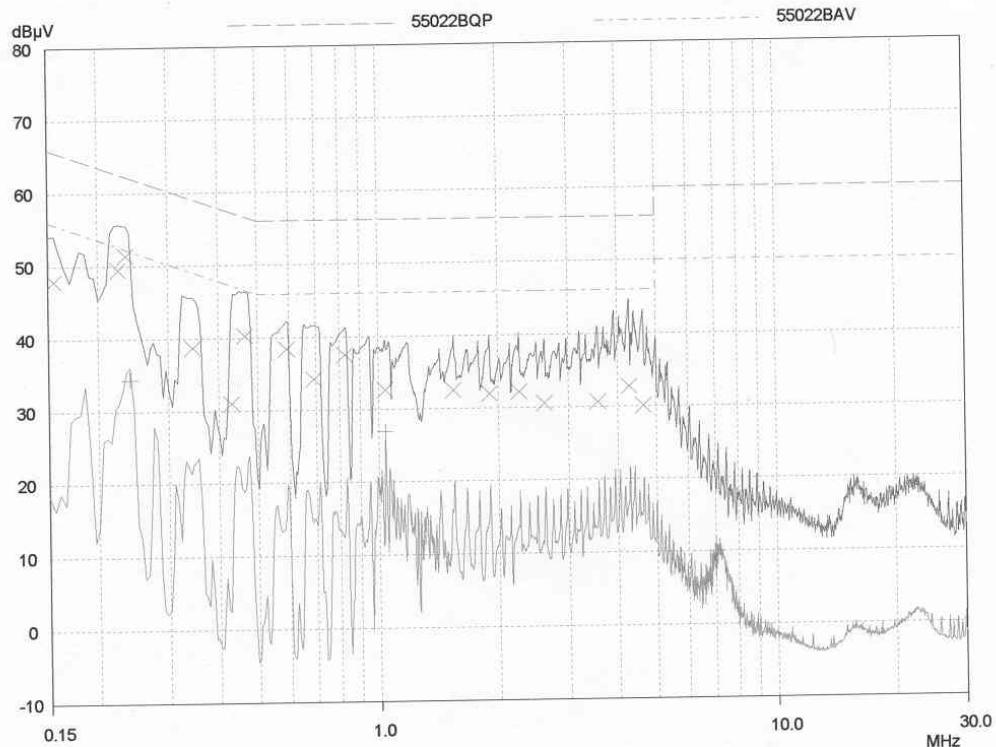

MR400 AC powerline Conduction Sample Scan


Powerline Conduction

150kHz - 30MHz


06 Mar 2007 09:25

EUT: MR400
 Manuf: Alcatel-Lucent
 Op Cond: LISN UH05, cable UH21 & Receiver UH187
 Operator: D Winstanley
 Test Spec: Part 15
 Comment: Live Line, 110V, 60Hz, Eut in Single Charger. No Comms. RX Mode

Scan Settings		(1 Range)					Receiver Settings			
		Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	150kHz	Stop	30MHz	5kHz	10kHz	PK+AV	50msec	Auto	OFF	60dB
Transducer	No.	Start	Stop			Name				
	1	10kHz	30MHz			UH21				
Final Measurement:		Detectors:	X QP / + AV							
		Meas Time:	2sec							
		Subranges:	25							
		Acc Margin:	20 dB							

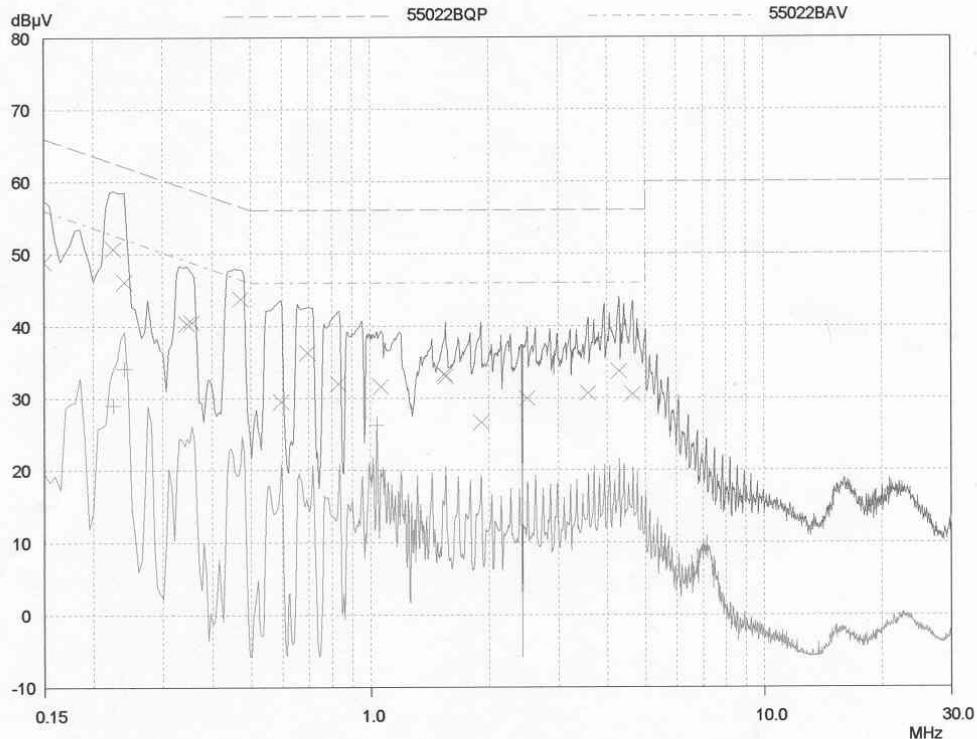


ANNEX D
EMISSION BANDWIDTH

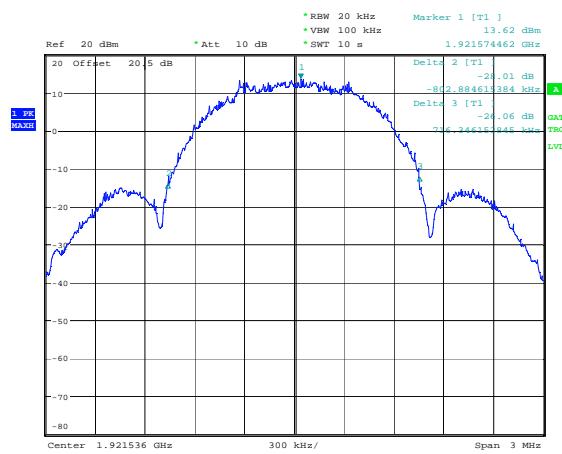

Date: 20.FEB.2007 11:18:15




Date: 20.FEB.2007 11:41:36

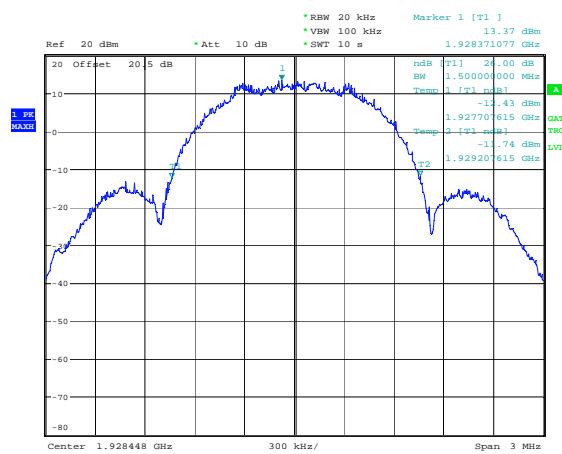


Date: 20.FEB.2007 11:57:35


ANNEX E
PEAK TRANSMIT POWER

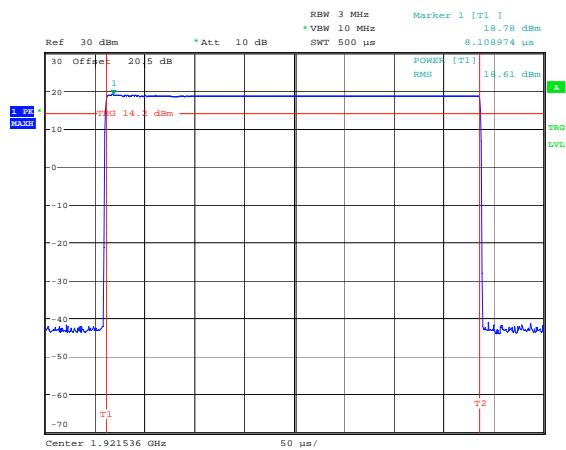

Date: 20.FEB.2007 12:12:56

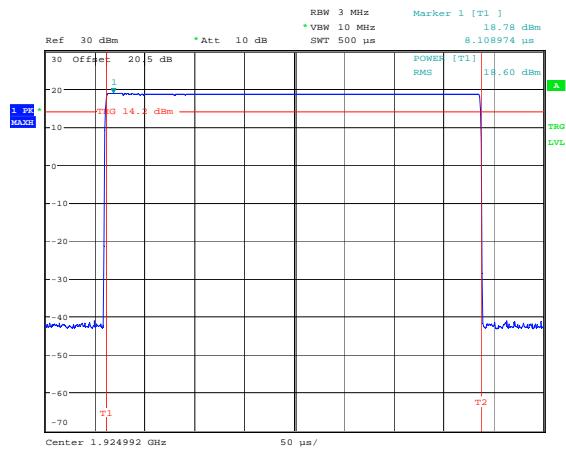


Date: 20.FEB.2007 12:11:30

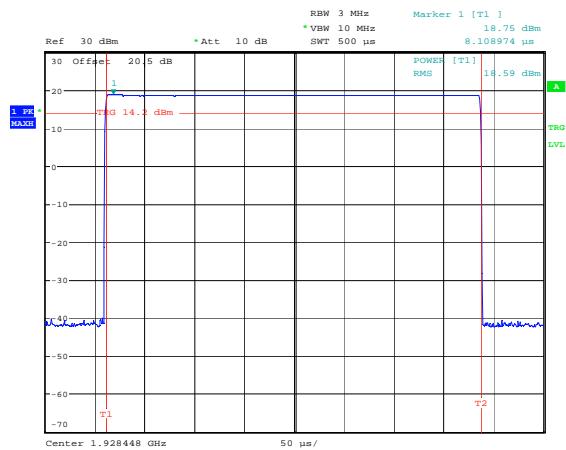


Date: 20.FEB.2007 12:09:08


ANNEX F
POWER SPECTRAL DENSITY

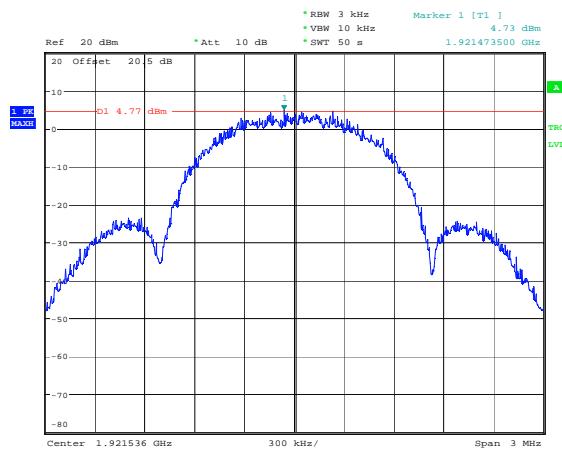

Date: 21.FEB.2007 17:23:11

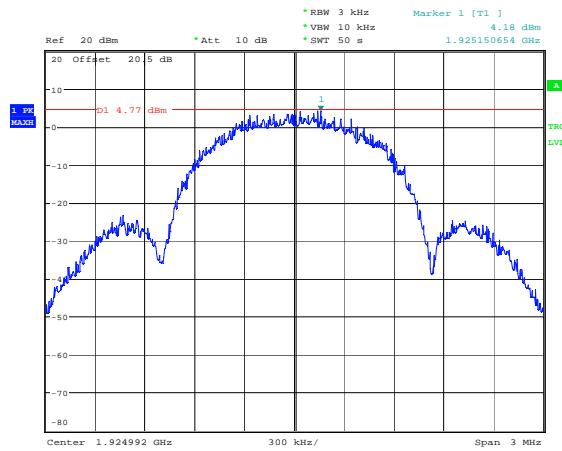


Date: 21.FEB.2007 17:28:26

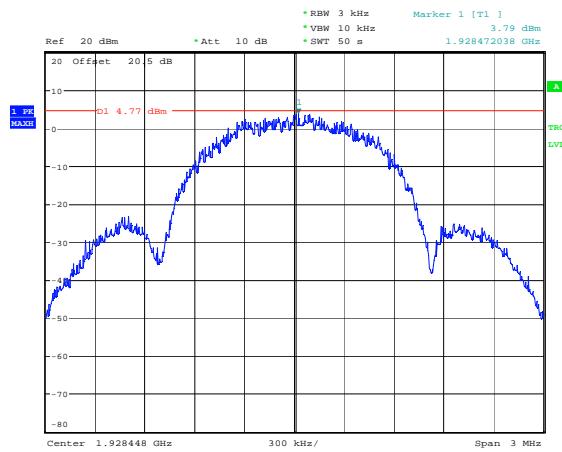


Date: 21.FEB.2007 17:40:03

ANNEX G
ACKNOWLEDGEMENTS

Transmissions on Communications Channel
Initial Acknowledgement Not Received

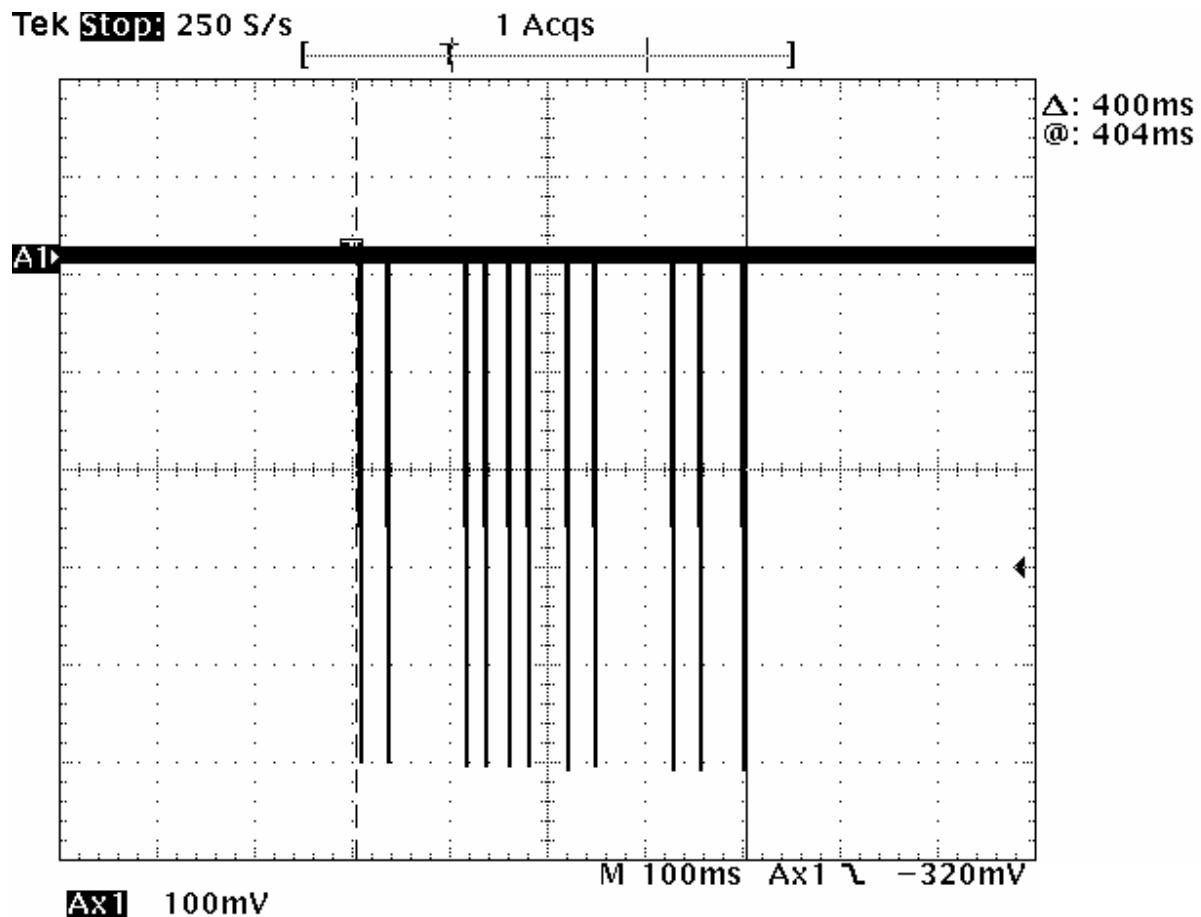


**Cease Of Transmissions on Communications Channel
Acknowledgements Blocked**

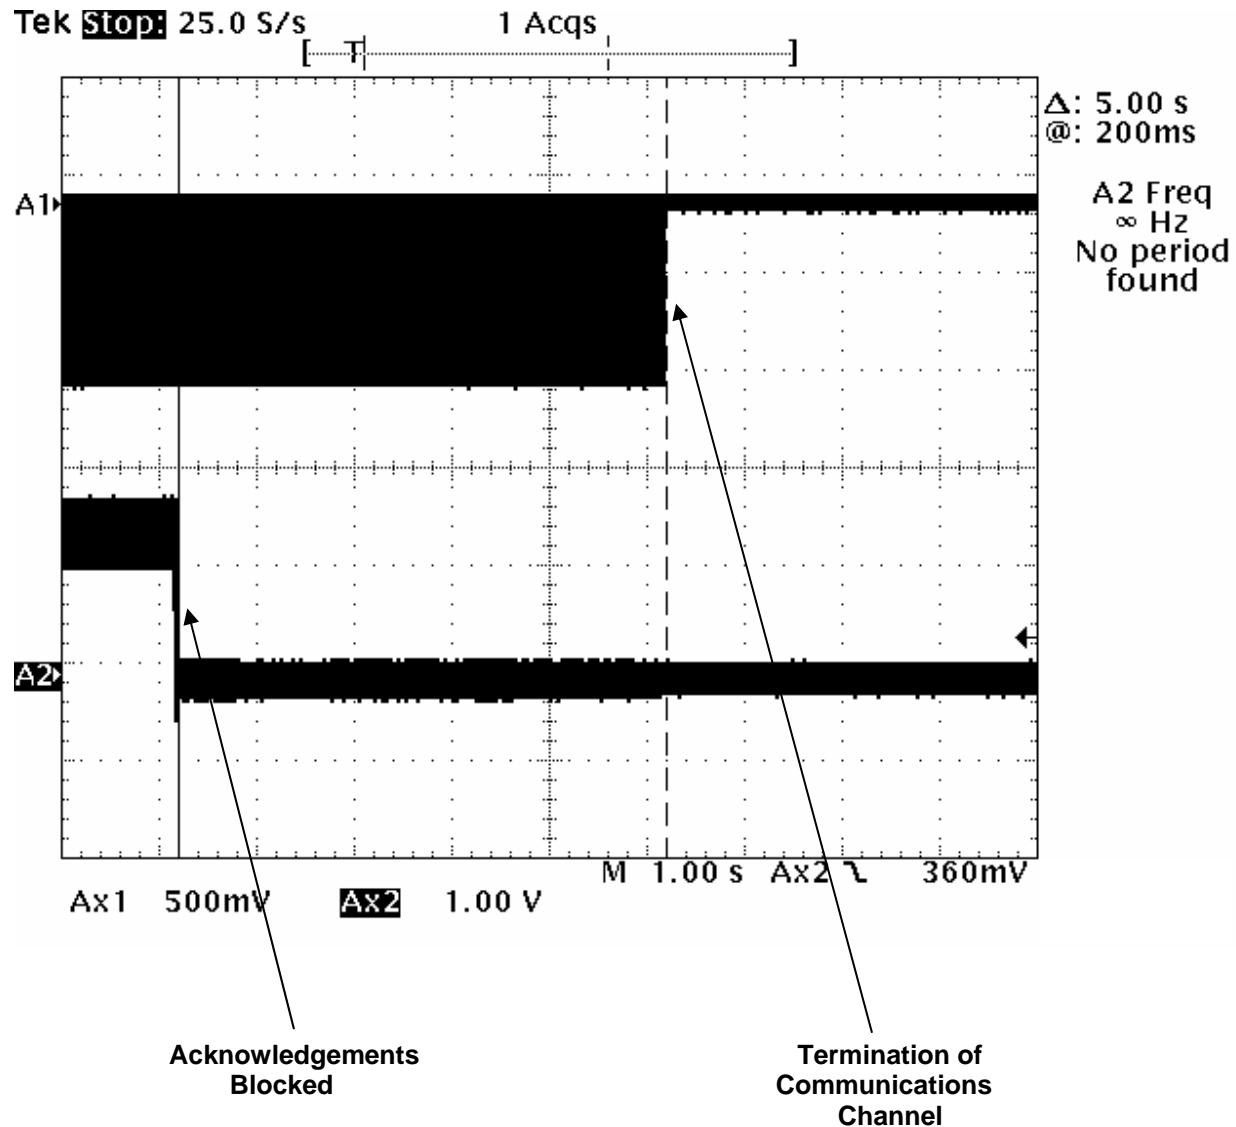


ANNEX H
EMISSIONS OUTSIDE THE SUB-BAND


RF carrier set to the lowest carrier defined by the EUT

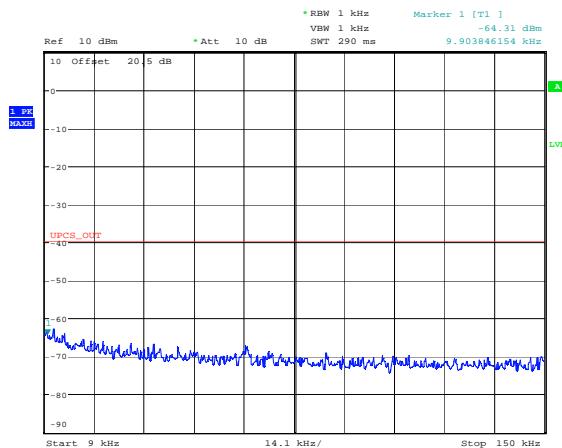

Date: 21.FEB.2007 16:20:49

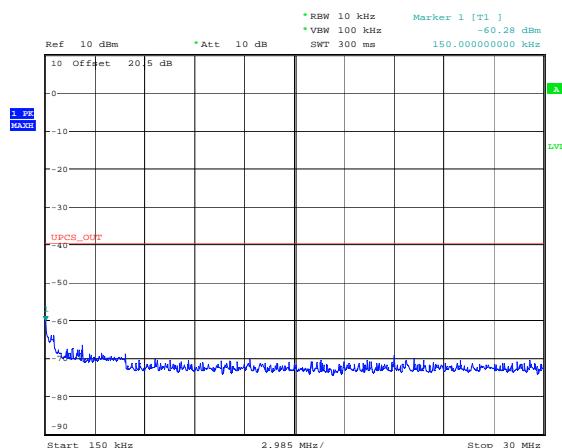


Date: 21.FEB.2007 16:21:51

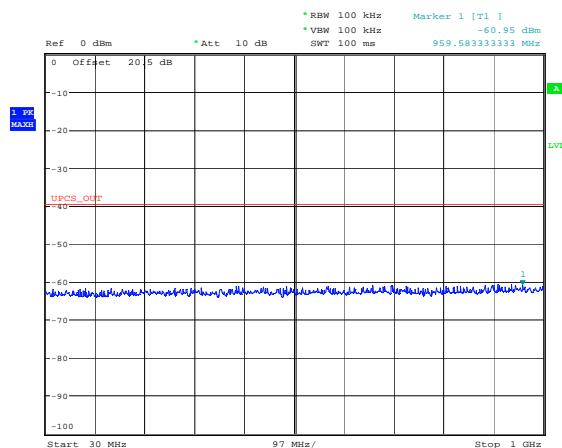


Date: 21.FEB.2007 16:23:14


RF carrier set to the lowest carrier defined by the EUT

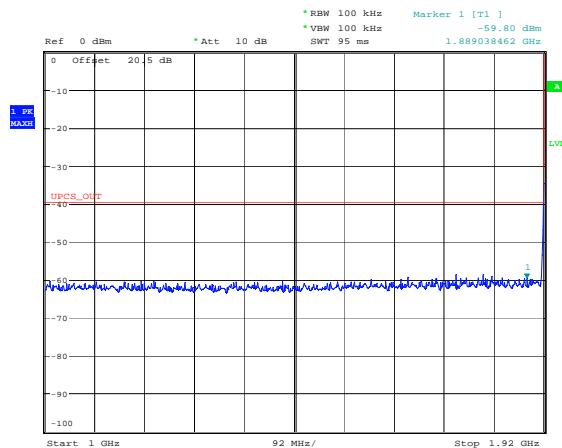

Date: 21.FEB.2007 16:23:42

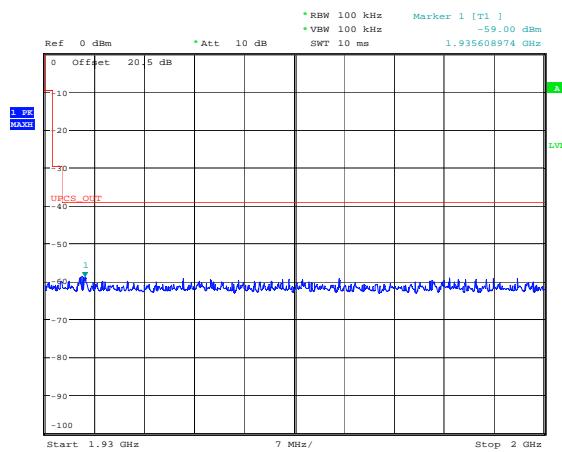


Date: 21.FEB.2007 16:50:50

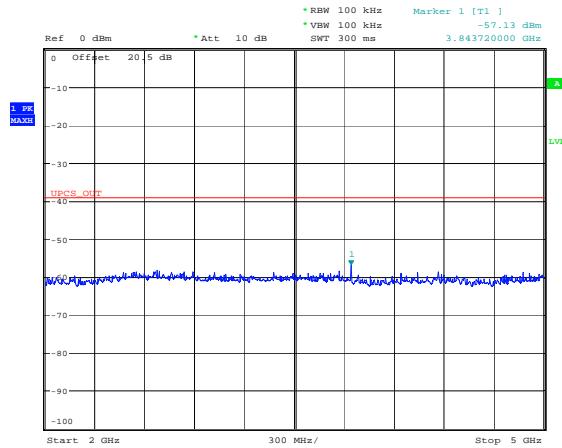


Date: 21.FEB.2007 16:52:11


RF carrier set to the lowest carrier defined by the EUT

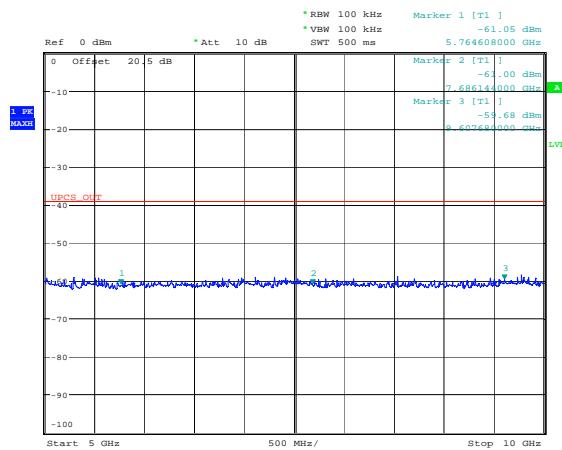


RF carrier set to the highest carrier defined by the EUT

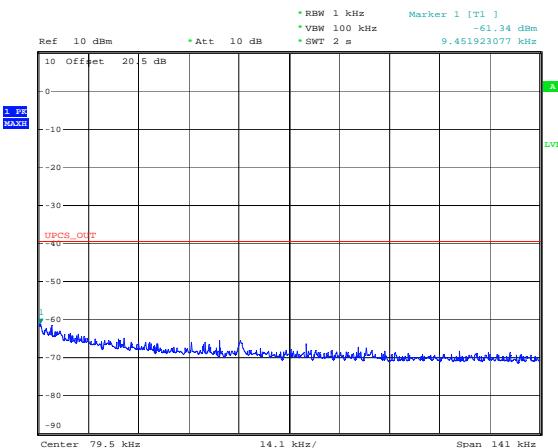

Date: 20.FEB.2007 17:12:55

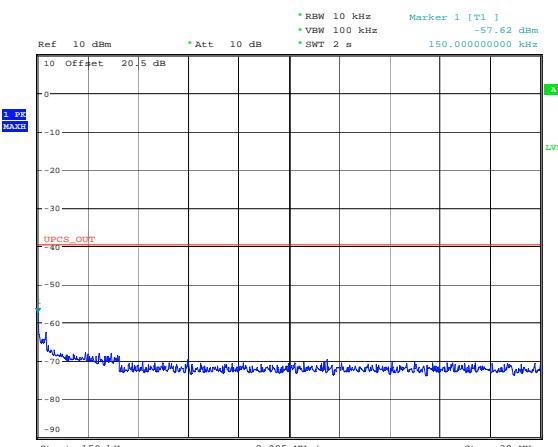


Date: 20.FEB.2007 17:13:32

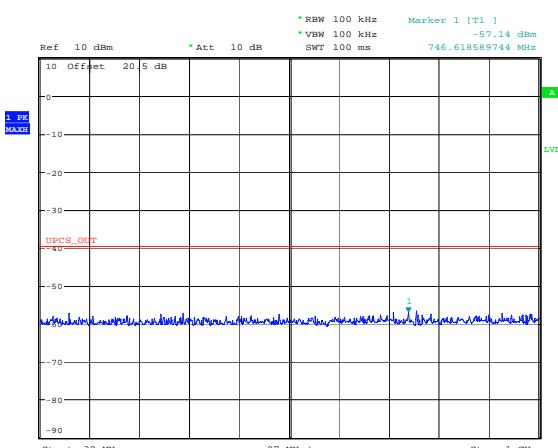


Date: 20.FEB.2007 17:14:43


RF carrier set to the highest carrier defined by the EUT

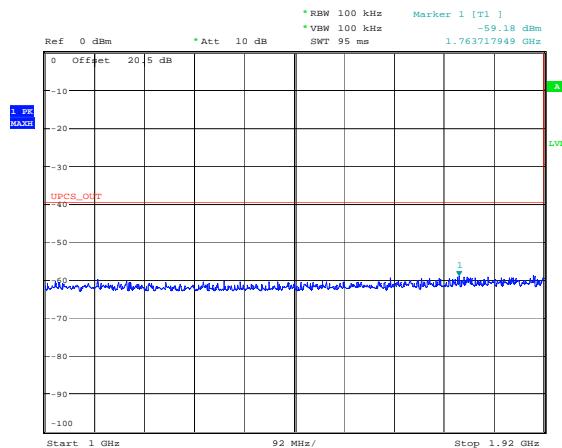

Date: 20.FEB.2007 17:15:58

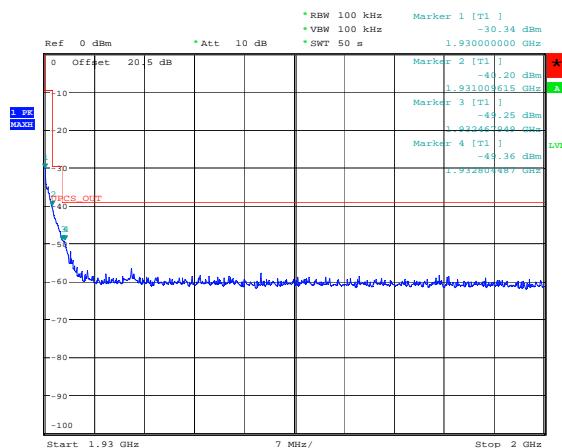


Date: 21.FEB.2007 09:33:53

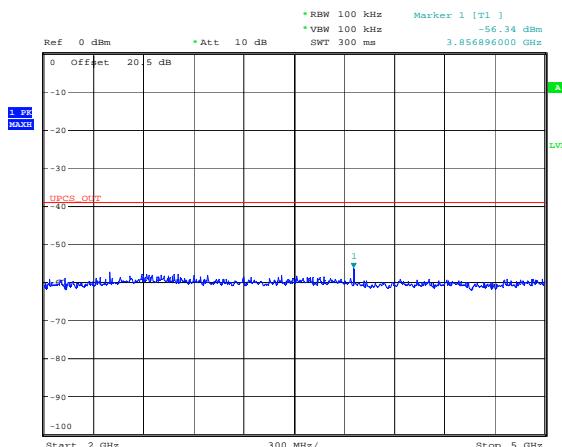


Date: 20.FEB.2007 17:26:24


RF carrier set to the highest carrier defined by the EUT

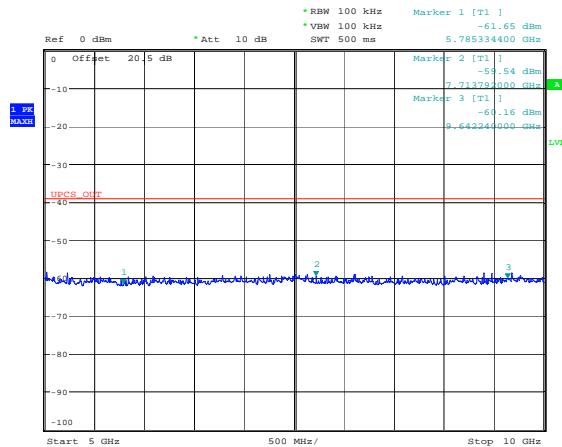

Date: 20.FEB.2007 17:27:47

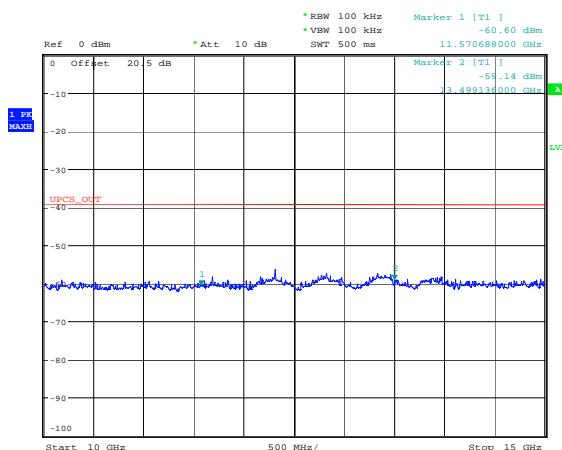


Date: 20.FEB.2007 17:28:44

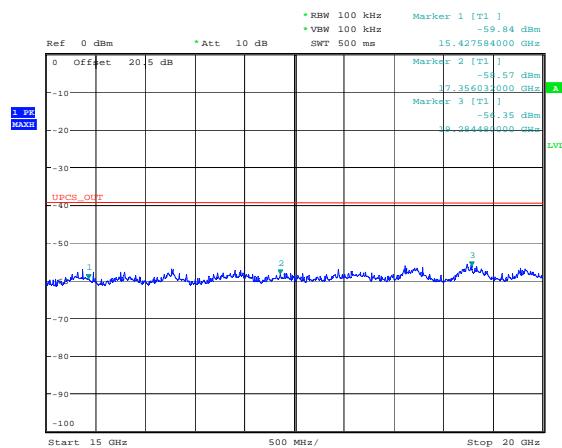


Date: 20.FEB.2007 17:29:54

ANNEX I
EMISSIONS INSIDE THE SUB-BAND – CONDUCTED

RF carrier set to the lowest carrier defined by the EUT

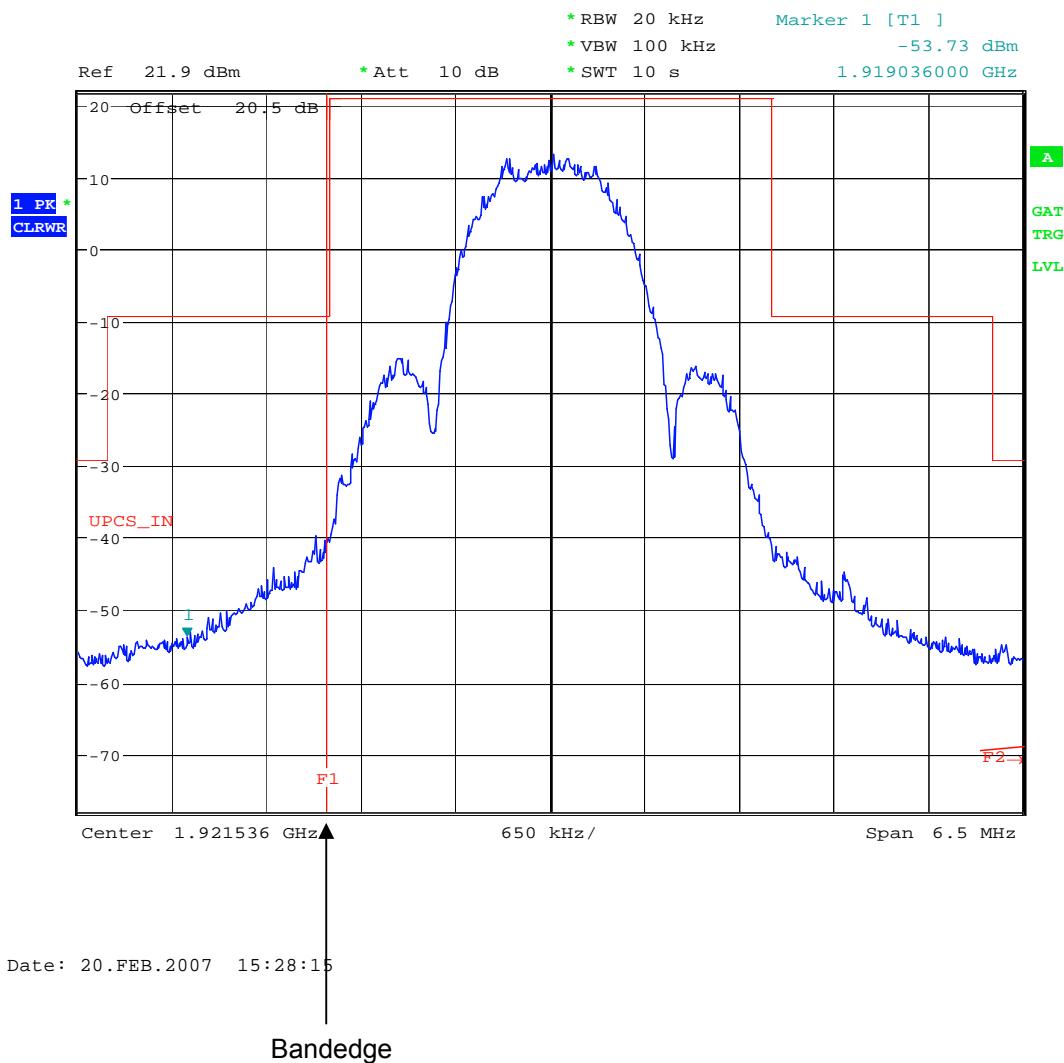

RF carrier set to the highest carrier defined by the EUT

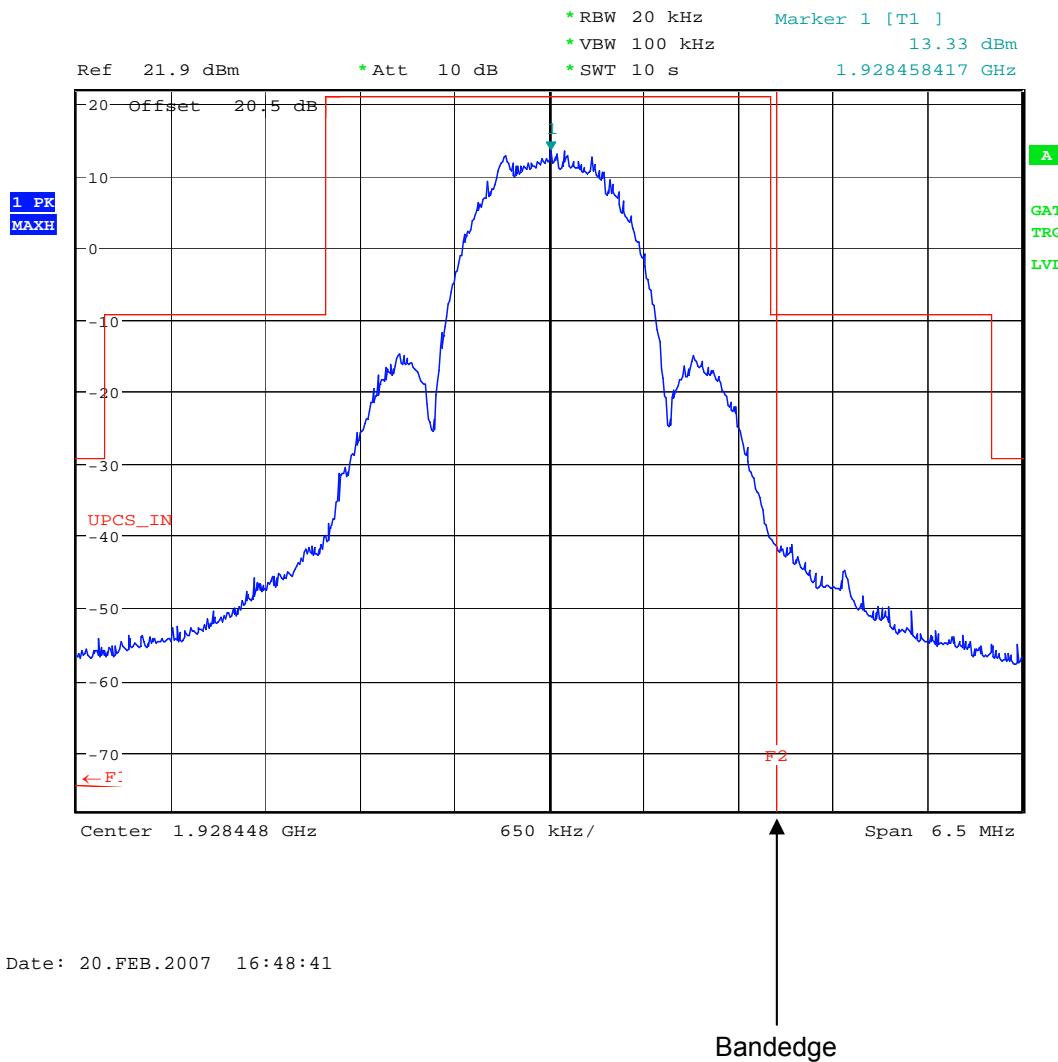


ANNEX J
SPURIOUS EMISSIONS – RADIATED

TRL Compliance Ltd
E-Field Radiation (30MHz-1GHz)

09 Mar 2007 13:23

EUT: MR400
Manuf: Alcatel-Lucent
Op Cond: Prescan 30MHz - 1000MHz
Operator: D Winstanley
Test Spec: Part15
Comment: EUT on Rx Mode. Seated in single charger. +110Vac 60Hz
RX Antenna Vertical

Scan Settings		(1 Range)					Receiver Settings			
		Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
	Start	Start	Stop							
	30MHz	30MHz	1000MHz	50kHz	120kHz	PK	1msec	Auto	ON	60dB
Transducer	No.	Start	Stop			Name				
1	21	30MHz	1000MHz			UH72				
	22	30MHz	1000MHz			UH191				
Final Measurement:		Detector:	X QP							
		Meas Time:	2sec							
		Subranges:	50							
		Acc Margin:	10 dB							

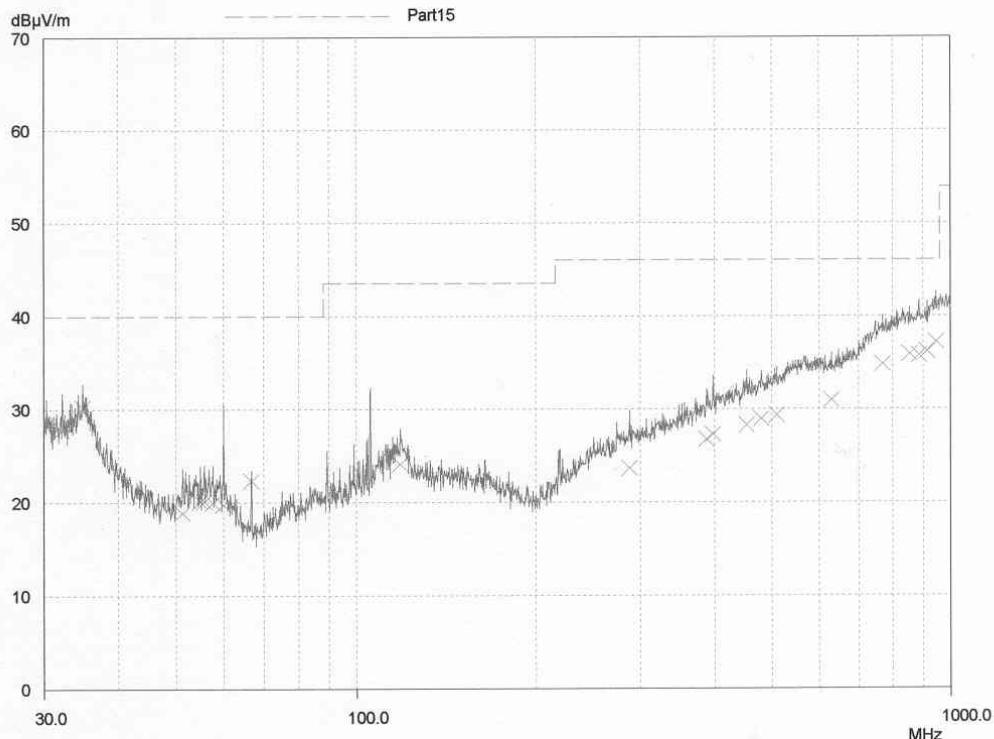

PAGE 1


TRL Compliance Ltd

23 Feb 2007 10:35

E-Field Radiation (30MHz-1GHz)


EUT: Mobile 300
Manuf: Alcatel-Lucent
Op Cond: Prescan 30MHz - 1000MHz
Operator: D Winstanley
Test Spec: Part15
Comment: EUT On, RX mode, No transmissions.
Seated in Dual Charger with second Battery. RX Antenna Horizontal. VERTICAL

Scan Settings		(1 Range)					Receiver Settings			
		Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
	Start	Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
	30MHz	30MHz	1000MHz	50kHz	120kHz	PK	1msec	Auto	ON	60dB
Transducer	No.	Start	Stop			Name				
1	21	30MHz	1000MHz			UH72				
	22	30MHz	1000MHz			UH93				
Final Measurement:		Detector:	X QP							
		Meas Time:	2sec							
		Subranges:	50							
		Acc Margin:	10 dB							

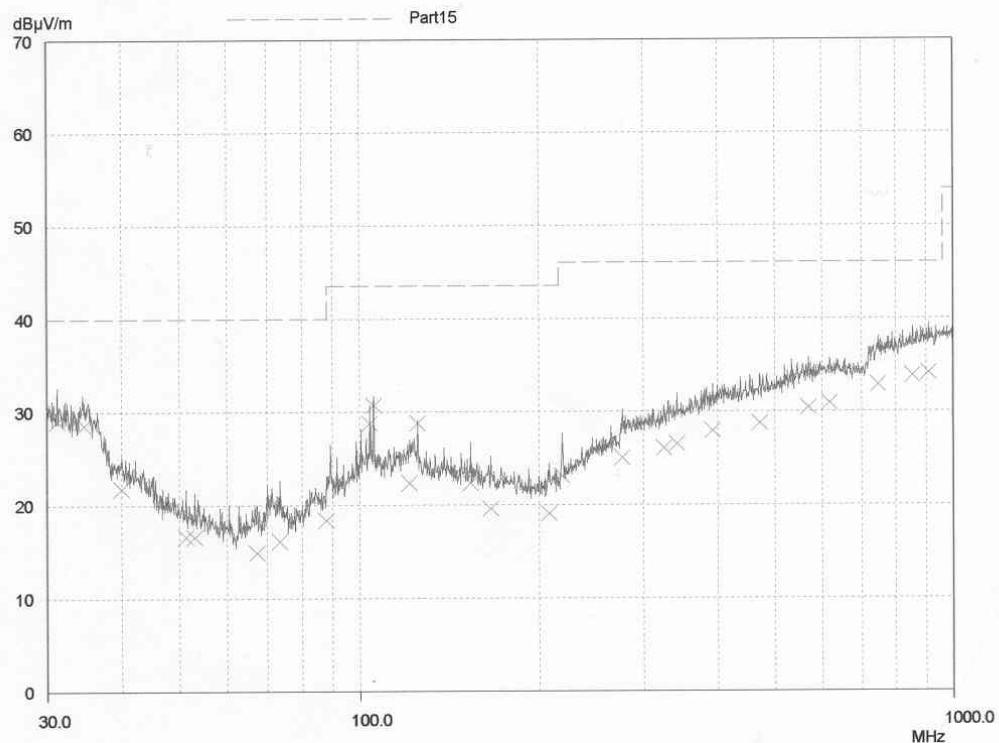

PAGE 1

ANNEX K
FRAME PERIOD

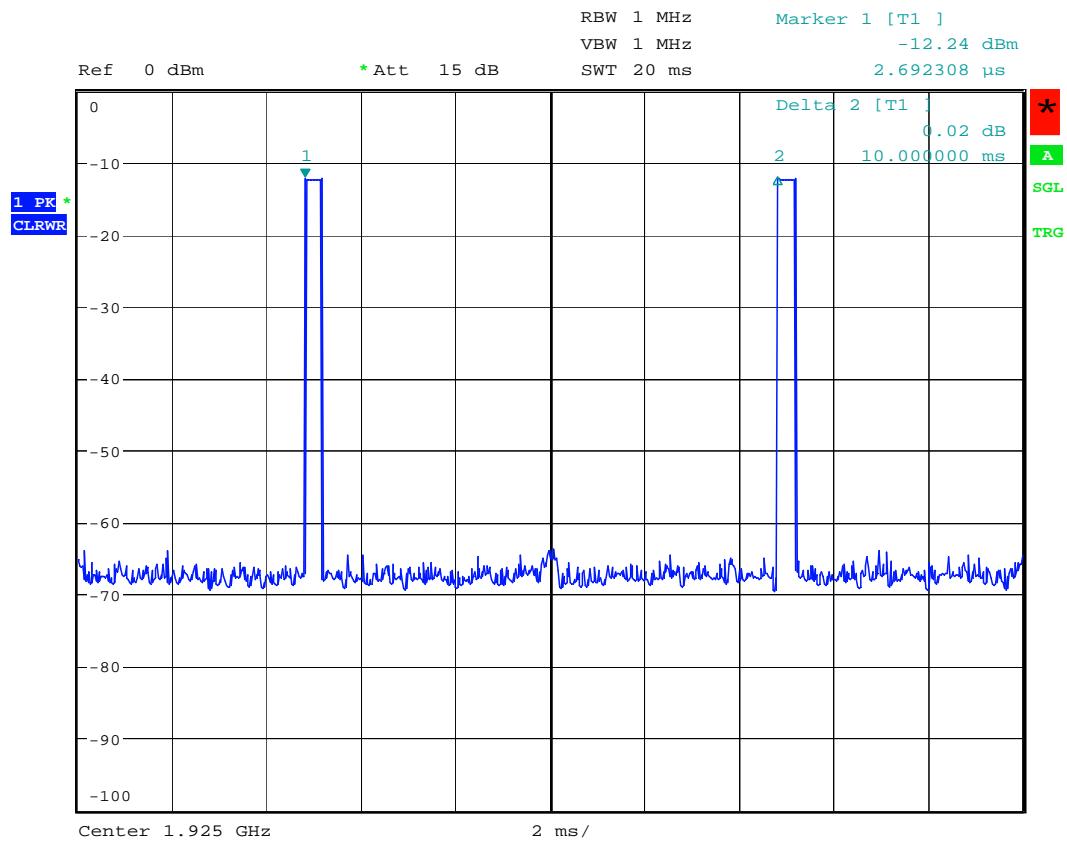

Date: 1.MAR.2007 12:25:22

ANNEX L
EQUIPMENT DETAILS & CALIBRATION

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
TEMPERATURE CHAMBER	SHARTREE	TCC 125-815P	CS 203	11	X
RESISTIVE COUPLER	ELCOM	RC-3-50	N/A	119	X
HORN ANTENNA	EMCO	3115	9010-3581	139	X
RESISTIVE COUPLER	ELCOM	RC-4-50	N/A	170	X
ATTENUATOR	BIRD	8304-200-N	N/A	221	X
RECEIVER	ROHDE & SCHWARZ	ESVS 10	844594/003	352	X
TEMPERATURE INDICATOR	FLUKE	52 Series II	74700044	426	X
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
PRE AMP	AGILENT	8449B	3008A016	572	X
FUNCTION GENERATOR	WAVETEK	178	V644080	638	X
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/01	UH03	X
LISN	ROHDE & SCHWARZ	ESH3-Z5	863906/018	UH05	X
RANGE 1	TRL	3 METRE	N/A	UH06	X
RANGE 1	TRL	10 METRE	N/A	UH07	X
MULTIMETER	AVOMeter	M3004	M3270006	UH41	X
OSCILLOSCOPE	TEKTRONIX	TDS520B	B020491	UH122	X
RECEIVER	ROHDE & SCHWARZ	ESVS 10	841431/014	UH186	X
RECEIVER	ROHDE & SCHWARZ	ESHS 10	841429/012	UH187	X
BILOG ANTENNA	YORK	CBL611/A	1618	UH191	X
LISN	ROHDE & SCHWARZ	ESH3-Z5.831.5	8470 31/015	UH195	X
FUNCTION GENERATOR	WAVETEK	271	C6841078	UH221	X
SPECTRUM ANALYSER	ROHDE & SCHWARZ	FSU 46	200034	UH281	X

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SIGNAL GENERATOR	ROHDE & SCHWARZ	SML 03	102268	UH297	X
CRYSTAL DETECTOR	HP	8472A	1822A00897	UH307	X
SIGNAL GENERATOR	HP	83630B	3722A00588	UH340	X
MODULATION ANALYSER	ROHDE & SCHWARZ	CMD 60	N/A	N/A	X

TRL Number	Equipment Type	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
L011	Temperature chamber	Shartree	Use Calibrated Temperature Indicator		
L119	Combiner	Elcom	Calibrate in use		
L139	1-18GHz Horn	EMCO	03/05/2005	24	03/05/2007
L170	Combiner	Elcom	Calibrate in use		
L221	Attenuator	Bird	Calibrate in use		
L352	Receiver	R&S	07/08/2006	12	07/08/2007
L426	Temperature Indicator	Fluke	09/01/2007	12	09/01/2008
L479	Analyser	Anritsu	09/01/2007	12	09/01/2008
L572	Pre Amp	Agilent	Calibrate in use		
L638	Function Generator	Wavetek	Use Calibrated oscilloscope		
UH003	Receiver	R&S	24/07/2006	12	24/07/2007
UH005	LISN/AMN	R&S	11/04/2006	12	11/04/2007
UH006	3m Range CAL	TRL	23/01/2007	12	23/01/2008
UH007	10 Range CAL	TRL	23/01/2007	12	23/01/2008
UH041	Multimeter	AVometer	04/01/2007	12	04/01/2008
UH122	Oscilloscope	Tektronix	07/06/2005	24	07/06/2007
UH177	Power supply	Manson	Use Calibrated Multimeter		
UH186	Receiver	R&S	01/02/2006	12	01/02/2007
UH187	Receiver	R&S	11/10/2006	12	11/10/2007
UH191	Bilog Antenna	Schaffner	11/08/2006	24	11/08/2008
UH195	LISN/AMN	R&S	09/01/2007	12	09/01/2008
UH221	Function Generator	Wavetek	Use Calibrated oscilloscope		
UH281	Spectrum Analyser	R&S	24/07/2006	12	24/07/2007
UH297	Signal Generator	R&S	21/04/2006	12	21/04/2007
UH307	Crystal Detector	R&S		For Information Only	
UH340	Signal Generator	HP	29/06/2006	12	29/06/2007
N/A	CMD60	R&S			

ANNEX M

MEASUREMENT UNCERTAINTY

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Equipment - TRLUH120) = **2.18dB**
Uncertainty in test result (Equipment – TRL05) = **1.08dB**
Uncertainty in test result (Equipment – TRL479) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Equipment - TRLUH120) = **119ppm**
Uncertainty in test result (Equipment – TRL05) = **0.113ppm**
Uncertainty in test result (Equipment – TRL479) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**, Uncertainty in test result (30MHz – 1GHz) = **4.6dB**, Uncertainty in test result (1GHz-18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result (Equipment TRL479) Up to 8.1GHz = **3.31dB**
Uncertainty in test result (Equipment TRL479) 8.1GHz – 15.3GHz = **4.43dB**
Uncertainty in test result (Equipment TRL479) 15.3GHz – 21GHz = **5.34dB**
Uncertainty in test result (Equipment TRLUH120) Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**, Uncertainty in time measurement = **0.59%**, Uncertainty in Amplitude measurement = **0.82%**

[11] Power Line Conduction

Uncertainty in test result = **3.4dB**

[12] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[13] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[14] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[15] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[16] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[17] Receiver Threshold

Uncertainty in test result = **3.23dB**

[18] Transmission Time Measurement

Uncertainty in test result = **7.98%**