

Test of Alcatel Mobile IPTouch 300 Device

To FCC47 CRF Part 15.247/IC RSS 210

Test Report Serial No.:
TUVR03A-AL\REV A



TEST REPORT
FROM
MiCOMLabs

Test of Alcatel Mobile IPTouch 300 Device
To FCC 47 CFR Part 15.247/IC RSS-210


Test Report Serial No.:
TUVR03A-AL\REV A

This report supersedes NONE

Remarks:

Equipment complied with the specification
Equipment did not comply with the specification

This Test Report is issued Under the Authority of:



Gordon Hurst President & CEO

Copy No: pdf

Issue date: 2nd September '04

Company:

Address:

Alcatel
1 route du Dr Albert Schweitzer
67408 Illkirch, Cedex, France

Equipment Category: 802.11b DSSS Wireless Telephone



2106

This test report may be reproduced in full only



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 2 of 72

This page has been left intentionally blank

CONTENTS

1	EXECUTIVE SUMMARY	5
2	TECHNICAL DETAILS	7
3	TEST SUMMARY	8
3.1	LIST OF MEASUREMENTS	8
3.2	OPERATIONAL MODE OF EUT	9
4	MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS	10
4.1	GENERAL OBSERVATIONS	10
4.2	TEST RESULTS	11
	4.2.1 <i>Transmitter characteristics</i>	11
5	PHOTOGRAPHS	31
5.1	AC WIRELINE CONDUCTED EMISSION TEST SETUP	31
5.2	RESTRICTED BANDS RADIATION (30MHz – 1GHz)	32
5.3	MOBILE IPTOUCH 300 WITH HEADSETS	33
6	GRAPHICAL RESULTS	34
7	TEST EQUIPMENT	71
8	SUMMARY OF TEST RESULTS	72



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 4 of 72

This page has been left intentionally blank

1 Executive Summary


The purpose of this test program was to demonstrate compliance of the Alcatel Wireless Telephone against the current USA and Canadian specifications for short-range device certification requirements. The Alcatel Wireless Telephone demonstrated compliance against the US standard FCC 47 CFR Part 15.247 Subpart C (Intentional Radiator) and Canada's IC/RSS-210 Low Power License-Exempt Radio Communication Devices (all frequency bands).

NetLink Wireless Telephone is designed and manufactured by Spectralink, and used for NetLink Wireless Telephone System (WTS) also designed and manufactured by Spectralink. The WTS is a fully featured, 802.11b (DSSS) based wireless telephone system, providing both voice and data communications over a single integrated wireless network at in the 2.4GHz frequency band. NetLink WTS has two components, Wireless Telephones and Telephony Gateways.

NetLink Wireless Telephones operate as clients on the WLAN, alongside other mobile 802.11 devices. Wireless LAN fixed radios, called access points (APs), receive IP voice packets from Wireless Telephones and forward them to the NetLink Telephony Gateway over the Ethernet LAN.

The NetLink WTS simplifies LAN management and improves the cost-effectiveness of the network. With the NetLink Wireless Telephone, employees will have a phone whenever they need one, wherever they are in the facility. Wireless Telephones work just like a desktop telephone, with all the features and capabilities that employees desire, including: Display capabilities, Multiple line appearances, Host switch features, Message waiting indication, Messaging.

The following diagram identifies the NetLink system architecture and its position in a typical voice/data network.

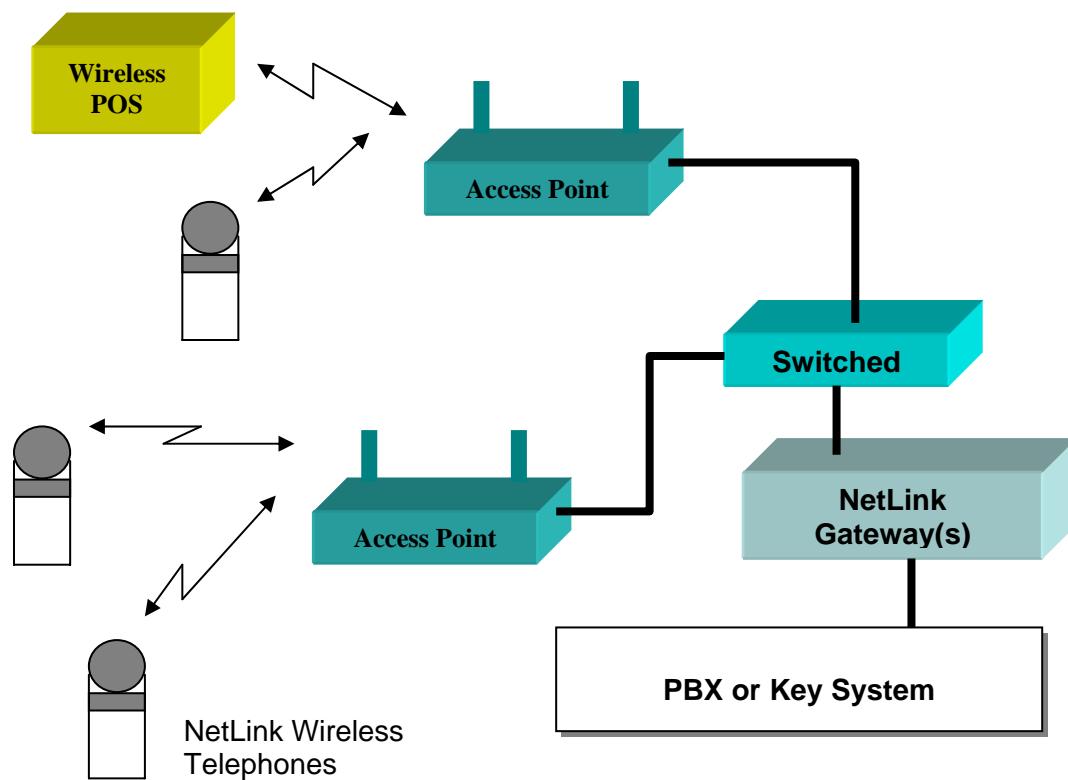

Test Configuration

The test configuration was a standalone telephone unit. The unit was pre-programmed to be able to set the following configurations:

Normal Transmit and Receive Modes:

- Mode I: Channel 1 (2,412MHz) Display "Norm, Tx Chan 1": Low Channel
- Mode II: Channel 6 (2,437MHz) Display "Norm, Tx Chan 6": Mid Channel
- Mode III: Channel 11 (2,462MHz) Display "Norm, Tx Chan 11" : High Channel

Continuous Receive Modes:

- Mode VII: Continuous receive mode on Channel 6 (2,437MHz)

A SMA coaxial connector was used to demonstrate compliance for conducted measurement testing. A telephone with integral antenna was utilized for all emission measurements.



NetLink Wireless Telephone
Equipment Under Test (EUT)

The required tests demonstrated compliance as per client declaration of test configuration, monitoring method and associated pass/fail criteria.

This report provides summarised test results of each test performed. Detailed test results were recorded in Test Results Sheets and retained within the laboratory.

No equipment modification was required to achieve the results reported in this document.

2 Technical Details

Purpose	To verify compliance of the Mobile IPTouch 300 Wireless Telephone to FCC and Industry Canada specifications
Applicant / Client	TUV Rheinland 1279 Quarry Lane, Suite A Pleasanton, CA 94566
Manufacturer	SpectraLink 5755 Central Avenue Boulder, Colorado 80301 USA
Laboratory performing the tests	MiCOM Labs, Inc. 3922 Valley Avenue, Suite "B" Pleasanton, California 94566 USA
Test report reference number	TUVR03A-AL\REV A
Date EUT received	22 nd January '03 and May 11 th 2004
Standard applied	FCC 47 CFR Part 15.247/IC RSS-210
Dates of test (from - to)	11 th February '03 – 16 th February '03 11 th May '03 – 12 th May '04 (Section 4.2.1.5 AC Wireline Conducted Emissions) 26 th – 28 th May (Headset emission testing)
No of Units:	One
Equipment Category:	802.11b Spread Spectrum Device
Trade Name:	Alcatel
Type Number:	NetLink Wireless Telephone
Type of Equipment:	Standalone Telephone
Type Designation:	MOBILE IPTOUCH 300
ITU Emission Code(s):	11M0D7E
Full Frequency Range:	2,400 – 2,483.5MHz
Frequency Channel Range:	2,412 – 2,462MHz (Channels 1 – 11)
Modulation:	DSSS
Microprocessor(s):	Texas Instruments 54xx
Operating Frequency (ies):	2,400 – 2,483.5MHz
Clock/Oscillator(s)	32.768KHz, 44MHz
Rated Input Voltage:	Nominal: +4.2V DC Min - Max: +3.5Vdc – 4.9Vdc
Aggregate Bit Rates:	1Mbit/s, 2Mbit/s, 5.5Mbit/s, 11Mbit/s
Antenna Gain:	0dBi
Nominal Output Power:	+20dBm
Temperature Range:	0 to +40°C
Primary Function Evaluation:	To initiate and receive telephone calls
Intended function in accordance with accompanying documentation	To initiate and receive telephone calls without perceptible degradation of voice quality or loss of correct keypad & display operation
Normal Test Modulation, Error Correction and Control Signals:	IEEE 802.11b

3 Test Summary

3.1 List of Measurements

The following table represents the list of measurements for Spread Spectrum, Direct Sequence devices under the **FCC, Part 15 Subpart C** and **Industry Canada RSS-210**.

List of Measurements

Section(s)	Test Items		Condition
	Transmit mode (TX):		
15.247(a)(2) 5.9.1	Bandwidth at 6 dB below		Conducted
15.247(c) 5.9.1 6.2.2 (o) (e1)	Occupied BW (or Bandedge) Out of Band Emissions (Bandwidth at 20 dB below)	The radiated emission in any 100kHz of out-band shall be at least 20dB below the highest in-band spectral density.	Conducted
15.247(b) 6.2.2 (o) (b)	Transmitter output power	Shall not exceed 1.0 W	Conducted
15.247(d) 6.2.2 (o) (b)	Transmitter power spectral density	Shall not be greater than 8 dBm in any 3kHz band	Conducted
15.247(e) 6.2.2 (o) (b)	Processing gain	N/A	N/A ¹
15.207 6.6	AC Wireline Conducted Emissions 150kHz–30MHz	Class B: 250µV	Conducted
15.205/ 209 6.2.1 / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table 3	Radiated (30MHz -1GHz) Radiated (1GHz-25GHz)
	Receive mode (RX):		
15.207 7.4	AC Wireline Conducted Emissions 150kHz–30MHz	Class B: 250µV	Conducted
15.209 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in RSS-210.	Radiated (30MHz-1GHz) Radiated (1GHz-25GHz)

Note 1: The current specification does not require test of this parameter. The Processing Gain data is excluded from this application according to the FCC rule change on 16 May 2002

3.2 Operational Mode of EUT

Three kinds of modulation are used for transmission with bit rates 1Mbit/s, 5.5Mbit/s and 11Mbit/s. The equipment will be marketed with one antenna (no direct connection from the end user is permitted). The EUT was delivered as two separate items;

- (a).. connectorized for conducted measurements
- (b).. antenna for radiated measurements

Table 3.3(a) – Transmit mode (TX)

Operating Frequency (GHz)	Rated Output Power (Conducted) [dBm]			Test Performed*
	Bit Rate 1Mbit/s	Bit Rate 5.5Mbit/s	Bit Rate 11Mbit/s	
2.412 (Ch. 1)	+20	+20	+20	X
2.417 (Ch. 2)	+20	+20	+20	
2.422 (Ch. 3)	+20	+20	+20	
2.427 (Ch. 4)	+20	+20	+20	
2.432 (Ch. 5)	+20	+20	+20	
2.437 (Ch. 6)	+20	+20	+20	X
2.442 (Ch. 7)	+20	+20	+20	
2.447 (Ch. 8)	+20	+20	+20	
2.452 (Ch. 9)	+20	+20	+20	
2.457 (Ch. 10)	+20	+20	+20	
2.462 (Ch. 11)	+20	+20	+20	X

* Full conducted testing with bit rates 1, 5.5 and 11Mbit/s

Table 3.3(b) – Receive mode (RX)

Operating Frequency (GHz)	Test Performed*
2.412 (Ch. 1)	
2.417 (Ch. 2)	
2.422 (Ch. 3)	
2.427 (Ch. 4)	
2.432 (Ch. 5)	
2.437 (Ch. 6)	X
2.442 (Ch. 7)	
2.447 (Ch. 8)	
2.452 (Ch. 9)	
2.457 (Ch. 10)	
2.462 (Ch. 11)	

* Full radiated emission testing with bit rate 1Mbit/s

Note 1: The manufacturer declared that the EUT was operated in worst case conditions, simultaneous transmit, receive and standby modes through a single antenna port, therefore only one set of radiated measurements were taken for each channel of interest – refer to transmitter characteristics.

Note 2: Two EUT's were delivered for test purposes

- MOBILE IPTOUCH 300 with integral antenna
- MOBILE IPTOUCH 300 with coaxial flying lead, terminated in an SMA connector

Note 3: The MOBILE IPTOUCH 300 telephone with coaxial connector was used for conducted testing

Note 4: The MOBILE IPTOUCH 300 telephone with integral antenna was utilised for all emission measurements

Note 5: The MOBILE IPTOUCH 300 telephone with integral antenna complete with two types of headset were utilized for radiated emission measurements (26th – 28th May '04)

4 Measurements, Examinations and Derived Results

4.1 General observations

Equipment model and serial number(s)

Module:	Model Number:	Serial Number:
Mobile IPTouch 300 (coaxial connector)	MOBILE IPTOUCH 300	SNPFCC#2*
“ “ (integral antenna)	3BN78101AA	SNPFCC#4*

*The telephones submitted for the initial test program were pre-production models

Test Report Update 11th - 12th May 2004

AC Wireline Conducted Emissions Test Update - Equipment model and serial number(s)

Module:	Model Number:	Serial Number:
Mobile IPTouch 300 (integral antenna)	3BN78101AA	SNPFCC#2*

*The telephone submitted for the AC Wireline Conducted Emissions was a full production model

Equipment Details – Headset Emission Testing 26th – 28th May '04

Module:	Model Number:	Serial Number:
Mobile IPTouch 300 (integral antenna)	3BN78101AA	640121664
Plantronics Headset	PTH100	None Available
Plantronics Headset	PTH200	AA1511 B4

*The models submitted for emission testing were manufactured products

Additional notes:

1. *This report contains the test results only. Details of the test methods used have been recorded and are kept on file by the laboratory. Wherever possible, the test methods described in ETSI document EN 301 126 have been used.*
2. *The measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95% in accordance with UKAS document M 3003.*

4.2 Test Results

4.2.1 Transmitter characteristics

4.2.1.1 6dB Bandwidth


Test Procedure

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyser connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate centre frequency. The spectrum analyzer was set to:

RBW=100kHz, VBW=100kHz*1, Span=50MHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

Test Measurement Setup



Measurement setup for 6dB bandwidth test

Measurement Results

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Radio parameters.

Data Rate(s): 1, 5.5, 11 Mbit/s

Test date: 23rd January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	6dB Bandwidth (MHz)
2412 (Ch.1)	2,406.04	2,417.96	TUVR03A-AL/01	11.92
2437 (Ch.6)	2,430.92	2,443.09	TUVR03A-AL/04	12.17
2462 (Ch.11)	2,456.34	2,467.67	TUVR03A-AL/07	11.33

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	6dB Bandwidth (MHz)
2412 (Ch.1)	2,406.04	2,417.96	TUVR03A-AL/02	11.92
2437 (Ch.6)	2,431.42	2,442.59	TUVR03A-AL/05	11.17
2462 (Ch.11)	2,456.34	2,467.67	TUVR03A-AL/08	11.33



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 12 of 72

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	6dB Bandwidth (MHz)
2412 (Ch.1)	2,406.04	2,417.96	TUVR03A-AL/03	11.92
2437 (Ch.6)	2,431.50	2,442.50	TUVR03A-AL/06	11.00
2462 (Ch.11)	2,456.71	2,467.29	TUVR03A-AL/09	10.58

Specification.

Limits

Minimum 6dB Bandwidth	500KHz
-----------------------	--------

Measurement Uncertainty

Measurement uncertainty (ppm)	±0.86	2.074KHz
-------------------------------	-------	----------

Traceability

METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-03	Bar 1, RVA 01, K-CBL 8, K-CBL 10, S-Anlr 1

Note 1: The unit was tested in Tx, Rx and Standby modes simultaneously

4.2.1.2 Occupied Bandwidth / Band-Edge (at 20dB below), Out of Band Emissions

Test Procedure


The bandwidth at 20 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW=100kHz, VBW=100kHz*1, Span=50MHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

Test Measurement Setup

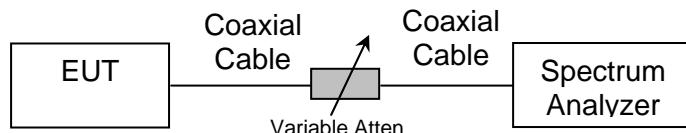

Measurement setup for Occupied Bandwidth / Band-edge (at 20db below), and Out of Band Emissions

Measurement Results of Occupied Bandwidth (20dB)

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Radio parameters.

Data Rate(s): 1, 5.5, 11 Mbit/s

Test date: 24th January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	20dB Bandwidth (MHz)
2412 (Ch.1)	2,404.25	2,421.17	TUVR03A-AL/25	16.92
2437 (Ch.6)	2,429.25	2,445.75	TUVR03A-AL/28	16.50
2462 (Ch.11)	2,454.67	2,470.17	TUVR03A-AL/31	15.50

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	20dB Bandwidth (MHz)
2412 (Ch.1)	2,404.17	2,420.92	TUVR03A-AL/26	16.75
2437 (Ch.6)	2,429.67	2,445.42	TUVR03A-AL/29	15.75
2462 (Ch.11)	2,454.92	2,470.58	TUVR03A-AL/32	15.67

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	20dB Bandwidth (MHz)
2412 (Ch.1)	2,404.25	2,421.17	TUVR03A-AL/27	16.92
2437 (Ch.6)	2,429.58	2,445.50	TUVR03A-AL/30	15.92
2462 (Ch.11)	2,454.75	2,470.58	TUVR03A-AL/33	15.83

Measurement Results of Band-edge

Test date: 24th January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	Margin to Lower Limit (MHz)	Margin to Upper Limit (MHz)
2412 (Ch.1)	2,404.17		TUVR03A-AL/10	4.17	
2462 (Ch.11)		2,470.92	TUVR03A-AL/13		12.58

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	Margin to Lower Limit (MHz)	Margin to Upper Limit (MHz)
2412 (Ch.1)	2,404.17		TUVR03A-AL/11	4.17	
2462 (Ch.11)		2,470.92	TUVR03A-AL/14		12.58

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	Margin to Lower Limit (MHz)	Margin to Upper Limit (MHz)
2412 (Ch.1)	2,404.17		TUVR03A-AL/12	4.17	
2462 (Ch.11)		2,470.92	TUVR03A-AL/15		12.58

Measurement Results of Out of Band Emissions

All conducted emissions in any 100KHz bandwidth outside of the spread spectrum band were at least 20dB lower than the highest in-band power level.

Specification

Limits

Minimum 20dB Bandwidth @ Band-edge	Lower Limit Band-edge	Upper Limit Band-edge	Out of Band Emissions	Down on maximum power
		2,400MHz		>= 20dB



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 15 of 72

Measurement Uncertainty Occupied Bandwidth / Band-edge

Measurement uncertainty (ppm)	±0.86	2.074KHz
-------------------------------	-------	----------

Measurement Uncertainty Out of Band Emissions

Measurement uncertainty (dB)	+1.38 / -1.84dB
------------------------------	-----------------

Traceability


METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-01 & 05	Bar 1, RVA 01, K-CBL 8, K-CBL 10, S-Anlr 1

Note 1: The unit was tested in Tx, Rx and Standby modes simultaneously

4.2.1.3 Transmitter Output Power

Test Procedure

- A transmitter antenna terminal of EUT is connected to the input of a RF power sensor.
- Measurement is made while EUT is operating in transmission mode at the appropriate center frequency.

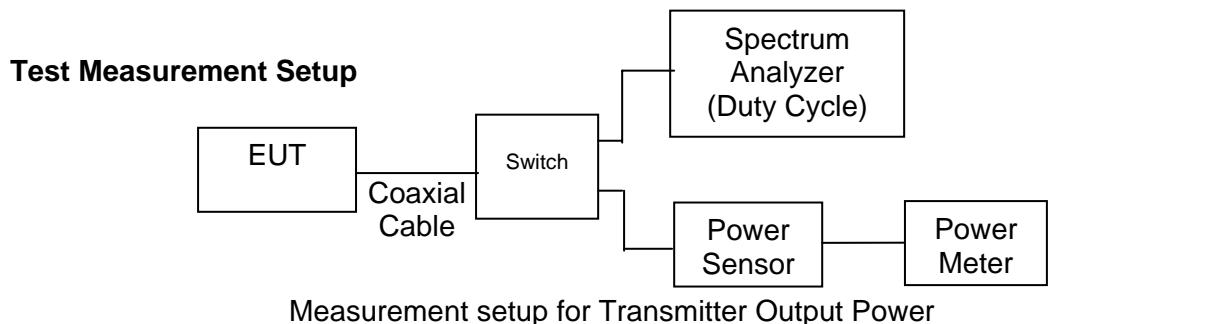

Measurement Results for Transmitter Output Power

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Radio parameters.

Data Rate(s): 1, 5.5, 11 Mbit/s

Test date: 23th January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Duty Cycle (%)	Measured on Period (mS)	Measured off Period (mS)	Measured O/P Power (dBm)	Path Loss (dB)	Conducted Power (dBm)
2412 (Ch.1)	5.9	1.18	18.82	19.06	0.5	19.56
2437 (Ch.6)	5.9	1.18	18.82	18.08	0.5	18.58
2462 (Ch.11)	5.9	1.18	18.82	17.08	0.5	17.58

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Duty Cycle (%)	Measured on Period (mS)	Measured off Period (mS)	Measured O/P Power (dBm)	Path Loss (dB)	Conducted Power (dBm)
2412 (Ch.1)	1.89	0.364	18.936	19.50	0.5	20.00
2437 (Ch.6)	1.89	0.364	18.936	18.70	0.5	19.20
2462 (Ch.11)	1.89	0.364	18.936	17.56	0.5	18.06

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Duty Cycle (%)	Measured on Period (mS)	Measured off Period (mS)	Measured O/P Power (dBm)	Path Loss (dB)	Conducted Power (dBm)
2412 (Ch.1)	1.48	0.283	18.817	19.59	0.5	20.09
2437 (Ch.6)	1.48	0.283	18.817	18.42	0.5	18.92
2462 (Ch.11)	1.48	0.283	18.817	17.05	0.5	17.55



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 17 of 72

Specification

Limits

Transmitter Output Power	Watts	dBm
	<= 1	<= +30

Measurement Uncertainty Output Power

Measurement uncertainty (dB)	±1.33
------------------------------	-------

Traceability

METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-01	Bar 1, RVA 01, K-CBL 8, K-CBL 10, S-Anlr 1, PMtr 1, PSnsr 1

Note 1: The unit was tested in Tx, Rx and Standby modes simultaneously

4.2.1.4 Transmitter Power Spectral Density


Test Procedure

The peak power density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set as follows:

RBW= 3kHz, VBW=100kHz, Suitable Span and Sweep time

Test Measurement Setup

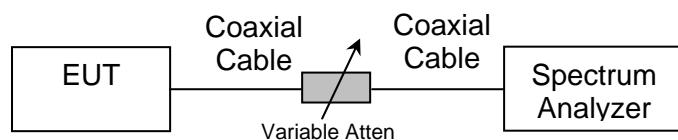

Measurement setup for Transmitter Power Spectral Density

Measurement Results for Transmitter Power Spectral Density

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Radio parameters.

Data Rate(s): 1, 5.5, 11 Mbit/s

Test date: 23th January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Plot #	Path Loss (dB)	Actual Value (dBm)	Limit (dBm)	Margin (dB)
2412 (Ch.1)	-13.50	TUVR03/16	8.5	-5.00	+8.00	13.00
2437 (Ch.6)	-15.33	TUVR03/19	8.5	-6.83	+8.00	14.83
2462 (Ch.11)	-14.83	TUVR03/22	8.5	-6.33	+8.00	14.33

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Plot #	Path Loss (dB)	Actual Value (dBm)	Limit (dBm)	Margin (dB)
2412 (Ch.1)	-14.33	TUVR03/17	8.5	-5.83	+8.00	13.83
2437 (Ch.6)	-15.17	TUVR03/20	8.5	-6.67	+8.00	14.67
2462 (Ch.11)	-16.17	TUVR03/23	8.5	-7.67	+8.00	15.67

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Plot #	Path Loss (dB)	Actual Value (dBm)	Limit (dBm)	Margin (dB)
2412 (Ch.1)	-15.00	TUVR03/18	8.5	-6.50	+8.00	14.50
2437 (Ch.6)	-16.83	TUVR03/21	8.5	-8.33	+8.00	16.33
2462 (Ch.11)	-15.83	TUVR03/24	8.5	-7.33	+8.00	15.33



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 19 of 72

Specification

Limits

Transmitter Power Spectral Density	dBm
	<= +8.0

Measurement Uncertainty Spectral Density

Measurement uncertainty (dB)	±1.33
------------------------------	-------

Traceability

METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-01	Bar 1, RVA 01, K-CBL 8, K-CBL 10, S-Anlr 1


Note 1: The unit was tested in Tx, Rx and Standby modes simultaneously

4.2.1.5 AC Wireline Conducted Emissions (150KHz – 30MHz)

Test Procedure

The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Setup

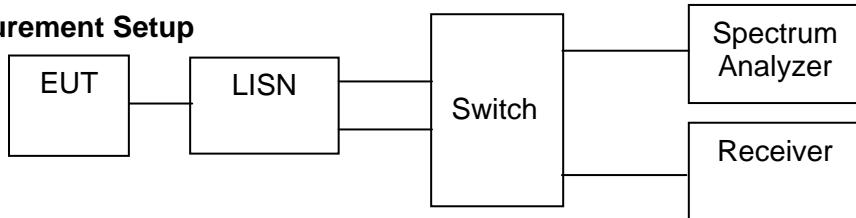

Measurement Results for AC Wireline Conducted Emissions (150KHz – 30MHz)

The EUT was found to comply to the limits of FCC Part 15, Subpart C and RSS-210 with a margin of 37.251dB. The six highest emissions relative to the limit are reported for two modes of operation. Spectrum analyzer pre-scan data plots are held in the laboratory for reference purposes.

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Test date: 11th May '04

EUT MOBILE IPTOUCH 300 LINE - LIVE

Frequency (MHz)	Peak Voltage (dB μ V)	Average Voltage (dB μ V)	Average Limit (dB μ V)	Margin (dB)
0.278	51.766	13.089	50.875	-37.786
0.314	51.097	12.113	49.864	-37.751
0.346	51.632	11.690	49.058	-37.368
0.398	48.175	10.644	47.895	-37.251
0.494	47.782	8.801	46.100	-37.299
0.502	47.390	8.631	46.000	-37.369



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 21 of 72

EUT MOBILE IPTOUCH 300 LINE - NEUTRAL

Frequency (MHz)	Peak Voltage (dB μ V)	Average Voltage (dB μ V)	Average Limit (dB μ V)	Margin (dB)
0.270	51.898	12.810	50.596	-37.786
0.330	48.439	11.674	49.425	-37.751
0.354	46.444	11.199	48.567	-37.368
0.374	47.912	10.693	47.944	-37.251
0.382	48.439	10.524	47.823	-37.299
0.434	44.463	9.623	46.992	-37.369

Photographs of the test setup are provided in Section 5.1 'AC WIRELINE CONDUCTED EMISSION TEST SETUP'

Specification

Measurement Uncertainty Spectral Density

Measurement uncertainty (dB)	±2.64
------------------------------	-------

Traceability


METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-EMC-01	Bar 1, LMT1, 15F50B001, 15F50B002, LISN1, ReCVR1

4.2.1.6 Restricted Bands Radiation (30MHz – 1GHz)

Test Procedure

Preliminary radiated emissions are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarity. The emissions are recorded with a spectrum analyzer in peak hold mode. A notch filter was used to remove the fundamental frequency, see Notch Filter Response plots 38-41 in Section 6, Graphical Results. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz on the Open Area Test Site (OATS). The highest emissions relative to the limit are listed. A photograph of the product tested at the OATS site is available, see Section 5.2.

Test Measurement Setup

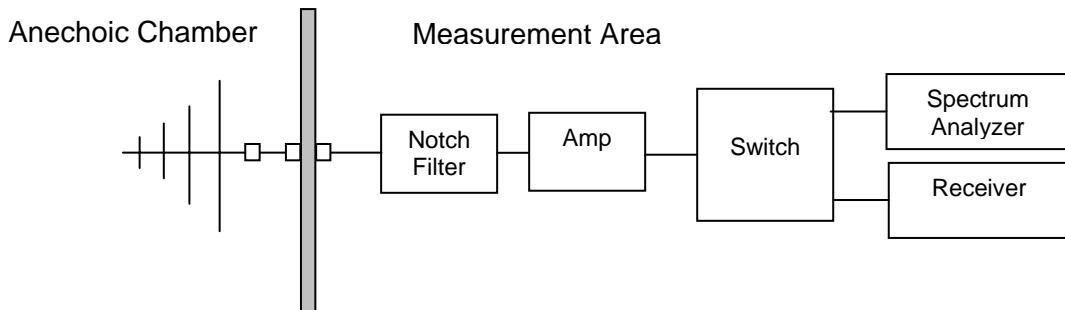

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB, Cable Loss of 1.3dB, an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3dB\mu V/m$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 \% \text{ Log (Level (\mu V/m))}$$

$$40dB\mu V/m = 100\mu V/m$$

$$48dB\mu V/m = 250\mu V/m.$$

Measurement Results for Restricted Bands Radiation (30MHz – 1GHz)

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Test date: Pre-scans 25th/26th January '03 and OATS 7th February '03

EUT MOBILE IPTOUCH 300, Ch 1 (2,412MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (QP)	Limit (dB μ V/m) (QP)	Field Strength (μ V/m) (QP)	Limit (μ V/m) (QP)
210.99	V	9.90	9.20	15.9	17.34	26.54	43.5	21.23	150
307.98	H	9.97	8.37	14.1	16.07	24.44	46.0	16.67	200
307.98	V	21.23	19.51	14.5	16.47	35.98	46.0	62.95	200
351.99	V	17.60	14.89	15.3	17.43	32.32	46.0	41.30	200
373.99	V	16.38	13.34	15.8	17.93	31.27	46.0	36.60	200
571.99	V	15.50	12.57	19.1	22.00	34.57	46.0	53.52	200
835.99	V	14.54	14.17	21.6	25.57	39.74	46.0	97.05	200

EUT MOBILE IPTOUCH 300, Ch 6 (2,437MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (QP)	Limit (dB μ V/m) (QP)	Field Strength (μ V/m) (QP)	Limit (μ V/m) (QP)
263.99	V	15.57	12.50	12.9	14.57	27.07	46.0	22.57	200
308.00	V	20.86	19.53	14.1	16.07	35.60	46.0	60.26	200
352.00	V	17.46	14.91	15.3	17.43	32.34	46.0	41.40	200
374.00	V	16.22	13.63	15.8	17.93	31.56	46.0	37.84	200
395.98	V	17.27	14.41	16.6	18.86	33.27	46.0	46.08	200
572.00	V	15.73	11.58	19.1	22.00	33.58	46.0	47.75	200

EUT MOBILE IPTOUCH 300, Ch 11 (2,462MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (QP)	Limit (dB μ V/m) (QP)	Field Strength (μ V/m) (QP)	Limit (μ V/m) (QP)
264.00	V	16.10	12.90	12.9	14.57	27.47	46.0	23.63	200
308.00	V	20.12	19.18	14.1	16.07	35.25	46.0	57.88	200
351.96	V	16.77	14.88	15.3	17.43	32.31	46.0	41.26	200
373.98	V	16.50	13.70	15.8	17.93	31.63	46.0	38.15	200
395.99	V	18.43	15.57	16.6	18.86	34.43	46.0	52.66	200
571.99	V	14.66	11.37	19.1	22.00	33.37	46.0	46.61	200



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 24 of 72

EUT MOBILE IPTOUCH 300, Ch 6 (2,437MHz), Receive Mode 1Mbit/s

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (QP)	Limit (dB μ V/m) (QP)	Field Strength (μ V/m) (QP)	Limit (μ V/m) (QP)
219.99	V	11.3	9.9	16.3	17.74	27.64	46.0	24.10	200
307.99	V	22.24	19.17	14.1	16.07	35.24	46.0	57.81	200
373.98	V	17.34	13.48	15.8	17.93	31.41	46.0	37.20	200
396.02	V	19.08	17.44	16.6	18.86	36.3	46.0	65.31	200
571.99	V	15.48	13.01	19.1	22.0	35.01	46.0	56.30	200
593.98	V	15.17	10.12	19.5	22.39	32.51	46.0	42.22	200

Follow-up Test Program 26th – 28th May '04

Follow-up testing performed with two separate types of headset, worst case emissions are reported. No apparent difference in emission strength was observed between different headset types.

EUT MOBILE IPTOUCH 300, Ch 1 (2,412MHz), Tx/Rx/Standby Mode 1Mbit/s (with headset)

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V) (Peak)	Limit (dB μ V/m) (QP)	Field Strength (μ V/m) (Peak)	Limit (μ V/m) (QP)
132.00	V	22.90	-	7.59	1.00	29.49	43.5	29.81	150
176.00	V	25.37	-	8.52	1.20	32.69	43.5	43.10	150
220.00	V	24.09	-	10.03	1.40	32.72	46.0	43.25	200
220.00	H	20.38	-	10.03	1.40	29.01	46.0	28.22	200
352.00	H	18.20	-	14.49	1.80	30.89	46.0	35.03	200
396.00	V	19.88	-	16.04	2.00	33.92	46.0	49.66	200

EUT MOBILE IPTOUCH 300, Ch 6 (2,437MHz), Tx/Rx/Standby Mode 1Mbit/s (with headset)

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (Peak)	Limit (dB μ V/m) (QP)	Field Strength (μ V/m) (Peak)	Limit (μ V/m) (QP)
132.00	V	22.62	-	7.59	1.00	29.21	43.5	28.87	150
176.00	V	25.25	-	8.52	1.20	32.57	43.5	42.51	150
220.00	V	23.44	-	10.03	1.40	32.07	46.0	40.13	200
220.00	H	19.10	-	10.03	1.40	27.73	46.0	24.35	200
264.00	H	19.10	-	12.12	1.60	29.62	46.0	30.27	200
352.00	V	20.25	-	14.49	1.80	32.94	46.0	44.36	200



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 25 of 72

EUT MOBILE IPTOUCH 300, Ch 11 (2,462MHz), Tx/Rx/Standby Mode 1Mbit/s (with headset)

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (Peak)	Limit (dB μ V/m) (QP)	Field Strength (μ V/m) (Peak)	Limit (μ V/m) (QP)
132.00	V	20.20	-	7.59	1.00	26.79	43.5	21.85	150
176.00	V	25.74	-	8.52	1.20	33.06	43.5	44.98	150
220.00	V	24.87	-	10.03	1.40	33.50	46.0	47.32	200
220.00	H	19.49	-	10.03	1.40	28.12	46.0	25.47	200
264.00	H	18.59	-	12.12	1.60	29.11	46.0	28.54	200
352.00	V	20.13	-	14.49	1.80	32.82	46.0	43.75	200

EUT MOBILE IPTOUCH 300, Ch 6 (2,437MHz), Receive Mode 1Mbit/s (with headset)

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (Peak)	Limit (dB μ V/m) (QP)	Field Strength (μ V/m) (Peak)	Limit (μ V/m) (QP)
132.00	V	22.62	-	7.59	1.00	29.21	43.5	28.87	150
176.00	V	26.88	-	8.52	1.20	34.20	43.5	51.29	150
220.00	V	24.48	-	10.03	1.40	33.11	46.0	45.24	200
220.00	H	21.79	-	10.03	1.40	30.42	46.0	33.19	200
264.00	H	19.23	-	12.12	1.60	29.75	46.0	30.73	200
352.00	V	19.62	-	14.49	1.80	32.31	46.0	41.26	200

Measurement Uncertainty Radiated Emissions

Measurement uncertainty (dB)	+5.6 / -4.5
------------------------------	-------------

Traceability


METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-EMC-07	Bar 1, Notch, AMP 3, ANT 1, K-Cbl 11, 10F50N003, 15F50N001, 5F50N001, ReCVR1, SSwpr 1, PSnsr 3

4.2.1.7 Restricted Bands Radiation (1GHz-25GHz)

Test Procedure

Radiated emissions were measured in the frequency range 1GHz to 25GHz in transmitting mode and 1GHz to 12.5GHz in receiving mode. All tests were performed in the anechoic chamber at a 1-meter distance on both horizontal and vertical polarities and extrapolated to 3m. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of azimuth by rotation through 360°. The six highest emissions relative to the limit are listed. A notch filter was used to remove the fundamental frequency, see Notch Filter Response plots 38-41 in Section 6, Graphical Results. After notch filter cut-off waveguide were utilized as high-pass filters from 12.75-25GHz. Frequencies not covered by the 'Restricted Bands of Operation' are compared to the fundamental carrier per 47 CFR 15.247(c).

Test Measurement Setup

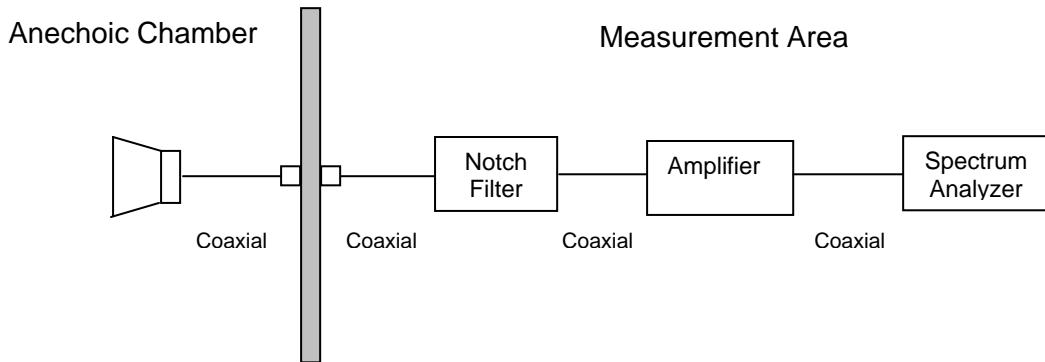

Measurement setup for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 \% \text{ Log (Level (\mu V/m))}$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m.}$$

Measurement Results for Restricted Bands Radiation (1GHz - 25GHz)

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Test date: 25th/26th January '03

Results for Variant MOBILE IPTOUCH 300

EUT MOBILE IPTOUCH 300, Ch 1 (2,412MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC/IC Limit (dB μ V/m)	Field Strength (dB μ V/m) (average)	NRB/OB*
1.013	V	38.4	-	24.9	-27.0	36.30	54.0	-	-
2.244	V	39.8	-	30.0	-22.44	47.36	54.0	-	-
2.266	V	38.9	-	30.0	-22.44	46.46	54.0	-	-
4.824	V	37.5	-	33.7	-16.38	53.88	54.0	-	-
2.038	H	39.0	-	29.1	-24.38	43.72	54.0	-	-
2.244	H	36.3	-	30.0	-22.44	43.86	54.0	-	-
2,412	V	60.67	-	30.7	8.0	99.37	OB*	-	OB*
2,412	H	63.33	-	30.7	8.0	102.03	OB*	-	OB*

EUT MOBILE IPTOUCH 300, Ch 6 (2,437MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC/IC Limit (dB μ V/m)	Field Strength (dB μ V/m) (average)	NRB/OB*
1.013	V	39.5	-	24.9	-27.0	37.4	54.0	-	-
2.063	V	42.3	-	28.9	-24.38	46.82	54.0	-	-
2.244	V	38.7	-	30.0	-22.44	46.26	54.0	-	-
2.063	H	43.0	-	29.1	-24.38	47.72	54.0	-	-
2.223	H	38.9	-	30.0	-22.44	46.46	54.0	-	-
2.244	H	40.9	-	30.0	-22.44	48.46	54.0	-	-
2.437	V	57.5	-	30.7	8.0	96.2	OB*	-	OB*
2.437	H	61.17	-	30.7	8.0	99.87	OB*	-	OB*



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 28 of 72

EUT MOBILE IPTOUCH 300, Ch 11 (2,462MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC/IC Limit (dB μ V/m)	Field Strength (dB μ V/m) (average)	NRB/OB*
1.012	V	40.8	-	24.9	-27.00	38.70	54.0	-	-
1.496	V	39.4	-	26.7	-26.17	40.08	54.0	-	-
1.503	V	39.2	-	26.7	-25.94	39.96	54.0	-	-
2.088	V	45.2	-	28.9	-24.38	49.72	-	-	NRB*
2.088	H	43.3	-	29.1	-24.38	48.12	-	-	NRB*
2.245	H	40.2	-	30.0	-22.44	47.76	54.0	-	-
2.462	V	63.0	-	30.7	8.0	101.70	OB*	-	OB*
2.462	H	59.7	-	30.7	8.0	98.37	OB*	-	OB*

EUT MOBILE IPTOUCH 300, Ch 6 (2,437MHz), Receive Mode 1Mbit/s

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC/IC Limit (dB μ V/m)	Field Strength (dB μ V/m) (average)	NRB/OB*
1.012	V	34.8	-	24.9	-27.0	32.7	54.0	-	-
1.056	V	30.5	-	24.9	-27.0	28.4	54.0	-	-
1.144	V	31.5	-	25.3	-27.22	29.58	54.0	-	-
1.364	V	30.2	-	25.7	-26.57	29.33	54.0	-	-
1.497	V	30.0	-	26.7	-26.02	30.68	54.0	-	-
1.540	V	31.0	-	26.7	-25.94	31.76	54.0	-	-

Follow-up Test Program 26th – 28th May '04

Follow-up testing performed with two separate types of headset, worst case emissions are reported. No apparent difference in emission strength was observed between different headset types.

EUT MOBILE IPTOUCH 300, Ch 1 (2,412MHz), Tx/Rx/Standby Mode 1Mbit/s (with headset)

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC/IC Limit (dB μ V/m)	Field Strength (dB μ V/m) (average)	NRB/OB*
4.824	H	43.1	-	35.1	-30.4	47.80	54.0	-	-
4.824	V	43.2	-	34.9	-30.4	47.70	54.0	-	-
2.412	V	60.67	-	30.7	8.0	99.37	OB*	-	OB*
2.412	H	63.33	-	30.7	8.0	102.03	OB*	-	OB*

*Apart from the second harmonic of the fundamental frequency no additional spurious were observed



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 29 of 72

EUT MOBILE IPTOUCH 300, Ch 6 (2,437MHz), Tx/Rx/Standby Mode 1Mbit/s (with headset)

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC/IC Limit (dB μ V/m)	Field Strength (dB μ V/m) (average)	NRB/OB*
4.874	H	44.02	-	35.1	-30.80	48.32	54.0	-	
4.874	V	42.50	-	34.9	-30.80	46.60	54.0	-	-
2.437	V	57.5	-	30.7	8.0	96.2	OB*	-	OB*
2.437	H	61.17	-	30.7	8.0	99.87	OB*	-	OB*

*Apart from the second harmonic of the fundamental frequency no additional spurious were observed

EUT MOBILE IPTOUCH 300, Ch 11 (2,462MHz), Tx/Rx/Standby Mode 1Mbit/s (with headset)

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC/IC Limit (dB μ V/m)	Field Strength (dB μ V/m) (average)	NRB/OB*
4.924	H	44.90	-	35.1	-30.60	49.40	54.0	-	-
4.924	V	43.50	-	34.9	-30.60	47.80	54.0	-	-
2.462	V	63.0	-	30.7	8.0	101.70	OB*	-	OB*
2.462	H	59.7	-	30.7	8.0	98.37	OB*	-	OB*

*Apart from the second harmonic of the fundamental frequency no additional spurious were observed

EUT MOBILE IPTOUCH 300, Ch 6 (2,437MHz), Receive Mode 1Mbit/s (with headset)

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC/IC Limit (dB μ V/m)	Field Strength (dB μ V/m) (average)	NRB/OB*

*No emissions observed on receive channel

***Note:** OB implies Operational Band (2,400 2,462MHz); in this case the limit +20dBm was measured with a power meter

NRB implies "Non Restricted Bands of Operation"

Frequencies not covered by the 'Restricted Bands of Operation' are compared to the fundamental carrier per 47 CFR 15.247(c). 'OB' – Operational Band in the matrix identifies the fundamental carrier.

The Notch Filter Response plots 38-41 are available in Section 6, Graphical Results



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 30 of 72

Measurement Uncertainty Radiated Emissions


Measurement uncertainty (dB)	+5.6/ -4.5
------------------------------	------------

Traceability


METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-EMC-07	Bar 1, Notch, AMP 3, ANT 1, K-Cbl 11, 10F50N003, 15F50N001, 5F50N001, ReCVR1, SSwpr 1, Pmtr 1, PSnsr 3

5 Photographs

5.1 AC WIRELINE CONDUCTED EMISSION TEST SETUP

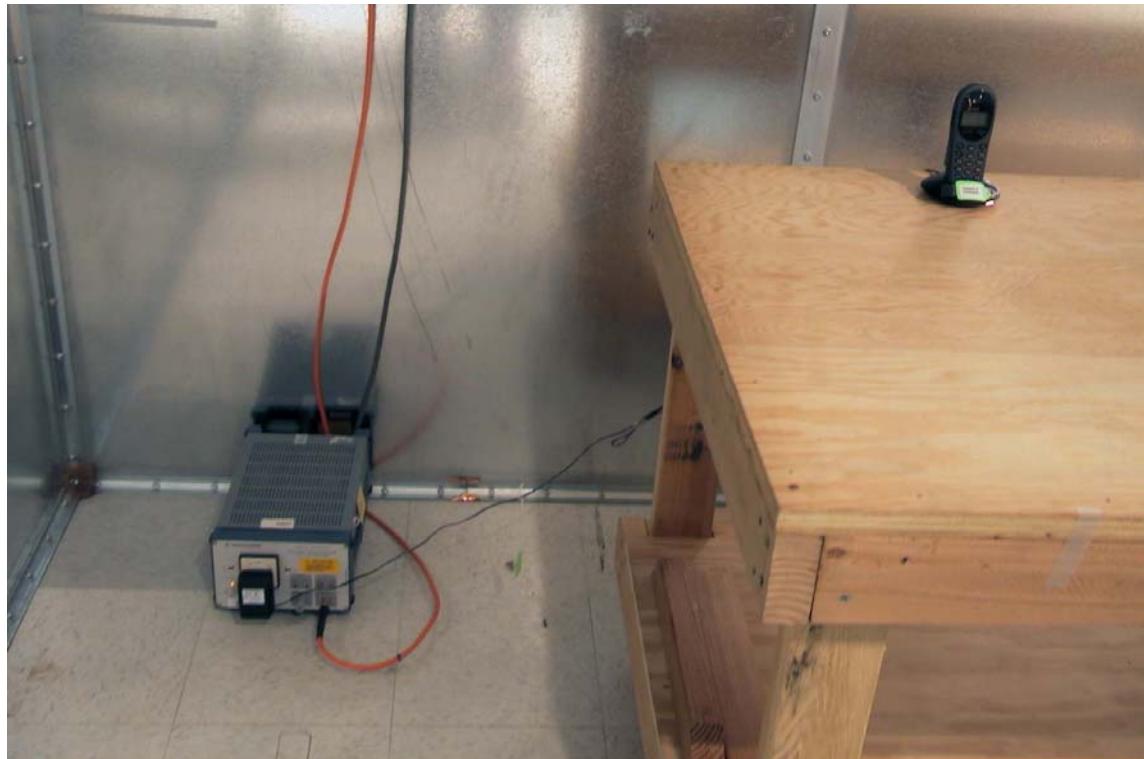

5.2 RESTRICTED BANDS RADIATION (30MHz – 1GHz)

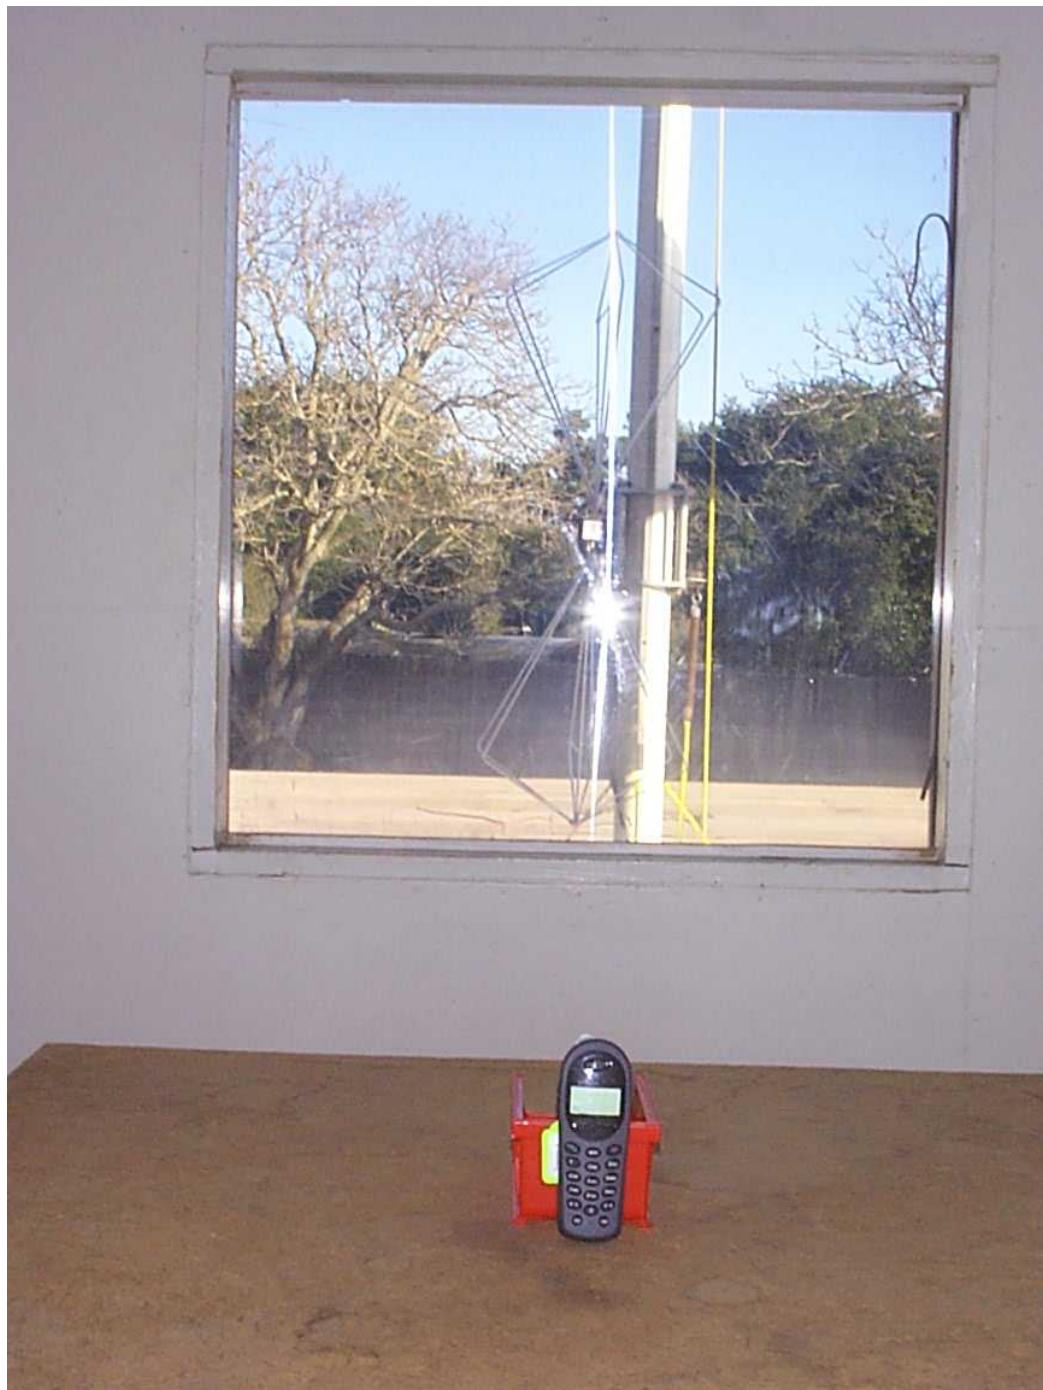


5.3 MOBILE IPTOUCH 300 with Headsets





6 Graphical Results


This report contains the following plots as referenced in the test results section


BANDWIDTH AT 6dB	BAND-EDGE
TUVR03/01	TUVR03A-AL/10
TUVR03/02	TUVR03A-AL/11
TUVR03A-AL/03	TUVR03A-AL/12
TUVR03A-AL/04	TUVR03A-AL/13
TUVR03A-AL/05	TUVR03A-AL/14
TUVR03A-AL/06	TUVR03A-AL/15
TUVR03A-AL/07	
TUVR03A-AL/08	
TUVR03A-AL/09	
SPECTRAL POWER DENSITY	OCCUPIED BANDWIDTH 20dB
TUVR03A-AL/16	TUVR03A-AL/25
TUVR03A-AL/17	TUVR03A-AL/26
TUVR03A-AL/18	TUVR03A-AL/27
TUVR03A-AL/19	TUVR03A-AL/28
TUVR03A-AL/20	TUVR03A-AL/29
TUVR03A-AL/21	TUVR03A-AL/30
TUVR03A-AL/22	TUVR03A-AL/31
TUVR03A-AL/23	TUVR03A-AL/32
TUVR03A-AL/24	TUVR03A-AL/33
CONDUCTED EMISSIONS	NOTCH FILTER RESPONSE
TUVR03A-AL/34	TUVR03A-AL/38
TUVR03A-AL/35	TUVR03A-AL/39
TUVR03A-AL/36	TUVR03A-AL/40
TUVR03A-AL/37	TUVR03A-AL/41

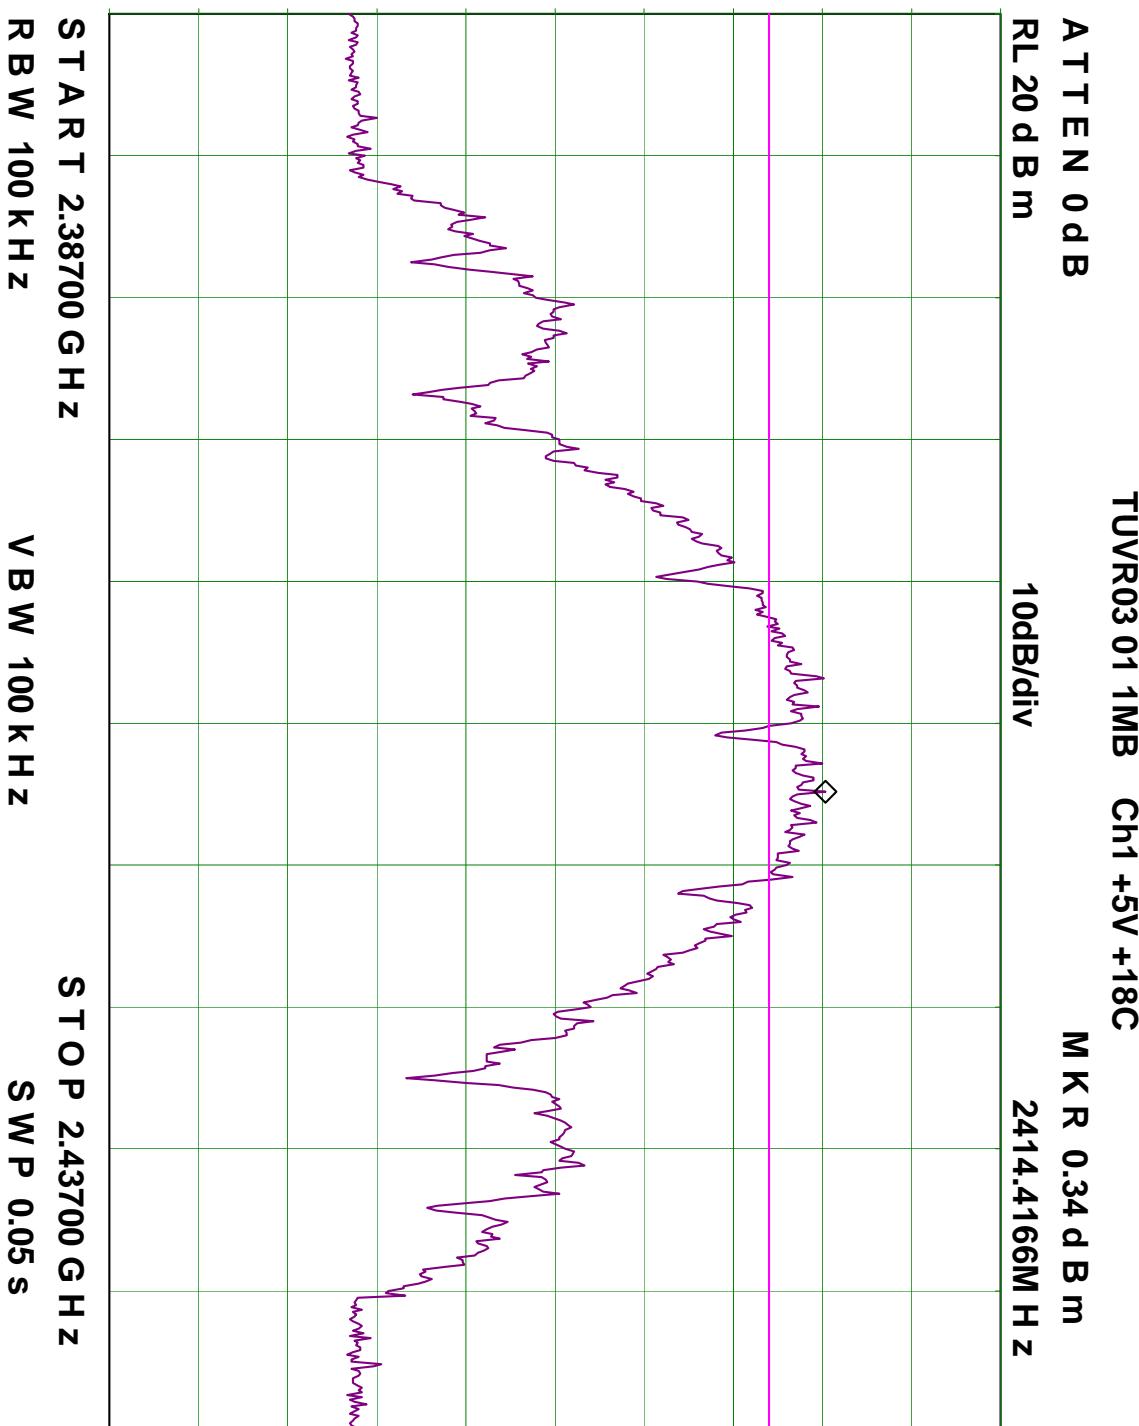


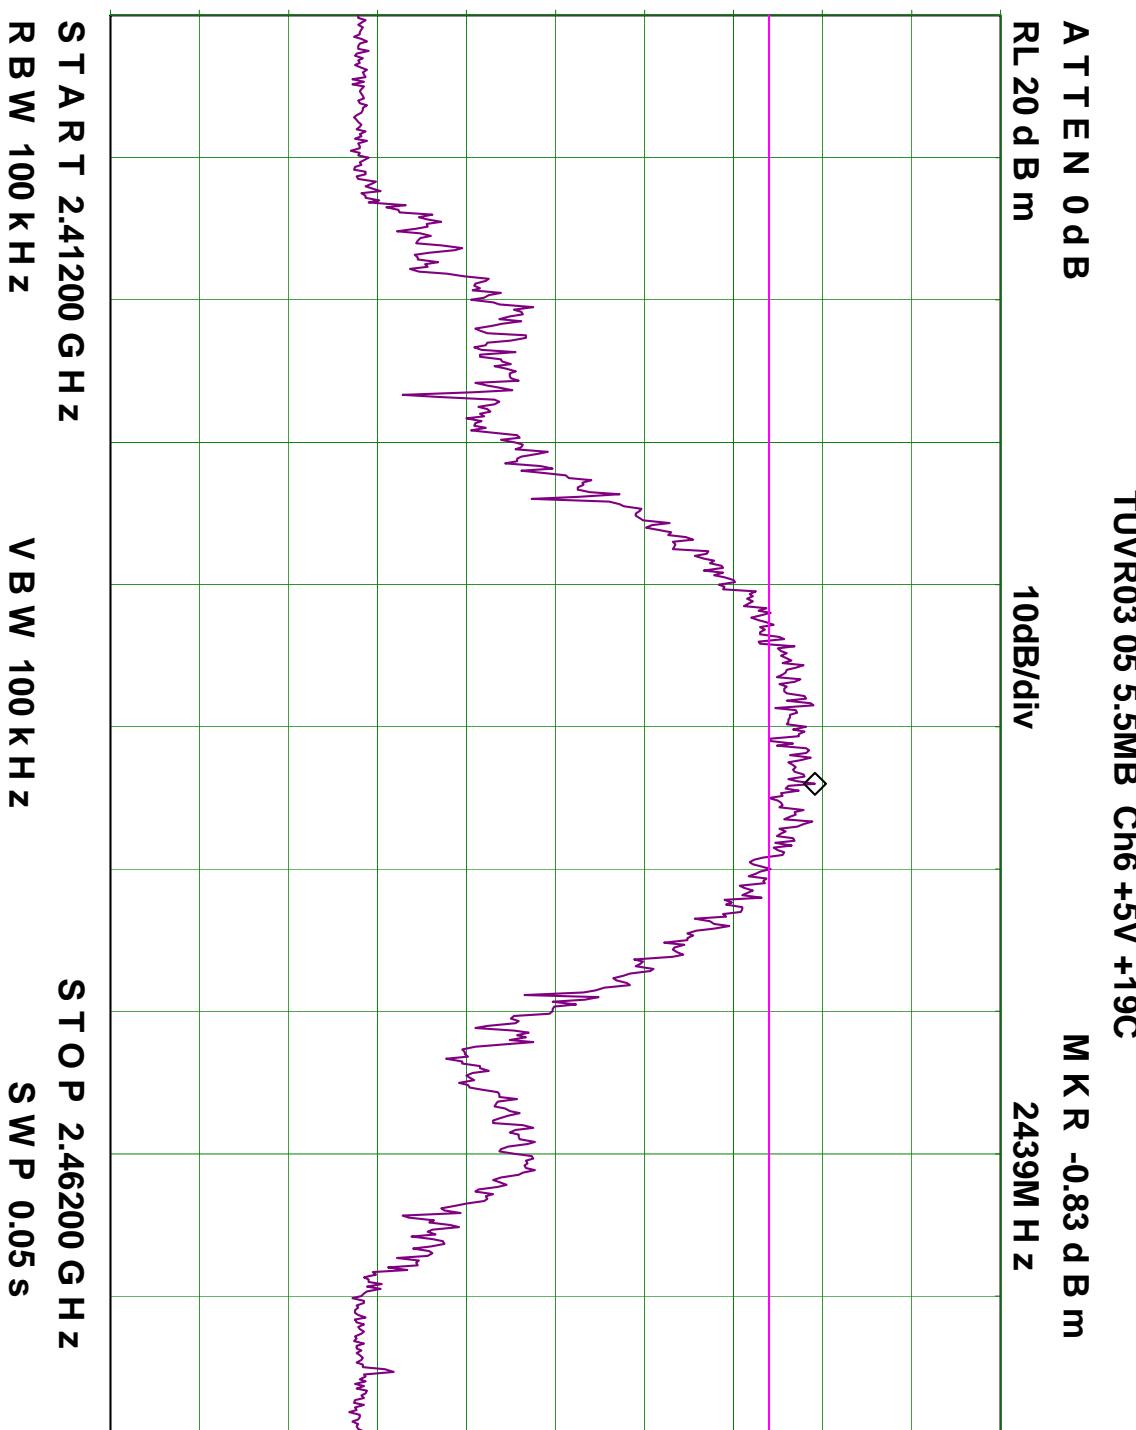


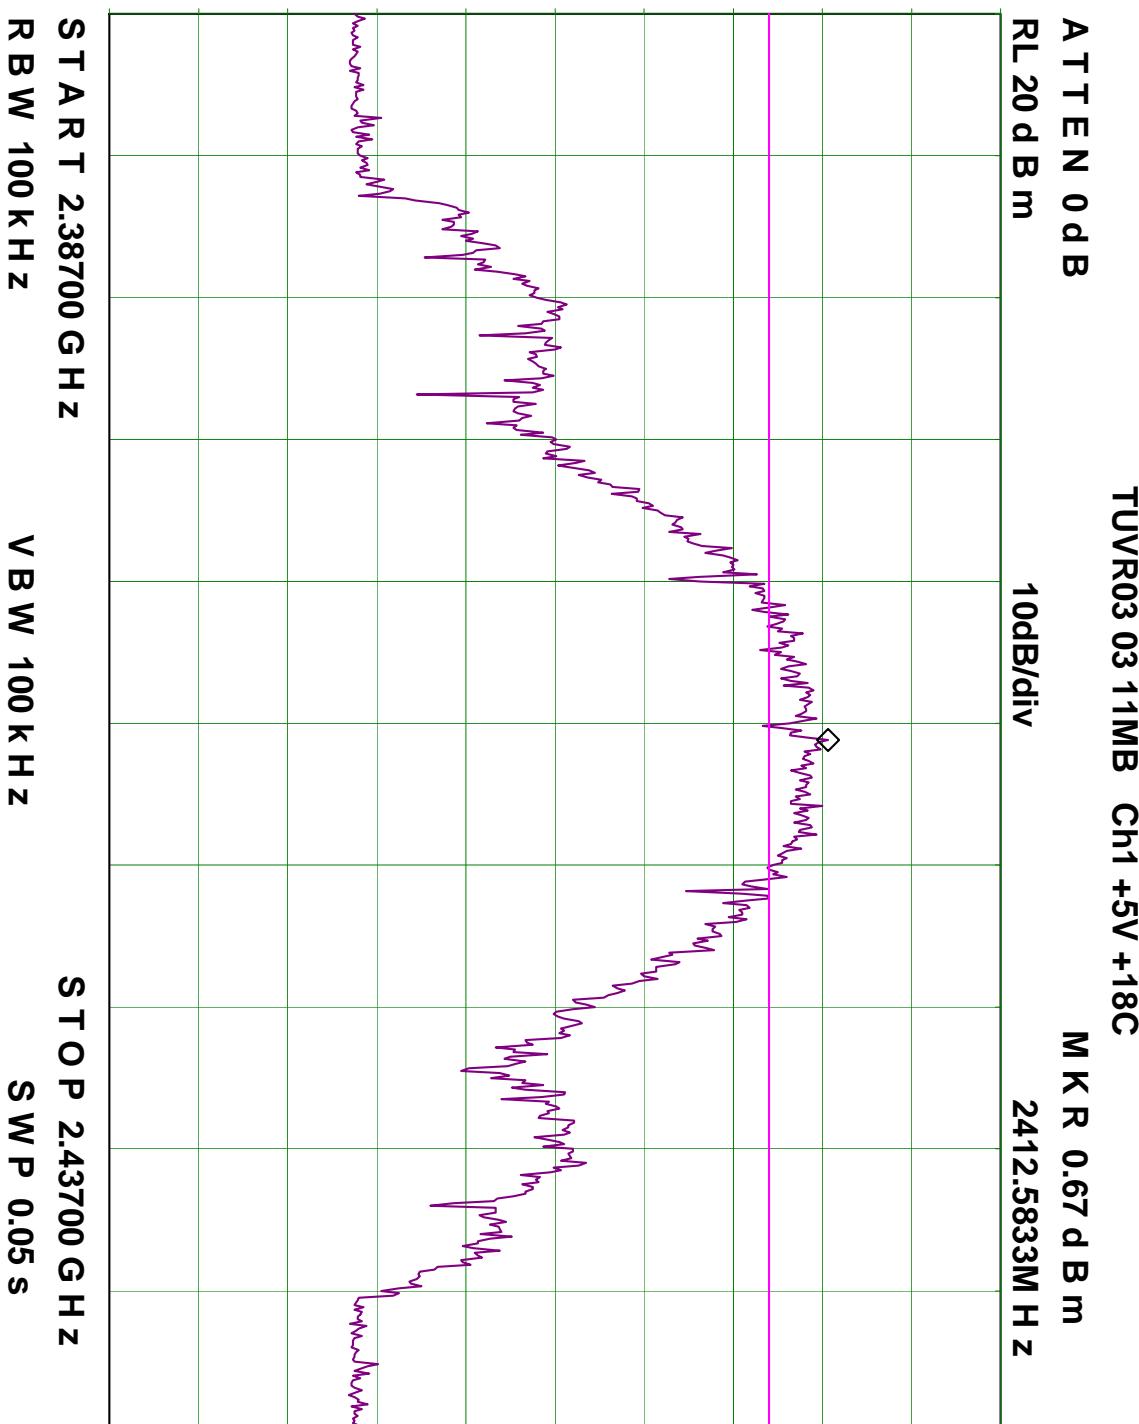


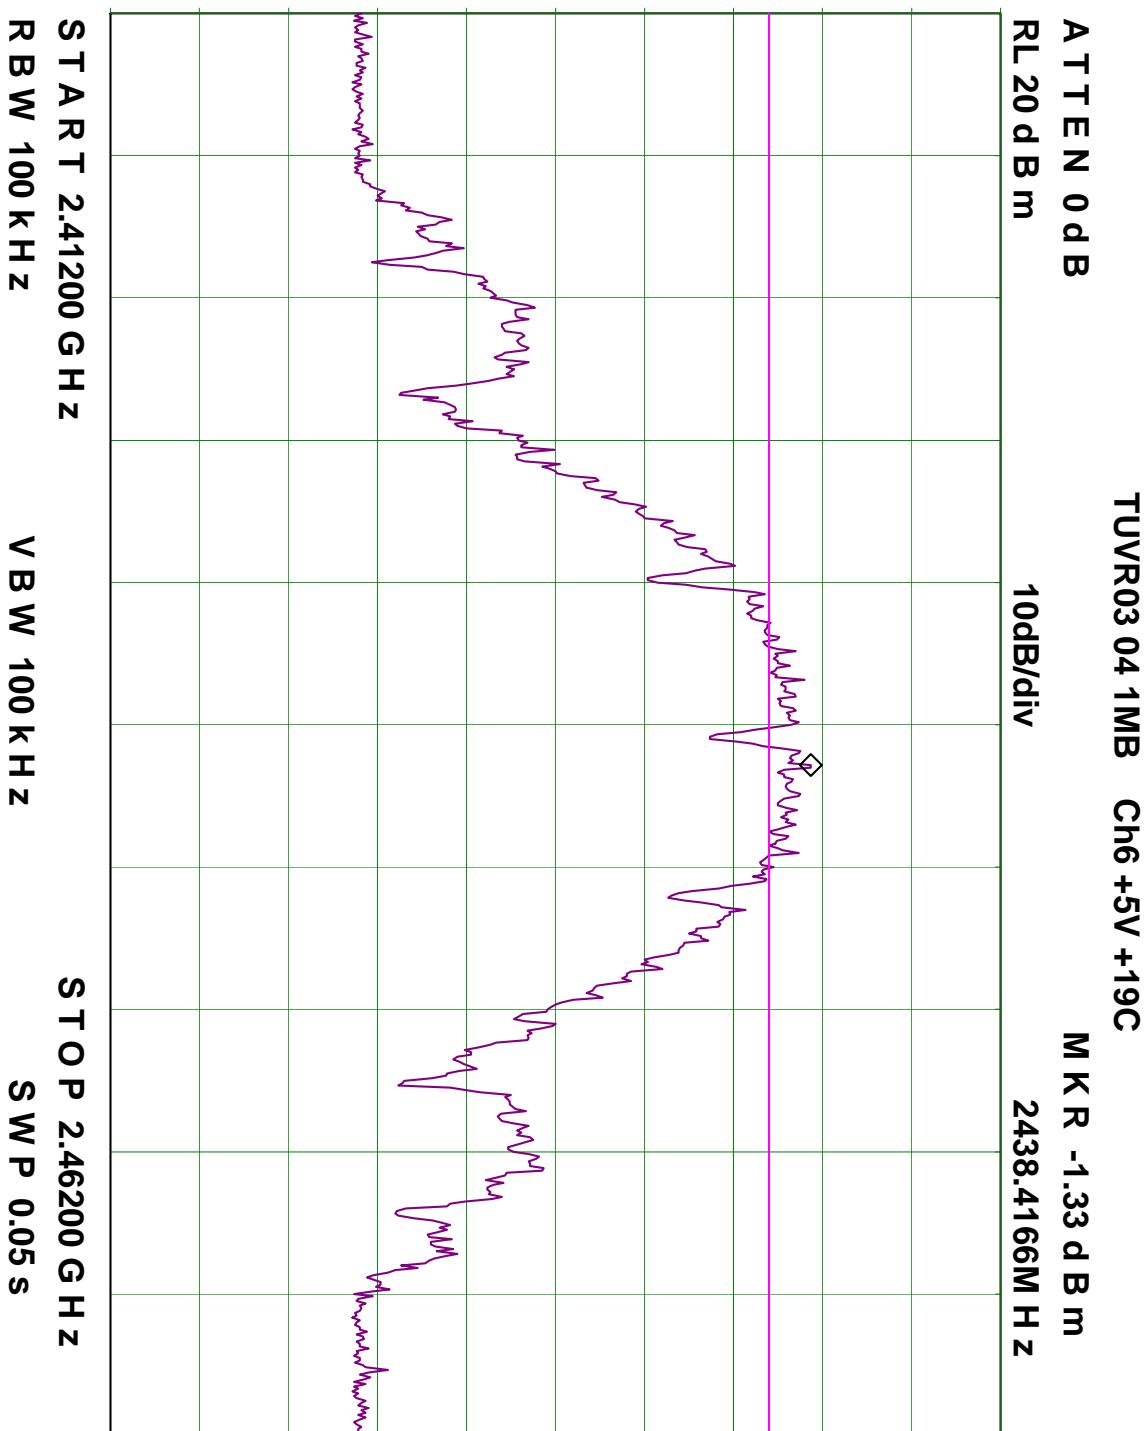


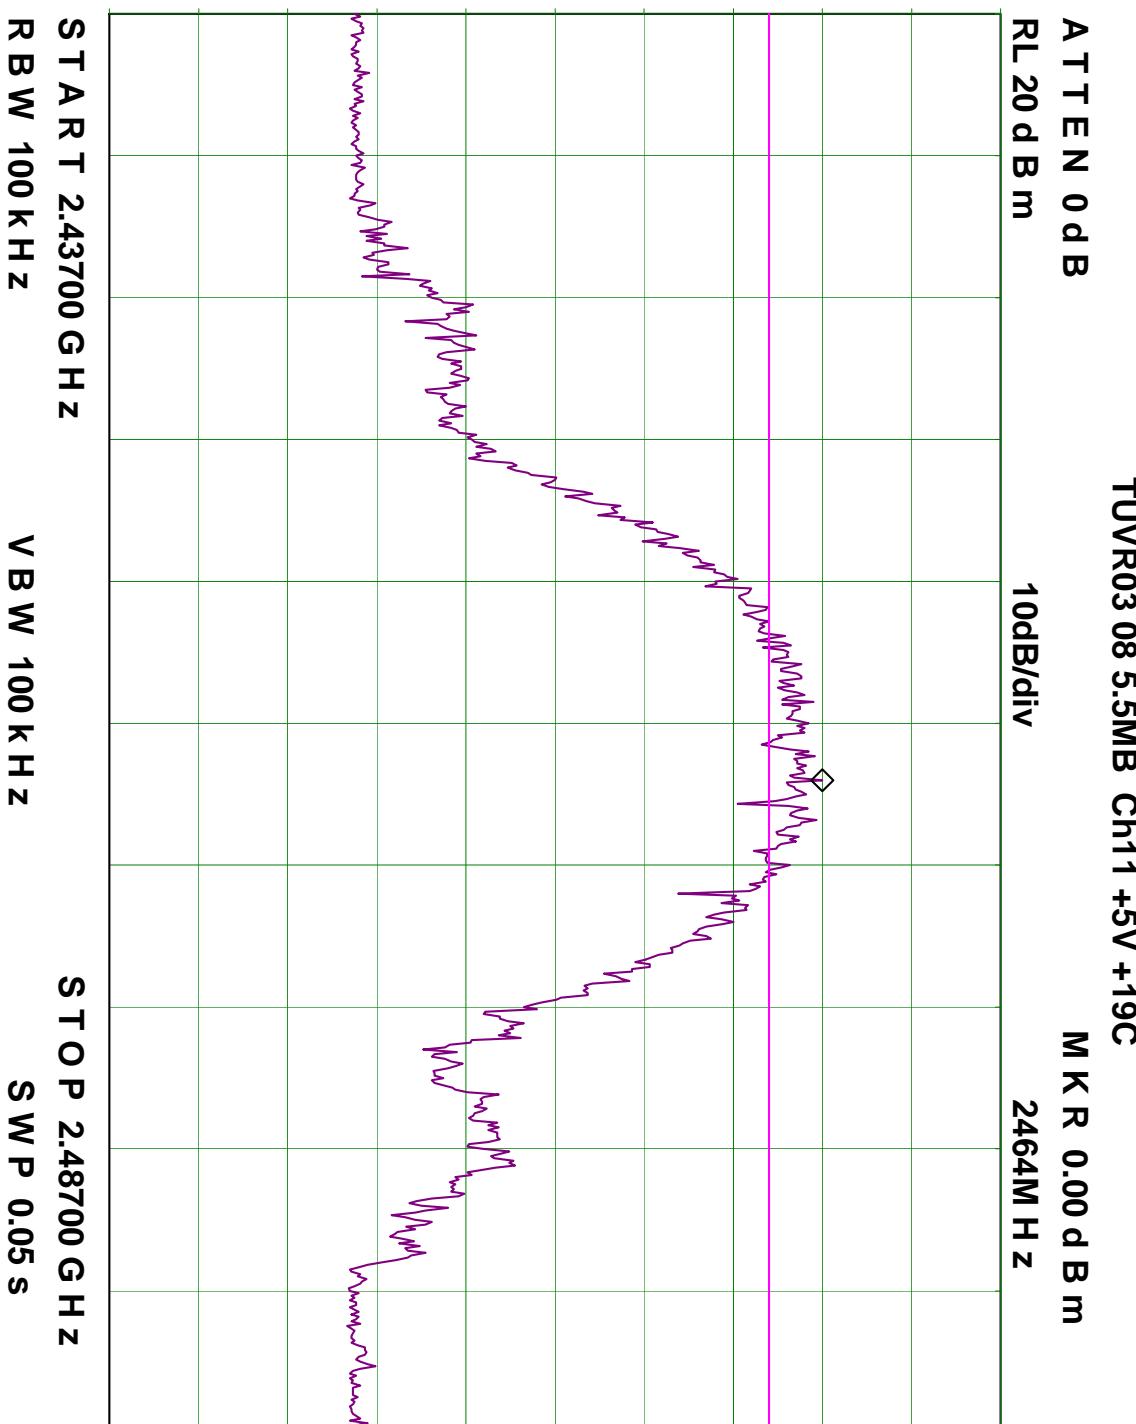


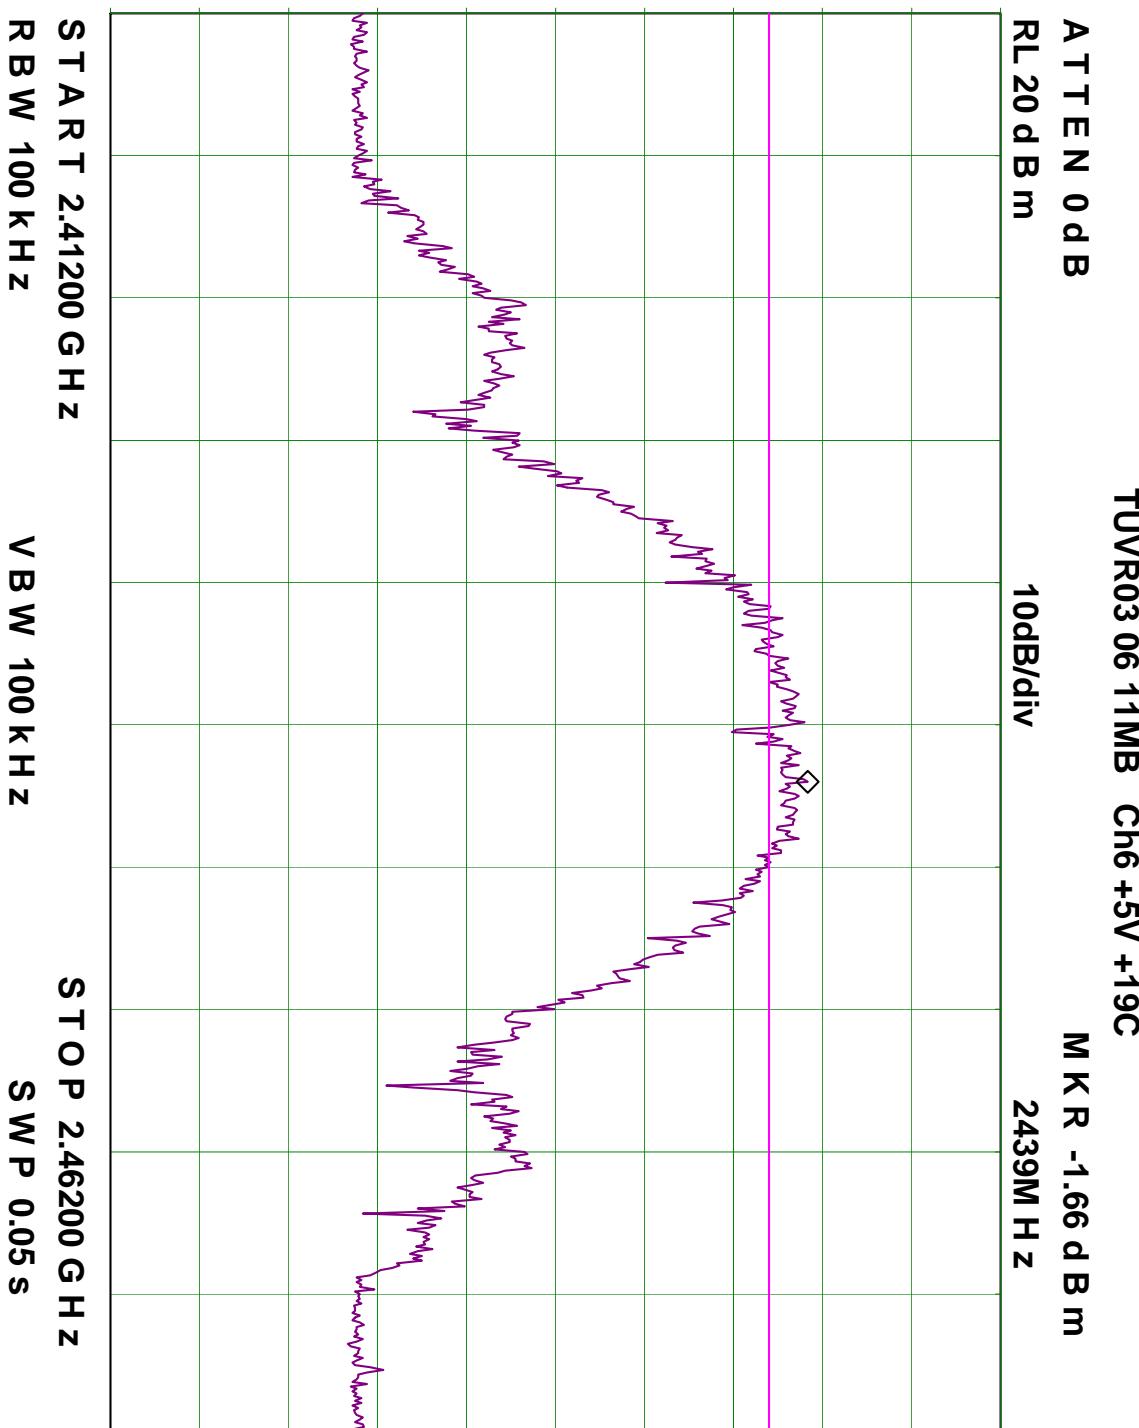


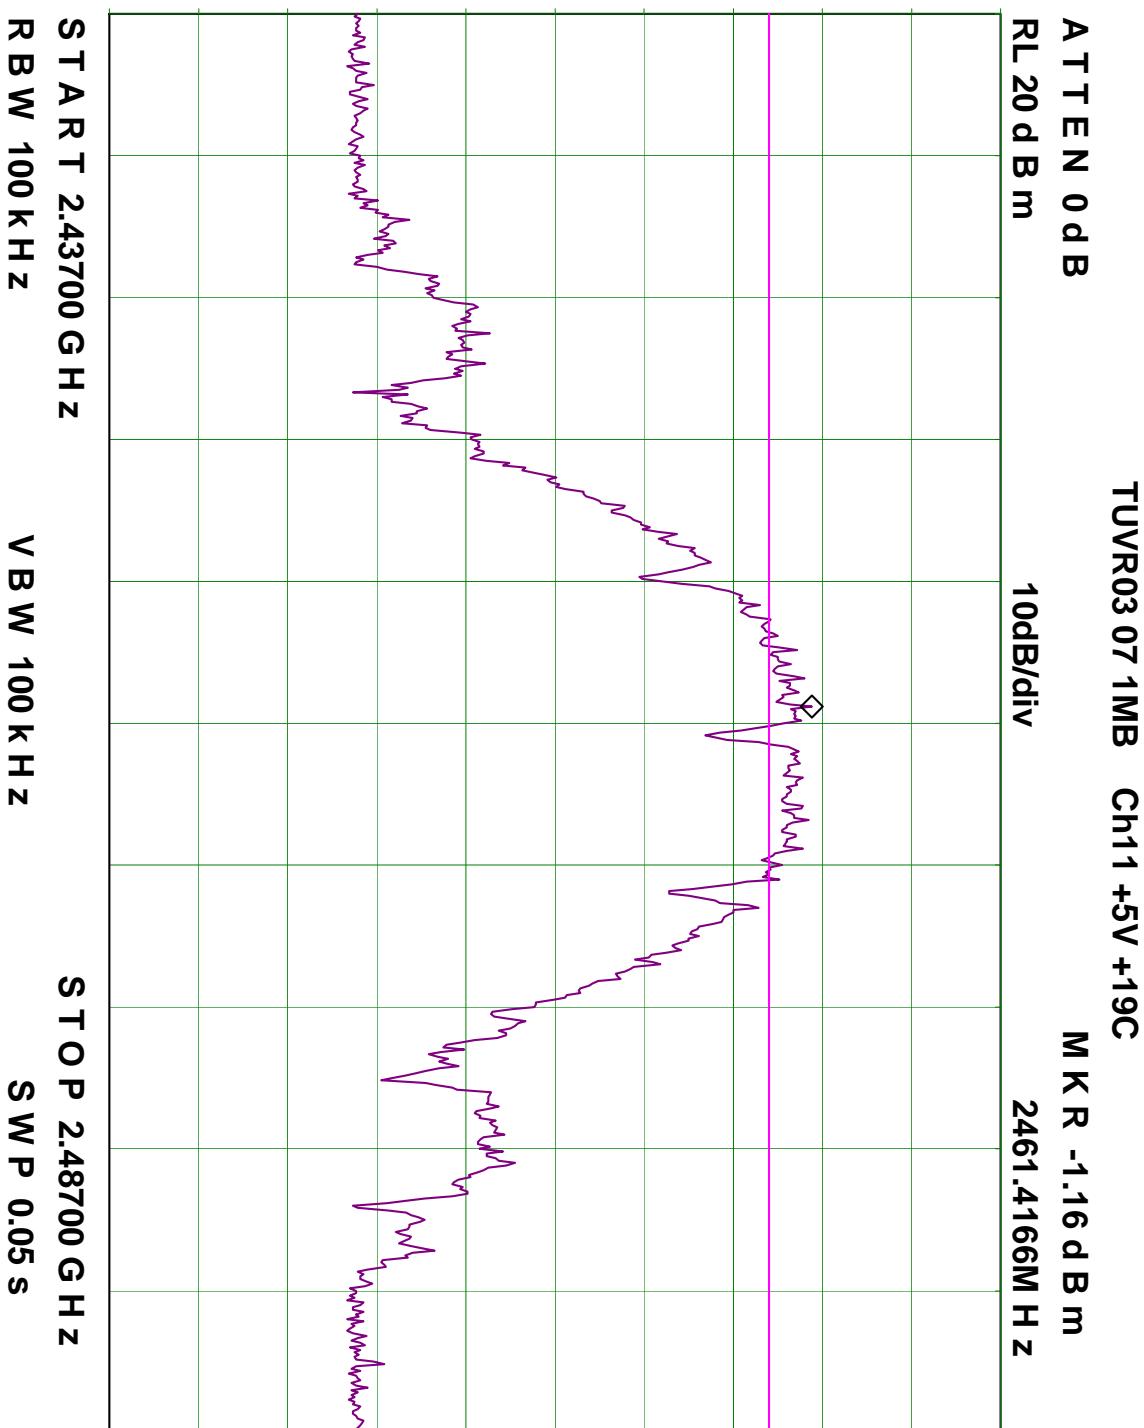


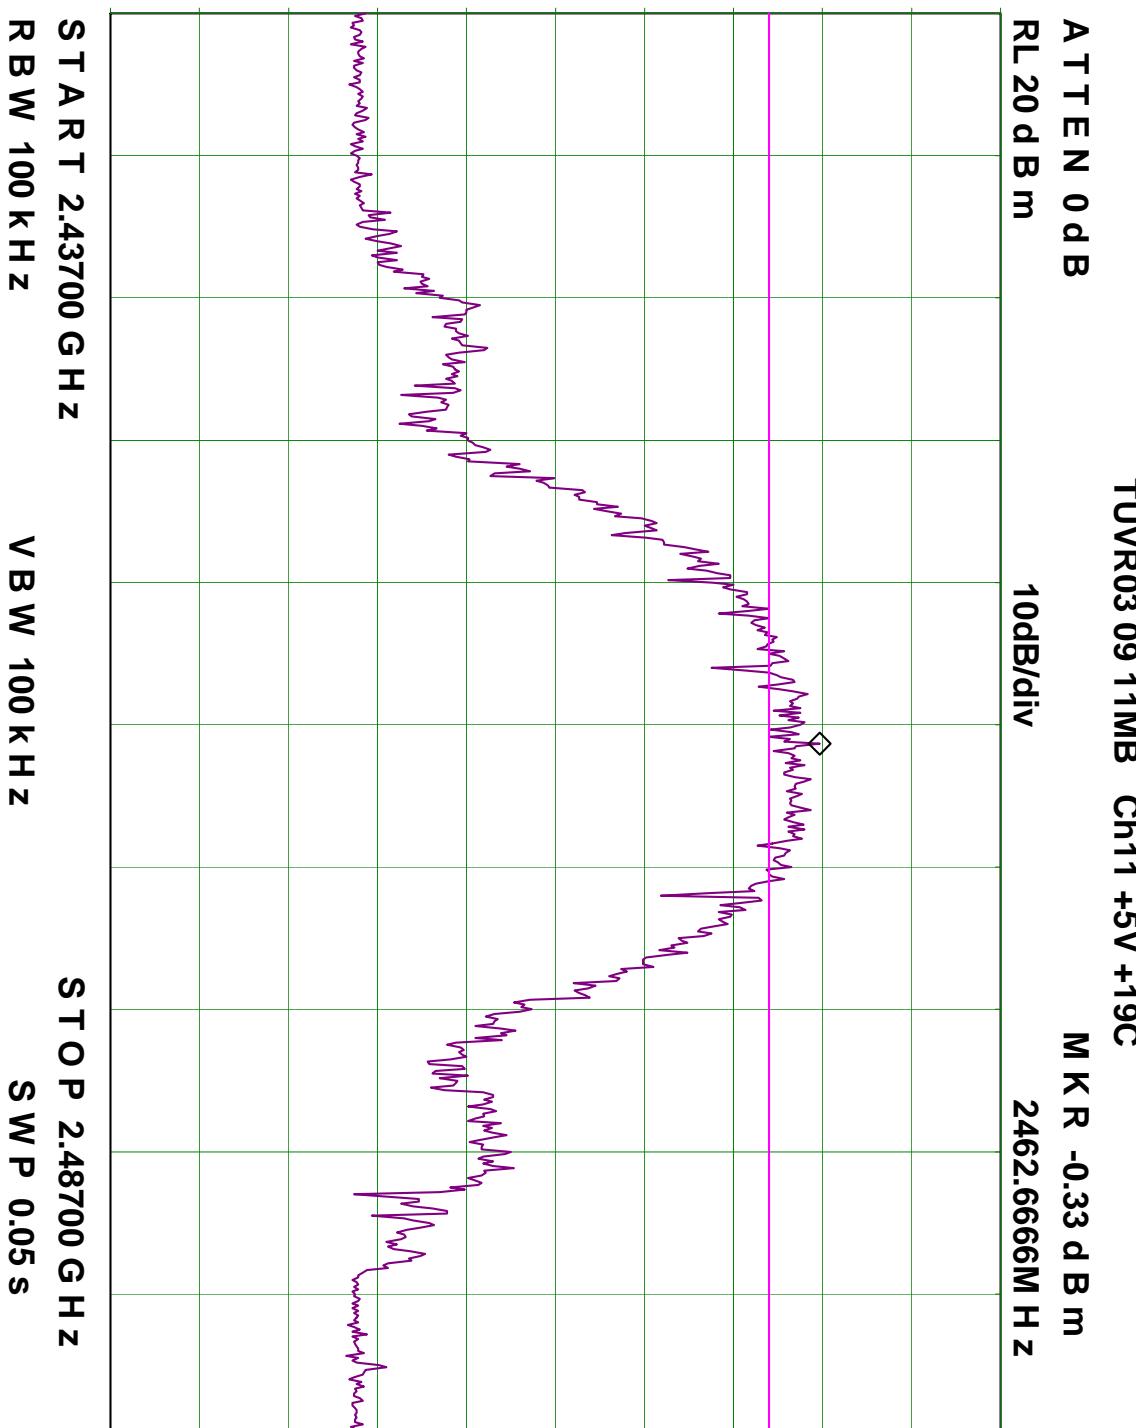


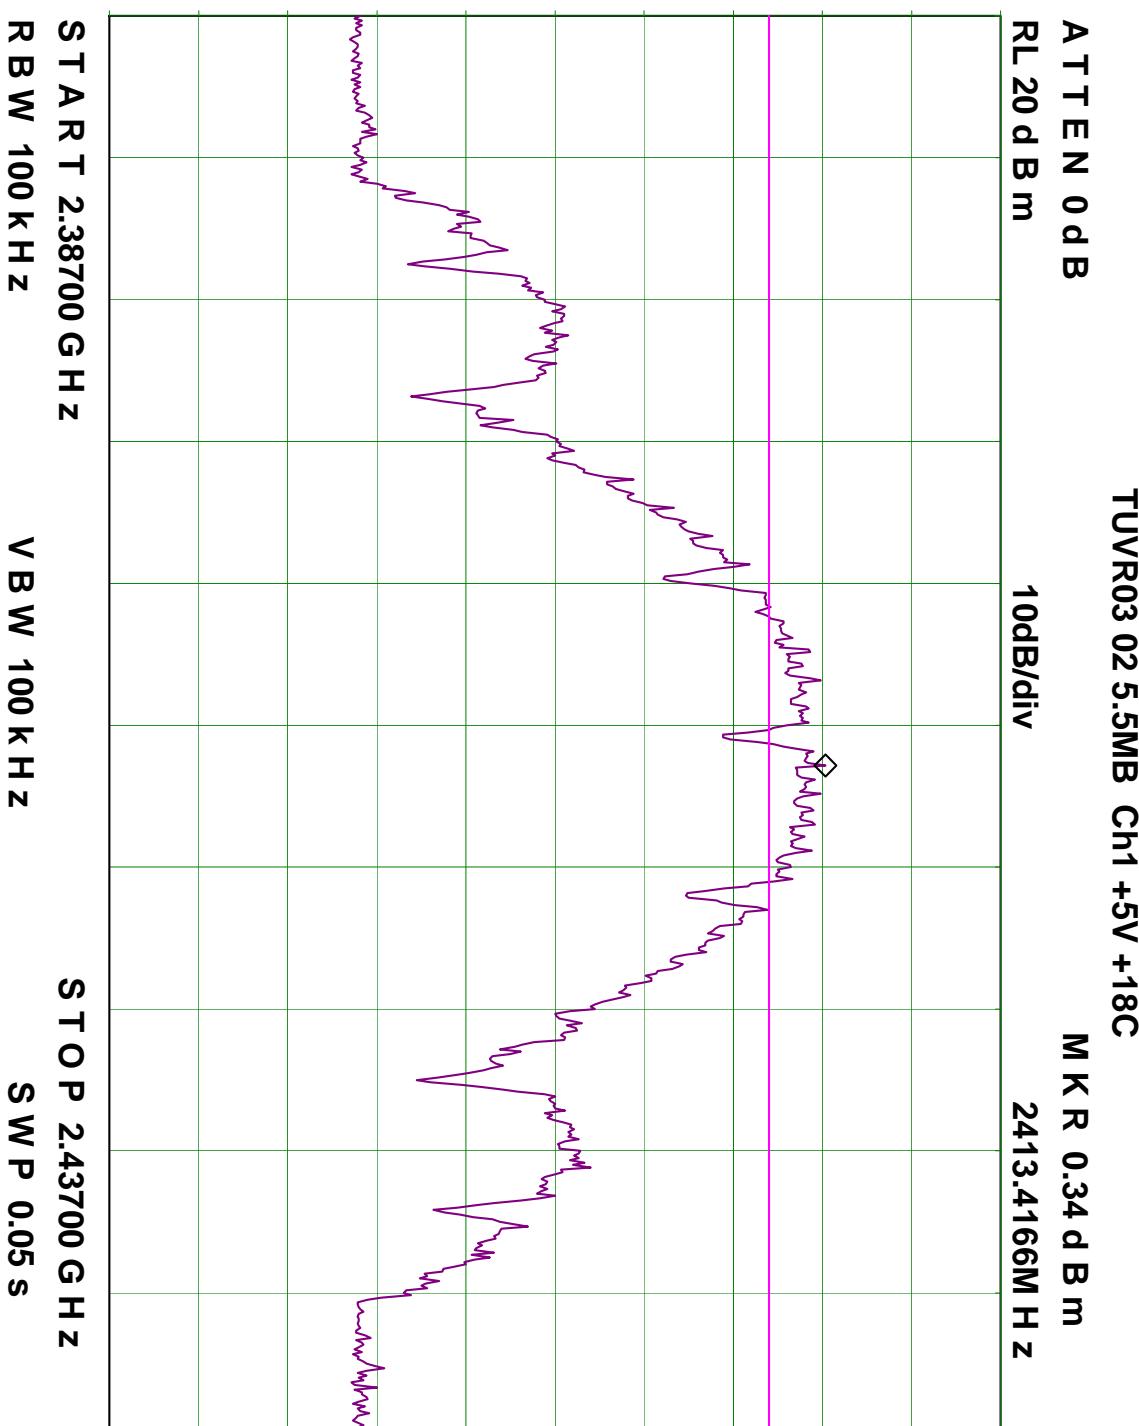


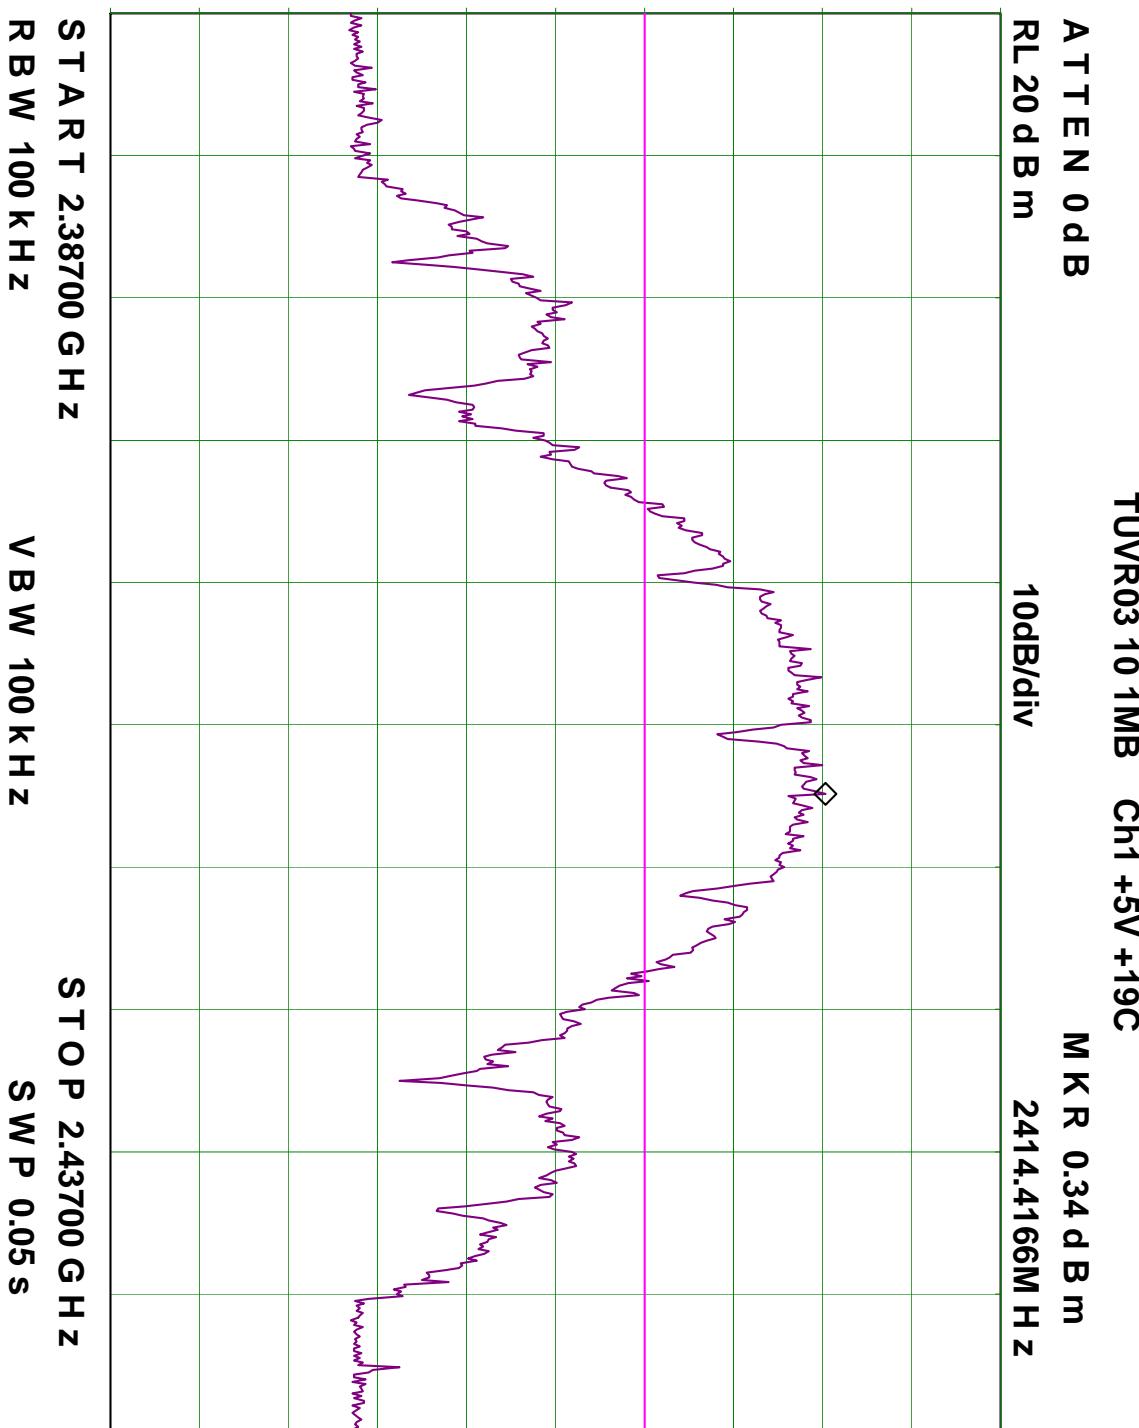


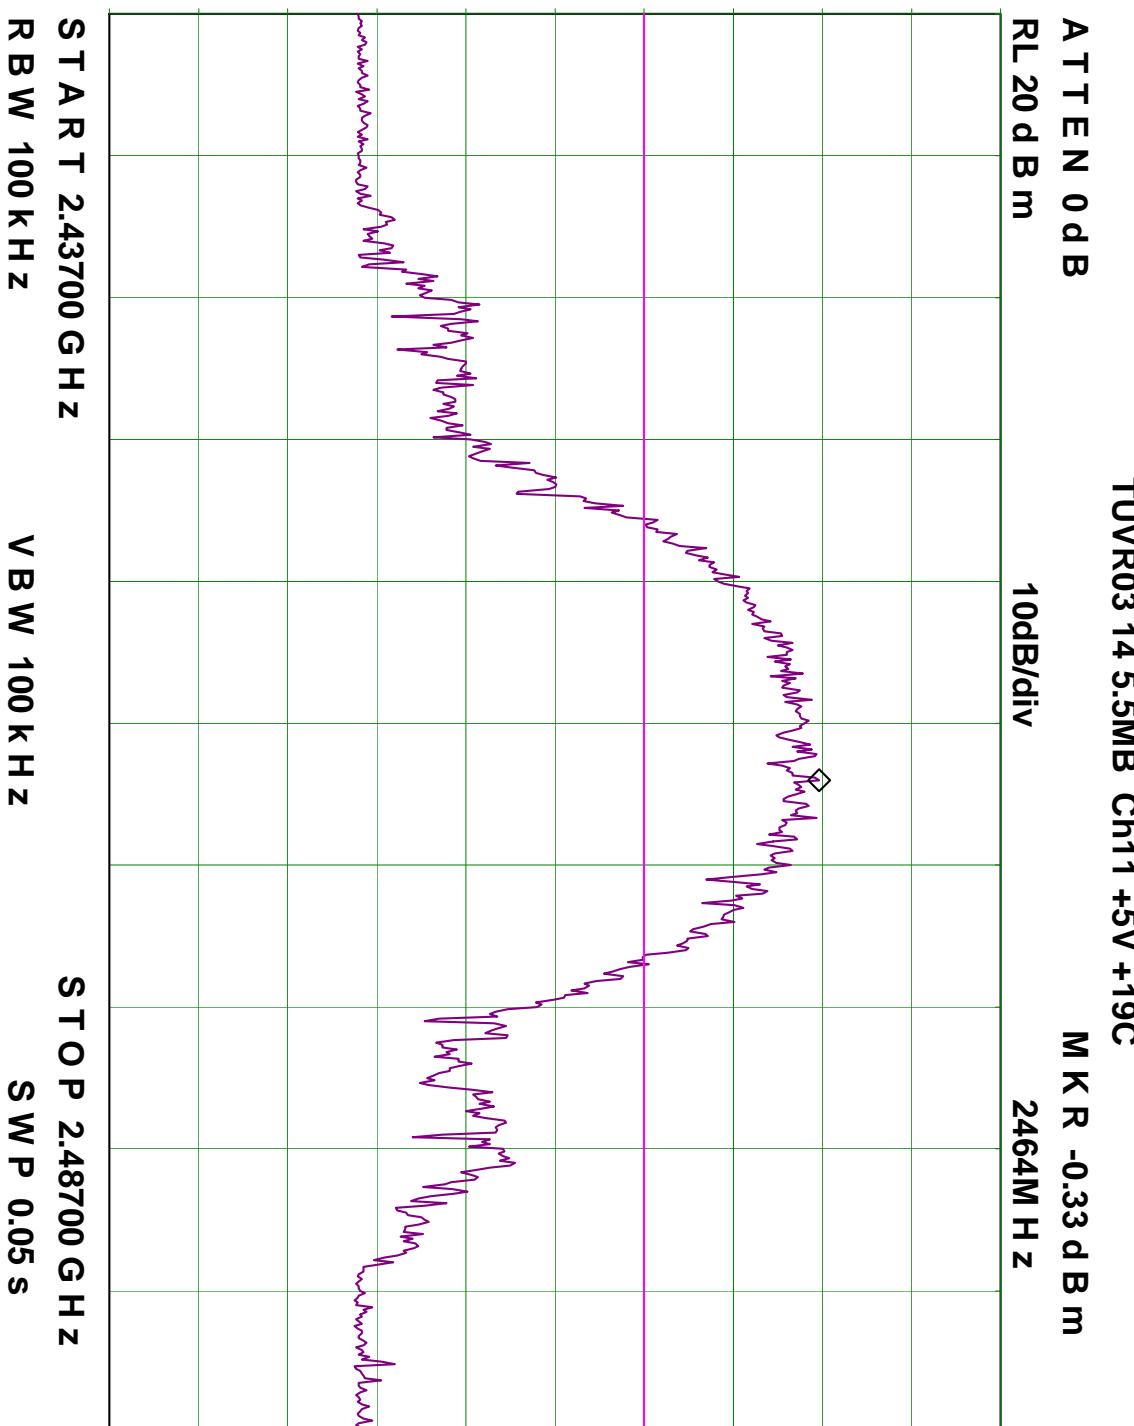

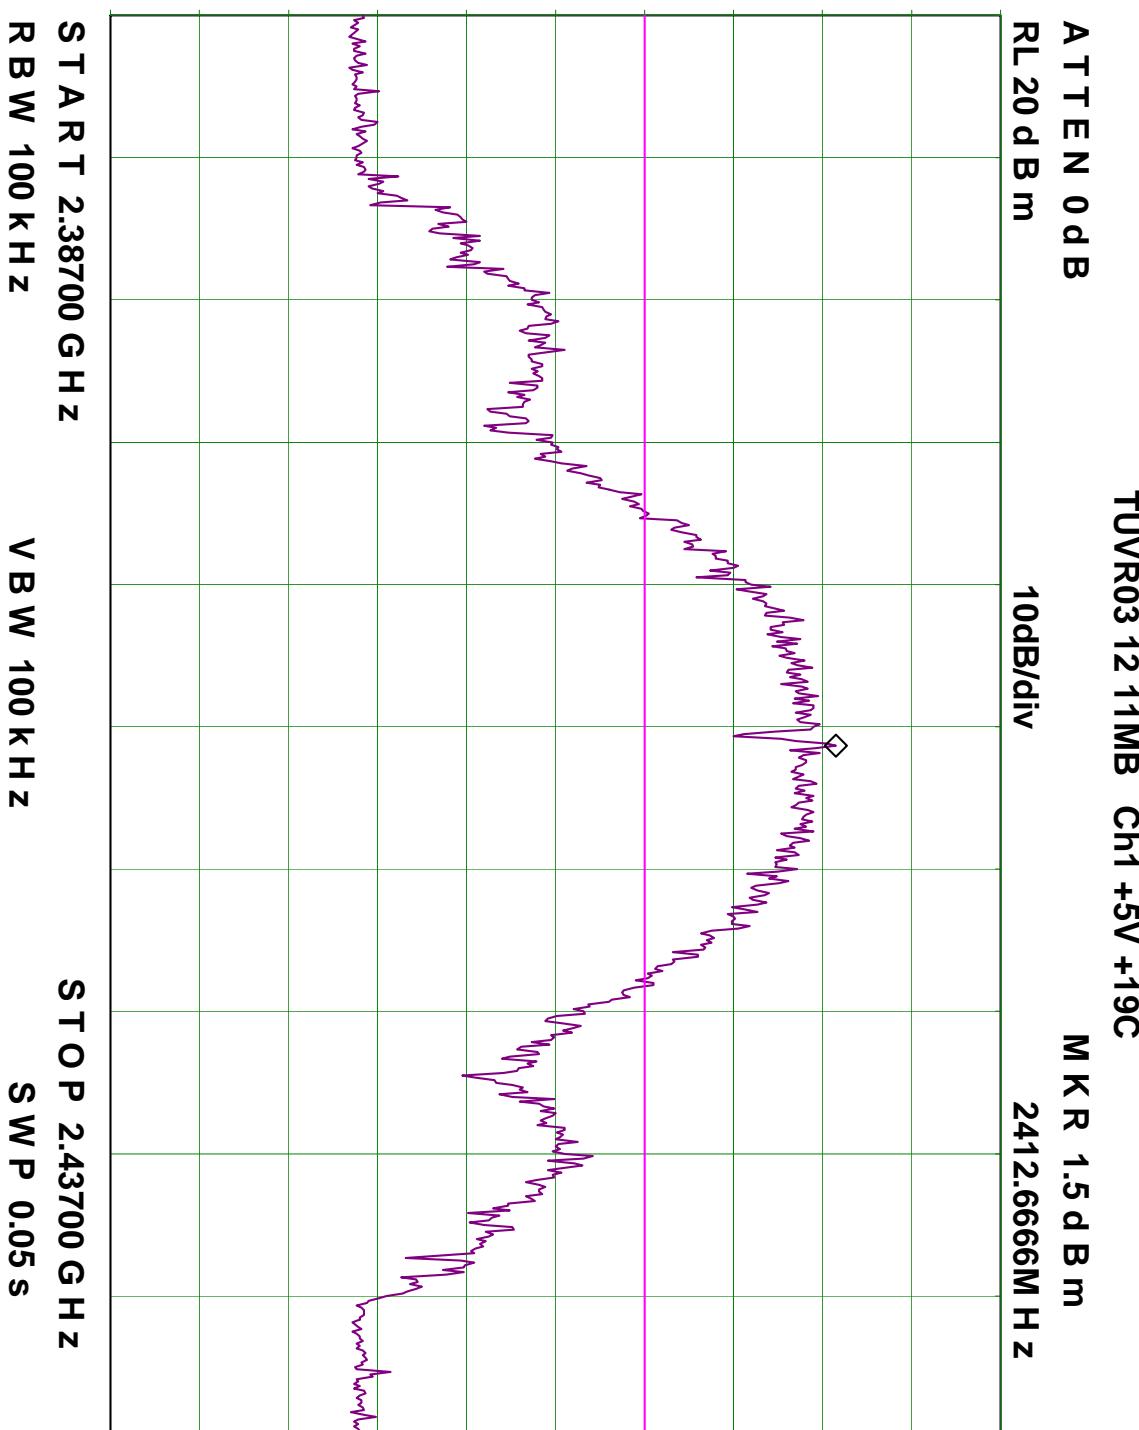

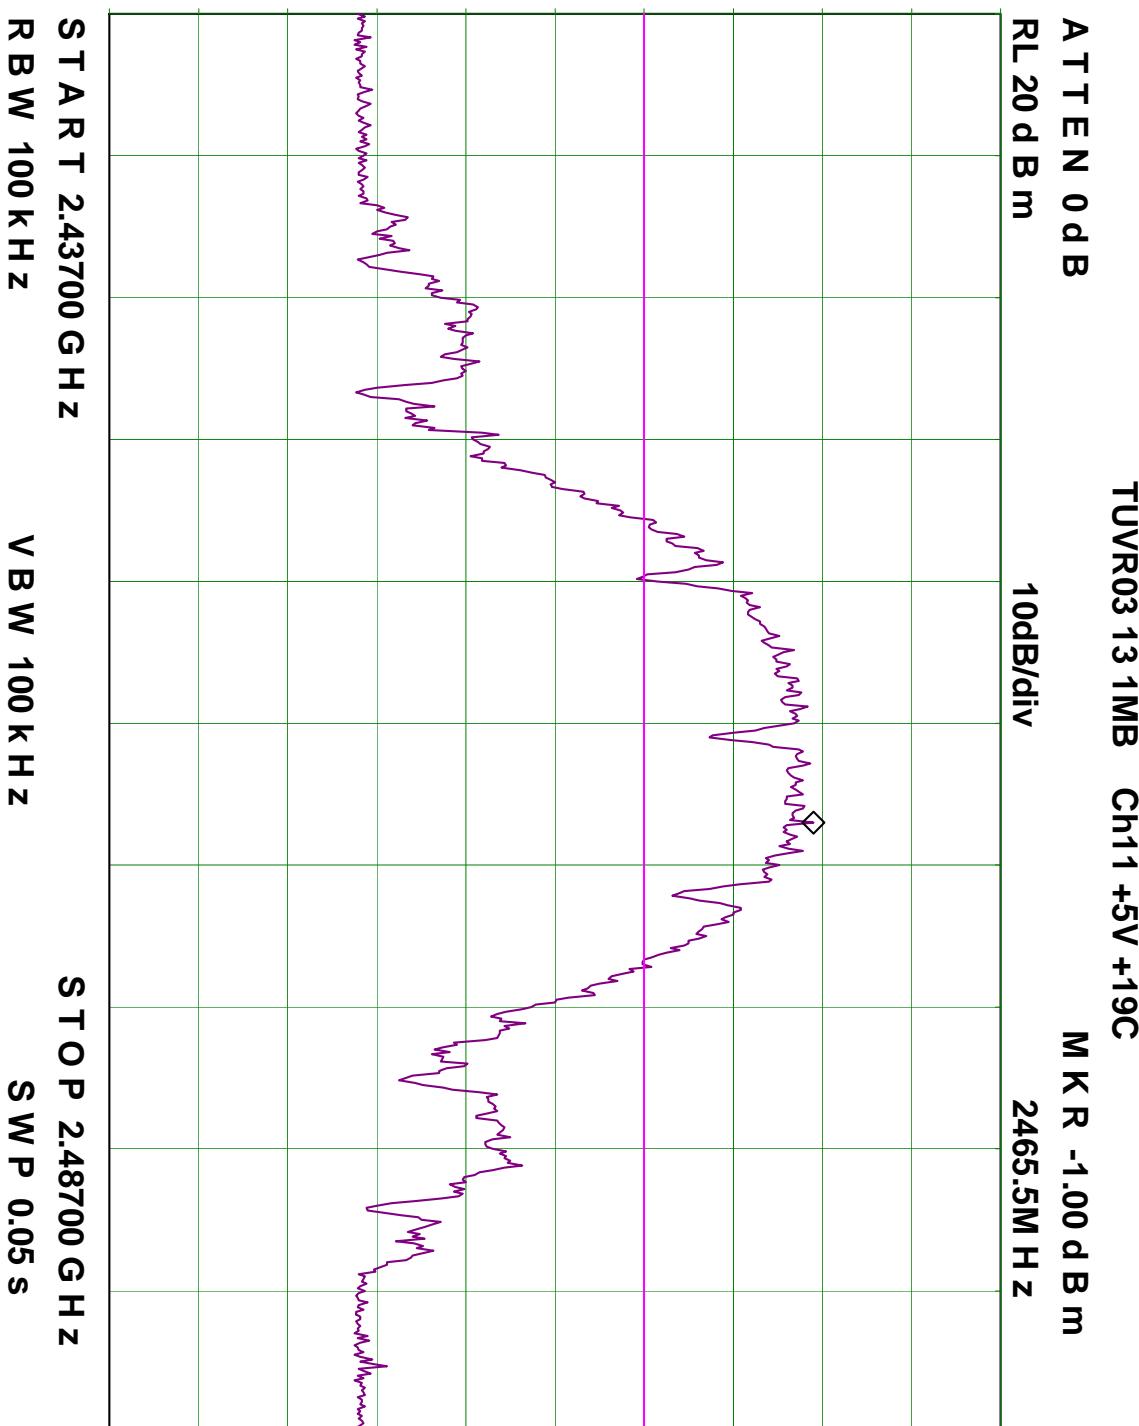


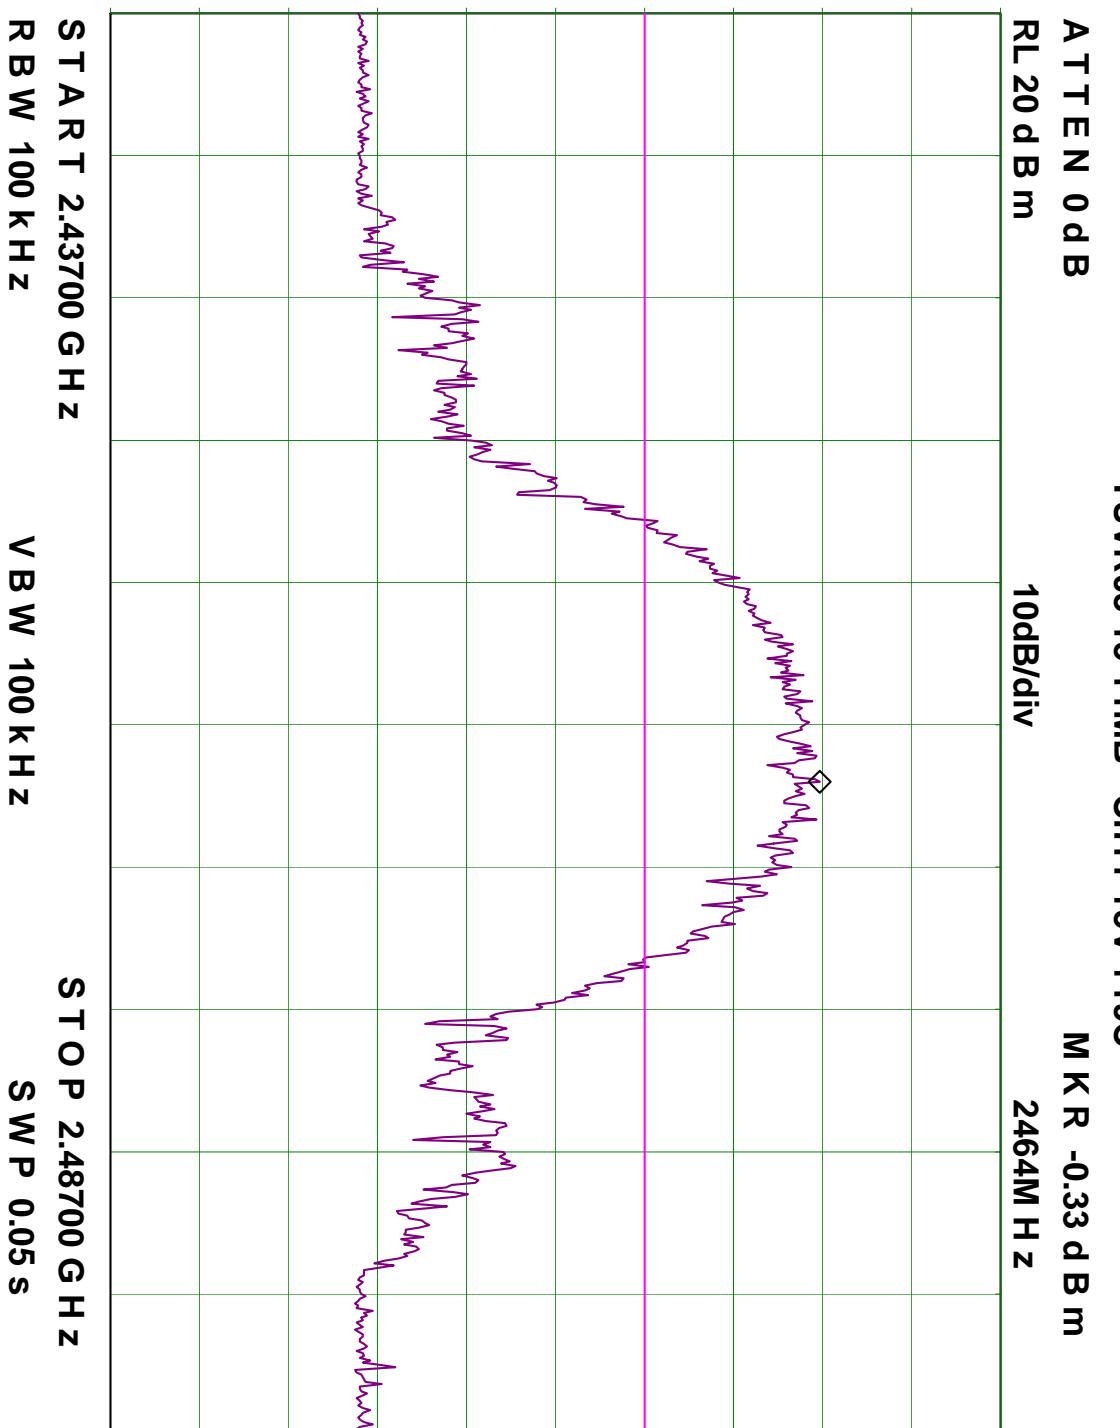

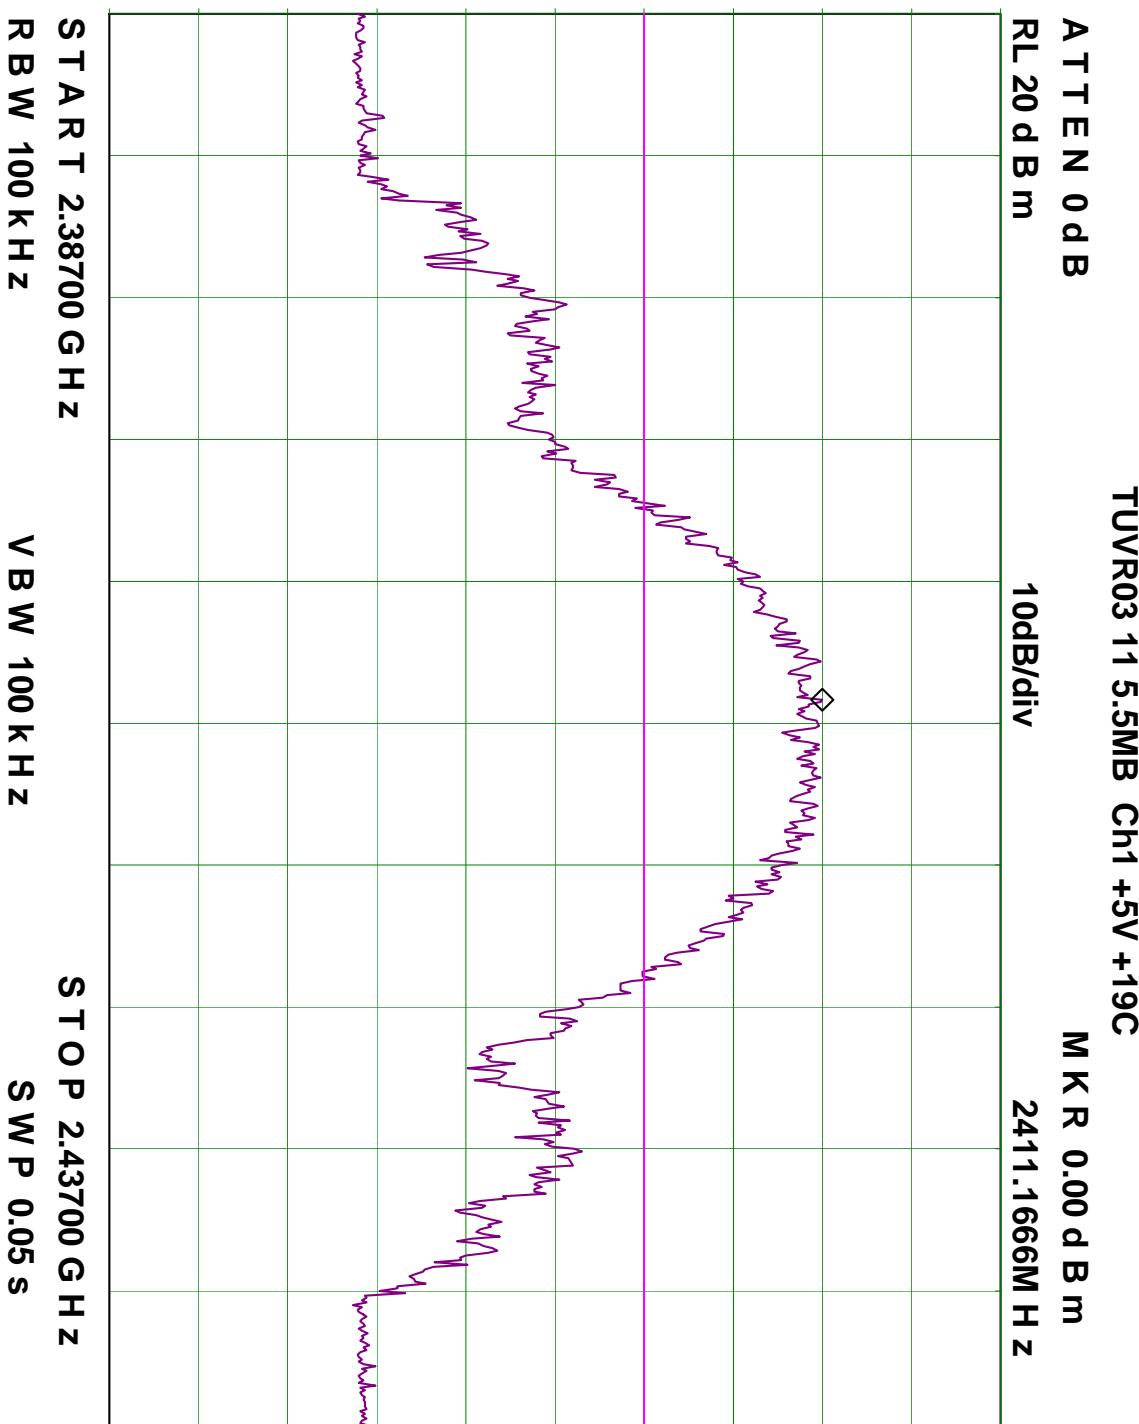




Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 50 of 72

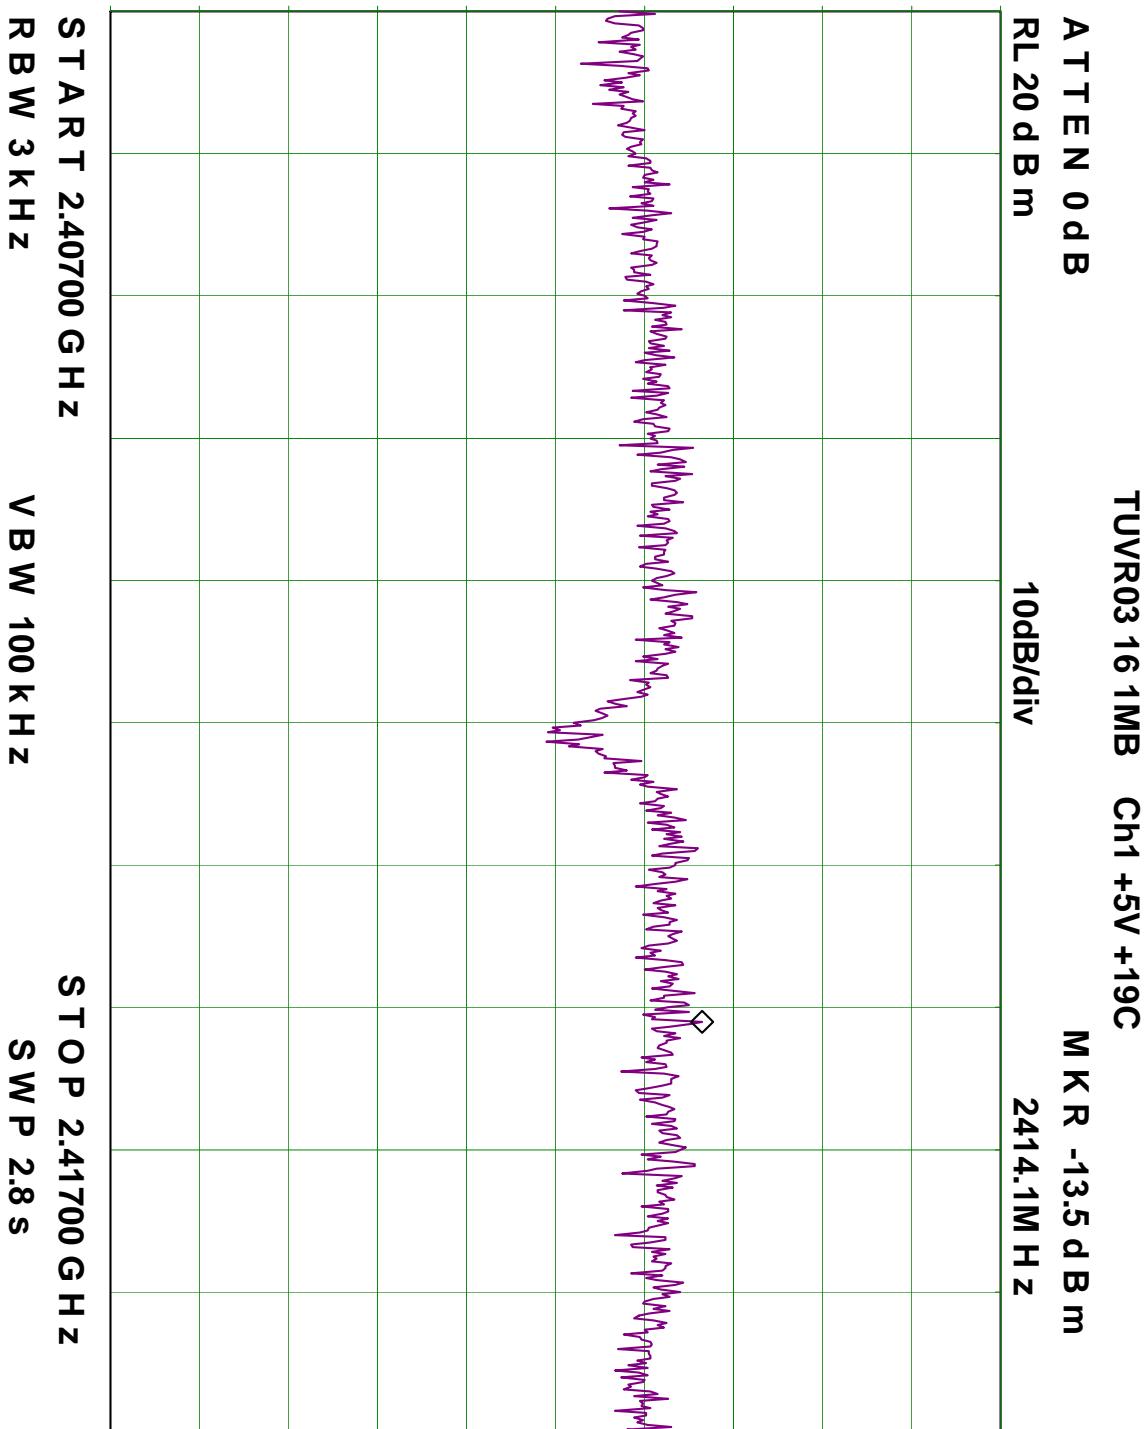




Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 51 of 72

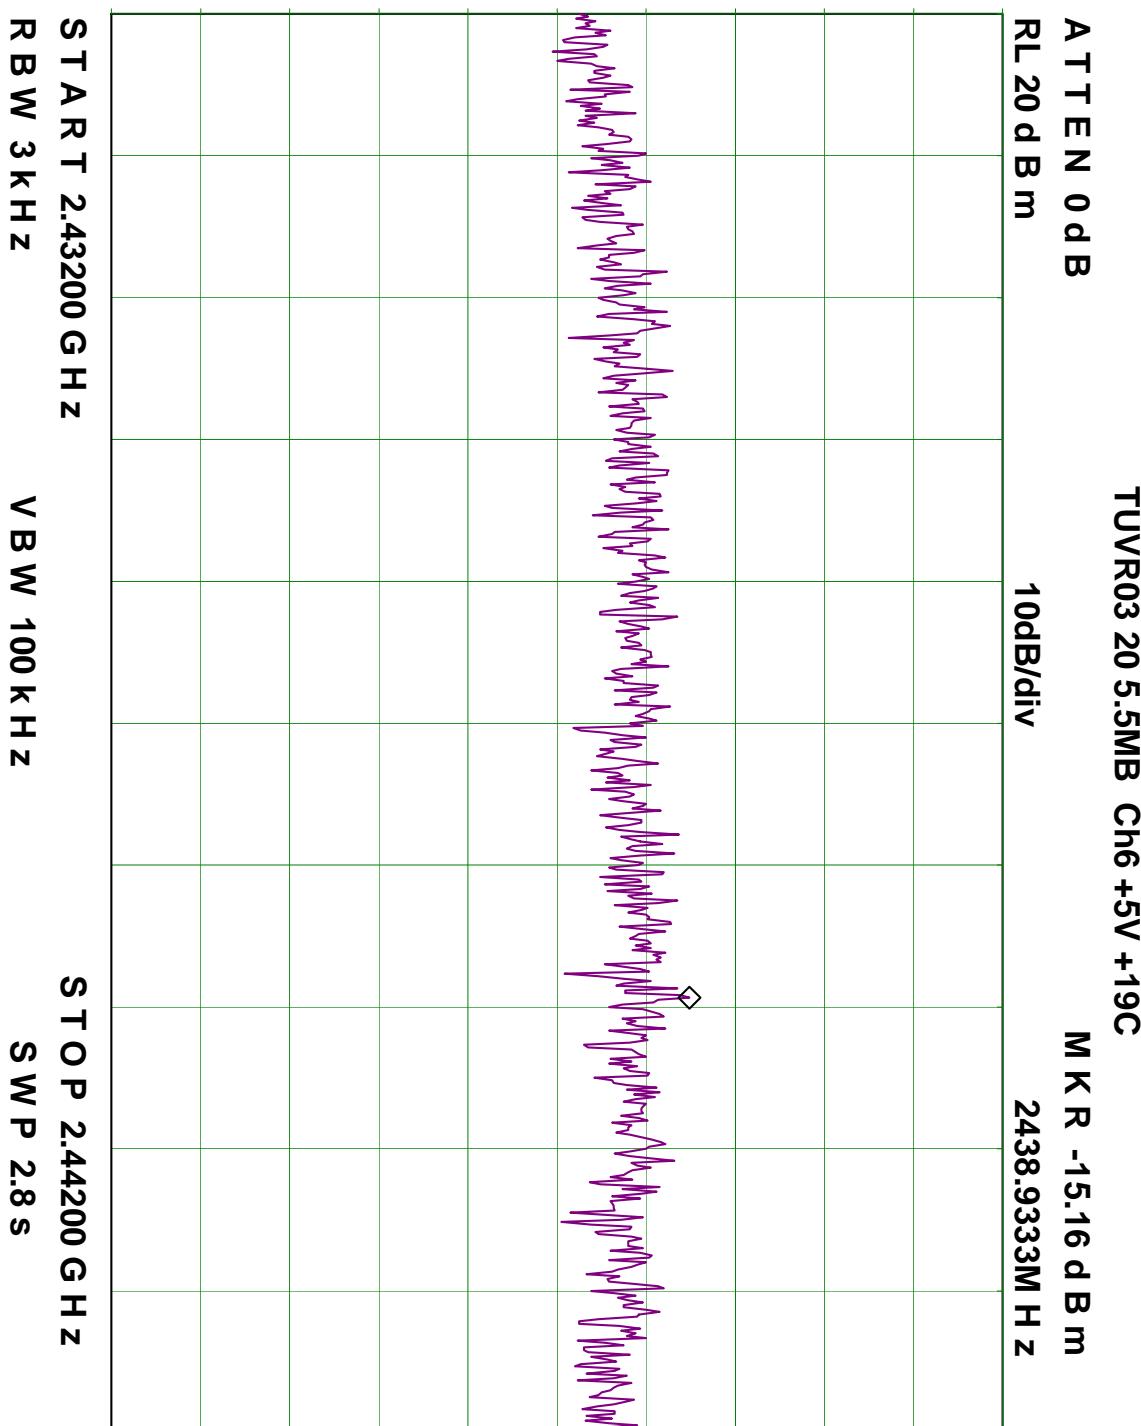



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 52 of 72

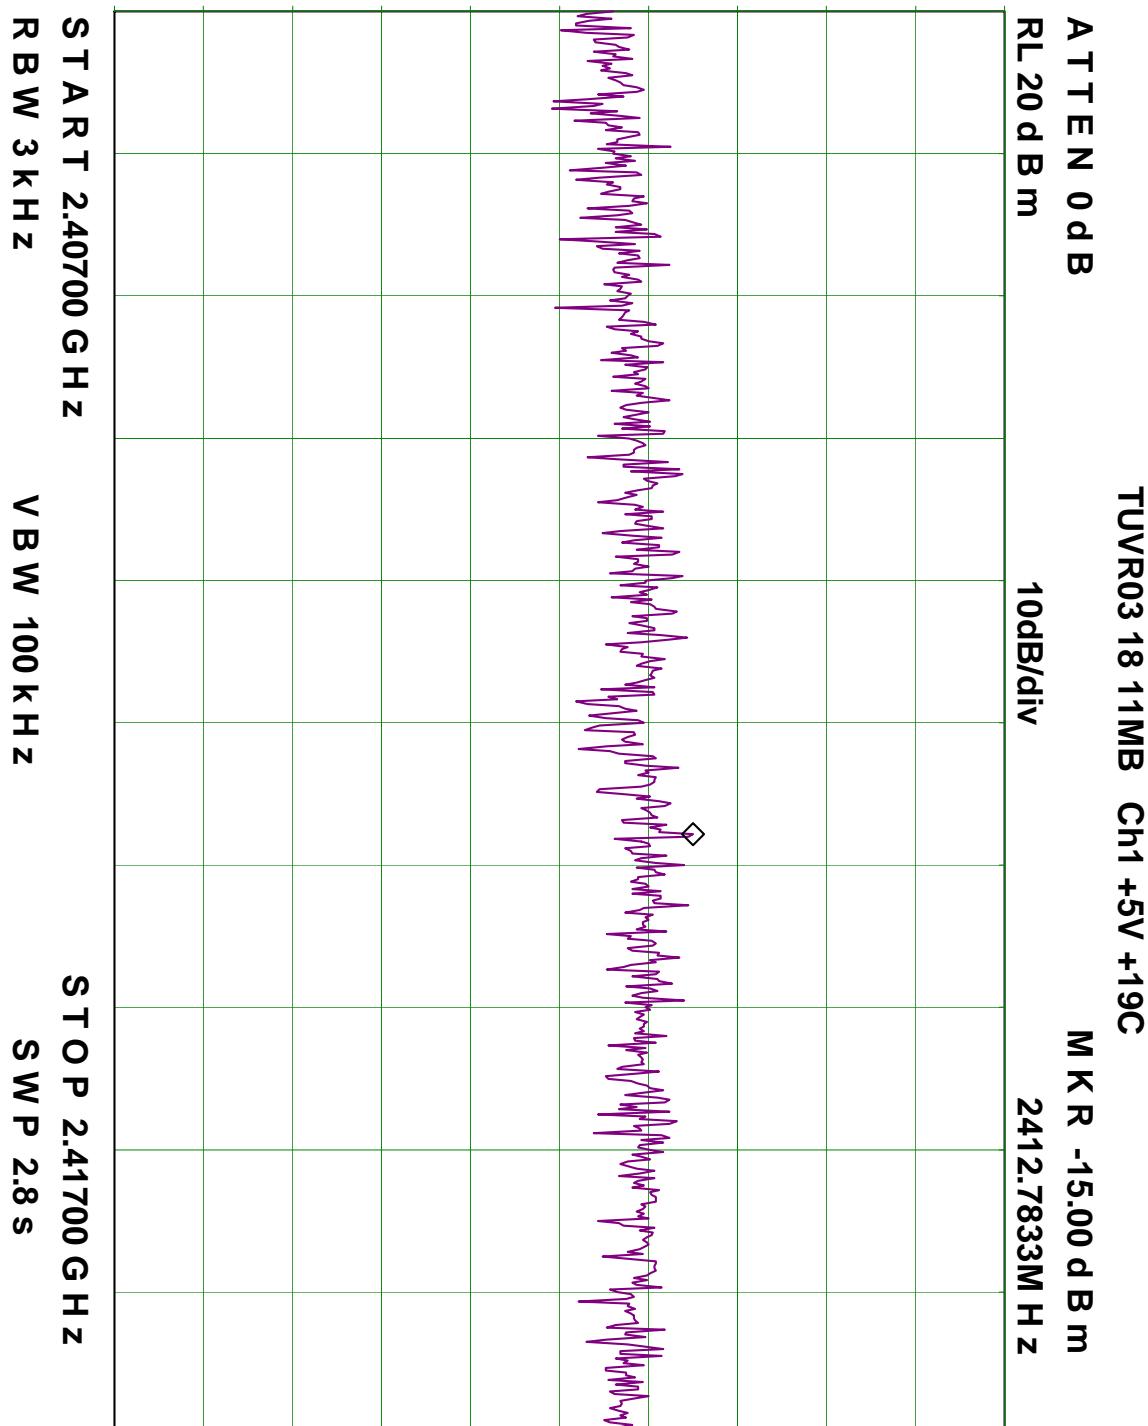



Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 53 of 72


ATTEN 0 dB
RL 20 dBm

10dB/div


TUVR03 19 1MB Ch6 +5V 1MB


MKR -15.33 dBm

2438.1MHz

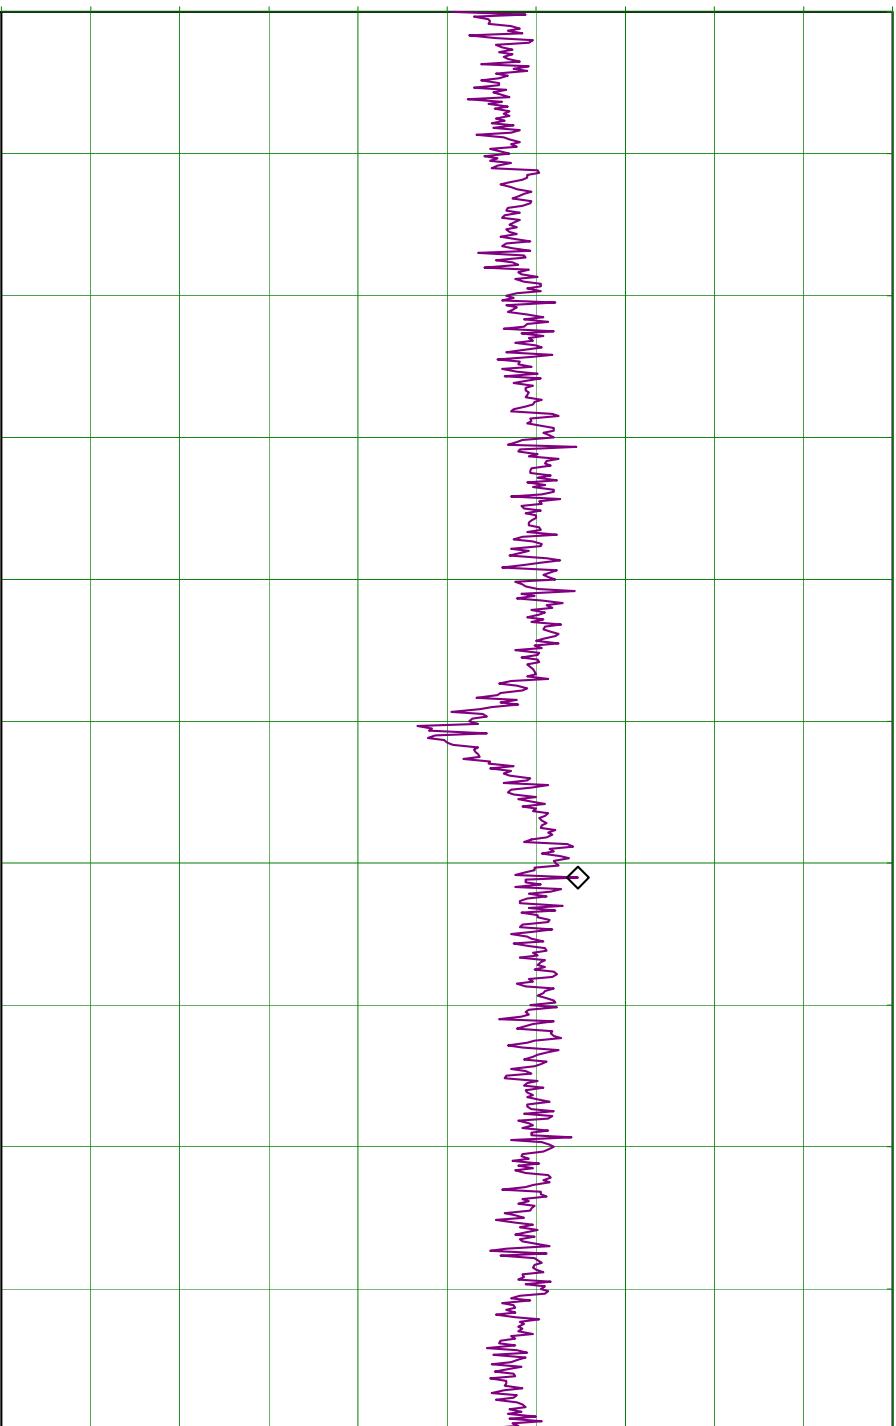


START 2.43200 GHz
RBW 3 kHz
VBW 100 kHz
SWP 2.8 s

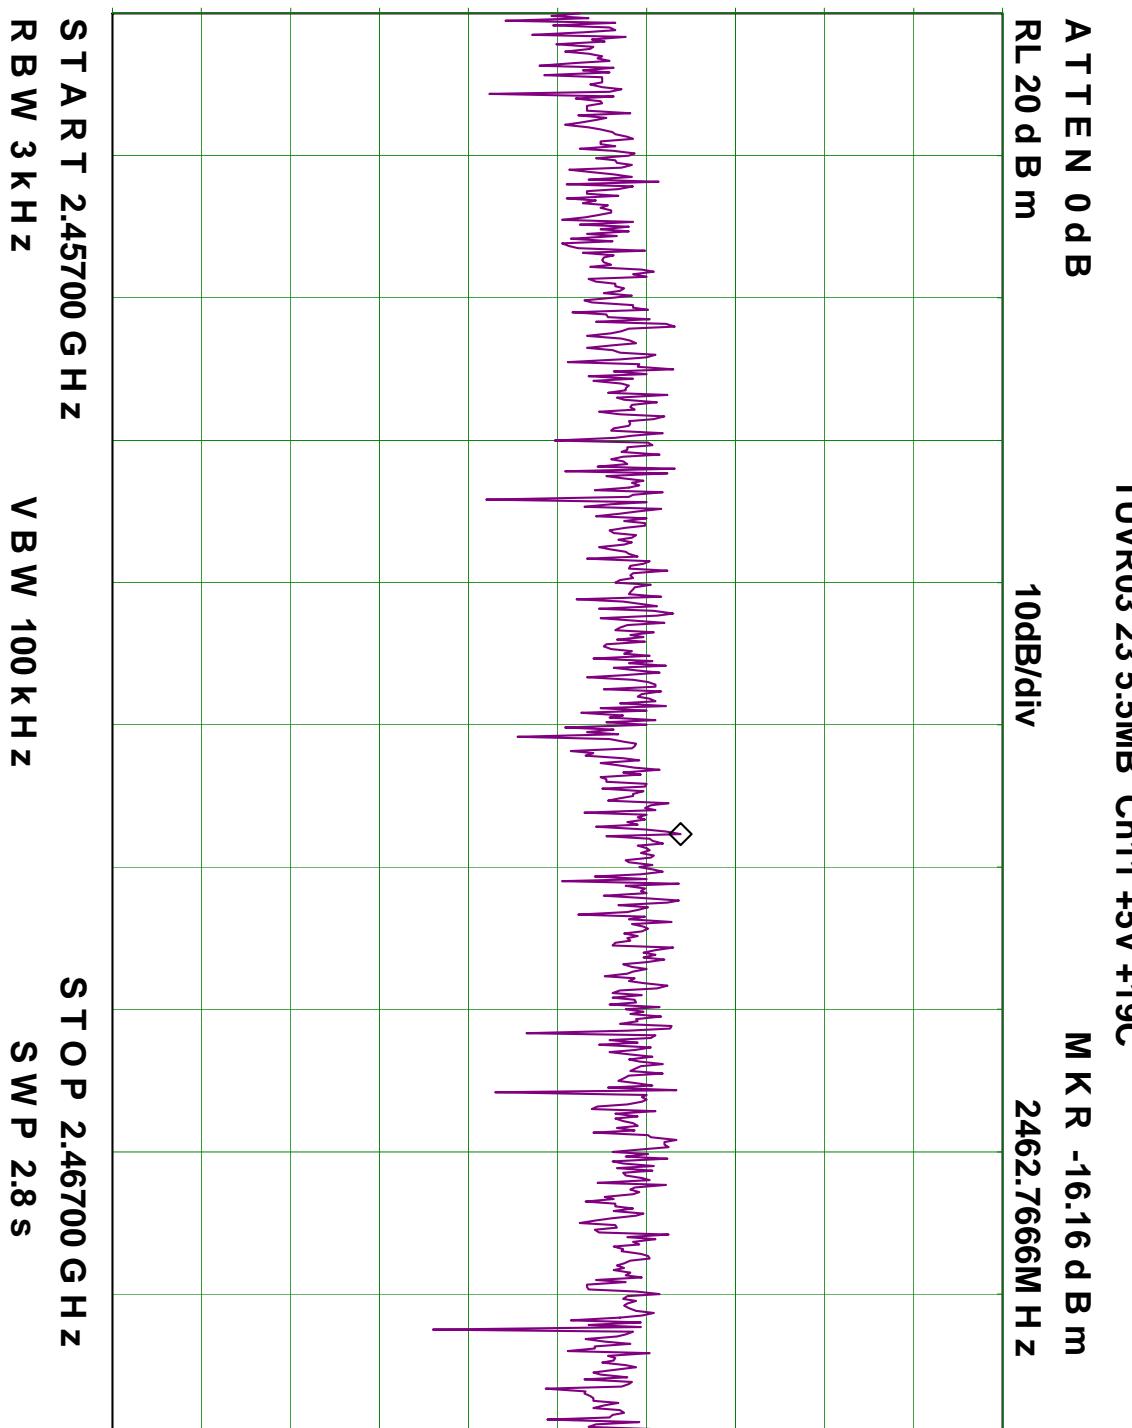


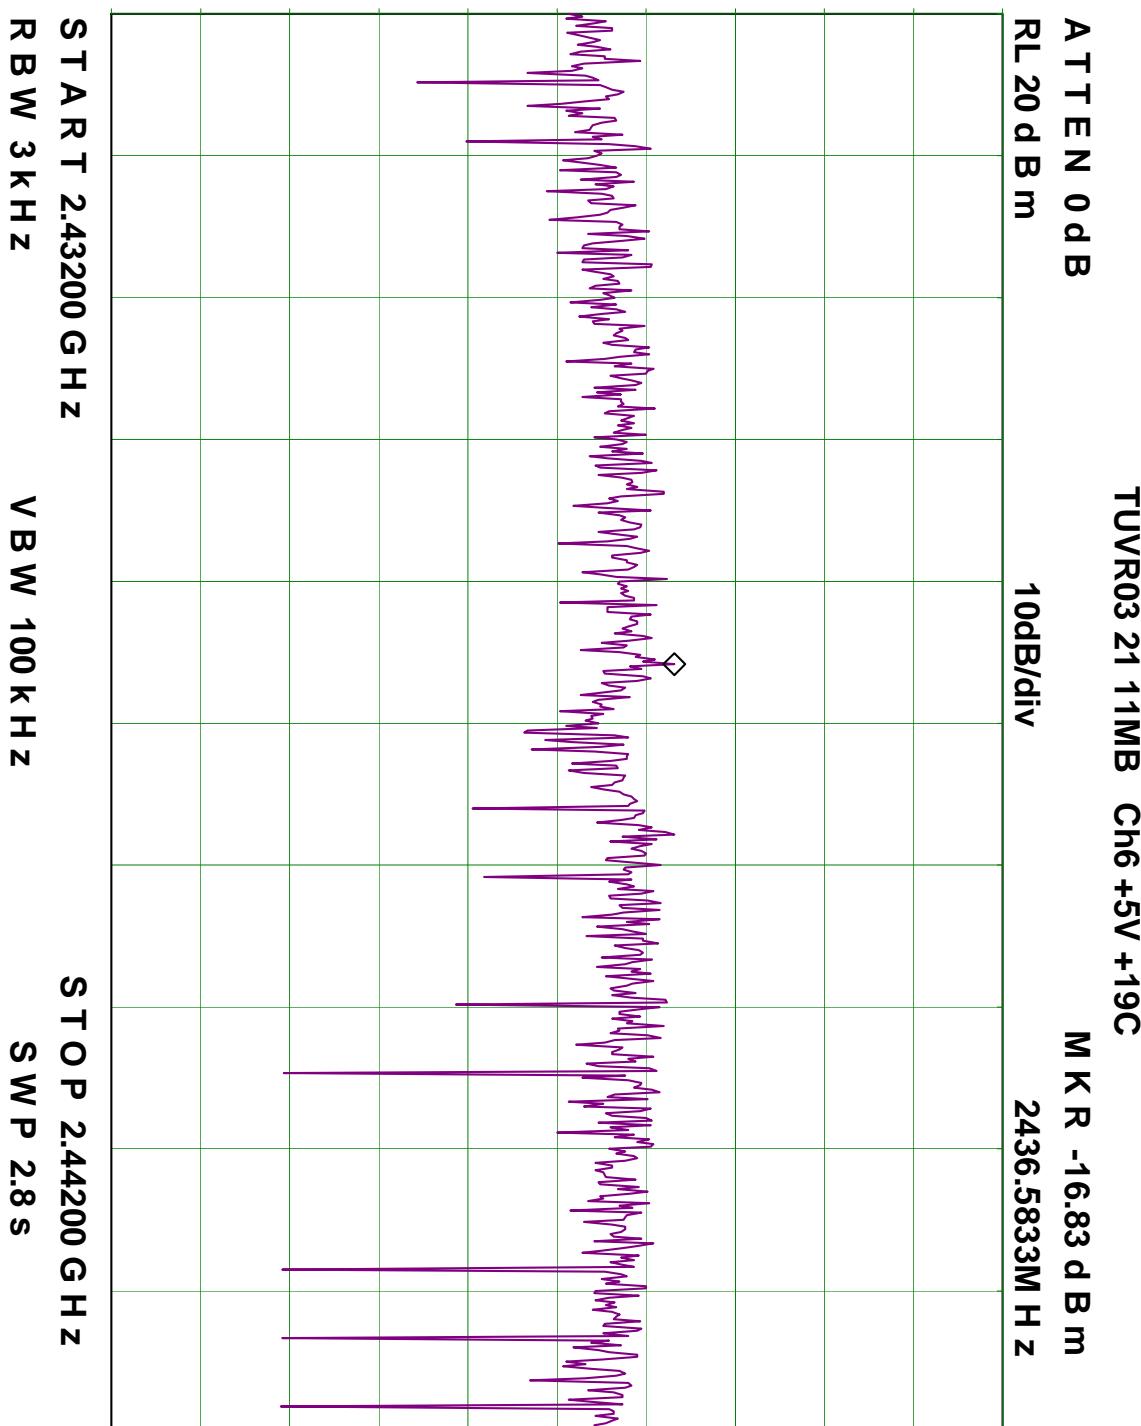






Title: Test of Mobile IPTouch 300
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03A-AL\REV A
Issue Date: 2nd September '04
Page: 56 of 72

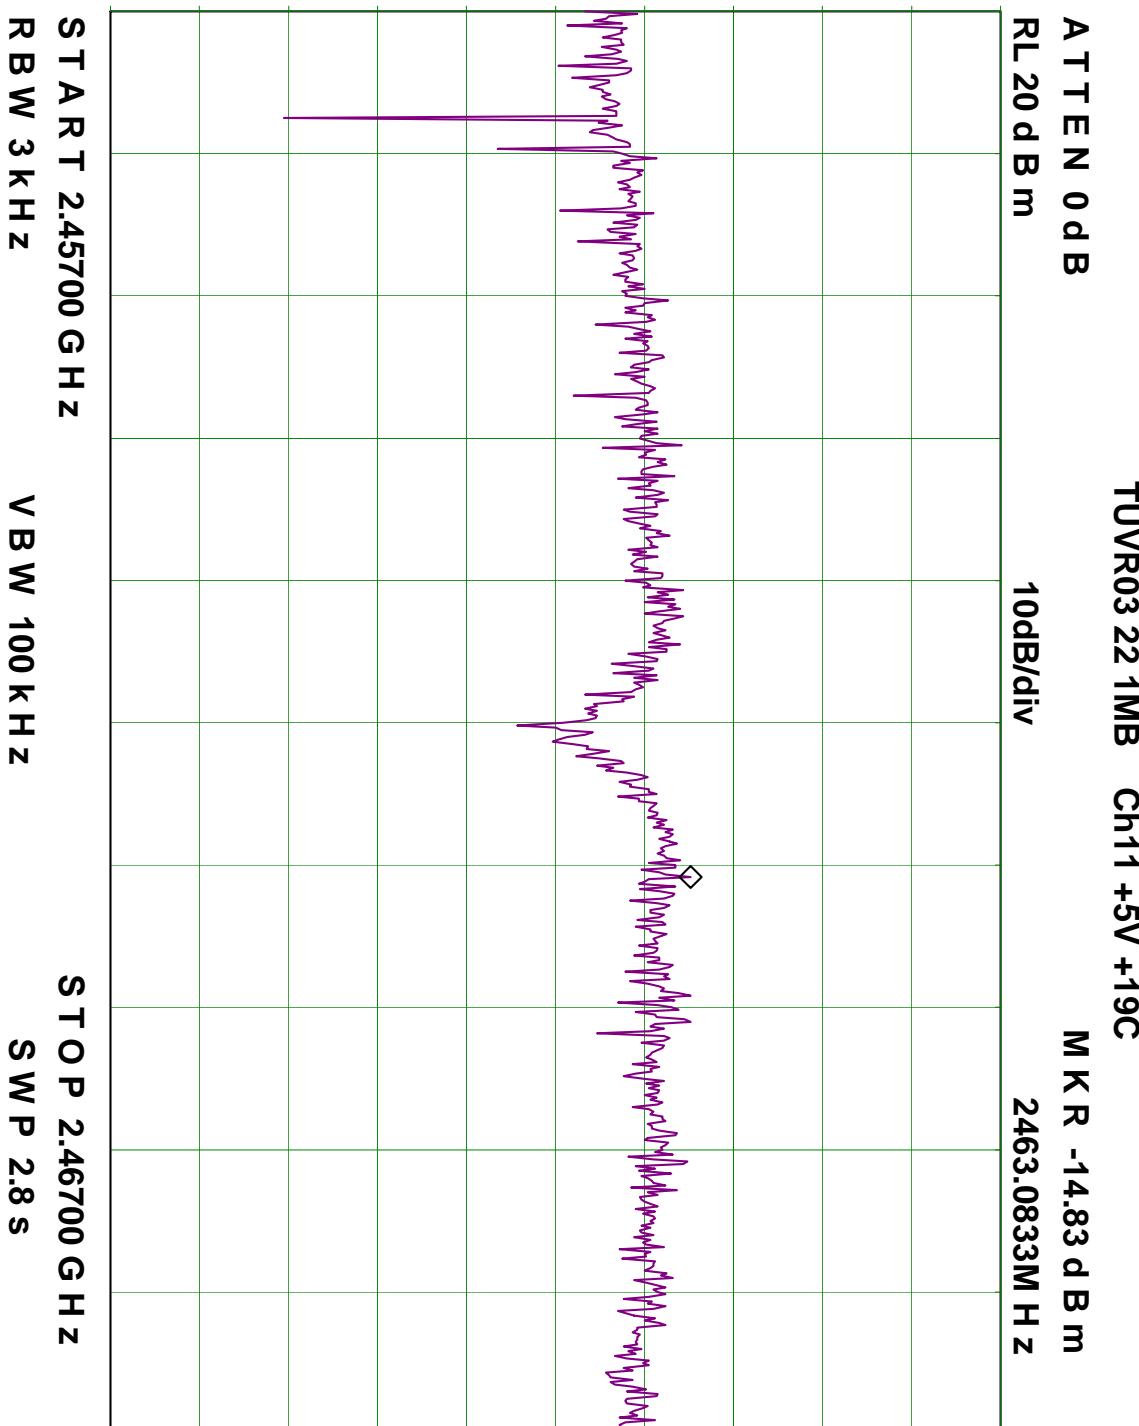


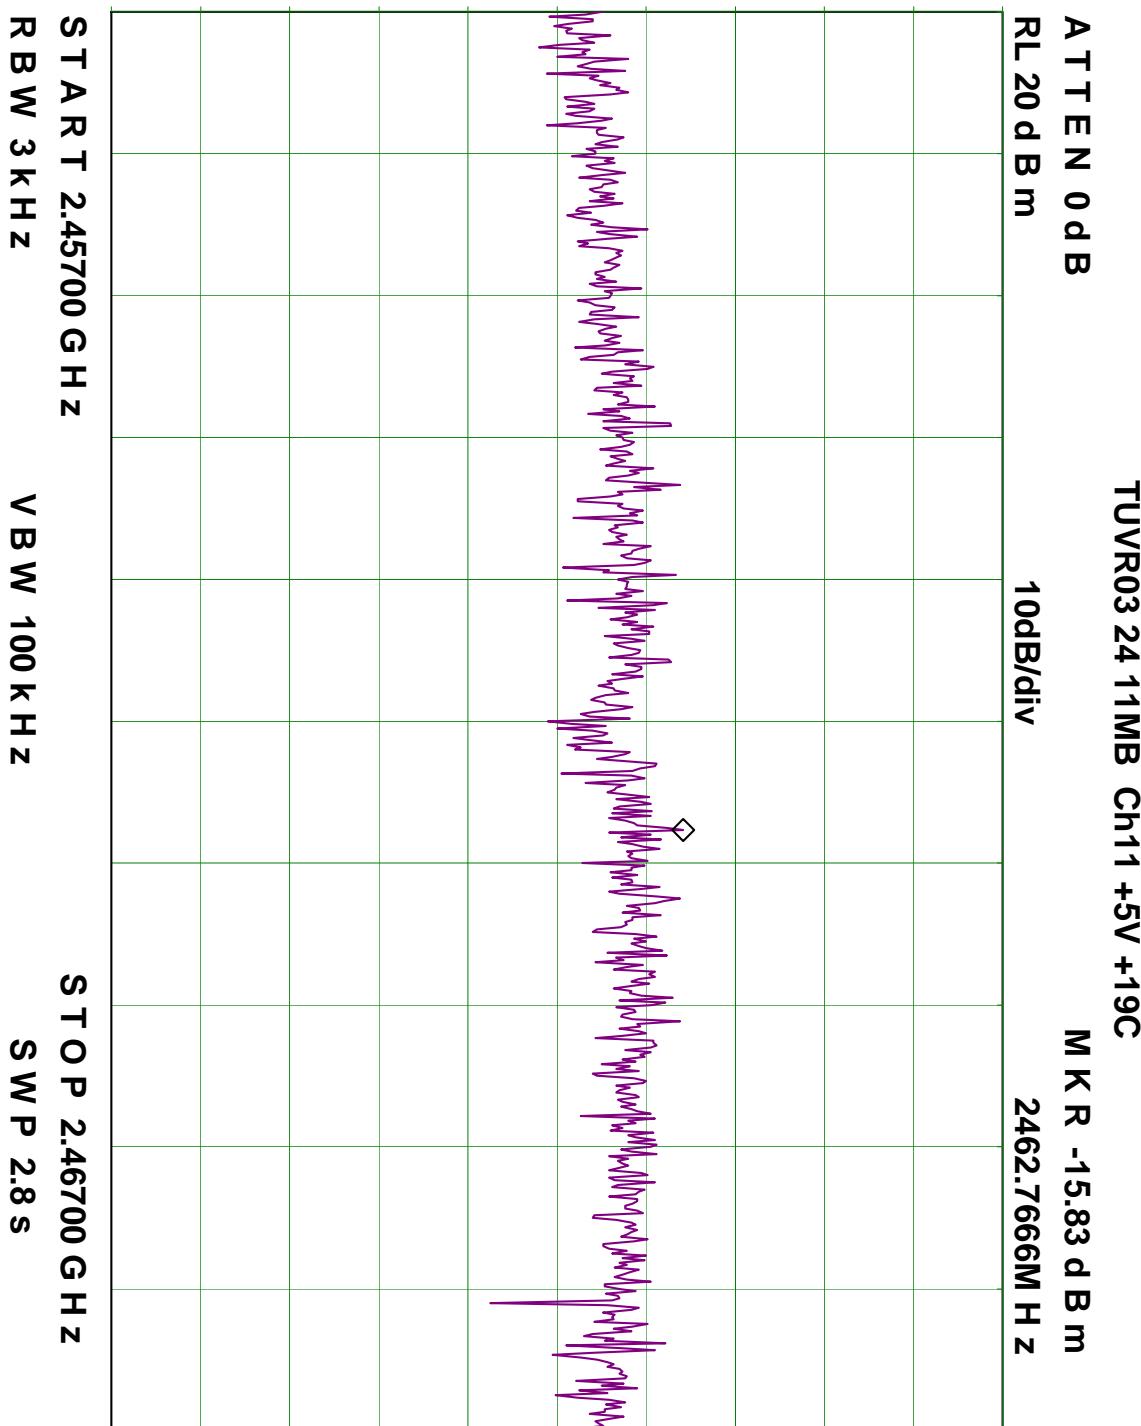


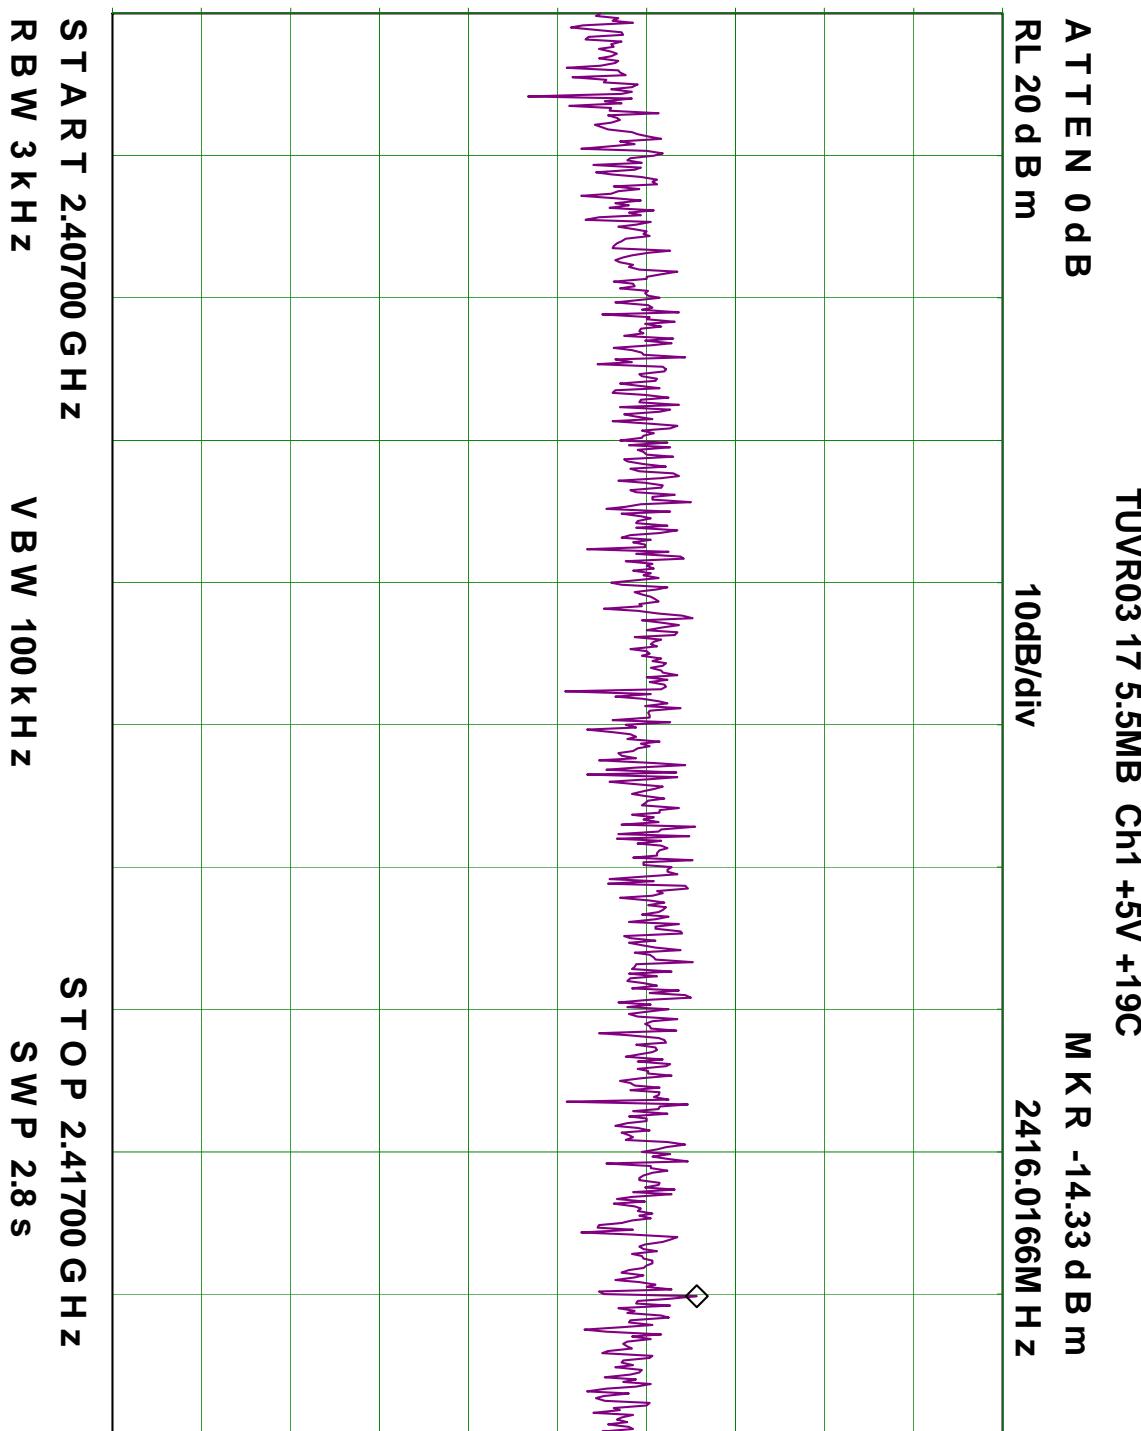


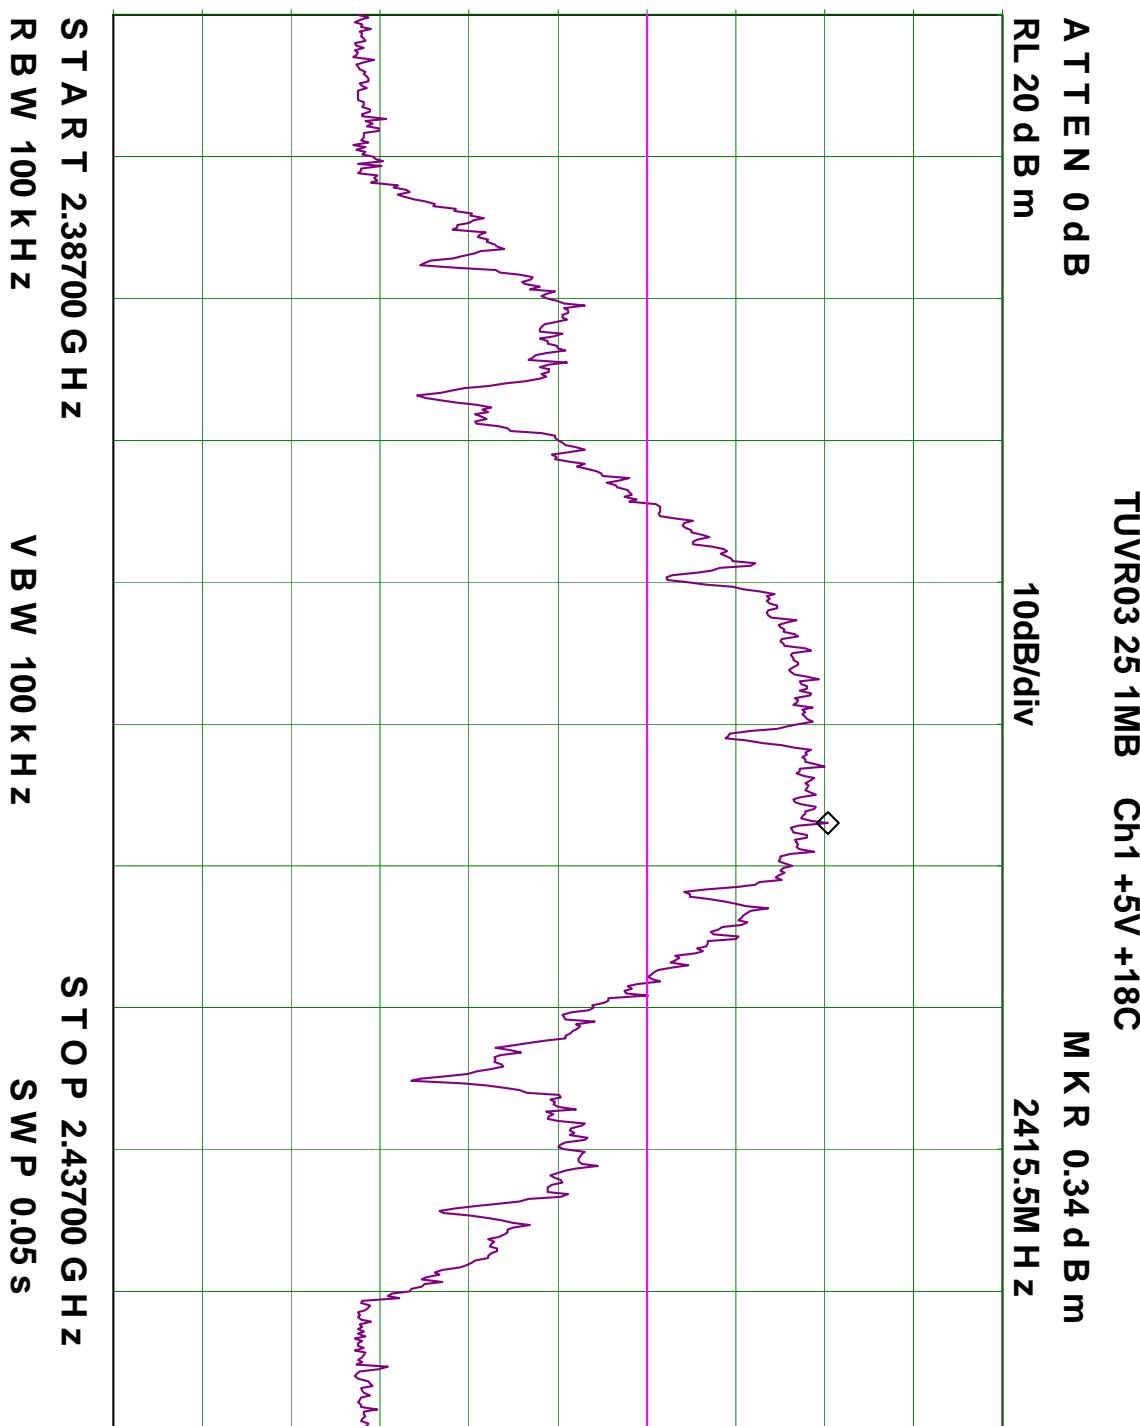


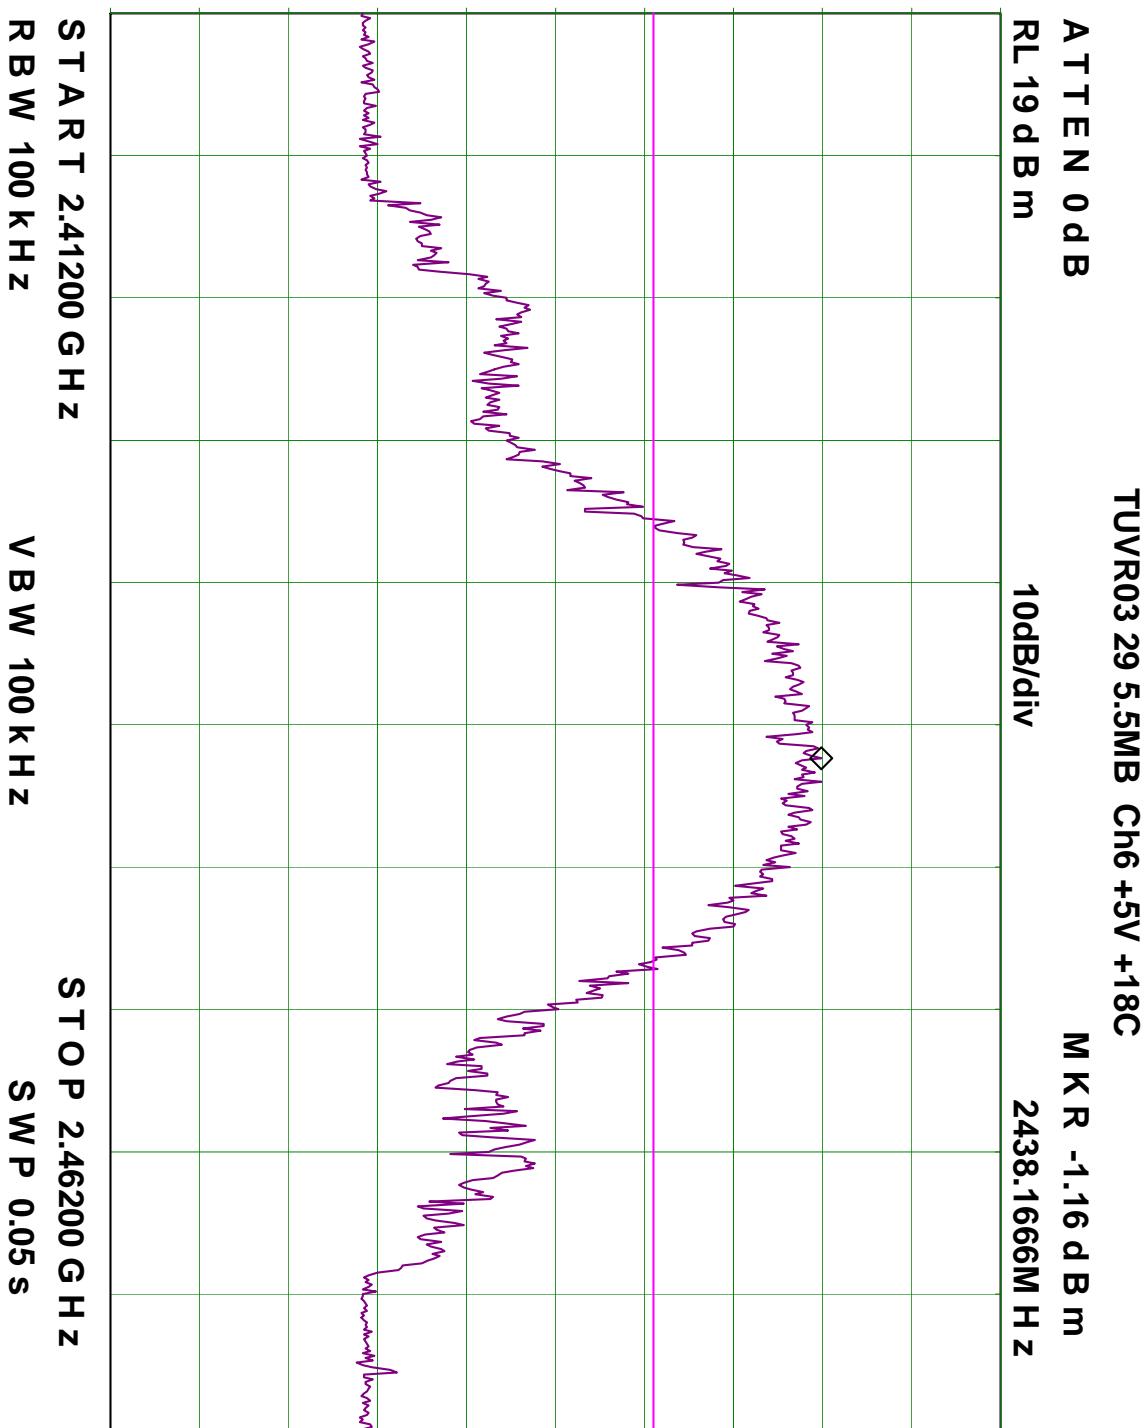


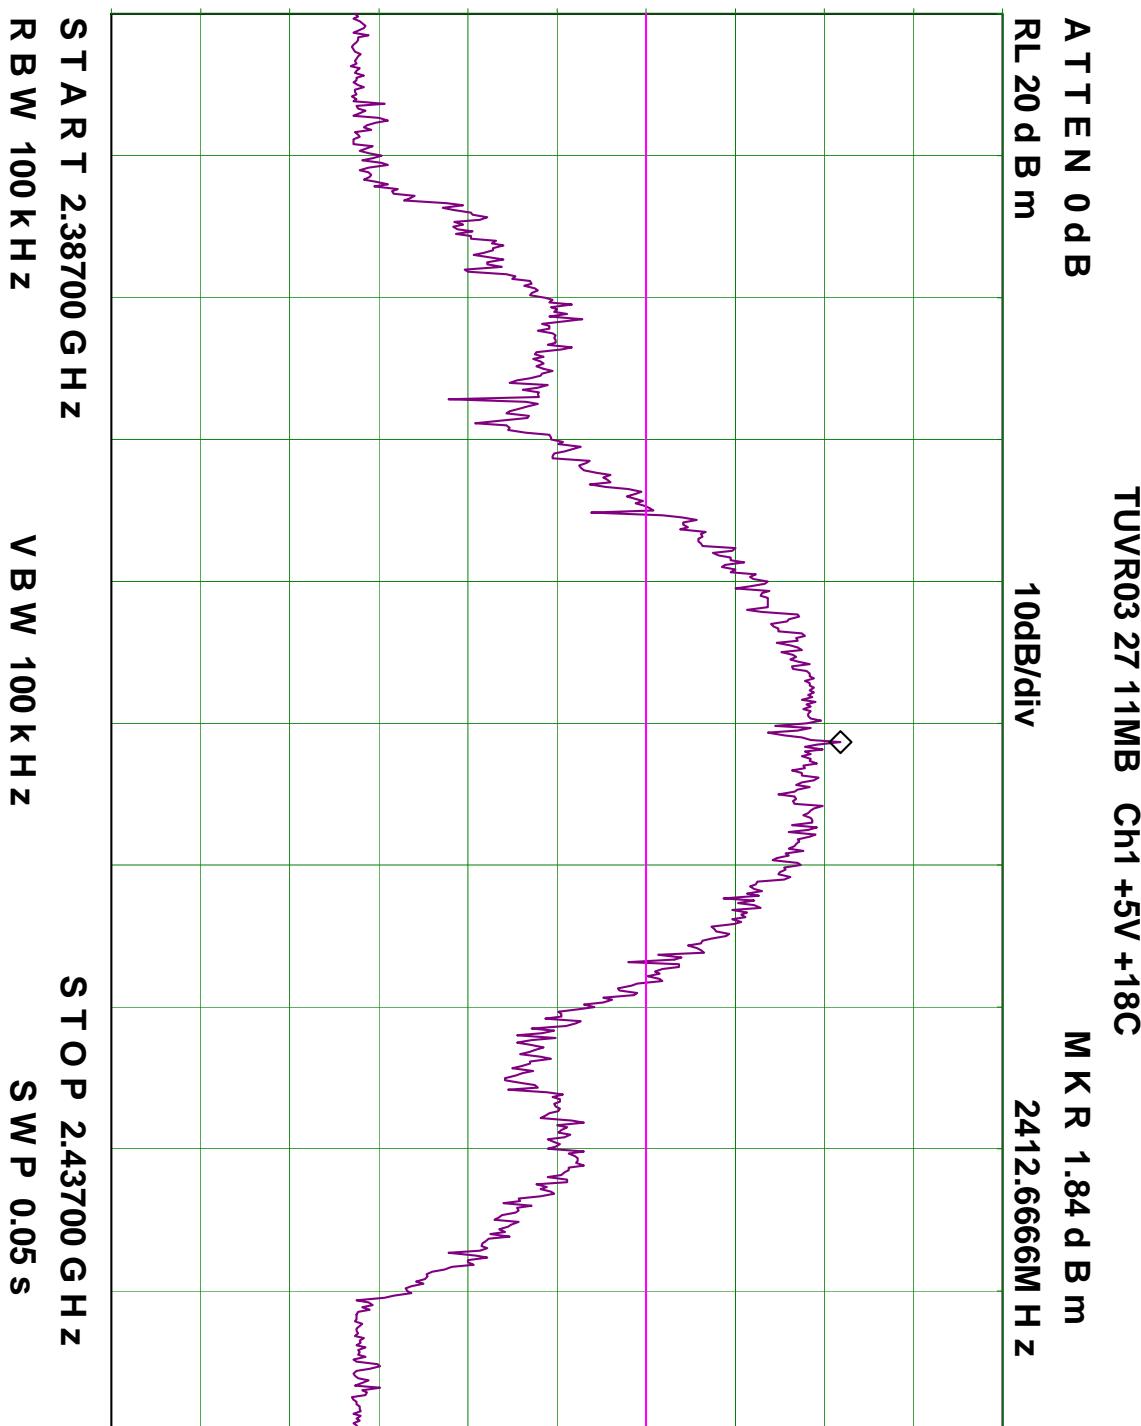


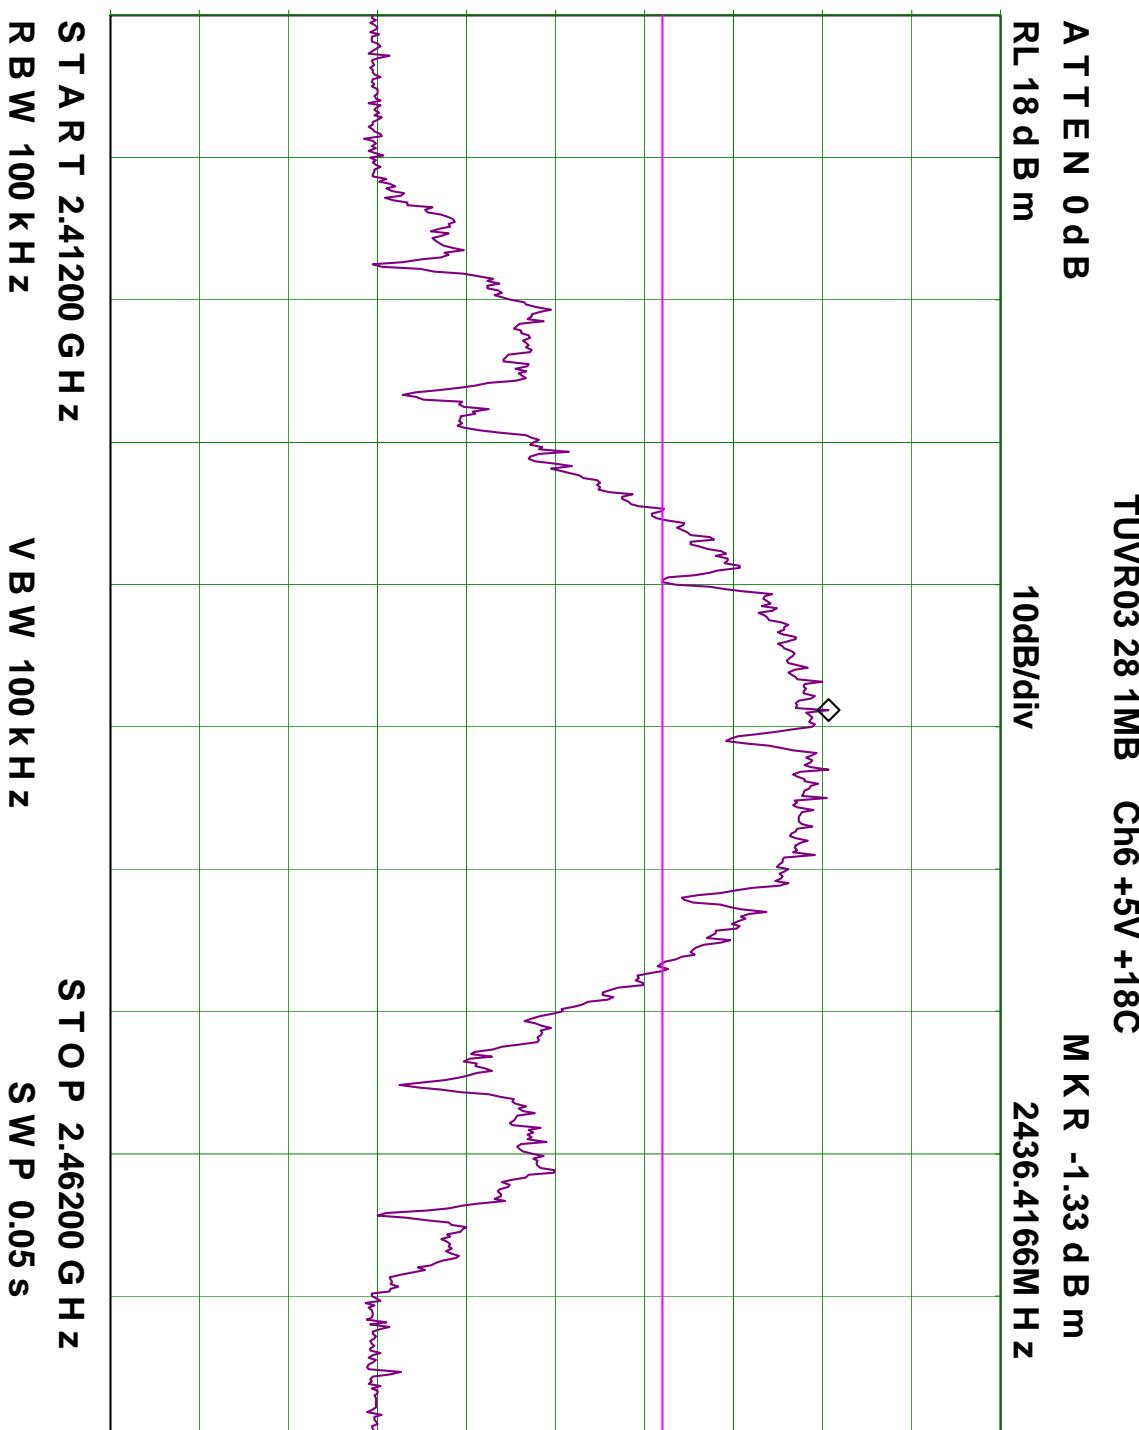


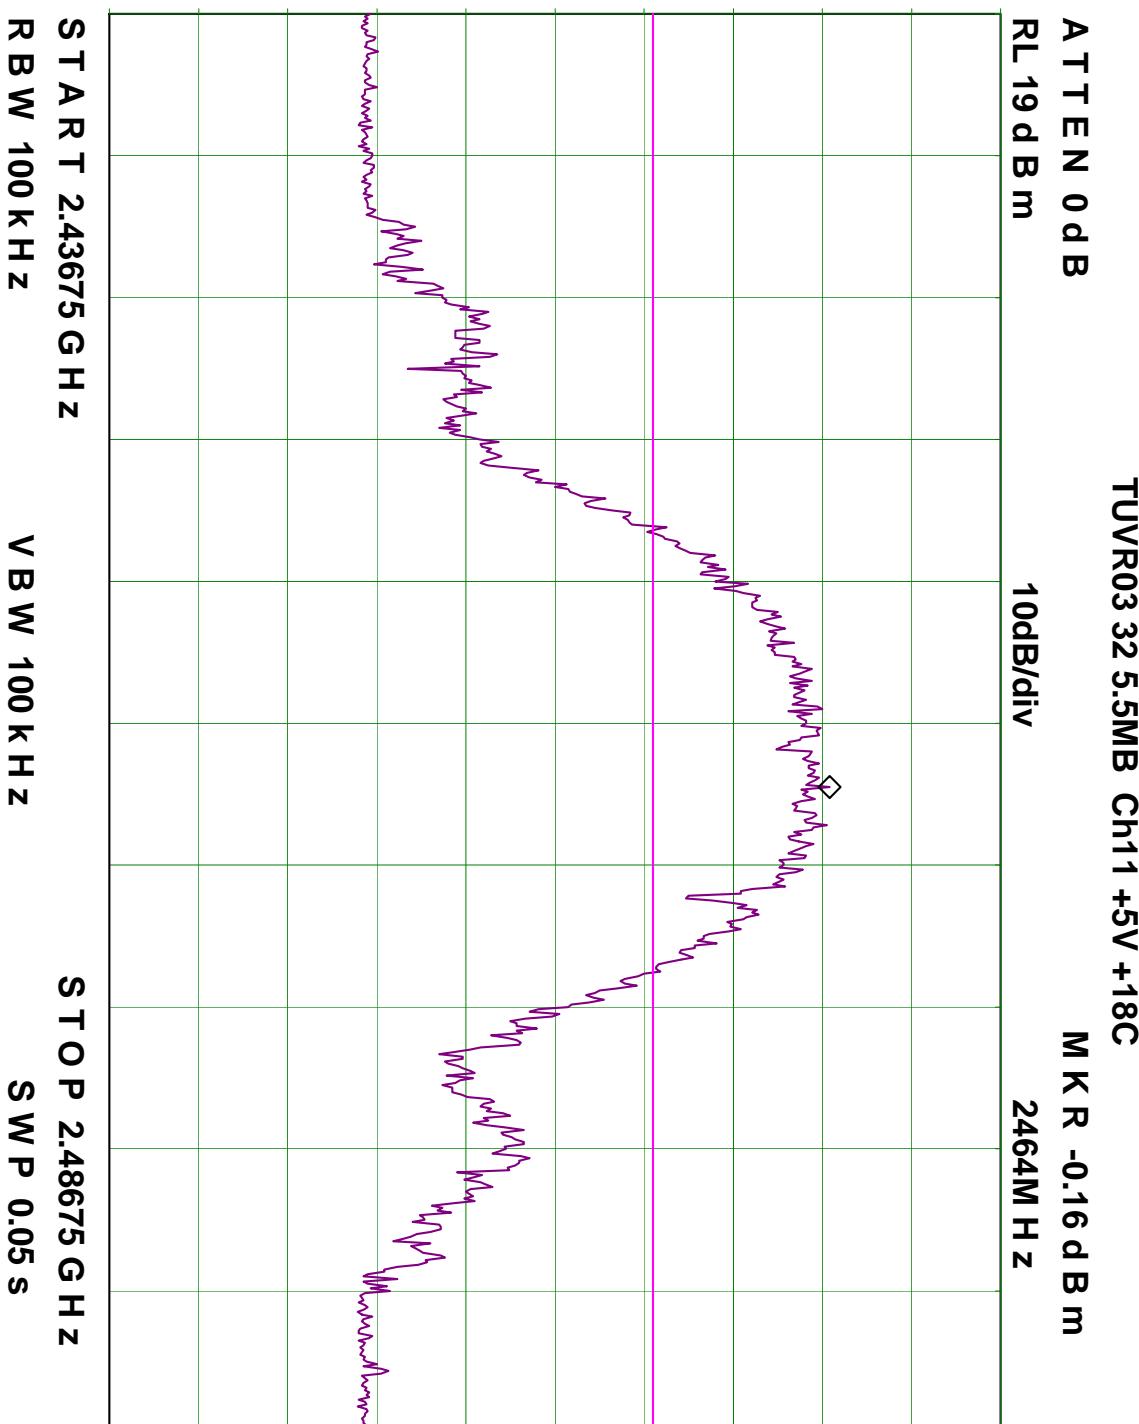

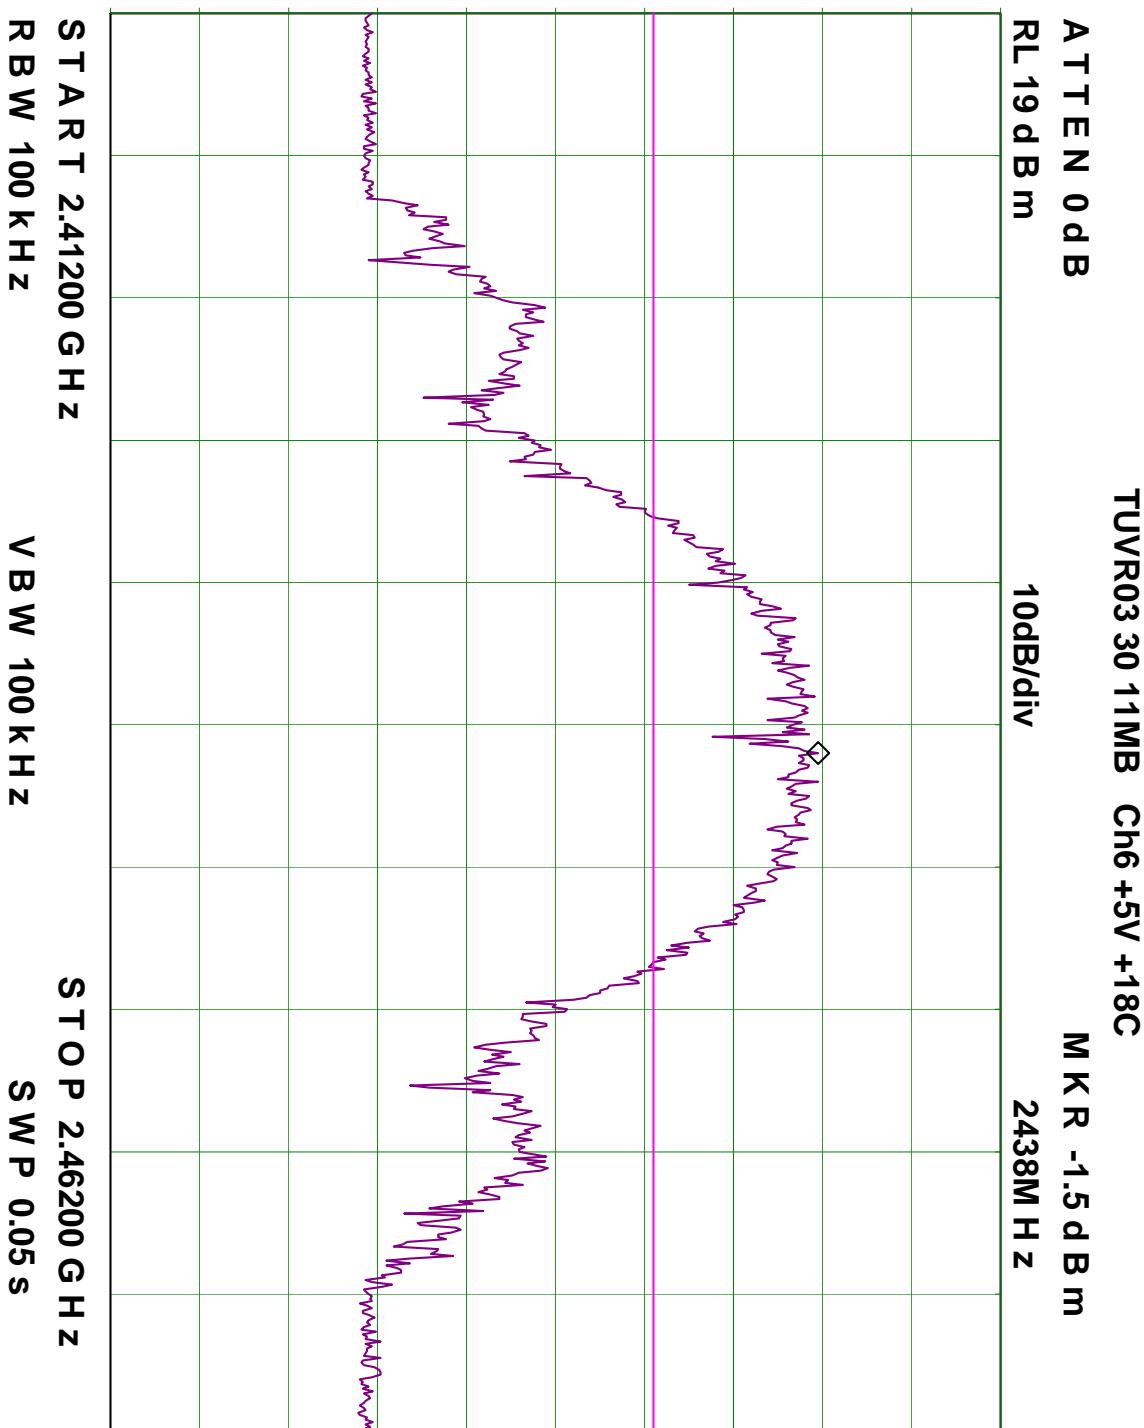


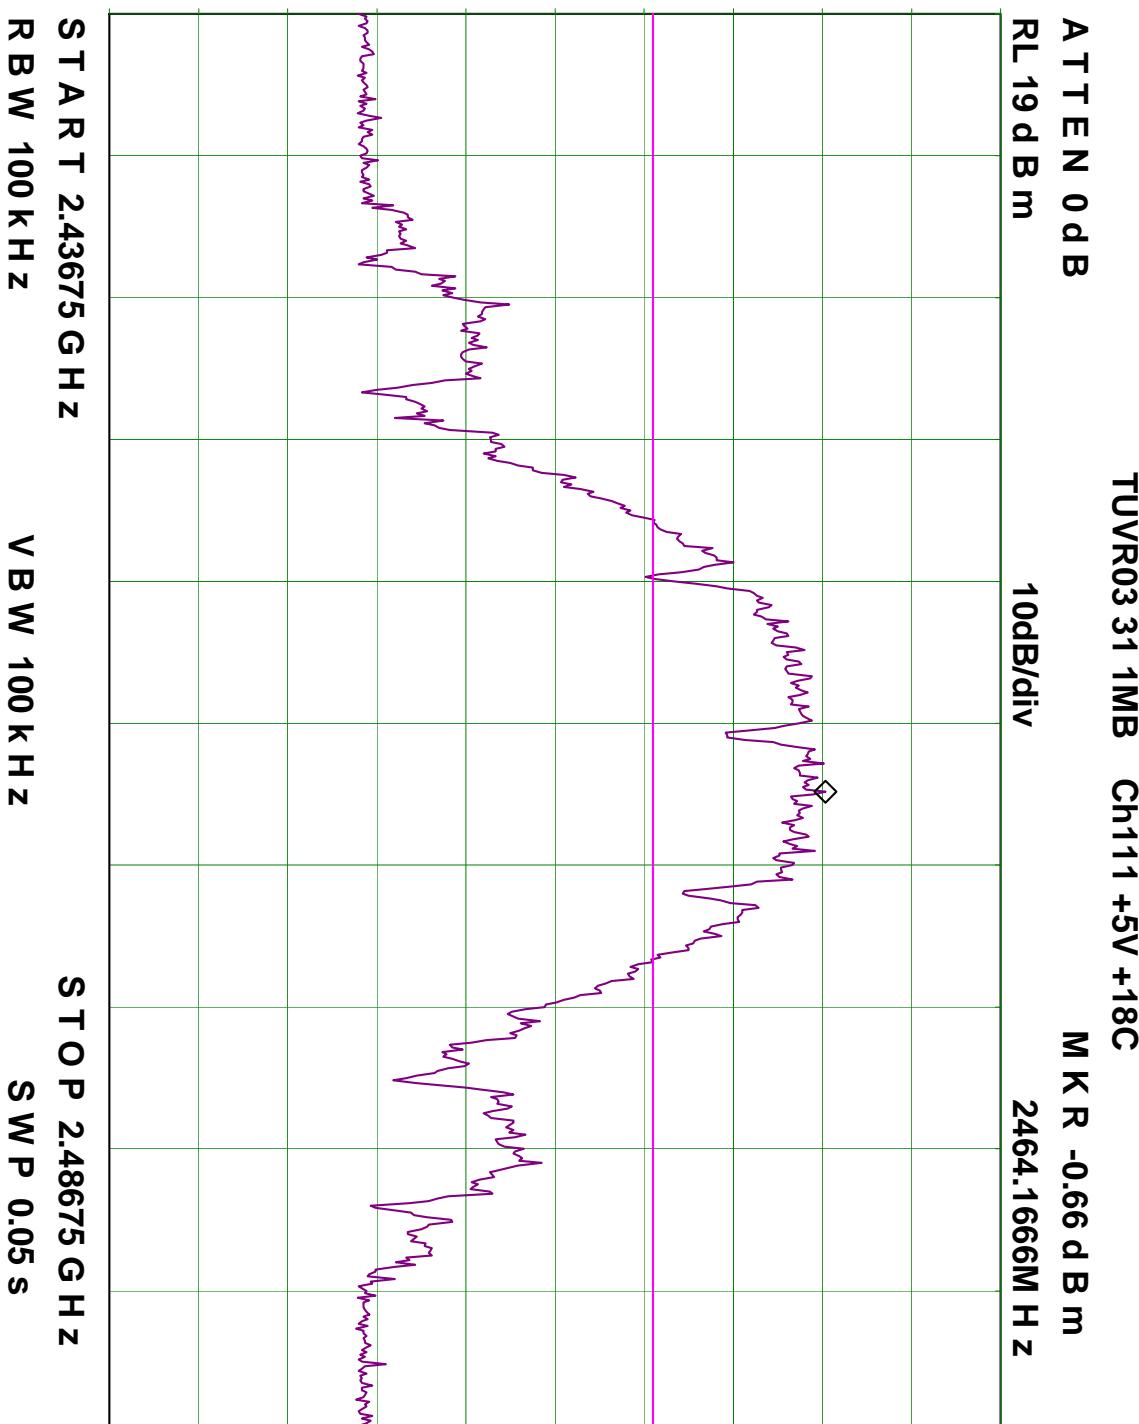

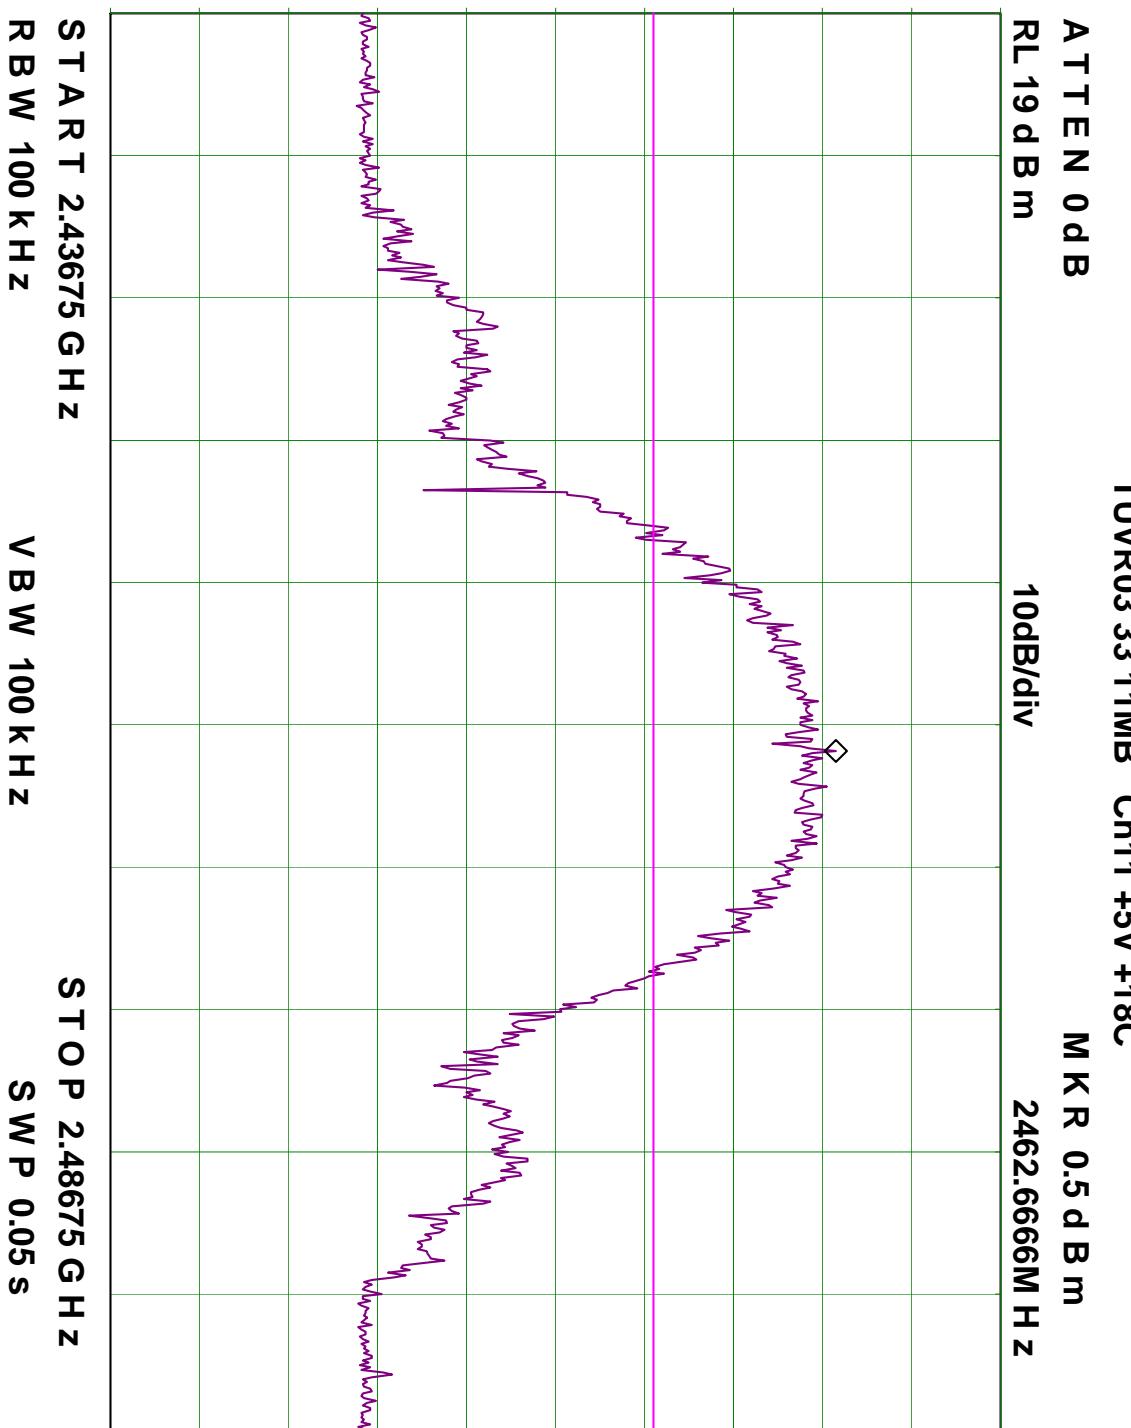

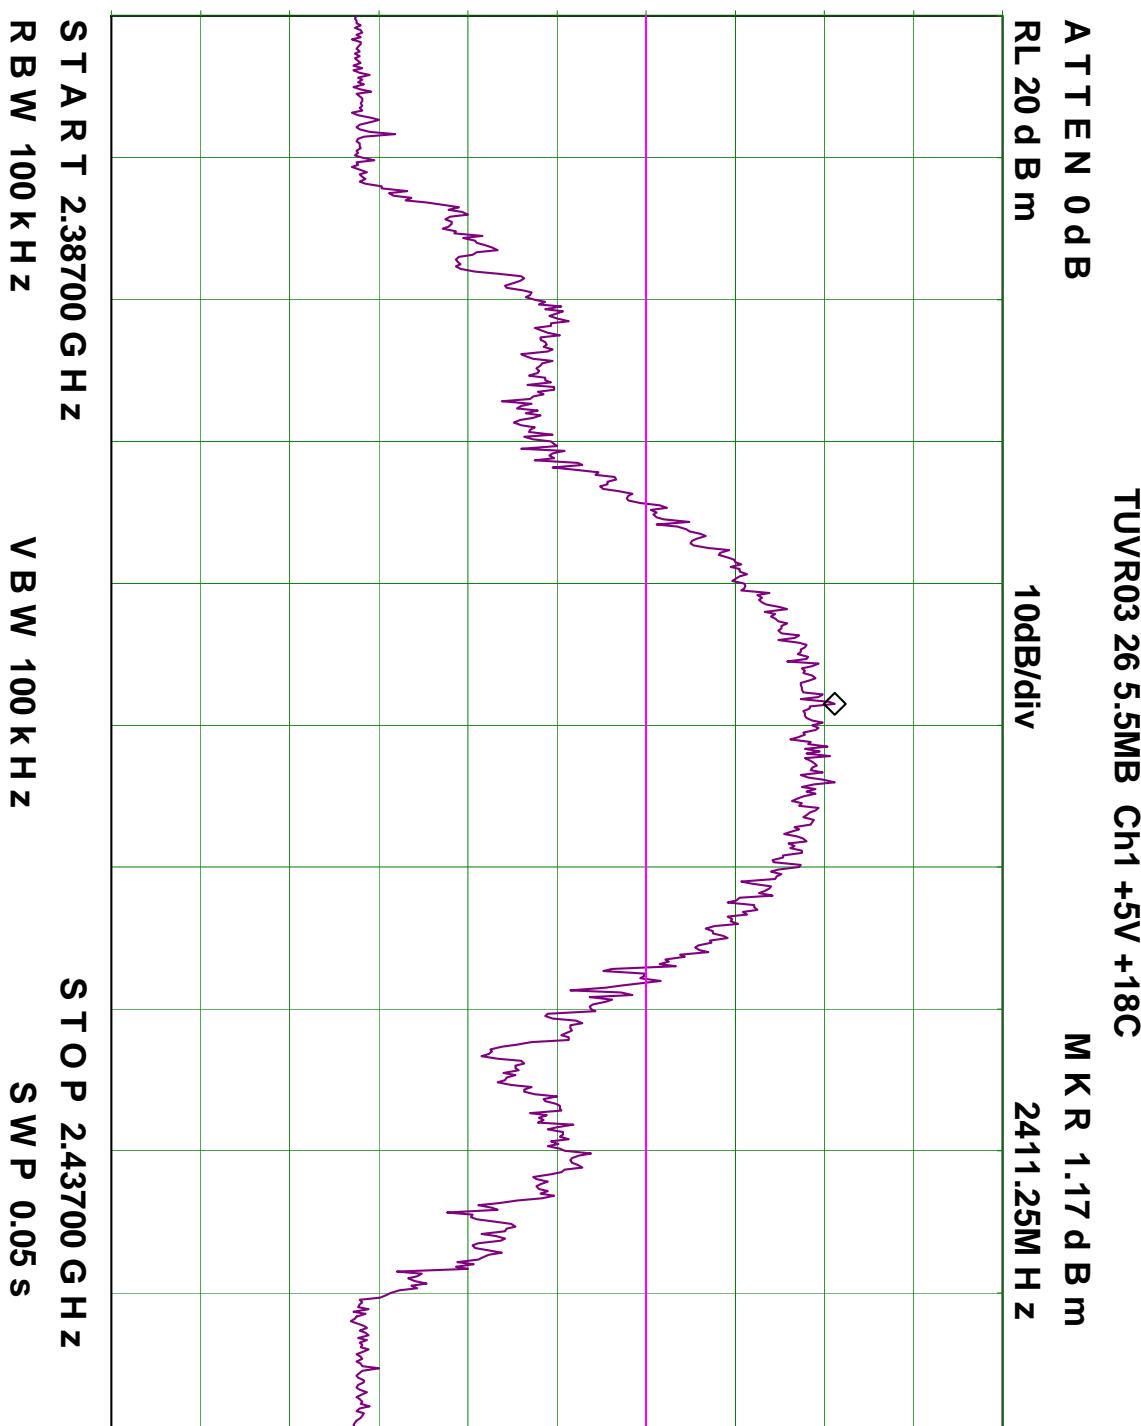


AC Wireline Conducted Emissions Line N (Neutral)

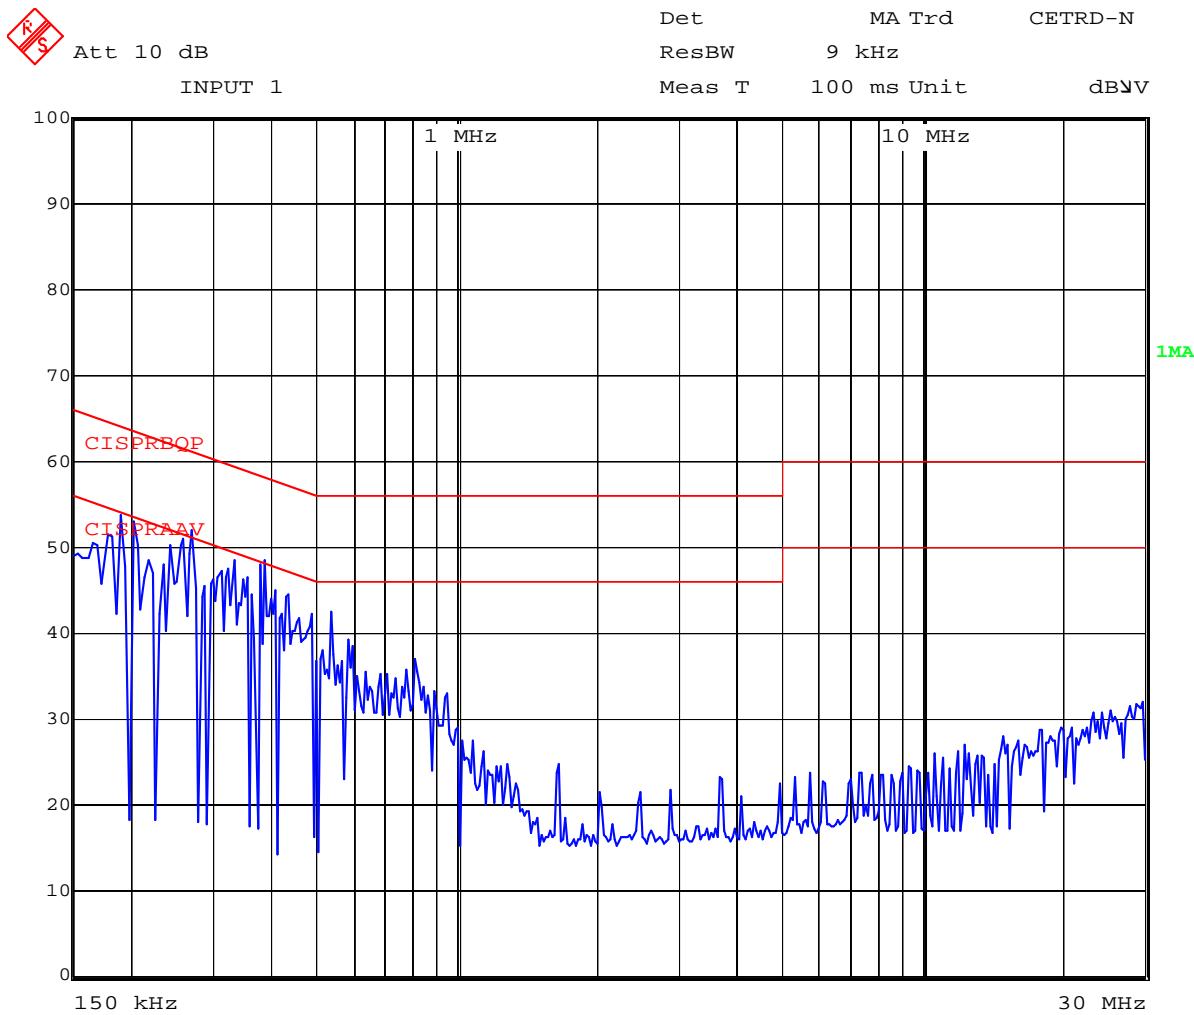


Date: 31.DEC.1996 23:35:30

AC Wireline Conducted Emissions Line L (Live)

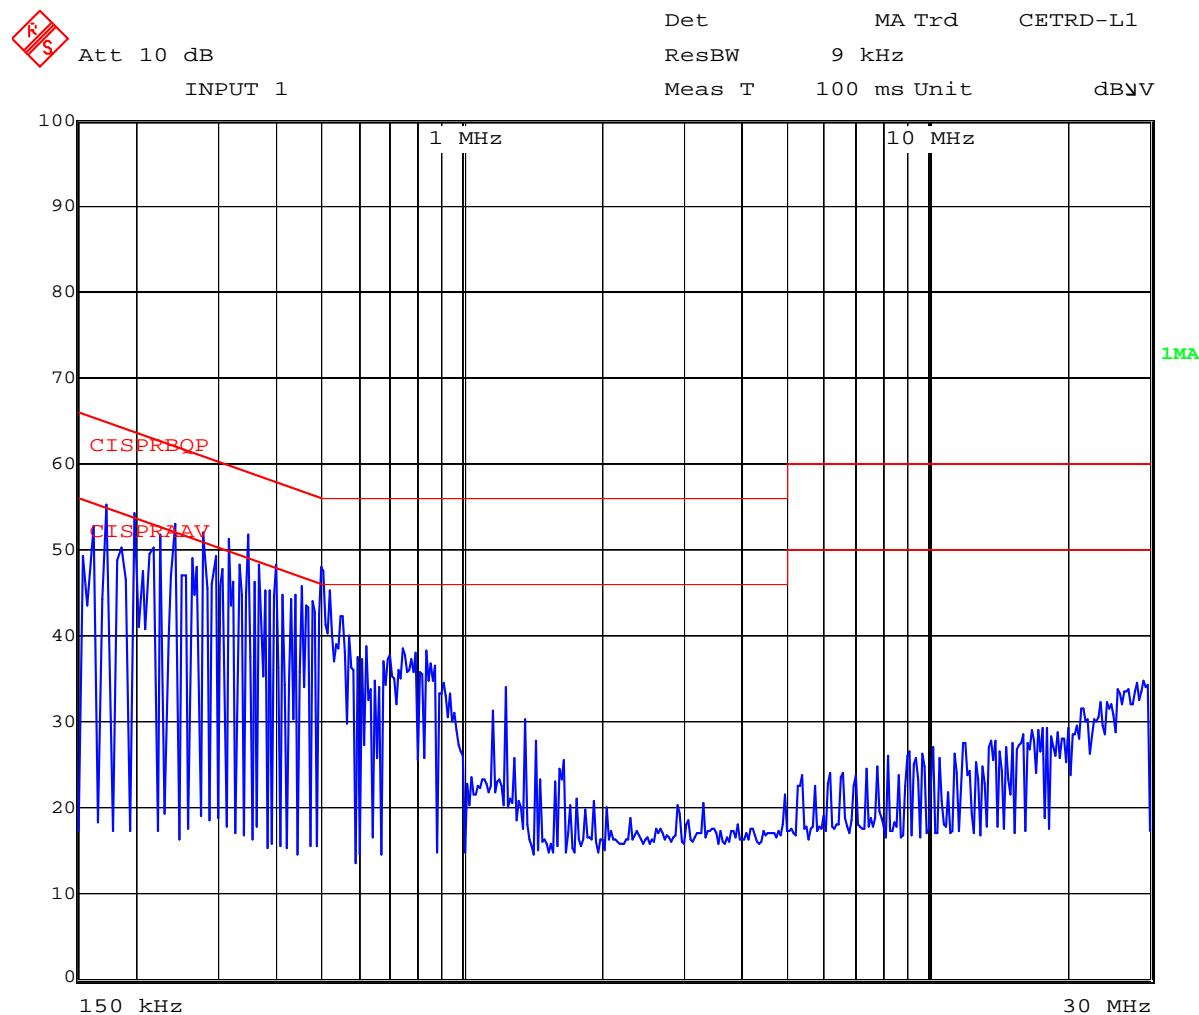


Date: 31.DEC.1996 23:25:36


Plots 38, 39, 40, 41 Notch Filter Response

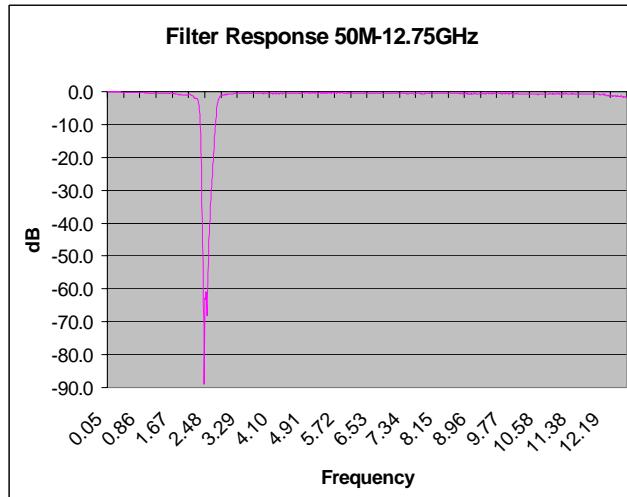


TUVR04a/38

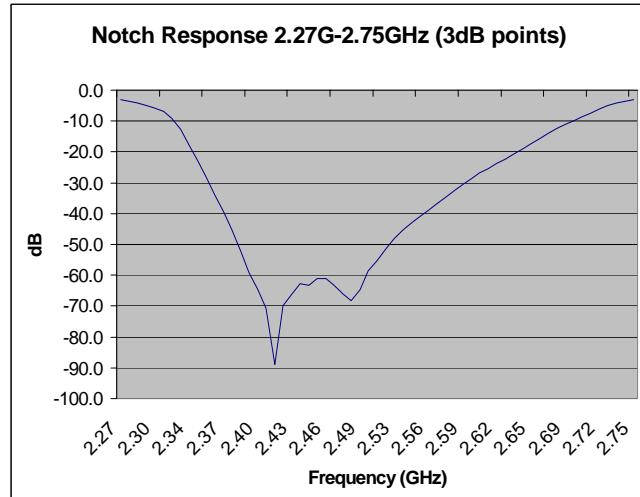

TUVR04a/39

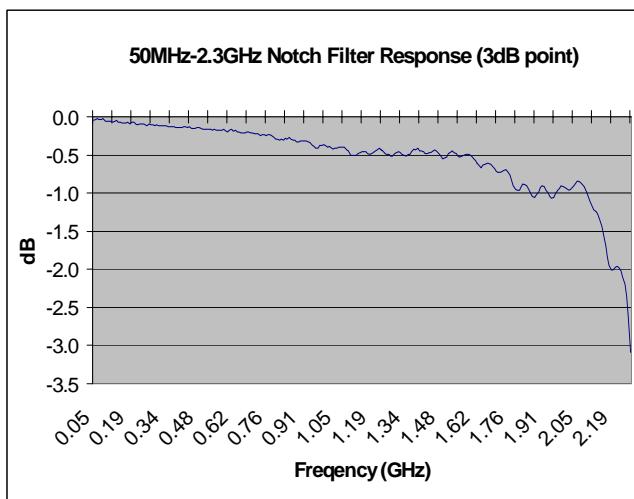

TUVR04a/40

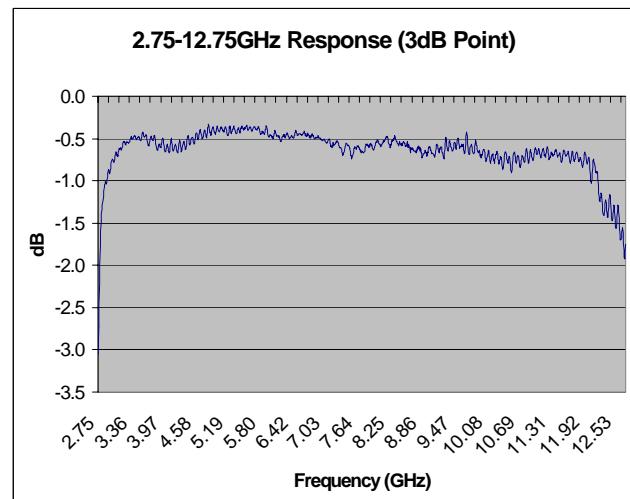

TUVR04a/41

7 Test Equipment

Asset Abbrev. #	Instrument	Manufacturer	Part #	Calibration Due Date	Serial #
Bar 1	Barometer/Termometer	Control Co.	4196	10 Jun '04	E2844
RVA 01	Variable Coaxial Attenuator	Weinschel	940-60-33	22 Jun '04	A6595
K-CBL 08	SMA Cable	Megaphase	Sucoflex 104	27 Jun '04	Unknown
K-CBL 10	SMA Cable	Megaphase	Sucoflex 104	24 Oct '04	Unknown
K-CBL 11	SMA Cable	Megaphase	Sucoflex 104	27 Jun '04	Unknown
15F50B001	BNC Cable	Megaphase	Unknown	26 Oct '04	Unknown
15F50B002	BNC Cable	Megaphase	Unknown	26 Oct '04	Unknown
10F50B003	BNC Cable	Megaphase	Unknown	26 Oct '04	Unknown
15F50N001	N-Type Cable	Megaphase	Unknown	26 Oct '04	Unknown
5F50N001	N-Type Cable	Megaphase	Unknown	26 Oct '04	Unknown
ANT 1	Antenna (30M-2GHz)	Schaffner and Chase	CBLG140A	Not Applicable	1195
ANT1-18	Horn Antenna	The Electro-Mechanics Company	3115	21 Oct '04	9205-3882
Notch 1	2.4GHz	Microtronics	BRM50701	Not Applicable	001
AMP 3	Amplifier (0.5-22GHz)	Com-Power	PA-122	Not Applicable	181910
ReCVR 1	EMI Receiver	Rhode & Schwartz	ESI 7	16 Mar '04	838496/007
LISN 1	LISN	Rhode & Schwartz	ESH3Z5	25 Oct '04	836679/006
PMtr 1	Power Meter	Hewlett Packard	437B	13 May '04	3125U13554
PSnsr 1	Power Sensor	Hewlett Packard	R8485A	16 Mar '04	3318A19694
PSnsr 3	Power Sensor	Hewlett Packard	8487D	14 May '04	3318A00371
S-Anlr 1	Spectrum Analyser	Hewlett Packard	8565E	30 Jun '04	3425A00181
SSwpr 4	Synthesized Sweeper	Hewlett Packard	83640A	30 Jun '04	2927A00105

8 Summary Of Test Results

Test results reported in this document relate only to the items tested

Parameter	C	NC	NT	NA	Reference to remark
Transmitter characteristics					
Bandwidth at 6dB	X				
Occupier Bandwidth 20dB	X				
Band-Edge	X				
Out of Band Emissions (20dB)	X				
Processing Gain				X	
Transmitter Output Power	X				
Power Spectral Density	X				
AC Wireline Conducted Emissions (450KHz-30MHz)	X				
Restricted Band Radiation (30MHz-1GHz)	X				
Restricted Band Radiation (1GHz-25GHz)	X				

Note: C: *The parameter is compliant with the requirements.*
 NC: *The parameter is not compliant with the requirements.*
 NT: *The parameter is not tested.*
 NA: *The test of this parameter is not applicable.*



3922 Valley Avenue, Suite "B"

Pleasanton, CA 94566, USA

Tel: 1.925.462.0304

Fax: 1.925.462.0306

www.micomlabs.com