

47 CFR PART 15 C - BLUETOOTH

TEST REPORT

of

Alcatel-Lucent My IC Phone Handset Bluetooth®

Trade Name: Alcatel-Lucent
Brand Name: Alcatel-Lucent
Model Name: My IC Phone Handset Bluetooth®
Report No.: SZ10090023E02
FCC ID.: OL3OT8HSBT
IC ID: 1737D-OT8HSBT

prepared for

Alcatel-Lucent Enterprise

1 Route du Dr A.Schweitzer 67408 ILLKIRCH(France)

prepared by

Certification

Shenzhen Morlab Communications Technology Co., Ltd.

Morlab Laboratory

3/F, Electronic Testing Building, Shahe Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



CTIA Authorized Test Lab

LAB CODE 20081223-00

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

TABLE OF CONTENTS

1.	TEST CERTIFICATION.....	4
2.	GENERAL INFORMATION	5
2.1	EUT Description	5
2.2	Test Standards and Results	6
2.3	Facilities and Accreditations	7
2.3.1	Facilities	7
2.3.2	Test Environment Conditions.....	7
3.	47 CFR PART 15C REQUIREMENTS.....	8
3.1	Number of Hopping Frequency.....	8
3.1.1	Requirement	8
3.1.2	Test Description	8
3.1.3	Test Result.....	8
3.2	Peak Output Power	11
3.2.1	Requirement	11
3.2.2	Test Description	11
3.2.3	Test Result.....	11
3.3	20dB Bandwidth	18
3.3.1	Definition	18
3.3.2	Test Description	18
3.3.3	Test Result.....	18
3.4	Carried Frequency Separation.....	25
3.4.1	Definition	25
3.4.2	Test Description	25
3.4.3	Test Result.....	25
3.5	Time of Occupancy (Dwell time).....	27
3.5.1	Requirement	27
3.5.2	Test Description	27
3.5.3	Test Result.....	27
3.6	Conducted Spurious Emissions	32
3.6.1	Requirement	32
3.6.2	Test Description	32

3.6.3	Test Result	32
3.7	Band Edge	43
3.7.1	Requirement	43
3.7.2	Test Description	43
3.7.3	Test Result	44
3.8	Conducted Emission	52
3.9	Radiated Emission	53
3.9.1	Requirement	53
3.9.2	Test Description	53
3.9.3	Test Result	55

Change History		
Issue	Date	Reason for change
1.0	November 08, 2010	First edition
2.0	December 1, 2010	Second edition

1. TEST CERTIFICATION

Equipment under Test: Alcatel-Lucent My IC Phone Handset Bluetooth®

Trade Name: Alcatel-Lucent

Model Name: My IC Phone Handset Bluetooth®

FCC ID: OL3OT8HSBT

IC ID: 1737D-OT8HSBT

Applicant: Alcatel-Lucent Enterprise

1 Route du Dr A.Schweitzer67408 ILLKIRCH(France)

Manufacturer: Alcatel-Lucent Enterprise

1 Route du Dr A.Schweitzer67408 ILLKIRCH(France)

Test Standards: 47 CFR Part 15 Subpart C
RSS-GEN and RSS-210

Test Date(s): September 11, 2010 - November 05, 2010

Test Result: PASS

* We Hereby Certify That:

The equipment under test was tested by Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC/IC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by: *Cao Shadong* Dated: *2011.1.17*
Cao Shadong

Reviewed by: *Huang Pulong* Dated: *2011.1.17*
Huang Pulong

Approved by: *Zeng Dexin* Dated: *2011.1.17*
Zeng Dexin



2. GENERAL INFORMATION

2.1 EUT Description

EUT Type: Alcatel-Lucent My IC Phone Handset Bluetooth®
Model Name: My IC Phone Handset Bluetooth®
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: 3MG26021AAAA
Software Version: BIN= 0.1005 DFU32
Modulation Type.....: Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps),
8-DPSK(EDR 3Mbps))
Frequency: The frequency range used is 2400MHz – 2483.5MHz (79 channels,
at intervals of 1MHz);
The frequency block is 2400MHz to 2483.5MHz.
Power Supply: Battery
Brand Name: SAFT
Model No.: 1VHAA1500
Serial No.: (n.a. marked #1 by test site)
Capacitance: 1500mAh
Rated Voltage: 1.2V
Charge Limit: 1.4V
Manufacturer: SAFT BATTERIES
Manufacturer Address: 12 Rue Sadi Carnot 93170 Bagnolet-
France

Note 1: The EUT is a MyIC Phone Bluetooth Handset WB, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C and RSS-210 (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC/IC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices
2	RSS-210: Issue 7, June 2007	Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

Test detailed items/section required by FCC/IC rules and results are as below:

No.	Section in CFR 47	Section in RSS-GEN or RSS-210	Description	Result
1	15.247(a)	A8.1 (4)	Number of Hopping Frequency	PASS
2	15.247(b)	A8.4 (2)	Peak Output Power	PASS
3	15.247(a)	A8.1 (1)	20dB Bandwidth	PASS
4	15.247(a)	A8.1 (2)	Carrier Frequency Separation	PASS
5	15.247(a)	A8.1 (4)	Time of Occupancy (Dwell time)	PASS
6	15.247(c)	A8.5	Conducted Spurious Emission	PASS
7	15.247(c)	A8.5	Band Edge	PASS
8	15.207	7.2.2	Conducted Emission	N.A
9	15.209 15.247(c)	A8.5	Radiated Emission	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in DA-00-705.

2.3 Facilities and Accreditations

2.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22; the FCC registration number is 741109, and the IC registration number is 7183A.

2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

3. 47 CFR PART 15C REQUIREMENTS


3.1 Number of Hopping Frequency

3.1.1 Requirement

According to FCC §15.247(a)(1)(iii) and RSS-210 A8.1 (4), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 75 hopping frequencies.

3.1.2 Test Description

A. Test Setup:

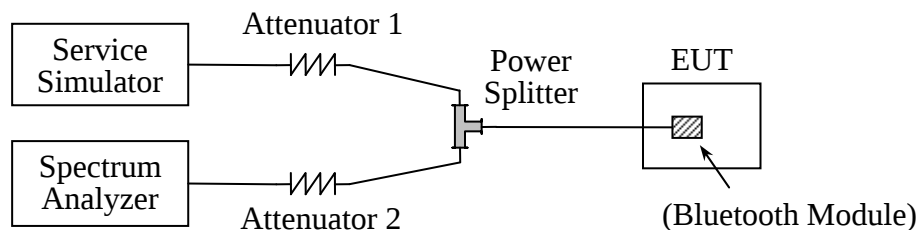

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Service Simulator	Agilent	E5515C	GB43130131	2009.09	2year
Spectrum Analyzer	Agilent	E7405A	US44210471	2009.09	2year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)


3.1.3 Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.



A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	75	Plot A	PASS
π /4-DQPSK	2400 - 2483.5	79	75	Plot B	PASS
8-DPSK	2400 - 2483.5	79	75	Plot C	PASS

B. Test Plot:

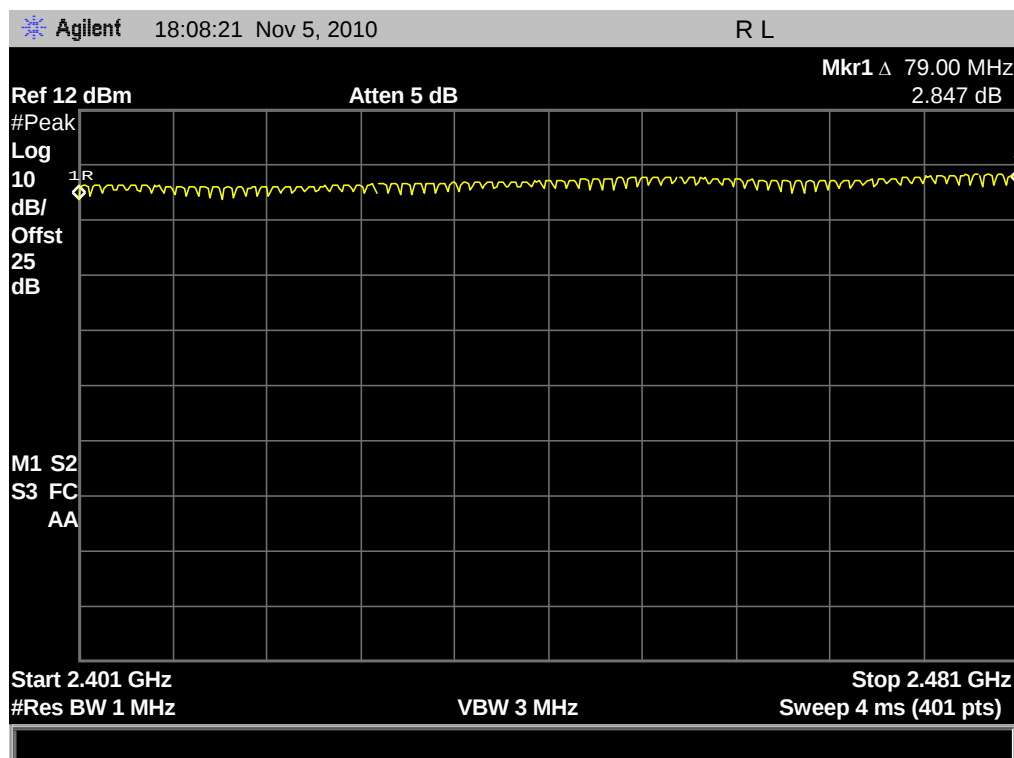

(Plot A: GFSK)

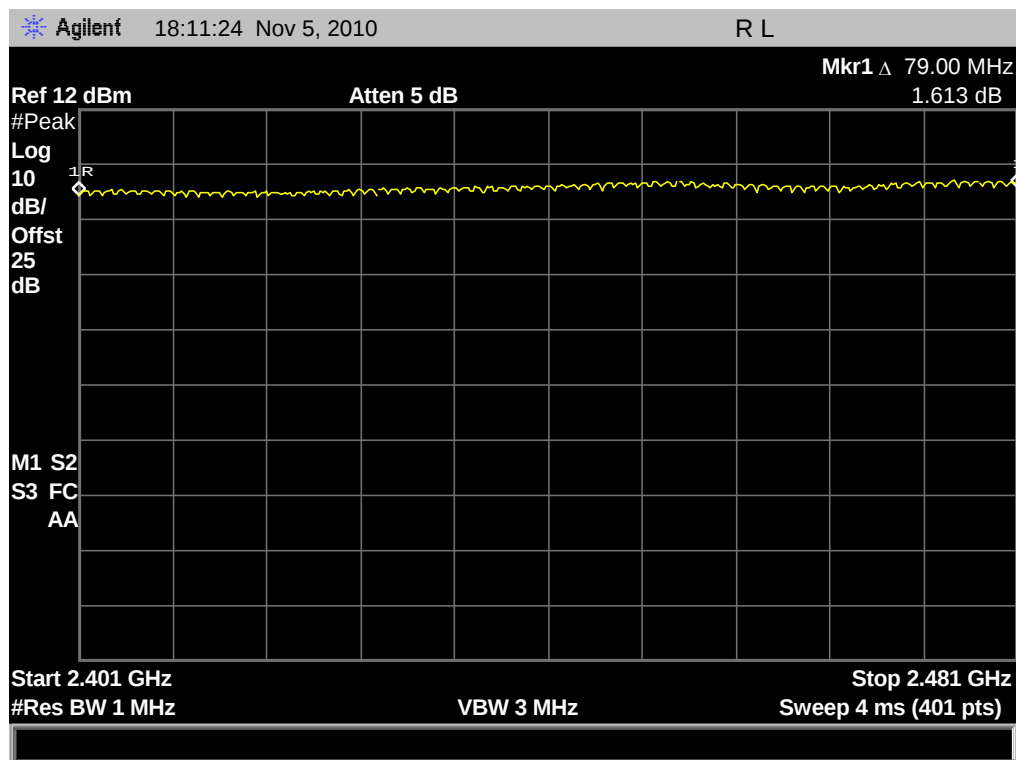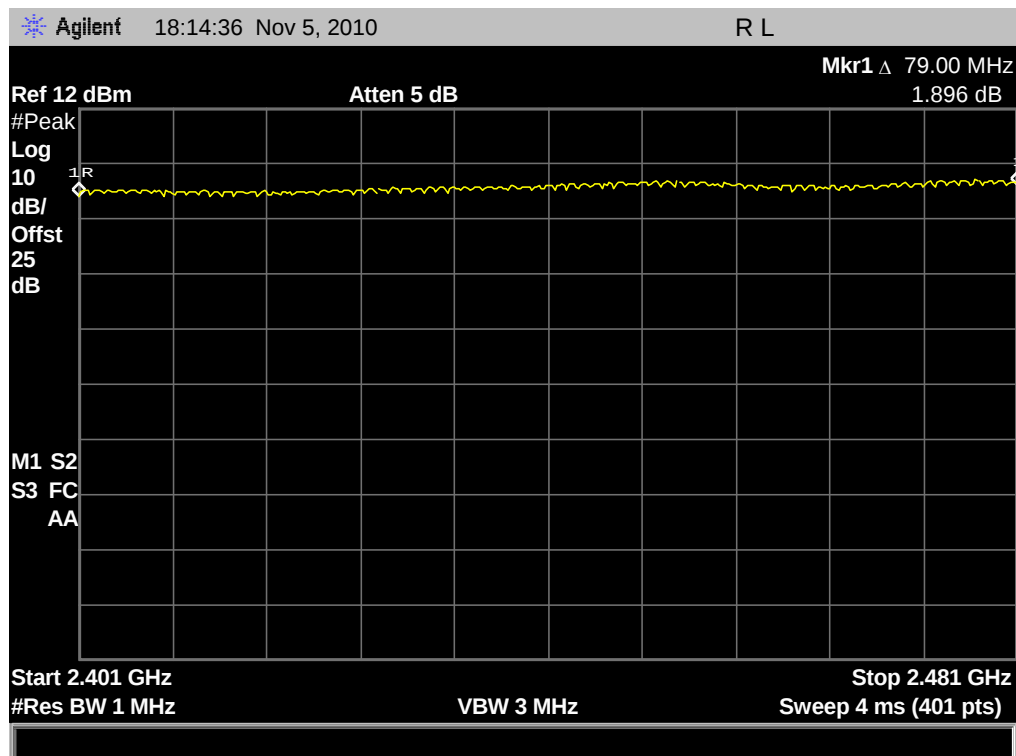
(Plot B: $\pi/4$ -DQPSK)


(Plot C: 8- DPSK)

3.2 Peak Output Power

3.2.1 Requirement

According to FCC §15.247(b)(1) and RSS-210 A8.4 (2), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.2.2 Test Description

See section 3.1.2 of this report.

3.2.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:


GFSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	-1.74	0.66E-3	Plot A	30	1	PASS
39	2441	-0.87	0.81E-3	Plot B			PASS
78	2480	0.15	1.03 E-3	Plot C			PASS


B. Test Plot:

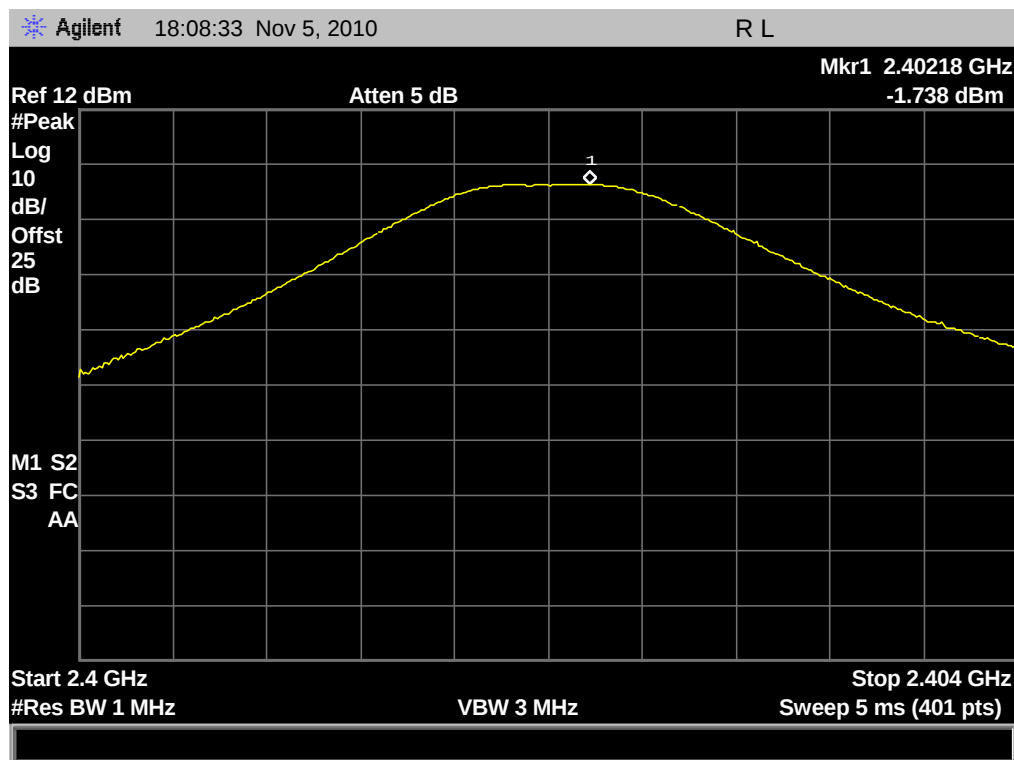

(Plot A: Channel = 0)

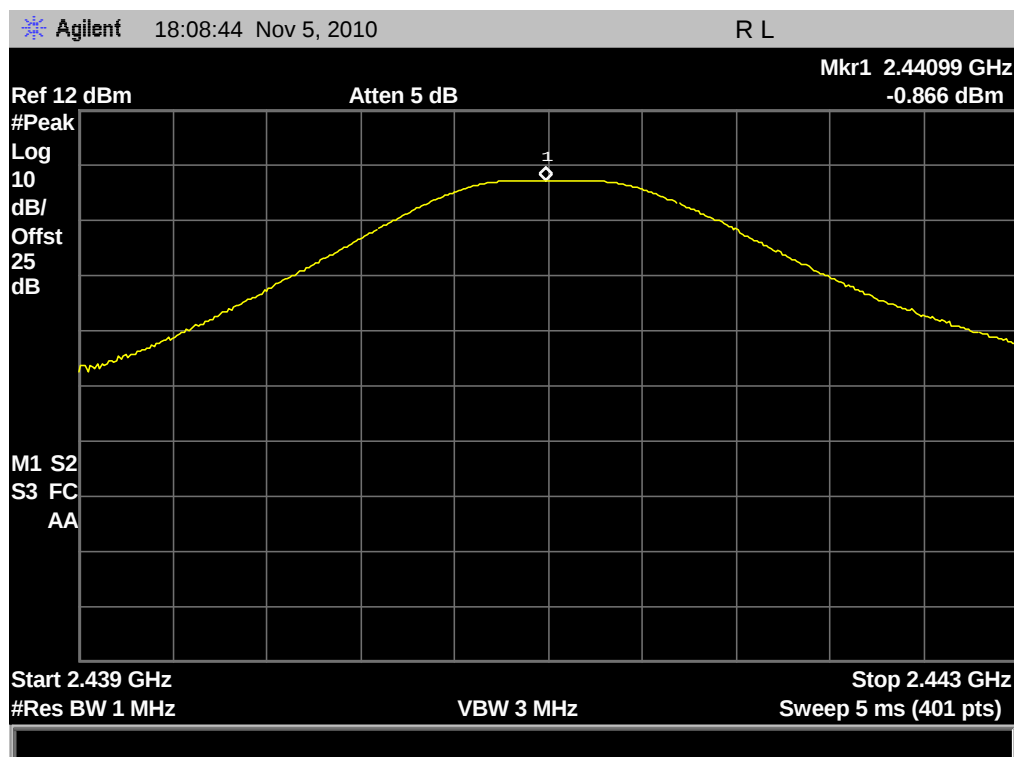

(Plot B: Channel = 39)

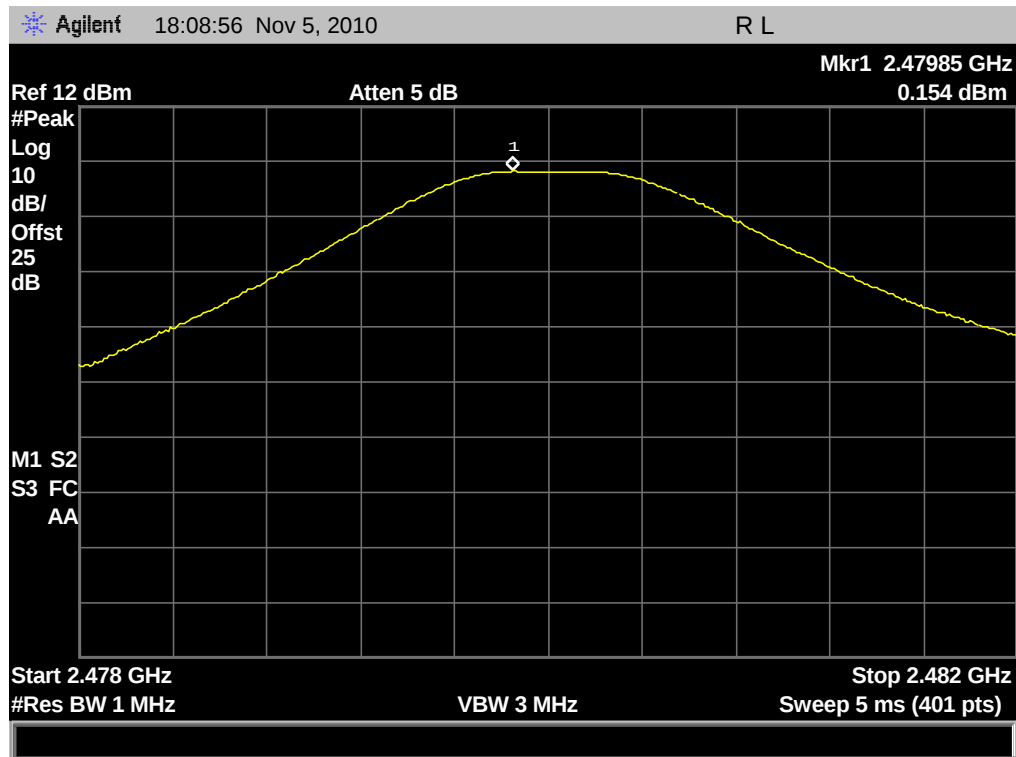


(Plot C: Channel = 78)

C. Test Verdict:


$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	-1.63	0.68E-3	Plot D	30	1	PASS
39	2441	-0.79	0.83E-3	Plot E			PASS
78	2480	-0.15	0.96E-3	Plot F			PASS


D. Test Plot:

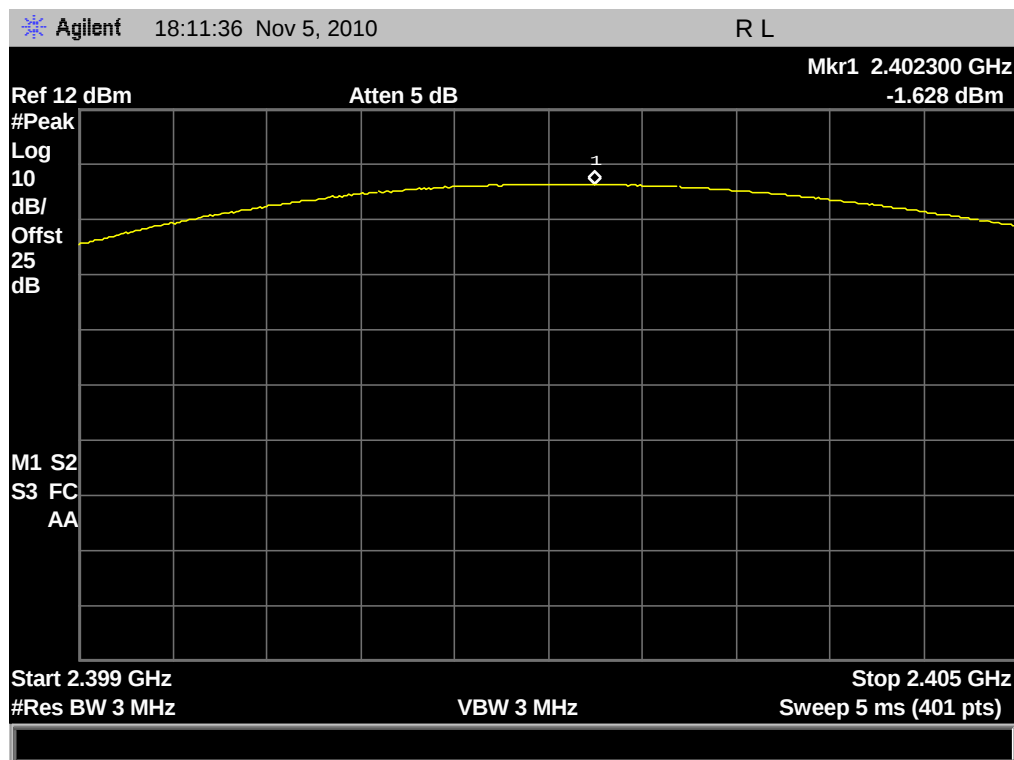

(Plot D: Channel = 0)

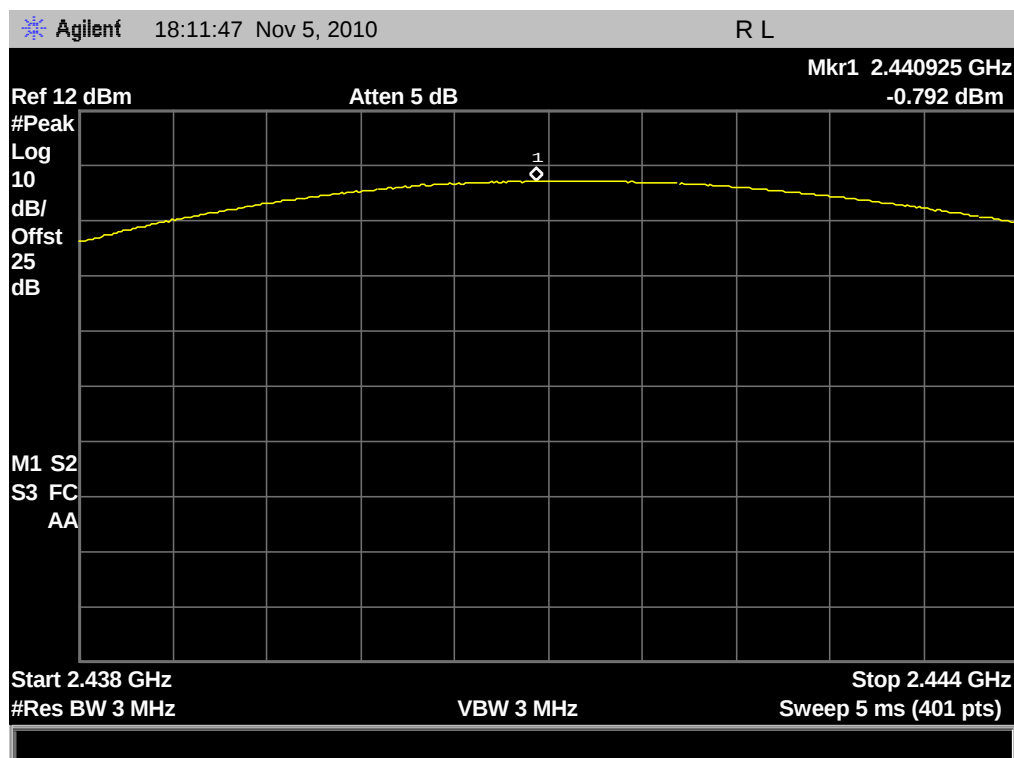

(Plot E: Channel = 39)

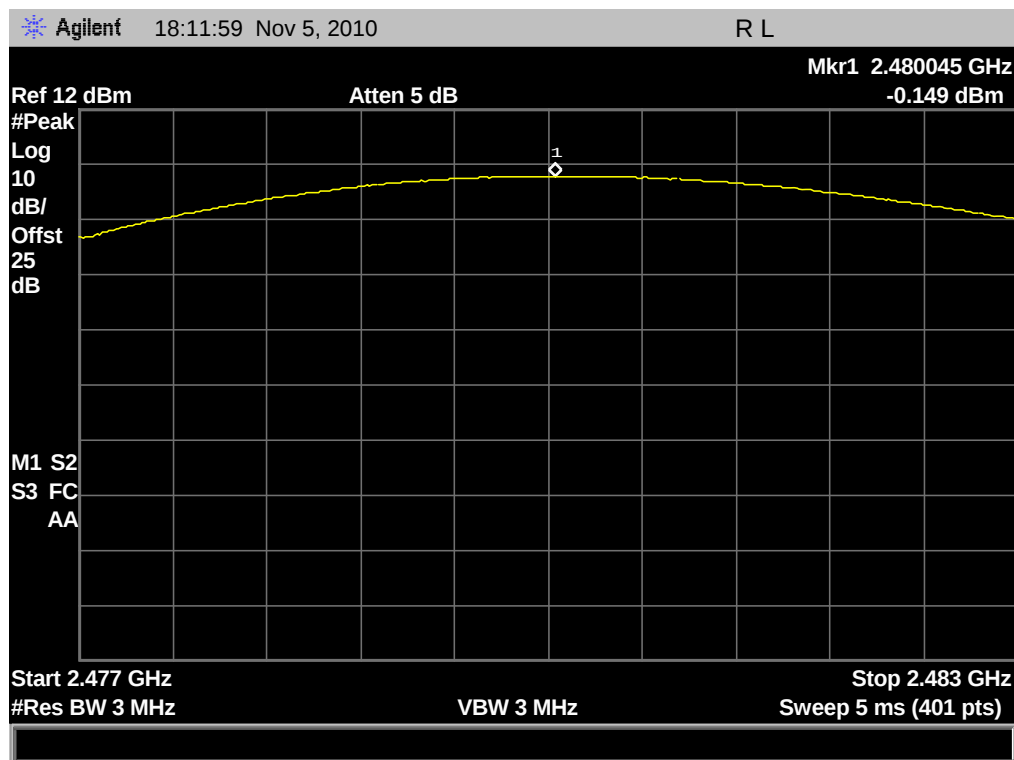


(Plot F: Channel =78)

E. Test Verdict:


8-DPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	-1.67	0.68E-3	Plot G	30	1	PASS
39	2441	-0.82	0.82E-3	Plot H			PASS
78	2480	-0.13	0.97E3	Plot I			PASS


F. Test Plot:

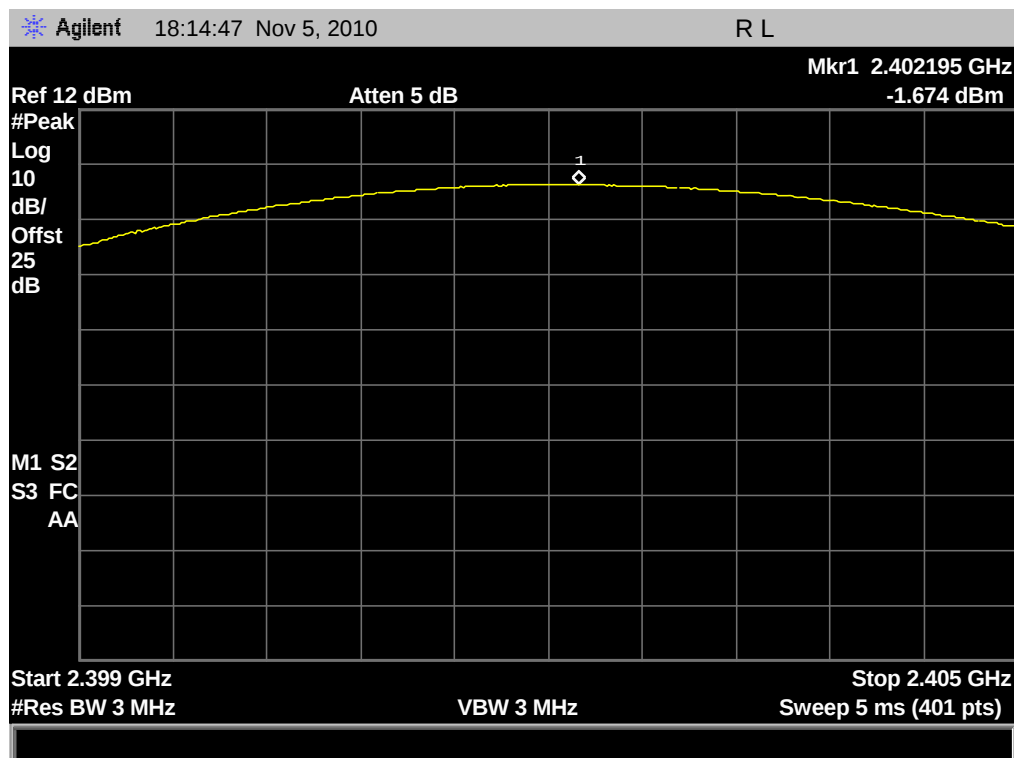

(Plot G: Channel = 0)

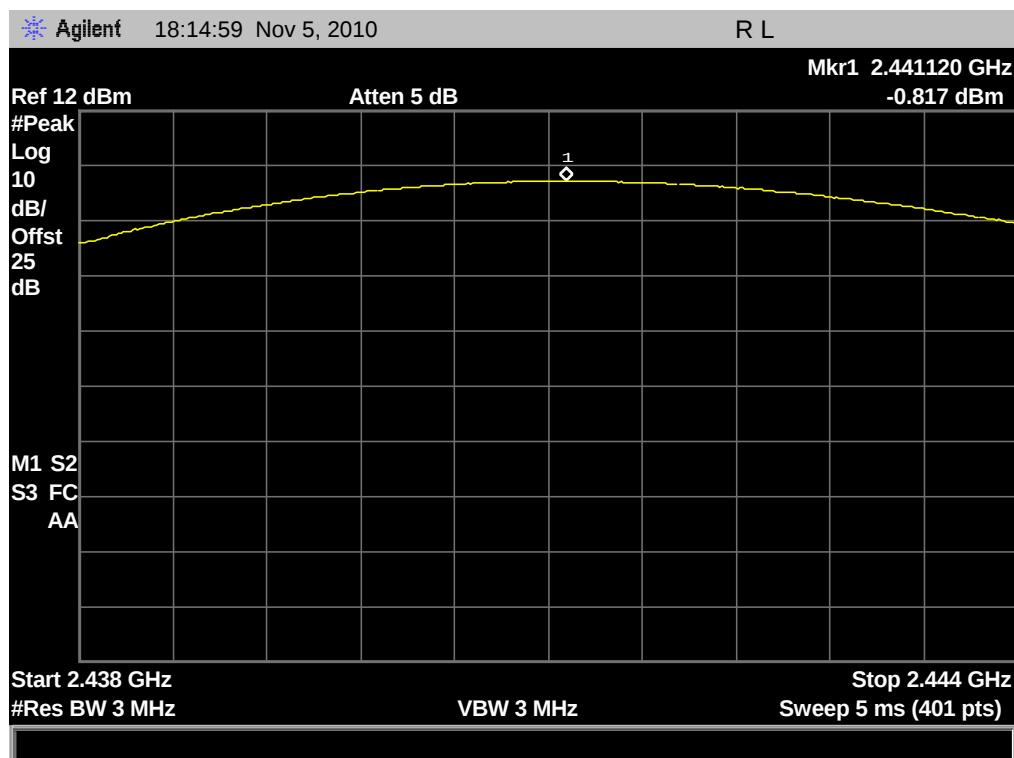

(Plot H: Channel = 39)

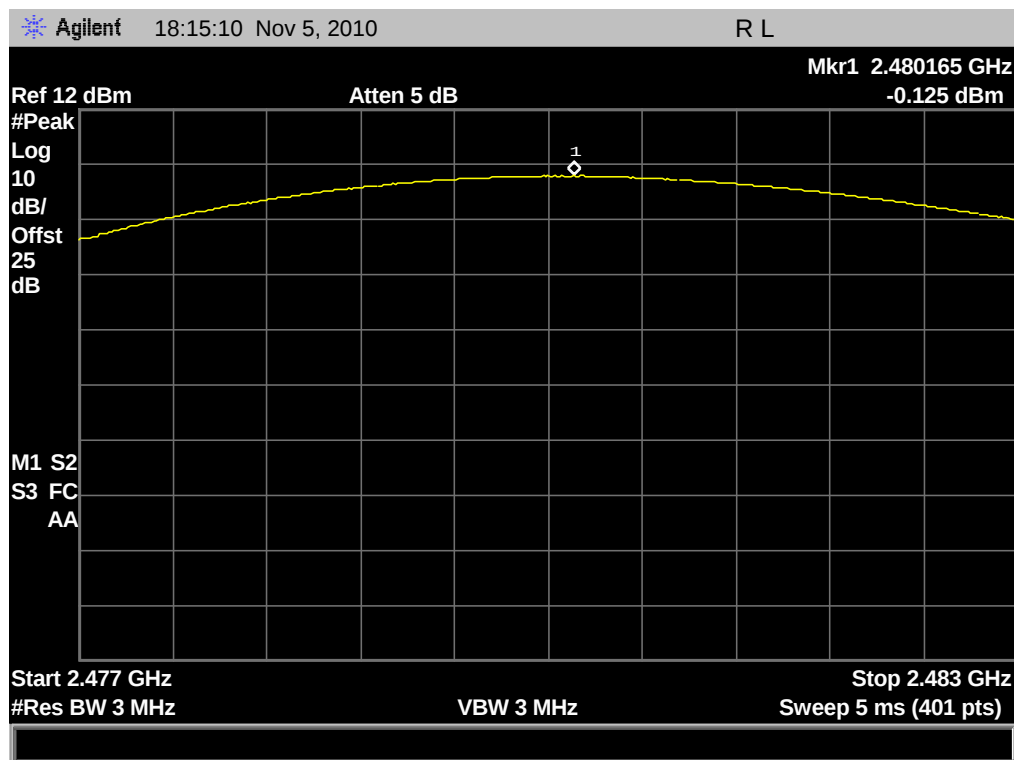

(Plot I: Channel = 78)

3.3 20dB Bandwidth

3.3.1 Definition

According to FCC §15.247(a)(1) and RSS-210 A8.1 (1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

3.3.2 Test Description

See section 3.1.2 of this report.

3.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


A. Test Verdict:

GFSK Mode


The maximum 20dB bandwidth measured is 926.25KHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (KHz)	Refer to Plot
0	2402	926.25	Plot A
39	2441	922.50	Plot B
78	2480	930.00	Plot C


B. Test Plot:

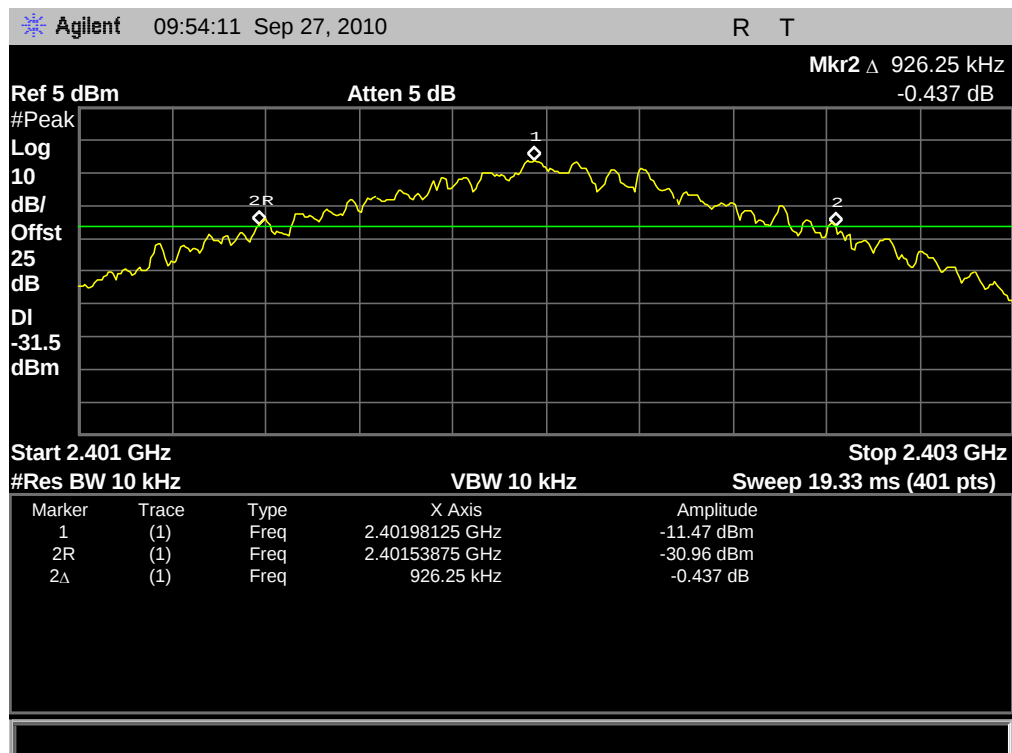

(Plot A: Channel = 0)

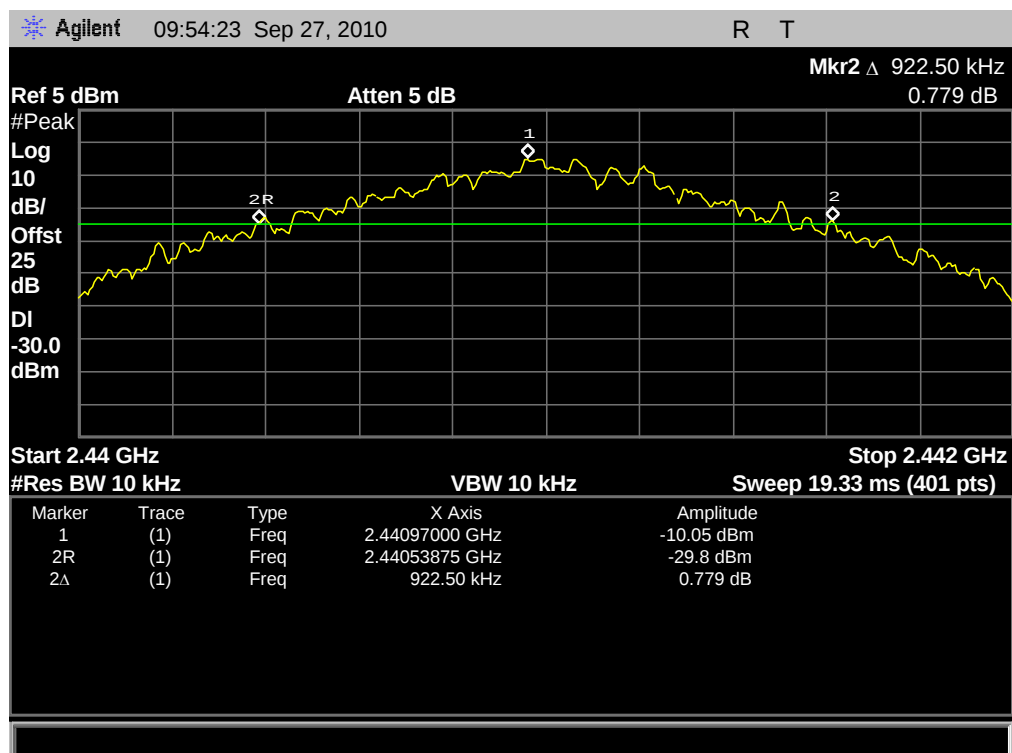

(Plot B: Channel = 39)

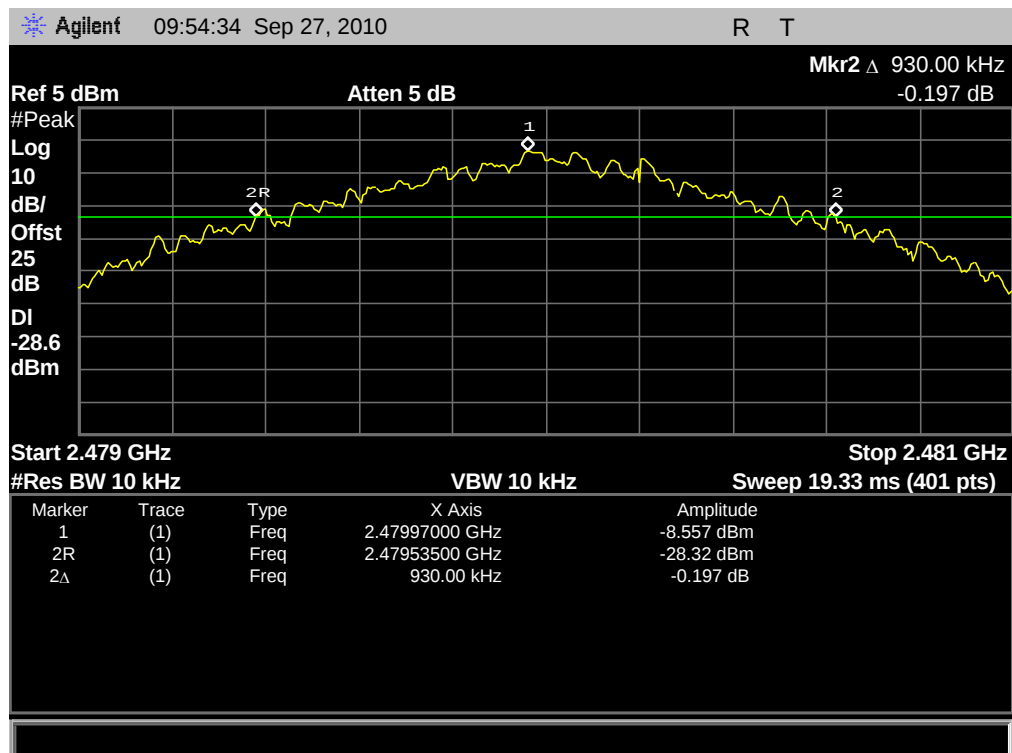

(Plot C: Channel = 78)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


The maximum 20dB bandwidth measured is 1.316MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MKHz)	Refer to Plot
0	2402	1.316	Plot D
39	2441	1.316	Plot E
78	2480	1.316	Plot F


D. Test Plot:

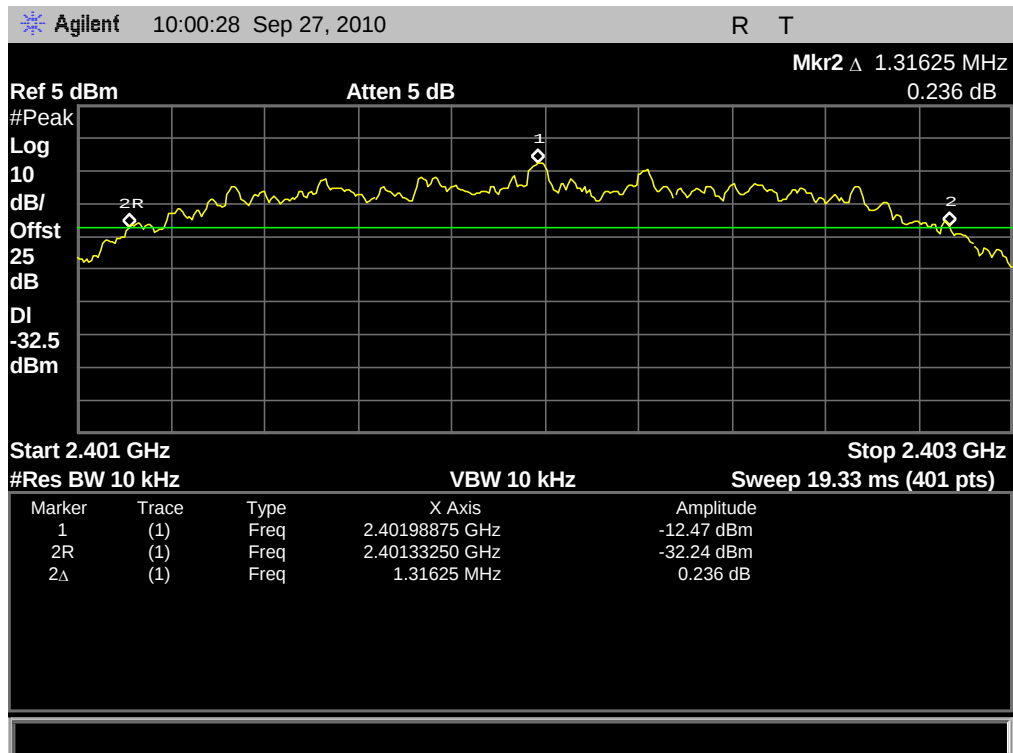

(Plot D: Channel = 0)

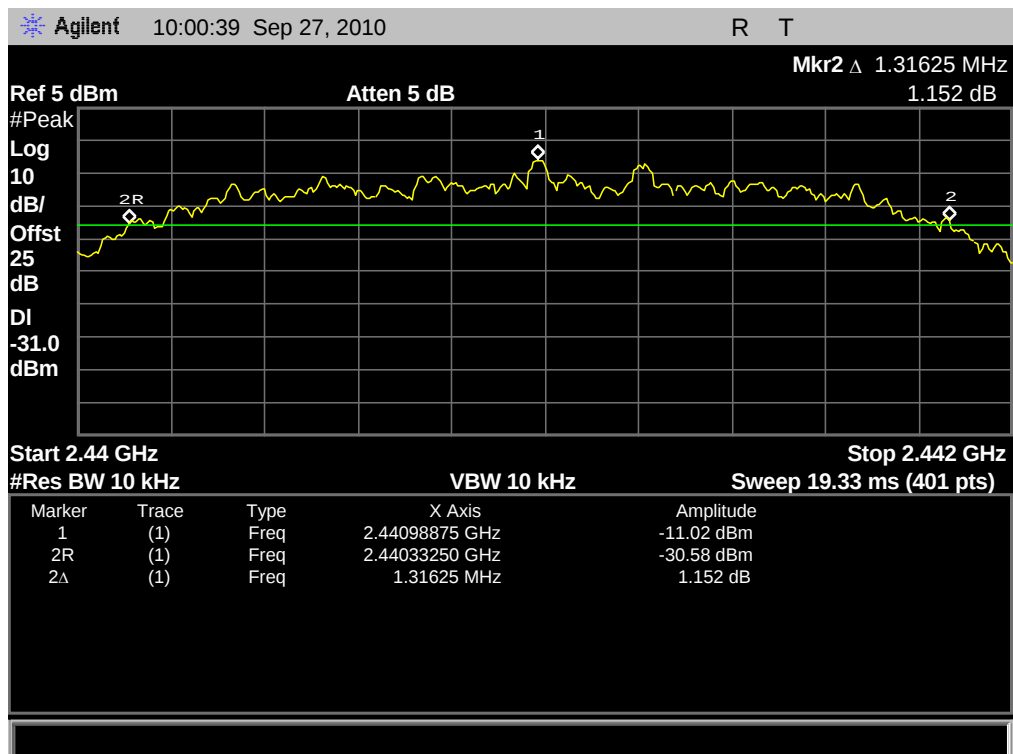

(Plot E: Channel = 39)

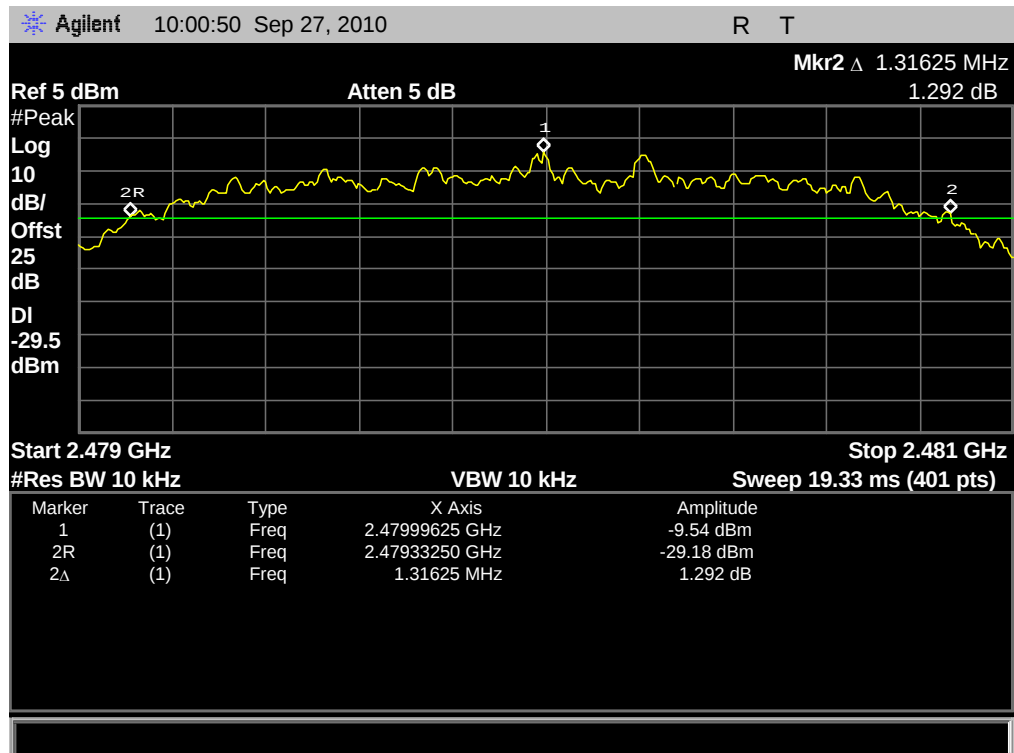

(Plot F: Channel = 78)


E. Test Verdict:

8-DPSK Mode


The maximum 20dB bandwidth measured is 1.309MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MKHz)	Refer to Plot
0	2402	1.309	Plot G
39	2441	1.305	Plot H
78	2480	1.275	Plot I


F. Test Plot:

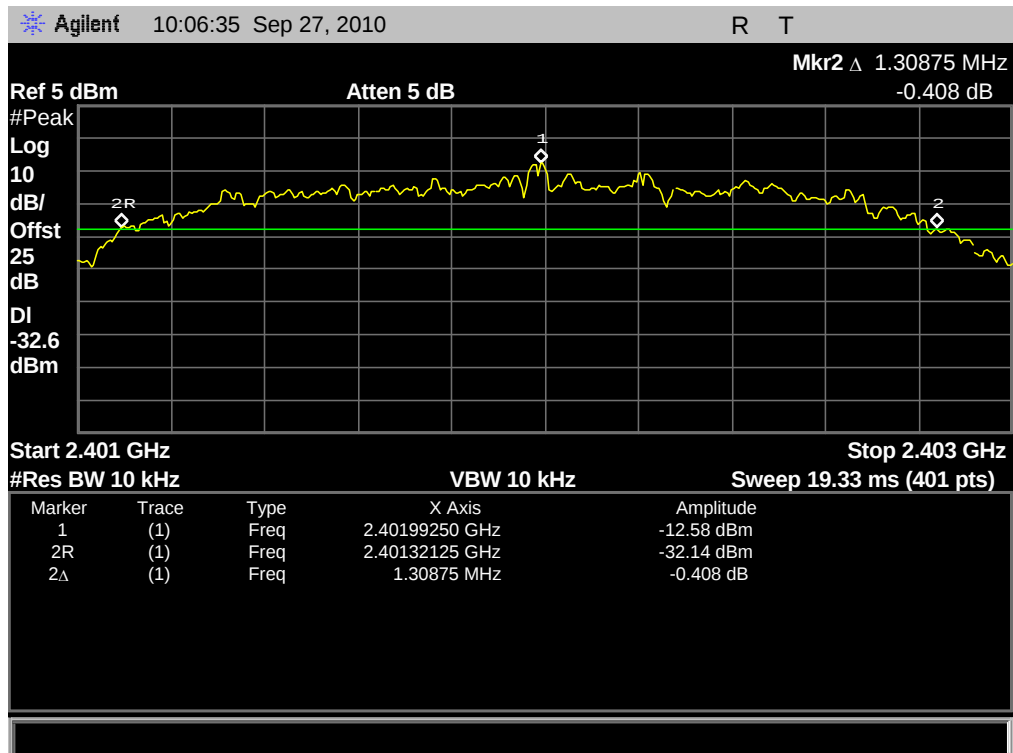

(Plot G: Channel = 0)

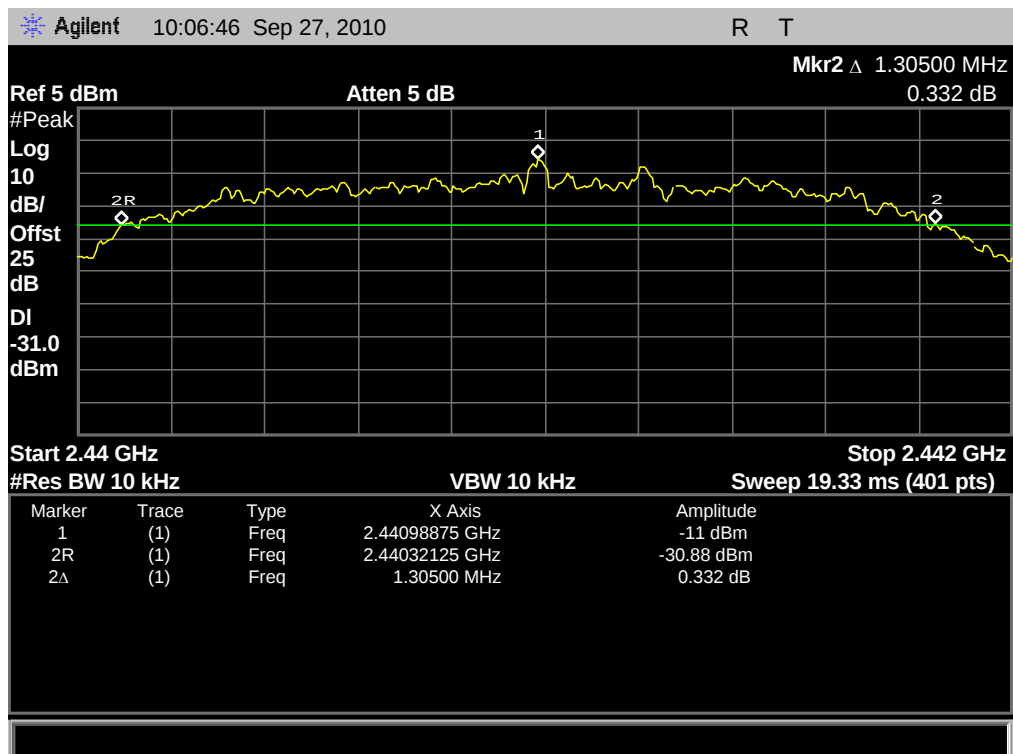

(Plot H: Channel = 39)

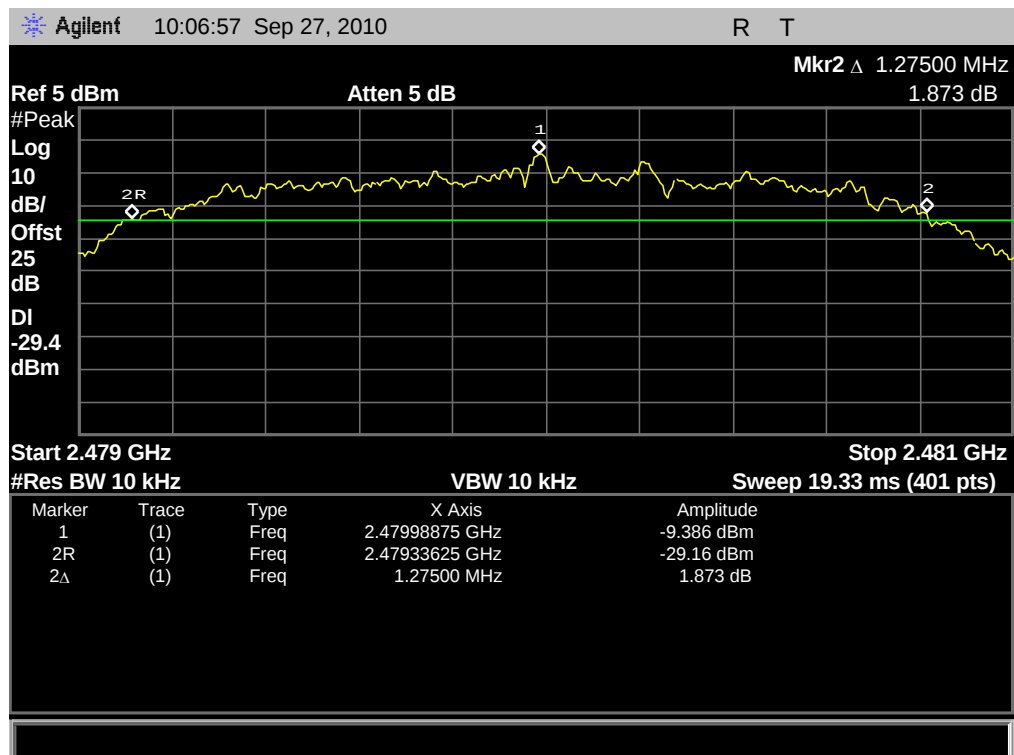

(Plot I: Channel = 78)

3.4 Carried Frequency Separation

3.4.1 Definition

According to FCC §15.247(a)(1) and RSS-210 A8.1 (2), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.


3.4.2 Test Description

See section 3.1.2 of this report.



3.4.3 Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (926.25KHz for GFSK mode, 1.316MHz for $\pi/4$ -DQPSK mode and 1.309MHz for 8-DPSK mode, refer to section 3.3.3), whichever is greater. So, the verdict is PASS.

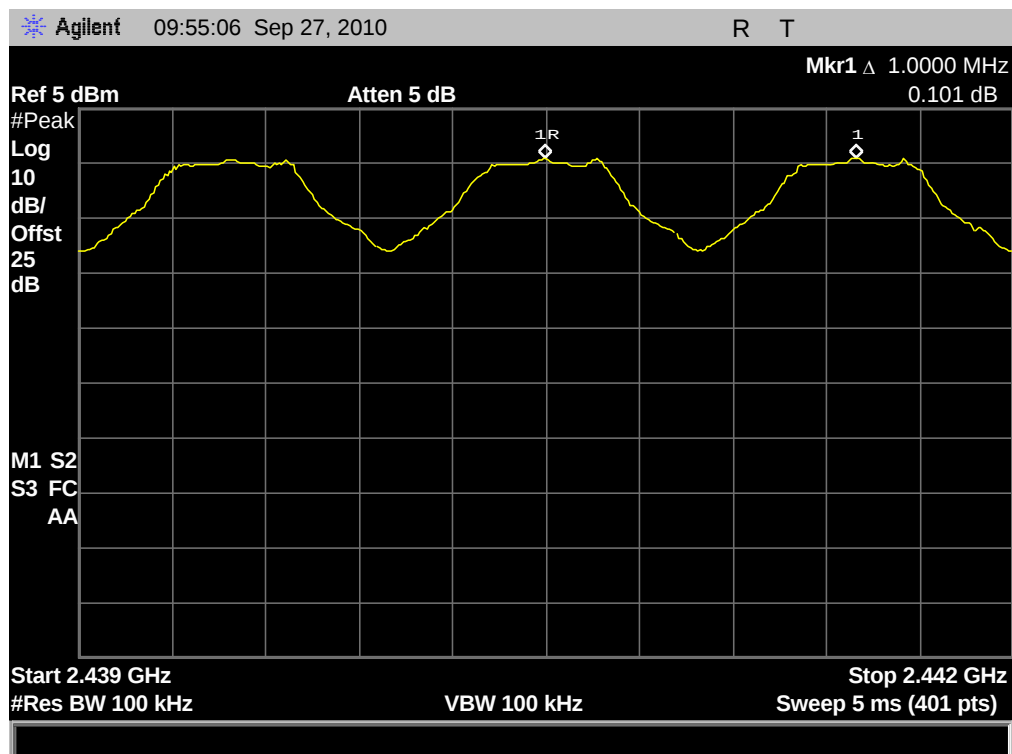

(Plot A: GFSK)

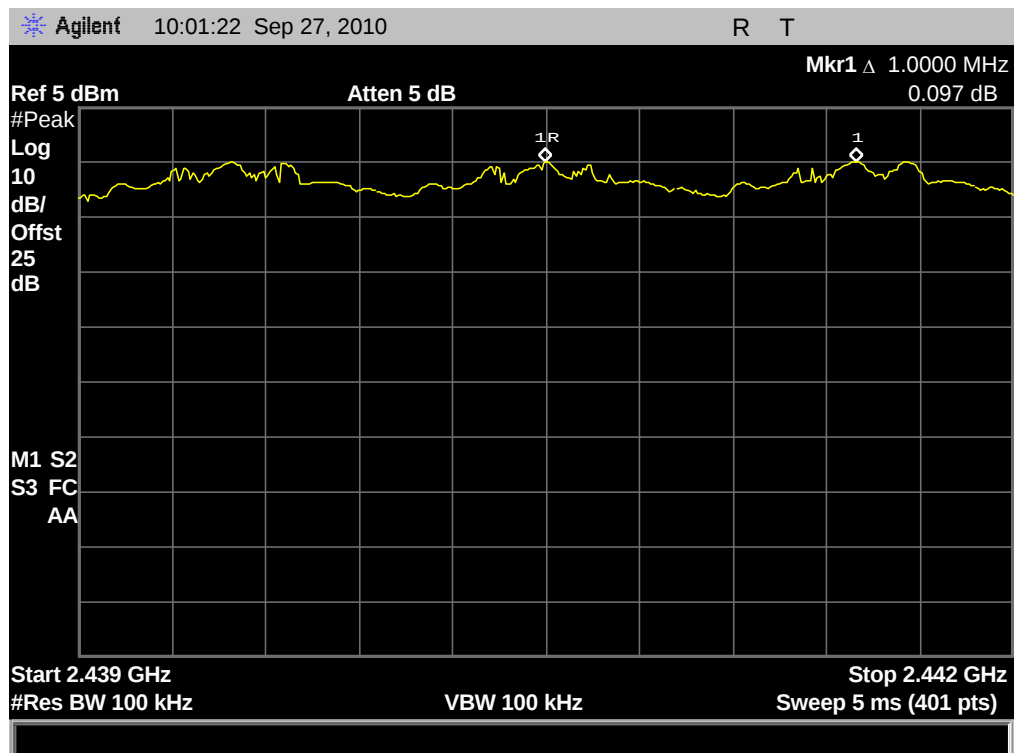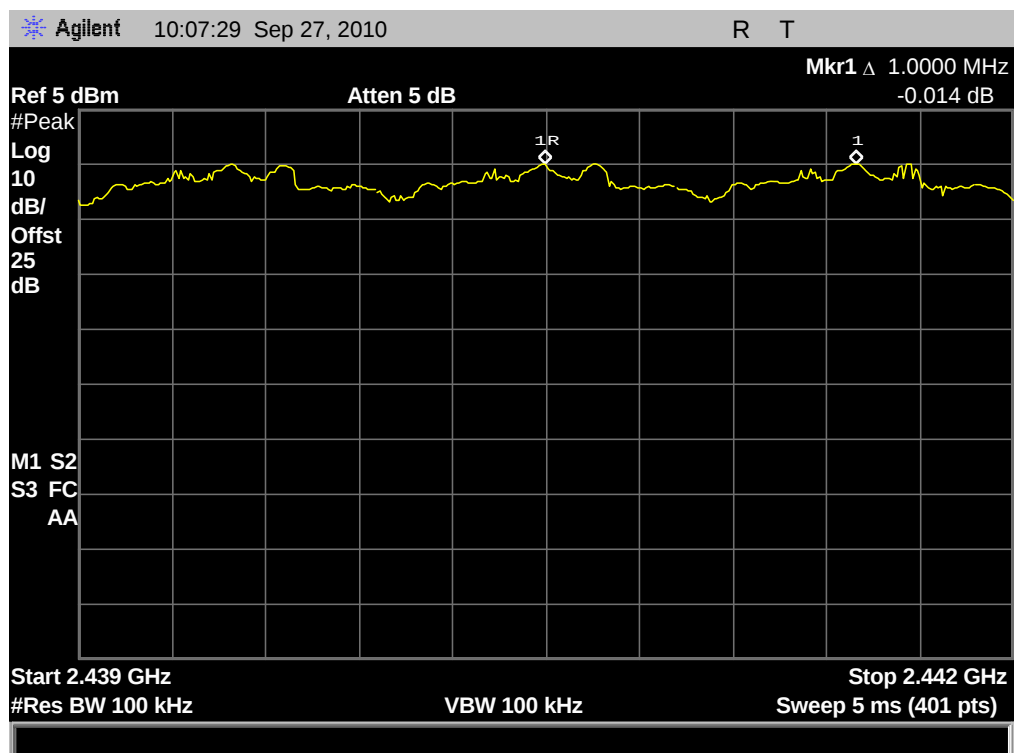
(Plot B: $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)

3.5 Time of Occupancy (Dwell time)

3.5.1 Requirement

According to FCC §15.247(a)(1)(iii) and RSS-210 A8.1 (4), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.5.2 Test Description

See section 3.1.2 of this report.

3.5.3 Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4s * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.900	Plot A	309.33	400	PASS
39	2441	2.900	Plot B	309.33		PASS
78	2480	2.925	Plot C	312.00		PASS

B. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

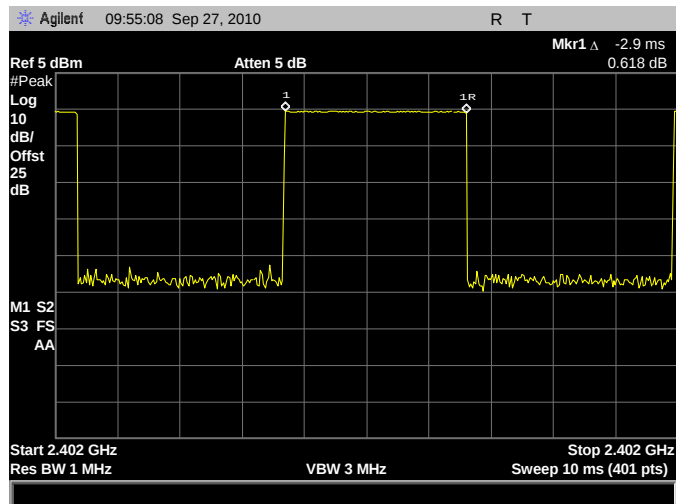

(Plot A: Channel = 0)

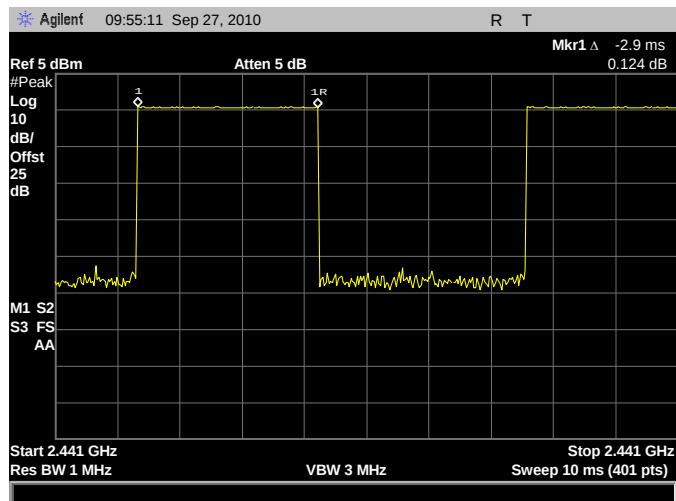

(Plot B: Channel = 39)

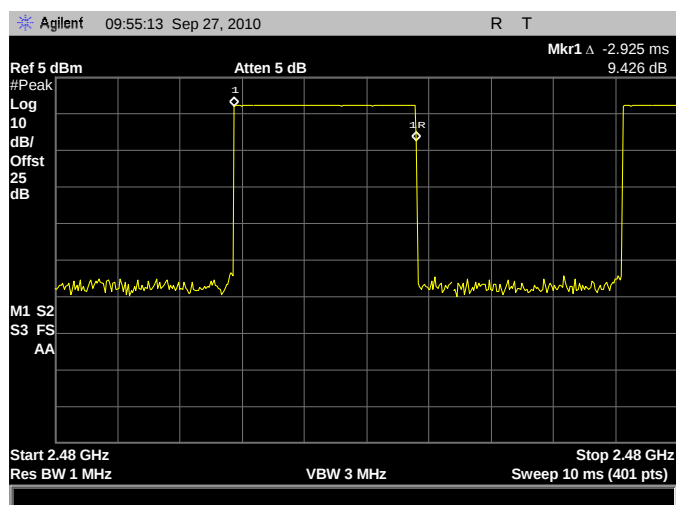

(Plot C: Channel = 78)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.925	Plot D	312.00	400	PASS
39	2441	2.925	Plot E	312.00		PASS
78	2480	2.925	Plot F	312.00		PASS

D. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

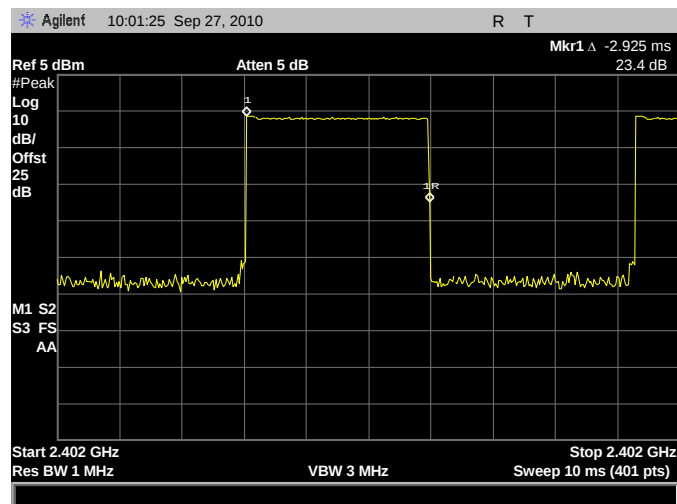

(Plot D: Channel = 0)

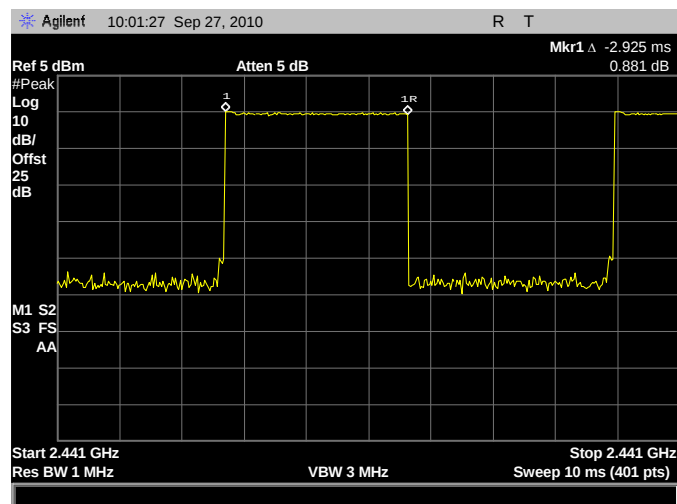

(Plot E: Channel = 39)

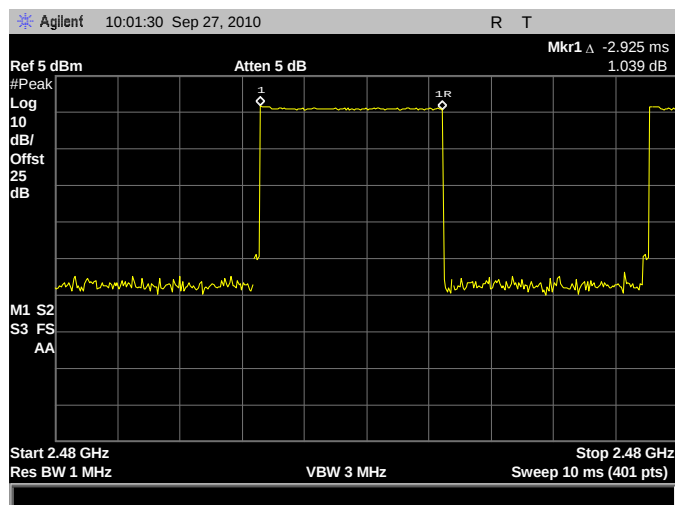

(Plot F: Channel = 78)


E. Test Verdict (8-DPSK mode):

8-DPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.900	Plot G	309.33	400	PASS
39	2441	2.925	Plot H	312.00		PASS
78	2480	2.925	Plot I	312.00		PASS

F. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

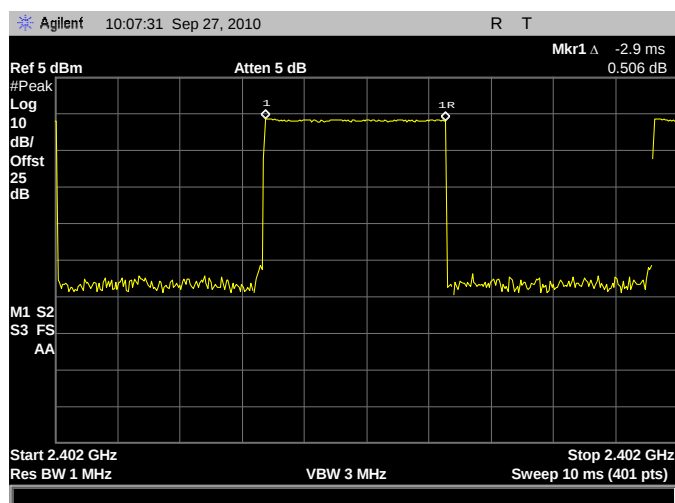

(Plot G: Channel = 0)

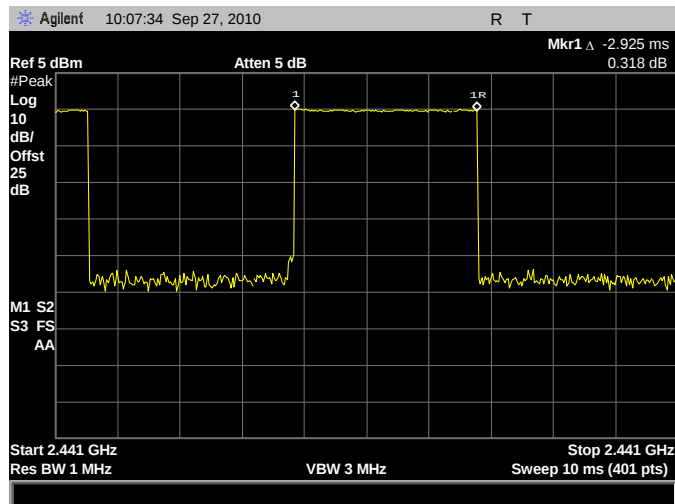

(Plot H: Channel = 39)

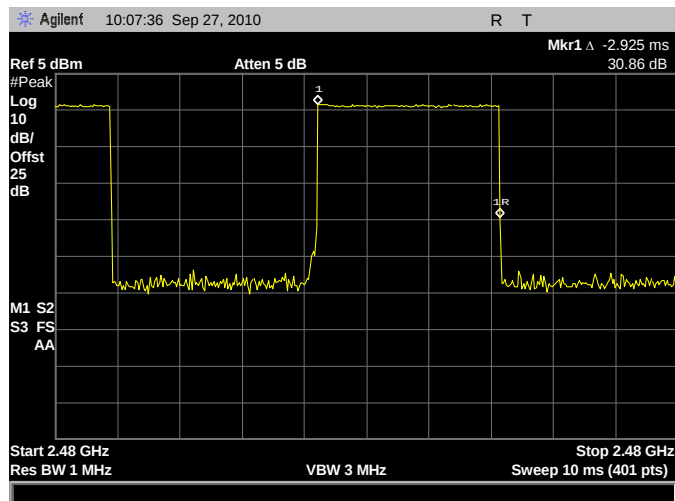

(Plot I: Channel = 78)

3.6 Conducted Spurious Emissions

3.6.1 Requirement

According to FCC §15.247(c) and RSS-A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2 Test Description

See section 3.1.2 of this report.

3.6.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-49.69	Plot A.1/A.2	-6.188	-26.2	PASS
39	2441	-49.98	Plot B.1/B.2	-4.442	-24.4	PASS
78	2480	-49.77	Plot C.1/C.2	-2.996	-23.0	PASS

B. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

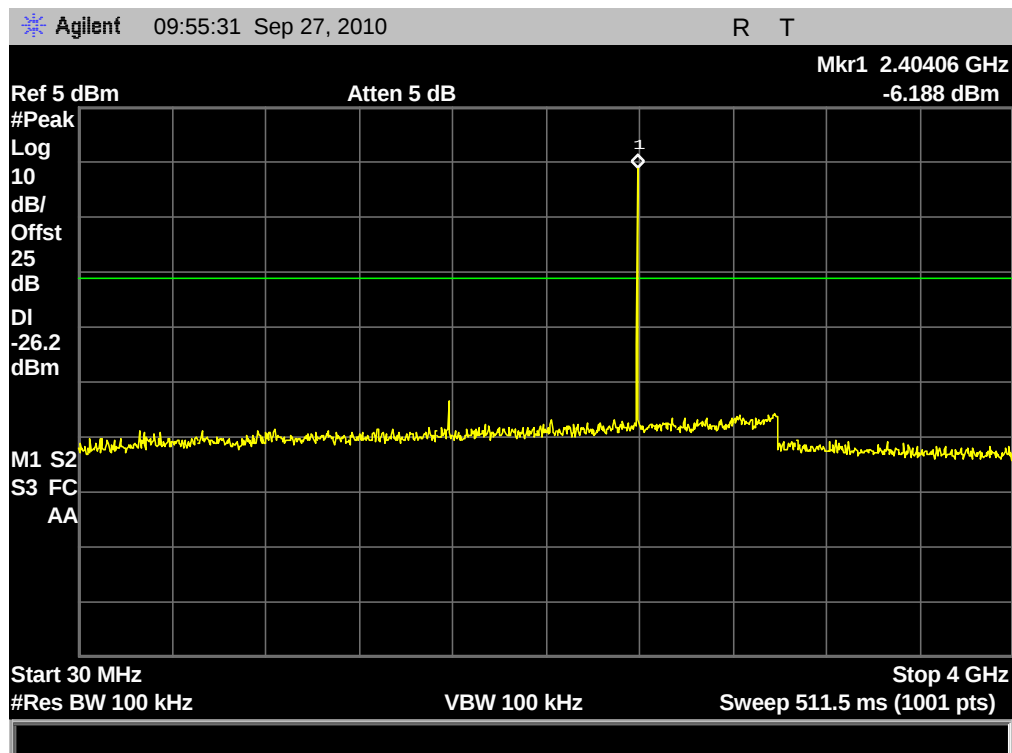


(Plot A.1: Channel = 0, 30MHz to 4GHz)

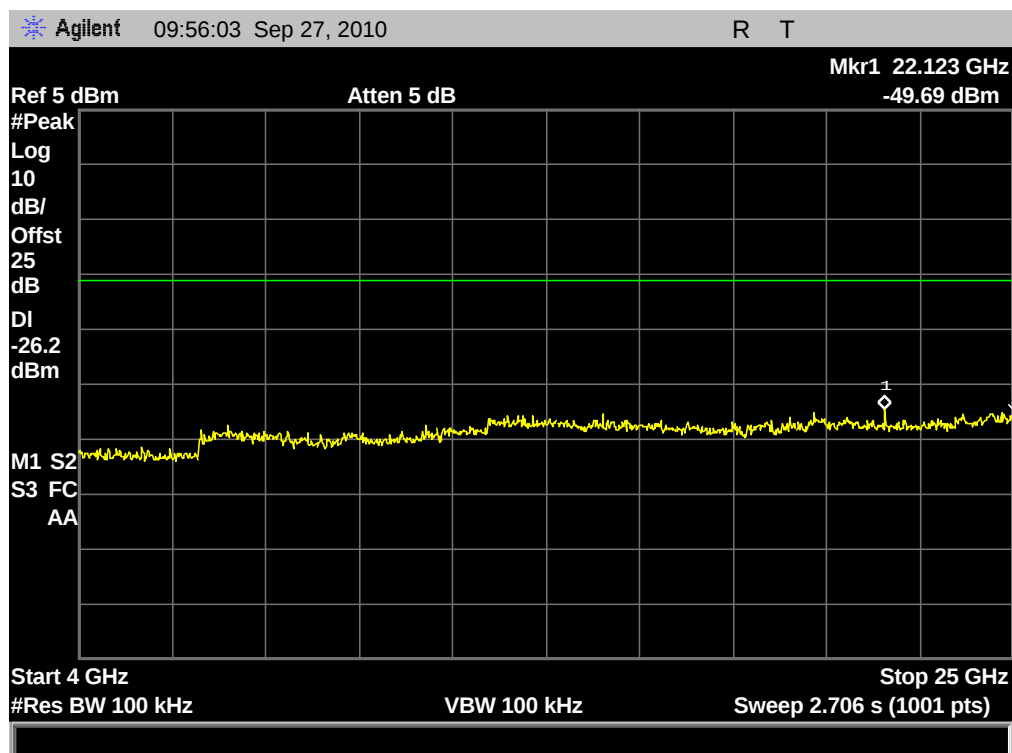


(Plot A.2: Channel = 0, 4GHz to 25GHz)

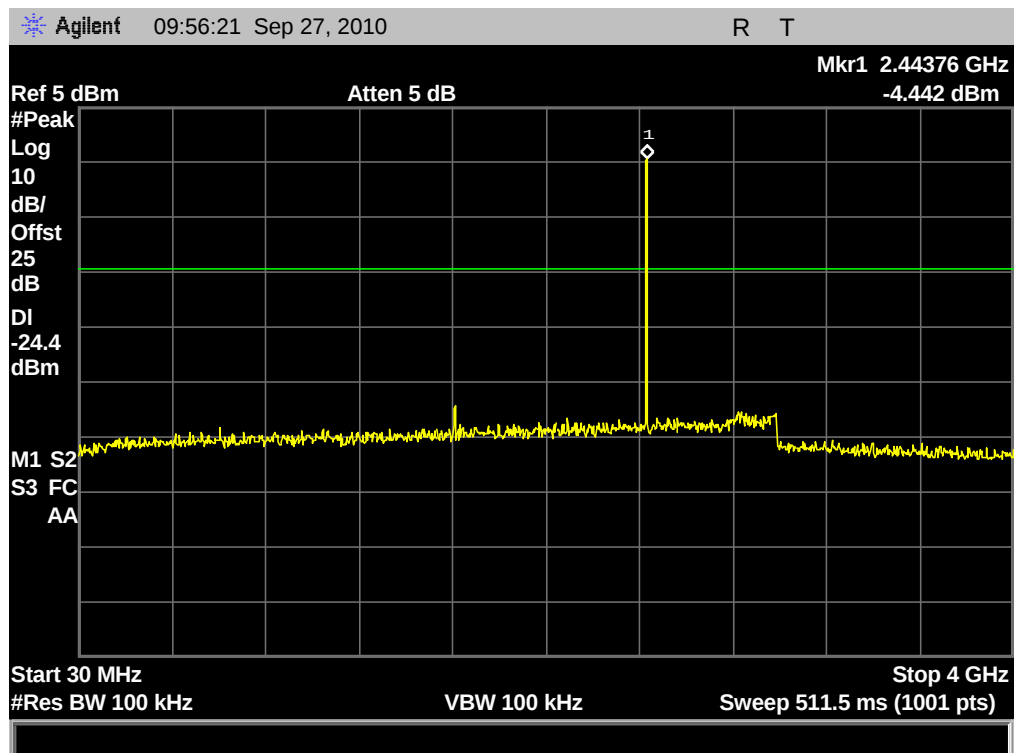


(Plot B.1: Channel = 39, 30MHz to 4GHz)

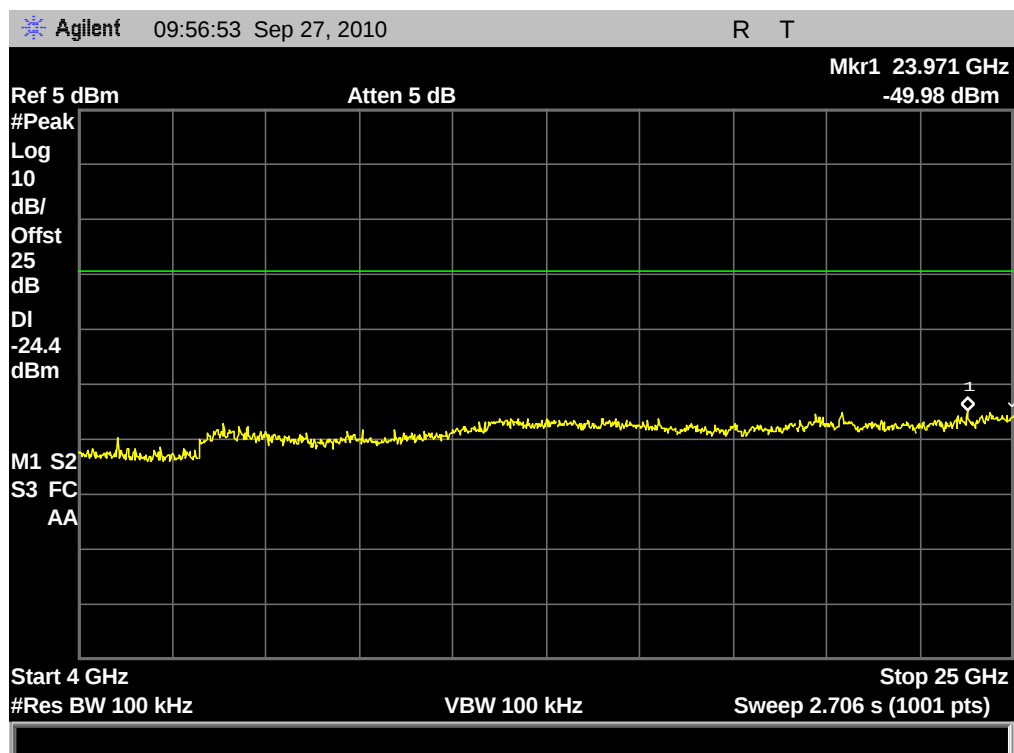

(Plot B.2: Channel = 39, 4GHz to 25GHz)

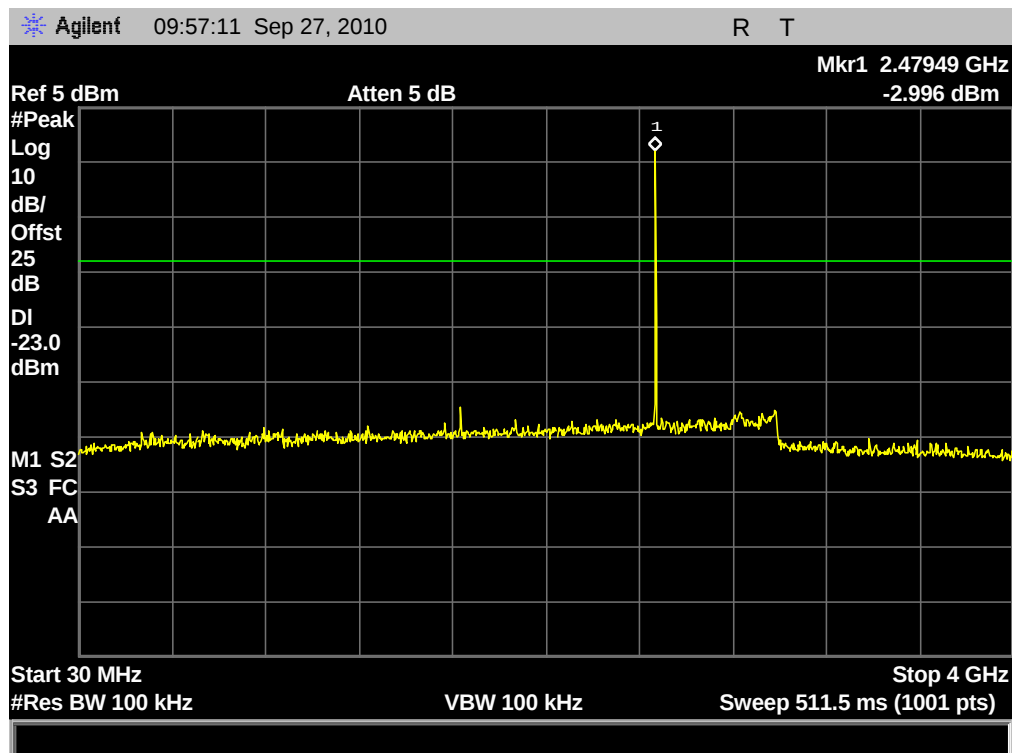

(Plot C.1: Channel = 78, 30MHz to 4GHz)

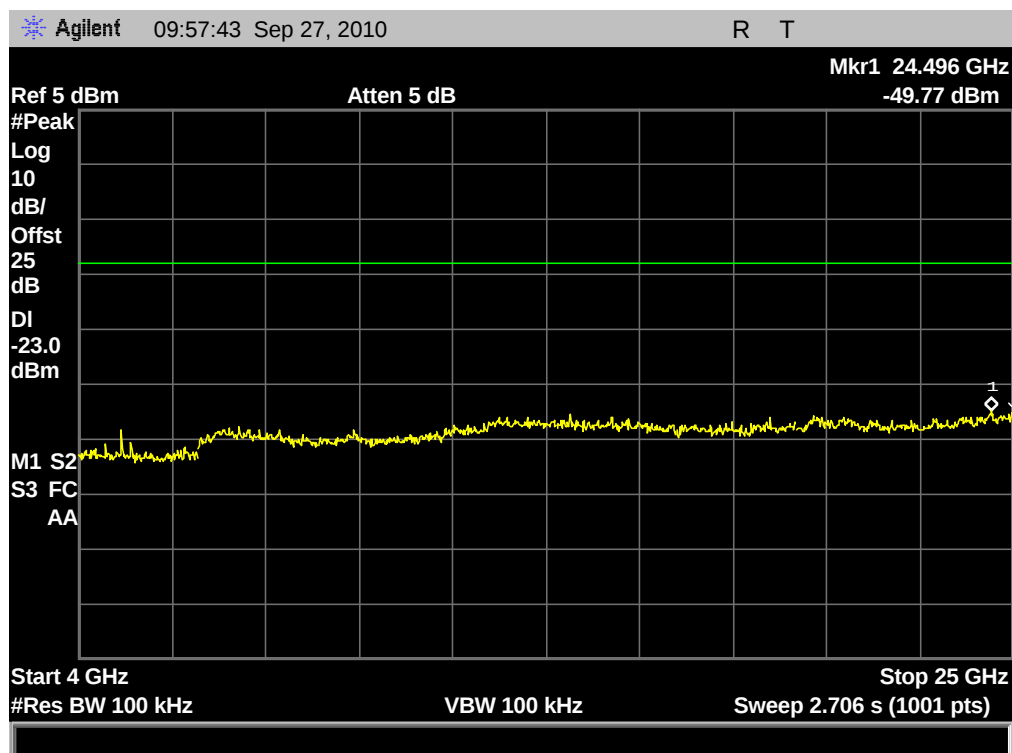

(Plot C.2: Channel = 78, 4GHz to 25GHz)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-49.07	Plot D.1/D.2	-6.806	-26.8	PASS
39	2441	-50.12	Plot E.1/E.2	-8.395	-28.4	PASS
78	2480	-49.16	Plot F.1/F.2	-6.969	-27.0	PASS

D. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

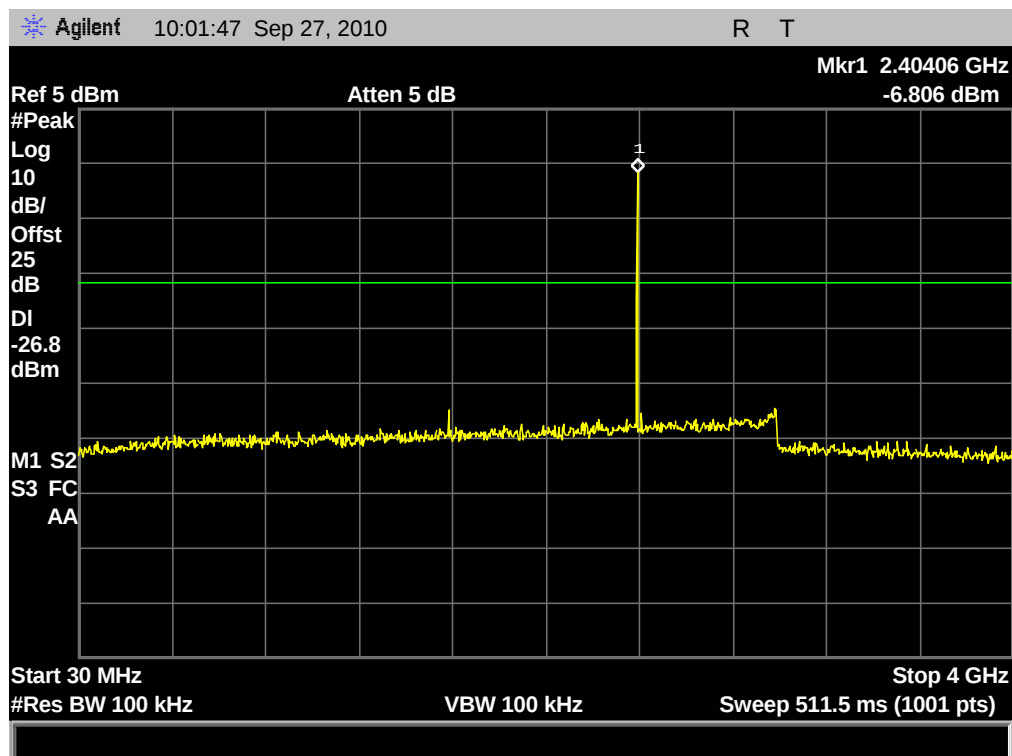


(Plot D.1: Channel = 0, 30MHz to 4GHz)

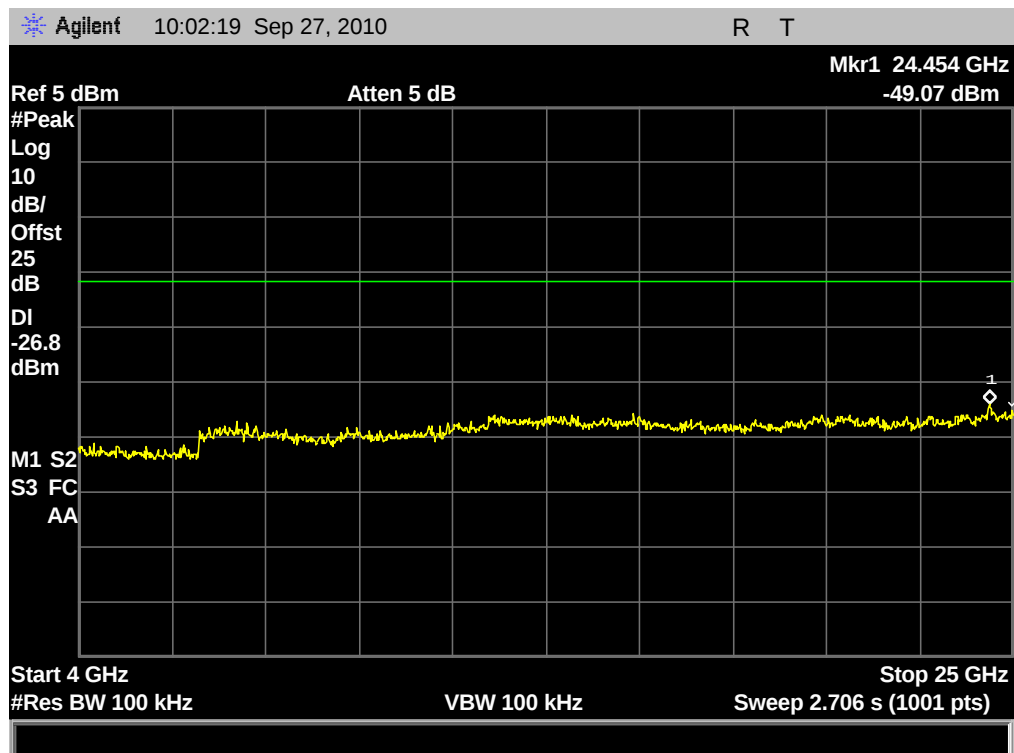


(Plot D.2: Channel = 0, 4GHz to 25GHz)

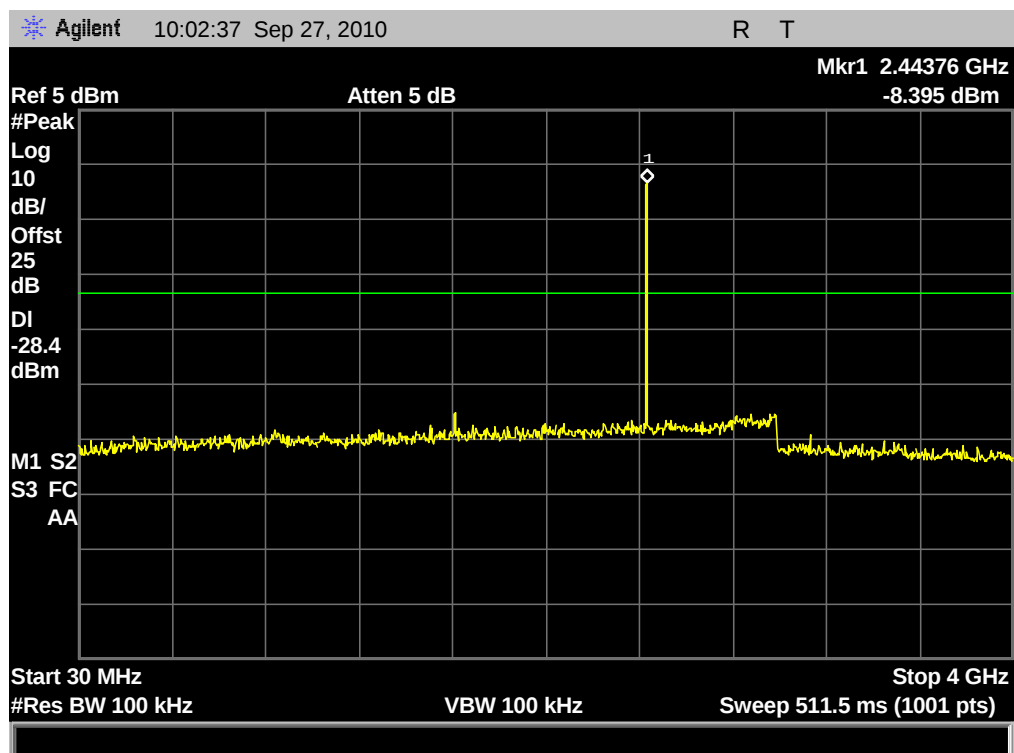


(Plot E.1: Channel = 39, 30MHz to 4GHz)

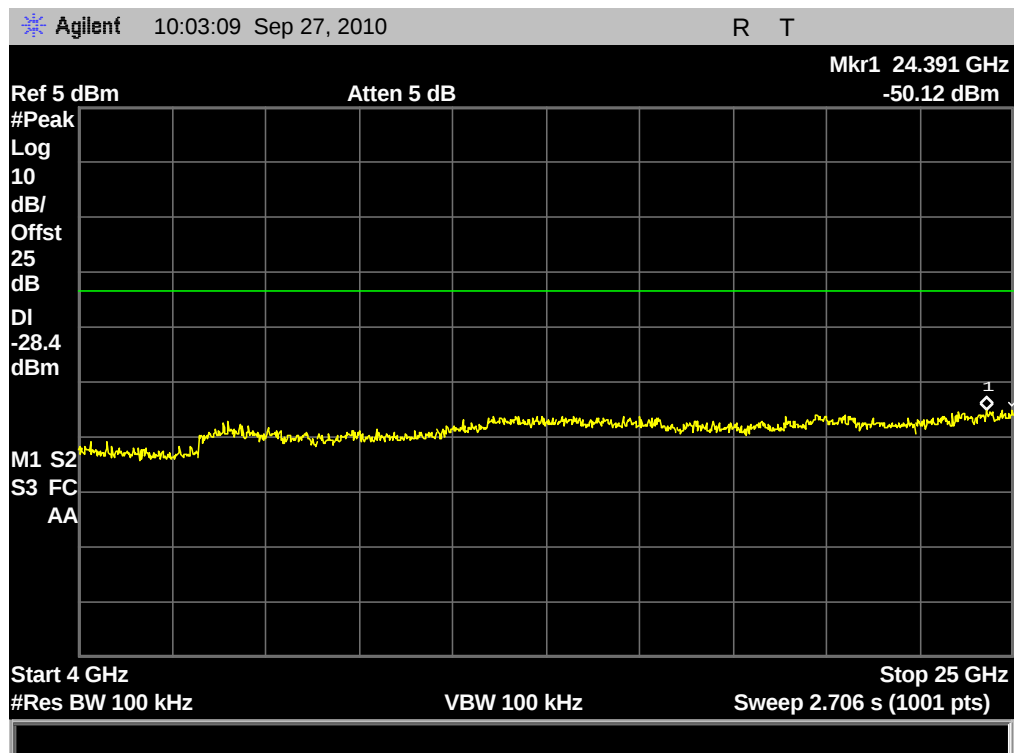

(Plot E.2: Channel = 39, 4GHz to 25GHz)

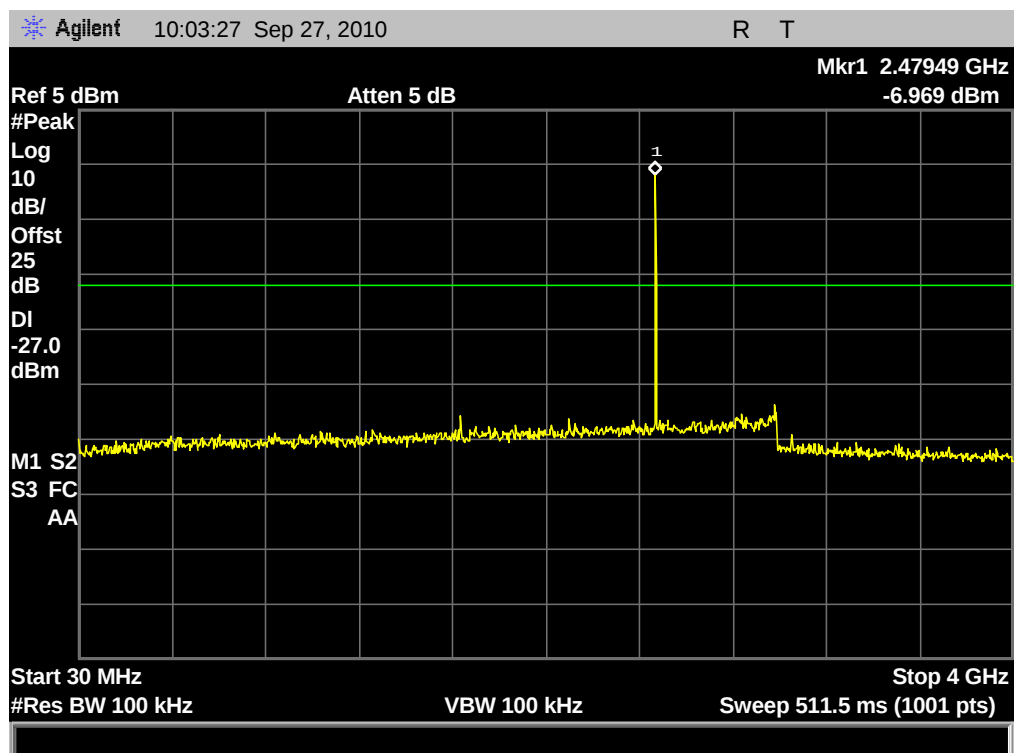

(Plot F.1: Channel = 78, 30MHz to 4GHz)

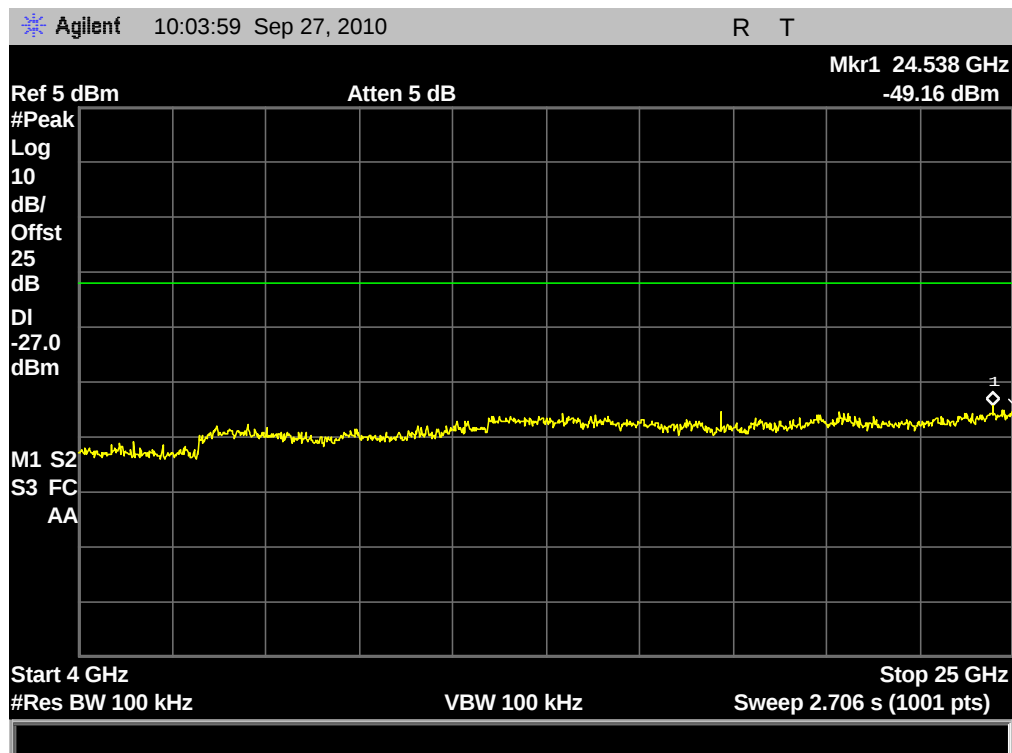

(Plot F.2: Channel = 78, 4GHz to 25GHz)


E. Test Verdict:

8-DPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-49.24	Plot G.1/G.2	-6.353	-26.4	PASS
39	2441	-49.8	Plot H.1/H.2	-7.908	-27.9	PASS
78	2480	-49.74	Plot I.1/I.2	-3.505	-23.5	PASS

F. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

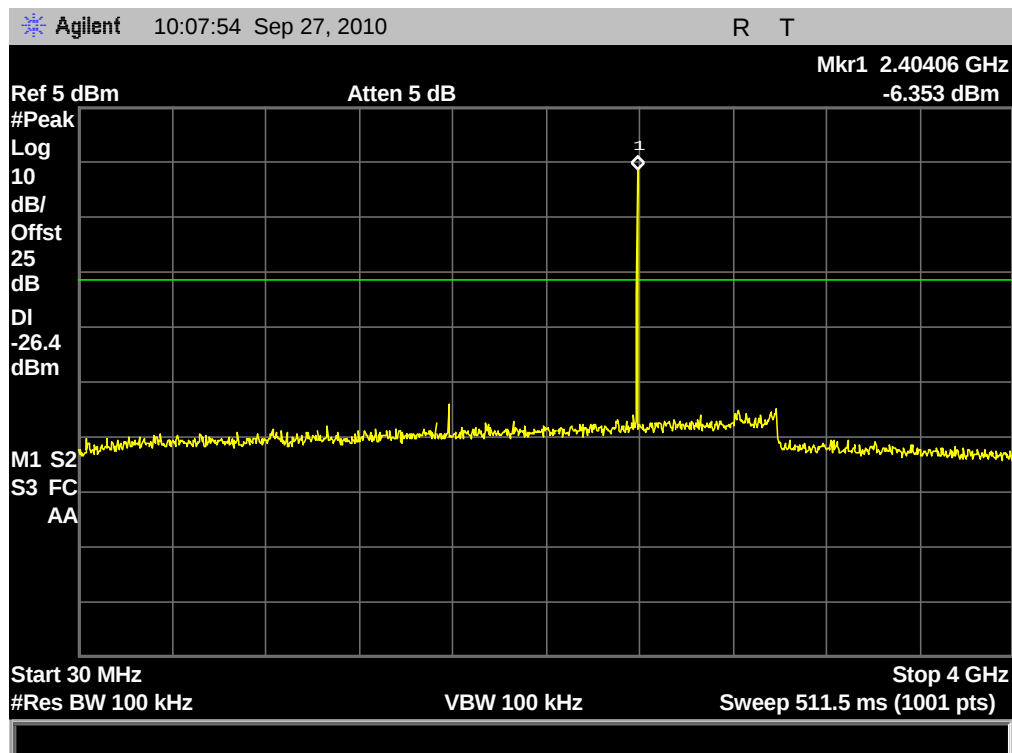


(Plot G.1: Channel = 0, 30MHz to 4GHz)

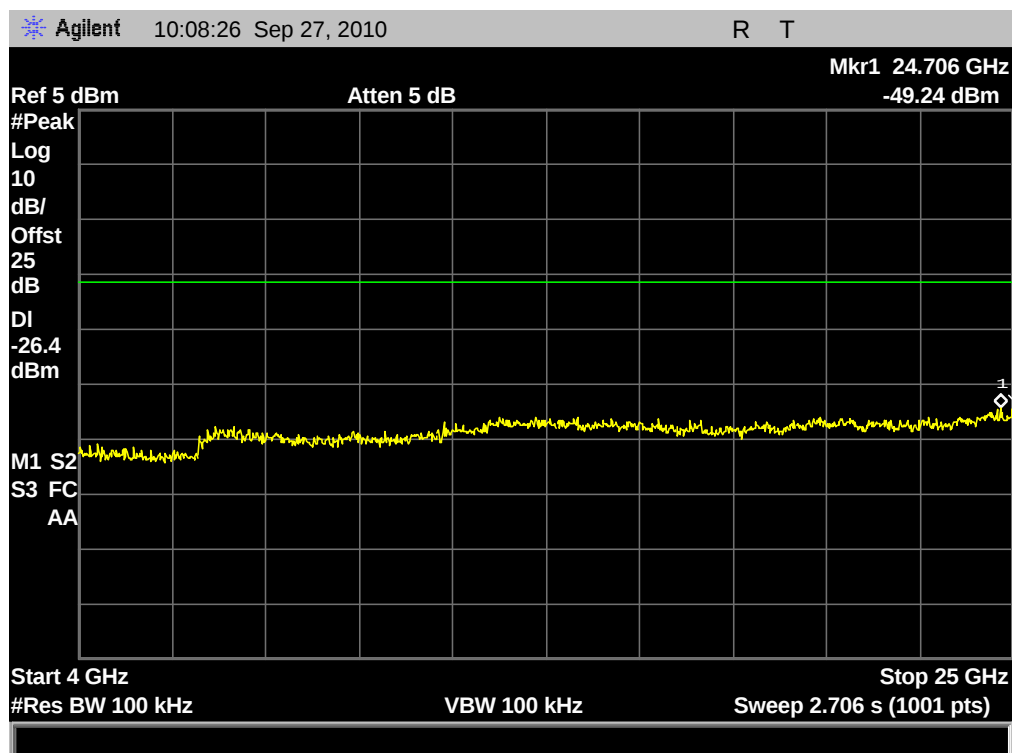


(Plot G.2: Channel = 0, 4GHz to 25GHz)

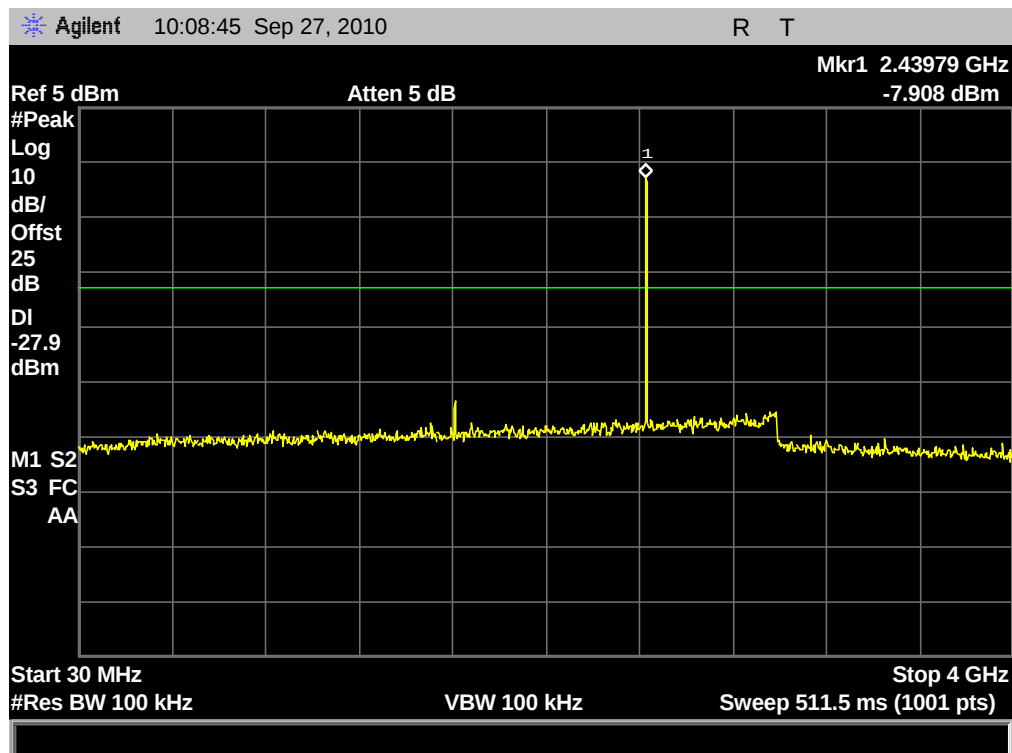


(Plot H.1: Channel = 39, 30MHz to 4GHz)

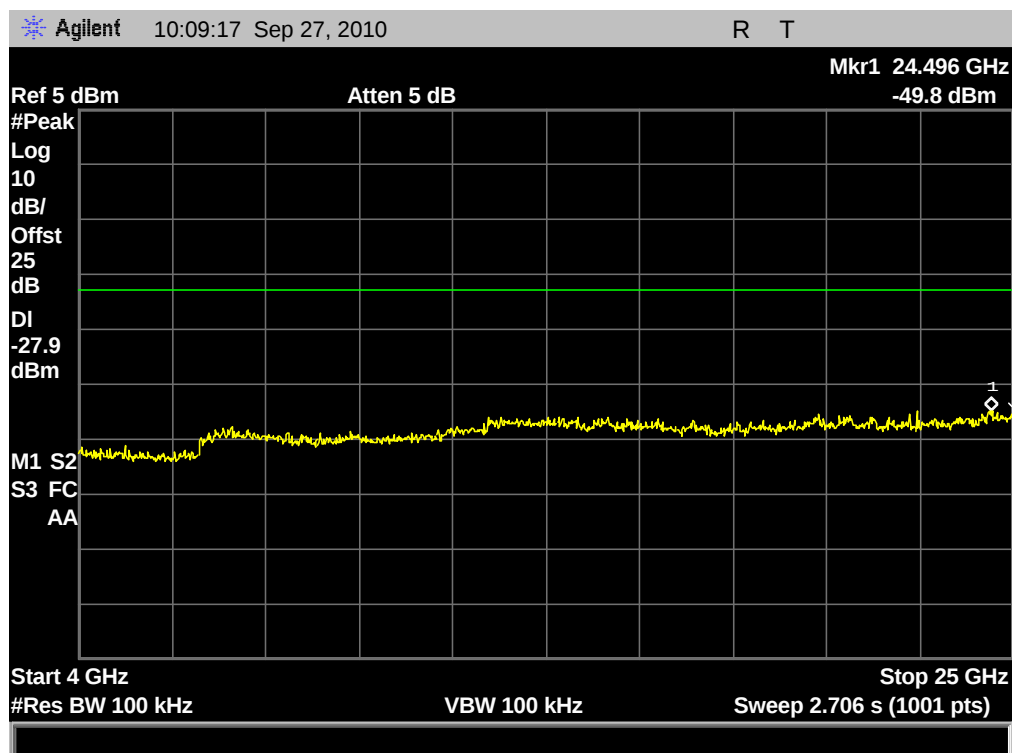

(Plot H.2: Channel = 39, 4GHz to 25GHz)

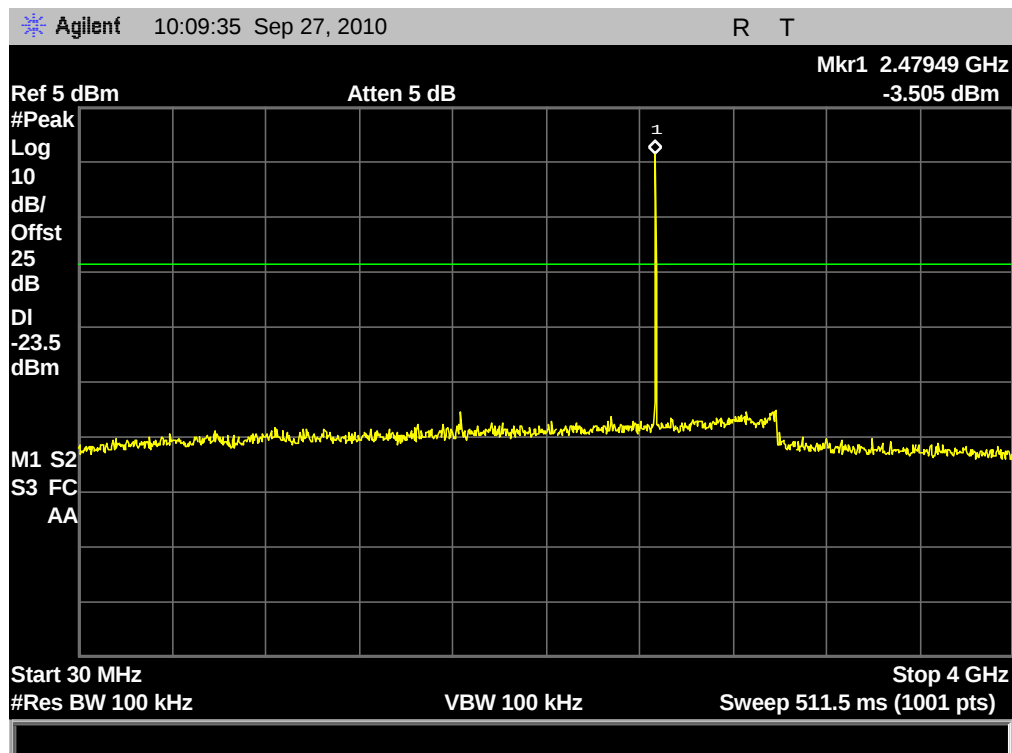

(Plot I.1: Channel = 78, 30MHz to 4GHz)

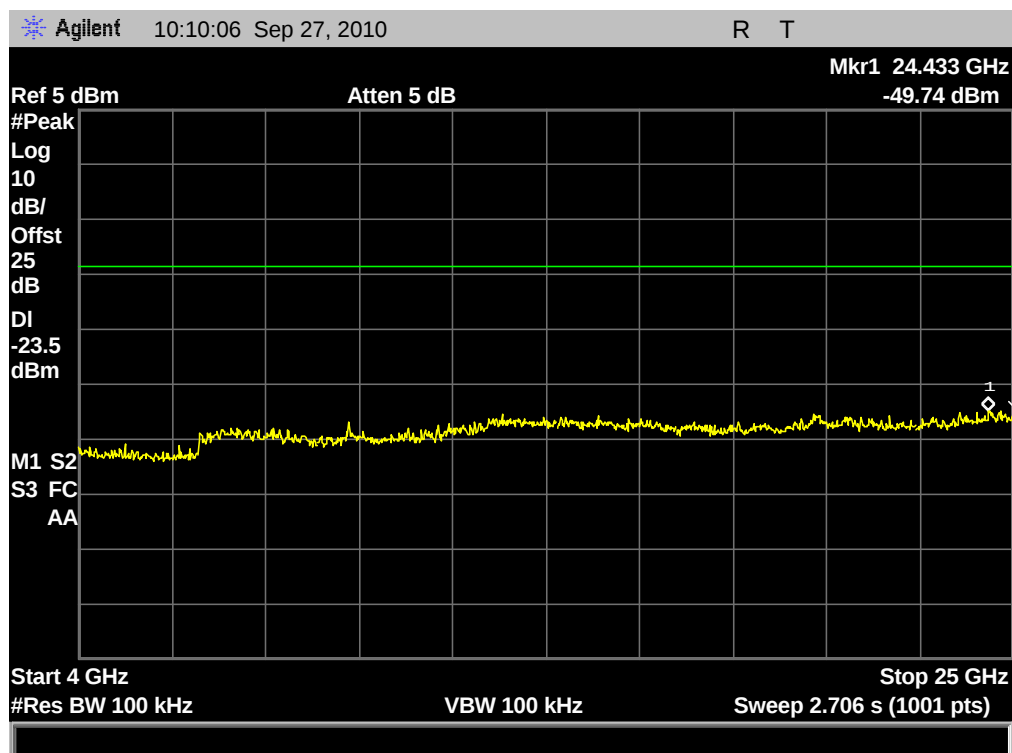

(Plot I.2: Channel = 78, 4GHz to 25GHz)


3.7 Band Edge

3.7.1 Requirement

According to FCC section 15.247(c) and RSS- A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.7.2 Test Description

A. Test Setup:

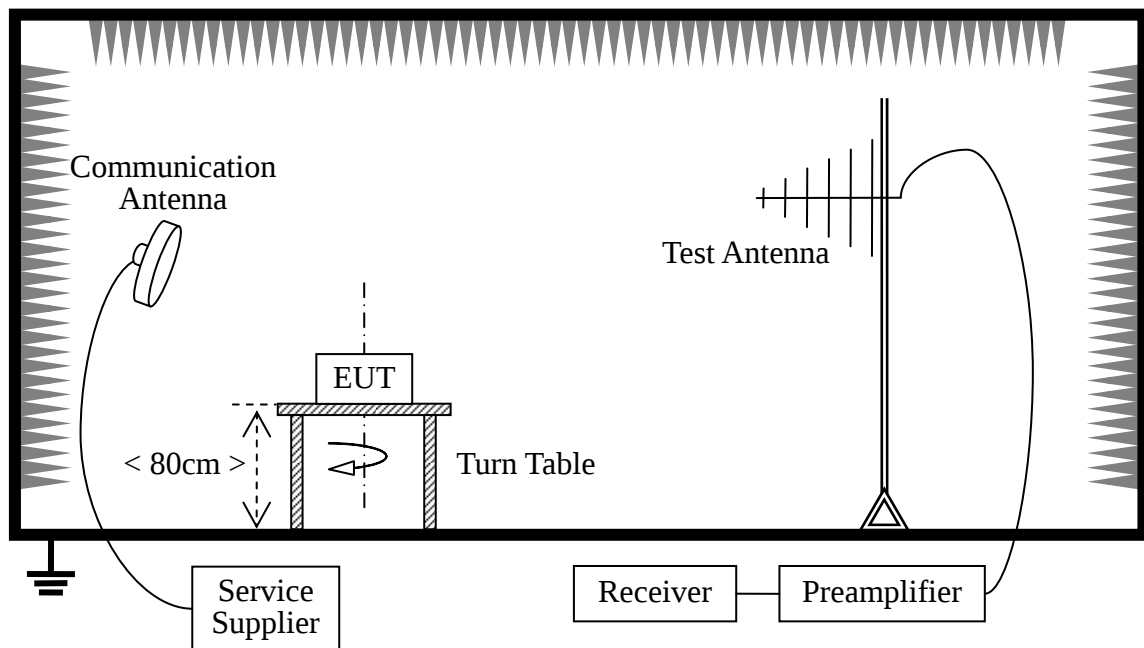

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength..

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2009.9	2year
Receiver	Agilent	E7405A	US44210471	2009.9	2year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2009.9	2year
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2009.9	2year

3.7.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:


GFSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	39.62	37.55	74	54	PASS
78	2480	39.76	37.45	74	54	PASS


B. Test Plot:

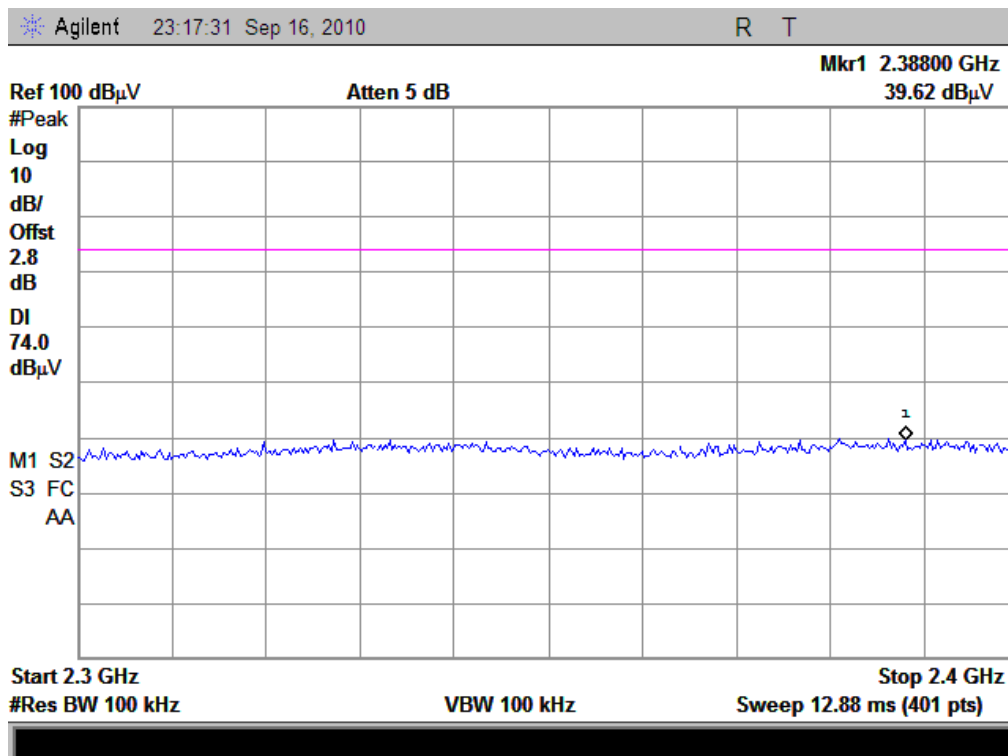


(Plot A1: Channel = 0 PEAK)

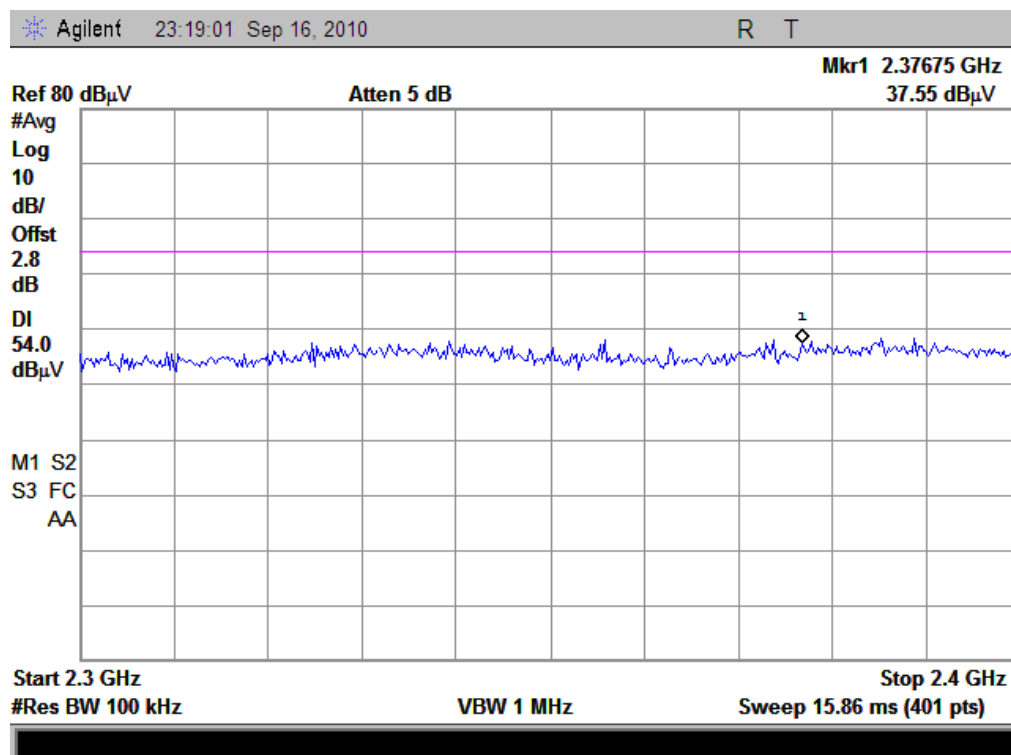

(Plot A2: Channel = 0 AVERAGE)

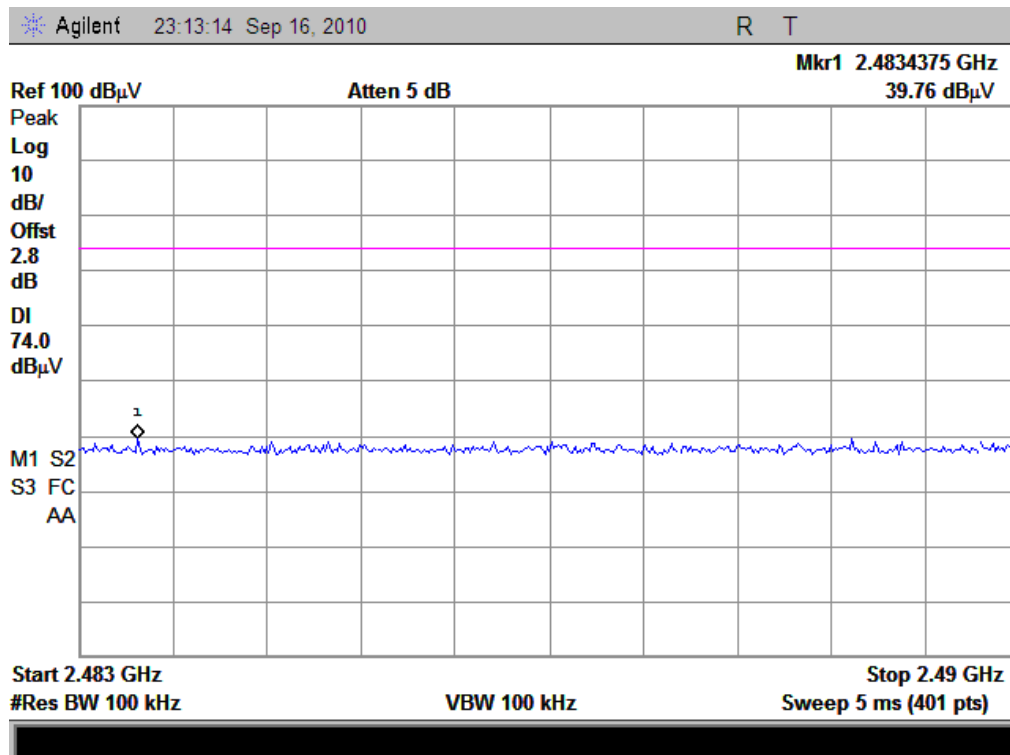

(Plot B1: Channel = 78 PEAK)

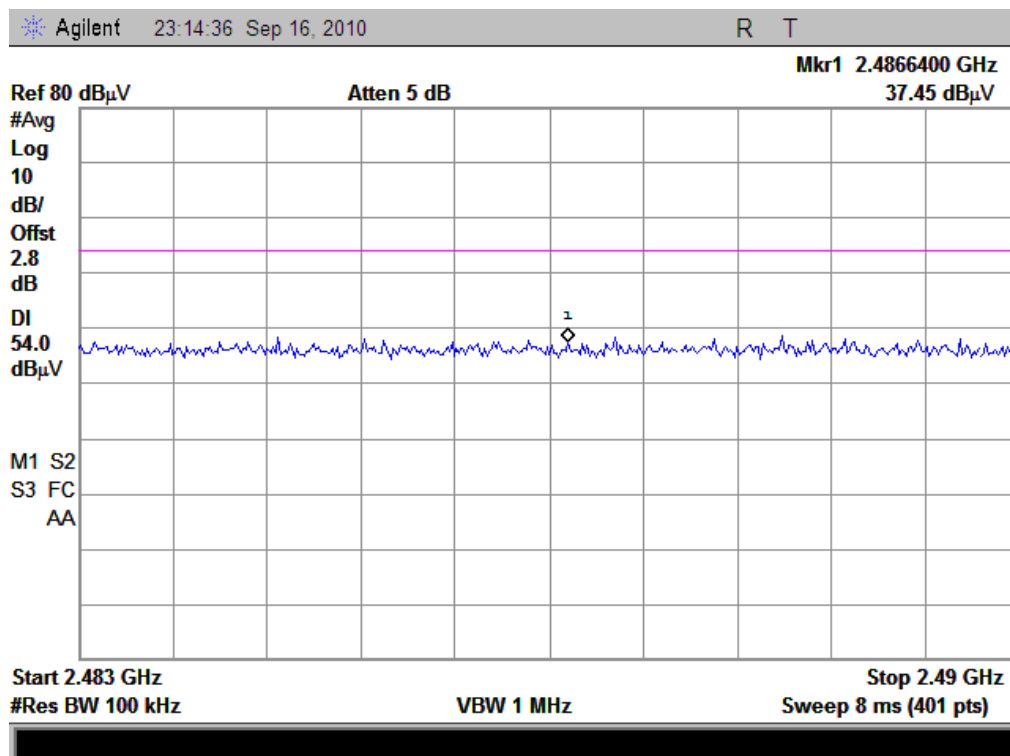


(Plot B2: Channel = 78 AVERAGE)

A. Test Verdict:


$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	40.08	38.31	74	54	PASS
78	2480	39.41	36.9	74	54	PASS


B. Test Plot:

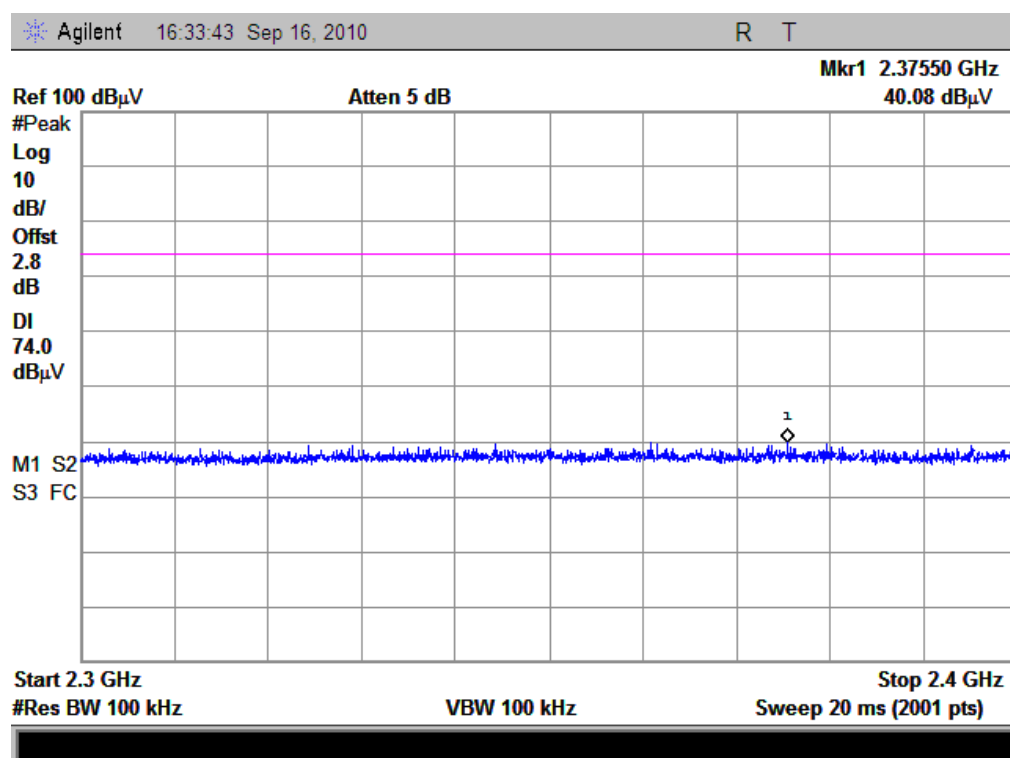


(Plot A1: Channel = 0 PEAK)

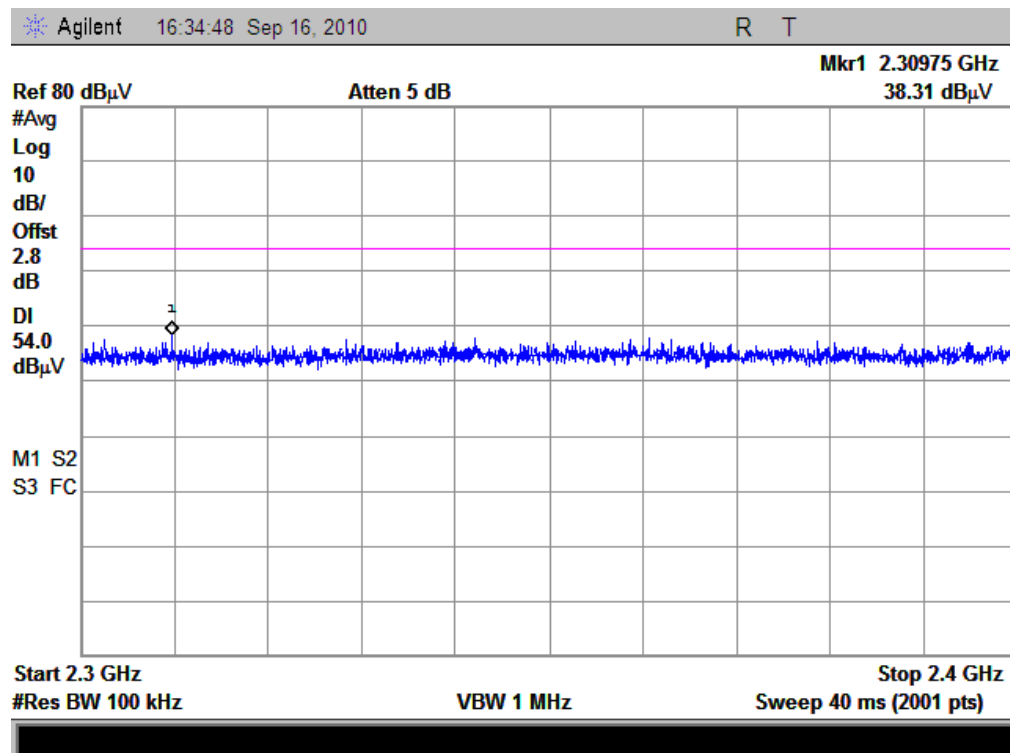

(Plot A2: Channel = 0 AVERAGE)

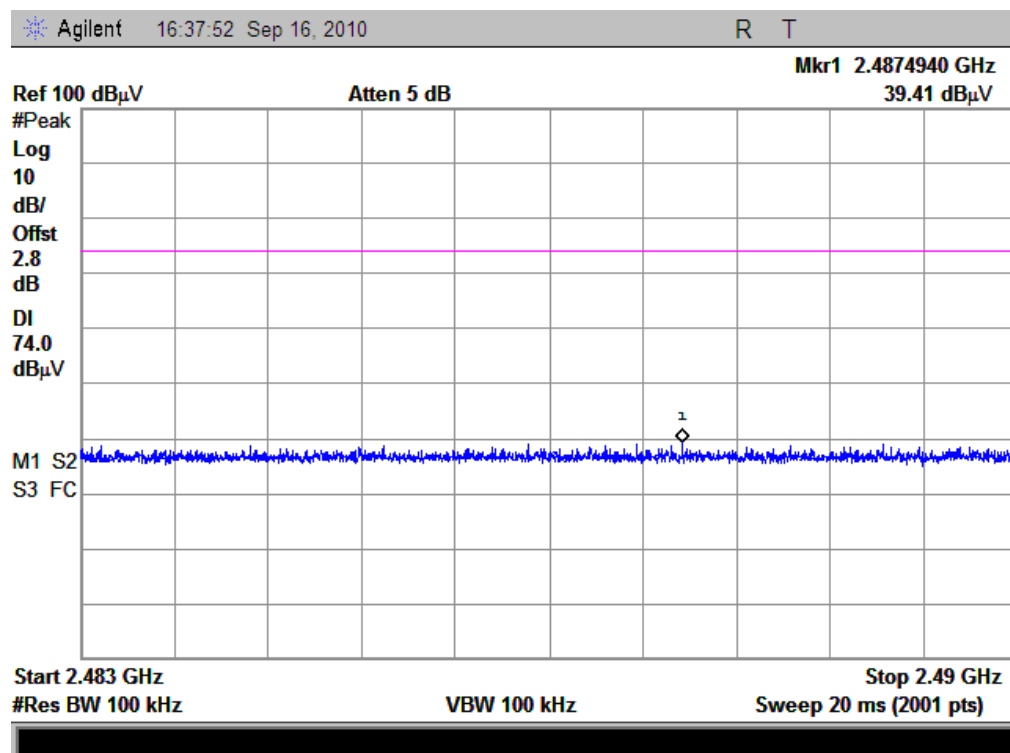

(Plot B1: Channel = 78 PEAK)

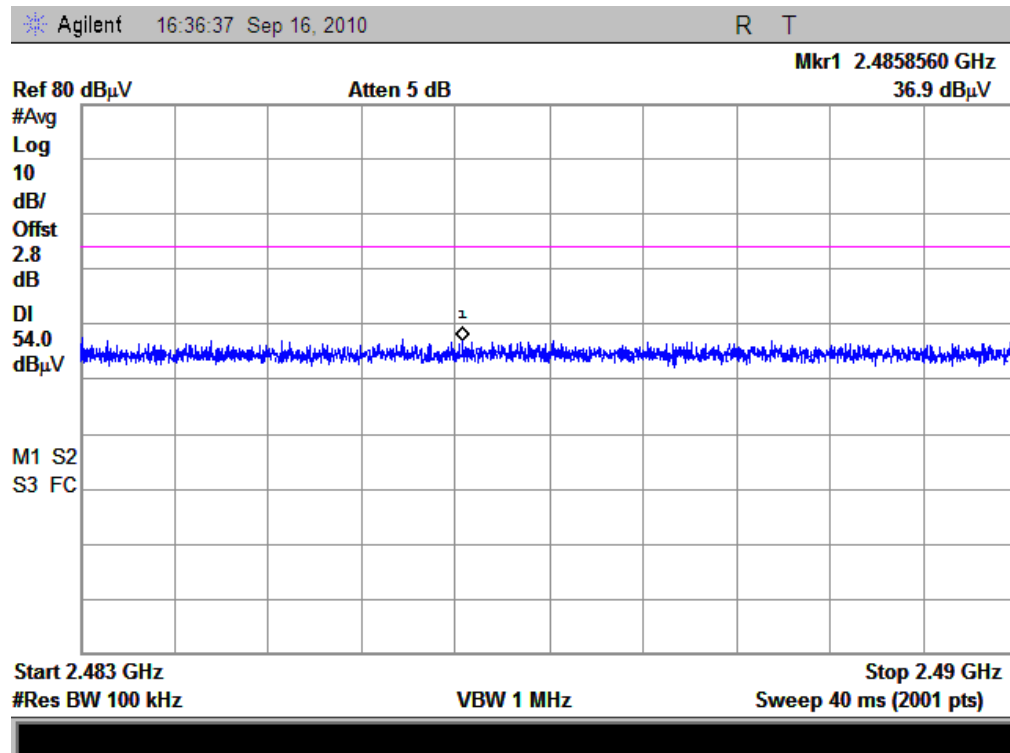


(Plot B2: Channel = 78 AVERAGE)

A. Test Verdict:


8-DPSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dBμV/m)		Limit (dBμV/m)		Verdict
		PK	AV	PK	AV	
0	2402	39.98	33.95	74	54	PASS
78	2480	39.06	35.59	74	54	PASS


B. Test Plot:

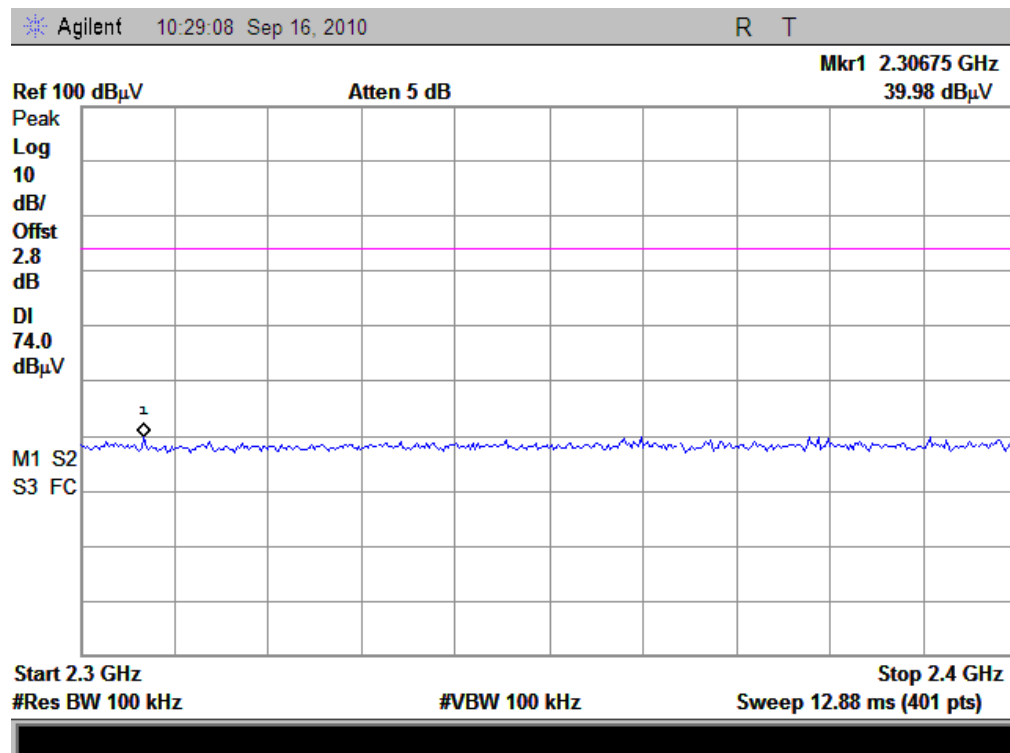


(Plot A1: Channel = 0 PEAK)

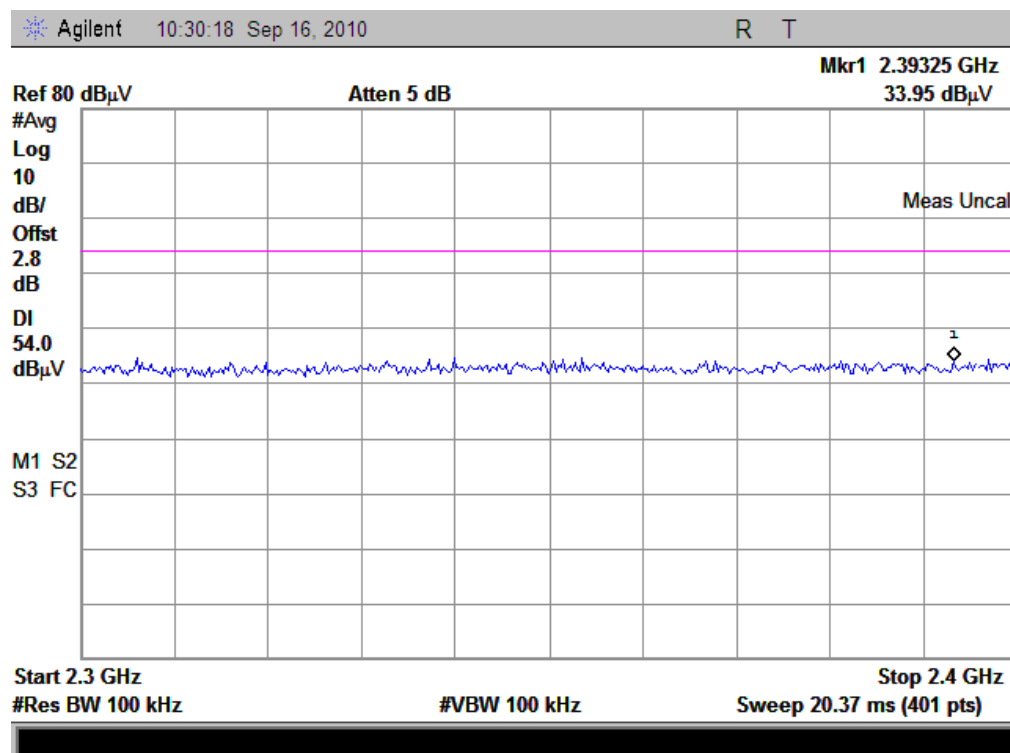

(Plot A2: Channel = 0 AVERAGE)

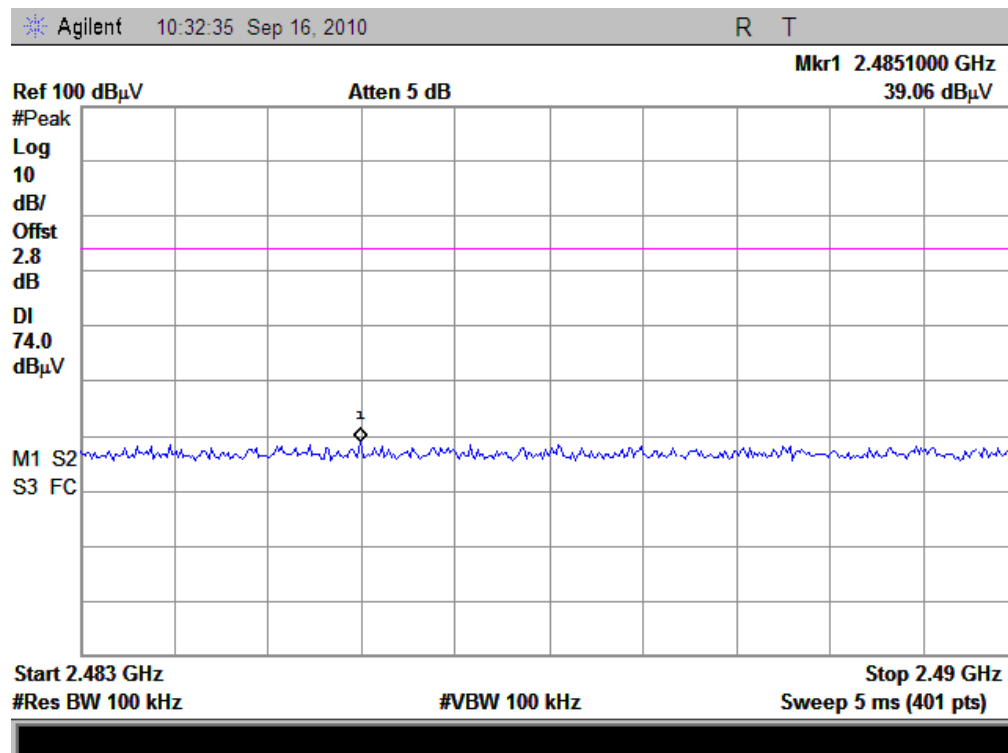

(Plot B1: Channel = 78 PEAK)

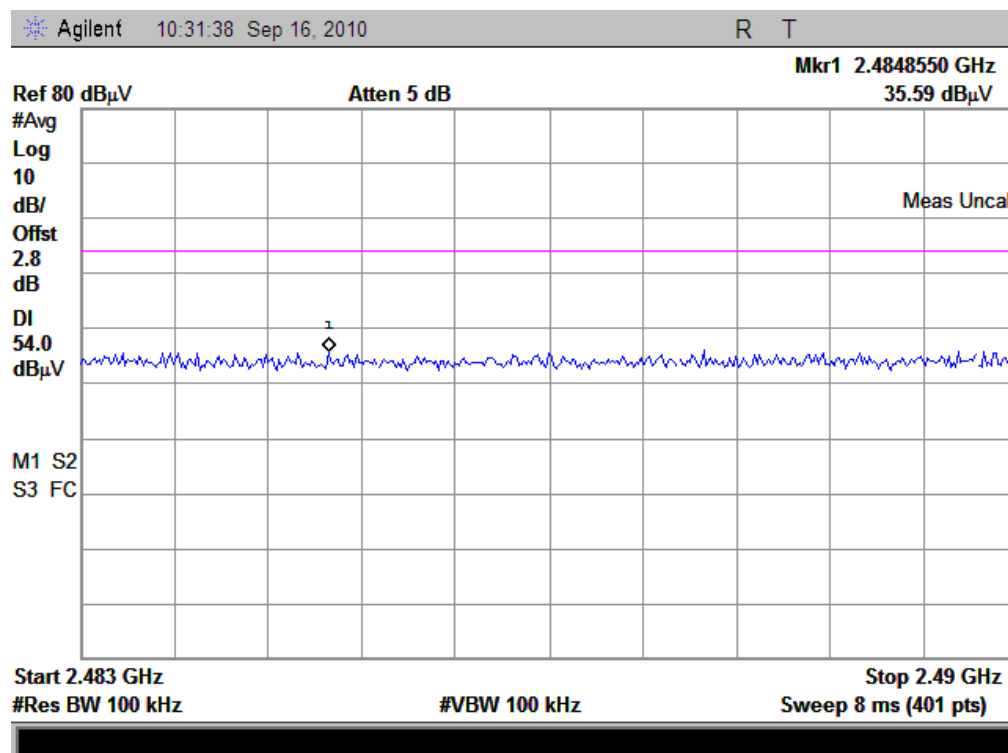

(Plot B2: Channel = 78 AVERAGE)

3.8 Conducted Emission

The test is not applicable, because the EUT is not switched, contains no switches, does not include inductive loads.

3.9 Radiated Emission

3.9.1 Requirement

According to FCC section 15.247(c) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to RSS- Gen section 7.2.3. Those emissions generated in a receiver and radiated from the receiver either via the antenna path or via the control, power, and audio cables that may be used with the receiver. All spurious emissions shall comply with the limits of next table:


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)	Detector
30 - 88	100	3	QP
88 - 216	150	3	QP
216 - 960	200	3	QP
960 - 1000	500	3	QP
Above 1000	500	3	AV

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

3.9.2 Test Description

A. Test Setup:

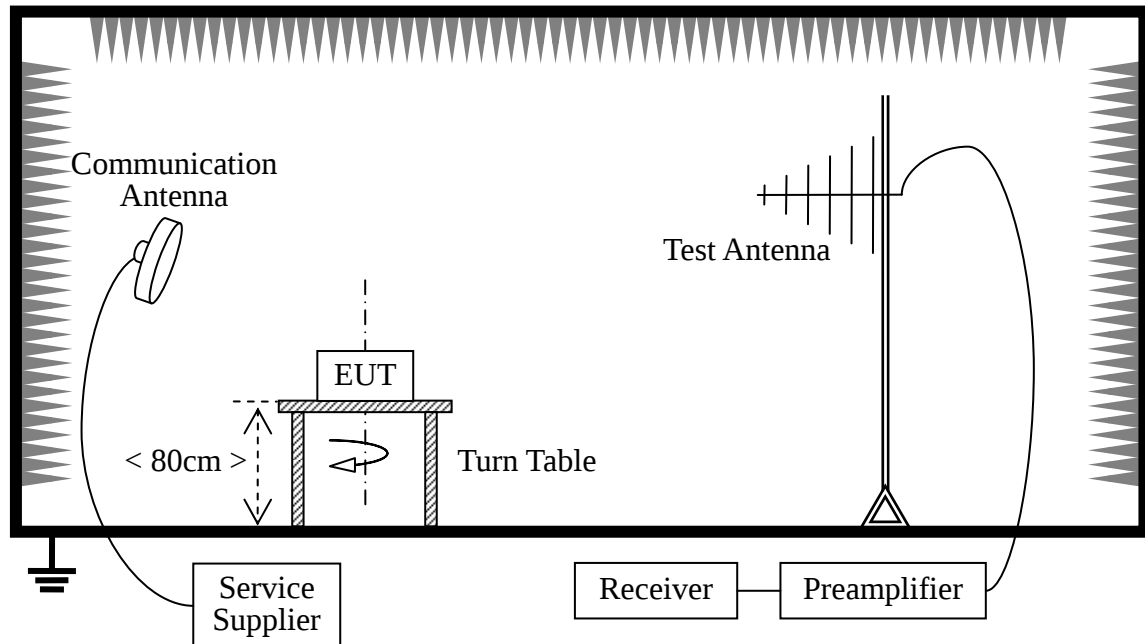

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna: In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength, the azimuth range of turntable was 0° to 360°, the receive antenna has two polarizations horizontal and vertical. When doing measurements above 1GHz, the EUT was placed within the 3dB beam width range of the horn antenna, and the EUT was tested in 3 orthogonal positions as recommended in ANSI C63.4 for Radiated Emissions and the worst-case data was presented.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2009.9	2year
Receiver	Agilent	E7405A	US44210471	2009.9	2year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2009.9	2year
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2009.9	2year
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2009.9	2year
Test Antenna - circular	R&S	AC004R1	0749.3000.03	2009.6	2year

3.9.3 Test Result

GFSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	89.05	83.46	Horizontal	Plot A.1
		94.58	86.37	Vertical	Plot A.2
39	2441	89.76	83.91	Horizontal	Plot B.1
		91.57	86.79	Vertical	Plot B.2
78	2480	87.19	80.95	Horizontal	Plot C.1
		89.97	83.74	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
240.5 M	28.79	46	-17.21	100	77	Horizontel
448.1 M	27.82	46	-18.18	100	55	Horizontel
1603 M	40.04	54	-13.96	100	74	Horizontel
2500 M	48.59	54	-5.41	100	340	Horizontel
3715 M	46.92	54	-7.08	100	292	Horizontel
7990 M	44.91	54	-9.09	100	360	Horizontel
66.9 M	29.78	40	-10.22	100	2	Vertical
240.5 M	28.05	46	-17.95	100	35	Vertical
960.2 M	36	54	-18	100	0	Vertical
1603 M	38.57	54	-15.43	100	116	Vertical
2928 M	48.1	54	-5.9	100	316	Vertical
8125 M	44.05	54	-9.95	100	360	Vertical

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
66.9 M	24.23	40	-15.77	100	57	Horizontal
240.5 M	27.9	46	-18.1	100	18	Horizontal
379.2 M	31.62	46	-14.38	100	2	Horizontal
720.6 M	29.92	46	-16.08	100	40	Horizontal
2793 M	48.97	54	-5.03	100	70	Horizontal
6572 M	44.7	54	-9.3	100	0	Horizontal
66.9 M	29.41	40	-10.59	100	2	Vertical
240.5 M	27.53	46	-18.47	100	10	Vertical
960.2 M	35.1	54	-18.9	100	21	Vertical
1627 M	37.82	54	-16.18	100	22	Vertical
2590 M	48.72	54	-5.28	100	44	Vertical
7945 M	44.81	54	-9.19	100	19	Vertical

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
36.8 M	25.22	40	-14.78	100	308	Horizontal
240.5 M	30.37	46	-15.63	100	268	Horizontal
598.4 M	36.58	46	-9.42	100	207	Horizontal
2793 M	46.13	54	-7.87	100	315	Horizontal
8777 M	44.24	54	-9.76	100	315	Horizontal
36.8 M	25.44	40	-14.56	100	11	Vertical
66.9 M	30.9	40	-9.1	100	0	Vertical
240.5 M	27.12	46	-18.88	100	0	Vertical
960.2 M	35.09	54	-18.91	100	2	Vertical
2928 M	45.6	54	-8.4	100	19	Vertical
8035 M	44.05	54	-9.95	94	94	Vertical

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

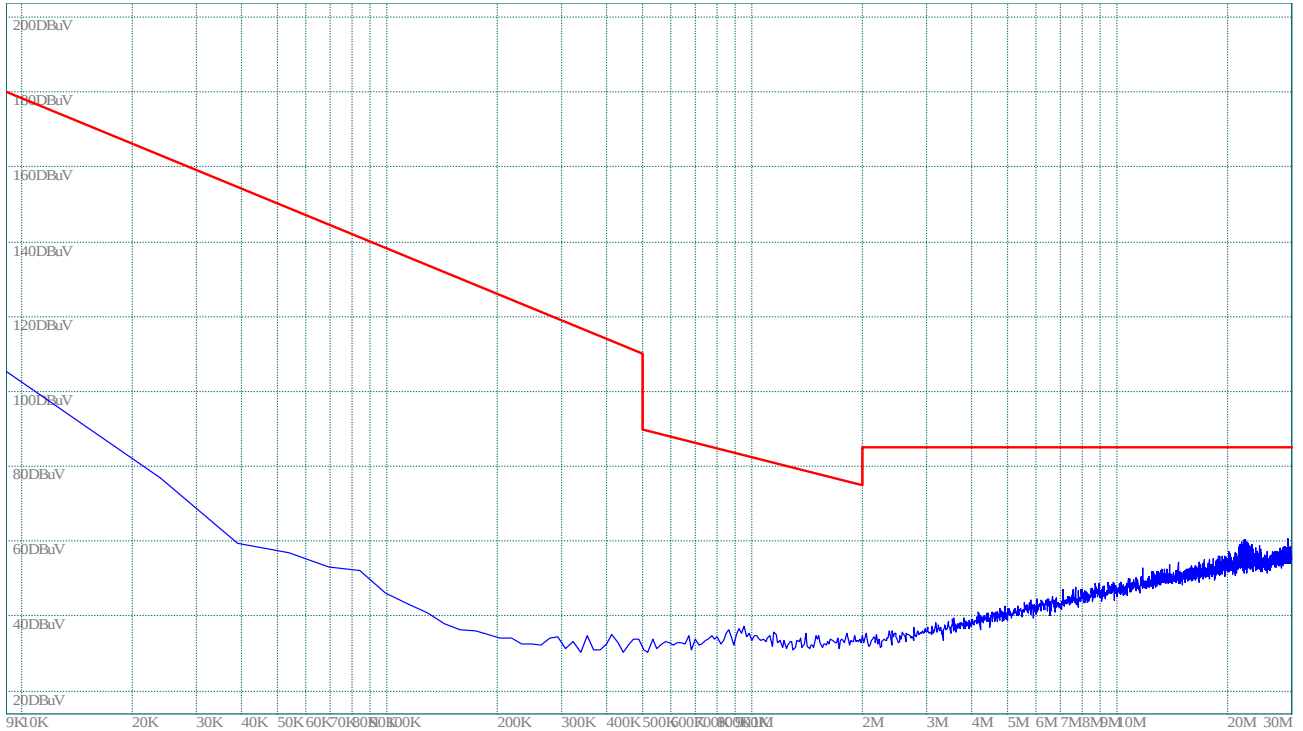

(Plot A.0: 9kHz to 30MHz)

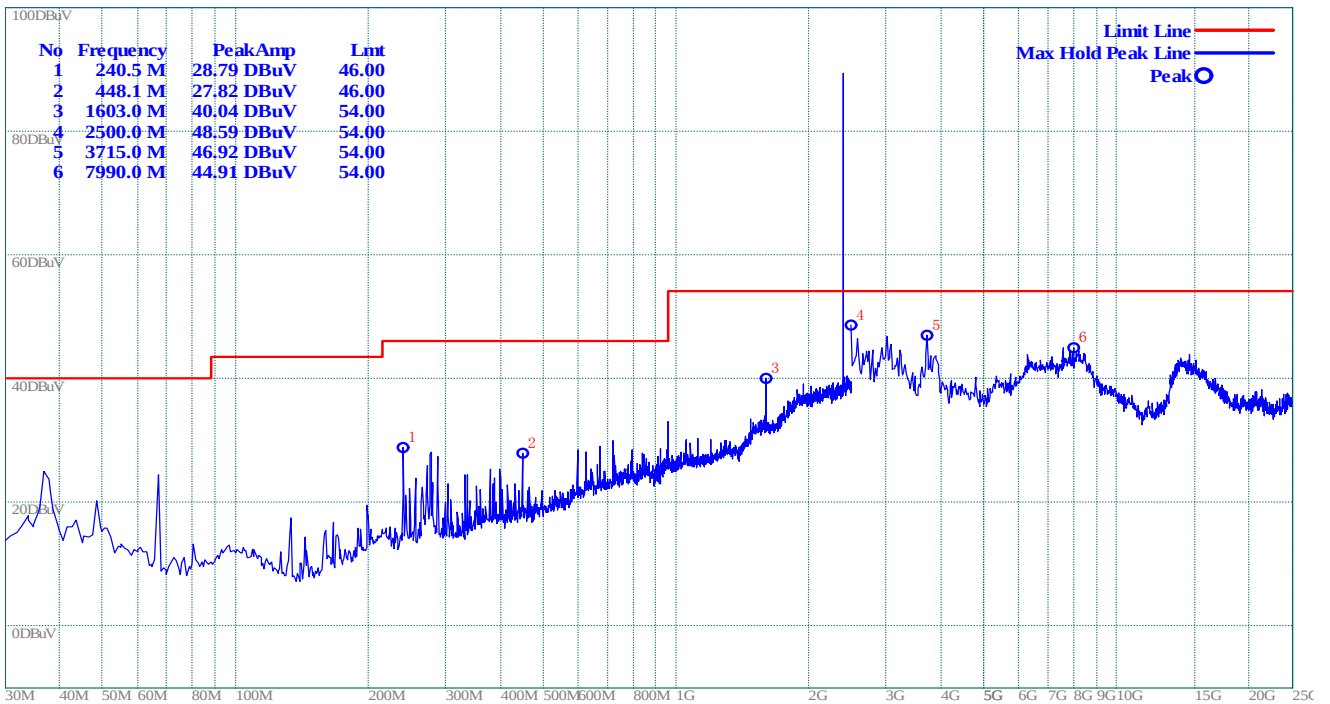


(Plot A.1: Antenna Horizontal)

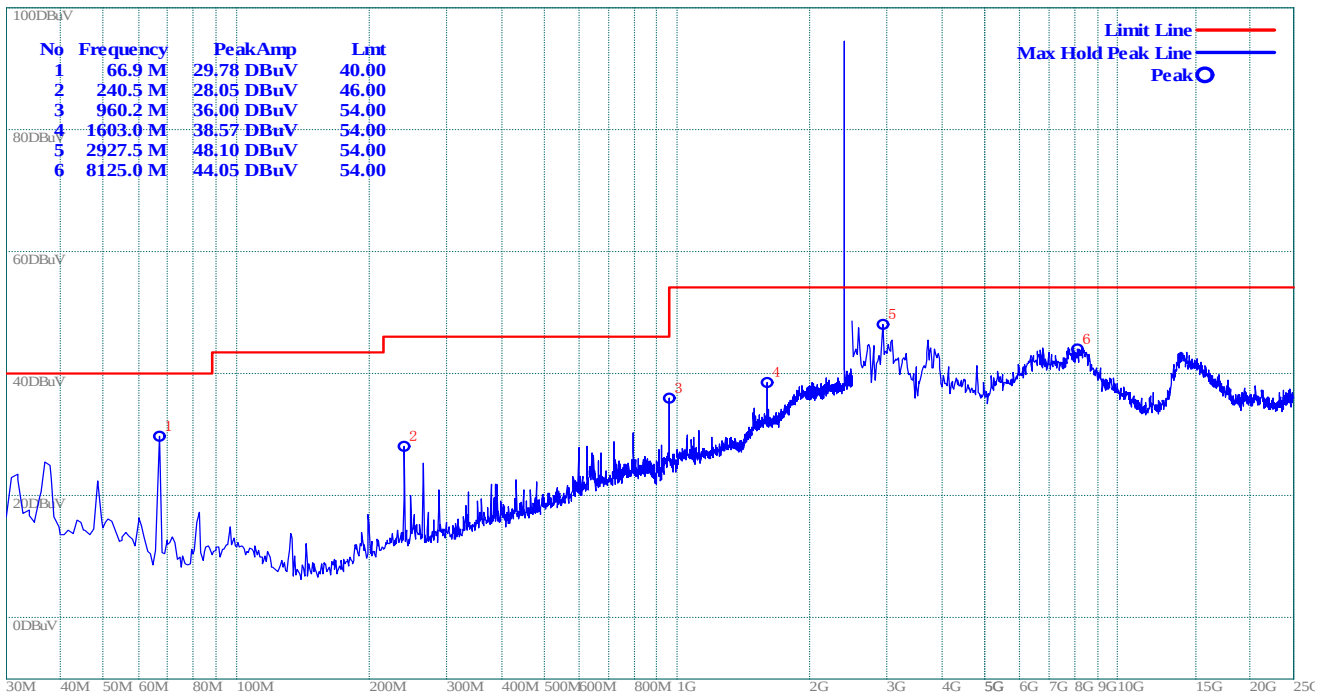


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

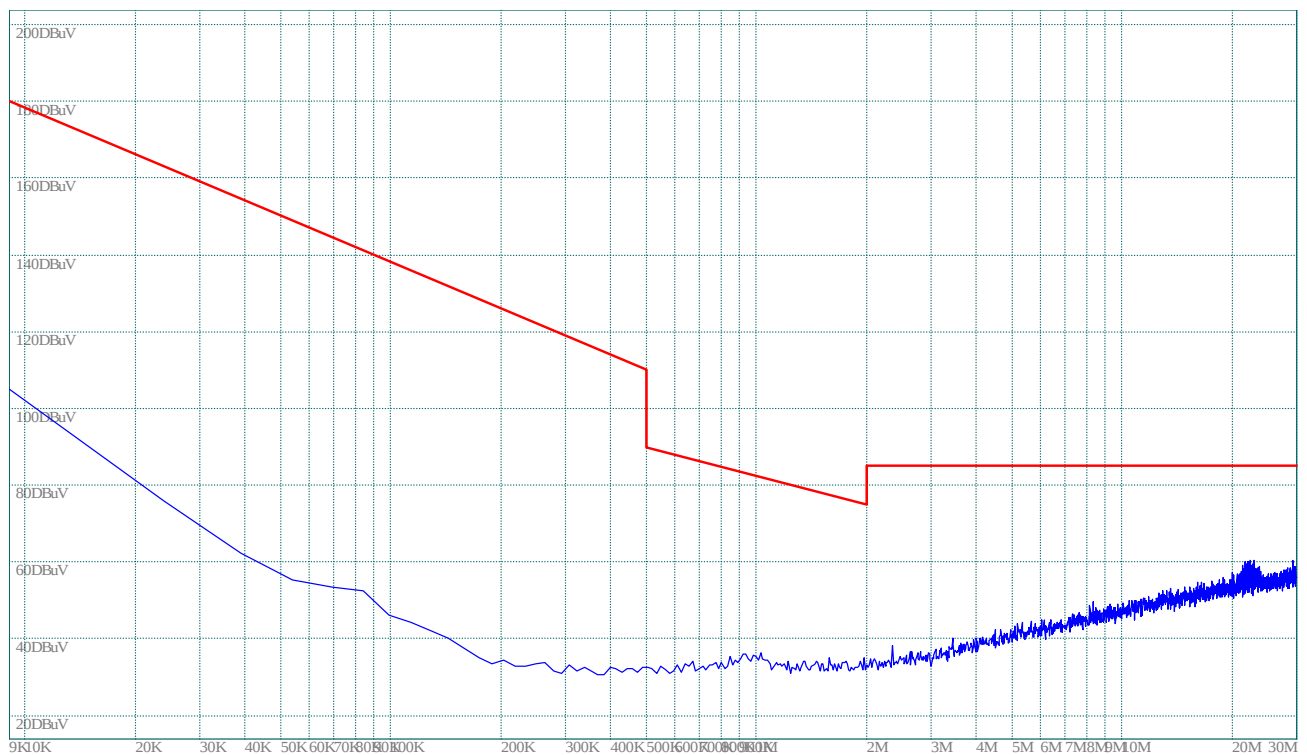

(Plot B.0: 9kHz to 30MHz)

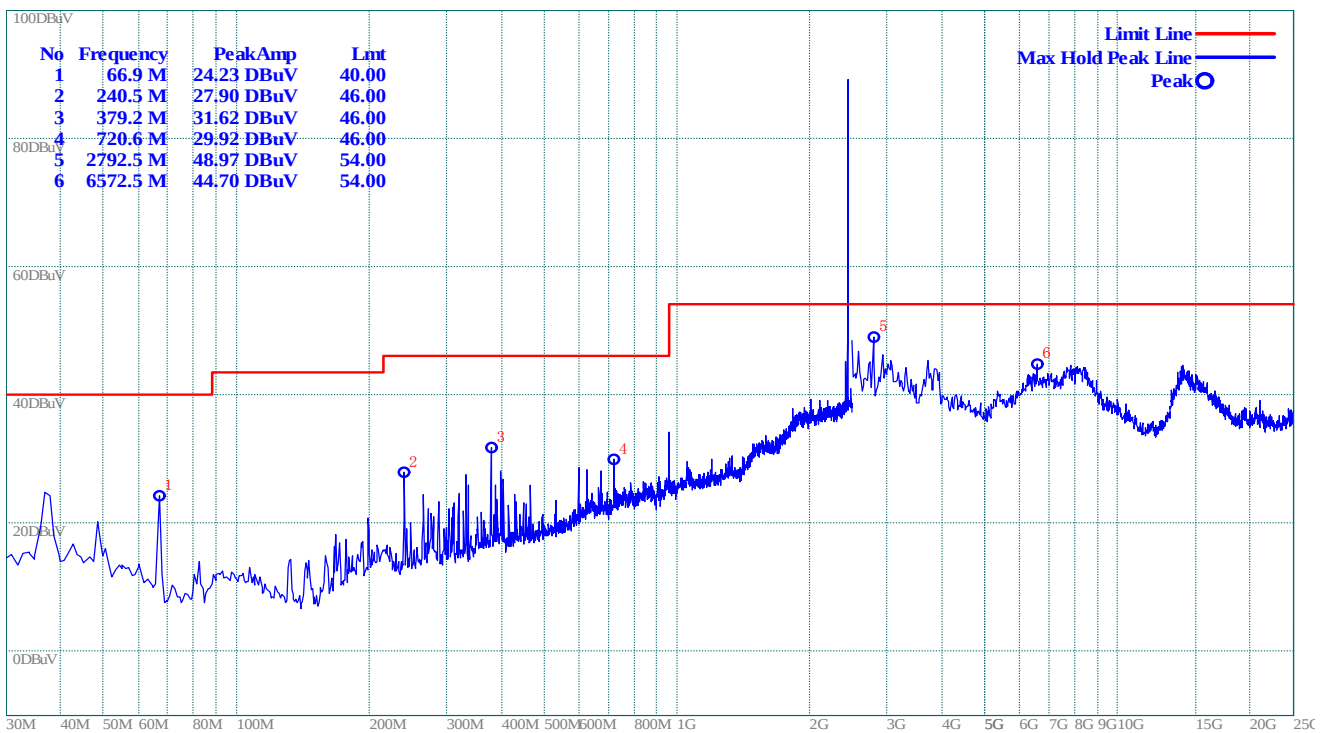


(Plot B.1: Antenna Horizontal)

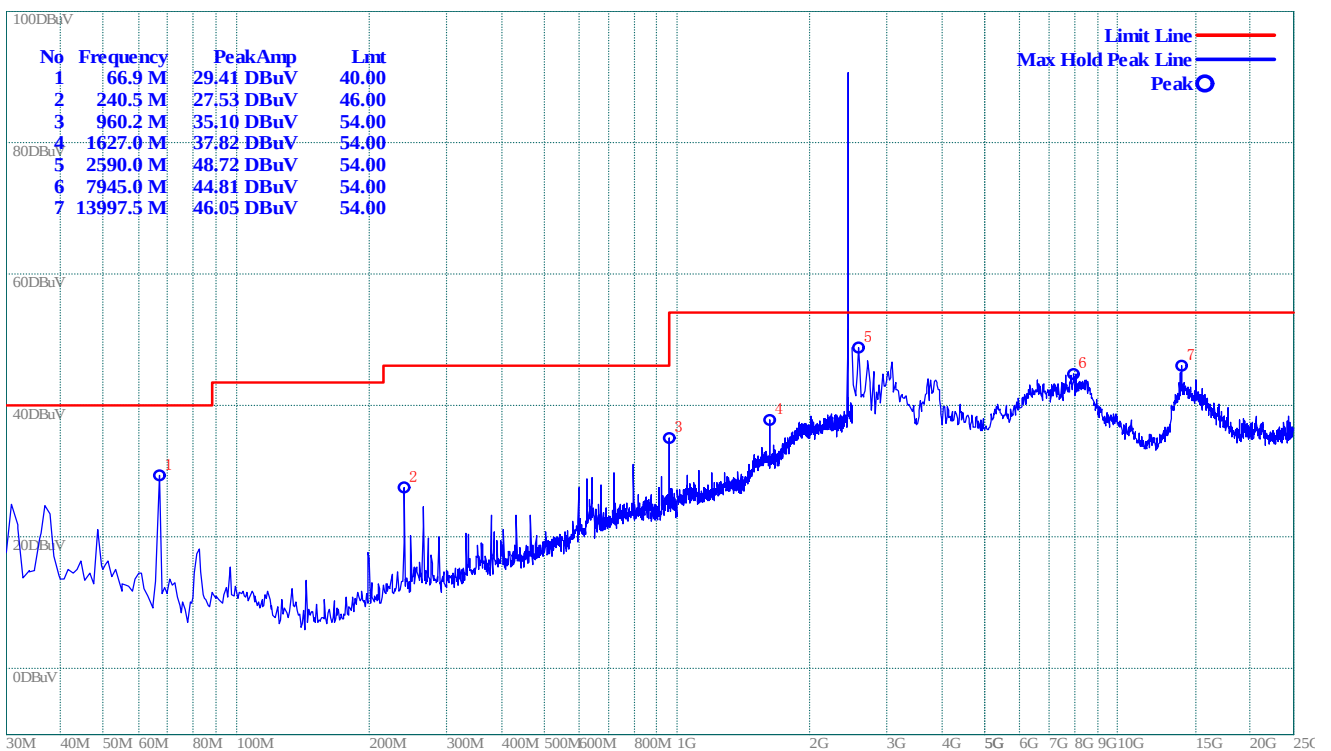


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

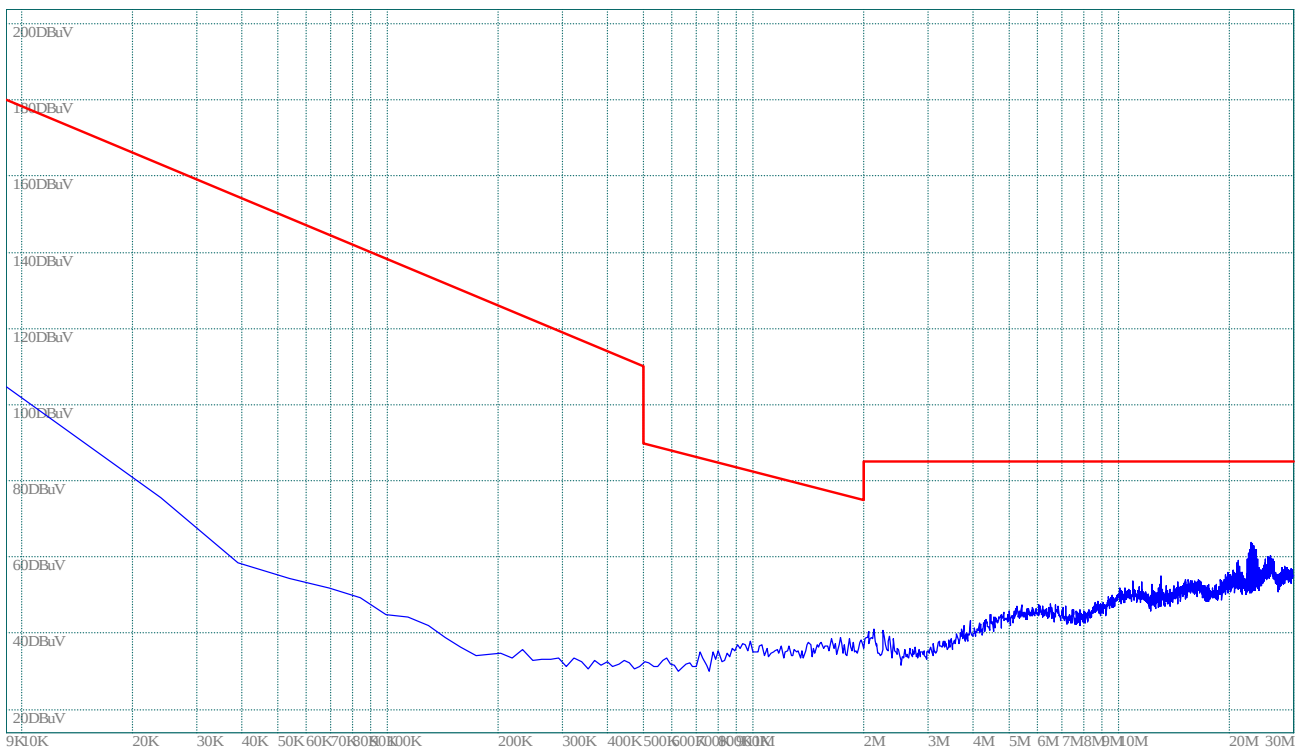

(Plot C.0: 9kHz to 30MHz)

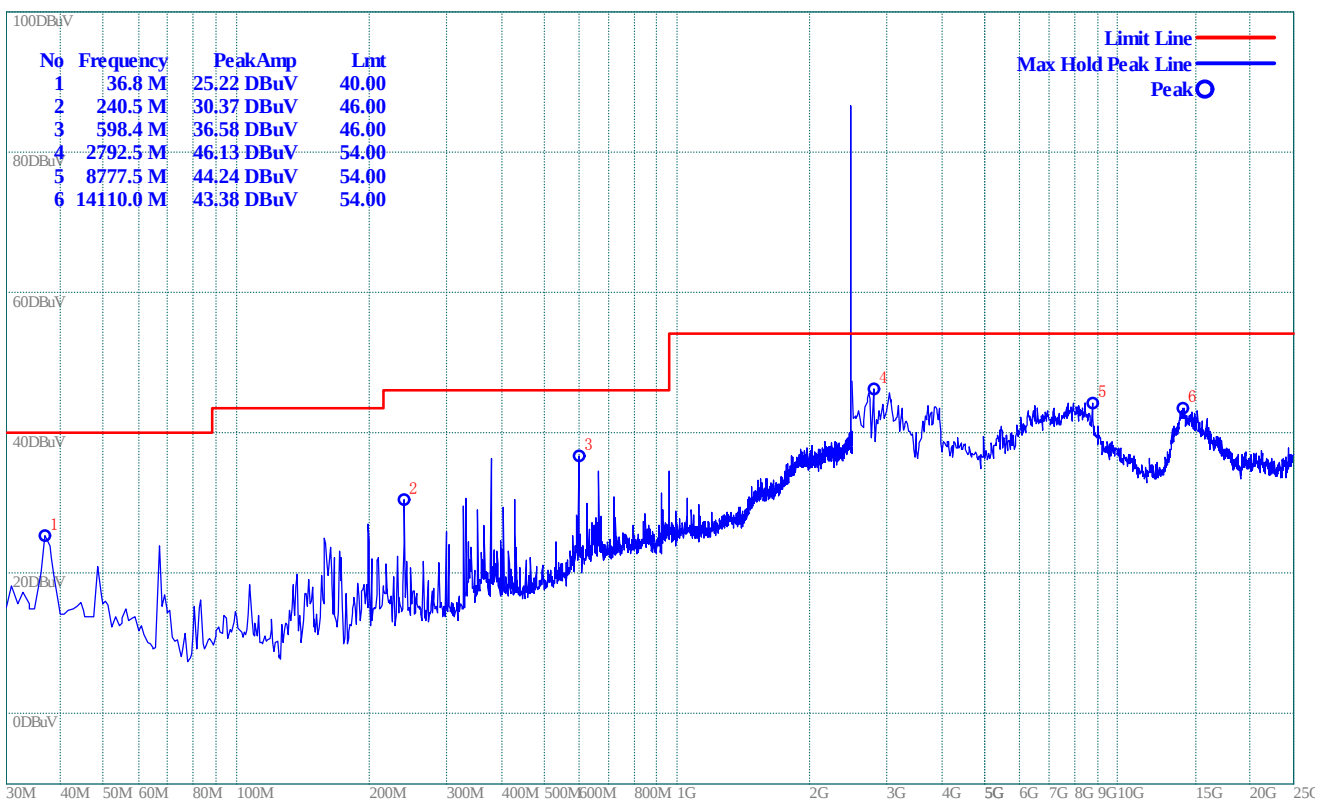

(Plot C.1: Antenna Horizontal)

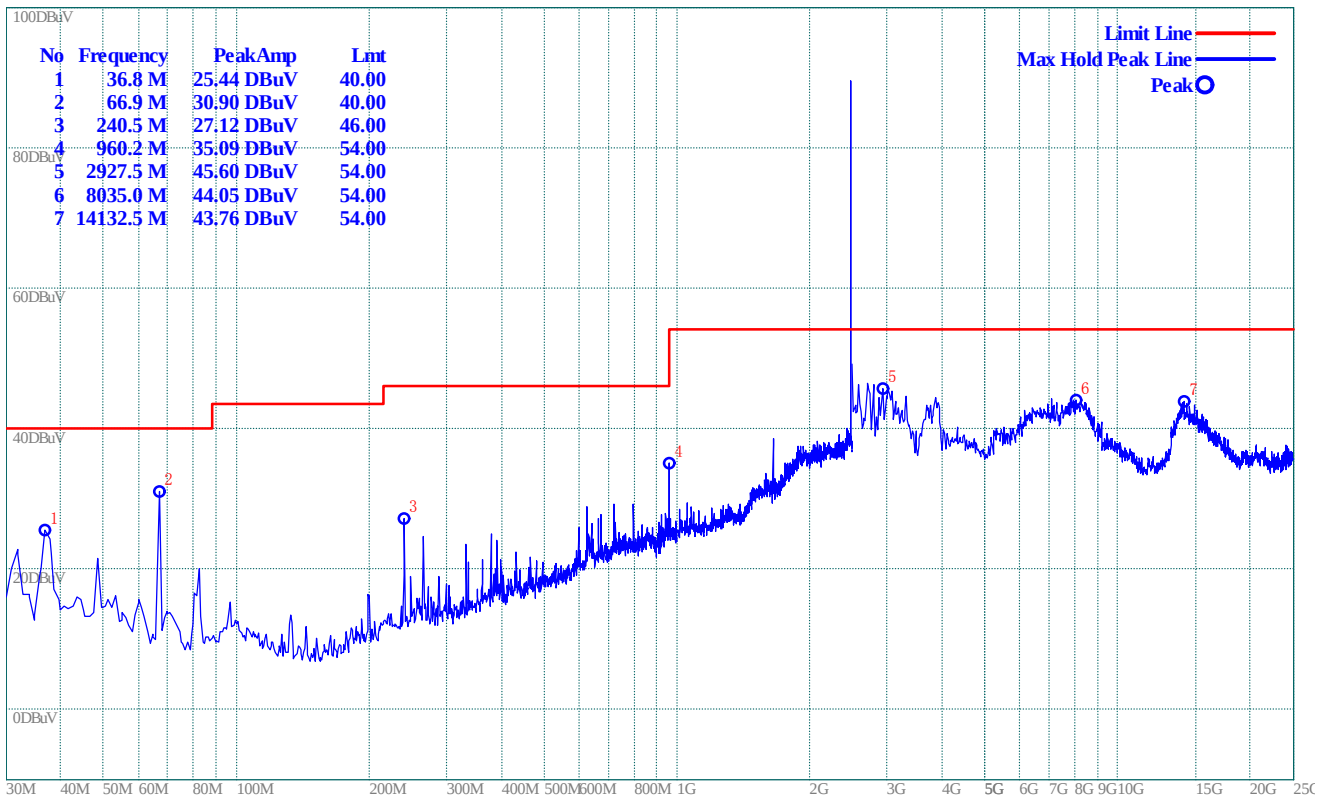

(Plot C.2: Antenna Vertical)

$\pi/4$ -DQPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	84.55	79.06	Horizontal	Plot A.1
		88.86	82.24	Vertical	Plot A.2
39	2441	84.92	80.13	Horizontal	Plot B.1
		91.55	84.65	Vertical	Plot B.2
78	2480	86.03	81.24	Horizontal	Plot C.1
		86.48	81.93	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	31.6	43.5	-11.9	100	206	Horizontal
912.7 M	34.94	46	-11.06	100	94	Horizontal
52.3 M	32.11	40	-7.89	100	73	Vertical
912.7 M	33.93	46	-12.07	100	359	Vertical


Test result of channel: 39 (2442MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	24.5	43.5	-19	100	0	Horizontal
912.7 M	32.49	46	-13.51	100	34	Horizontal
208.5 M	23.41	43.5	-20.09	100	111	Vertical
912.7 M	32.97	46	-13.03	100	325	Vertical


Test result of channel: 78 (2480MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	30.38	43.5	-13.12	100	203	Horizontal
912.7 M	34.18	46	-11.82	100	152	Horizontal
31.0 M	35.96	40	-4.04	100	357	Vertical
240.5 M	23.34	46	-22.66	100	306	Vertical
624.6 M	30.8	46	-15.2	100	306	Vertical
2.793 G	47.89	54	-6.11	100	271	Vertical


B. Test Plots for the Whole Measurement Frequency Range:

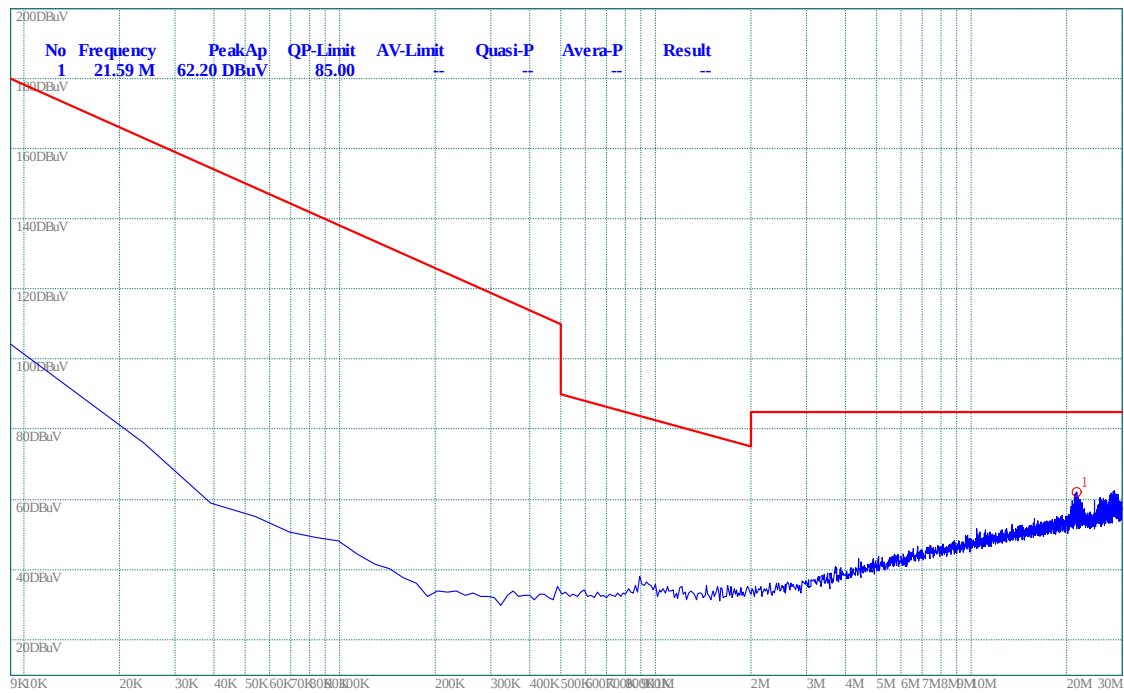

(Plot A.0: 9kHz to 30MHz)

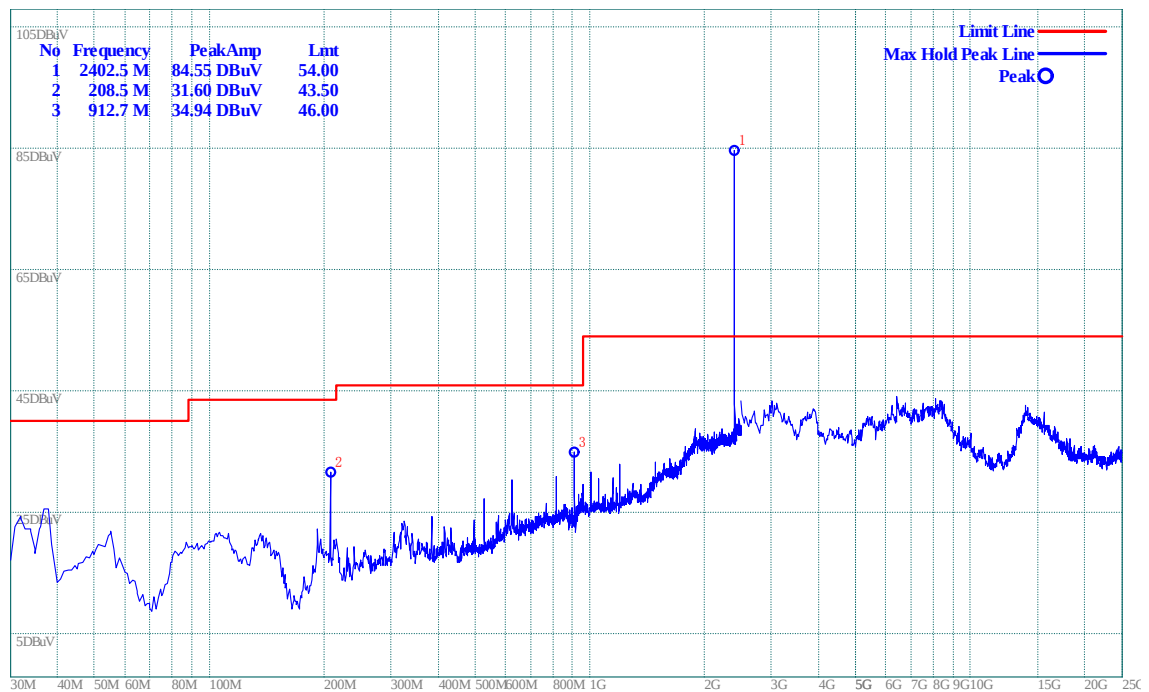


(Plot A.1: Antenna Horizontal)

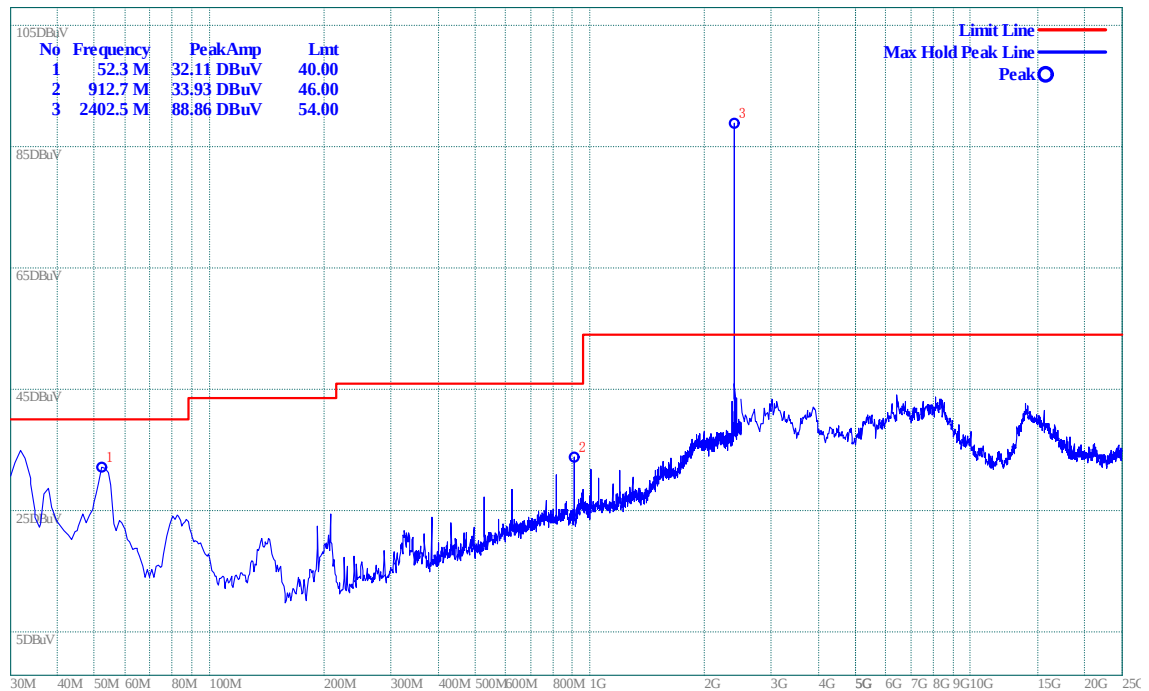


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

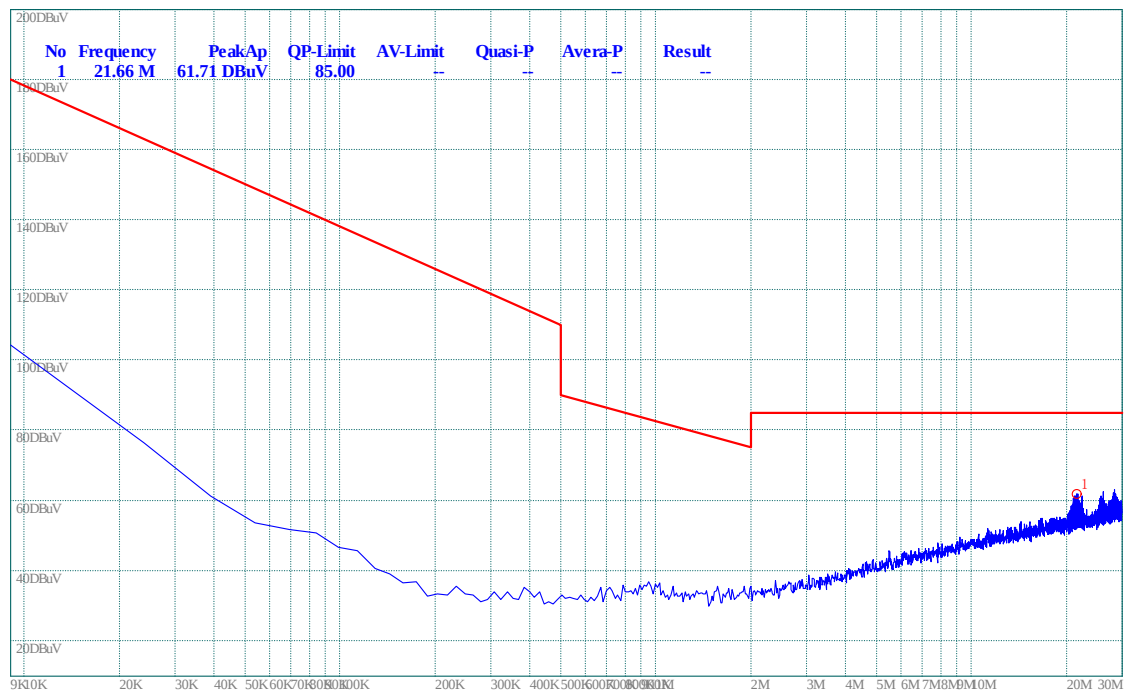

(Plot B.0: 9kHz to 30MHz)

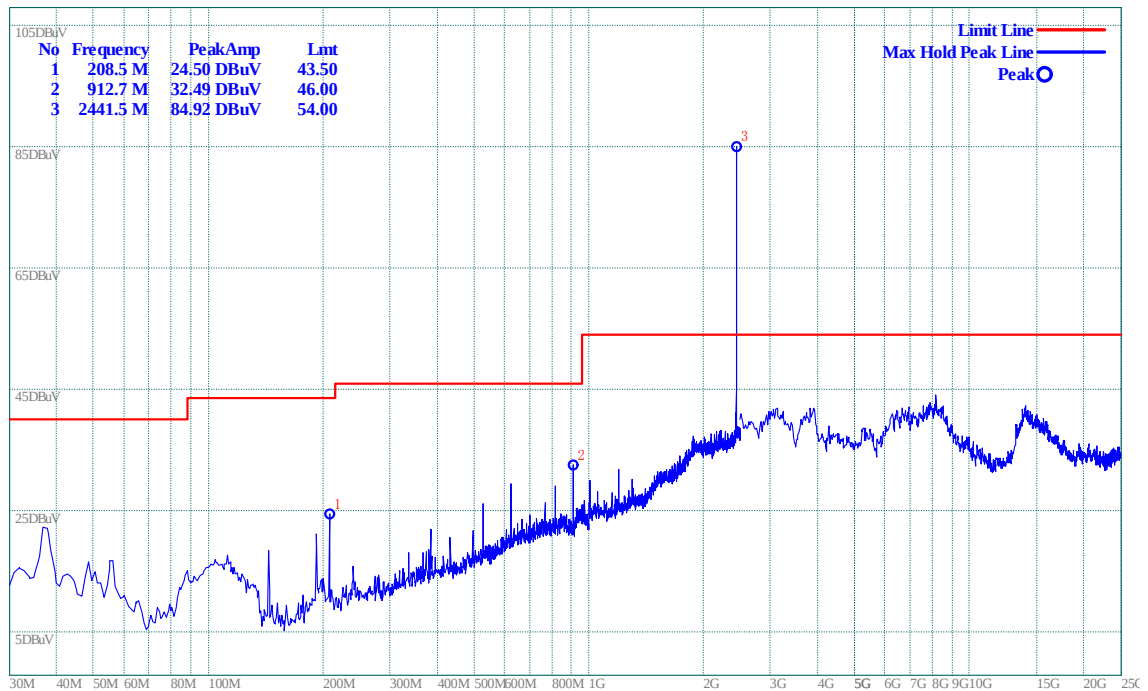


(Plot B.1: Antenna Horizontal)

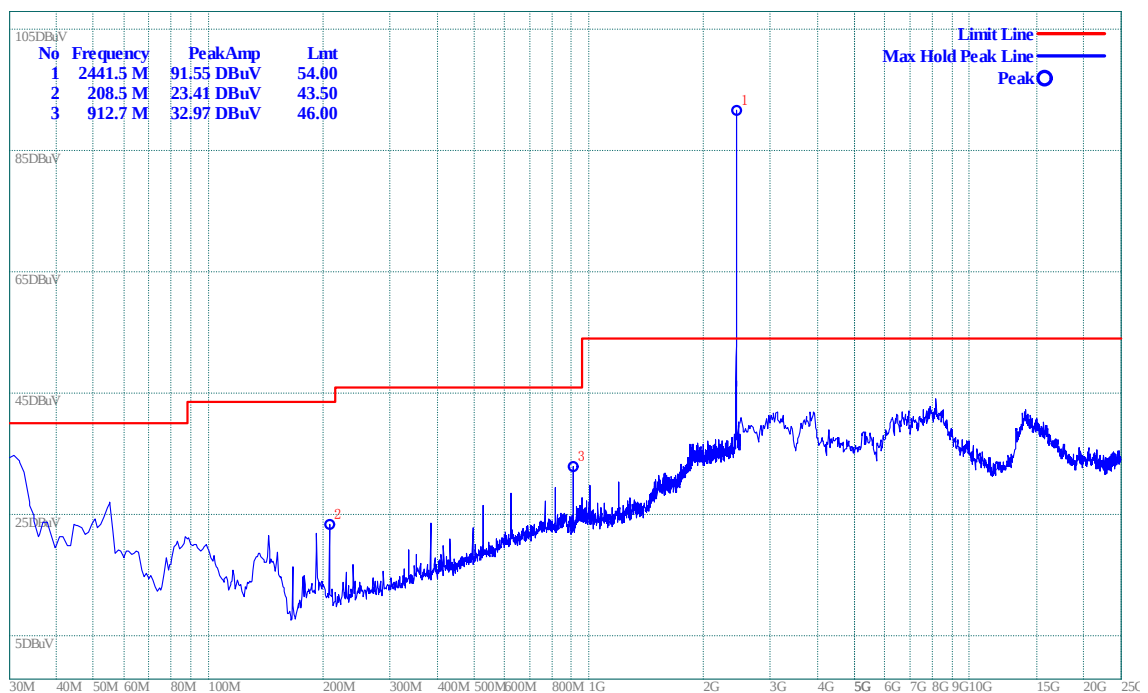


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

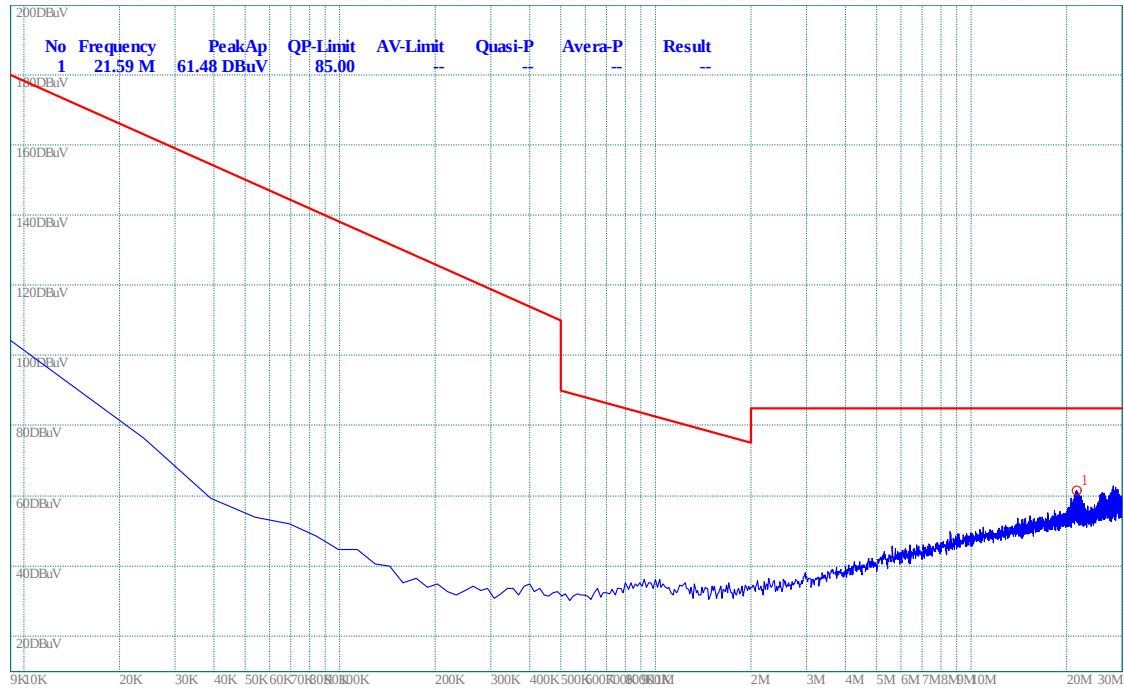

(Plot C.0: 9kHz to 30MHz)

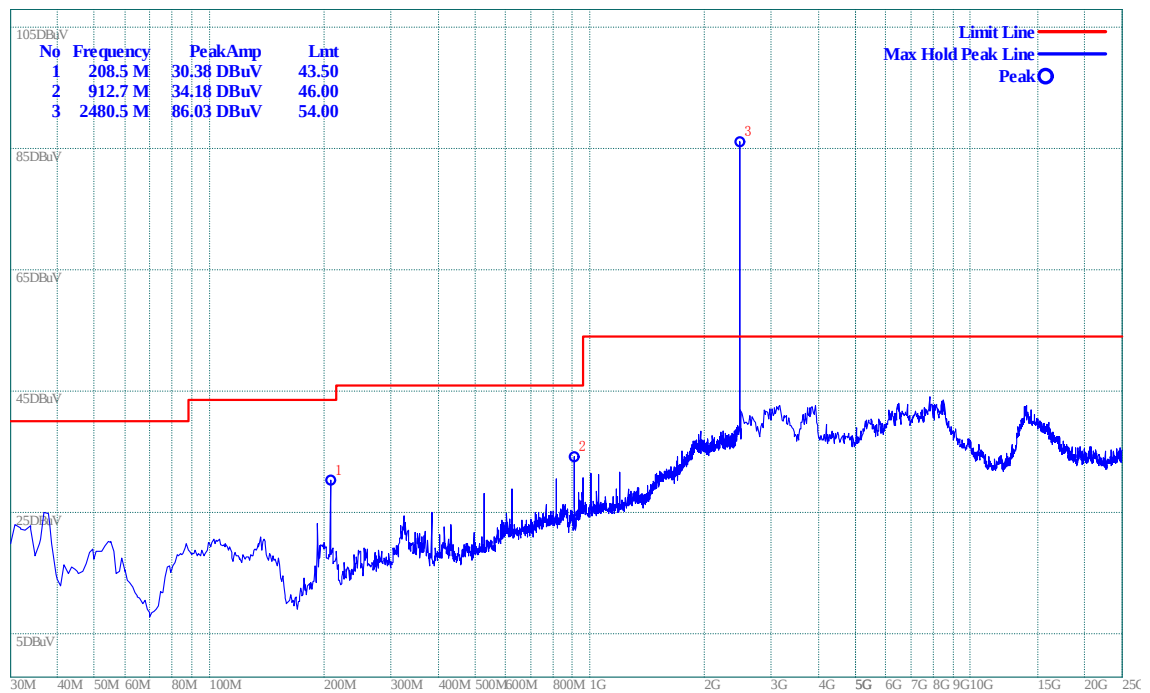

(Plot C.1: Antenna Horizontal)

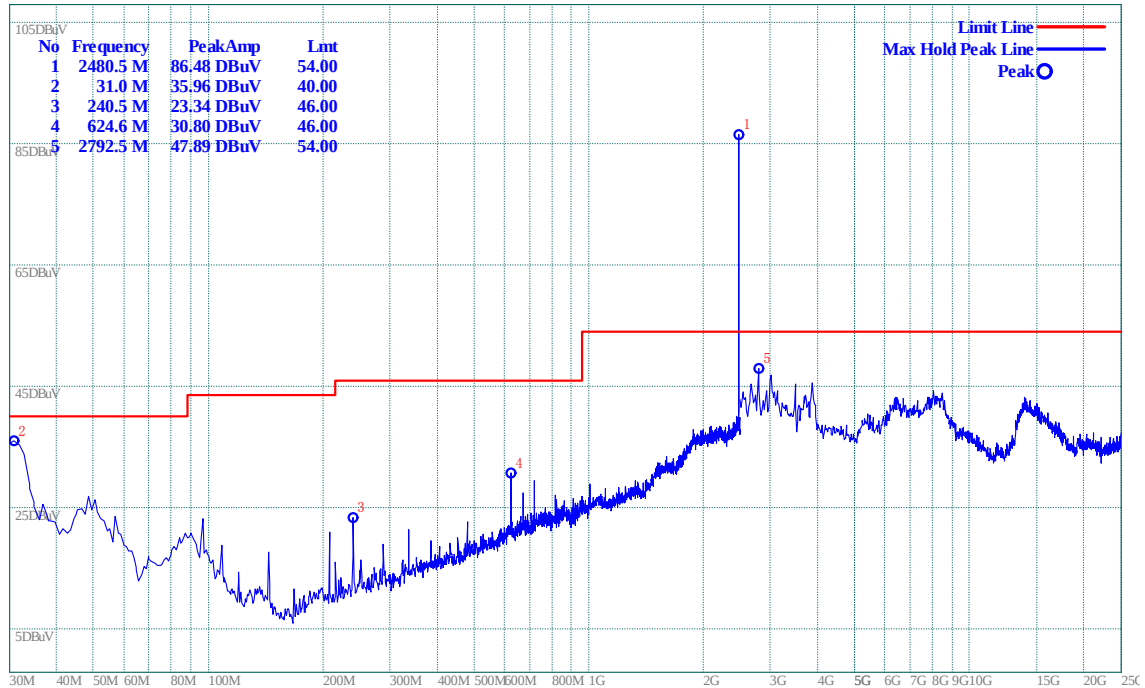

(Plot C.2: Antenna Vertical)

8-DPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	84.55	79.85	Horizontal	Plot A.1
		88.86	83.21	Vertical	Plot A.2
39	2441	84.92	79.89	Horizontal	Plot B.1
		91.55	86.09	Vertical	Plot B.2
78	2480	86.03	82.55	Horizontal	Plot C.1
		86.48	83.16	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	31.6	43.5	-11.9	100	206	Horizontal
912.7 M	34.94	46	-11.06	100	94	Horizontal
52.3 M	32.11	40	-7.89	100	73	Vertical
912.7 M	33.93	46	-12.07	100	359	Vertical

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	24.5	43.5	-19	100	0	Horizontal
912.7 M	32.49	46	-13.51	100	34	Horizontal
208.5 M	23.41	43.5	-20.09	100	111	Vertical
912.7 M	32.97	46	-13.03	100	325	Vertical

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	30.38	43.5	-13.12	100	203	Horizontal
912.7 M	34.18	46	-11.82	100	152	Horizontal
31.0 M	35.96	40	-4.04	100	357	Vertical
240.5 M	23.34	46	-22.66	100	306	Vertical
624.6 M	30.8	46	-15.2	100	306	Vertical
2.793 G	47.89	54	-6.11	100	271	Vertical

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

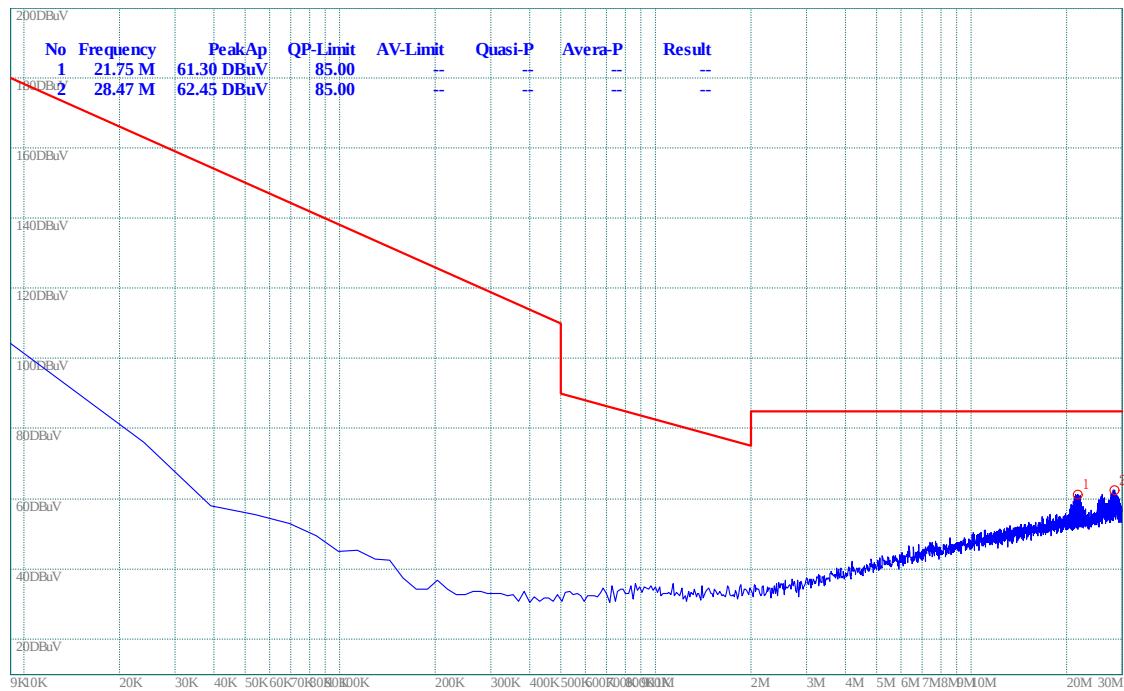

(Plot A.0: 9kHz to 30MHz)

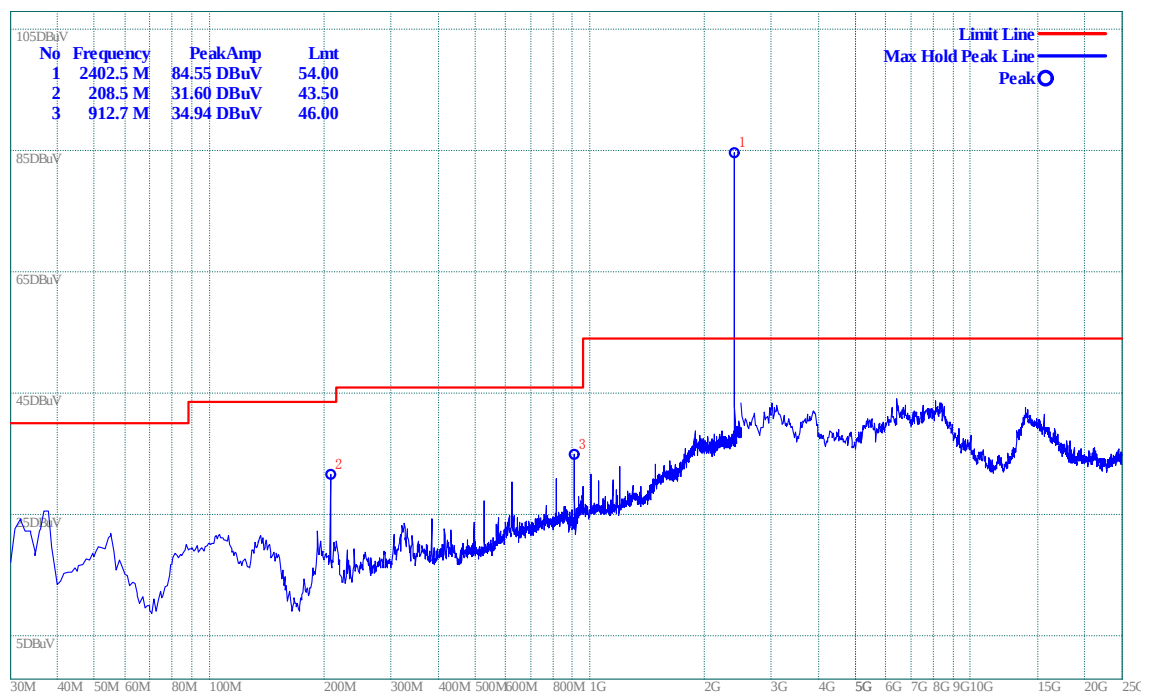


(Plot A.1: Antenna Horizontal)

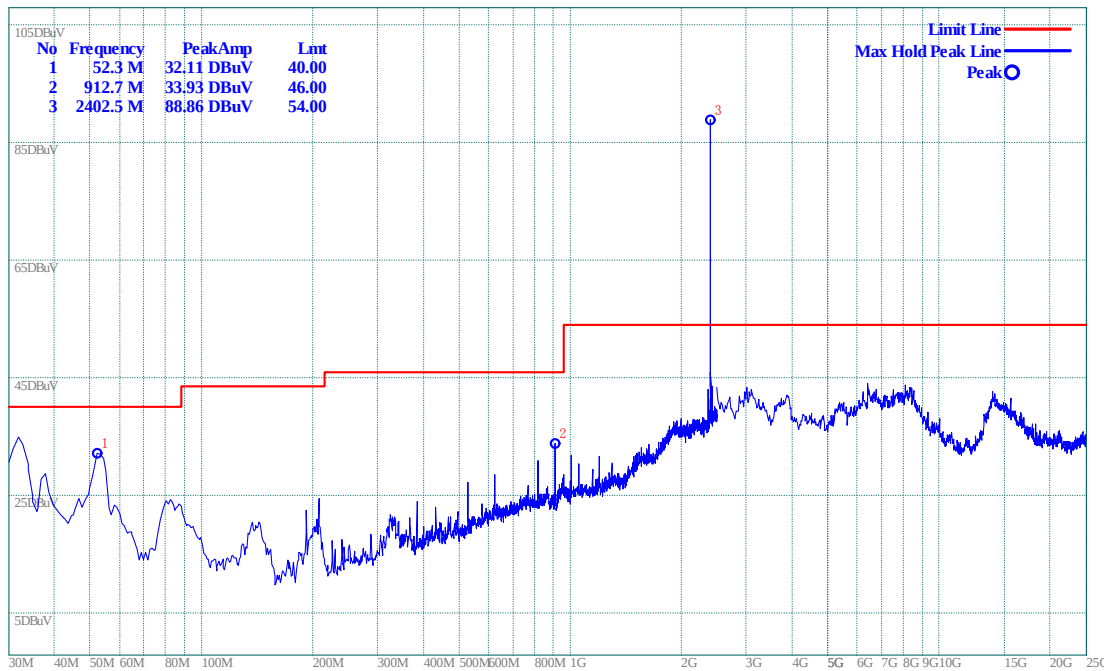


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

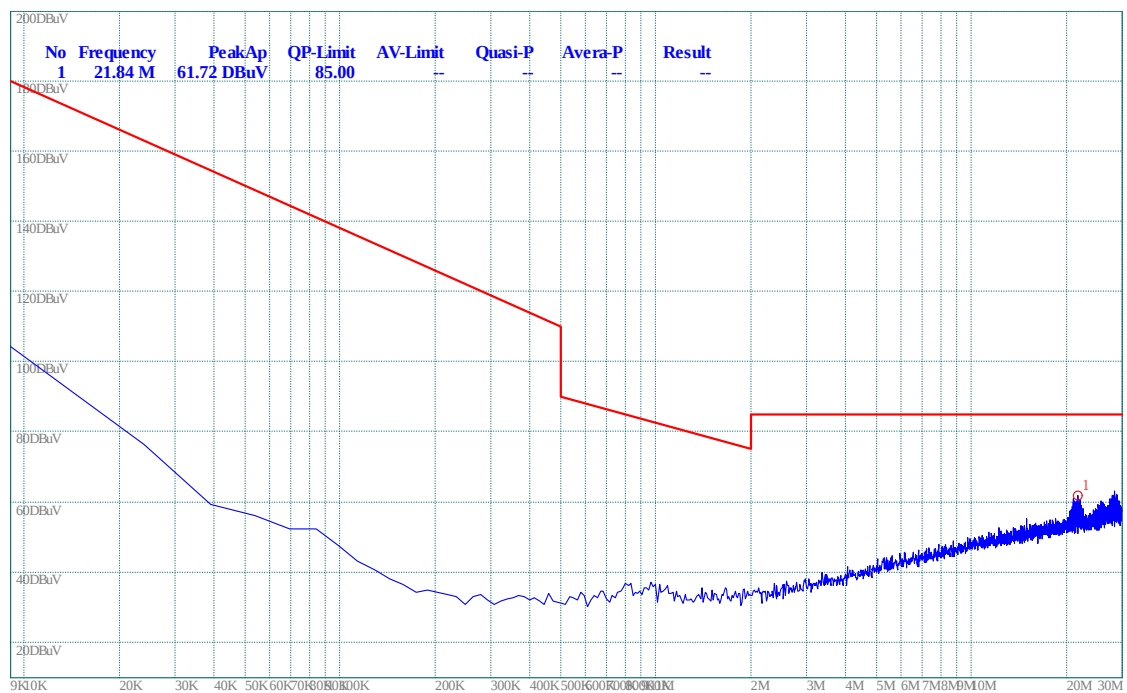

(Plot B.0: 9kHz to 30MHz)

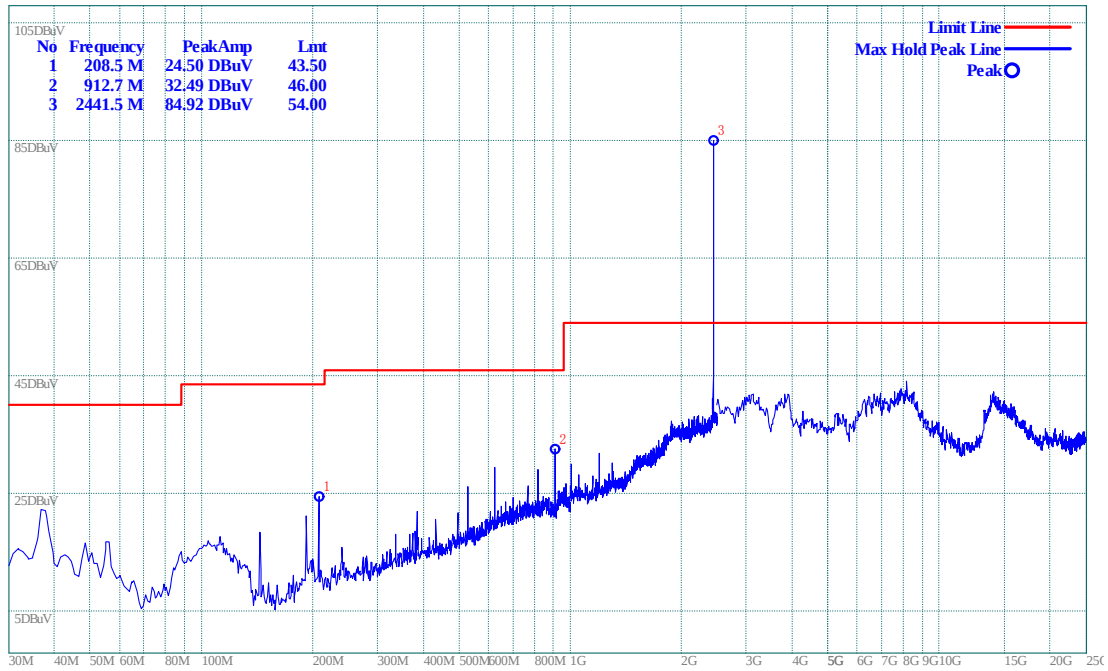


(Plot B.1: Antenna Horizontal)

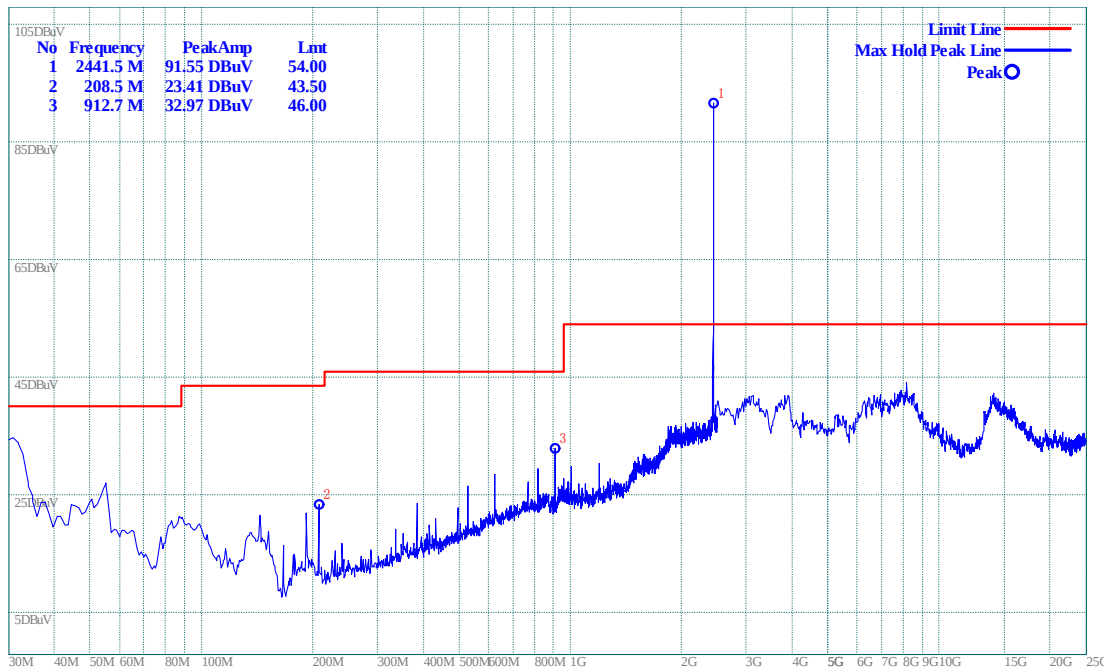


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

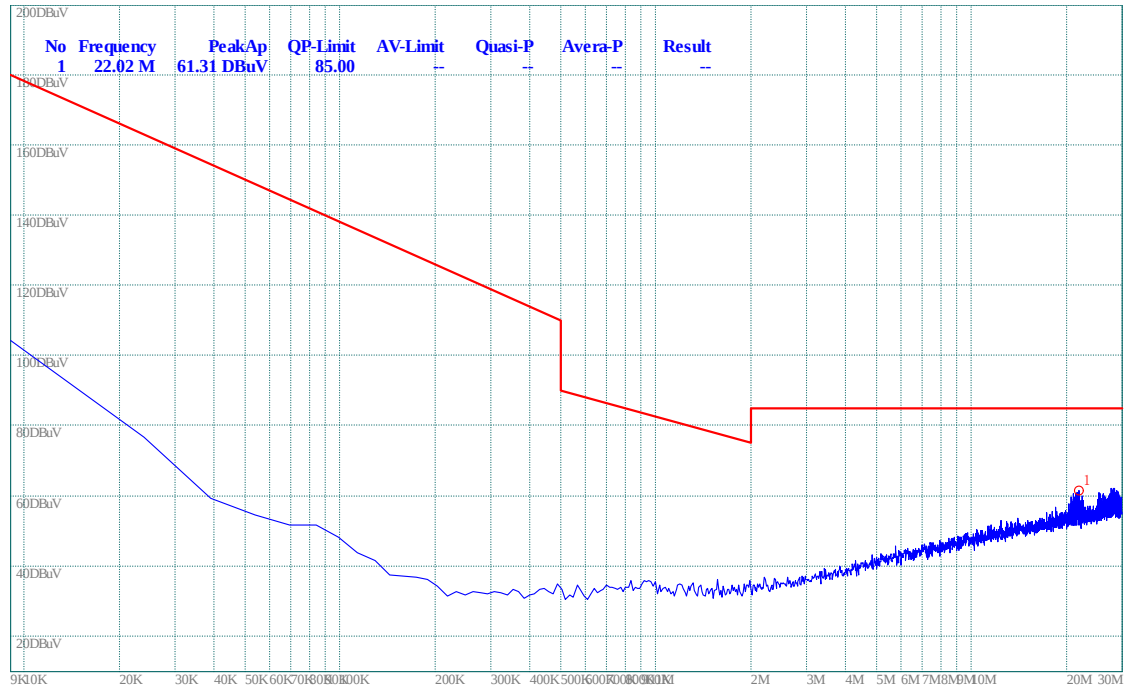

(Plot C.0: 9kHz to 30MHz)

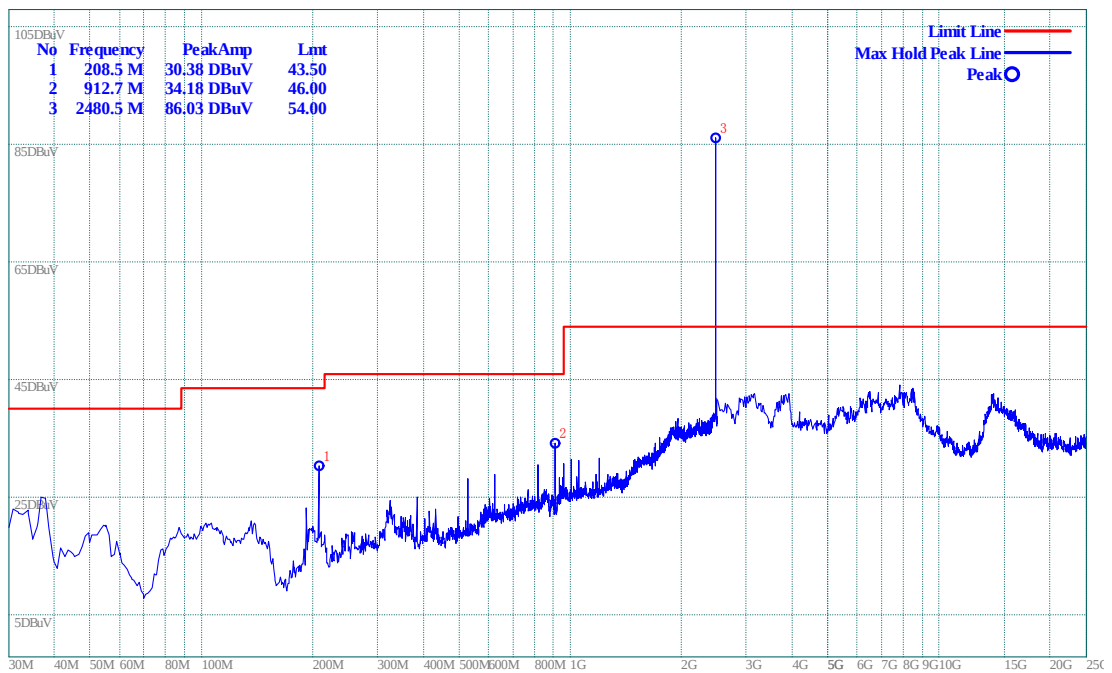

(Plot C.1: Antenna Horizontal)

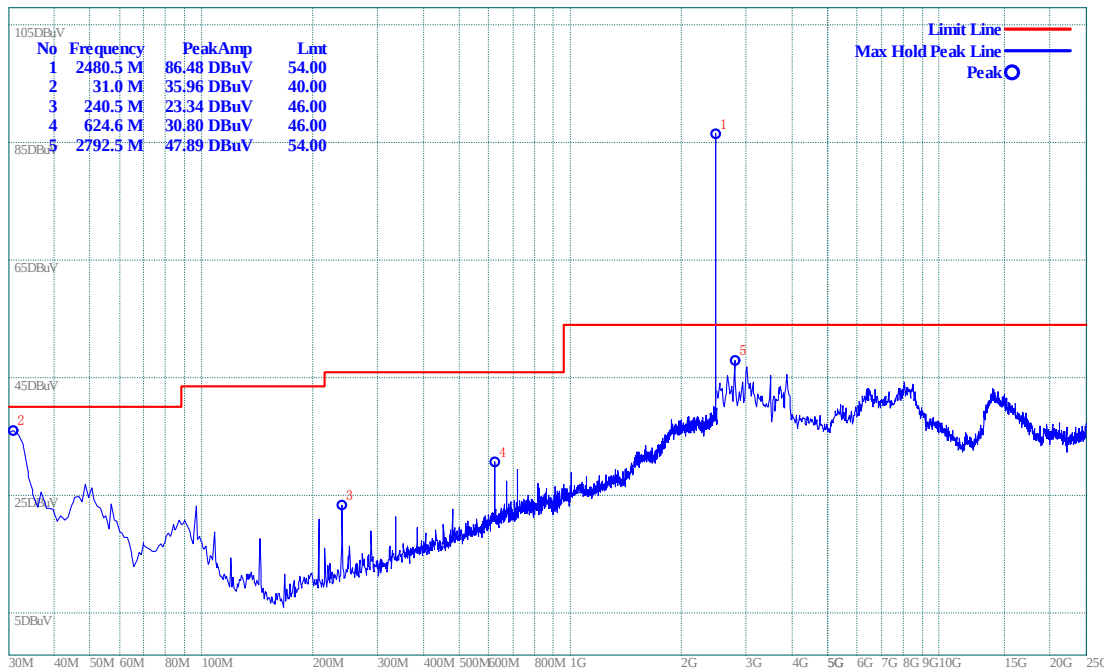

(Plot C.2: Antenna Vertical)

Receiver Mode:

C. Test Verdict for Harmonics:


The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.


Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	34.22	--	Horizontal	Plot A.1
		49.87	--	Vertical	Plot A.2
39	2441	51.33	--	Horizontal	Plot B.1
		50.44	--	Vertical	Plot B.2
78	2480	47.50	--	Horizontal	Plot C.1
		50.77	--	Vertical	Plot C.2

D. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0

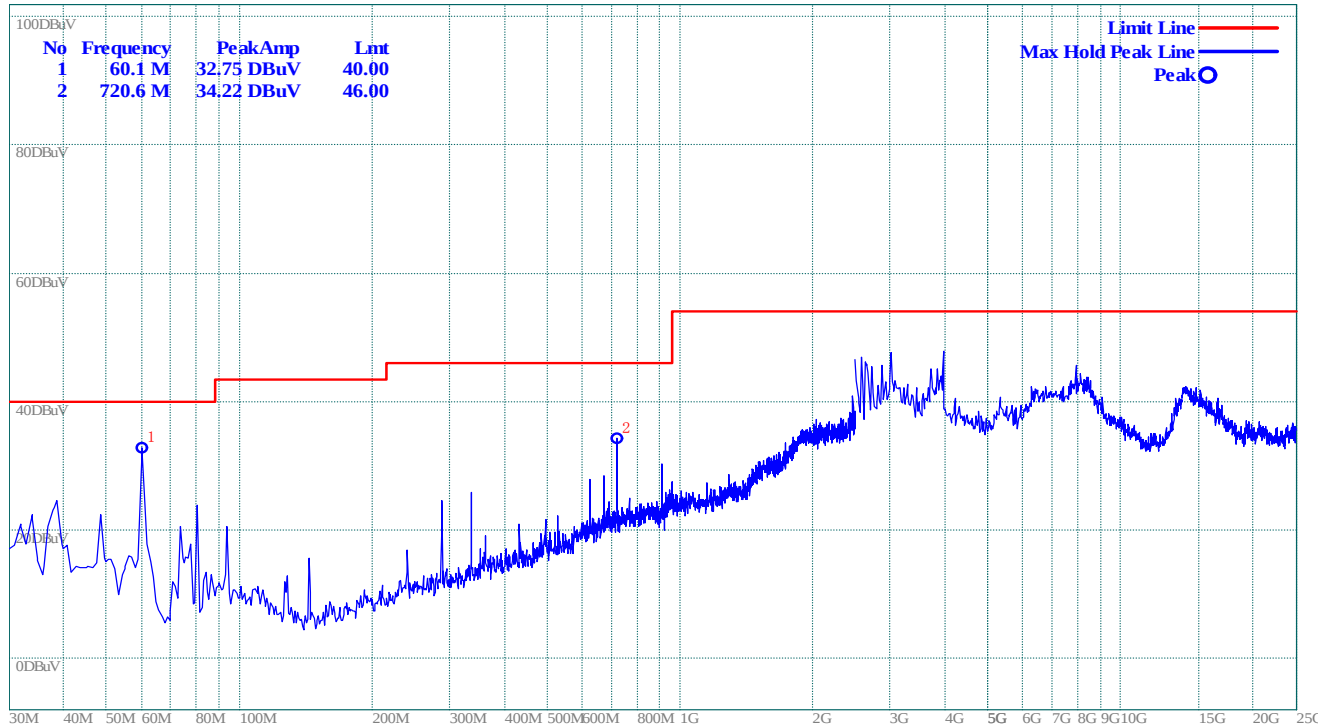


(Plot A.1: Antenna Horizontal)

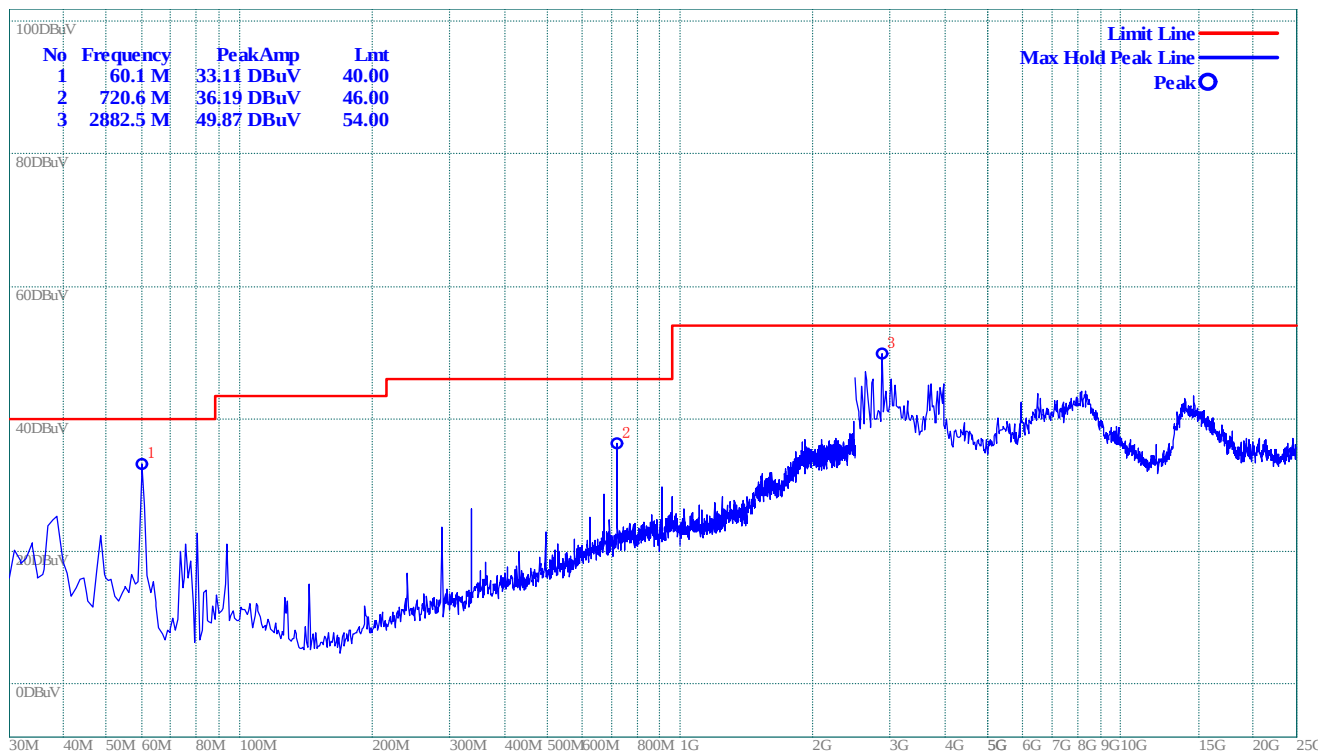


(Plot A.2: Antenna Vertical)

Plot for Channel = 39

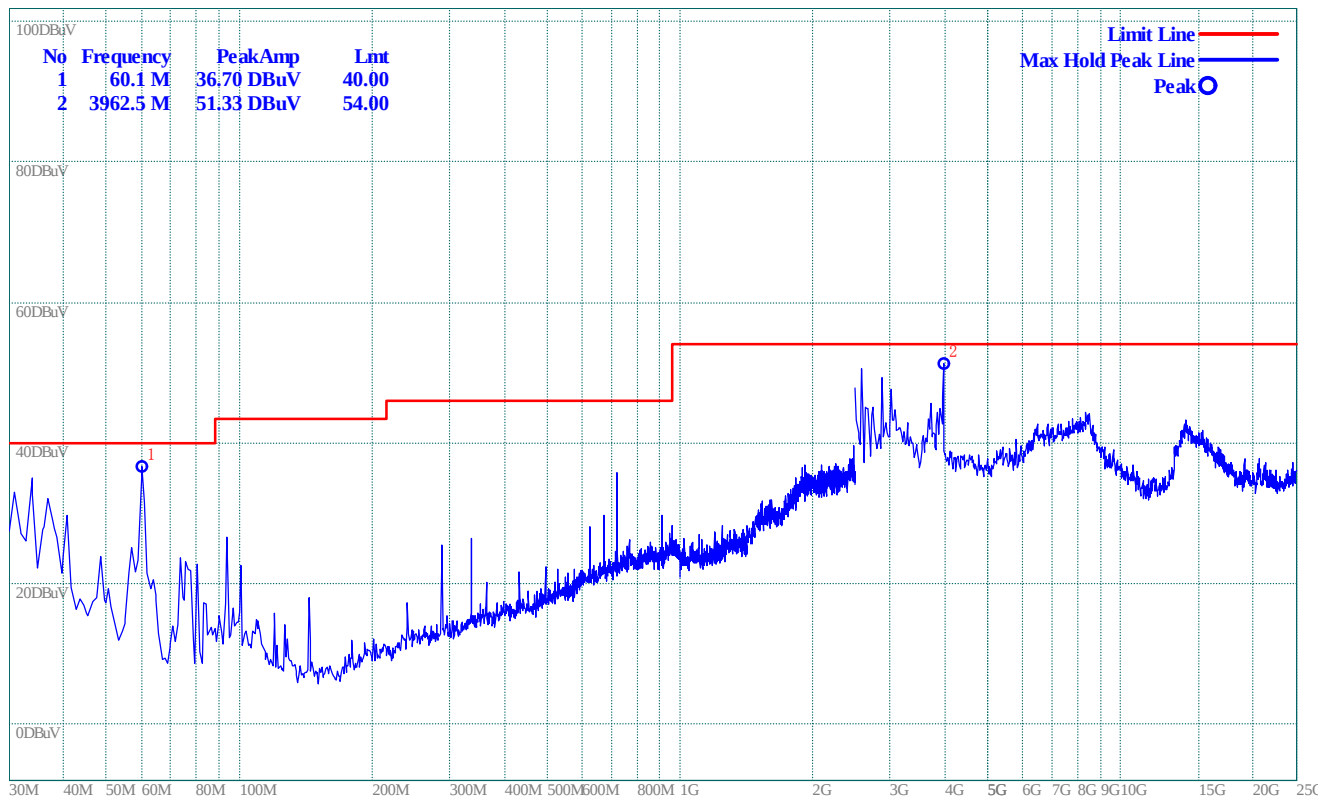


(Plot B.1: Antenna Horizontal)

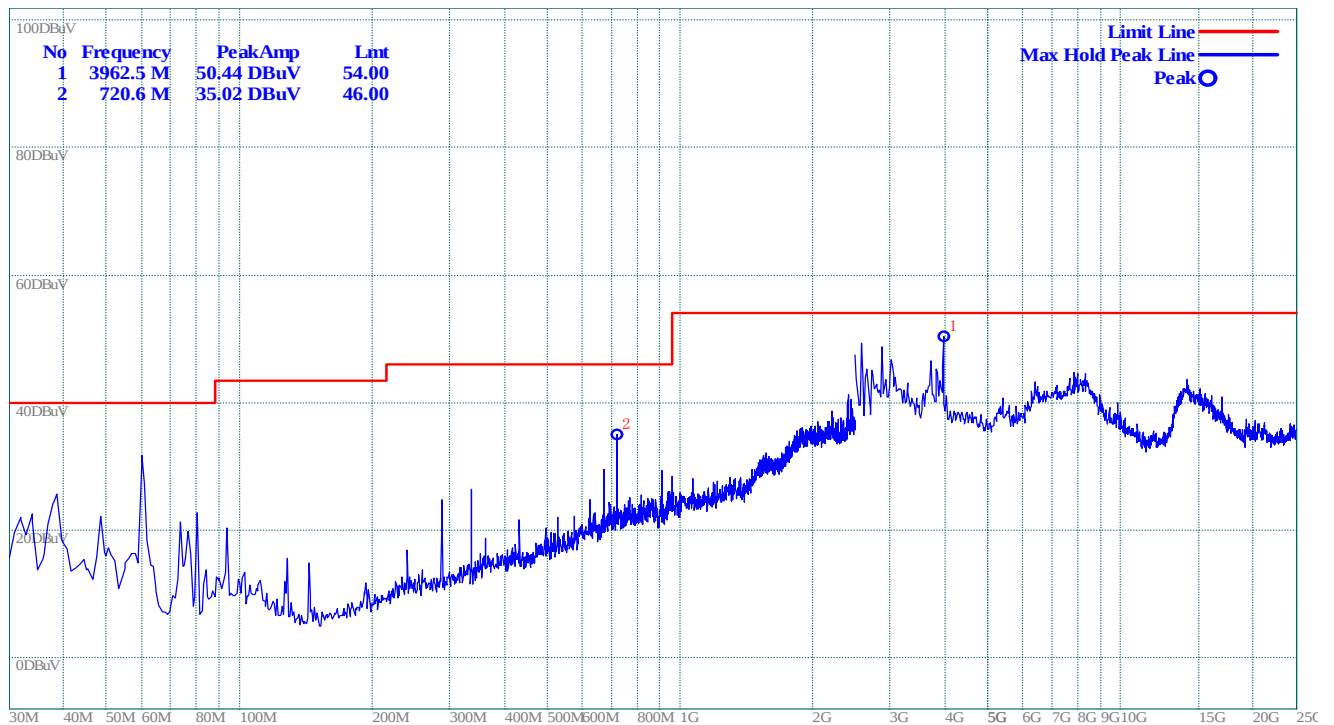


(Plot B.2: Antenna Vertical)

Plot for Channel = 78

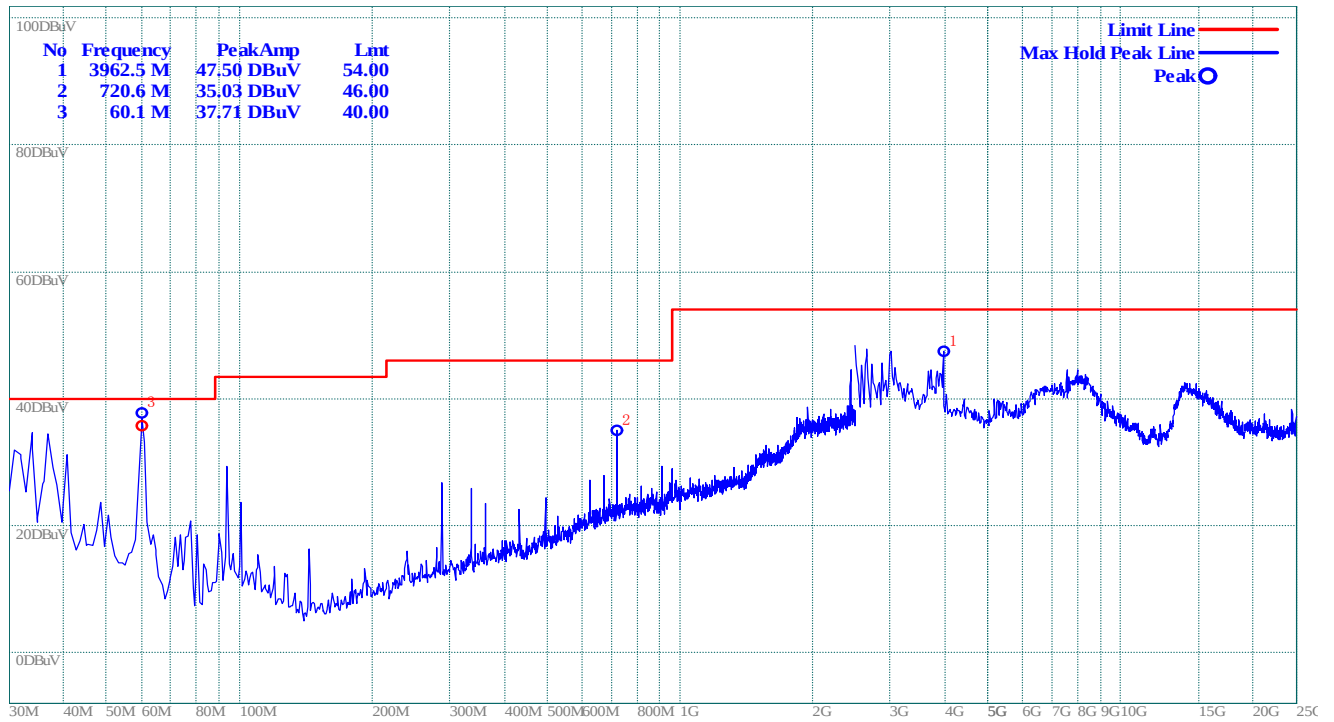

(Plot C.1: Antenna Horizontal)

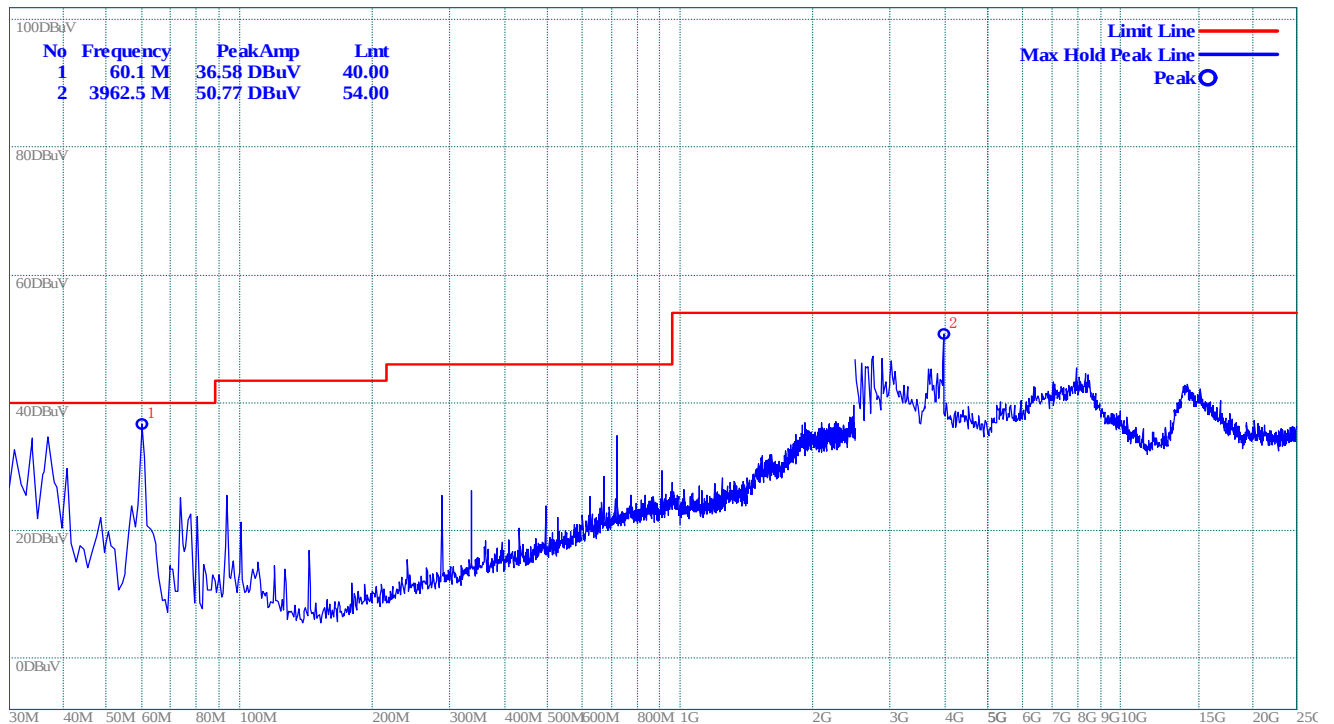

(Plot C.2: Antenna Vertical)

**** END OF REPORT ****