

# FCC TEST REPORT

## (Part 15, Subpart E)



Applicant:	Icon Health & Fitness
Address:	1500 South 1000 West 435-786-5915 Logan, UT 84321, United States

Manufacturer or Supplier:	Icon Health & Fitness
Address:	1500 South 1000 West 435-786-5915 Logan, UT 84321, United States
Product:	402547 module
Brand Name:	N/A
Model Name:	MP10-ARGON
FCC ID:	OMC402547
Date of tests:	Jul. 30, 2018 ~ Aug. 28, 2018

The tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart E, Section 15.407**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Roger Li Engineer / Mobile Department	Approved by Sam Tung Manager / Mobile Department
 Date: Aug. 29, 2018	 Date: Aug. 29, 2018

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	4
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
1.1 MEASUREMENT UNCERTAINTY .....	5
<b>2 GENERAL INFORMATION .....</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT .....	6
2.2 DESCRIPTION OF TEST MODES .....	7
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
2.3 DUTY CYCLE OF TEST SIGNAL .....	12
2.4 DESCRIPTION OF SUPPORT UNITS .....	13
2.4.1 CONFIGURATION OF SYSTEM UNDER TEST .....	14
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	14
<b>3 TEST TYPES AND RESULTS.....</b>	<b>15</b>
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	15
3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	15
3.1.2 LIMITS OF UNWANTED EMISSION .....	16
3.1.3 TEST INSTRUMENTS.....	17
3.1.4 TEST PROCEDURES .....	18
3.1.5 DEVIATION FROM TEST STANDARD .....	18
3.1.6 TEST SETUP .....	19
3.1.7 EUT OPERATING CONDITION .....	20
3.1.8 TEST RESULTS .....	21
3.2 CONDUCTED EMISSION MEASUREMENT .....	64
3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	64
3.2.2 TEST INSTRUMENTS.....	64
3.2.3 TEST PROCEDURES .....	64
3.2.4 DEVIATION FROM TEST STANDARD .....	65
3.2.5 TEST SETUP .....	65
3.2.6 EUT OPERATING CONDITIONS .....	65
3.2.7 TEST RESULTS .....	66
3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT .....	68
3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT .....	68
3.3.2 TEST SETUP .....	69



3.3.3	TEST INSTRUMENTS.....	69
3.3.4	TEST PROCEDURE.....	70
3.3.5	DEVIATION FROM TEST STANDARD .....	72
3.3.6	EUT OPERATING CONDITIONS.....	72
3.3.7	TEST RESULTS .....	73
3.4	MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT.....	86
3.4.1	LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT .....	86
3.4.2	TEST SETUP.....	86
3.4.3	TEST INSTRUMENTS.....	86
3.4.4	TEST PROCEDURES .....	87
3.4.5	DEVIATION FROM TEST STANDARD .....	87
3.4.6	EUT OPERATING CONDITIONS.....	87
3.4.7	TEST RESULTS .....	88
3.5	FREQUENCY STABILITY .....	95
3.5.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	95
3.5.2	TEST SETUP.....	95
3.5.3	TEST INSTRUMENTS.....	95
3.5.4	TEST PROCEDURE.....	96
3.5.5	DEVIATION FROM TEST STANDARD .....	96
3.5.6	EUT OPERATING CONDITION .....	96
3.5.7	TEST RESULTS .....	97
<b>4</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>99</b>
<b>5</b>	<b>APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....</b>	<b>100</b>



**BUREAU  
VERITAS**

Test Report No.: RF180724W005-3

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180724W005-3	Original release	Aug. 29, 2018



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.85dB at 0.155000MHz.
15.407(b) (1/2/3/4/6)	Radiated Emission & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.98dB at 5150MHz.
15.407(a/1/2/3)	Maximum conducted output Power	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.68dB
	30MHz ~ 1GMHz	3.26dB
	1GHz ~ 18GHz	4.48dB
	18GHz ~ 40GHz	4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	402547 module
<b>MODEL NO.</b>	MP10-ARGON
<b>POWER SUPPLY</b>	12Vdc (adapter or host equipment)
<b>MODULATION TYPE</b>	64QAM, 16QAM, QPSK, BPSK
<b>MODULATION TECHNOLOGY</b>	OFDM
<b>TRANSFER RATE</b>	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to MCS7
<b>OPERATING FREQUENCY</b>	5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5700MHz, 5745 ~ 5805MHz
<b>NUMBER OF CHANNEL</b>	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 5260 ~ 5320MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 5500 ~ 5700MHz: 8 for 802.11a, 802.11n (20MHz) 3 for 802.11n (40MHz) 5745 ~ 5805MHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
<b>AVERAGE POWER</b>	27.42mW for 5180 ~ 5240MHz 27.99mW for 5260 ~ 5320MHz 28.05mW for 5500 ~ 5700MHz 25.70mW for 5745 ~ 5805MHz
<b>ANTENNA TYPE</b>	PIFA Antenna with 2.94dBi gain
<b>HW VERSION</b>	A184C V2.0
<b>SW VERSION</b>	Model number J1002
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11a	1TX/1RX
802.11n (20MHz)	1TX/1RX
802.11n (40MHz)	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



## 2.2 DESCRIPTION OF TEST MODES

### FOR 5150 ~ 5250MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

### FOR 5250 ~ 5350MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz



### FOR 5470 ~ 5725MHz

8 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	116	5580 MHz
104	5520 MHz	132	5660 MHz
108	5540 MHz	136	5680 MHz
112	5560 MHz	140	5700 MHz

3 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	134	5670 MHz
110	5550 MHz		

### FOR 5725 ~ 5805MHz

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz		
157	5785 MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755 MHz	159	5795 MHz





2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	-	Powered by Adapter with wifi(5G) link
B	-	-	-	√	Powered by Battery with wifi(5G) link
C	-	-	-	-	Powered by USB with wifi(5G) link

Where **RE≥1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:**  
The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.  
**NOTE:** "-" means no effect.

**RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
A	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
A	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0
A	802.11a	5725-5805	149 to 161	149, 157, 161	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 161	149, 157, 161	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0



**RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11n (40MHz)	5180-5240	38 to 46	38	OFDM	BPSK	MCS0

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11n (40MHz)	5180-5240	38 to 46	38	OFDM	BPSK	MCS0

**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11a	5260-5320	52 to 64	52, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 64	OFDM	BPSK	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
A	802.11a	5500-5700	100 to 140	100, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 140	OFDM	BPSK	MCS0
A	802.11n (40MHz)		102 to 134	102, 134	OFDM	BPSK	MCS0
A	802.11a	5725-5805	149 to 161	149, 161	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 161	149, 161	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0



**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
B	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
B	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
B	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
B	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
B	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
B	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
B	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
B	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0
B	802.11a	5725-5805	149 to 161	149, 161	OFDM	BPSK	6.0
B	802.11n (20MHz)		149 to 161	149, 161	OFDM	BPSK	MCS0
B	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	23deg. C, 62%RH	DC 12V	Vincent Chen
RE≥1G	23deg. C, 62%RH	DC 12V	Vincent Chen
PLC	24deg. C, 61%RH	DC 12V	John Wen
APCM	23.5deg. C, 60%RH	DC 12V	Bert Ma




### 2.3 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is < 98%, duty factor shall be considered.

**802.11a:** Duty cycle = 1.390/1.427 = 0.974, Duty factor = 10 \* log(1/0.974) = 0.114

**802.11n (20MHz):** Duty cycle = 1.293/1.336 = 0.968, Duty factor = 10 \* log(1/0.968) = 0.142

**802.11n (40MHz):** Duty cycle = 0.646/0.686 = 0.942, Duty factor = 10 \* log(1/0.942) = 0.261

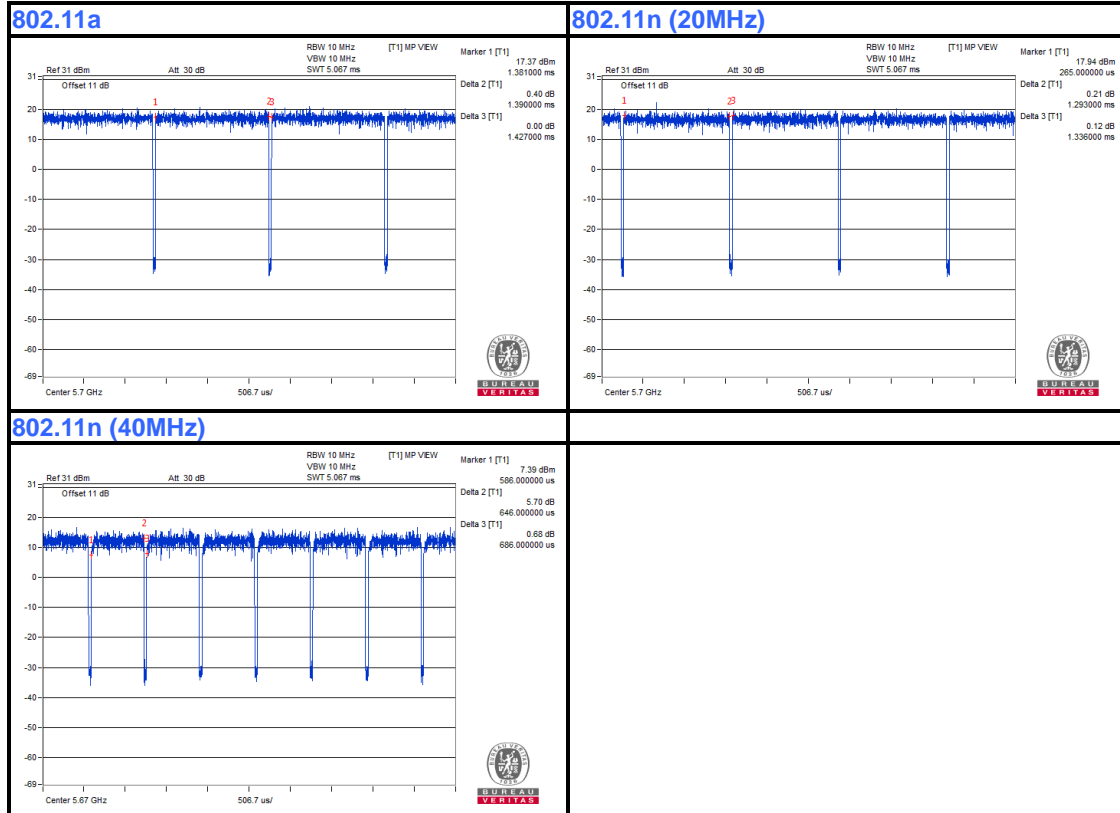



## 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PC	HP	A6608CN	3CR83825X3	N/A


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m

**NOTE:**

1. All power cords of the above support units are non shielded (1.8m).



## 2.4.1 CONFIGURATION OF SYSTEM UNDER TEST

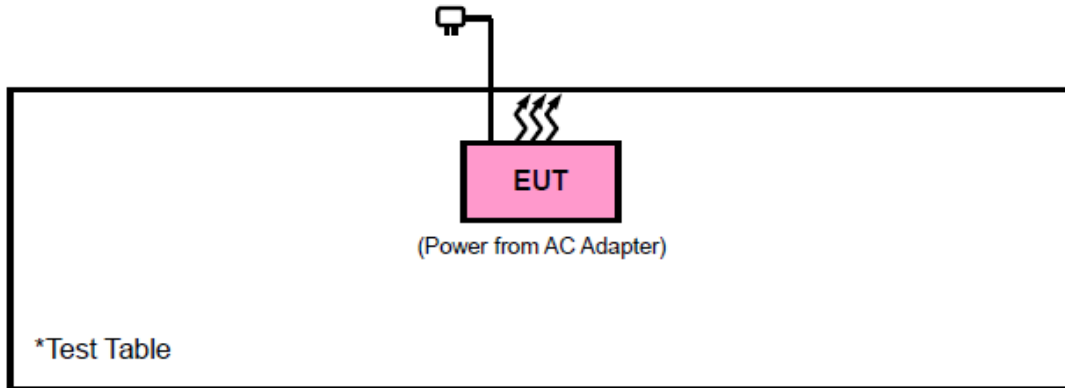

## 2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**

**KDB 789033 D02 General U-NII Test Procedures New Rules v02r01**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.



### 3 TEST TYPES AND RESULTS

#### 3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

##### 3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 3.1.2 LIMITS OF UNWANTED EMISSION

RESTRICTED BANDS	APPLICABLE TO	LIMIT	
	789033 D02 General UNII Test Procedures New Rules v01r04	FIELD STRENGTH AT 3m (dBµV/m)	
	PK : 74	AV : 54	
OUT OF THE RESTRICTED BANDS	APPLICABLE TO	EIRP LIMIT (dBm/MHz)	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m)
	15.407(b)(1)	PK : -27	PK : 68.3
	15.407(b)(2)		
	15.407(b)(3)		
15.407(b)(4)	See note 2 (FCC 16-24)		

**NOTE:** The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

2. All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.





### 3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Apr. 21,18	Apr. 20,19
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Nov. 26,16	Nov. 25,18
Horn Antenna	ETS-LINDGREN	3117	00168728	Nov. 26,16	Nov. 25,18
Loop antenna	Daze	ZN30900A	0708	Nov. 20,17	Nov. 19,18
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Dec. 16,16	Dec. 15,18
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 09,18	Jul. 08,19
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 16,18	Mar. 15,19
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 525120.



### 3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


### 3.1.5 DEVIATION FROM TEST STANDARD

No deviation.




### 3.1.6 TEST SETUP

#### < Frequency Range below 30MHz >

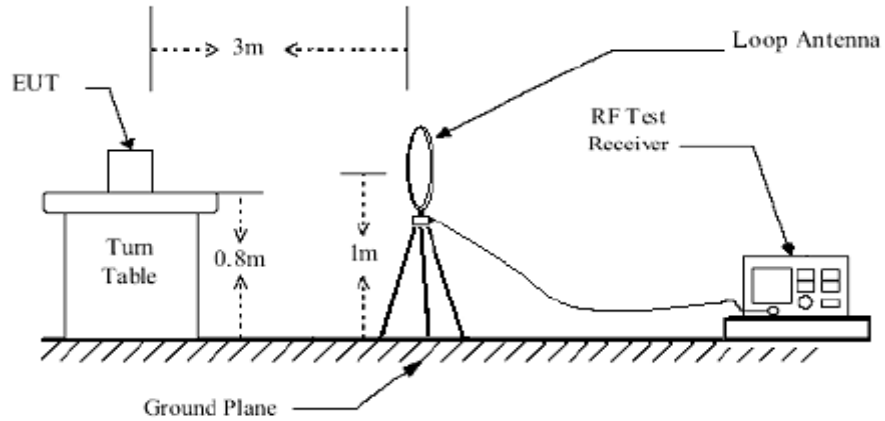


#### < Frequency Range 30MHz~1GHz >

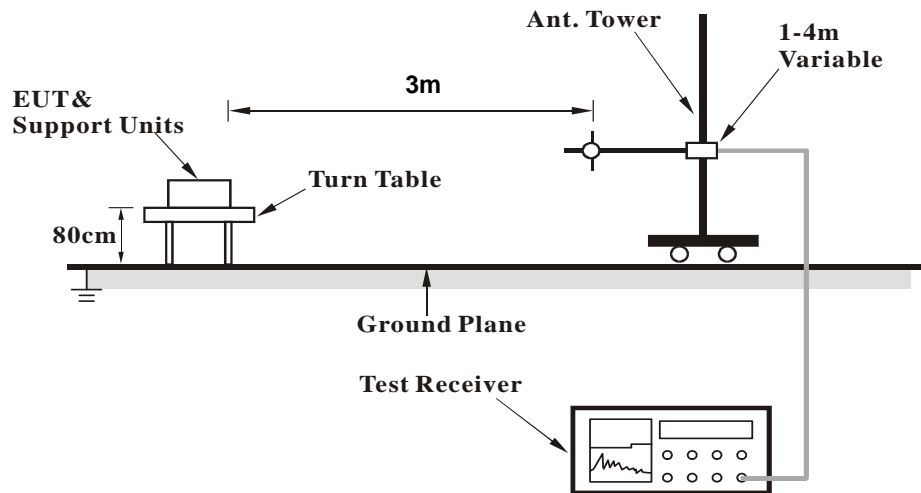



<Frequency Range above 1GHz>

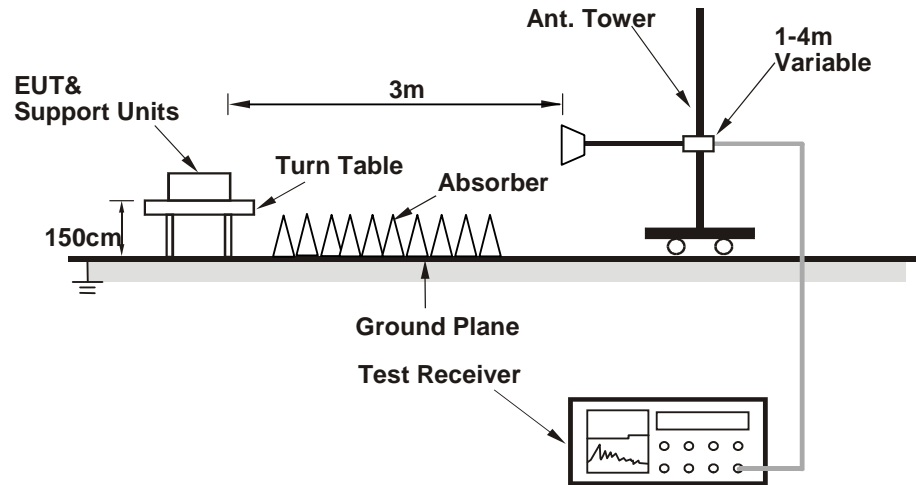

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



### 3.1.8 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:

**9 KHz – 30 MHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**30 MHz – 1GHz data:**


**802.11n (40MHz)**

<b>CHANNEL</b>	TX Channel 38	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
224	16.73	39.35	46	-29.27	11.61	2.3	36.53	100	360	QP
362.71	21.85	39.63	46	-24.15	15.87	2.99	36.64	100	360	QP
446.13	25.84	41.86	46	-20.16	17.52	3.29	36.83	100	360	QP
531.49	32.98	47.77	46	-13.02	18.63	3.63	37.05	100	360	QP
585.81	33.61	47.17	46	-12.39	19.72	3.93	37.21	100	360	QP
648.86	30.29	42.13	46	-15.71	21.32	4.14	37.3	100	360	QP

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

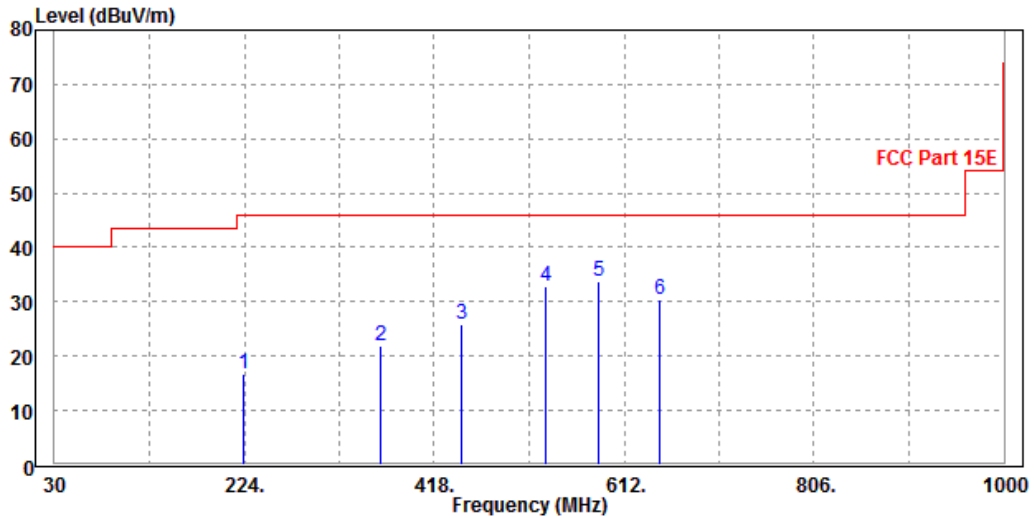




<b>CHANNEL</b>	Channel 38	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
105.66	18.55	44.98	43.5	-24.95	8.97	1.58	36.98	100	360	QP
198.78	14.53	38.35	43.5	-28.97	10.57	2.16	36.55	100	360	QP
398.6	18.43	34.96	46	-27.57	17.05	3.14	36.72	100	360	QP
481.05	24.44	40.12	46	-21.56	17.83	3.4	36.91	100	360	QP
544.1	27.53	42.04	46	-18.47	18.88	3.7	37.09	100	360	QP
599.39	33.06	46.31	46	-12.94	19.99	4.01	37.25	100	360	QP

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

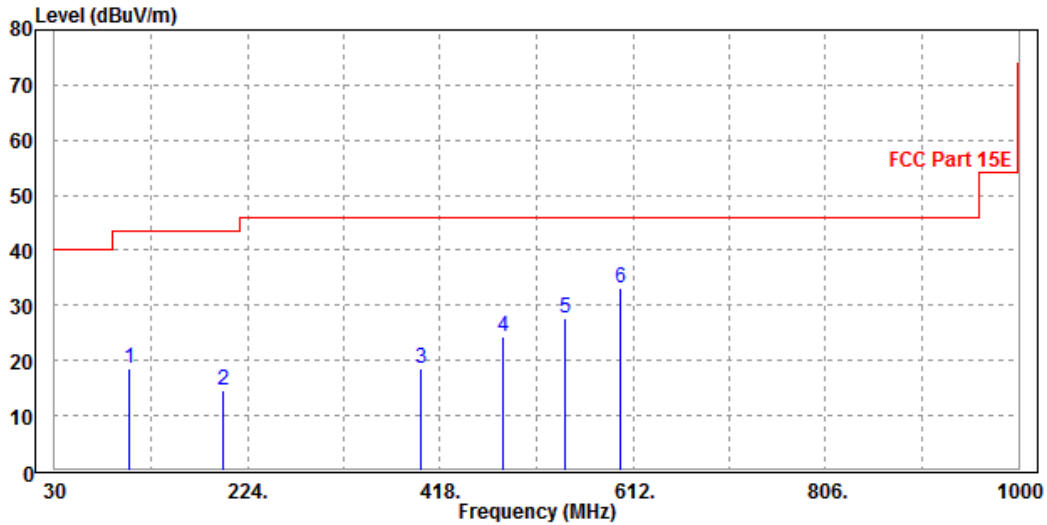



ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

Band 1  
802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.67	53.34	54	-2.33	37.26	7.42	46.35	100	215	Average
5150	60.19	61.86	74	-13.81	37.26	7.42	46.35	100	215	Peak
5180	100.61	102.26			37.27	7.43	46.35	100	215	Average
5180	107.97	109.62			37.27	7.43	46.35	100	215	Peak
5350	48.22	49.71	54	-5.78	37.34	7.47	46.3	100	215	Average
5350	58.44	59.93	74	-15.56	37.34	7.47	46.3	100	215	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.68	52.35	54	-3.32	37.26	7.42	46.35	186	299	Average
5150	59.96	61.63	74	-14.04	37.26	7.42	46.35	186	299	Peak
5180	96.53	98.18			37.27	7.43	46.35	186	299	Average
5180	103.79	105.44			37.27	7.43	46.35	186	299	Peak
5350	48.1	49.59	54	-5.9	37.34	7.47	46.3	186	299	Average
5350	57.17	58.66	74	-16.83	37.34	7.47	46.3	186	299	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.55	52.22	54	-3.45	37.26	7.42	46.35	100	341	Average
5150	60.1	61.77	74	-13.9	37.26	7.42	46.35	100	341	Peak
5200	101.78	103.41			37.28	7.43	46.34	100	341	Average
5200	109.45	111.08			37.28	7.43	46.34	100	341	Peak
5350	48.29	49.78	54	-5.71	37.34	7.47	46.3	100	341	Average
5350	59.99	61.48	74	-14.01	37.34	7.47	46.3	100	341	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.71	51.38	54	-4.29	37.26	7.42	46.35	200	36	Average
5150	58.54	60.21	74	-15.46	37.26	7.42	46.35	200	36	Peak
5200	97.21	98.84			37.28	7.43	46.34	200	36	Average
5200	104.51	106.14			37.28	7.43	46.34	200	36	Peak
5350	48.12	49.61	54	-5.88	37.34	7.47	46.3	200	36	Average
5350	57.88	59.37	74	-16.12	37.34	7.47	46.3	200	36	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.





<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.64	51.31	54	-4.36	37.26	7.42	46.35	108	207	Average
5150	58.92	60.59	74	-15.08	37.26	7.42	46.35	108	207	Peak
5240	100.88	102.47			37.3	7.44	46.33	108	207	Average
5240	108.72	110.31			37.3	7.44	46.33	108	207	Peak
5350	48.39	49.88	54	-5.61	37.34	7.47	46.3	108	207	Average
5350	58.53	60.02	74	-15.47	37.34	7.47	46.3	108	207	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.5	51.17	54	-4.5	37.26	7.42	46.35	130	305	Average
5150	58.71	60.38	74	-15.29	37.26	7.42	46.35	130	305	Peak
5240	96.85	98.44			37.3	7.44	46.33	130	305	Average
5240	104.42	106.01			37.3	7.44	46.33	130	305	Peak
5350	48.22	49.71	54	-5.78	37.34	7.47	46.3	130	305	Average
5350	58.75	60.24	74	-15.25	37.34	7.47	46.3	130	305	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 36	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.9	52.57	54	-3.1	37.26	7.42	46.35	200	272	Average
5150	59.24	60.91	74	-14.76	37.26	7.42	46.35	200	272	Peak
5180	98.88	100.53			37.27	7.43	46.35	200	272	Average
5180	107.33	108.98			37.27	7.43	46.35	200	272	Peak
5350	48.16	49.65	54	-5.84	37.34	7.47	46.3	200	272	Average
5350	57.52	59.01	74	-16.48	37.34	7.47	46.3	200	272	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.28	51.95	54	-3.72	37.26	7.42	46.35	200	38	Average
5150	59.99	61.66	74	-14.01	37.26	7.42	46.35	200	38	Peak
5150	58.69	60.36			37.26	7.42	46.35	200	38	Peak
5180	95.47	97.12			37.27	7.43	46.35	200	38	Average
5180	102.91	104.56	74	28.91	37.27	7.43	46.35	200	38	Peak
5350	48.15	49.64	54	-5.85	37.34	7.47	46.3	200	38	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.96	51.63	54	-4.04	37.26	7.42	46.35	200	326	Average
5150	59.44	61.11	74	-14.56	37.26	7.42	46.35	200	326	Peak
5200	98.28	99.91			37.28	7.43	46.34	200	326	Average
5200	107.3	108.93			37.28	7.43	46.34	200	326	Peak
5350	48.46	49.95	54	-5.54	37.34	7.47	46.3	200	326	Average
5350	58.82	60.31	74	-15.18	37.34	7.47	46.3	200	326	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.48	51.15	54	-4.52	37.26	7.42	46.35	109	301	Average
5150	58.97	60.64	74	-15.03	37.26	7.42	46.35	109	301	Peak
5200	94.38	96.01			37.28	7.43	46.34	109	301	Average
5200	102.18	103.81			37.28	7.43	46.34	109	301	Peak
5350	48.17	49.66	54	-5.83	37.34	7.47	46.3	109	301	Average
5350	58.26	59.75	74	-15.74	37.34	7.47	46.3	109	301	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.55	51.22	54	-4.45	37.26	7.42	46.35	100	216	Average
5150	59.28	60.95	74	-14.72	37.26	7.42	46.35	100	216	Peak
5240	97.38	98.97			37.3	7.44	46.33	100	216	Average
5240	105.94	107.53			37.3	7.44	46.33	100	216	Peak
5350	48.33	49.82	54	-5.67	37.34	7.47	46.3	100	216	Average
5350	57.88	59.37	74	-16.12	37.34	7.47	46.3	100	216	Peak

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.45	51.12	54	-4.55	37.26	7.42	46.35	100	307	Average
5150	59.84	61.51	74	-14.16	37.26	7.42	46.35	100	307	Peak
5240	93.27	94.86			37.3	7.44	46.33	100	307	Average
5240	101.44	103.03			37.3	7.44	46.33	100	307	Peak
5350	48.24	49.73	54	-5.76	37.34	7.47	46.3	100	307	Average
5350	58.62	60.11	74	-15.38	37.34	7.47	46.3	100	307	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



802.11n (40MHz)

<b>CHANNEL</b>	TX Channel 38	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.02	54.69	54	-0.98	37.26	7.42	46.35	100	207	Average
5150	61.56	63.23	74	-12.44	37.26	7.42	46.35	100	207	Peak
5190	94.12	95.75			37.28	7.43	46.34	100	207	Average
5190	100.87	102.5			37.28	7.43	46.34	100	207	Peak
5350	48.29	49.78	54	-5.71	37.34	7.47	46.3	100	207	Average
5350	58.62	60.11	74	-15.38	37.34	7.47	46.3	100	207	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.79	52.46	54	-3.21	37.26	7.42	46.35	106	298	Average
5150	59.1	60.77	74	-14.9	37.26	7.42	46.35	106	298	Peak
5190	88.98	90.61			37.28	7.43	46.34	106	298	Average
5190	95.84	97.47			37.28	7.43	46.34	106	298	Peak
5350	48.17	49.66	54	-5.83	37.34	7.47	46.3	106	298	Average
5350	59.46	60.95	74	-14.54	37.34	7.47	46.3	106	298	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5190MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 46	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.8	51.47	54	-4.2	37.26	7.42	46.35	200	326	Average
5150	59.17	60.84	74	-14.83	37.26	7.42	46.35	200	326	Peak
5230	95.54	97.14			37.29	7.44	46.33	200	326	Average
5230	102.06	103.66			37.29	7.44	46.33	200	326	Peak
5350	48.3	49.79	54	-5.7	37.34	7.47	46.3	200	326	Average
5350	56.66	58.15	74	-17.34	37.34	7.47	46.3	200	326	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.46	51.13	54	-4.54	37.26	7.42	46.35	100	89	Average
5150	58.98	60.65	74	-15.02	37.26	7.42	46.35	100	89	Peak
5230	90.61	92.21			37.29	7.44	46.33	100	89	Average
5230	96.95	98.55			37.29	7.44	46.33	100	89	Peak
5350	48.2	49.69	54	-5.8	37.34	7.47	46.3	100	89	Average
5350	58.05	59.54	74	-15.95	37.34	7.47	46.3	100	89	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5230MHz: Fundamental frequency.



Band 2  
802.11a

<b>CHANNEL</b>	TX Channel 52	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.38	50.05	54	-5.62	37.26	7.42	46.35	100	280	Average
5150	58.04	59.71	74	-15.96	37.26	7.42	46.35	100	280	Peak
5260	99.39	100.96			37.3	7.45	46.32	100	280	Average
5260	107.5	109.07			37.3	7.45	46.32	100	280	Peak
5350	47.32	48.81	54	-6.68	37.34	7.47	46.3	100	280	Average
5350	56.4	57.89	74	-17.6	37.34	7.47	46.3	100	280	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.29	49.96	54	-5.71	37.26	7.42	46.35	100	70	Average
5150	57.78	59.45	74	-16.22	37.26	7.42	46.35	100	70	Peak
5260	93.34	94.91			37.3	7.45	46.32	100	70	Average
5260	102.02	103.59			37.3	7.45	46.32	100	70	Peak
5350	47.23	48.72	54	-6.77	37.34	7.47	46.3	100	70	Average
5350	56.49	57.98	74	-17.51	37.34	7.47	46.3	100	70	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 60	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	46.58	48.25	54	-7.42	37.26	7.42	46.35	100	120	Average
5150	56.59	58.26	74	-17.41	37.26	7.42	46.35	100	120	Peak
5300	98	99.53			37.32	7.46	46.31	100	120	Average
5300	105.93	107.46			37.32	7.46	46.31	100	120	Peak
5350	45.89	47.38	54	-8.11	37.34	7.47	46.3	100	120	Average
5350	54.53	56.02	74	-19.47	37.34	7.47	46.3	100	120	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	44.72	46.39	54	-9.28	37.26	7.42	46.35	100	230	Average
5150	55.81	57.48	74	-18.19	37.26	7.42	46.35	100	230	Peak
5300	93.74	95.27			37.32	7.46	46.31	100	230	Average
5300	103.76	105.29			37.32	7.46	46.31	100	230	Peak
5350	45.35	46.84	54	-8.65	37.34	7.47	46.3	100	230	Average
5350	54.74	56.23	74	-19.26	37.34	7.47	46.3	100	230	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5300MHz: Fundamental frequency.





<b>CHANNEL</b>	TX Channel 64	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.38	50.05	54	-5.62	37.26	7.42	46.35	100	300	Average
5150	57.54	59.21	74	-16.46	37.26	7.42	46.35	100	300	Peak
5320	98.19	99.7			37.33	7.46	46.3	100	300	Average
5320	107.1	108.61			37.33	7.46	46.3	100	300	Peak
5350	50.17	51.66	54	-3.83	37.34	7.47	46.3	100	300	Average
5350	59.24	60.73	74	-14.76	37.34	7.47	46.3	100	300	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.42	49.09	54	-6.58	37.26	7.42	46.35	100	40	Average
5150	57.4	59.07	74	-16.6	37.26	7.42	46.35	100	40	Peak
5320	93.79	95.3			37.33	7.46	46.3	100	40	Average
5320	103.11	104.62			37.33	7.46	46.3	100	40	Peak
5350	48.12	49.61	54	-5.88	37.34	7.47	46.3	100	40	Average
5350	59.42	60.91	74	-14.58	37.34	7.47	46.3	100	40	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5320MHz: Fundamental frequency.



802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 52	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.49	50.16	54	-5.51	37.26	7.42	46.35	100	280	Average
5150	57.94	59.61	74	-16.06	37.26	7.42	46.35	100	280	Peak
5260	96.05	97.62			37.3	7.45	46.32	100	280	Average
5260	104.36	105.93			37.3	7.45	46.32	100	280	Peak
5350	47.37	48.86	54	-6.63	37.34	7.47	46.3	100	280	Average
5350	56.75	58.24	74	-17.25	37.34	7.47	46.3	100	280	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.41	50.08	54	-5.59	37.26	7.42	46.35	100	70	Average
5150	58.04	59.71	74	-15.96	37.26	7.42	46.35	100	70	Peak
5260	92.28	93.85			37.3	7.45	46.32	100	70	Average
5260	99.84	101.41			37.3	7.45	46.32	100	70	Peak
5350	47.33	48.82	54	-6.67	37.34	7.47	46.3	100	70	Average
5350	57.72	59.21	74	-16.28	37.34	7.47	46.3	100	70	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5260MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 60	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	45.55	47.22	54	-8.45	37.26	7.42	46.35	100	200	Average
5150	57.34	59.01	74	-16.66	37.26	7.42	46.35	100	200	Peak
5300	100.95	102.48			37.32	7.46	46.31	100	200	Average
5300	105.42	106.95			37.32	7.46	46.31	100	200	Peak
5350	44.77	46.26	54	-9.23	37.34	7.47	46.3	100	200	Average
5350	55.83	57.32	74	-18.17	37.34	7.47	46.3	100	200	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	46.57	48.24	54	-7.43	37.26	7.42	46.35	100	140	Average
5150	55.34	57.01	74	-18.66	37.26	7.42	46.35	100	140	Peak
5300	89.74	91.27			37.32	7.46	46.31	100	140	Average
5300	100.76	102.29			37.32	7.46	46.31	100	140	Peak
5350	45.72	47.21	54	-8.28	37.34	7.47	46.3	100	140	Average
5350	54.4	55.89	74	-19.6	37.34	7.47	46.3	100	140	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5300MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 64	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.45	50.12	54	-5.55	37.26	7.42	46.35	100	300	Average
5150	58.01	59.68	74	-15.99	37.26	7.42	46.35	100	300	Peak
5320	96.9	98.41			37.33	7.46	46.3	100	300	Average
5320	104.63	106.14			37.33	7.46	46.3	100	300	Peak
5350	49.78	51.27	54	-4.22	37.34	7.47	46.3	100	300	Average
5350	59.17	60.66	74	-14.83	37.34	7.47	46.3	100	300	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	46.45	48.12	54	-7.55	37.26	7.42	46.35	100	40	Average
5150	54.08	55.75	74	-19.92	37.26	7.42	46.35	100	40	Peak
5320	89.57	91.08			37.33	7.46	46.3	100	40	Average
5320	102.51	104.02			37.33	7.46	46.3	100	40	Peak
5350	47.99	49.48	54	-6.01	37.34	7.47	46.3	100	40	Average
5350	57.06	58.55	74	-16.94	37.34	7.47	46.3	100	40	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5320MHz: Fundamental frequency.



802.11n (40MHz)

<b>CHANNEL</b>	TX Channel 54	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.54	50.21	54	-5.46	37.26	7.42	46.35	100	327	Average
5150	58.01	59.68	74	-15.99	37.26	7.42	46.35	100	327	Peak
5270	91.57	93.13			37.31	7.45	46.32	100	327	Average
5270	102.71	104.27			37.31	7.45	46.32	100	327	Peak
5350	47.73	49.22	54	-6.27	37.34	7.47	46.3	100	327	Average
5350	57.34	58.83	74	-16.66	37.34	7.47	46.3	100	327	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.45	50.12	54	-5.55	37.26	7.42	46.35	100	83	Average
5150	57.82	59.49	74	-16.18	37.26	7.42	46.35	100	83	Peak
5270	87.01	88.57			37.31	7.45	46.32	100	83	Average
5270	97.32	98.88			37.31	7.45	46.32	100	83	Peak
5350	47.35	48.84	54	-6.65	37.34	7.47	46.3	100	83	Average
5350	57.9	59.39	74	-16.1	37.34	7.47	46.3	100	83	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5270MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 62	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.47	50.14	54	-5.53	37.26	7.42	46.35	100	300	Average
5150	58.28	59.95	74	-15.72	37.26	7.42	46.35	100	300	Peak
5310	88.65	90.18			37.32	7.46	46.31	100	300	Average
5310	95.47	97			37.32	7.46	46.31	100	300	Peak
5350	52.43	53.92	54	-1.57	37.34	7.47	46.3	100	300	Average
5350	65.7	67.19	74	-8.3	37.34	7.47	46.3	100	300	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.48	50.15	54	-5.52	37.26	7.42	46.35	100	44	Average
5150	57.64	59.31	74	-16.36	37.26	7.42	46.35	100	44	Peak
5310	84.46	85.99			37.32	7.46	46.31	100	44	Average
5310	95.12	96.65			37.32	7.46	46.31	100	44	Peak
5350	50.22	51.71	54	-3.78	37.34	7.47	46.3	100	44	Average
5350	59.42	60.91	74	-14.58	37.34	7.47	46.3	100	44	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5310MHz: Fundamental frequency.



Band 3

802.11a

<b>CHANNEL</b>	TX Channel 100	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.82	49.21	54	-6.18	37.38	7.49	46.26	131	0	Average
5460	57.73	59.12	74	-16.27	37.38	7.49	46.26	131	0	Peak
#5470	60.11	61.49	68.3	-8.19	37.39	7.49	46.26	131	0	Peak
5500	93.07	94.42			37.4	7.5	46.25	131	0	Average
5500	102.2	103.55			37.4	7.5	46.25	131	0	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	48.79	50.18	54	-5.21	37.38	7.49	46.26	180	70	Average
5460	58.02	59.41	74	-15.98	37.38	7.49	46.26	180	70	Peak
#5470	64.73	66.11	68.3	-3.57	37.39	7.49	46.26	180	70	Peak
5500	96.37	97.72			37.4	7.5	46.25	180	70	Average
5500	108.58	109.93			37.4	7.5	46.25	180	70	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.



<b>CHANNEL</b>	TX Channel 116	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.69	49.08	54	-6.31	37.38	7.49	46.26	120	214	Average
5460	57.67	59.06	74	-16.33	37.38	7.49	46.26	120	214	Peak
#5470	57.09	58.47	68.3	-11.21	37.39	7.49	46.26	120	214	Peak
5580	97.18	98.38			37.45	7.58	46.23	120	214	Average
5580	105.53	106.73			37.45	7.58	46.23	120	214	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.52	48.91	54	-6.48	37.38	7.49	46.26	100	50	Average
5460	56.95	58.34	74	-17.05	37.38	7.49	46.26	100	50	Peak
#5470	58.3	59.68	68.3	-10	37.39	7.49	46.26	100	50	Peak
5580	94.86	96.06			37.45	7.58	46.23	100	50	Average
5580	103.55	104.75			37.45	7.58	46.23	100	50	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.





<b>CHANNEL</b>	TX Channel 140	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	101.46	102.43			37.52	7.7	46.19	111	345	Average
5700	109.98	110.95			37.52	7.7	46.19	111	345	Peak
#5725	65.33	66.26	68.3	-2.97	37.53	7.73	46.19	111	345	Peak
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	94.3	95.27			37.52	7.7	46.19	134	47	Average
5700	105.94	106.91			37.52	7.7	46.19	134	47	Peak
#5725	64.64	65.57	68.3	-3.66	37.53	7.73	46.19	134	47	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 100	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	49.32	50.71	54	-4.68	37.38	7.49	46.26	100	340	Average
5460	58.74	60.13	74	-15.26	37.38	7.49	46.26	100	340	Peak
#5470	64.64	66.02	68.3	-3.66	37.39	7.49	46.26	100	340	Peak
5500	98.69	100.04			37.4	7.5	46.25	100	340	Average
5500	107.17	108.52			37.4	7.5	46.25	100	340	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	48.18	49.57	54	-5.82	37.38	7.49	46.26	100	70	Average
5460	57.99	59.38	74	-16.01	37.38	7.49	46.26	100	70	Peak
#5470	60.07	61.45	68.3	-8.23	37.39	7.49	46.26	100	70	Peak
5500	94.27	95.62			37.4	7.5	46.25	100	70	Average
5500	103.27	104.62			37.4	7.5	46.25	100	70	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5500MHz: Fundamental frequency.
- #: Out of restricted band.



<b>CHANNEL</b>	TX Channel 116	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.38	48.77	54	-6.62	37.38	7.49	46.26	100	0	Average
5460	57.29	58.68	74	-16.71	37.38	7.49	46.26	100	0	Peak
#5470	57.5	58.88	68.3	-10.8	37.39	7.49	46.26	100	0	Peak
5580	95.83	97.03			37.45	7.58	46.23	100	0	Average
5580	103.54	104.74			37.45	7.58	46.23	100	0	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.52	48.91	54	-6.48	37.38	7.49	46.26	141	65	Average
5460	56.65	58.04	74	-17.35	37.38	7.49	46.26	141	65	Peak
#5470	57.18	58.56	68.3	-11.12	37.39	7.49	46.26	141	65	Peak
5580	95.48	96.68			37.45	7.58	46.23	141	65	Average
5580	105.34	106.54			37.45	7.58	46.23	141	65	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5580MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 140	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	97.35	98.32			37.52	7.7	46.19	106	360	Average
5700	107.14	108.11			37.52	7.7	46.19	106	360	Peak
#5725	65.99	66.92	68.3	-2.31	37.53	7.73	46.19	106	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	92.4	93.37			37.52	7.7	46.19	153	311	Average
5700	101.84	102.81			37.52	7.7	46.19	153	311	Peak
#5725	63.4	64.33	68.3	-4.9	37.53	7.73	46.19	153	311	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11n (40MHz)

<b>CHANNEL</b>	TX Channel 102	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.92	49.31	54	-6.08	37.38	7.49	46.26	180	330	Average
5460	59.02	60.41	74	-14.98	37.38	7.49	46.26	180	330	Peak
#5470	64.97	66.35	68.3	-3.33	37.39	7.49	46.26	180	330	Peak
5510	89.96	91.29			37.41	7.51	46.25	180	330	Average
5510	97.61	98.94			37.41	7.51	46.25	180	330	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	46.38	47.77	54	-7.62	37.38	7.49	46.26	114	317	Average
5460	62.18	63.57	74	-11.82	37.38	7.49	46.26	114	317	Peak
#5470	62.67	64.05	68.3	-5.63	37.39	7.49	46.26	114	317	Peak
5510	93.25	94.58			37.41	7.51	46.25	114	317	Average
5510	101.42	102.75			37.41	7.51	46.25	114	317	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5510MHz: Fundamental frequency.
3. #: Out of restricted band.



<b>CHANNEL</b>	TX Channel 110	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	46.82	48.21	54	-7.18	37.38	7.49	46.26	200	331	Average
5460	57.19	58.58	74	-16.81	37.38	7.49	46.26	200	331	Peak
#5470	56.16	57.54	68.3	-12.14	37.39	7.49	46.26	200	331	Peak
5550	93.51	94.77			37.43	7.55	46.24	200	331	Average
5550	103.61	104.87			37.43	7.55	46.24	200	331	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	46.35	47.74	54	-7.65	37.38	7.49	46.26	100	276	Average
5460	56.42	57.81	74	-17.58	37.38	7.49	46.26	100	276	Peak
#5470	56.05	57.43	68.3	-12.25	37.39	7.49	46.26	100	276	Peak
5550	91.71	92.97			37.43	7.55	46.24	100	276	Average
5550	100.62	101.88			37.43	7.55	46.24	100	276	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5550MHz: Fundamental frequency.
3. #: Out of restricted band.



<b>CHANNEL</b>	TX Channel 134	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	92.59	93.62			37.5	7.67	46.2	100	10	Average
5670	102.35	103.38			37.5	7.67	46.2	100	10	Peak
#5725	60.13	61.06	68.3	-8.17	37.53	7.73	46.19	100	10	Peak
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	93.93	94.96			37.5	7.67	46.2	145	40	Average
5670	100.68	101.71			37.5	7.67	46.2	145	40	Peak
#5725	60.21	61.14	68.3	-8.09	37.53	7.73	46.19	145	40	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5670MHz: Fundamental frequency.
- #: Out of restricted band.



**Band 4**

**802.11a**

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	98.4	99.28			37.55	7.75	46.18	100	20	Average
5745	109.51	110.39			37.55	7.75	46.18	100	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	93.38	94.26			37.55	7.75	46.18	100	0	Average
5745	105.49	106.37			37.55	7.75	46.18	100	0	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5745MHz: Fundamental frequency.






**OOBE DATA**

**802.11a**

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5622.2	57.97	59.1	68.3	-10.33	37.47	7.62	46.22	100	20	Peak
5945.68	57.51	58.02	68.3	-10.79	37.67	7.95	46.13	100	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5604.15	57.55	58.7	68.3	-10.75	37.46	7.61	46.22	100	360	Peak
5943.3	57.35	57.86	68.3	-10.95	37.67	7.95	46.13	100	360	Peak

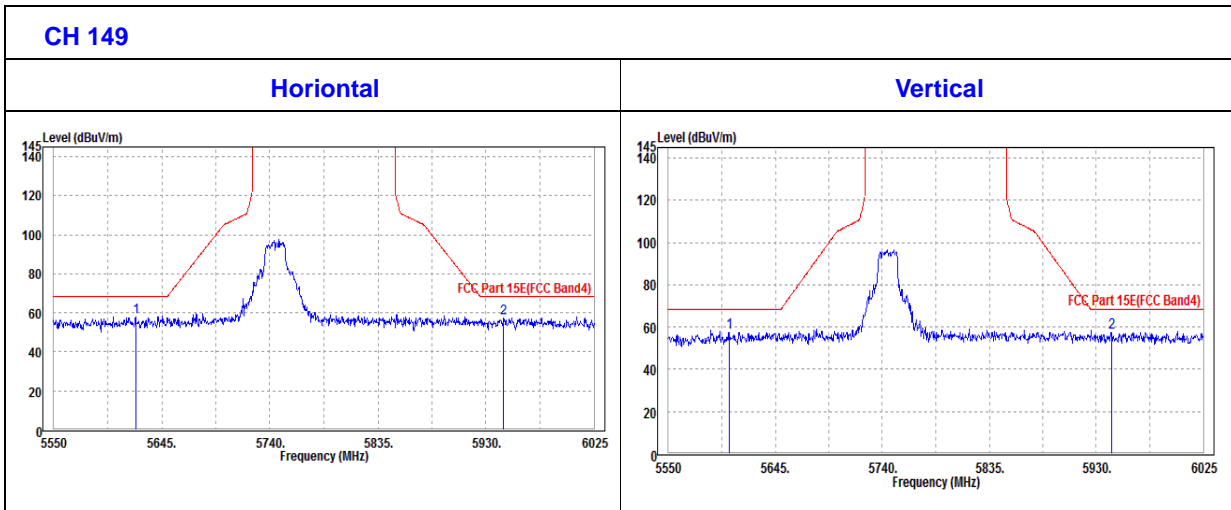



<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	94.74	95.55			37.57	7.79	46.17	100	0	Average
5785	106.21	107.02			37.57	7.79	46.17	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	97.05	97.86			37.57	7.79	46.17	100	70	Average
5785	105.72	106.53			37.57	7.79	46.17	100	70	Peak

**REMARKS:**


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.



**OOBE DATA**

**802.11a**

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5638.83	57.46	58.55	68.3	-10.84	37.48	7.64	46.21	100	0	Peak
5937.13	57.11	57.63	68.3	-11.19	37.66	7.95	46.13	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5620.3	56.3	57.43	68.3	-12	37.47	7.62	46.22	100	360	Peak
5954.7	57.41	57.9	68.3	-10.89	37.67	7.96	46.12	100	360	Peak

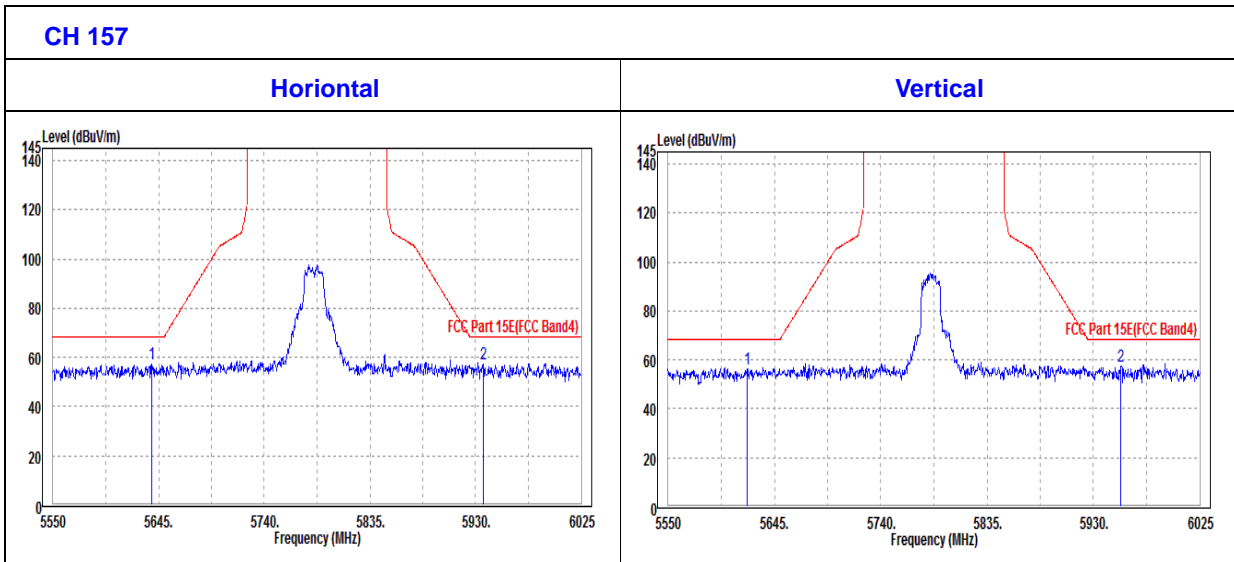



<b>CHANNEL</b>	TX Channel 161	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5805	95.72	96.49			37.58	7.81	46.16	100	30	Average
5805	106.76	107.53			37.58	7.81	46.16	100	30	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5805	97.1	97.87			37.58	7.81	46.16	100	70	Average
5805	105.05	105.82			37.58	7.81	46.16	100	70	Peak

**REMARKS:**


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5825MHz: Fundamental frequency.



**OOBE DATA**

**802.11a**

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5632.65	57.59	58.68	68.3	-10.71	37.48	7.64	46.21	100	0	Peak
5939.03	57.73	58.25	68.3	-10.57	37.66	7.95	46.13	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5635.03	57.64	58.73	68.3	-10.66	37.48	7.64	46.21	100	70	Peak
5930.95	57.61	58.14	68.3	-10.69	37.66	7.94	46.13	100	70	Peak

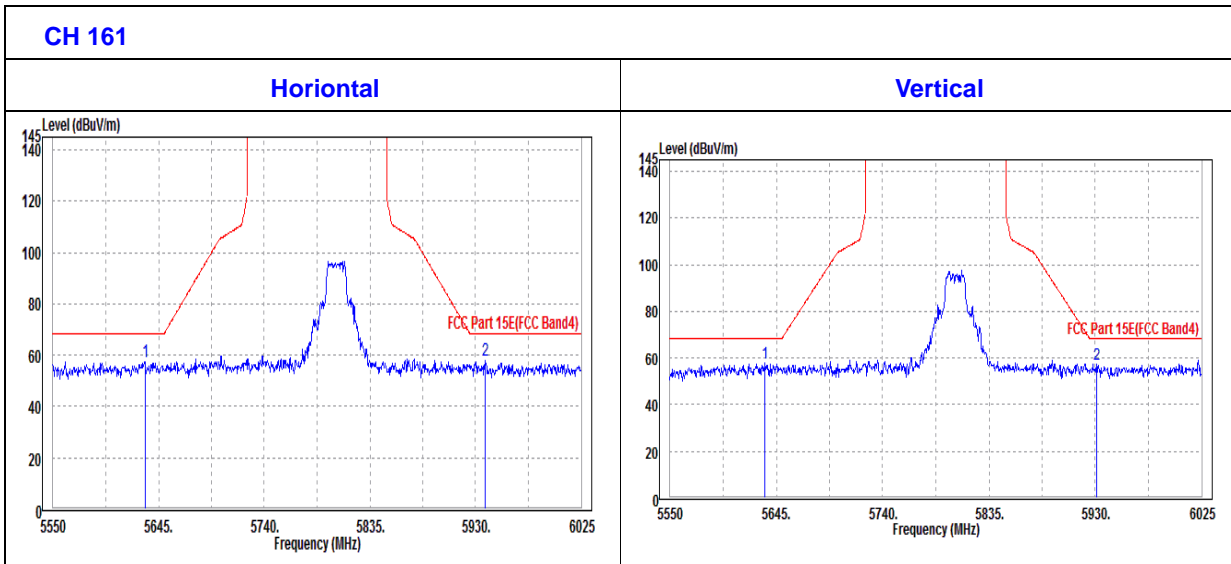



802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	97.18	98.06			37.55	7.75	46.18	100	20	Average
5745	104.64	105.52			37.55	7.75	46.18	100	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	95.75	96.63			37.55	7.75	46.18	100	80	Average
5745	103.28	104.16			37.55	7.75	46.18	100	80	Peak

**REMARKS:**


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.



**OOBE DATA**

**802.11n (20MHZ)**

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5609.38	58.15	59.29	68.3	-10.15	37.47	7.61	46.22	100	20	Peak
5972.28	57.3	57.76	68.3	-11	37.68	7.98	46.12	100	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5593.7	57.66	58.82	68.3	-10.64	37.46	7.6	46.22	100	70	Peak
5934.28	57.23	57.76	68.3	-11.07	37.66	7.94	46.13	100	70	Peak

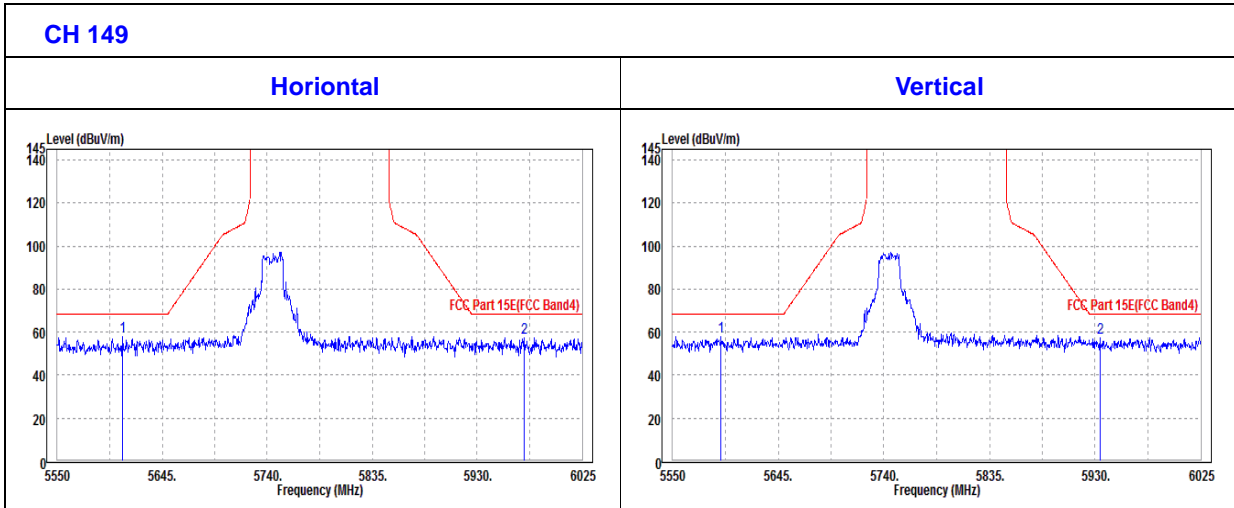



<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	97.17	97.98			37.57	7.79	46.17	112	126	Average
5785	106.2	107.01			37.57	7.79	46.17	112	126	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	94.25	95.06			37.57	7.79	46.17	100	18	Average
5785	102.92	103.73			37.57	7.79	46.17	100	18	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.






**OOBE DATA**

**802.11n (20MHZ)**

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5620.78	58.48	59.61	68.3	-9.82	37.47	7.62	46.22	100	20	Peak
5972.28	57.89	58.35	68.3	-10.41	37.68	7.98	46.12	100	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5636.93	58.09	59.18	68.3	-10.21	37.48	7.64	46.21	100	19	Peak
5944.73	57.89	58.4	68.3	-10.41	37.67	7.95	46.13	100	19	Peak

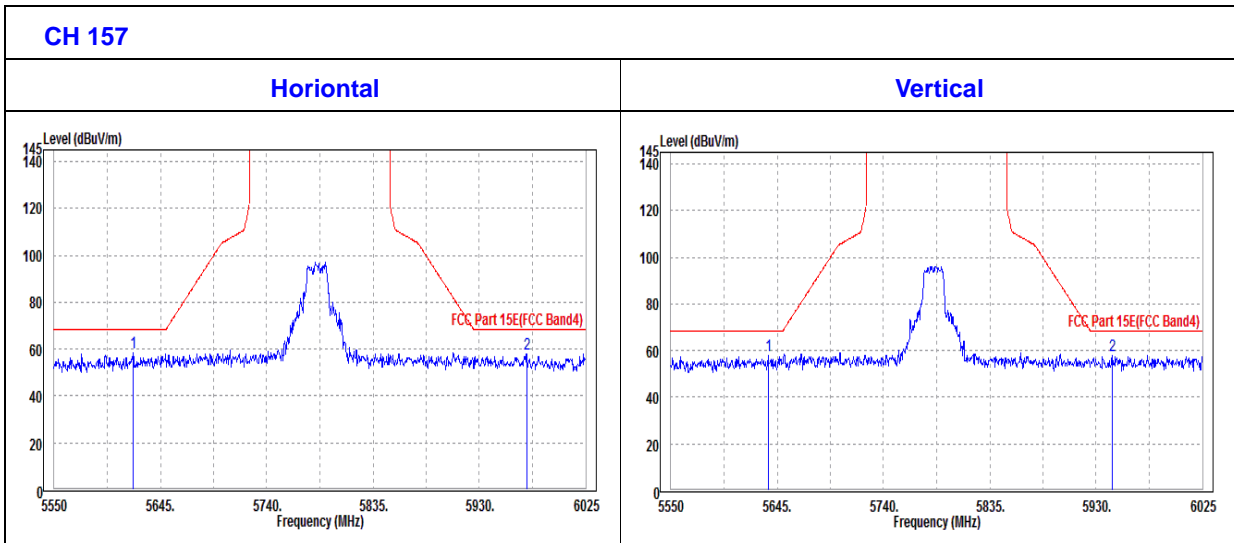



<b>CHANNEL</b>	TX Channel 161	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5805	95.92	96.69			37.58	7.81	46.16	143	20	Average
5805	106.64	107.41			37.58	7.81	46.16	143	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5805	95.48	96.25			37.58	7.81	46.16	100	70	Average
5805	103.68	104.45			37.58	7.81	46.16	100	70	Peak

**REMARKS:**


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5805MHz: Fundamental frequency.



**OOBE DATA**

**802.11n (20MHZ)**

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5626.48	58.38	59.48	68.3	-9.92	37.48	7.63	46.21	143	20	Peak
5936.65	57.58	58.1	68.3	-10.72	37.66	7.95	46.13	143	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5644.05	58.39	59.46	68.3	-9.91	37.49	7.65	46.21	100	19	Peak
5984.63	58.91	59.34	68.3	-9.39	37.69	7.99	46.11	100	19	Peak

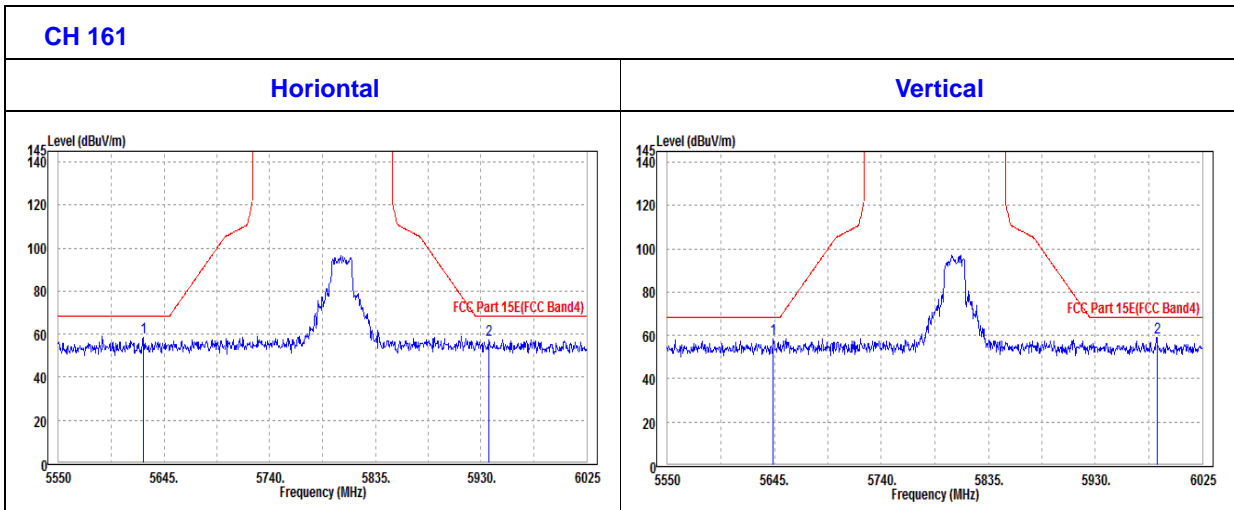



802.11n (40MHz)

<b>CHANNEL</b>	TX Channel 151	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	93.38	94.25			37.55	7.76	46.18	100	340	Average
5755	103.46	104.33			37.55	7.76	46.18	100	340	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	89.65	90.52			37.55	7.76	46.18	100	68	Average
5755	99.17	100.04			37.55	7.76	46.18	100	68	Peak

**REMARKS:**


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5755MHz: Fundamental frequency.



**OOBE DATA**

**802.11n (40MHZ)**

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5643.58	58.01	59.08	68.3	-10.29	37.49	7.65	46.21	143	20	Peak
5950.9	59.22	59.71	68.3	-9.08	37.67	7.96	46.12	143	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5639.78	57.69	58.78	68.3	-10.61	37.48	7.64	46.21	100	68	Peak
5946.63	58.02	58.51	68.3	-10.28	37.67	7.96	46.12	100	68	Peak

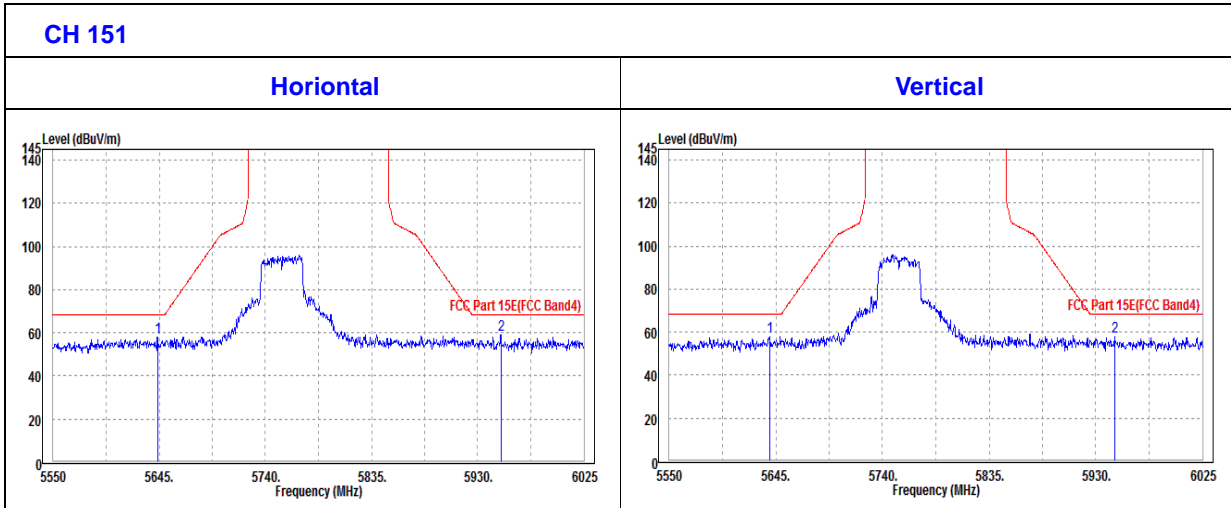



<b>CHANNEL</b>	TX Channel 159	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	93.25	94.04			37.58	7.8	46.17	126	21	Average
5795	104.16	104.95			37.58	7.8	46.17	126	21	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	92.23	93.02			37.58	7.8	46.17	100	174	Average
5795	101.5	102.29			37.58	7.8	46.17	100	174	Peak

**REMARKS:**


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5795MHz: Fundamental frequency.



**OOBE DATA**

**802.11n (40MHZ)**

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5626.48	57.45	58.55	68.3	-10.85	37.48	7.63	46.21	126	21	Peak
5961.35	58.83	59.3	68.3	-9.47	37.68	7.97	46.12	126	21	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5642.15	57.95	59.03	68.3	-10.35	37.49	7.64	46.21	100	68	Peak
5964.68	57.38	57.85	68.3	-10.92	37.68	7.97	46.12	100	68	Peak

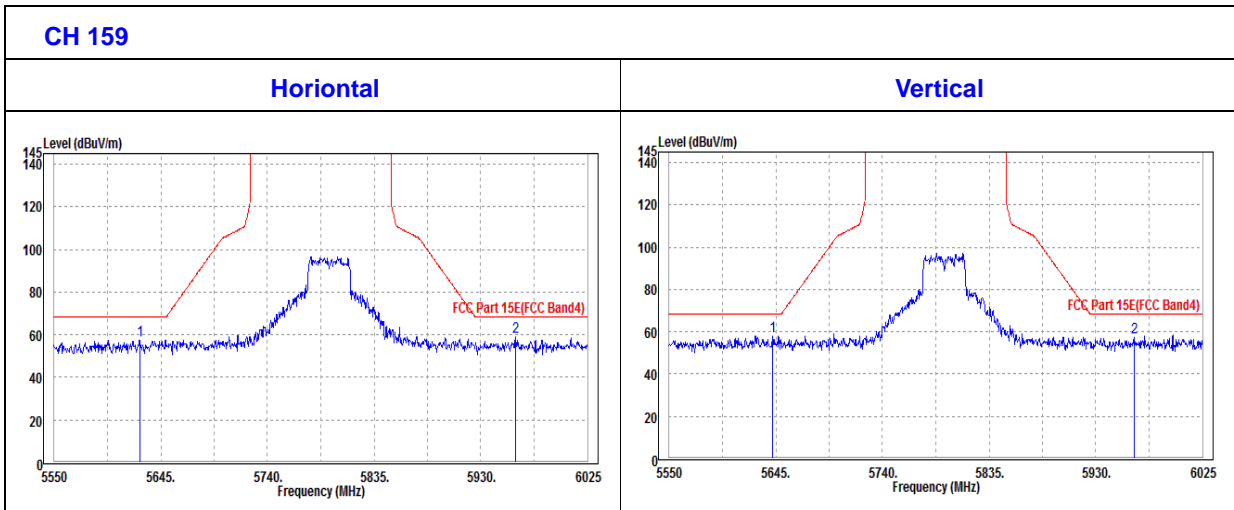



### 3.2 CONDUCTED EMISSION MEASUREMENT

#### 3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Mar. 15,18	Mar. 14,19
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Sep. 18,17	Sep. 17,18

- NOTE:**
1. The test was performed in CE shielded room.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

#### 3.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.






### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

### 3.2.5 TEST SETUP

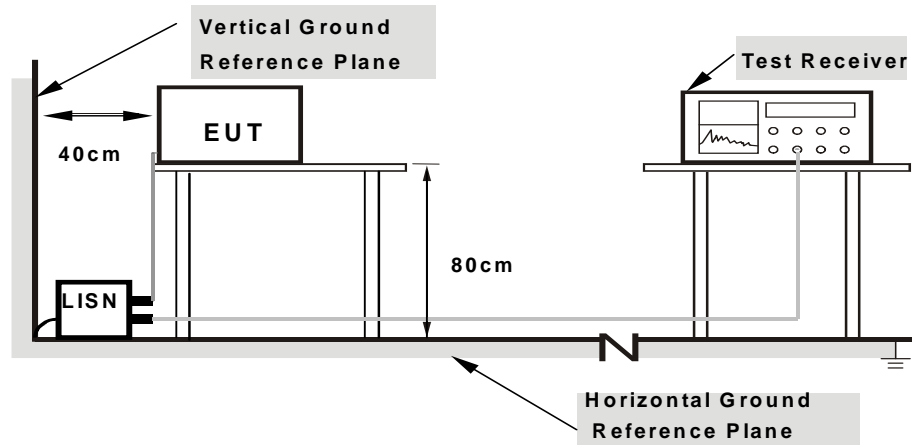

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.6.



### 3.2.7 TEST RESULTS


**CONDUCTED WORST-CASE DATA :**

<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	24deg. C, 55RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2018/08/15

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	33.46	56.00	-22.54	L1	ON	9.6
0.150000	49.38	---	66.00	-16.62	L1	ON	9.6
0.204000	---	31.12	53.45	-22.33	L1	ON	9.7
0.204000	42.54	---	63.45	-20.91	L1	ON	9.7
0.608000	---	24.42	46.00	-21.58	L1	ON	9.7
0.608000	28.93	---	56.00	-27.07	L1	ON	9.7
1.800000	---	18.08	46.00	-27.92	L1	ON	9.7
1.800000	25.48	---	56.00	-30.52	L1	ON	9.7
3.396000	---	17.19	46.00	-28.81	L1	ON	9.7
3.396000	23.74	---	56.00	-32.26	L1	ON	9.7
3.940000	---	18.52	46.00	-27.48	L1	ON	9.7
3.940000	23.69	---	56.00	-32.31	L1	ON	9.7

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

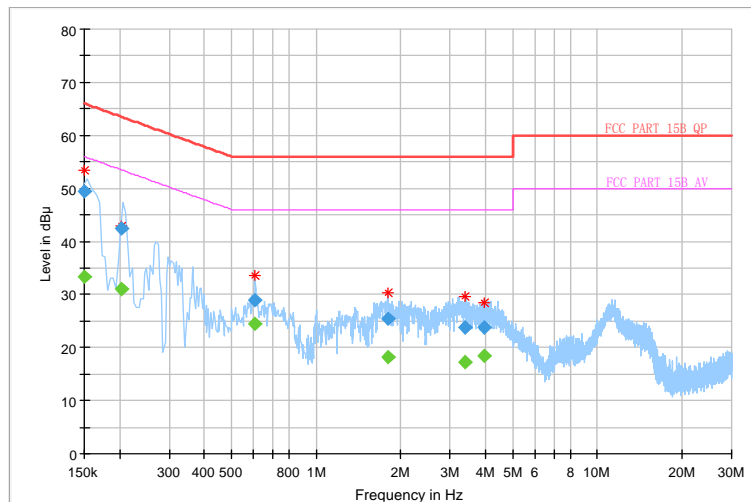




<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	24deg. C, 55RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2018/08/15

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	33.38	56.00	-22.62	N	ON	9.8
<b>0.150000</b>	<b>51.15</b>	---	<b>66.00</b>	<b>-14.85</b>	<b>N</b>	<b>ON</b>	<b>9.8</b>
0.248000	---	21.39	51.82	-30.43	N	ON	9.9
0.248000	38.95	---	61.82	-22.87	N	ON	9.9
0.608000	---	24.68	46.00	-21.32	N	ON	10.1
0.608000	28.78	---	56.00	-27.22	N	ON	10.1
1.004000	---	22.95	46.00	-23.05	N	ON	9.9
1.004000	26.66	---	56.00	-29.34	N	ON	9.9
1.400000	---	19.70	46.00	-26.30	N	ON	9.9
1.400000	25.47	---	56.00	-30.53	N	ON	9.9
12.760000	---	18.44	50.00	-31.56	N	ON	9.9
12.760000	24.91	---	60.00	-35.09	N	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

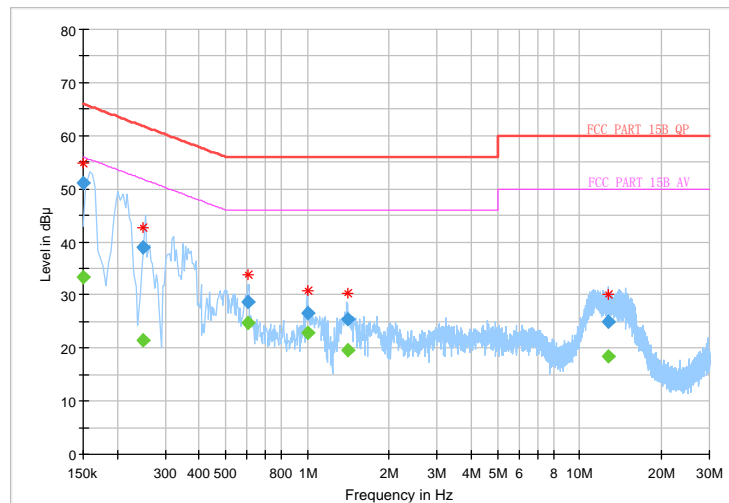



### 3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

#### 3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Client devices	250mW (24 dBm)
U-NII-2A	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)


**NOTE:** Where B is the 26dB emission bandwidth in MHz.




### 3.3.2 TEST SETUP

#### FOR POWER OUTPUT MEASUREMENT


##### 802.11a, 802.11n (20MHz), 802.11n (40MHz) TEST CONFIGURATION

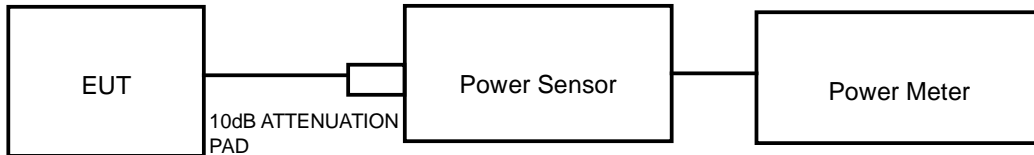

##### 11ac TEST CONFIGURATION

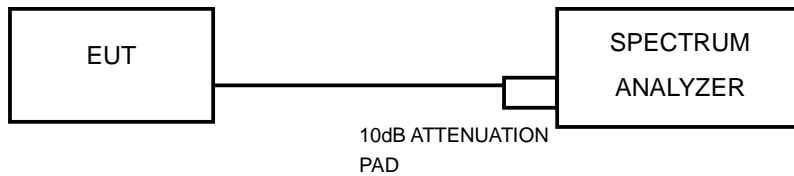

##### FOR 26dB BANDWIDTH



### 3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Mar. 02,18	Mar. 01,19
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Mar. 16,18	Mar. 15,19
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510332	Mar. 16,18	Mar. 15,19
Power Sensor	ANRITSU	MA2411B	1339352	Mar. 16,18	Mar. 15,19

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



### 3.3.4 TEST PROCEDURE

#### FOR POWER MEASUREMENT

##### For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

##### For 802.11ac (80MHz)

1. Measure the duty cycle,  $x$ , of the transmitter output signal as described in II.B.
2. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
3. Set RBW = 1 MHz.
4. Set VBW  $\geq$  3 MHz.
5. Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This ensures that bin-to-bin spacing is  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
8. Do not use sweep triggering. Allow the sweep to “free run.”
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \log (1/0.25) = 6 \text{ dB}$  if the duty cycle is 25%.



#### FOR 99 PERCENT OCCUPIED BANDWIDTH

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

#### FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### FOR 6dB BANDWIDTH

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



### 3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.





### 3.3.7 TEST RESULTS

#### OUTPUT POWER:

##### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	14.35	27.23	24	PASS
40	5200	14.20	26.30	24	PASS
48	5240	14.38	<b>27.42</b>	24	PASS
52	5260	14.47	<b>27.99</b>	24	PASS
60	5300	14.21	26.36	24	PASS
64	5320	14.18	26.18	24	PASS
100	5500	14.20	26.30	24	PASS
116	5580	14.46	27.93	24	PASS
140	5700	14.48	<b>28.05</b>	24	PASS
149	5745	14.10	<b>25.70</b>	30	PASS
157	5785	14.08	25.59	30	PASS
161	5805	14.06	25.47	30	PASS

##### 802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	13.32	21.48	24	PASS
40	5200	13.21	20.94	24	PASS
48	5240	13.27	21.23	24	PASS
52	5260	13.17	20.75	24	PASS
60	5300	13.12	20.51	24	PASS
64	5320	13.07	20.28	24	PASS
100	5500	13.05	20.18	24	PASS
116	5580	13.11	20.46	24	PASS
140	5700	13.22	20.99	24	PASS
149	5745	13.41	21.93	30	PASS
157	5785	13.02	20.04	30	PASS
161	5805	13.30	21.38	30	PASS



802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
38	5190	12.16	16.44	24	PASS
46	5230	13.14	20.61	24	PASS
54	5270	13.05	20.18	24	PASS
62	5310	9.62	9.16	24	PASS
102	5510	10.28	10.67	24	PASS
110	5550	13.24	21.09	24	PASS
134	5670	13.34	21.58	24	PASS
151	5755	13.20	20.89	30	PASS
161	5805	13.08	20.32	30	PASS



**99% OCCUPIED BANDWIDTH & 26dB BANDWIDTH/6dB BANDWIDTH:**

**802.11a**

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	<b>16.68</b>	<b>20.23</b>	PASS
40	5200	16.56	20.17	PASS
48	5240	16.68	20.10	PASS
52	5260	16.68	19.65	PASS
60	5300	16.92	20.86	PASS
64	5320	<b>16.98</b>	<b>21.43</b>	PASS
100	5500	<b>17.40</b>	<b>34.32</b>	PASS
116	5580	16.98	25.85	PASS
140	5700	16.80	28.65	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
149	5745	17.16	16.36	PASS
157	5785	16.98	16.36	PASS
161	5805	<b>17.82</b>	<b>17.60</b>	PASS



802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	17.64	19.87	PASS
40	5200	<b>17.70</b>	19.64	PASS
48	5240	17.64	<b>19.89</b>	PASS
52	5260	17.64	19.94	PASS
60	5300	17.70	19.83	PASS
64	5320	<b>18.00</b>	<b>20.00</b>	PASS
100	5500	17.76	<b>29.82</b>	PASS
116	5580	17.76	21.31	PASS
140	5700	<b>17.82</b>	24.97	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
149	5745	17.76	<b>17.60</b>	PASS
157	5785	17.76	17.59	PASS
161	5805	<b>17.82</b>	17.60	PASS



802.11n (40MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
38	5190	36.12	40.82	PASS
46	5230	36.12	40.89	PASS
54	5270	36.12	40.85	PASS
62	5310	36.18	40.90	PASS
102	5510	36.36	66.19	PASS
110	5550	36.18	58.61	PASS
134	5670	36.18	44.85	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
151	5755	36.24	36.10	PASS
159	5795	36.24	36.35	PASS



BUREAU VERITAS

Test Report No.: RF180724W005-3


For U-NII-1:

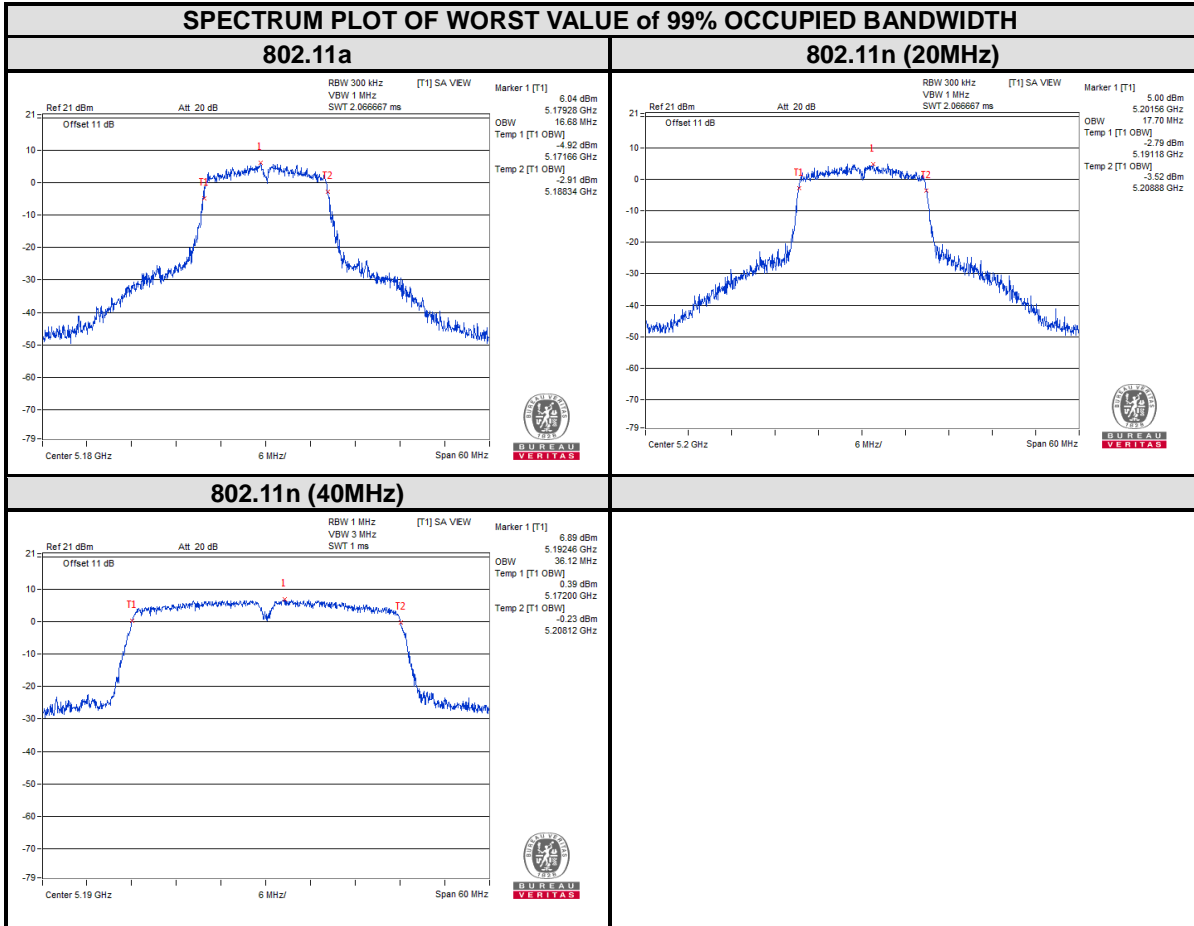



BUREAU VERITAS

Test Report No.: RF180724W005-3

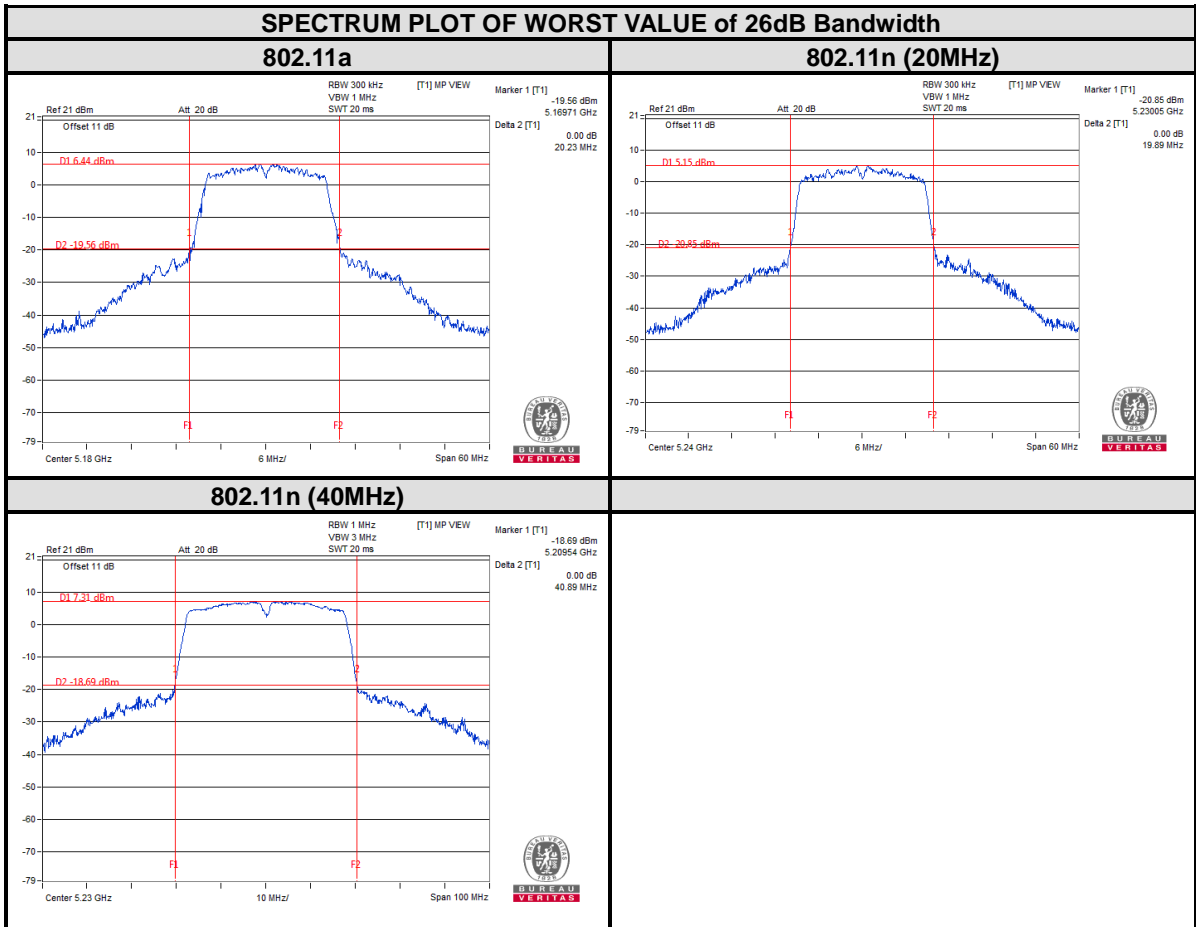




BUREAU VERITAS

Test Report No.: RF180724W005-3

For U-NII-2A:

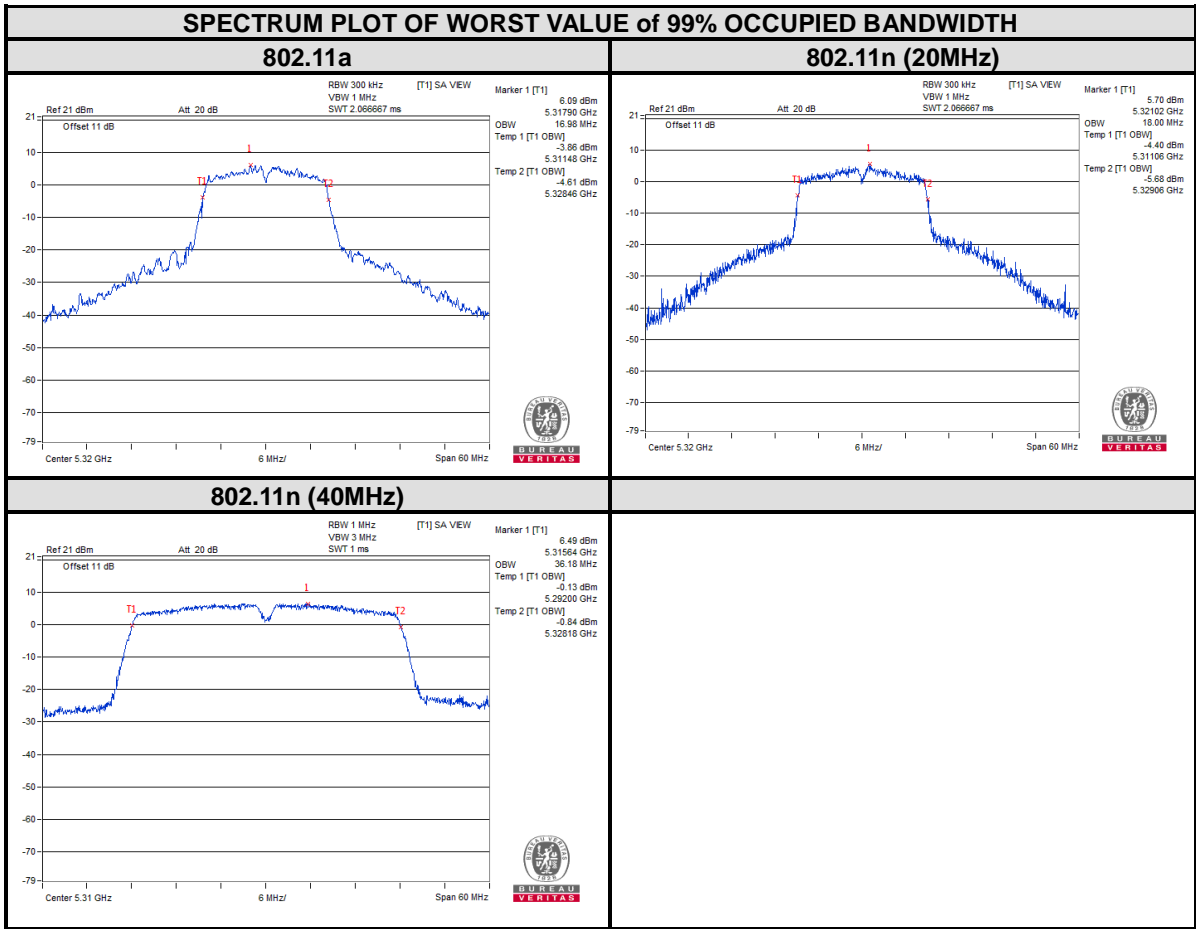






BUREAU VERITAS

Test Report No.: RF180724W005-3

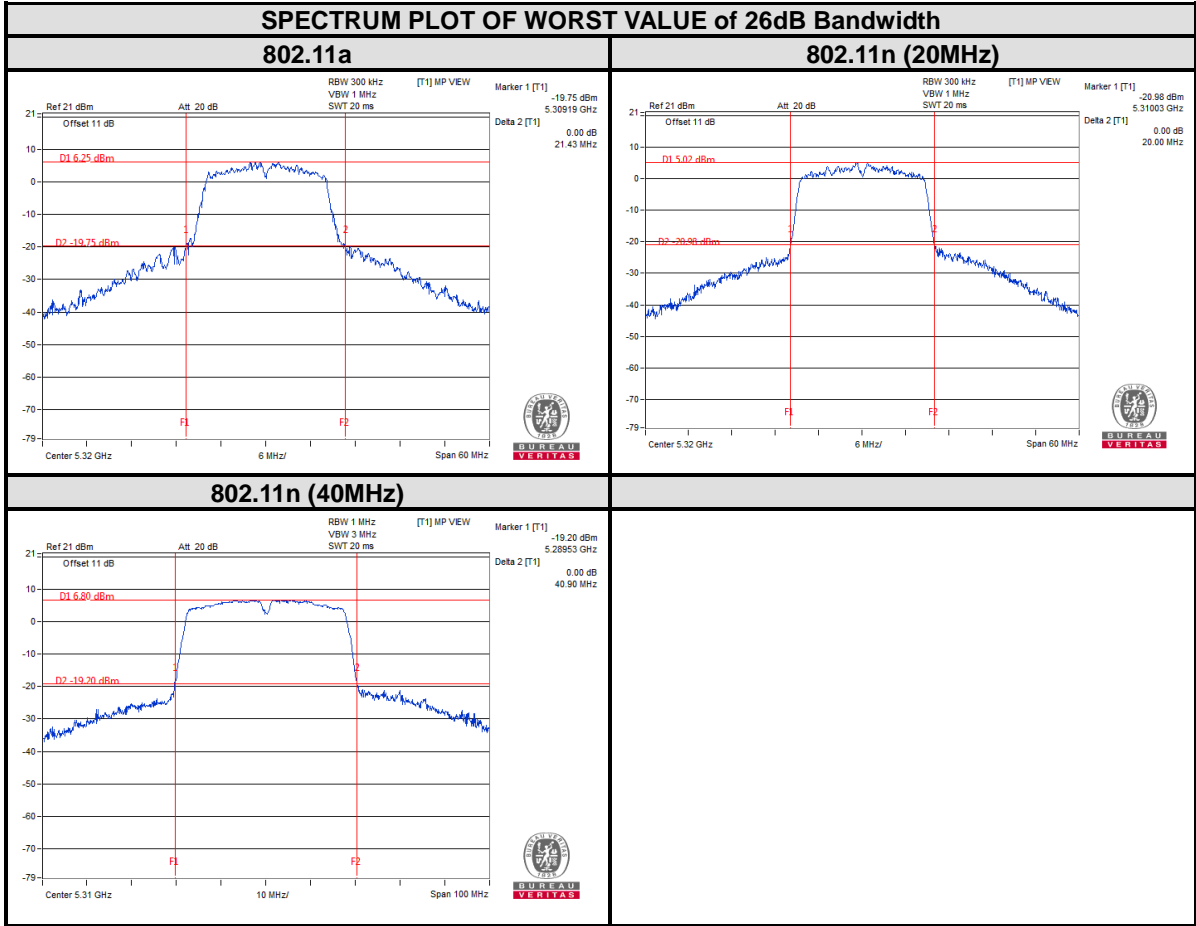




BUREAU VERITAS

Test Report No.: RF180724W005-3


For U-NII-2C:

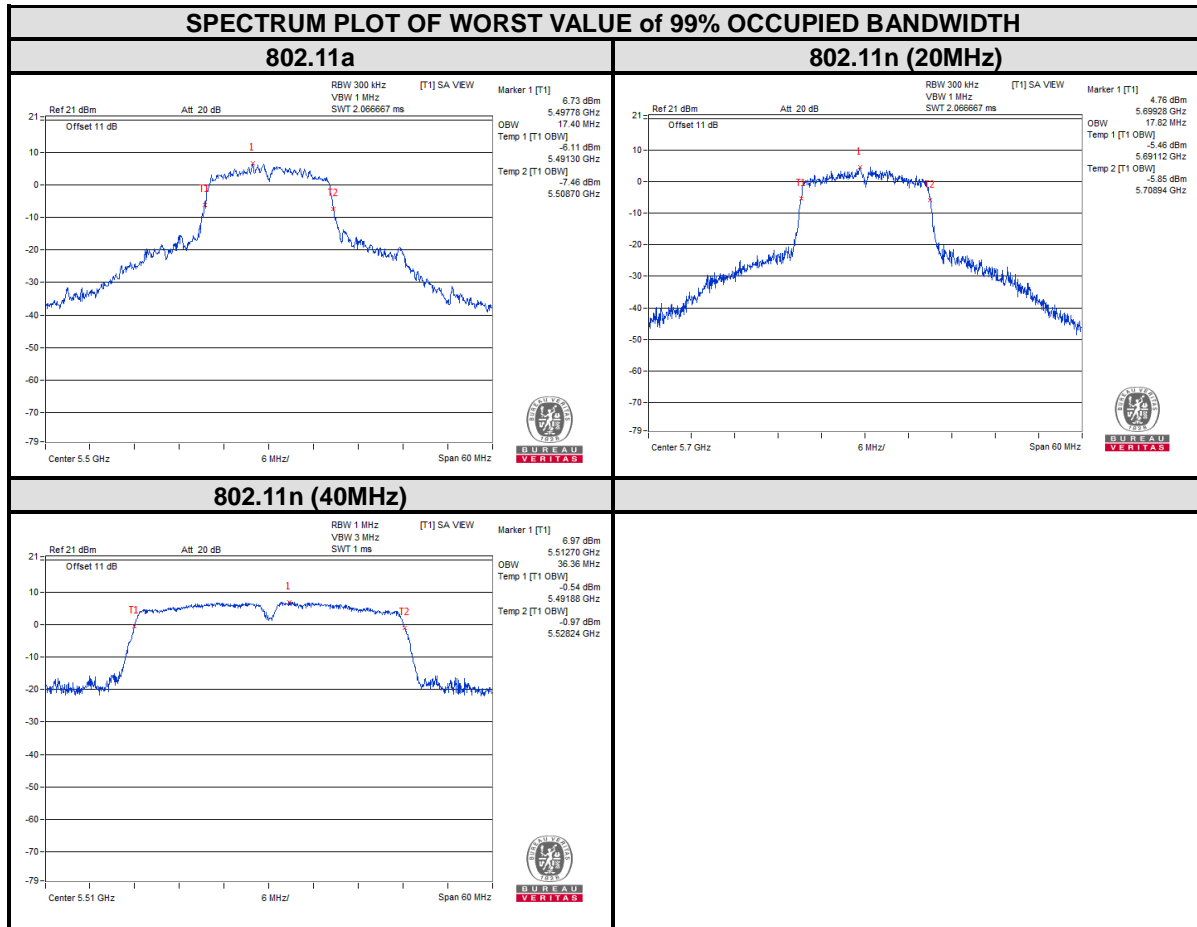



BUREAU VERITAS

Test Report No.: RF180724W005-3

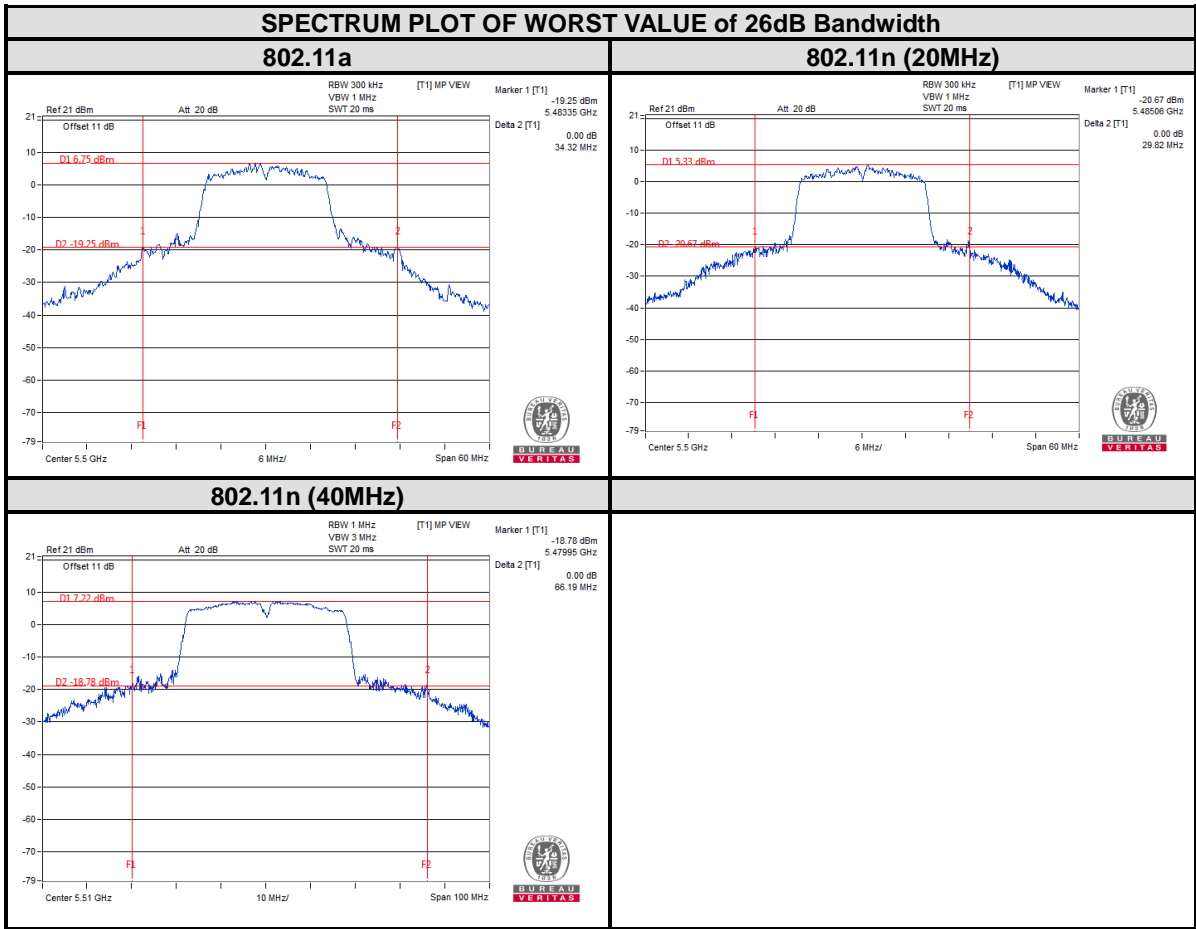




BUREAU VERITAS

Test Report No.: RF180724W005-3


For U-NII-3:

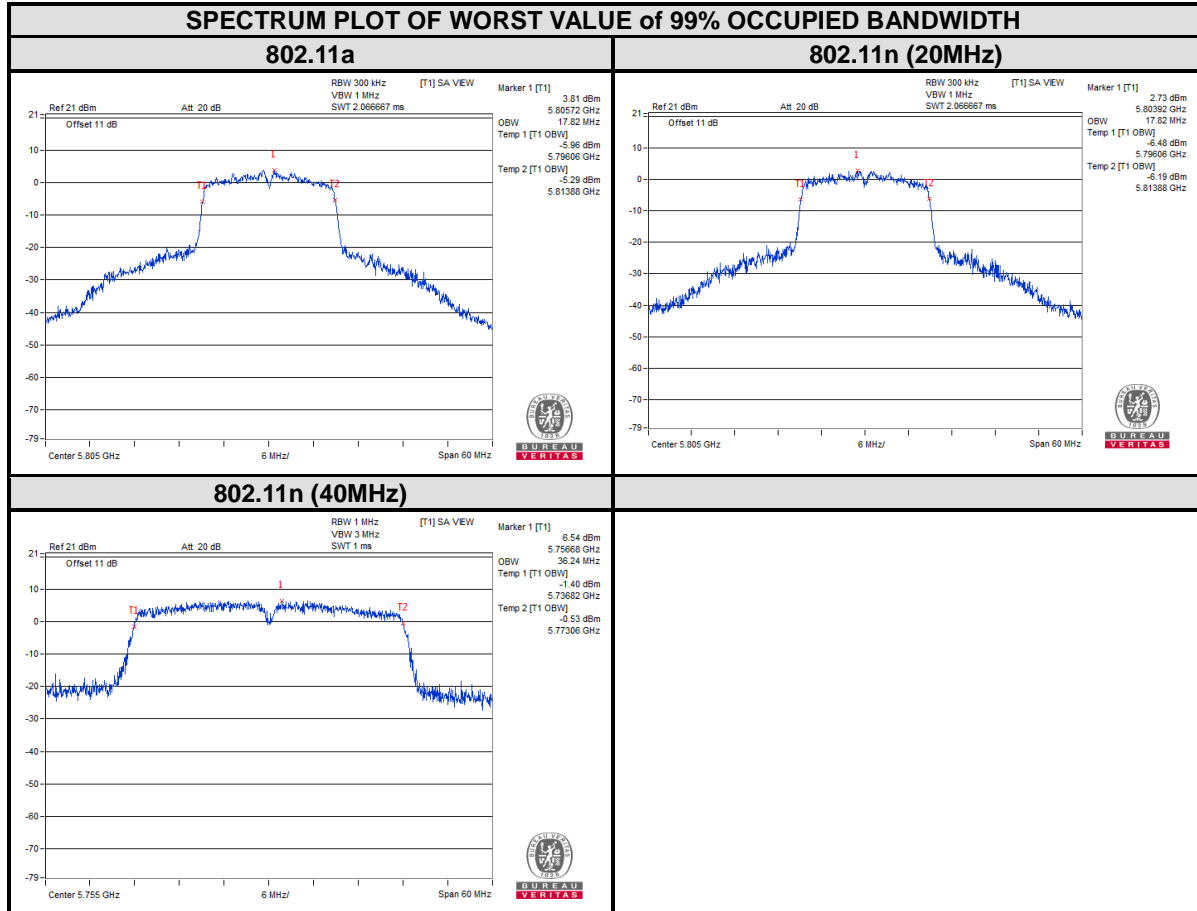



BUREAU  
VERITAS

Test Report No.: RF180724W005-3

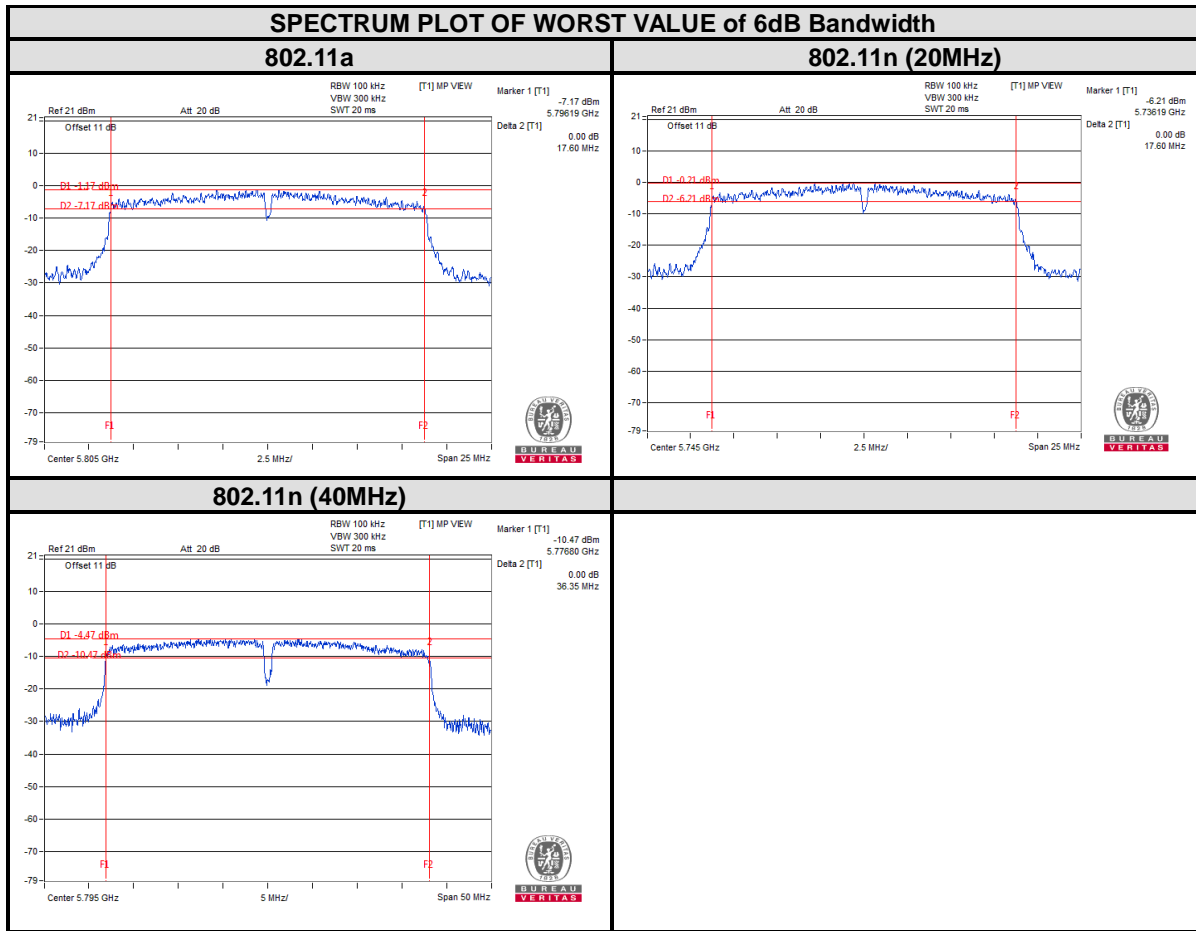




### 3.4 MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

#### 3.4.1 LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Client devices	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

#### 3.4.2 TEST SETUP



#### 3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.



### 3.4.4 TEST PROCEDURES

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Add  $10 \log (1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).
- 7) Record the max value

### 3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.4.6 EUT OPERATING CONDITIONS

Same as 3.1.6.



### 3.4.7 TEST RESULTS

For U-NII-1 & U-NII-2A & U-NII-2C :

#### 802.11a

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	<b>10.16</b>	0.114	10.274	11	PASS
40	5200	8.18	0.114	8.294	11	PASS
48	5240	8.61	0.114	8.724	11	PASS
52	5260	<b>8.98</b>	0.114	9.094	11	PASS
60	5300	8.71	0.114	8.824	11	PASS
64	5320	8.28	0.114	8.394	11	PASS
100	5500	8.55	0.114	8.664	11	PASS
116	5580	8.76	0.114	8.874	11	PASS
140	5700	<b>8.86</b>	0.114	8.974	11	PASS

#### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	<b>7.60</b>	0.142	7.742	11	PASS
40	5200	7.36	0.142	7.502	11	PASS
48	5240	7.26	0.142	7.402	11	PASS
52	5260	7.01	0.142	7.152	11	PASS
60	5300	7.56	0.142	7.702	11	PASS
64	5320	<b>7.85</b>	0.142	7.992	11	PASS
100	5500	<b>8.16</b>	0.142	8.302	11	PASS
116	5580	7.59	0.142	7.732	11	PASS
140	5700	7.35	0.142	7.492	11	PASS





802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
38	5190	4.02	0.261	4.281	11	PASS
46	5230	<b>4.05</b>	0.261	4.311	11	PASS
54	5270	<b>3.81</b>	0.261	4.071	11	PASS
62	5310	3.54	0.261	3.801	11	PASS
102	5510	3.42	0.261	3.681	11	PASS
110	5550	<b>4.22</b>	0.261	4.481	11	PASS
134	5670	3.48	0.261	3.741	11	PASS



**For U-NII-3:**

**802.11a**

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	11.97	8.96	0.114	9.07	30	PASS
157	5785	10.80	7.79	0.114	7.90	30	PASS
161	5805	9.31	6.30	0.114	6.41	30	PASS

**802.11n (20MHz)**

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	10.47	7.46	0.142	7.60	30	PASS
157	5785	9.76	6.75	0.142	6.89	30	PASS
161	5805	9.23	6.22	0.142	6.36	30	PASS

**802.11n (40MHz)**


CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
151	5755	7.14	4.13	0.261	4.39	30	PASS
159	5795	6.65	3.64	0.261	3.90	30	PASS



BUREAU VERITAS

Test Report No.: RF180724W005-3

For 5180~5240MHz

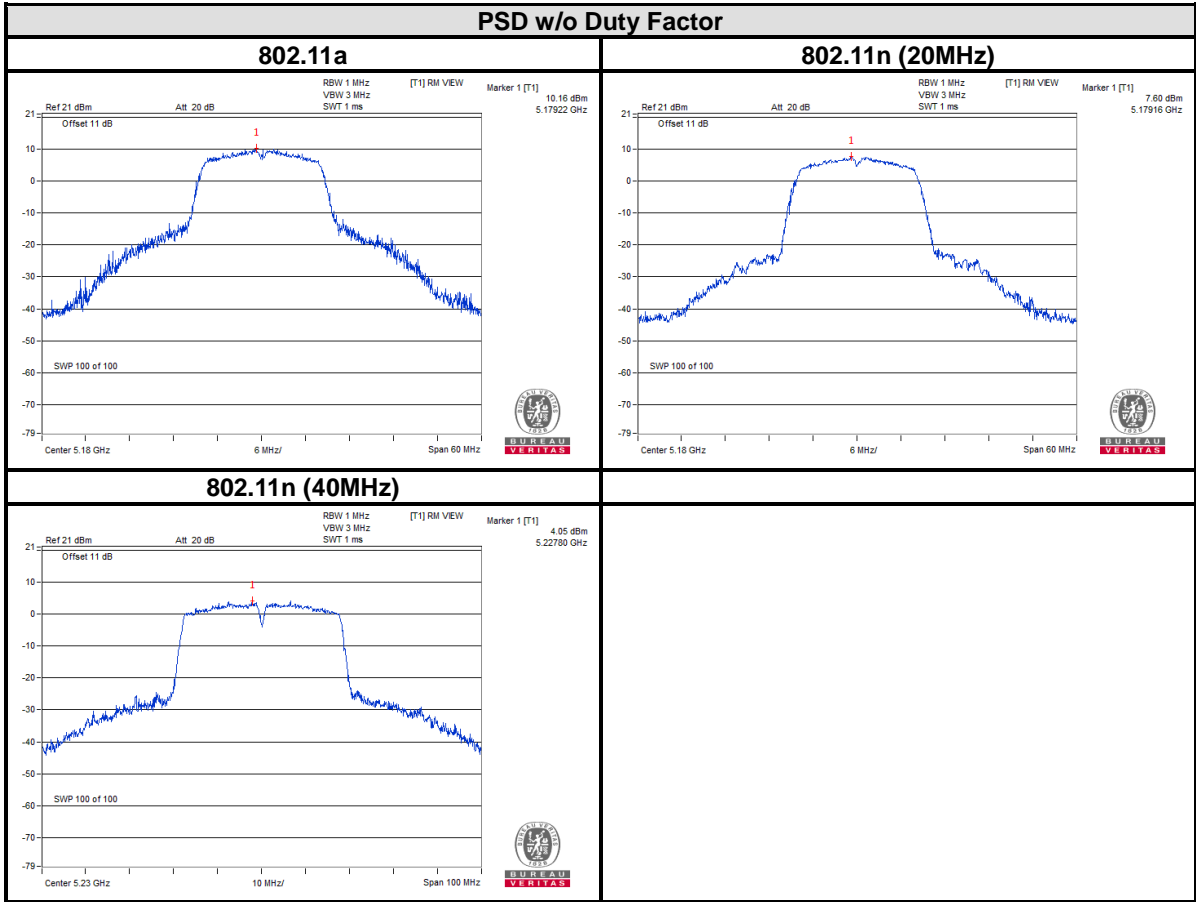




BUREAU VERITAS

Test Report No.: RF180724W005-3

For 5260~5320MHz

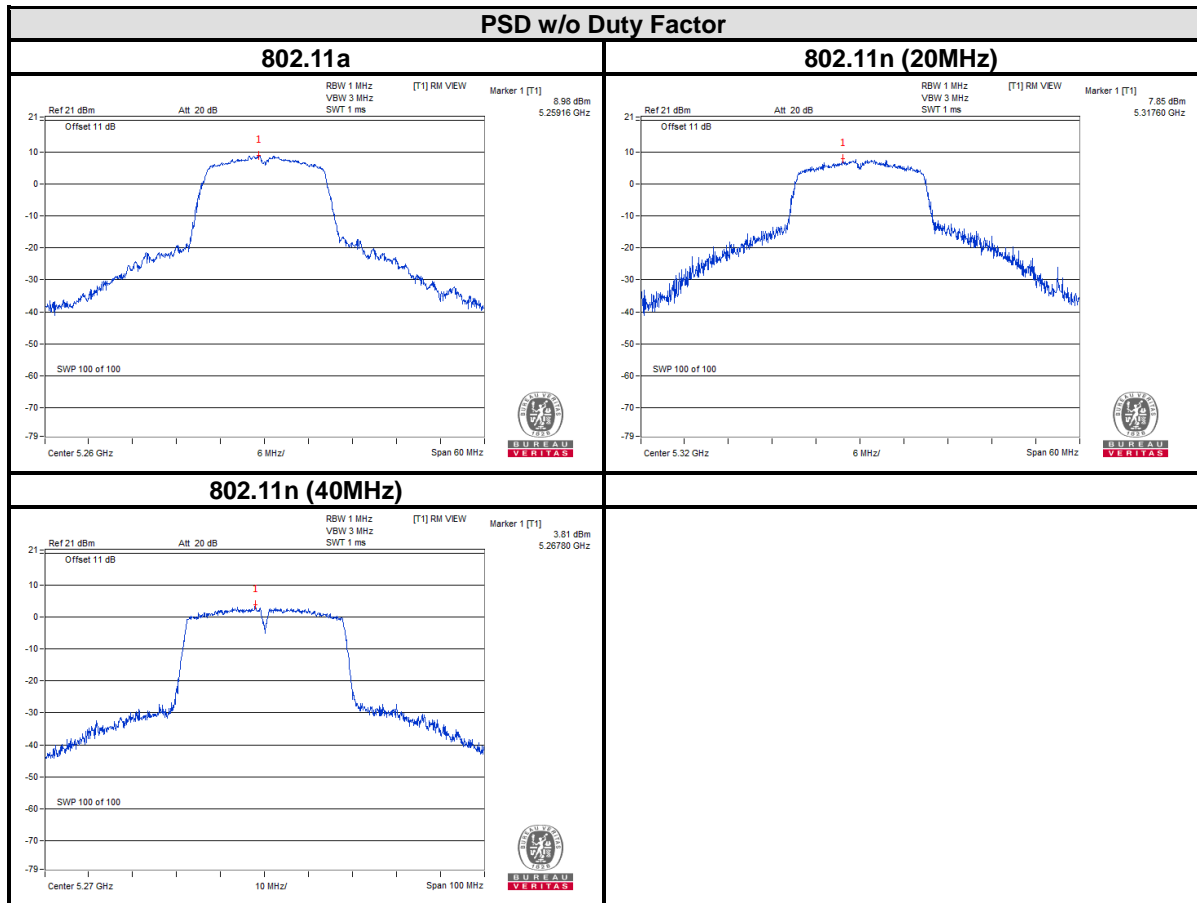




**BUREAU  
VERITAS**

Test Report No.: RF180724W005-3

For 5500~5700MHz

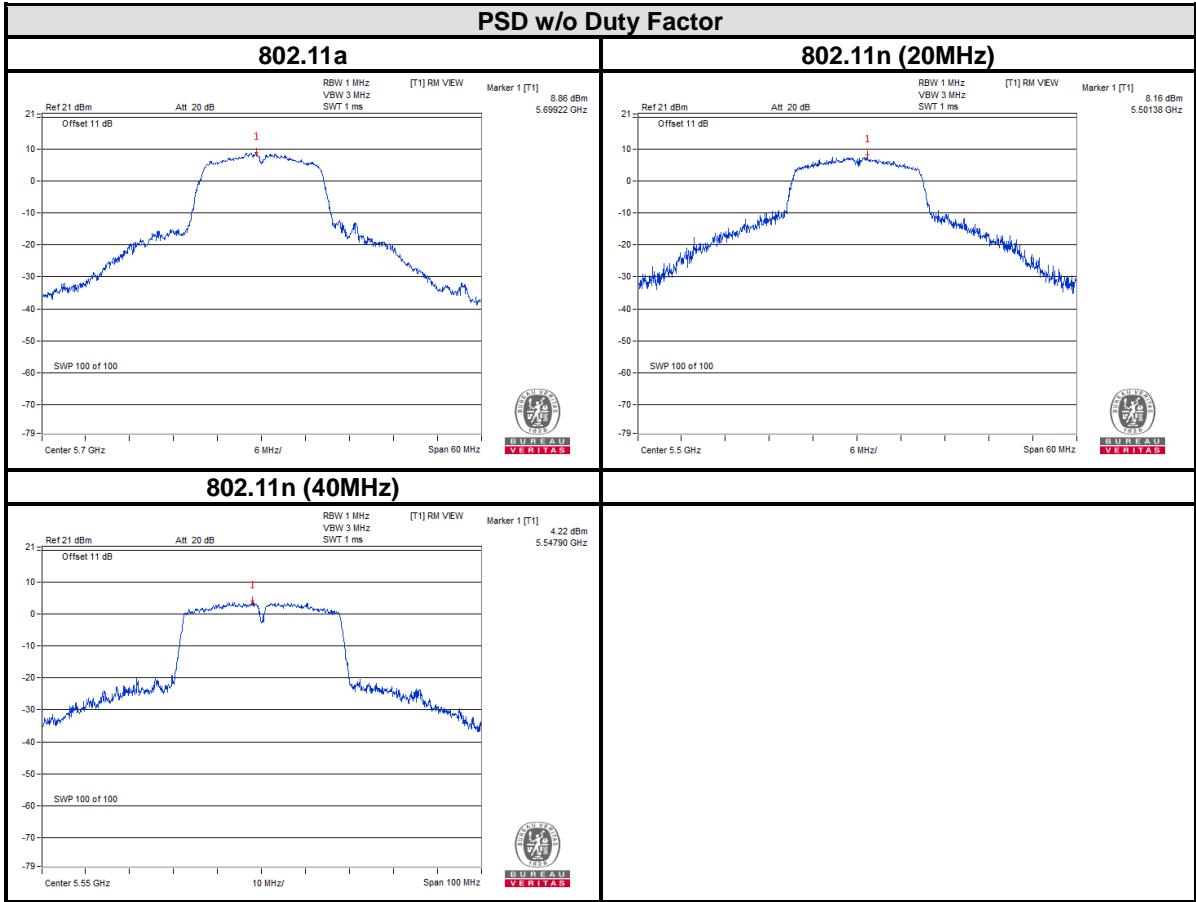




BUREAU  
VERITAS

Test Report No.: RF180724W005-3

For 5745~5805MHz

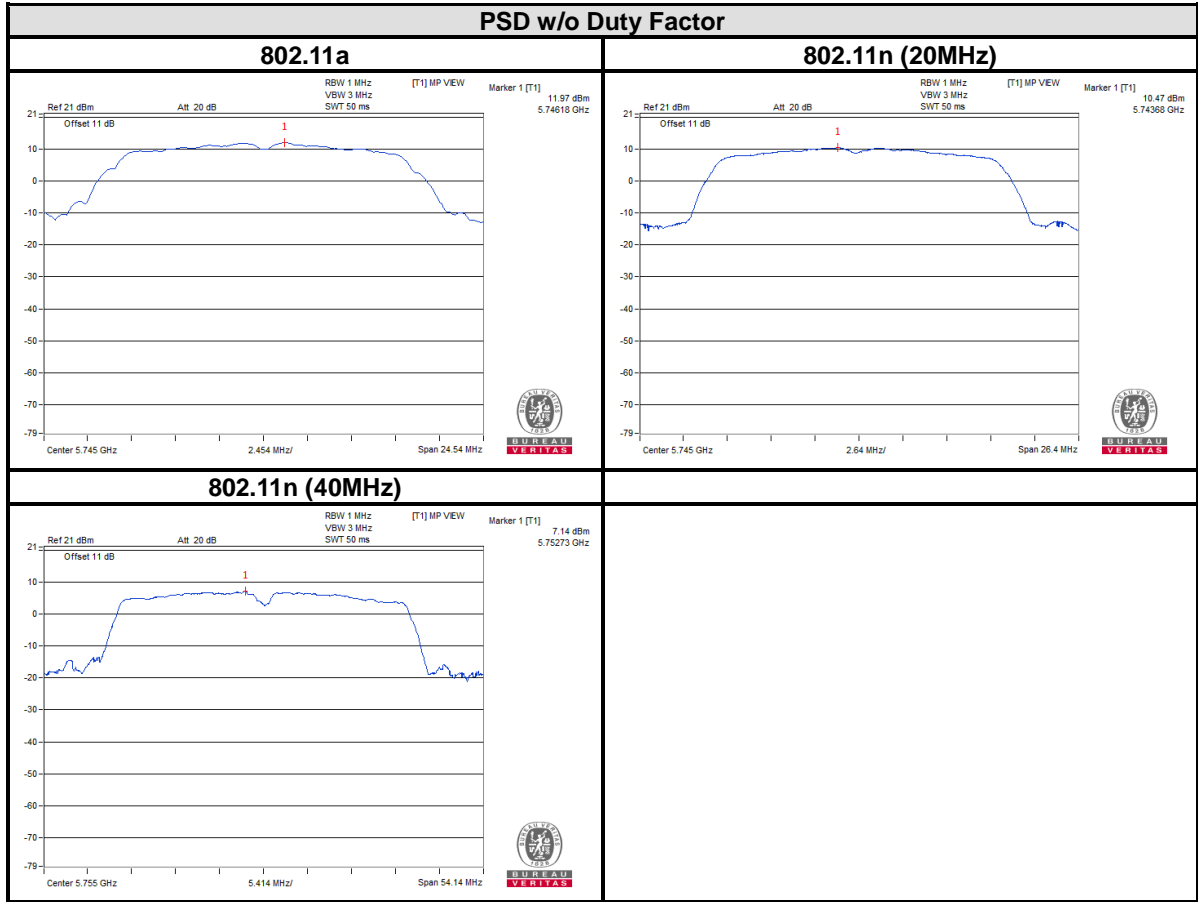




### 3.5 FREQUENCY STABILITY

#### 3.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

#### 3.5.2 TEST SETUP

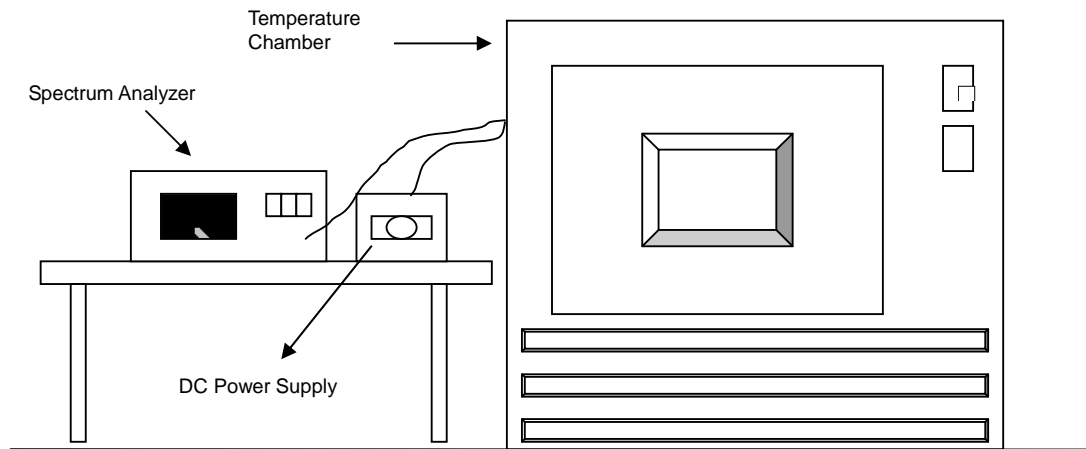

#### 3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.



### 3.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.





### 3.5.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.										
OPERATING FREQUENCY: 5180MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
50	120	5179.9926	-1.429	5179.991	-1.737	5179.9889	-2.143	5179.993	-1.351	PASS
40	120	5180.0168	3.243	5180.0232	4.479	5180.0239	4.614	5180.017	3.282	PASS
30	120	5180.0158	3.050	5180.0132	2.548	5180.0155	2.992	5180.0137	2.645	PASS
20	120	5180.0251	4.846	5180.0275	5.309	5180.0239	4.614	5180.0247	4.768	PASS
10	120	5179.9943	-1.100	5179.9996	-0.077	5179.9934	-1.274	5179.9979	-0.405	PASS
0	120	5179.9851	-2.876	5179.986	-2.703	5179.9841	-3.069	5179.9878	-2.355	PASS
-10	120	5180.0285	5.502	5180.0216	4.170	5180.0281	5.425	5180.0229	4.421	PASS
-20	120	5180.0052	1.004	5180.0056	1.081	5180.0047	0.907	5180.0013	0.251	PASS
-30	120	5179.9976	-0.463	5179.9942	-1.120	5179.9938	-1.197	5179.9985	-0.290	PASS

FREQUENCY STABILITY VERSUS VOLTAGE										
OPERATING FREQUENCY: 5180MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
20	138	5180.0259	5.000	5180.0264	5.097	5180.0241	4.653	5180.0244	4.710	PASS
	120	5180.0251	4.846	5180.0275	5.309	5180.0239	4.614	5180.0247	4.768	PASS
	102	5180.0251	4.846	5180.026	5.019	5180.0241	4.653	5180.023	4.440	PASS



FREQUENCY STABILITY VERSUS TEMP.										
OPERATING FREQUENCY: 5805MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
50	120	5805.0159	2.739	5805.013	2.239	5805.016	2.756	5805.0109	1.878	PASS
40	120	5805.0246	4.238	5805.0285	4.910	5805.0222	3.824	5805.023	3.962	PASS
30	120	5804.9817	-3.152	5804.9824	-3.032	5804.9805	-3.359	5804.9767	-4.014	PASS
20	120	5804.9962	-0.655	5804.9945	-0.947	5805.001	0.172	5804.9975	-0.431	PASS
10	120	5805.0007	0.121	5805.0058	0.999	5805.0018	0.310	5805.0106	1.826	PASS
0	120	5804.9931	-1.189	5804.9891	-1.878	5804.9953	-0.810	5804.987	-2.239	PASS
-10	120	5805.0211	3.635	5805.0212	3.652	5805.0232	3.997	5805.0214	3.686	PASS
-20	120	5804.9795	-3.531	5804.983	-2.929	5804.9751	-4.289	5804.9807	-3.325	PASS
-30	120	5804.9873	-2.188	5804.9803	-3.394	5804.9822	-3.066	5804.9791	-3.600	PASS

FREQUENCY STABILITY VERSUS VOLTAGE										
OPERATING FREQUENCY: 5805MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
20	138	5804.9968	-0.551	5804.9968	-0.551	5805.0001	0.017	5804.9978	-0.379	PASS
	120	5804.9962	-0.655	5804.9945	-0.947	5805.001	0.172	5804.9975	-0.431	PASS
	102	5804.9967	-0.568	5804.9954	-0.792	5804.9995	-0.086	5804.9969	-0.534	PASS



## 4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS**

Test Report No.: RF180724W005-3

## **5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**---END---**