



Test Report No.: RF181120W004-3



FCC TEST REPORT

(Part 15, Subpart E)



Applicant:	Icon Health & Fitness, Inc.
Address:	1500 South 1000 West 435-786-5915 Logan, UT 84321, United States

Manufacturer or Supplier:	Icon Health & Fitness, Inc.
Address:	1500 South 1000 West 435-786-5915 Logan, UT 84321, United States
Product:	402551 module
Brand Name:	N/A
Model Name:	MP32-ARGON
FCC ID:	OMC402551
Date of tests:	Nov. 21, 2018 ~ Dec. 23, 2018

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart E, Section 15.407

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Roger Li Engineer / Mobile Department	Approved by Sam Tung Manager / Mobile Department
 Date: Dec. 24, 2018	 Date: Dec. 24, 2018

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS 5

1.1 MEASUREMENT UNCERTAINTY 5

2 GENERAL INFORMATION..... 6

2.1 GENERAL DESCRIPTION OF EUT 6

2.2 DESCRIPTION OF TEST MODES 8

 2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 10

2.3 DUTY CYCLE OF TEST SIGNAL 13

2.4 DESCRIPTION OF SUPPORT UNITS 14

 2.4.1 CONFIGURATION OF SYSTEM UNDER TEST 14

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS 15

3 TEST TYPES AND RESULTS..... 16

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT..... 16

 3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT..... 16

 3.1.2 LIMITS OF UNWANTED EMISSION..... 17

 3.1.3 TEST INSTRUMENTS..... 18

 3.1.4 TEST PROCEDURES 19

 3.1.5 DEVIATION FROM TEST STANDARD 19

 3.1.6 TEST SETUP..... 20

 3.1.7 EUT OPERATING CONDITION 21

 3.1.8 TEST RESULTS 22

3.2 CONDUCTED EMISSION MEASUREMENT 70

 3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 70

 3.2.2 TEST INSTRUMENTS..... 70

 3.2.3 TEST PROCEDURES 70

 3.2.4 DEVIATION FROM TEST STANDARD 71

 3.2.5 TEST SETUP..... 71

 3.2.6 EUT OPERATING CONDITIONS..... 71

 3.2.7 TEST RESULTS 72

3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT 74

 3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT 74

 3.3.2 TEST SETUP..... 75

 3.3.3 TEST INSTRUMENTS..... 75



3.3.4	TEST PROCEDURE	76
3.3.5	DEVIATION FROM TEST STANDARD	78
3.3.6	EUT OPERATING CONDITIONS	78
3.3.7	TEST RESULTS	79
3.4	MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT.....	92
3.4.1	LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT	92
3.4.2	TEST SETUP	92
3.4.3	TEST INSTRUMENTS.....	92
3.4.4	TEST PROCEDURES	93
3.4.5	DEVIATION FROM TEST STANDARD	93
3.4.6	EUT OPERATING CONDITIONS	93
3.4.7	TEST RESULTS	94
3.5	FREQUENCY STABILITY	101
3.5.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	101
3.5.2	TEST SETUP.....	101
3.5.3	TEST INSTRUMENTS.....	101
3.5.4	TEST PROCEDURE	102
3.5.5	DEVIATION FROM TEST STANDARD	102
3.5.6	EUT OPERATING CONDITION	102
3.5.7	TEST RESULTS	103
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	105
5	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	106



BUREAU
VERITAS

Test Report No.: RF181120W004-3

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF181120W004-3	Original release	Dec. 24, 2018



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.71dB at 0.568000MHz.
15.407(b) (1/2/3/4/6)	Radiated Emission & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -2.4dB at 5150MHz.
15.407(a/1/2/3)	Maximum conducted output Power	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
All Radiated emissions	±4.48dB
Conducted emissions	±2 dB
Occupied Channel Bandwidth	±21.7KHz
Conducted Output power	±1.03 dB
Power Spectral Density	±0.95 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	402551 module
MODEL NO.	MP32-ARGON
POWER SUPPLY	12Vdc (adapter or host equipment)
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to MCS7 802.11ac: up to 390.0Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5700MHz, 5745 ~ 5805MHz
NUMBER OF CHANNEL	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5260 ~ 5320MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5500 ~ 5700MHz: 8 for 802.11a, 802.11n (20MHz) 3 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5745 ~ 5805MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz)
AVERAGE POWER	22.23mW for 5180 ~ 5240MHz 22.44mW for 5260 ~ 5320MHz 22.39mW for 5500 ~ 5700MHz 22.39mW for 5745 ~ 5805MHz
ANTENNA TYPE	PIFA Antenna
ANTENNA GAIN	2.8dBi for 5180 ~ 5240MHz 2.8dBi for 5260 ~ 5320MHz 4.2dBi for 5500 ~ 5700MHz 4.2dBi for 5745 ~ 5805MHz
HW VERSION	A299C
SW VERSION	Model AOSP on avn_ref
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11a	1TX/1RX
802.11n (20MHz)	1TX/1RX
802.11n (40MHz)	1TX/1RX
802.11ac (80MHz)	1TX/1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



2.2 DESCRIPTION OF TEST MODES

FOR 5150 ~ 5250MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
42	5210 MHz		

FOR 5250 ~ 5350MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
58	5290 MHz		



FOR 5470 ~ 5725MHz

8 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	116	5580 MHz
104	5520 MHz	132	5660 MHz
108	5540 MHz	136	5680 MHz
112	5560 MHz	140	5700 MHz

3 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	134	5670 MHz
110	5550 MHz		

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
106	5530 MHz		

FOR 5725 ~ 5805MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz		
157	5785 MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
155	5775 MHz		



2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	-	Powered by Adapter with wifi(5G) link
B	-	-	-	√	Powered by Battery with wifi(5G) link
C	-	-	-	-	Powered by USB with wifi(5G) link

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:
The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
NOTE: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		58	58	OFDM	BPSK	V0
A	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
A	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		106	106	OFDM	BPSK	V0
A	802.11a	5725-5825	149 to 161	149, 157, 161	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 161	149, 157, 161	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		155	155	OFDM	BPSK	V0



RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11ac (80MHz)	5180-5240	42	42	OFDM	BPSK	V0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11ac (80MHz)	5180-5240	42	42	OFDM	BPSK	V0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
A	802.11a	5260-5320	52 to 64	52, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 64	OFDM	BPSK	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		58	58	OFDM	BPSK	V0
A	802.11a	5500-5700	100 to 140	100, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 140	OFDM	BPSK	MCS0
A	802.11n (40MHz)		102 to 134	102, 134	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		106	106	OFDM	BPSK	V0
A	802.11a	5725-5825	149 to 161	149, 161	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 161	149, 161	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		155	155	OFDM	BPSK	V0



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
B	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
B	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
B	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
B	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
B	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		58	58	OFDM	BPSK	V0
B	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
B	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
B	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		106	106	OFDM	BPSK	V0
B	802.11a	5725-5825	149 to 161	149, 161	OFDM	BPSK	6.0
B	802.11n (20MHz)		149 to 161	149, 161	OFDM	BPSK	MCS0
B	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		155	155	OFDM	BPSK	V0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	23deg. C, 62%RH	DC 12V	Rose Ma
RE≥1G	23deg. C, 62%RH	DC 12V	Rose Ma
PLC	24deg. C, 61%RH	DC 12V	John Wen
APCM	23.5deg. C, 60%RH	DC 12V	Bert Ma



2.3 DUTY CYCLE OF TEST SIGNAL


Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11a: Duty cycle = 1.425/1.530 = 0.931, Duty factor = 10 * log(1/0.931) = 0.31

802.11n (20MHz): Duty cycle = 1.917/2.028 = 0.945, Duty factor = 10 * log(1/0.945) = 0.24

802.11n (40MHz): Duty cycle = 0.941/1.054 = 0.893, Duty factor = 10 * log(1/0.893) = 0.50

802.11ac (80MHz): Duty cycle = 0.333/0.433 = 0.769, Duty factor = 10 * log(1/0.769) = 1.14

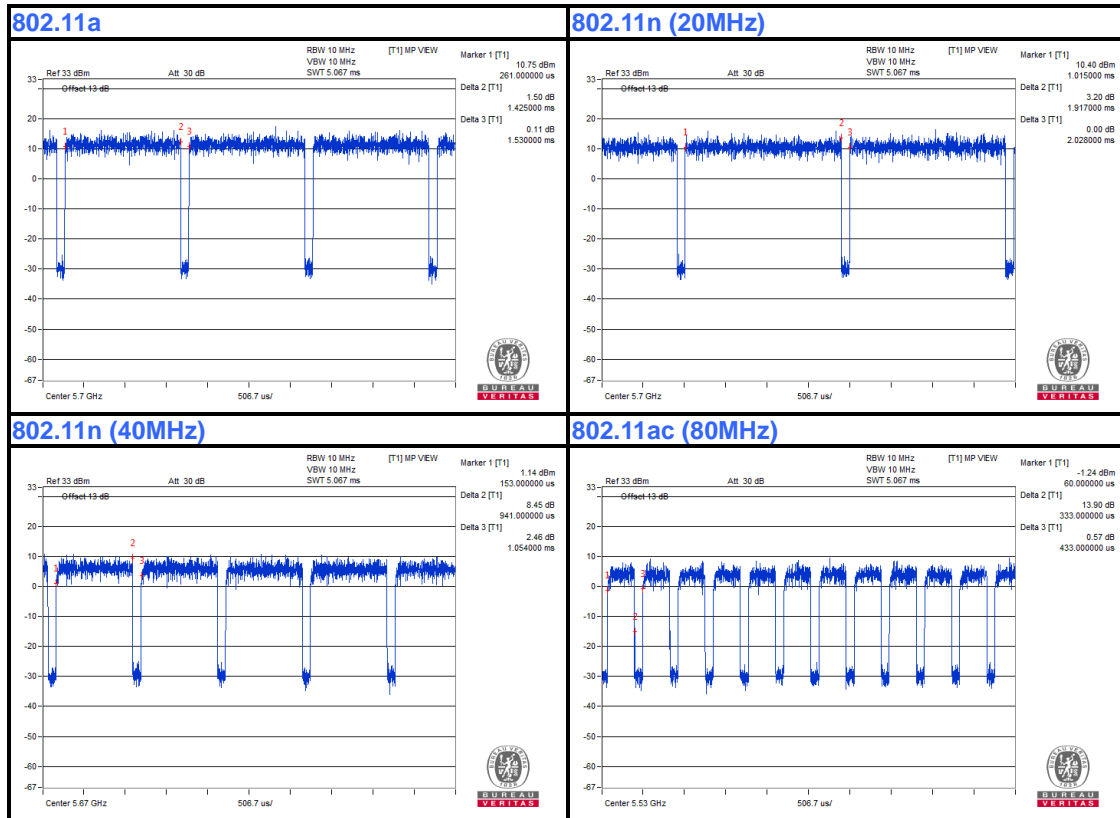




2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A
3	Adapter	malata	MPA-12030	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m
3	N/A

2.4.1 CONFIGURATION OF SYSTEM UNDER TEST

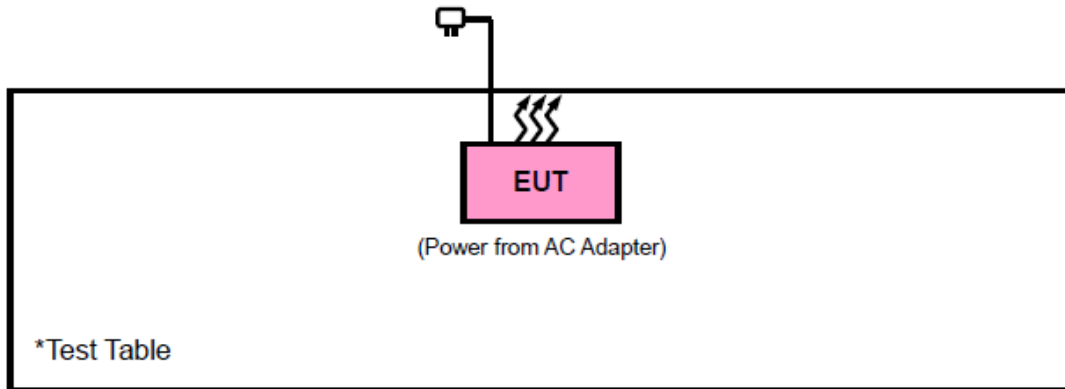



2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.



3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.1.2 LIMITS OF UNWANTED EMISSION

RESTRICTED BANDS	APPLICABLE TO	LIMIT	
	789033 D02 General UNII Test Procedures New Rules v01r04	FIELD STRENGTH AT 3m (dBµV/m)	
	PK : 74	AV : 54	
OUT OF THE RESTRICTED BANDS	APPLICABLE TO	EIRP LIMIT (dBm/MHz)	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m)
	15.407(b)(1)	PK : -27	PK : 68.3
	15.407(b)(2)		
	15.407(b)(3)		
	15.407(b)(4)	See note 2 (FCC 16-24)	

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

2. All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Apr. 21,18	Apr. 20,19
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 15,18	Mar. 14,19
Horn Antenna	ETS-LINDGREN	3117	00168728	Mar. 15,18	Mar. 14,19
Loop antenna	Daze	ZN30900A	0708	Oct. 23,18	Oct. 22, 19
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Nov. 21, 18	Nov. 20, 19
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 09,18	Jul. 08,19
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 16,18	Mar. 15,19
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


3.1.5 DEVIATION FROM TEST STANDARD

No deviation.




3.1.6 TEST SETUP

< Frequency Range below 30MHz >

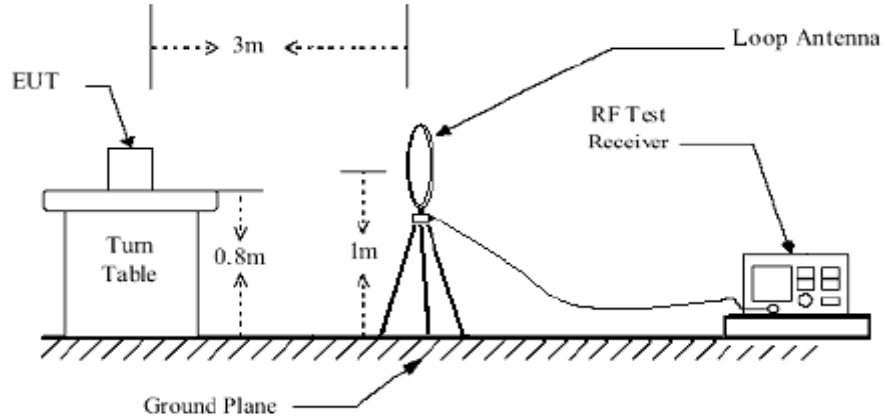


< Frequency Range 30MHz~1GHz >

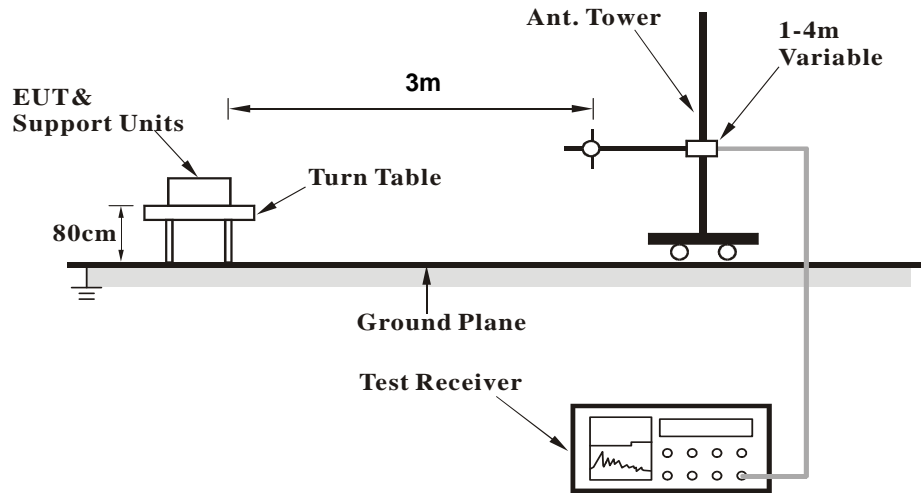



<Frequency Range above 1GHz>

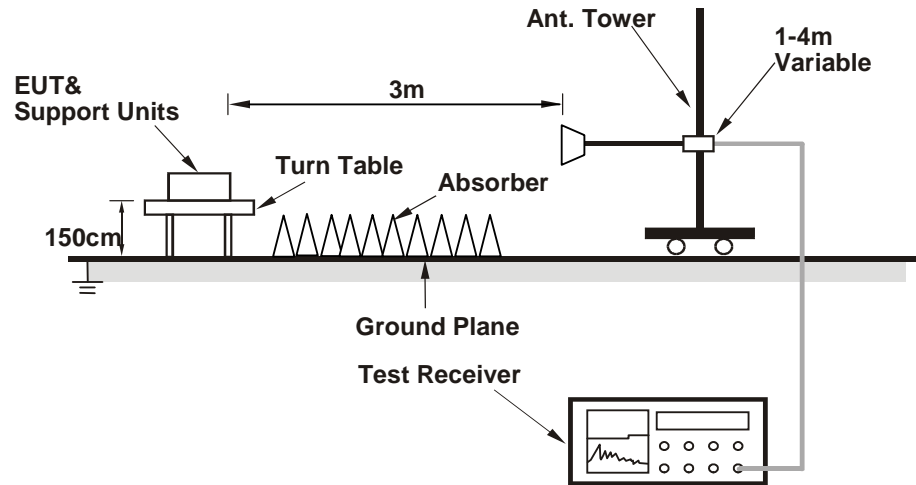

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



3.1.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

9 KHz – 30 MHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:


802.11ac (80MHz)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
50.45	20.97	50.78	40	-19.03	6.5	1.07	37.38	100	148	QP
108.67	23.55	51.22	43.5	-19.95	7.7	1.6	36.97	100	89	QP
178.19	26.5	51.21	43.5	-17	9.93	2.05	36.69	100	98	QP
212.33	26.91	50.54	43.5	-16.59	10.67	2.24	36.54	100	200	QP
335.79	29.91	49.12	46	-16.09	14.5	2.87	36.58	200	145	QP
484.77	34.75	50.04	46	-11.25	18.22	3.41	36.92	100	300	QP

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

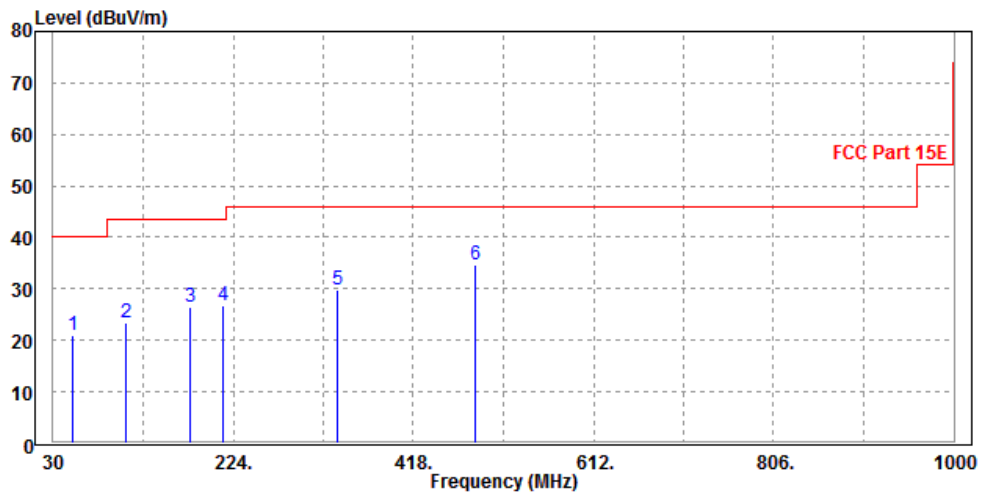




CHANNEL	Channel 42	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
42.13	24.11	51.19	40	-15.89	9.41	0.97	37.46	108	180	QP
132.54	22.83	50.24	43.5	-20.67	7.7	1.77	36.88	110	200	QP
180.74	25.63	50.34	43.5	-17.87	9.91	2.06	36.68	100	180	QP
300.42	29.47	50.23	46	-16.53	13.02	2.72	36.5	100	210	QP
412.95	34.54	50.74	46	-11.46	17.36	3.19	36.75	112	180	QP
480.12	31.19	46.54	46	-14.81	18.16	3.4	36.91	112	178	QP

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

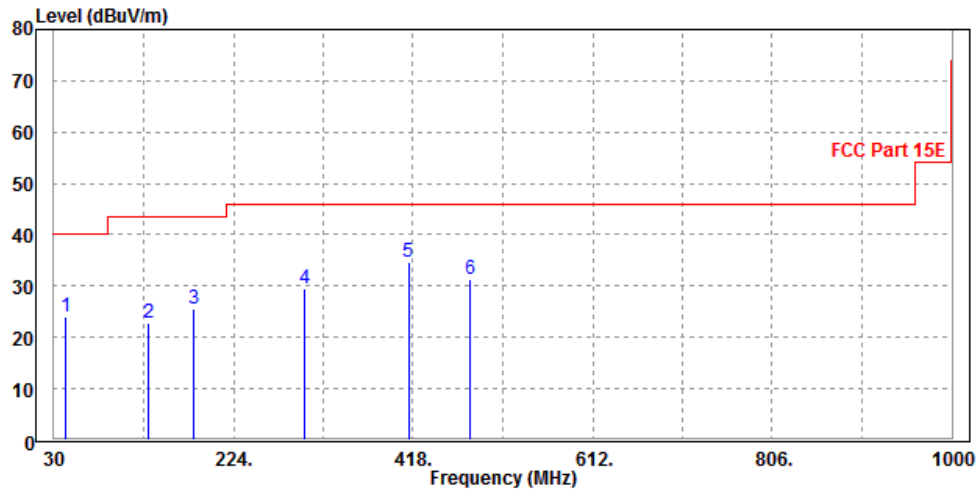



ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

Band 1
802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.34	51.01	54	-4.66	37.26	7.42	46.35	142	100	Average
5150	58.94	60.61	74	-15.06	37.26	7.42	46.35	142	100	Peak
5180	95.43	97.08			37.27	7.43	46.35	142	100	Average
5180	103.88	105.53			37.27	7.43	46.35	142	100	Peak
5350	47.48	48.97	54	-6.52	37.34	7.47	46.3	142	100	Average
5350	57.65	59.14	74	-16.35	37.34	7.47	46.3	142	100	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.24	50.91	54	-4.76	37.26	7.42	46.35	100	93	Average
5150	58.37	60.04	74	-15.63	37.26	7.42	46.35	100	93	Peak
5180	92.24	93.89			37.27	7.43	46.35	100	93	Average
5180	100.77	102.42			37.27	7.43	46.35	100	93	Peak
5350	47.63	49.12	54	-6.37	37.34	7.47	46.3	100	93	Average
5350	57.17	58.66	74	-16.83	37.34	7.47	46.3	100	93	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.



CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.86	49.53	54	-6.14	37.26	7.42	46.35	100	143	Average
5150	58.66	60.33	74	-15.34	37.26	7.42	46.35	100	143	Peak
5200	100.41	102.04			37.28	7.43	46.34	100	143	Average
5200	104.56	106.19			37.28	7.43	46.34	100	143	Peak
5350	46.27	47.76	54	-7.73	37.34	7.47	46.3	100	143	Average
5350	60.3	61.79	74	-13.7	37.34	7.47	46.3	100	143	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	46.87	48.54	54	-7.13	37.26	7.42	46.35	100	94	Average
5150	59.55	61.22	74	-14.45	37.26	7.42	46.35	100	94	Peak
5200	92.23	93.86			37.28	7.43	46.34	100	94	Average
5200	99.91	101.54			37.28	7.43	46.34	100	94	Peak
5350	46.15	47.64	54	-7.85	37.34	7.47	46.3	100	94	Average
5350	59.4	60.89	74	-14.6	37.34	7.47	46.3	100	94	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.



CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.11	50.78	54	-4.89	37.26	7.42	46.35	100	138	Average
5150	58.8	60.47	74	-15.2	37.26	7.42	46.35	100	138	Peak
5240	92.83	94.42			37.3	7.44	46.33	100	138	Average
5240	102.48	104.07			37.3	7.44	46.33	100	138	Peak
5350	47.78	49.27	54	-6.22	37.34	7.47	46.3	100	138	Average
5350	58.47	59.96	74	-15.53	37.34	7.47	46.3	100	138	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.14	50.81	54	-4.86	37.26	7.42	46.35	100	0	Average
5150	58.34	60.01	74	-15.66	37.26	7.42	46.35	100	0	Peak
5240	90.46	92.05			37.3	7.44	46.33	100	0	Average
5240	99.86	101.45			37.3	7.44	46.33	100	0	Peak
5350	47.46	48.95	54	-6.54	37.34	7.47	46.3	100	0	Average
5350	57.06	58.55	74	-16.94	37.34	7.47	46.3	100	0	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.69	51.36	54	-4.31	37.26	7.42	46.35	100	150	Average
5150	59.5	61.17	74	-14.5	37.26	7.42	46.35	100	150	Peak
5180	94	95.65			37.27	7.43	46.35	100	150	Average
5180	103.64	105.29			37.27	7.43	46.35	100	150	Peak
5350	47.87	49.36	54	-6.13	37.34	7.47	46.3	100	150	Average
5350	57.55	59.04	74	-16.45	37.34	7.47	46.3	100	150	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.22	50.89	54	-4.78	37.26	7.42	46.35	100	96	Average
5150	58.42	60.09	74	-15.58	37.26	7.42	46.35	100	96	Peak
5180	92.21	93.86			37.27	7.43	46.35	100	96	Average
5180	100.95	102.6			37.27	7.43	46.35	100	96	Peak
5350	47.47	48.96	54	-6.53	37.34	7.47	46.3	100	96	Average
5350	57.78	59.27	74	-16.22	37.34	7.47	46.3	100	96	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.



CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.67	50.34	54	-5.33	37.26	7.42	46.35	100	96	Average
5150	58.67	60.34	74	-15.33	37.26	7.42	46.35	100	96	Peak
5200	101.95	103.58			37.28	7.43	46.34	100	96	Average
5200	104.7	106.33			37.28	7.43	46.34	100	96	Peak
5350	47.87	49.36	54	-6.13	37.34	7.47	46.3	100	96	Average
5350	57.62	59.11	74	-16.38	37.34	7.47	46.3	100	96	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.11	49.78	54	-5.89	37.26	7.42	46.35	100	136	Average
5150	57.74	59.41	74	-16.26	37.26	7.42	46.35	100	136	Peak
5200	94.11	95.74			37.28	7.43	46.34	100	136	Average
5200	101.42	103.05			37.28	7.43	46.34	100	136	Peak
5350	47.57	49.06	54	-6.43	37.34	7.47	46.3	100	136	Average
5350	58.62	60.11	74	-15.38	37.34	7.47	46.3	100	136	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.



CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.09	50.76	54	-4.91	37.26	7.42	46.35	100	155	Average
5150	58.76	60.43	74	-15.24	37.26	7.42	46.35	100	155	Peak
5240	91.59	93.18			37.3	7.44	46.33	100	155	Average
5240	100.49	102.08			37.3	7.44	46.33	100	155	Peak
5350	47.82	49.31	54	-6.18	37.34	7.47	46.3	100	155	Average
5350	58.4	59.89	74	-15.6	37.34	7.47	46.3	100	155	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.22	50.89	54	-4.78	37.26	7.42	46.35	100	97	Average
5150	59.2	60.87	74	-14.8	37.26	7.42	46.35	100	97	Peak
5240	90.89	92.48			37.3	7.44	46.33	100	97	Average
5240	99.75	101.34			37.3	7.44	46.33	100	97	Peak
5350	47.94	49.43	54	-6.06	37.34	7.47	46.3	100	97	Average
5350	58.22	59.71	74	-15.78	37.34	7.47	46.3	100	97	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5240MHz: Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.01	51.68	54	-3.99	37.26	7.42	46.35	100	160	Average
5150	60.19	61.86	74	-13.81	37.26	7.42	46.35	100	160	Peak
5190	89.22	90.85			37.28	7.43	46.34	100	160	Average
5190	96.33	97.96			37.28	7.43	46.34	100	160	Peak
5350	47.67	49.16	54	-6.33	37.34	7.47	46.3	100	160	Average
5350	57.55	59.04	74	-16.45	37.34	7.47	46.3	100	160	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.48	51.15	54	-4.52	37.26	7.42	46.35	100	86	Average
5150	59.31	60.98	74	-14.69	37.26	7.42	46.35	100	86	Peak
5190	84.67	86.3			37.28	7.43	46.34	100	86	Average
5190	93.21	94.84			37.28	7.43	46.34	100	86	Peak
5350	47.82	49.31	54	-6.18	37.34	7.47	46.3	100	86	Average
5350	56.89	58.38	74	-17.11	37.34	7.47	46.3	100	86	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5190MHz: Fundamental frequency.



CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.28	50.95	54	-4.72	37.26	7.42	46.35	100	153	Average
5150	57.94	59.61	74	-16.06	37.26	7.42	46.35	100	153	Peak
5230	88.18	89.78			37.29	7.44	46.33	100	153	Average
5230	96.01	97.61			37.29	7.44	46.33	100	153	Peak
5350	47.88	49.37	54	-6.12	37.34	7.47	46.3	100	153	Average
5350	57.42	58.91	74	-16.58	37.34	7.47	46.3	100	153	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.14	50.81	54	-4.86	37.26	7.42	46.35	100	87	Average
5150	55.54	57.21	74	-18.46	37.26	7.42	46.35	100	87	Peak
5230	85.38	86.98			37.29	7.44	46.33	100	87	Average
5230	93.63	95.23			37.29	7.44	46.33	100	87	Peak
5350	47.86	49.35	54	-6.14	37.34	7.47	46.3	100	87	Average
5350	57.73	59.22	74	-16.27	37.34	7.47	46.3	100	87	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5230MHz: Fundamental frequency.



802.11ac (80MHz)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.6	53.27	54	-2.4	37.26	7.42	46.35	100	158	Average
5150	62.07	63.74	74	-11.93	37.26	7.42	46.35	100	158	Peak
5210	85.95	87.57			37.28	7.44	46.34	100	158	Average
5210	95.32	96.94			37.28	7.44	46.34	100	158	Peak
5350	48	49.49	54	-6	37.34	7.47	46.3	100	158	Average
5350	58.26	59.75	74	-15.74	37.34	7.47	46.3	100	158	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.56	51.23	54	-4.44	37.26	7.42	46.35	100	0	Average
5150	58.87	60.54	74	-15.13	37.26	7.42	46.35	100	0	Peak
5210	80.59	82.21			37.28	7.44	46.34	100	0	Average
5210	91.32	92.94			37.28	7.44	46.34	100	0	Peak
5350	48	49.49	54	-6	37.34	7.47	46.3	100	0	Average
5350	57.29	58.78	74	-16.71	37.34	7.47	46.3	100	0	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5210MHz: Fundamental frequency.



Band 2
802.11a

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.19	50.86	54	-4.81	37.26	7.42	46.35	133	155	Average
5150	59.44	61.11	74	-14.56	37.26	7.42	46.35	133	155	Peak
5260	93.44	95.01			37.3	7.45	46.32	133	155	Average
5260	102.39	103.96			37.3	7.45	46.32	133	155	Peak
5350	47.94	49.43	54	-6.06	37.34	7.47	46.3	133	155	Average
5350	57.96	59.45	74	-16.04	37.34	7.47	46.3	133	155	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.94	50.61	54	-5.06	37.26	7.42	46.35	131	113	Average
5150	58.74	60.41	74	-15.26	37.26	7.42	46.35	131	113	Peak
5260	90.34	91.91			37.3	7.45	46.32	131	113	Average
5260	99.86	101.43			37.3	7.45	46.32	131	113	Peak
5350	47.69	49.18	54	-6.31	37.34	7.47	46.3	131	113	Average
5350	57.3	58.79	74	-16.7	37.34	7.47	46.3	131	113	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.



CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.99	50.66	54	-5.01	37.26	7.42	46.35	100	135	Average
5150	58.8	60.47	74	-15.2	37.26	7.42	46.35	100	135	Peak
5300	100.43	101.96			37.32	7.46	46.31	100	135	Average
5300	102.59	104.12			37.32	7.46	46.31	100	135	Peak
5350	47.69	49.18	54	-6.31	37.34	7.47	46.3	100	135	Average
5350	58.95	60.44	74	-15.05	37.34	7.47	46.3	100	135	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.45	50.12	54	-5.55	37.26	7.42	46.35	100	98	Average
5150	58.77	60.44	74	-15.23	37.26	7.42	46.35	100	98	Peak
5300	87.59	89.12			37.32	7.46	46.31	100	98	Average
5300	94.09	95.62			37.32	7.46	46.31	100	98	Peak
5350	48.15	49.64	54	-5.85	37.34	7.47	46.3	100	98	Average
5350	58.92	60.41	74	-15.08	37.34	7.47	46.3	100	98	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5300MHz: Fundamental frequency.



CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.17	50.84	54	-4.83	37.26	7.42	46.35	100	195	Average
5150	58.74	60.41	74	-15.26	37.26	7.42	46.35	100	195	Peak
5320	91.02	92.53			37.33	7.46	46.3	100	195	Average
5320	100.74	102.25			37.33	7.46	46.3	100	195	Peak
5350	48.27	49.76	54	-5.73	37.34	7.47	46.3	100	195	Average
5350	58.04	59.53	74	-15.96	37.34	7.47	46.3	100	195	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.19	50.86	54	-4.81	37.26	7.42	46.35	100	0	Average
5150	59.09	60.76	74	-14.91	37.26	7.42	46.35	100	0	Peak
5320	87.59	89.1			37.33	7.46	46.3	100	0	Average
5320	97.69	99.2			37.33	7.46	46.3	100	0	Peak
5350	48.09	49.58	54	-5.91	37.34	7.47	46.3	100	0	Average
5350	58.38	59.87	74	-15.62	37.34	7.47	46.3	100	0	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5320MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.14	50.81	54	-4.86	37.26	7.42	46.35	100	89	Average
5150	58.55	60.22	74	-15.45	37.26	7.42	46.35	100	89	Peak
5260	89.45	91.02			37.3	7.45	46.32	100	89	Average
5260	99.35	100.92			37.3	7.45	46.32	100	89	Peak
5350	47.92	49.41	54	-6.08	37.34	7.47	46.3	100	89	Average
5350	58.13	59.62	74	-15.87	37.34	7.47	46.3	100	89	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.29	50.96	54	-4.71	37.26	7.42	46.35	100	85	Average
5150	58.8	60.47	74	-15.2	37.26	7.42	46.35	100	85	Peak
5260	89.29	90.86			37.3	7.45	46.32	100	85	Average
5260	99.16	100.73			37.3	7.45	46.32	100	85	Peak
5350	48.05	49.54	54	-5.95	37.34	7.47	46.3	100	85	Average
5350	58.12	59.61	74	-15.88	37.34	7.47	46.3	100	85	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5260MHz: Fundamental frequency.



CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.18	50.85	54	-4.82	37.26	7.42	46.35	100	159	Average
5150	60.01	61.68	74	-13.99	37.26	7.42	46.35	100	159	Peak
5300	90.98	92.51			37.32	7.46	46.31	100	159	Average
5300	99.88	101.41			37.32	7.46	46.31	100	159	Peak
5350	48.06	49.55	54	-5.94	37.34	7.47	46.3	100	159	Average
5350	57.22	58.71	74	-16.78	37.34	7.47	46.3	100	159	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.16	50.83	54	-4.84	37.26	7.42	46.35	100	107	Average
5150	58.85	60.52	74	-15.15	37.26	7.42	46.35	100	107	Peak
5300	88.95	90.48			37.32	7.46	46.31	100	107	Average
5300	99.21	100.74			37.32	7.46	46.31	100	107	Peak
5350	47.95	49.44	54	-6.05	37.34	7.47	46.3	100	107	Average
5350	58.43	59.92	74	-15.57	37.34	7.47	46.3	100	107	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5300MHz: Fundamental frequency.



CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.24	50.91	54	-4.76	37.26	7.42	46.35	100	159	Average
5150	58.56	60.23	74	-15.44	37.26	7.42	46.35	100	159	Peak
5320	91.01	92.52			37.33	7.46	46.3	100	159	Average
5320	100.23	101.74			37.33	7.46	46.3	100	159	Peak
5350	48.6	50.09	54	-5.4	37.34	7.47	46.3	100	159	Average
5350	60.22	61.71	74	-13.78	37.34	7.47	46.3	100	159	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.25	50.92	54	-4.75	37.26	7.42	46.35	100	107	Average
5150	58.41	60.08	74	-15.59	37.26	7.42	46.35	100	107	Peak
5320	89.42	90.93			37.33	7.46	46.3	100	107	Average
5320	98.02	99.53			37.33	7.46	46.3	100	107	Peak
5350	48.77	50.26	54	-5.23	37.34	7.47	46.3	100	107	Average
5350	55.96	57.45	74	-18.04	37.34	7.47	46.3	100	107	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5320MHz: Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.16	50.83	54	-4.84	37.26	7.42	46.35	100	152	Average
5150	59.51	61.18	74	-14.49	37.26	7.42	46.35	100	152	Peak
5270	86.22	87.78			37.31	7.45	46.32	100	152	Average
5270	94.51	96.07			37.31	7.45	46.32	100	152	Peak
5350	47.99	49.48	54	-6.01	37.34	7.47	46.3	100	152	Average
5350	57.97	59.46	74	-16.03	37.34	7.47	46.3	100	152	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.05	50.72	54	-4.95	37.26	7.42	46.35	100	0	Average
5150	58.31	59.98	74	-15.69	37.26	7.42	46.35	100	0	Peak
5270	84.25	85.81			37.31	7.45	46.32	100	0	Average
5270	91.83	93.39			37.31	7.45	46.32	100	0	Peak
5350	47.84	49.33	54	-6.16	37.34	7.47	46.3	100	0	Average
5350	57.98	59.47	74	-16.02	37.34	7.47	46.3	100	0	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5270MHz: Fundamental frequency.



CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.05	50.72	54	-4.95	37.26	7.42	46.35	100	153	Average
5150	58.81	60.48	74	-15.19	37.26	7.42	46.35	100	153	Peak
5310	85.05	86.58			37.32	7.46	46.31	100	153	Average
5310	92.65	94.18			37.32	7.46	46.31	100	153	Peak
5350	48.13	49.62	54	-5.87	37.34	7.47	46.3	100	153	Average
5350	57.96	59.45	74	-16.04	37.34	7.47	46.3	100	153	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.11	50.78	54	-4.89	37.26	7.42	46.35	100	107	Average
5150	59.22	60.89	74	-14.78	37.26	7.42	46.35	100	107	Peak
5310	83.35	84.88			37.32	7.46	46.31	100	107	Average
5310	90.34	91.87			37.32	7.46	46.31	100	107	Peak
5350	47.94	49.43	54	-6.06	37.34	7.47	46.3	100	107	Average
5350	57.09	58.58	74	-16.91	37.34	7.47	46.3	100	107	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5310MHz: Fundamental frequency.



802.11ac (80MHz)

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.3	50.97	54	-4.7	37.26	7.42	46.35	100	153	Average
5150	59.96	61.63	74	-14.04	37.26	7.42	46.35	100	153	Peak
5290	85.09	86.63			37.32	7.45	46.31	100	153	Average
5290	93.87	95.41			37.32	7.45	46.31	100	153	Peak
5350	48.33	49.82	54	-5.67	37.34	7.47	46.3	100	153	Average
5350	57.62	59.11	74	-16.38	37.34	7.47	46.3	100	153	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.08	50.75	54	-4.92	37.26	7.42	46.35	100	96	Average
5150	58.37	60.04	74	-15.63	37.26	7.42	46.35	100	96	Peak
5290	81.47	83.01			37.32	7.45	46.31	100	96	Average
5290	93.57	95.11			37.32	7.45	46.31	100	96	Peak
5350	48.02	49.51	54	-5.98	37.34	7.47	46.3	100	96	Average
5350	58.52	60.01	74	-15.48	37.34	7.47	46.3	100	96	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5290MHz: Fundamental frequency.



Band 3

802.11a

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.94	49.33	54	-6.06	37.38	7.49	46.26	100	151	Average
5460	57.85	59.24	74	-16.15	37.38	7.49	46.26	100	151	Peak
#5470	57.95	59.33	68.3	-10.35	37.39	7.49	46.26	100	151	Peak
5500	91.66	93.01			37.4	7.5	46.25	100	151	Average
5500	100.27	101.62			37.4	7.5	46.25	100	151	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	48	49.39	54	-6	37.38	7.49	46.26	100	107	Average
5460	57.02	58.41	74	-16.98	37.38	7.49	46.26	100	107	Peak
#5470	57.86	59.24	68.3	-10.44	37.39	7.49	46.26	100	107	Peak
5500	92.29	93.64			37.4	7.5	46.25	100	107	Average
5500	101.14	102.49			37.4	7.5	46.25	100	107	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5500MHz: Fundamental frequency.
- #: Out of restricted band.



CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.93	49.32	54	-6.07	37.38	7.49	46.26	100	86	Average
5460	56.76	58.15	74	-17.24	37.38	7.49	46.26	100	86	Peak
#5470	57.73	59.11	68.3	-10.57	37.39	7.49	46.26	100	86	Peak
5580	90.38	91.58			37.45	7.58	46.23	100	86	Average
5580	101.16	102.36			37.45	7.58	46.23	100	86	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	48.82	50.21	54	-5.18	37.38	7.49	46.26	100	75	Average
5460	56.95	58.34	74	-17.05	37.38	7.49	46.26	100	75	Peak
#5470	58.19	59.57	68.3	-10.11	37.39	7.49	46.26	100	75	Peak
5580	89.44	90.64			37.45	7.58	46.23	100	75	Average
5580	99.36	100.56			37.45	7.58	46.23	100	75	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	91.51	92.48			37.52	7.7	46.19	102	92	Average
5700	102.68	103.65			37.52	7.7	46.19	102	92	Peak
#5725	61.67	62.6	68.3	-6.63	37.53	7.73	46.19	102	92	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	89.45	90.42			37.52	7.7	46.19	101	71	Average
5700	100.81	101.78			37.52	7.7	46.19	101	71	Peak
#5725	60.33	61.26	68.3	-7.97	37.53	7.73	46.19	101	71	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5700MHz: Fundamental frequency.
- #: Out of restricted band.



802.11n (20MHz)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.69	49.08	54	-6.31	37.38	7.49	46.26	100	148	Average
5460	58.03	59.42	74	-15.97	37.38	7.49	46.26	100	148	Peak
#5470	58.15	59.53	68.3	-10.15	37.39	7.49	46.26	100	148	Peak
5500	91.16	92.51			37.4	7.5	46.25	100	148	Average
5500	99.43	100.78			37.4	7.5	46.25	100	148	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.93	49.32	54	-6.07	37.38	7.49	46.26	100	107	Average
5460	56.64	58.03	74	-17.36	37.38	7.49	46.26	100	107	Peak
#5470	57.05	58.43	68.3	-11.25	37.39	7.49	46.26	100	107	Peak
5500	91.16	92.51			37.4	7.5	46.25	100	107	Average
5500	100.34	101.69			37.4	7.5	46.25	100	107	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.74	49.13	54	-6.26	37.38	7.49	46.26	100	148	Average
5460	57.04	58.43	74	-16.96	37.38	7.49	46.26	100	148	Peak
#5470	57.04	58.42	68.3	-11.26	37.39	7.49	46.26	100	148	Peak
5580	91.21	92.41			37.45	7.58	46.23	100	148	Average
5580	99.96	101.16			37.45	7.58	46.23	100	148	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.67	49.06	54	-6.33	37.38	7.49	46.26	100	107	Average
5460	56.79	58.18	74	-17.21	37.38	7.49	46.26	100	107	Peak
#5470	57.54	58.92	68.3	-10.76	37.39	7.49	46.26	100	107	Peak
5580	91.97	93.17			37.45	7.58	46.23	100	107	Average
5580	99.92	101.12			37.45	7.58	46.23	100	107	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5580MHz: Fundamental frequency.



CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	88.8	89.77			37.52	7.7	46.19	100	130	Average
5700	99.35	100.32			37.52	7.7	46.19	100	130	Peak
#5725	58.86	59.79	68.3	-9.44	37.53	7.73	46.19	100	130	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	93.92	94.89			37.52	7.7	46.19	100	107	Average
5700	103.26	104.23			37.52	7.7	46.19	100	107	Peak
#5725	59.55	60.48	68.3	-8.75	37.53	7.73	46.19	100	107	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5700MHz: Fundamental frequency.
- #: Out of restricted band.



802.11n (40MHz)

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.72	49.11	54	-6.28	37.38	7.49	46.26	100	149	Average
5460	58.76	60.15	74	-15.24	37.38	7.49	46.26	100	149	Peak
#5470	57.39	58.77	68.3	-10.91	37.39	7.49	46.26	100	149	Peak
5510	85.81	87.14			37.41	7.51	46.25	100	149	Average
5510	92.85	94.18			37.41	7.51	46.25	100	149	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.78	49.17	54	-6.22	37.38	7.49	46.26	100	105	Average
5460	56.72	58.11	74	-17.28	37.38	7.49	46.26	100	105	Peak
#5470	57.18	58.56	68.3	-11.12	37.39	7.49	46.26	100	105	Peak
5510	86.34	87.67			37.41	7.51	46.25	100	105	Average
5510	92.61	93.94			37.41	7.51	46.25	100	105	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5510MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.67	49.06	54	-6.33	37.38	7.49	46.26	100	146	Average
5460	56.98	58.37	74	-17.02	37.38	7.49	46.26	100	146	Peak
#5470	56.93	58.31	68.3	-11.37	37.39	7.49	46.26	100	146	Peak
5550	85.42	86.68			37.43	7.55	46.24	100	146	Average
5550	92.56	93.82			37.43	7.55	46.24	100	146	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.58	48.97	54	-6.42	37.38	7.49	46.26	100	100	Average
5460	56.4	57.79	74	-17.6	37.38	7.49	46.26	100	100	Peak
#5470	56.55	57.93	68.3	-11.75	37.39	7.49	46.26	100	100	Peak
5550	86.46	87.72			37.43	7.55	46.24	100	100	Average
5550	92.36	93.62			37.43	7.55	46.24	100	100	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5550MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	84.55	85.58			37.5	7.67	46.2	100	218	Average
5670	92.22	93.25			37.5	7.67	46.2	100	218	Peak
#5725	58.77	59.7	68.3	-9.53	37.53	7.73	46.19	100	218	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	88.01	89.04			37.5	7.67	46.2	100	101	Average
5670	94.32	95.35			37.5	7.67	46.2	100	101	Peak
#5725	58.99	59.92	68.3	-9.31	37.53	7.73	46.19	100	101	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5670MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11ac (80MHz)

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	48.83	50.22	54	-5.17	37.38	7.49	46.26	100	204	Average
5460	58.06	59.45	74	-15.94	37.38	7.49	46.26	100	204	Peak
#5470	58.69	60.07	68.3	-9.61	37.39	7.49	46.26	100	204	Peak
5530	84.22	85.51			37.42	7.53	46.24	100	204	Average
5530	93.53	94.82			37.42	7.53	46.24	100	204	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	48.96	50.35	54	-5.04	37.38	7.49	46.26	100	101	Average
5460	59.43	60.82	74	-14.57	37.38	7.49	46.26	100	101	Peak
#5470	58.09	59.47	68.3	-10.21	37.39	7.49	46.26	100	101	Peak
5530	86.35	87.64			37.42	7.53	46.24	100	101	Average
5530	94.4	95.69			37.42	7.53	46.24	100	101	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5530MHz: Fundamental frequency.
3. #: Out of restricted band.



Band 4

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	93.36	94.24			37.55	7.75	46.18	100	128	Average
5745	101.54	102.42			37.55	7.75	46.18	100	128	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	94.53	95.41			37.55	7.75	46.18	100	93	Average
5745	104.11	104.99			37.55	7.75	46.18	100	93	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.



OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5635.03	59.69	60.78	68.3	-8.61	37.48	7.64	46.21	201	360	Peak
5949	59.58	60.07	68.3	-8.72	37.67	7.96	46.12	201	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5635.5	59.65	60.74	68.3	-8.65	37.48	7.64	46.21	100	360	Peak
5938.08	59.56	60.08	68.3	-8.74	37.66	7.95	46.13	100	360	Peak

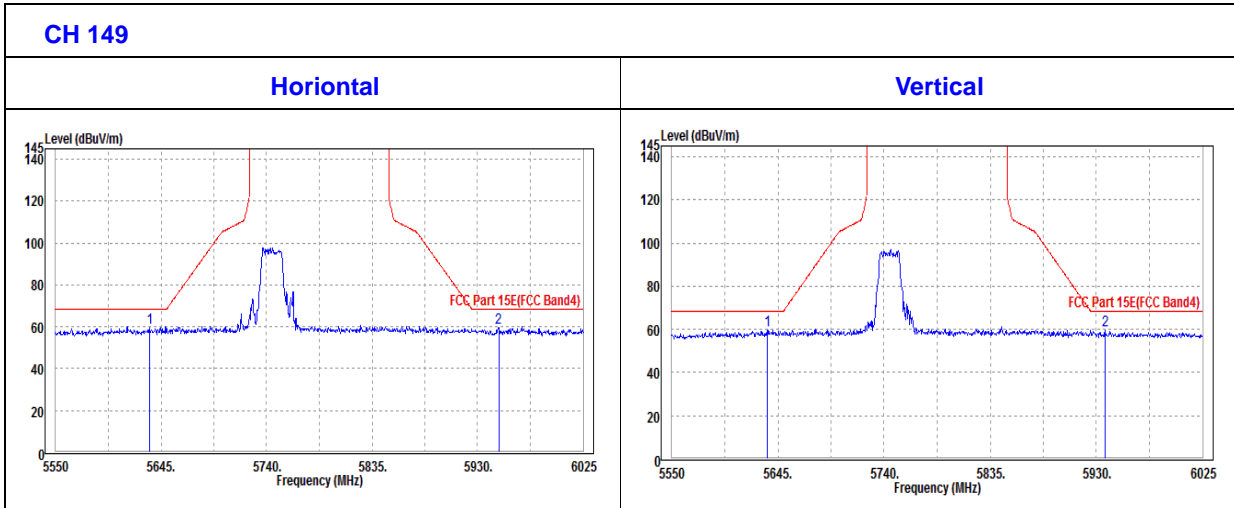



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	92.97	93.78			37.57	7.79	46.17	100	204	Average
5785	101.34	102.15			37.57	7.79	46.17	100	204	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	94.93	95.74			37.57	7.79	46.17	100	110	Average
5785	103.63	104.44			37.57	7.79	46.17	100	110	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.



OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5630.63	58.84	59.94	68.3	-9.46	37.48	7.63	46.21	201	0	Peak
5950.78	59.1	59.59	68.3	-9.2	37.67	7.96	46.12	201	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5637.28	58.65	59.74	68.3	-9.65	37.48	7.64	46.21	201	360	Peak
5936.05	58.49	59.02	68.3	-9.81	37.66	7.94	46.13	201	360	Peak

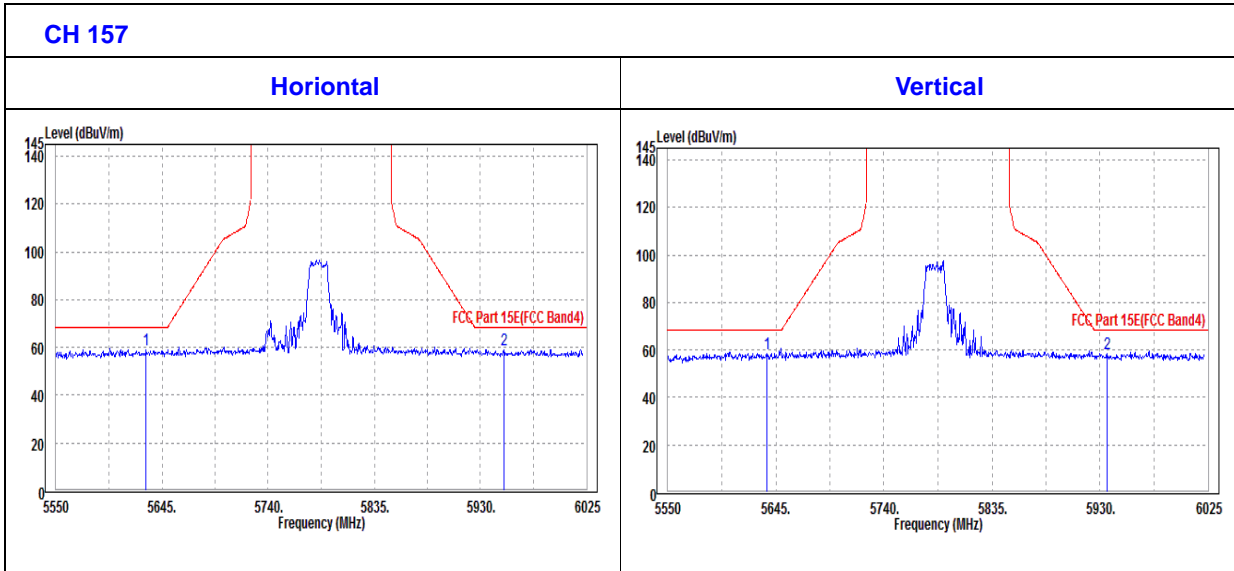



CHANNEL	TX Channel 161	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5805	93.94	94.71			37.58	7.81	46.16	100	103	Average
5805	102.94	103.71			37.58	7.81	46.16	100	103	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5805	93.89	94.66			37.58	7.81	46.16	100	103	Average
5805	103.3	104.07			37.58	7.81	46.16	100	103	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5805MHz: Fundamental frequency.



OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5626.48	49.33	50.43	68.3	-18.97	37.48	7.63	46.21	100	360	Peak
5967.53	48.61	49.07	68.3	-19.69	37.68	7.98	46.12	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5628.85	58.72	59.82	68.3	-9.58	37.48	7.63	46.21	201	0	Peak
5949	59.35	59.84	68.3	-8.95	37.67	7.96	46.12	201	0	Peak

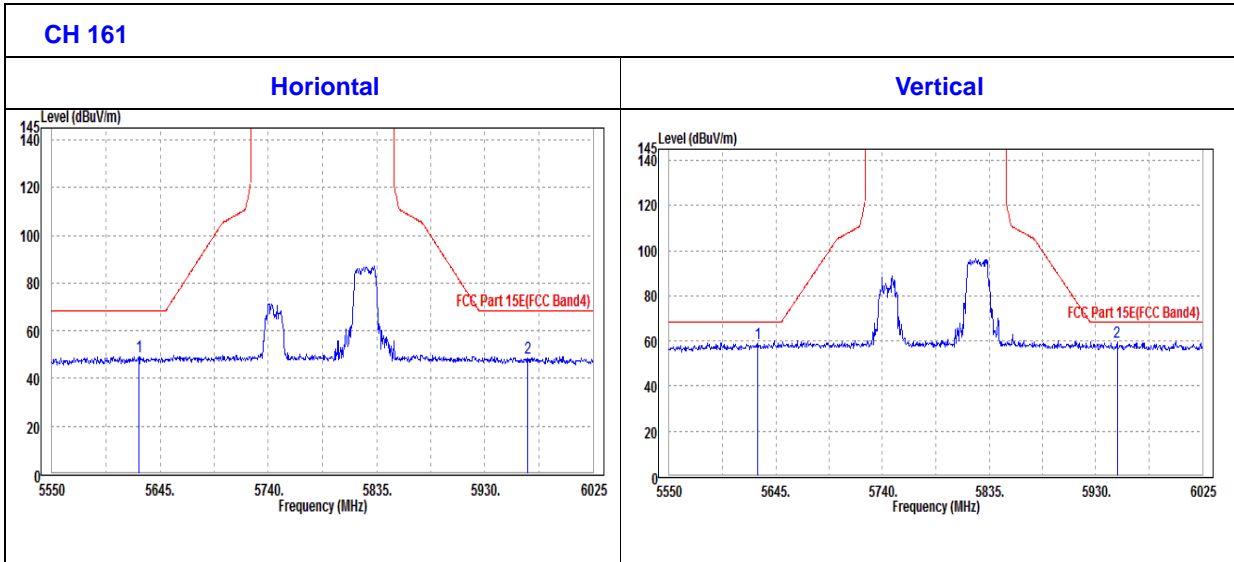



802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	91.49	92.37			37.55	7.75	46.18	100	196	Average
5745	100.86	101.74			37.55	7.75	46.18	100	196	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	93.9	94.78			37.55	7.75	46.18	100	93	Average
5745	104.07	104.95			37.55	7.75	46.18	100	93	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.



OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5631.7	59.76	60.86	68.3	-8.54	37.48	7.63	46.21	100	360	Peak
5939.03	60.69	61.21	68.3	-7.61	37.66	7.95	46.13	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5637.88	59.79	60.88	68.3	-8.51	37.48	7.64	46.21	201	360	Peak
5941.88	59.59	60.1	68.3	-8.71	37.67	7.95	46.13	201	360	Peak

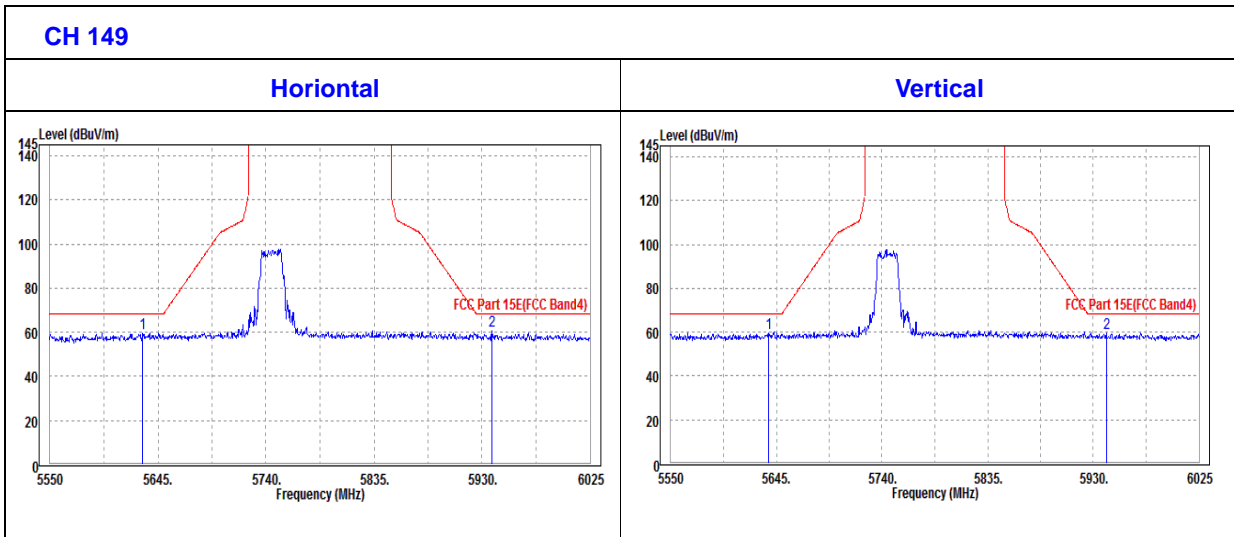



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	92.18	92.99			37.57	7.79	46.17	100	209	Average
5785	100.88	101.69			37.57	7.79	46.17	100	209	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	95.04	95.85			37.57	7.79	46.17	100	109	Average
5785	102.87	103.68			37.57	7.79	46.17	100	109	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.



OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5634.08	58.72	59.81	68.3	-9.58	37.48	7.64	46.21	200	360	Peak
5954.7	59.56	60.05	68.3	-8.74	37.67	7.96	46.12	200	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5634.55	59.08	60.17	68.3	-9.22	37.48	7.64	46.21	201	360	Peak
5940.93	59.15	59.67	68.3	-9.15	37.66	7.95	46.13	201	360	Peak

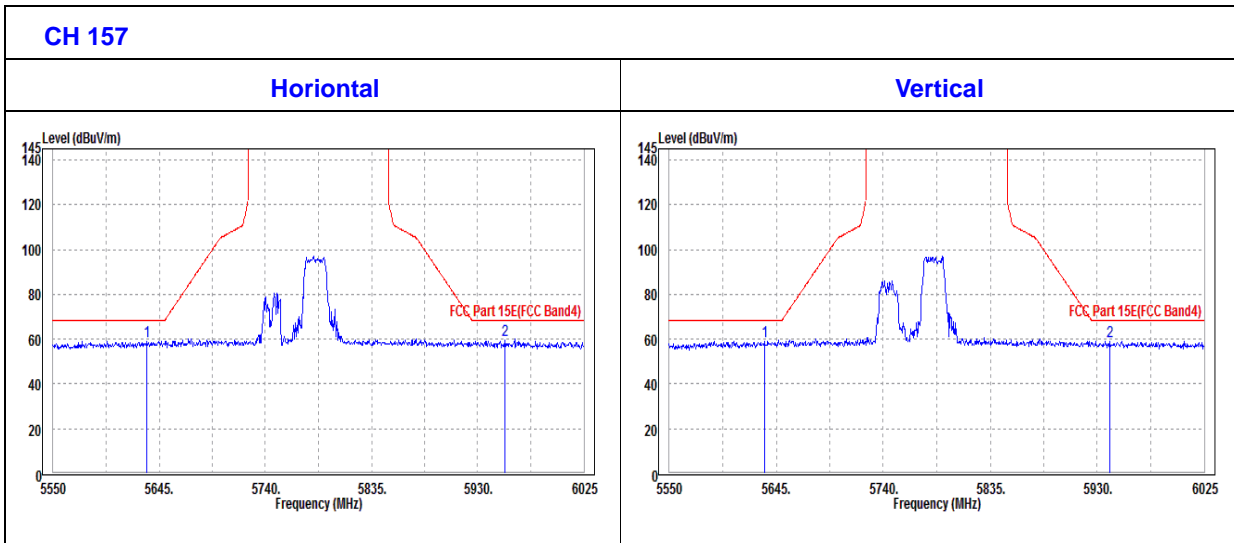



CHANNEL	TX Channel 161	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5805	91.77	92.54			37.58	7.81	46.16	100	196	Average
5805	100.52	101.29			37.58	7.81	46.16	100	196	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5805	92.94	93.71			37.58	7.81	46.16	100	102	Average
5805	102.64	103.41			37.58	7.81	46.16	100	102	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5805MHz: Fundamental frequency.



OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5634.08	59.15	60.24	68.3	-9.15	37.48	7.64	46.21	201	0	Peak
5958.5	58.82	59.29	68.3	-9.48	37.68	7.97	46.12	201	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5638.83	59.45	60.54	68.3	-8.85	37.48	7.64	46.21	201	360	Peak
5947.1	58.98	59.47	68.3	-9.32	37.67	7.96	46.12	201	360	Peak

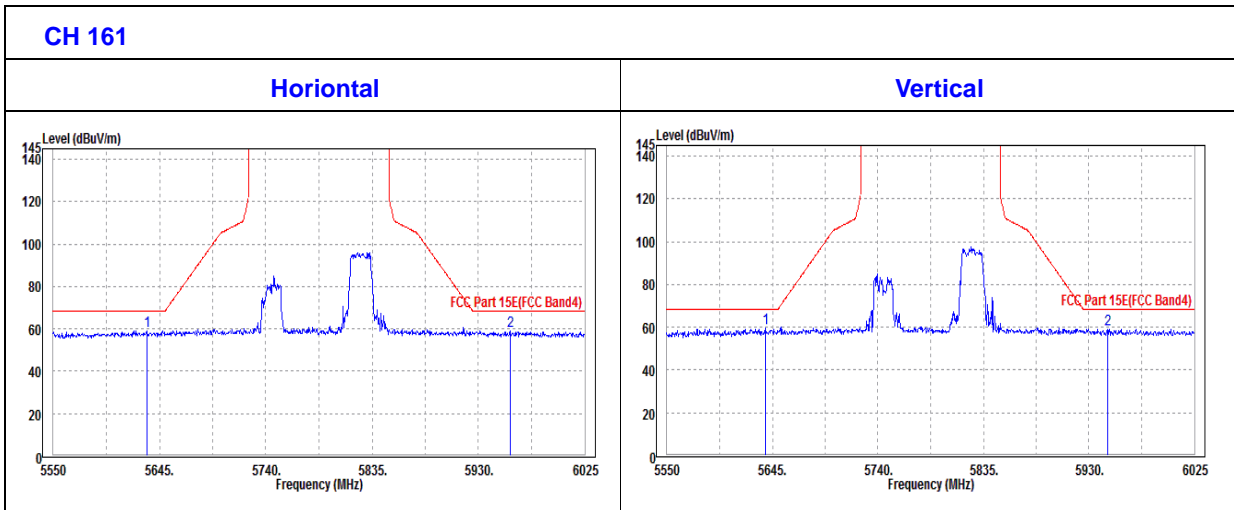



802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	88.01	88.88			37.55	7.76	46.18	100	200	Average
5755	94.39	95.26			37.55	7.76	46.18	100	200	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	88.3	89.17			37.55	7.76	46.18	100	103	Average
5755	95.89	96.76			37.55	7.76	46.18	100	103	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5755MHz: Fundamental frequency.



OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5632.18	59.61	60.71	68.3	-8.69	37.48	7.63	46.21	200	0	Peak
5931.43	58.67	59.2	68.3	-9.63	37.66	7.94	46.13	200	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5628.85	59.02	60.12	68.3	-9.28	37.48	7.63	46.21	200	360	Peak
5957.08	59.84	60.32	68.3	-8.46	37.67	7.97	46.12	200	360	Peak

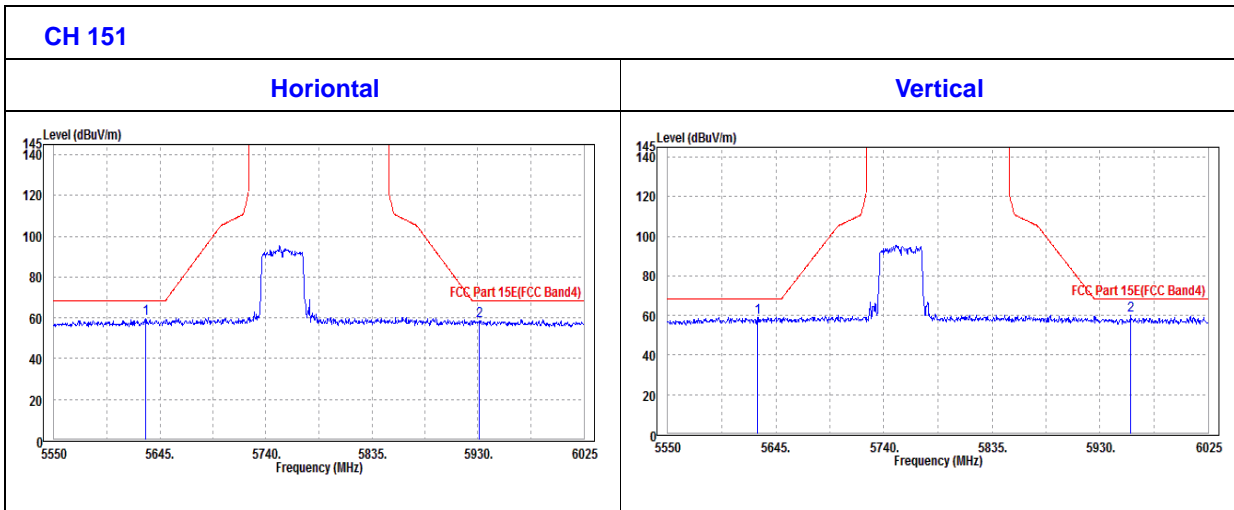



CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	86.35	87.14			37.58	7.8	46.17	100	197	Average
5795	93.86	94.65			37.58	7.8	46.17	100	197	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	89.83	90.62			37.58	7.8	46.17	100	97	Average
5795	96.52	97.31			37.58	7.8	46.17	100	97	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5795MHz: Fundamental frequency.



OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5626	58.97	60.07	68.3	-9.33	37.48	7.63	46.21	200	0	Peak
5944.25	59.38	59.89	68.3	-8.92	37.67	7.95	46.13	200	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5629.8	59.18	60.28	68.3	-9.12	37.48	7.63	46.21	201	360	Peak
5953.28	60.05	60.54	68.3	-8.25	37.67	7.96	46.12	201	360	Peak

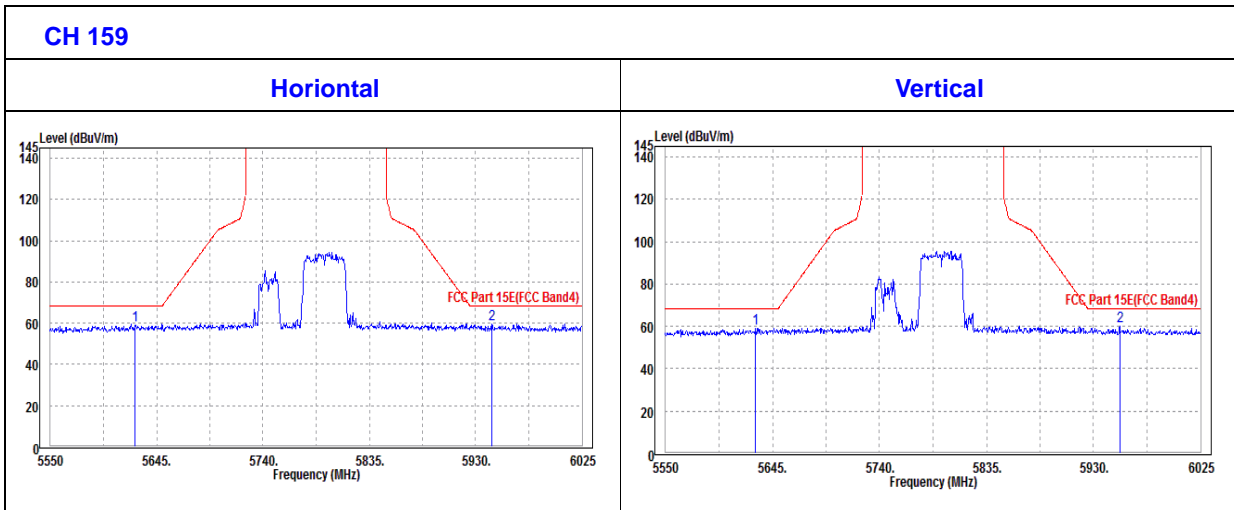



802.11ac (80MHz)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	86.91	87.73			37.57	7.78	46.17	100	199	Average
5775	95.12	95.94			37.57	7.78	46.17	100	199	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	88.19	89.01			37.57	7.78	46.17	100	93	Average
5775	97.72	98.54			37.57	7.78	46.17	100	93	Peak

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5775MHz: Fundamental frequency.



OOBE DATA

802.11ac (80MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5637.88	59.3	60.39	68.3	-9	37.48	7.64	46.21	201	0	Peak
5950.43	59.38	59.87	68.3	-8.92	37.67	7.96	46.12	201	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5634.08	58.73	59.82	68.3	-9.57	37.48	7.64	46.21	202	360	Peak
5943.3	58.38	58.89	68.3	-9.92	37.67	7.95	46.13	202	360	Peak

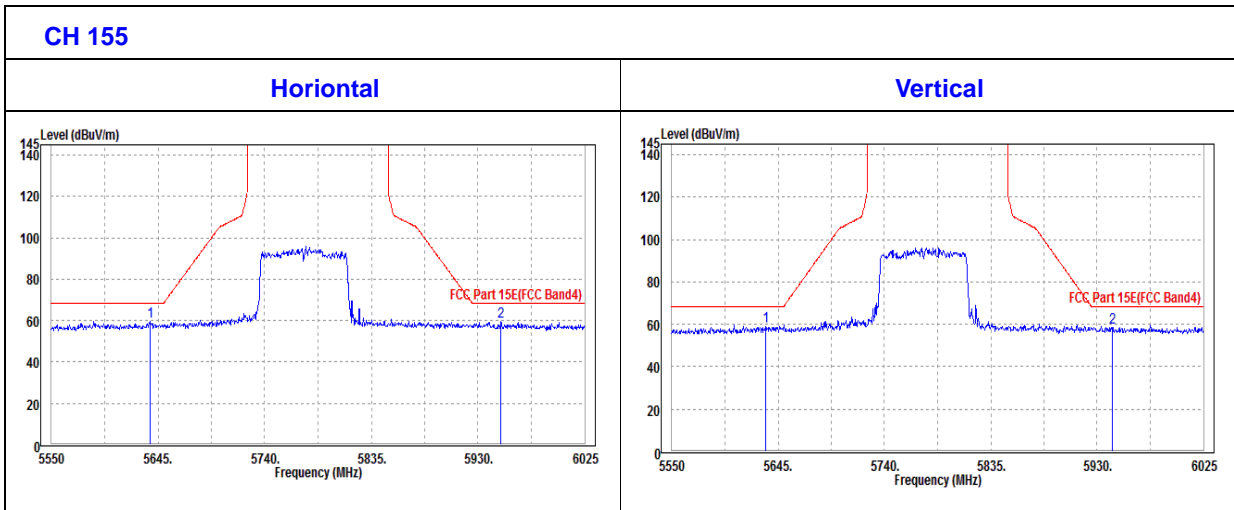



3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Mar. 15,18	Mar. 14,19
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 15,18	Mar. 14,19

- NOTE:**
1. The test was performed in CE shielded room.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.



3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

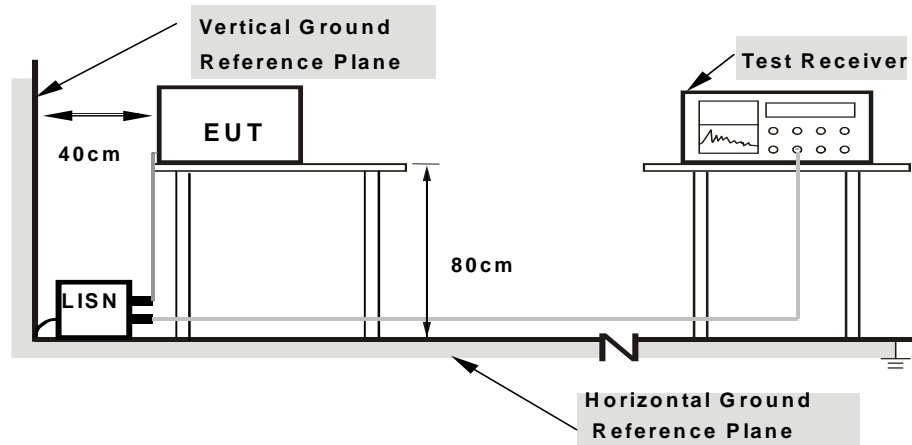

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.6.




3.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA :

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	22.6deg. C, 55RH
Tested By	John Wen	TEST DATE	2018/11/30

Frequency (MHz)	QuasiPeak (dBUV)	CAverage (dBUV)	Limit (dBUV)	Margin (dB)	Line	Filter	Corr. (dB)
0.432000	---	32.69	47.21	-14.52	L1	ON	9.7
0.432000	43.08	---	57.21	-14.13	L1	ON	9.7
0.568000	---	32.64	46.00	-13.36	L1	ON	9.7
0.568000	43.97	---	56.00	-12.03	L1	ON	9.7
1.164000	---	27.07	46.00	-18.93	L1	ON	9.7
1.164000	39.81	---	56.00	-16.19	L1	ON	9.7
1.952000	---	28.75	46.00	-17.25	L1	ON	9.7
1.952000	38.38	---	56.00	-17.62	L1	ON	9.7
2.292000	---	28.10	46.00	-17.90	L1	ON	9.7
2.292000	37.67	---	56.00	-18.33	L1	ON	9.7
24.500000	---	33.85	50.00	-16.15	L1	ON	10.0
24.500000	42.34	---	60.00	-17.66	L1	ON	10.0

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

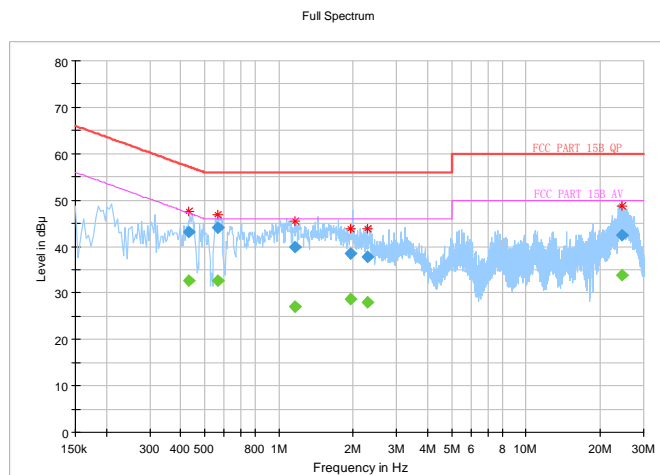




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	22.6deg. C, 55RH
Tested By	John Wen	TEST DATE	2018/11/30

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.444000	---	30.85	46.99	-16.14	N	ON	10.1
0.444000	43.30	---	56.99	-13.69	N	ON	10.1
0.568000	---	32.99	46.00	-13.01	N	ON	10.1
0.568000	44.29	---	56.00	-11.71	N	ON	10.1
1.204000	---	29.25	46.00	-16.75	N	ON	9.9
1.204000	40.60	---	56.00	-15.40	N	ON	9.9
1.468000	---	28.99	46.00	-17.01	N	ON	9.9
1.468000	38.99	---	56.00	-17.01	N	ON	9.9
2.196000	---	28.32	46.00	-17.68	N	ON	9.8
2.196000	38.45	---	56.00	-17.55	N	ON	9.8
23.760000	---	33.35	50.00	-16.65	N	ON	10.1
23.760000	41.89	---	60.00	-18.11	N	ON	10.1

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

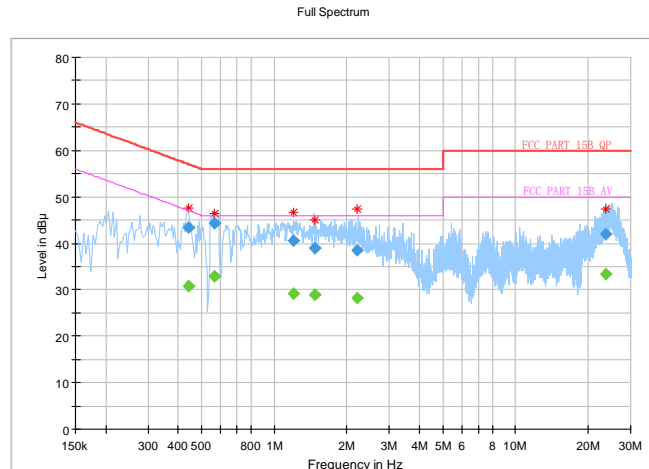



3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Client devices	250mW (24 dBm)
U-NII-2A		√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C		√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		√	1 Watt (30 dBm)


NOTE: Where B is the 26dB emission bandwidth in MHz.




3.3.2 TEST SETUP

FOR POWER OUTPUT MEASUREMENT


802.11a, 802.11n (20MHz), 802.11n (40MHz) TEST CONFIGURATION

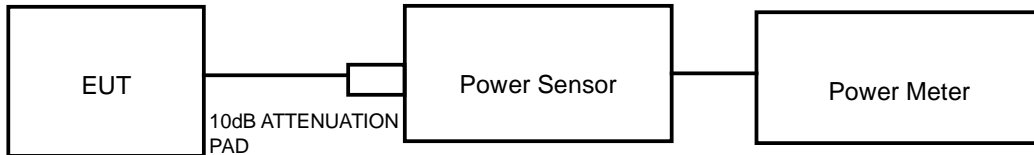

11ac TEST CONFIGURATION

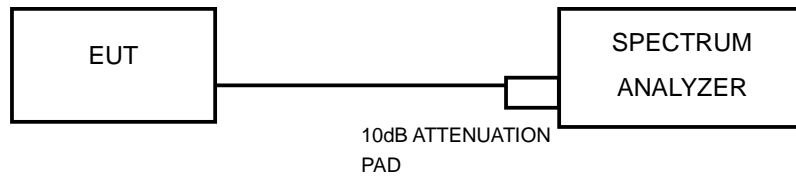

FOR 26dB BANDWIDTH



3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Mar. 02,18	Mar. 01,19
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Mar. 16,18	Mar. 15,19
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510332	Mar. 16,18	Mar. 15,19
Power Sensor	ANRITSU	MA2411B	1339352	Mar. 16,18	Mar. 15,19

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



3.3.4 TEST PROCEDURE

FOR POWER MEASUREMENT

For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (80MHz)

1. Measure the duty cycle, x , of the transmitter output signal as described in II.B.
2. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
3. Set RBW = 1 MHz.
4. Set VBW \geq 3 MHz.
5. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
8. Do not use sweep triggering. Allow the sweep to “free run.”
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6 \text{ dB}$ if the duty cycle is 25%.



FOR 99 PERCENT OCCUPIED BANDWIDTH

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

FOR 6dB BANDWIDTH

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



3.3.7 TEST RESULTS

OUTPUT POWER:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	13.43	22.03	24	PASS
40	5200	13.44	22.08	24	PASS
48	5240	13.45	22.13	24	PASS
52	5260	13.43	22.03	24	PASS
60	5300	13.51	22.44	24	PASS
64	5320	13.44	22.08	24	PASS
100	5500	13.41	21.93	24	PASS
116	5580	13.45	22.13	24	PASS
140	5700	13.50	22.39	24	PASS
149	5745	13.45	22.13	30	PASS
157	5785	13.49	22.34	30	PASS
161	5805	13.45	22.13	30	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	13.42	21.98	24	PASS
40	5200	13.47	22.23	24	PASS
48	5240	13.47	22.23	24	PASS
52	5260	13.51	22.44	24	PASS
60	5300	13.46	22.18	24	PASS
64	5320	13.46	22.18	24	PASS
100	5500	13.43	22.03	24	PASS
116	5580	13.42	21.98	24	PASS
140	5700	13.46	22.18	24	PASS
149	5745	13.42	21.98	30	PASS
157	5785	13.50	22.39	30	PASS
161	5805	13.45	22.13	30	PASS



802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
38	5190	12.50	17.78	24	PASS
46	5230	12.52	17.86	24	PASS
54	5270	12.43	17.50	24	PASS
62	5310	12.48	17.70	24	PASS
102	5510	12.45	17.58	24	PASS
110	5550	12.47	17.66	24	PASS
134	5670	12.46	17.62	24	PASS
151	5755	12.40	17.38	30	PASS
159	5795	12.37	17.26	30	PASS

802.11ac (80MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER w/o Duty Factor (dBm)	Duty Factor	AVERAGE POWER with Duty Factor (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
42	5210	8.44	1.14	9.58	9.08	24	PASS
58	5290	9.78	1.14	10.92	12.36	24	PASS
106	5530	9.34	1.14	10.48	11.17	24	PASS
155	5775	9.61	1.14	10.75	11.89	30	PASS



99% OCCUPIED BANDWIDTH & 26dB BANDWIDTH/6dB BANDWIDTH:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	16.80	21.36	PASS
40	5200	16.86	21.34	PASS
48	5240	16.92	21.32	PASS
52	5260	16.92	21.39	PASS
60	5300	16.86	21.49	PASS
64	5320	16.98	21.34	PASS
100	5500	16.86	21.35	PASS
116	5580	16.92	21.29	PASS
140	5700	16.98	21.41	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
149	5745	16.98	16.32	PASS
157	5785	16.86	16.33	PASS
161	5805	17.88	17.52	PASS



802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	17.94	21.65	PASS
40	5200	17.88	21.74	PASS
48	5240	18.12	21.89	PASS
52	5260	18.00	21.61	PASS
60	5300	17.94	21.78	PASS
64	5320	17.94	21.59	PASS
100	5500	17.94	21.55	PASS
116	5580	17.94	21.58	PASS
140	5700	17.88	21.55	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
149	5745	18.06	17.54	PASS
157	5785	18.00	17.57	PASS
161	5805	18.78	17.70	PASS



802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
38	5190	36.48	40.72	PASS
46	5230	36.78	40.75	PASS
54	5270	36.48	40.50	PASS
62	5310	36.48	40.76	PASS
102	5510	36.36	40.50	PASS
110	5550	36.30	40.53	PASS
134	5670	36.42	40.52	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
151	5755	36.42	36.04	PASS
159	5795	36.36	35.80	PASS

802.11ac (80MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
42	5210	75.48	81.56	PASS
58	5290	75.60	81.87	PASS
106	5530	75.48	81.66	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
155	5775	75.60	75.58	PASS



BUREAU VERITAS

Test Report No.: RF181120W004-3


For U-NII-1:

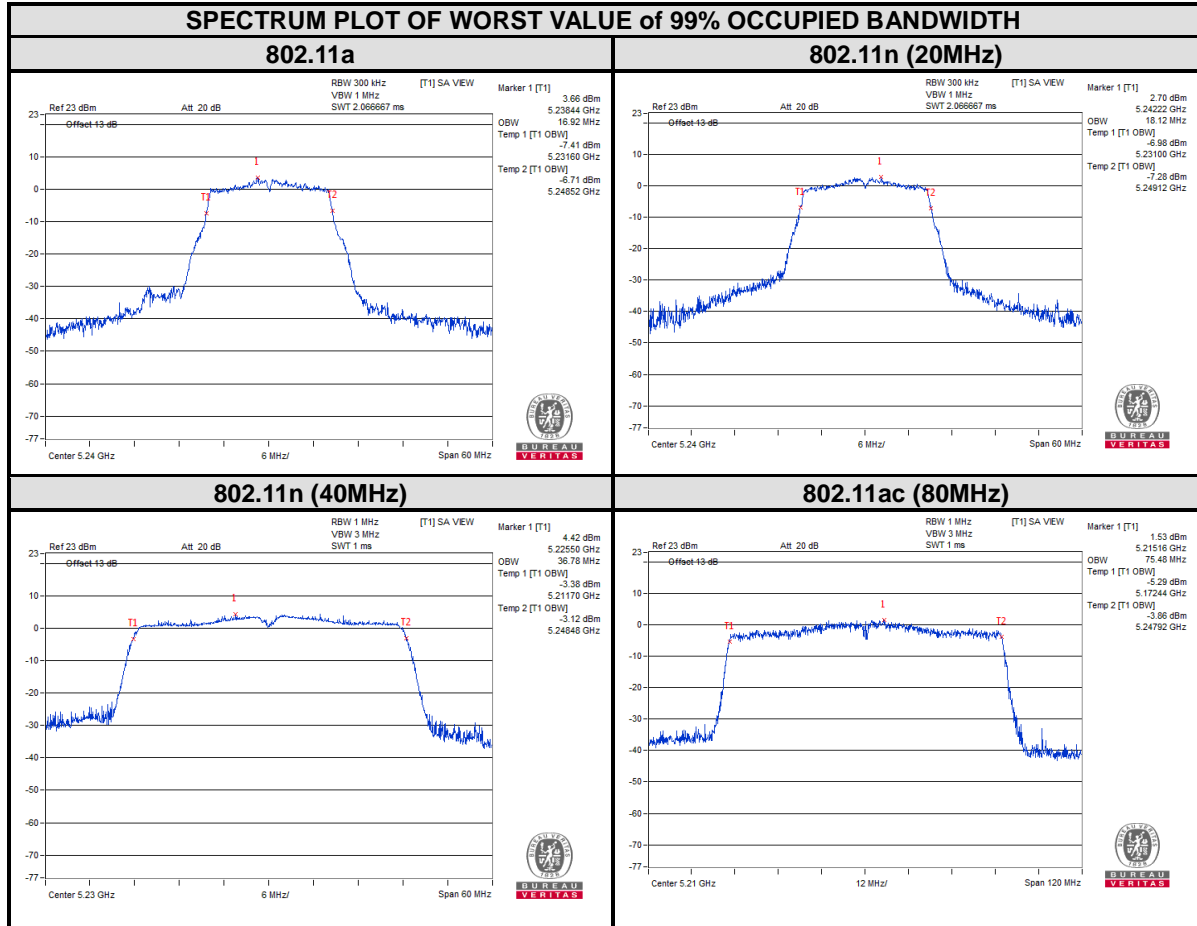



BUREAU VERITAS

Test Report No.: RF181120W004-3

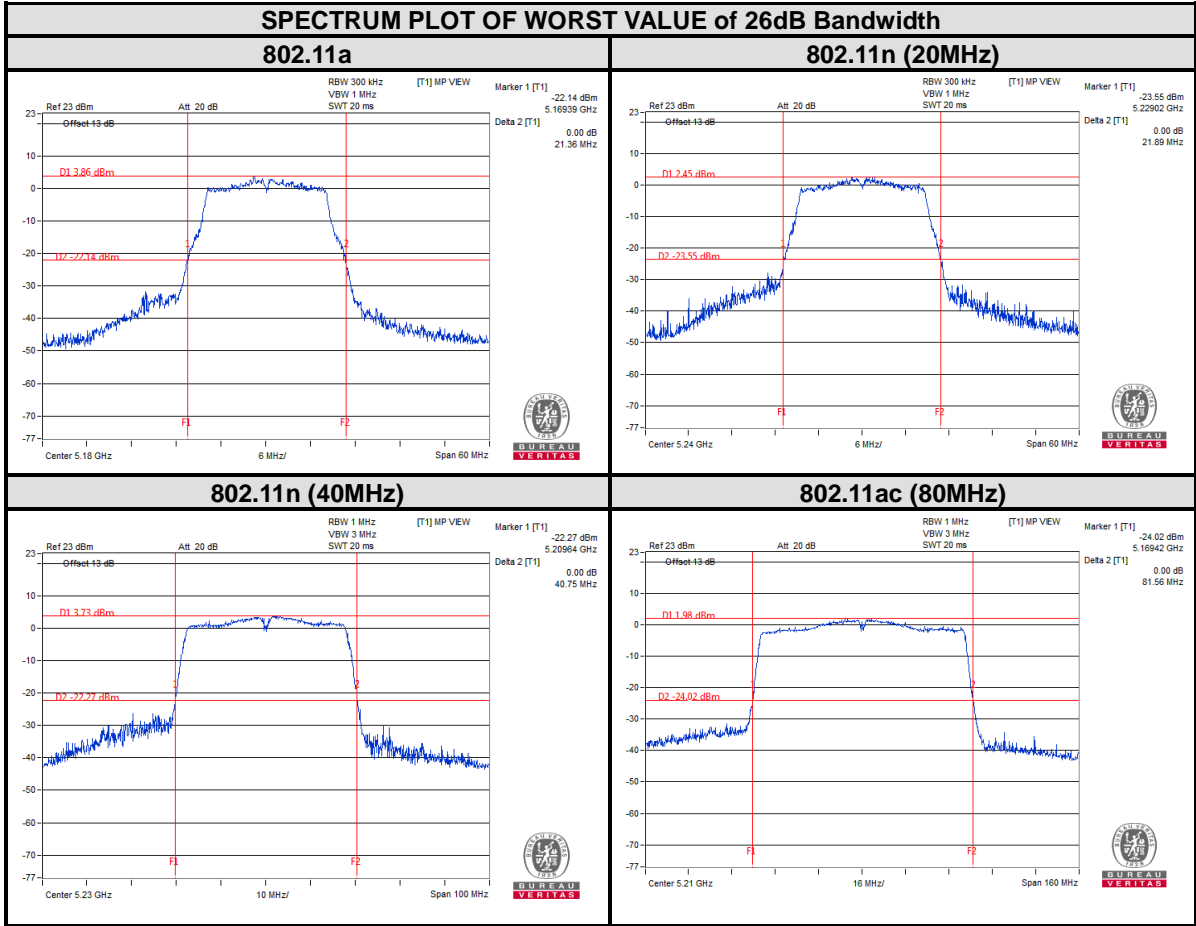




BUREAU VERITAS

Test Report No.: RF181120W004-3


For U-NII-2A:

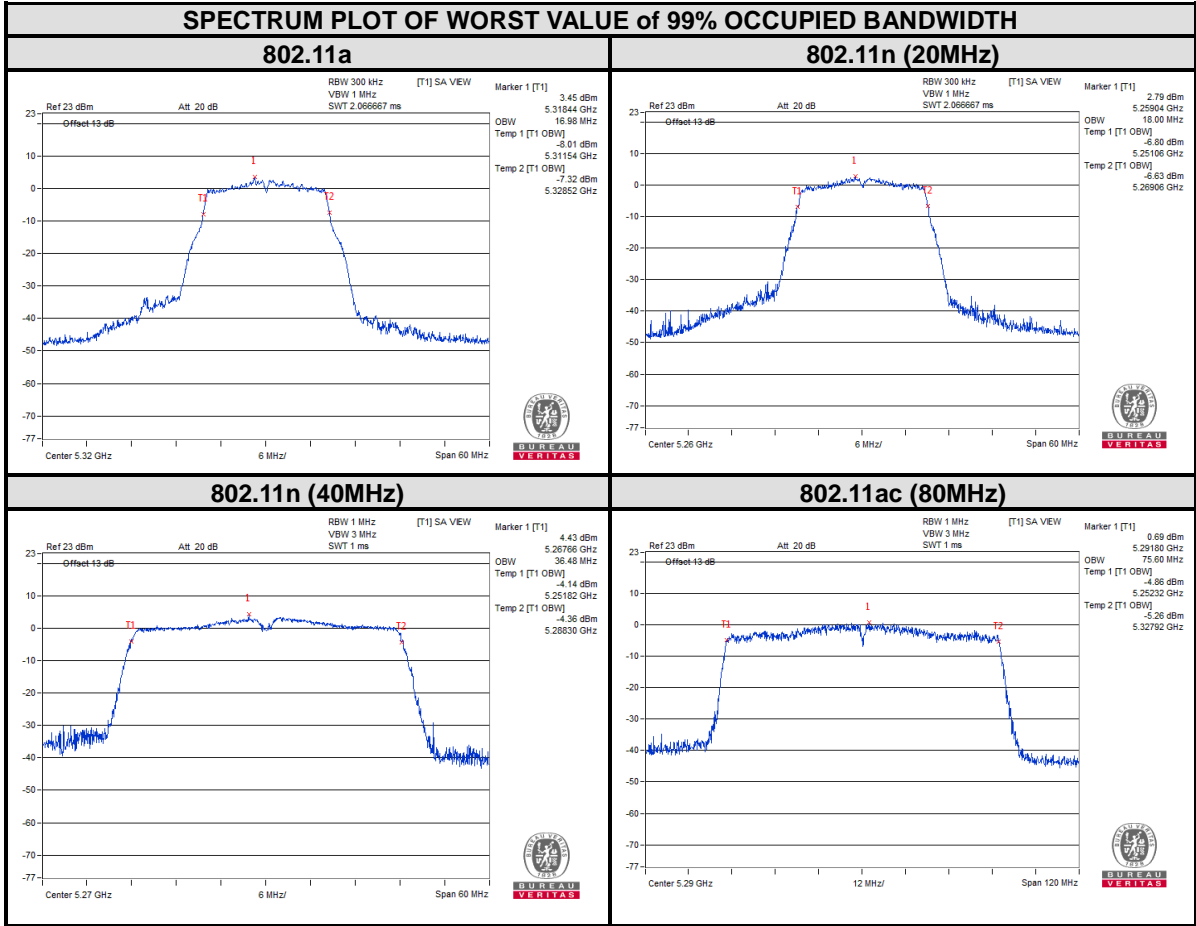



BUREAU VERITAS

Test Report No.: RF181120W004-3

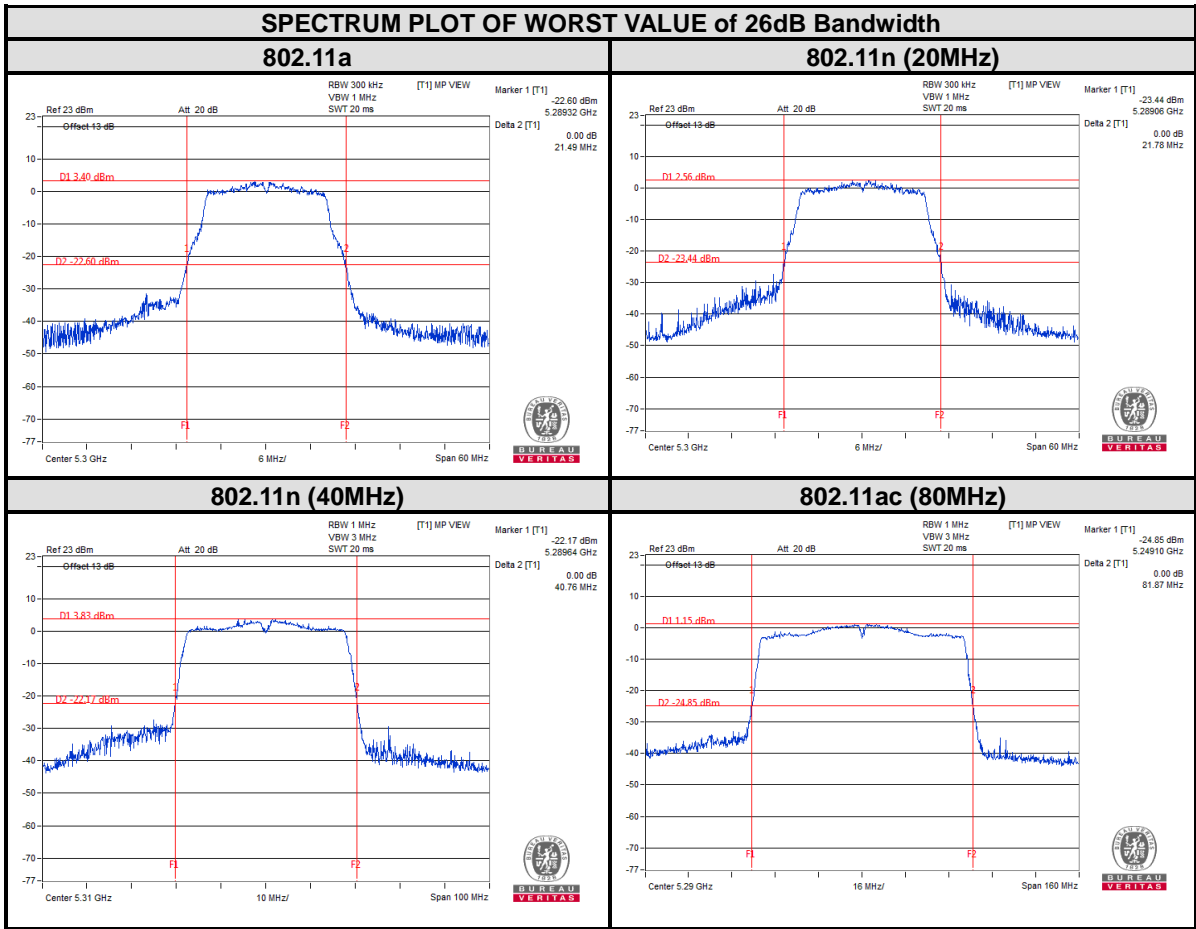




BUREAU VERITAS

Test Report No.: RF181120W004-3


For U-NII-2C:

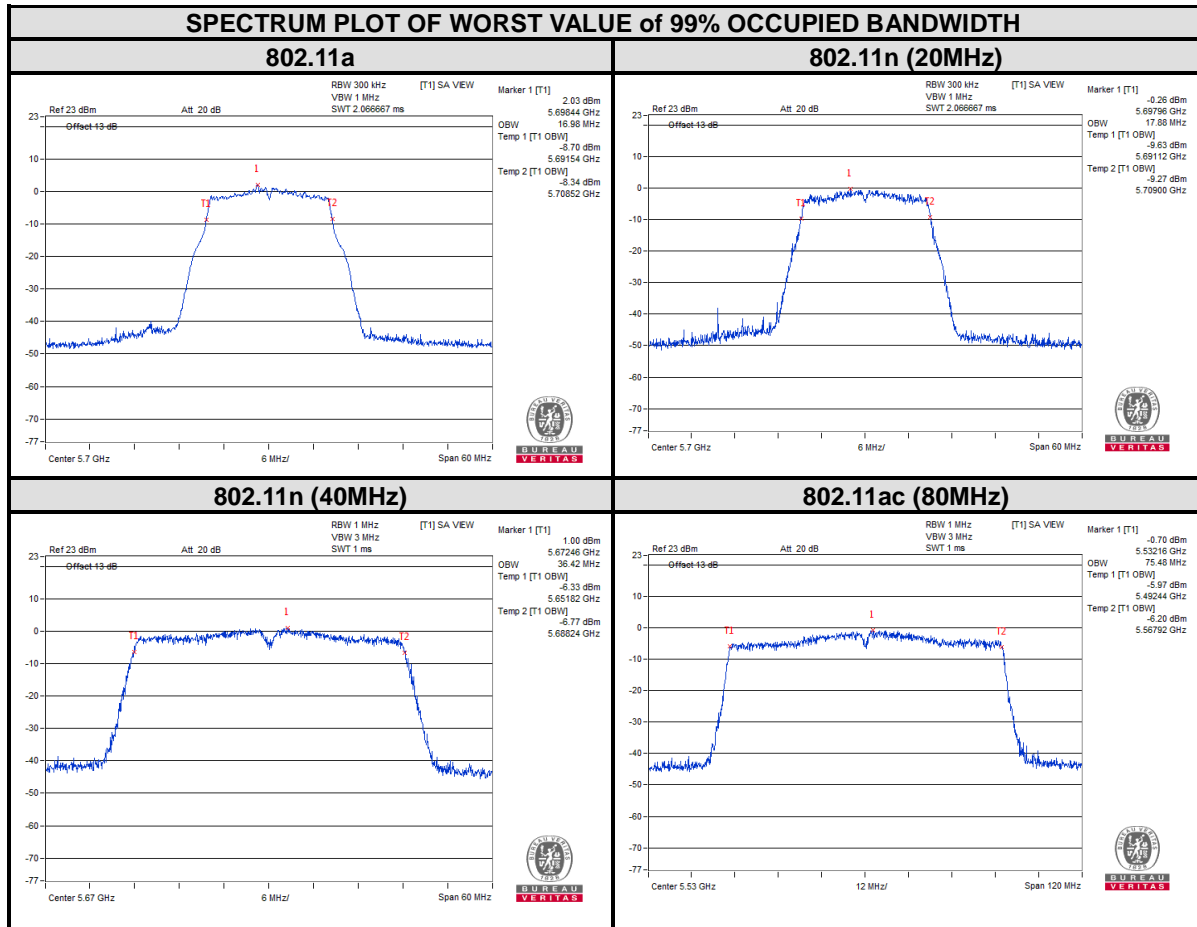



BUREAU VERITAS

Test Report No.: RF181120W004-3

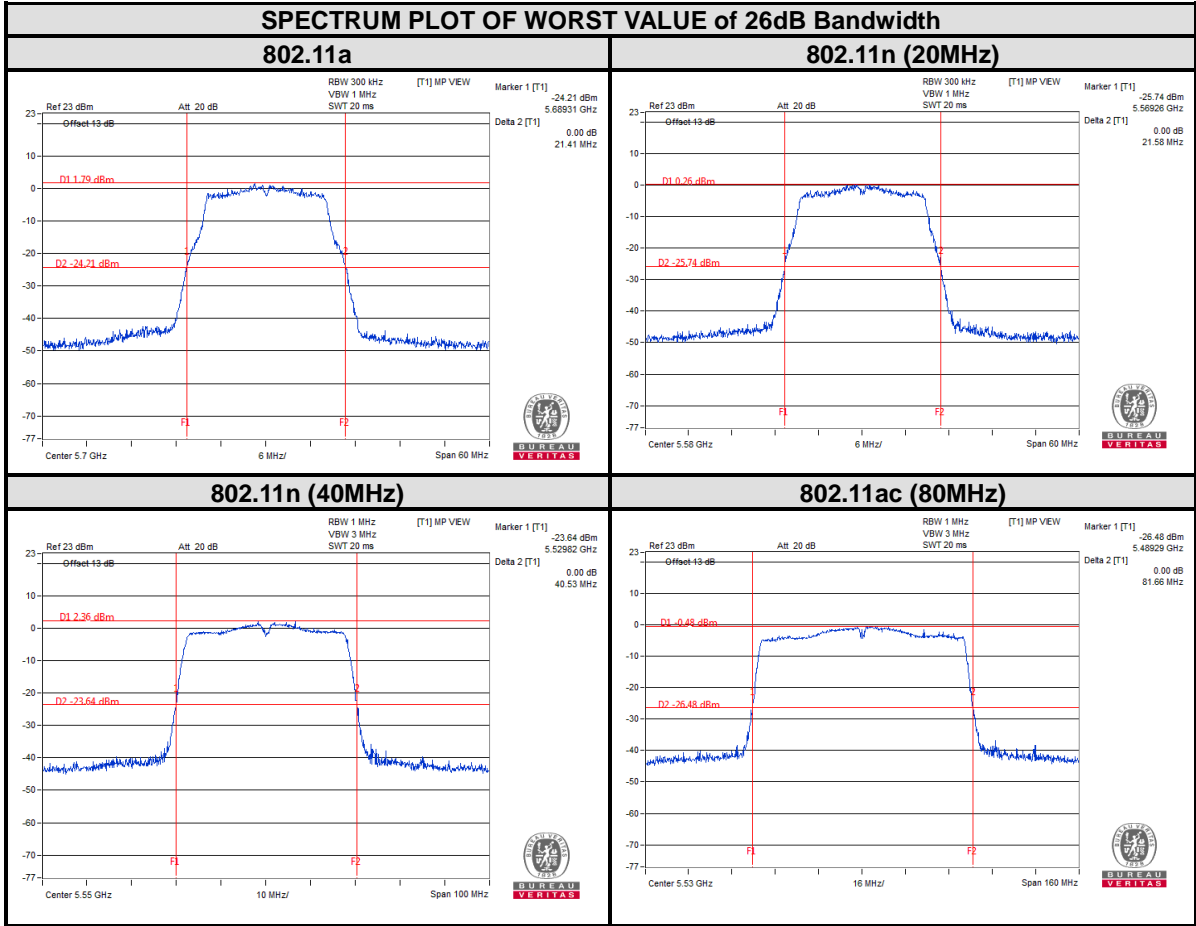




BUREAU VERITAS

Test Report No.: RF181120W004-3


For U-NII-3:

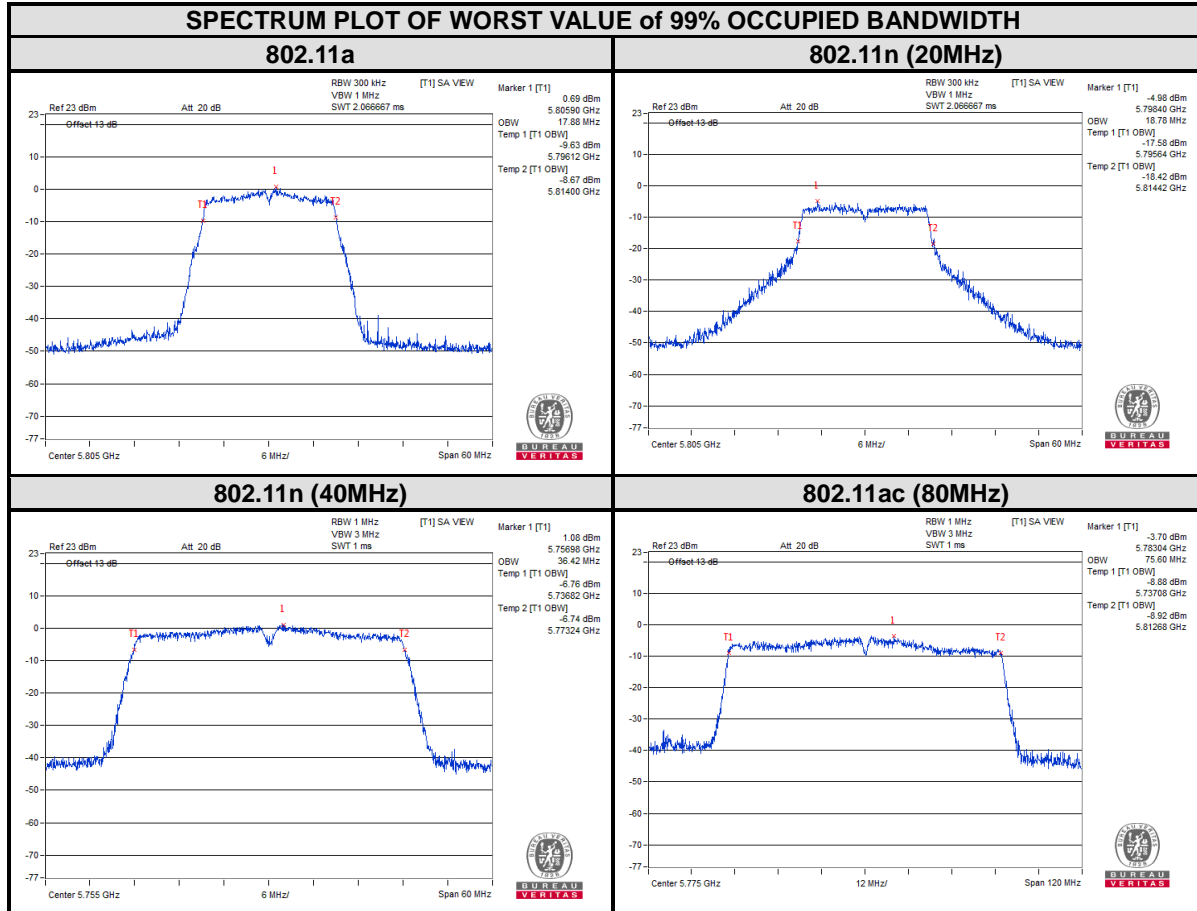



BUREAU VERITAS

Test Report No.: RF181120W004-3

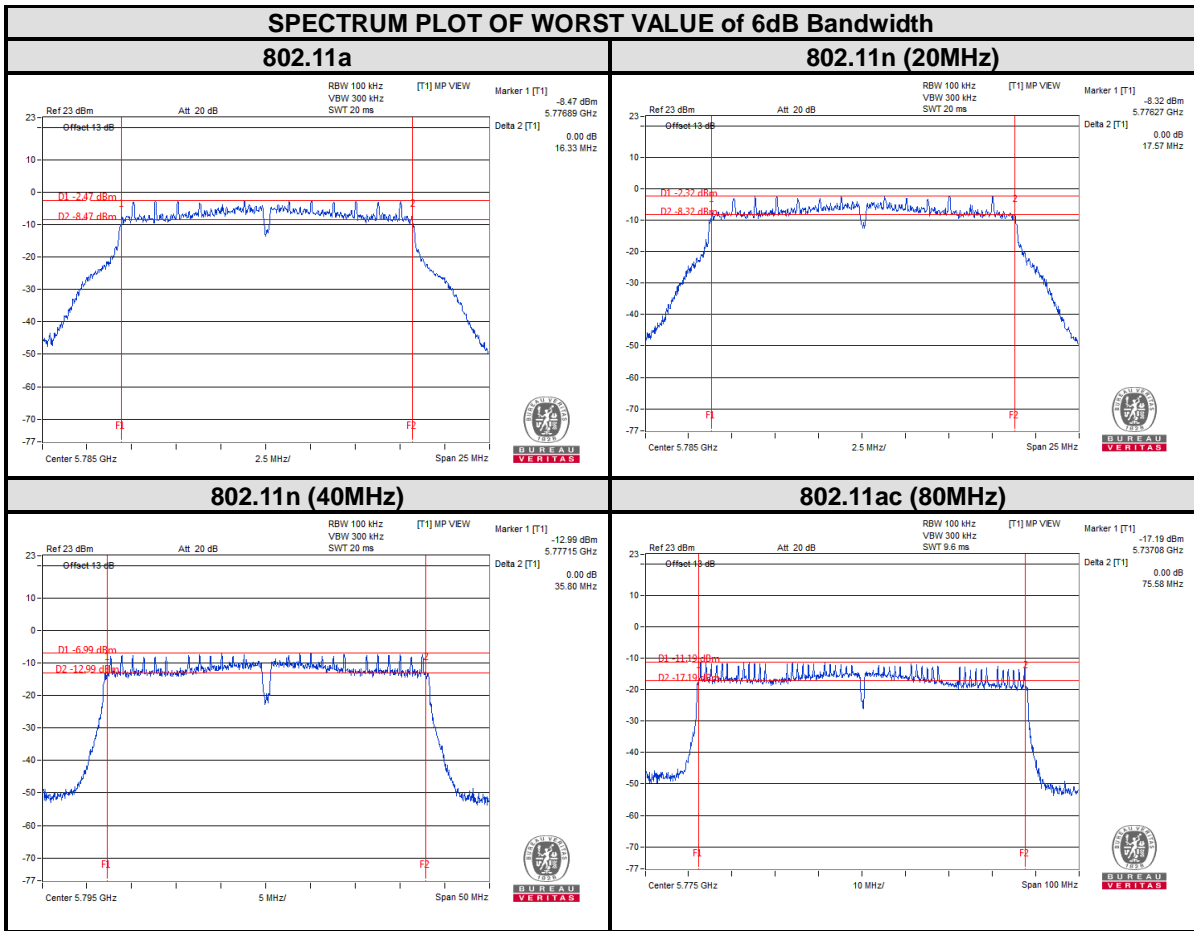




3.4 MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Client devices	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.



3.4.4 TEST PROCEDURES

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).
- 7) Record the max value

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

Same as 3.1.6.



3.4.7 TEST RESULTS

For U-NII-1 & U-NII-2A & U-NII-2C :

802.11a

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	5.38	0.31	5.69	11	PASS
40	5200	5.76	0.31	6.07	11	PASS
48	5240	5.47	0.31	5.78	11	PASS
52	5260	5.56	0.31	5.87	11	PASS
60	5300	5.60	0.31	5.91	11	PASS
64	5320	5.11	0.31	5.42	11	PASS
100	5500	3.48	0.31	3.79	11	PASS
116	5580	3.41	0.31	3.72	11	PASS
140	5700	3.76	0.31	4.07	11	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	4.08	0.24	4.32	11	PASS
40	5200	3.23	0.24	3.47	11	PASS
48	5240	5.55	0.24	5.79	11	PASS
52	5260	4.53	0.24	4.77	11	PASS
60	5300	5.39	0.24	5.63	11	PASS
64	5320	3.67	0.24	3.91	11	PASS
100	5500	2.78	0.24	3.02	11	PASS
116	5580	2.15	0.24	2.39	11	PASS
140	5700	2.71	0.24	2.95	11	PASS



802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
38	5190	0.06	0.49	0.55	11	PASS
46	5230	0.01	0.49	0.50	11	PASS
54	5270	-0.39	0.49	0.10	11	PASS
62	5310	-0.47	0.49	0.02	11	PASS
102	5510	-2.07	0.49	-1.58	11	PASS
110	5550	-2.39	0.49	-1.9	11	PASS
134	5670	-1.95	0.49	-1.46	11	PASS

802.11ac (80MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
42	5210	-1.82	1.14	-0.68	11	PASS
58	5290	-1.69	1.14	-0.55	11	PASS
106	5530	-3.65	1.14	-2.51	11	PASS



For U-NII-3:

802.11a

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/3kHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	-14.32	7.9	0.31	8.21	30	PASS
157	5785	-14.25	7.75	0.31	8.06	30	PASS
161	5805	-13.83	8.39	0.31	8.67	30	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/3kHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	-15.19	7.03	0.24	7.27	30	PASS
157	5785	-15.32	6.9	0.24	7.14	30	PASS
161	5805	-15.99	6.23	0.24	6.47	30	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/3kHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
151	5755	-21.03	1.19	0.49	1.68	30	PASS
159	5795	-20.75	1.47	0.49	1.96	30	PASS

802.11ac (80MHz)


CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/3kHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
155	5775	-26.25	-4.03	1.14	-2.89	30	PASS



BUREAU VERITAS

Test Report No.: RF181120W004-3

For 5180~5240MHz

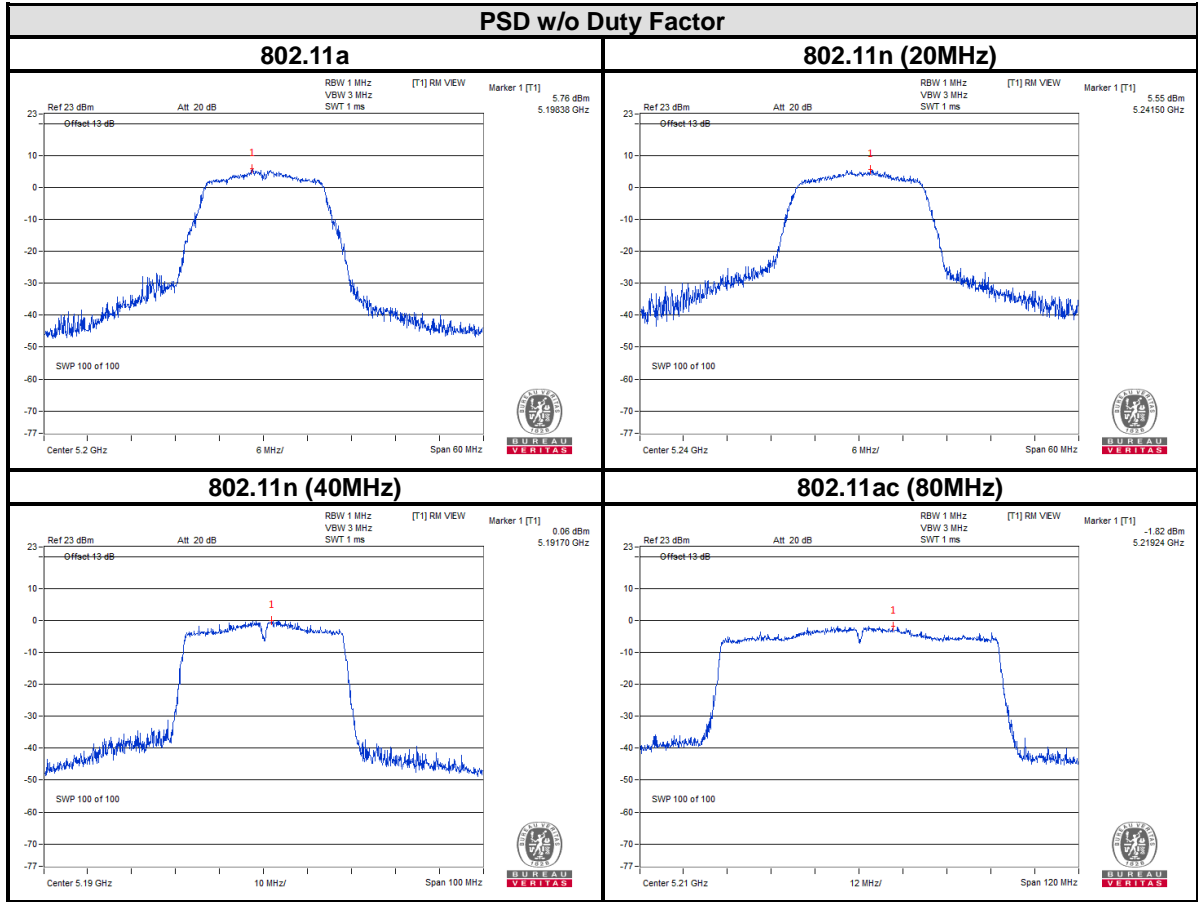




BUREAU VERITAS

Test Report No.: RF181120W004-3

For 5260~5320MHz

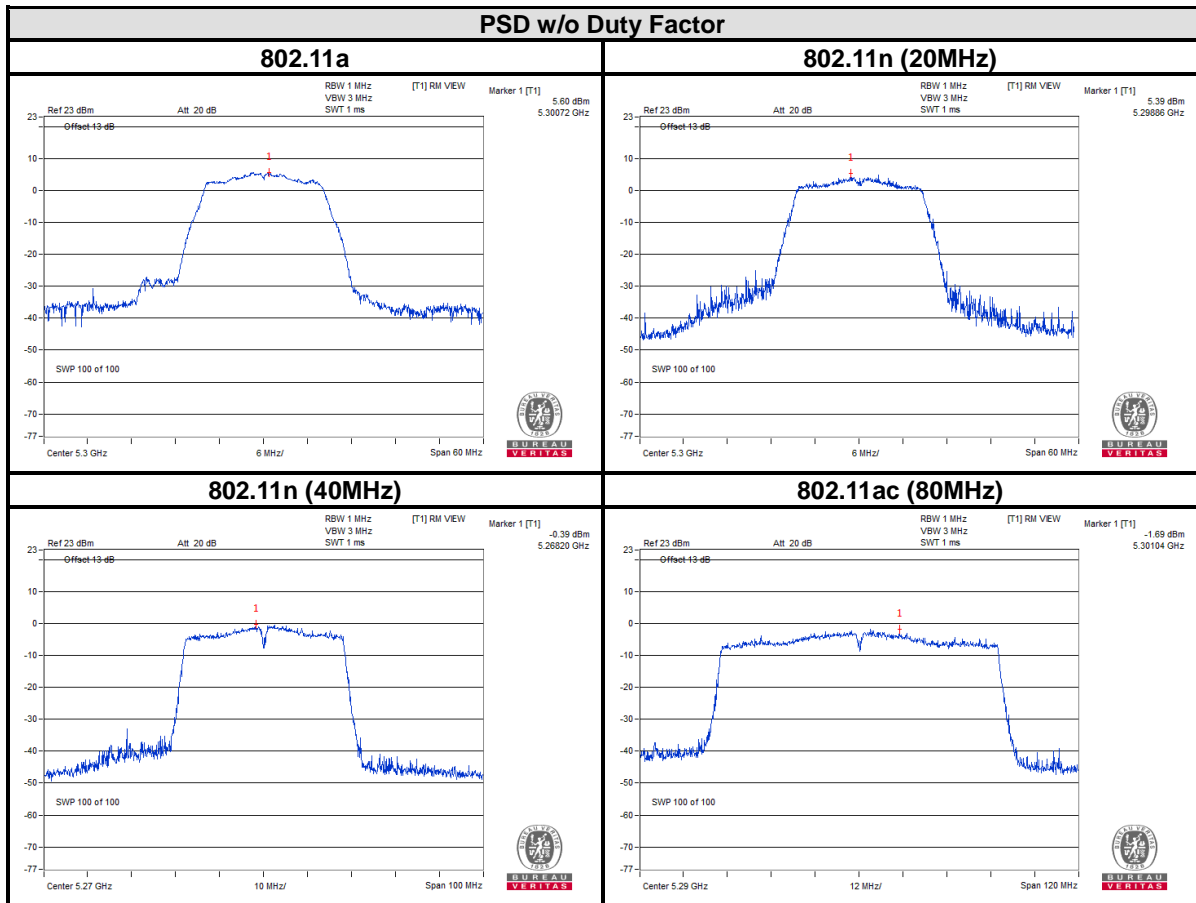




BUREAU VERITAS

Test Report No.: RF181120W004-3

For 5500~5700MHz

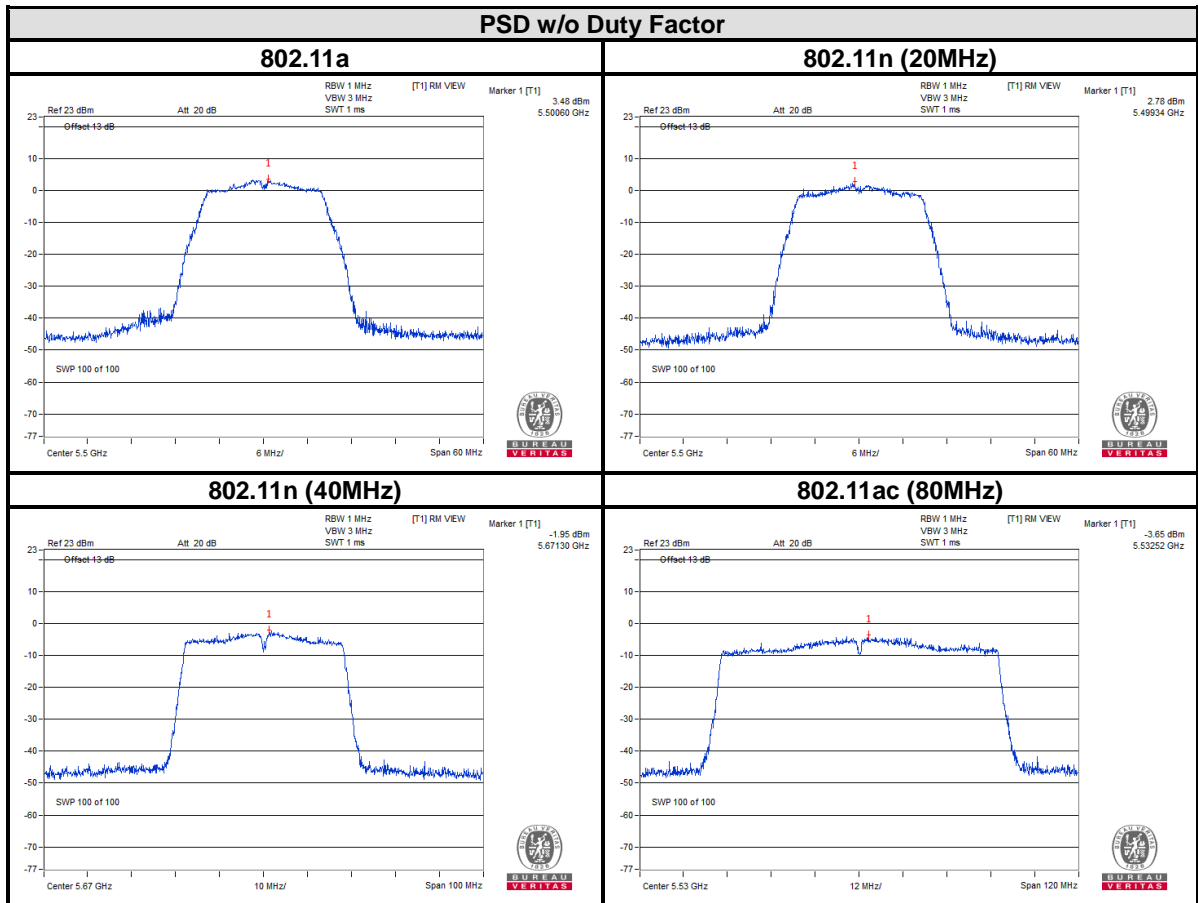




**BUREAU
VERITAS**

Test Report No.: RF181120W004-3

For 5745~5805MHz

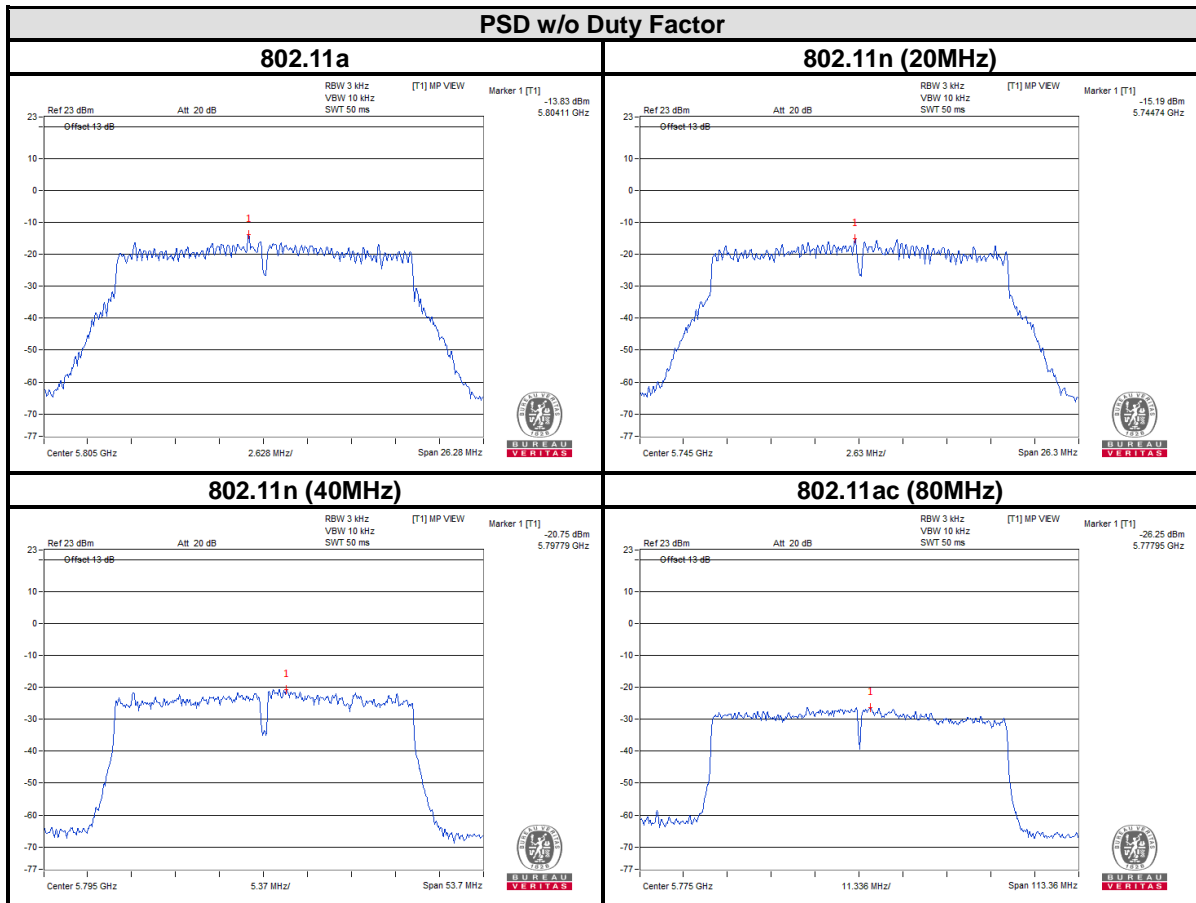




3.5 FREQUENCY STABILITY

3.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

3.5.2 TEST SETUP

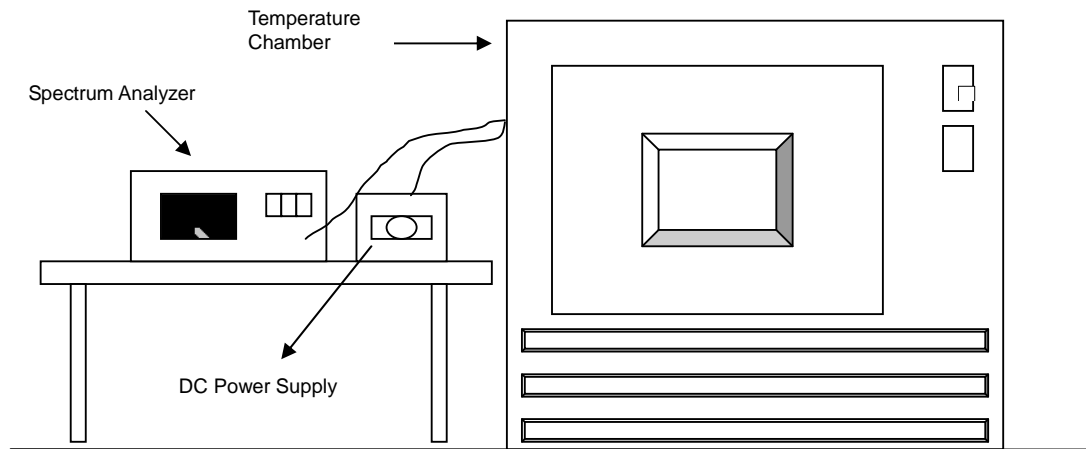

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.



3.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



3.5.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.										
OPERATING FREQUENCY: 5180MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
50	120	5179.9824	-3.398	5179.9832	-3.243	5179.9895	-2.027	5179.9836	-3.166	PASS
40	120	5179.9932	-1.313	5180.0013	0.251	5179.9969	-0.598	5180.0001	0.019	PASS
30	120	5179.979	-4.054	5179.9759	-4.653	5179.9792	-4.015	5179.9805	-3.764	PASS
20	120	5180.0119	2.297	5180.0142	2.741	5180.0094	1.815	5180.0094	1.815	PASS
10	120	5179.9896	-2.008	5179.9902	-1.892	5179.9864	-2.625	5179.988	-2.317	PASS
0	120	5180.0222	4.286	5180.0177	3.417	5180.0131	2.529	5180.0144	2.780	PASS
-10	120	5179.9951	-0.946	5180.0011	0.212	5179.9954	-0.888	5180.0019	0.367	PASS
-20	120	5180.0076	1.467	5180.0084	1.622	5180.007	1.351	5180.0135	2.606	PASS
-30	120	5180.0287	5.541	5180.0275	5.309	5180.0282	5.444	5180.0236	4.556	PASS

FREQUENCY STABILITY VERSUS VOLTAGE										
OPERATING FREQUENCY: 5180MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
20	138	5180.0102	1.969	5180.0143	2.761	5180.008	1.544	5180.0109	2.104	PASS
	120	5180.0119	2.297	5180.0142	2.741	5180.0094	1.815	5180.0094	1.815	PASS
	102	5180.012	2.317	5180.0155	2.992	5180.0091	1.757	5180.0104	2.008	PASS



FREQUENCY STABILITY VERSUS TEMP.										
OPERATING FREQUENCY: 5805MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
50	120	5804.9846	-2.653	5804.9779	-3.807	5804.9811	-3.256	5804.9807	-3.325	PASS
40	120	5805.0161	2.773	5805.0129	2.222	5805.0083	1.430	5805.0183	3.152	PASS
30	120	5805.0089	1.533	5805.0145	2.498	5805.0182	3.135	5805.0167	2.877	PASS
20	120	5804.9651	-6.012	5804.9688	-5.375	5804.9712	-4.961	5804.9762	-4.100	PASS
10	120	5804.976	-4.134	5804.975	-4.307	5804.9786	-3.686	5804.9723	-4.772	PASS
0	120	5804.9992	-0.138	5805.0047	0.810	5804.9951	-0.844	5804.9997	-0.052	PASS
-10	120	5804.9977	-0.396	5804.9948	-0.896	5804.9926	-1.275	5804.9957	-0.741	PASS
-20	120	5805.017	2.929	5805.0172	2.963	5805.0253	4.358	5805.0178	3.066	PASS
-30	120	5804.9781	-3.773	5804.9722	-4.789	5804.9759	-4.152	5804.9711	-4.978	PASS

FREQUENCY STABILITY VERSUS VOLTAGE										
OPERATING FREQUENCY: 5805MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
20	138	5804.9669	-5.702	5804.9699	-5.185	5804.971	-4.996	5804.9752	-4.272	PASS
	120	5804.9651	-6.012	5804.9688	-5.375	5804.9712	-4.961	5804.9762	-4.100	PASS
	102	5804.9664	-5.788	5804.97	-5.168	5804.9709	-5.013	5804.9753	-4.255	PASS



**BUREAU
VERITAS**

Test Report No.: RF181120W004-3

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF181120W004-3

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---