


Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11N40_5670	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 12		

Start of Test: 2024-02-27 02:06:23

Test Graph

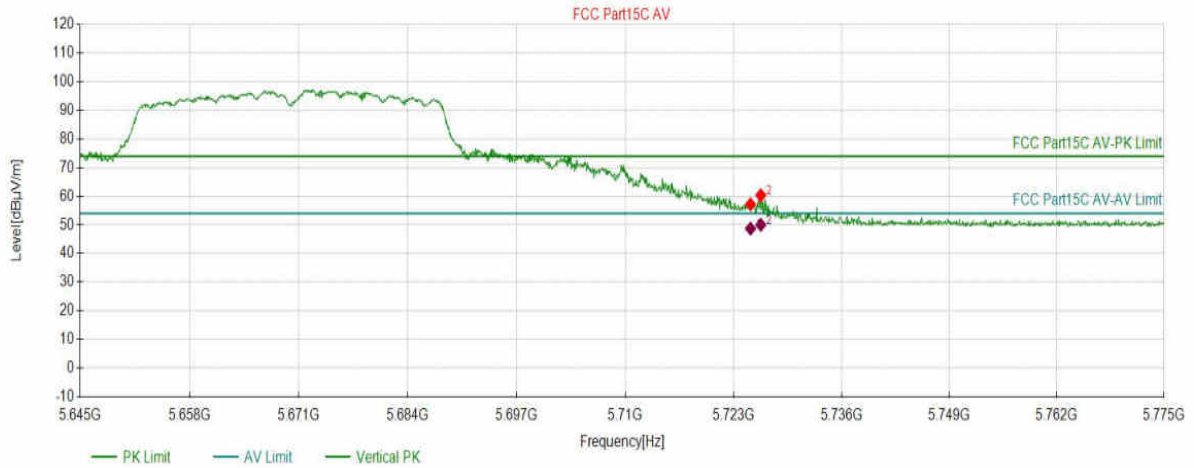

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0550	57.15	17.99	74.00	16.85	150	188	PK	Vertical
2	5726.2906	60.34	18.00	74.00	13.66	150	194	PK	Vertical


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	17.99	48.70	54.00	5.30	150	188	Vertical
2	5726.2906	18.00	50.03	54.00	3.97	150	194	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC20_5180	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:12:49

Test Graph

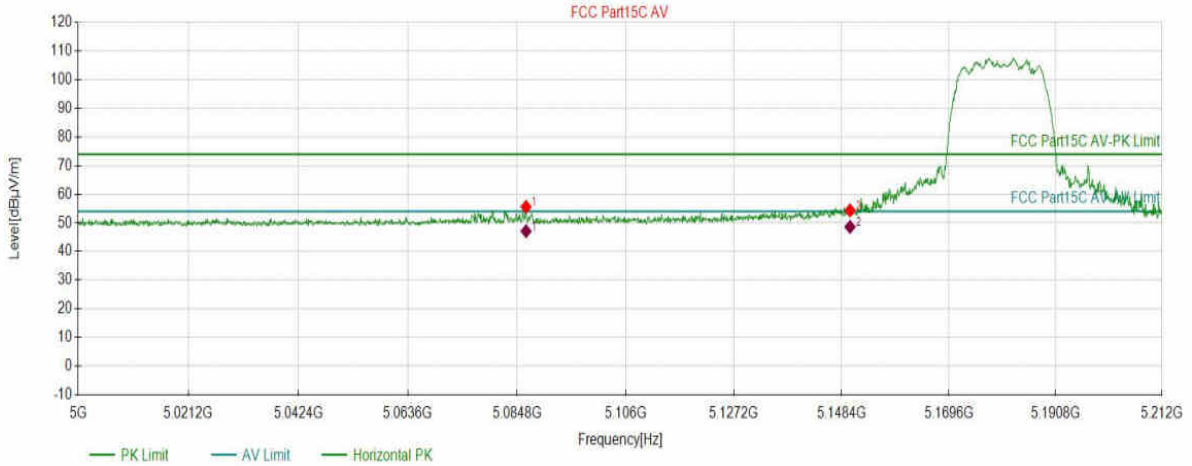

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5086.5393	55.61	16.56	74.00	18.39	150	176	PK	Horizontal
2	5150.0650	54.36	16.46	74.00	19.64	150	171	PK	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5086.5395	16.55	47.09	54.00	6.91	150	177.5	Horizontal
2	5150.0654	16.46	48.61	54.00	5.39	150	173.2	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC20_5180	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:13:37

Test Graph

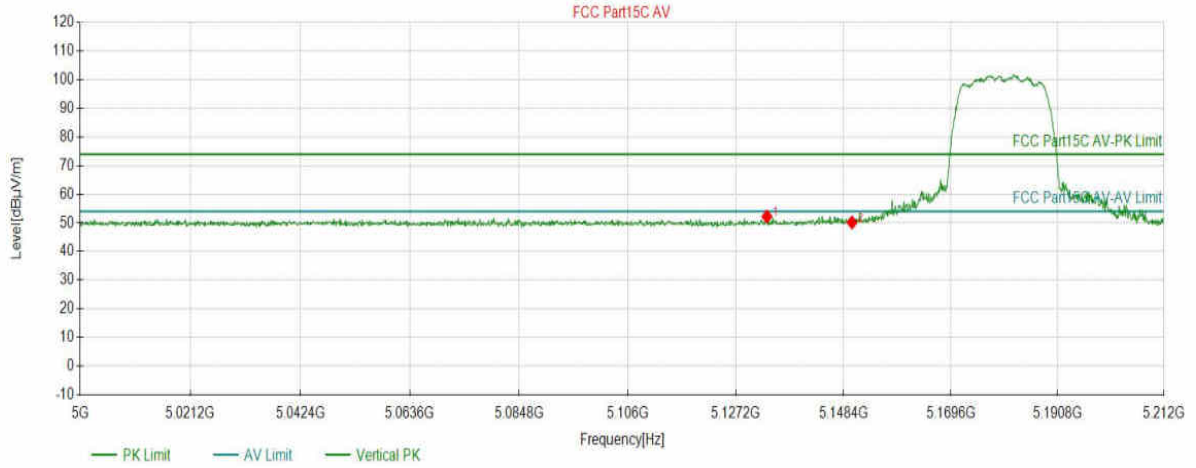

Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5133.3087	52.20	16.51	74.00	21.80	150	249	PK	Vertical
2	5150.0650	50.16	16.46	74.00	23.84	150	249	PK	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC20_5500	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:24:18

Test Graph

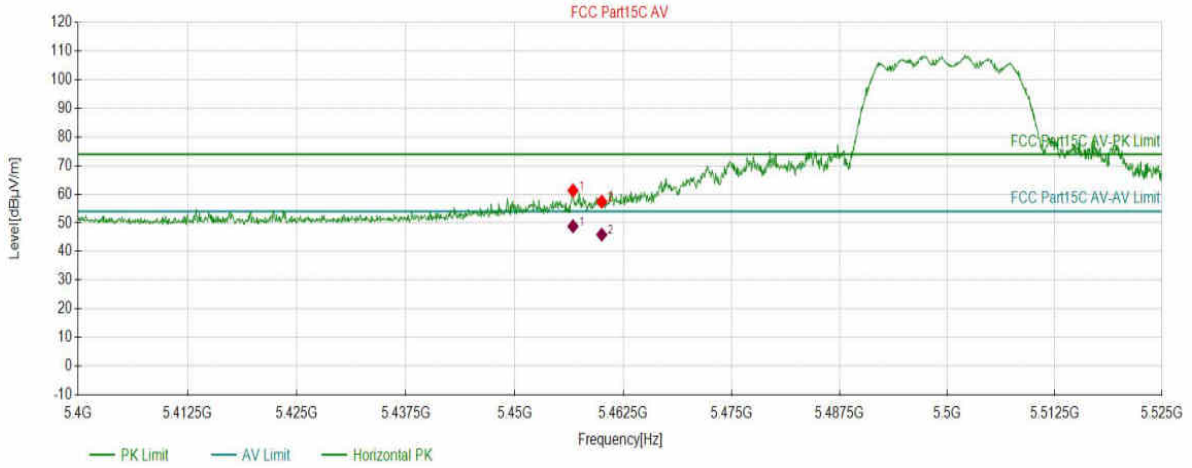

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5456.7159	61.30	16.86	74.00	12.70	150	137	PK	Horizont
2	5460.0300	57.40	16.86	74.00	16.60	150	141	PK	Horizont

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5456.7159	16.86	48.82	54.00	5.18	150	137	Horizontal
2	5460.0300	16.86	45.89	54.00	8.11	150	141	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC20_5500	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:25:06

Test Graph

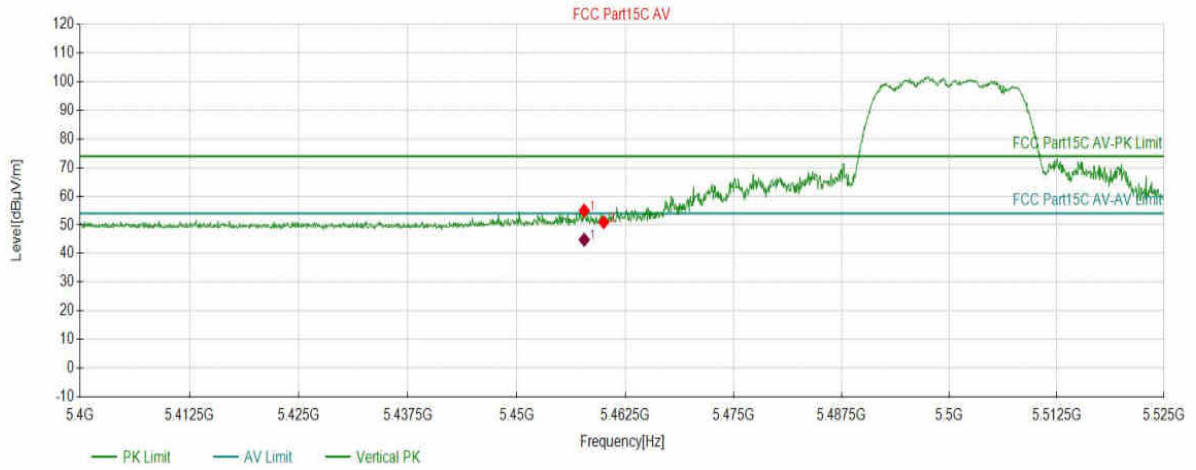

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5457.7789	55.00	16.86	74.00	19.00	150	184	PK	Vertical
2	5460.0300	50.95	16.86	74.00	23.05	150	257	PK	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.7789	16.86	44.81	54.00	9.19	150	184	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC20_5700	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:29:08

Test Graph



Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0325	68.03	17.99	74.00	5.97	150	153	PK	Horizont
2	5726.9835	70.81	18.00	74.00	3.19	150	153	PK	Horizont

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	17.99	49.10	54.00	4.90	150	153	Horizontal
2	5726.9835	18.00	51.92	54.00	2.08	150	153	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC20_5700	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:29:56

Test Graph

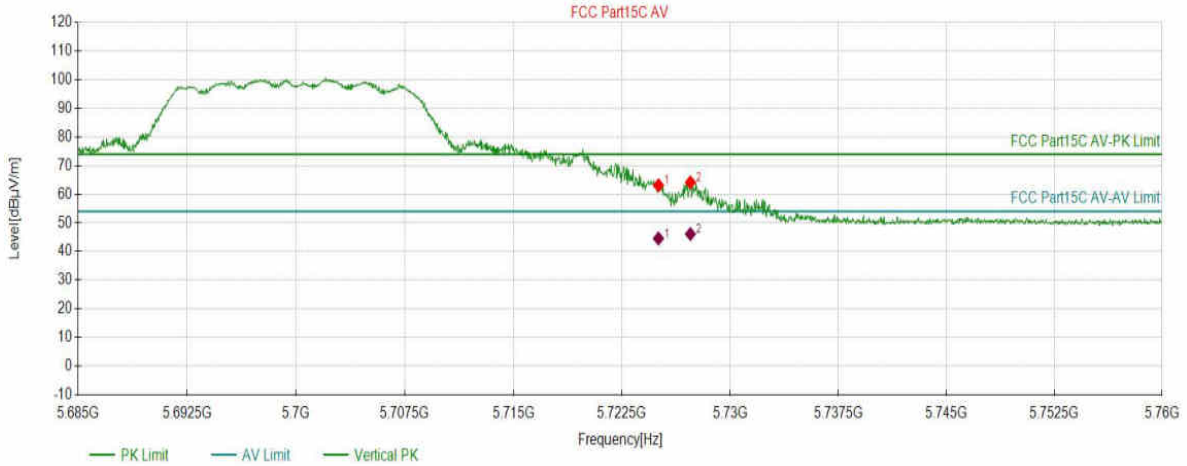

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0325	63.09	17.99	74.00	10.91	150	257	PK	Vertical
2	5727.2461	64.13	18.00	74.00	9.87	150	232	PK	Vertical


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	17.99	44.57	54.00	9.43	150	257	Vertical
2	5727.2461	18.00	46.12	54.00	7.88	150	232	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC40_5190	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:34:16

Test Graph

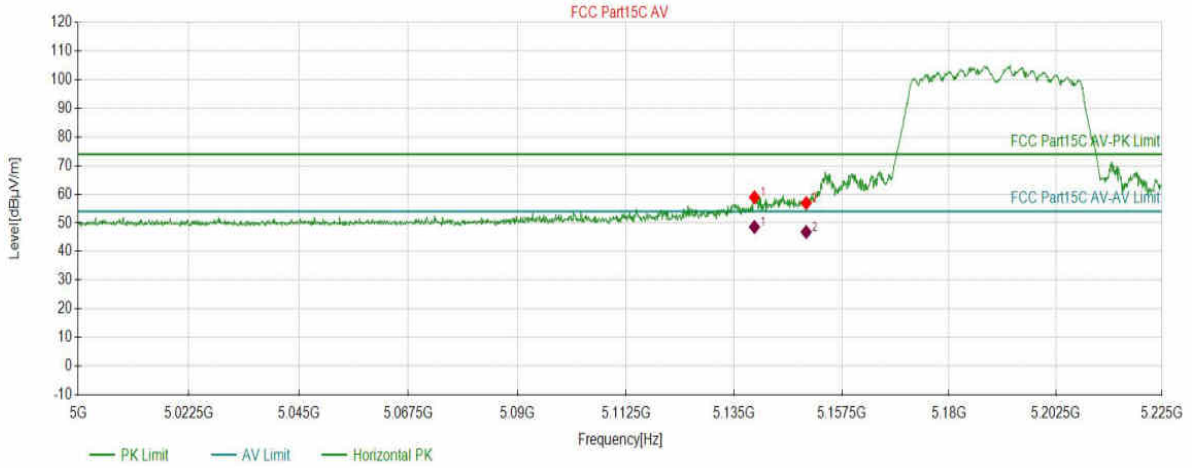

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5139.2321	58.92	16.49	74.00	15.08	150	171	PK	Horizont
2	5150.0375	56.91	16.46	74.00	17.09	150	132	PK	Horizont

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5139.2321	16.49	48.56	54.00	5.44	150	171	Horizontal
2	5150.0375	16.46	46.82	54.00	7.18	150	132	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC40_5190	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:35:05

Test Graph

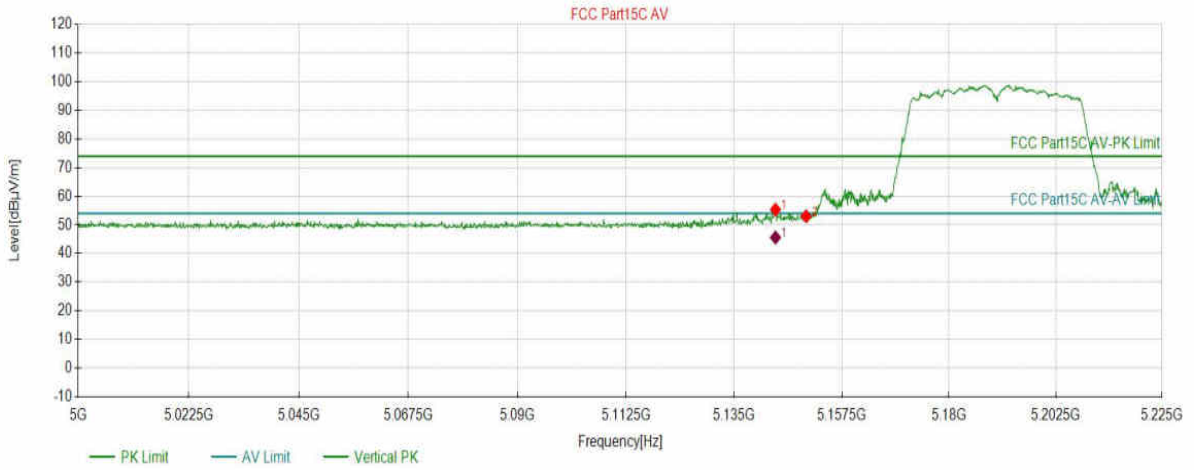

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5143.6218	55.34	16.48	74.00	18.66	150	287	PK	Vertical
2	5150.0375	53.00	16.46	74.00	21.00	150	247	PK	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5143.6218	16.48	45.60	54.00	8.40	150	287	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC40_5310	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:40:40

Test Graph

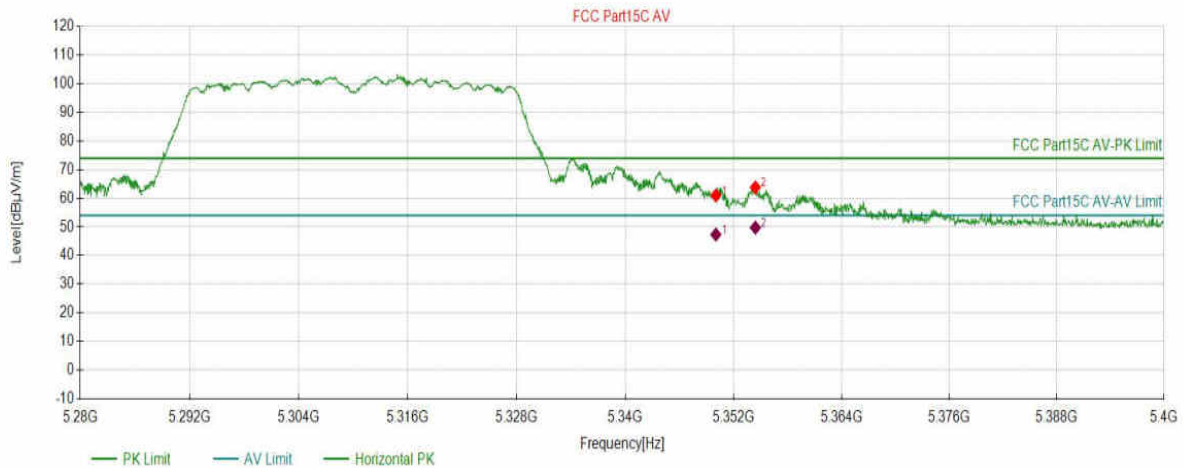

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.0550	60.95	16.65	74.00	13.05	150	176	PK	Horizont
2	5354.4372	63.78	16.67	74.00	10.22	150	138	PK	Horizont


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	16.65	47.34	54.00	6.66	150	176	Horizontal
2	5354.4372	16.67	49.74	54.00	4.26	150	138	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC40_5310	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:41:28

Test Graph

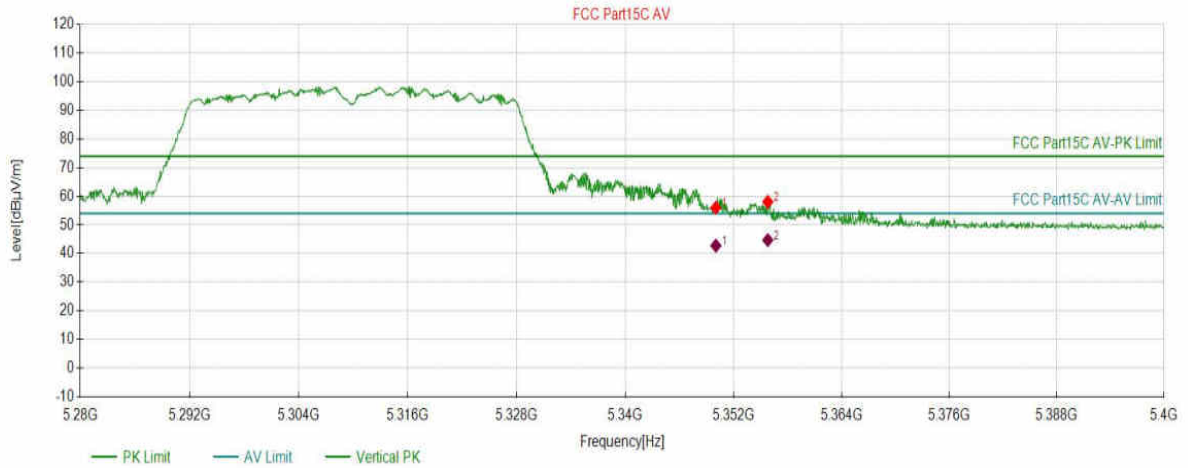

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.0550	56.01	16.65	74.00	17.99	150	181	PK	Vertical
2	5355.8179	58.05	16.67	74.00	15.95	150	181	PK	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	16.65	42.77	54.00	11.23	150	181	Vertical
2	5355.8179	16.67	44.70	54.00	9.30	150	181	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC40_5510	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:45:40

Test Graph

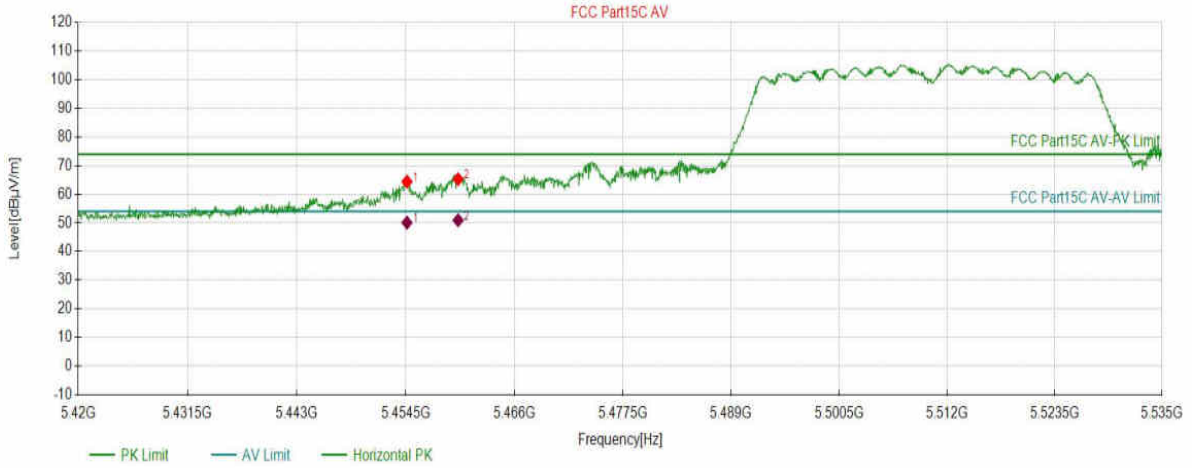

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5454.6323	64.39	16.86	74.00	9.61	150	144	PK	Horizont
2	5460.0400	65.26	16.86	74.00	8.74	150	140	PK	Horizont


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5454.6323	16.86	50.08	54.00	3.92	150	144	Horizontal
2	5460.0400	16.86	50.93	54.00	3.07	150	140	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC40_5510	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-27 02:46:28

Test Graph

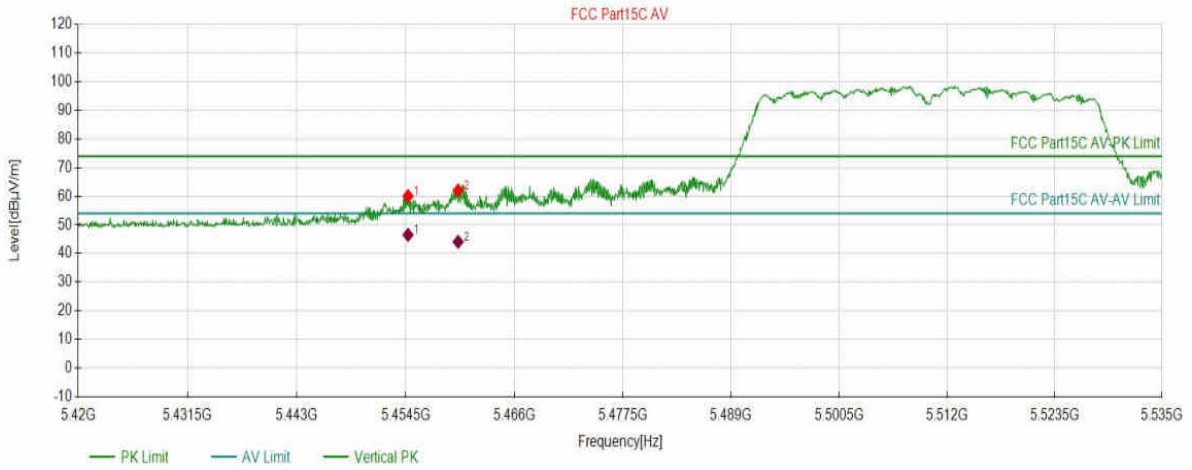

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5454.7474	60.05	16.86	74.00	13.95	150	185	PK	Vertical
2	5460.0400	62.03	16.86	74.00	11.97	150	185	PK	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5454.7474	16.86	46.52	54.00	7.48	150	185	Vertical
2	5460.0400	16.86	44.10	54.00	9.90	150	185	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC40_5670	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 12		

Start of Test: 2024-02-27 02:51:46

Test Graph

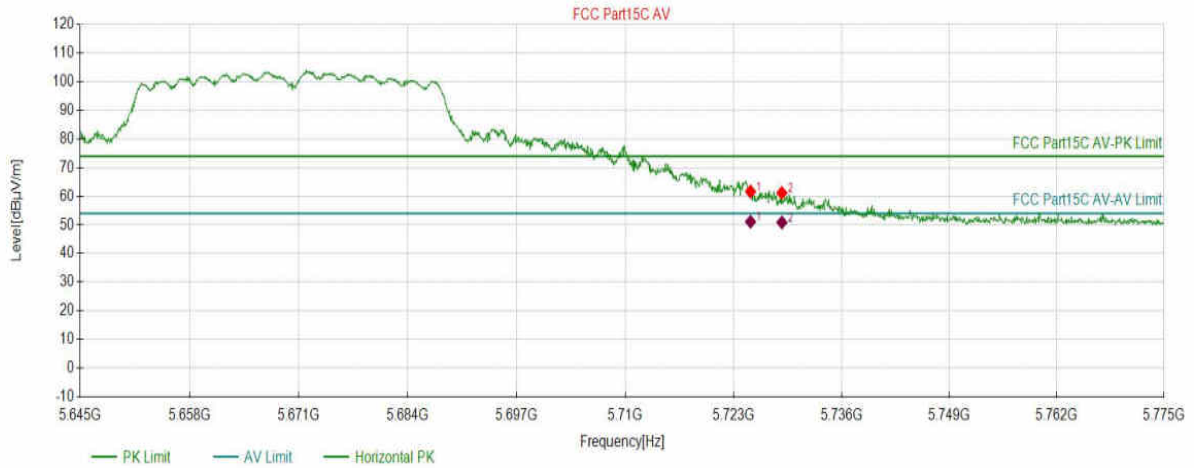

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0550	61.63	17.99	74.00	12.37	150	184	PK	Horizont
2	5728.8269	61.14	18.01	74.00	12.86	150	150	PK	Horizont


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	17.99	51.10	54.00	2.90	150	184	Horizontal
2	5728.8269	18.01	50.87	54.00	3.13	150	150	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11NAC40_5670	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 12		

Start of Test: 2024-02-27 02:52:34

Test Graph

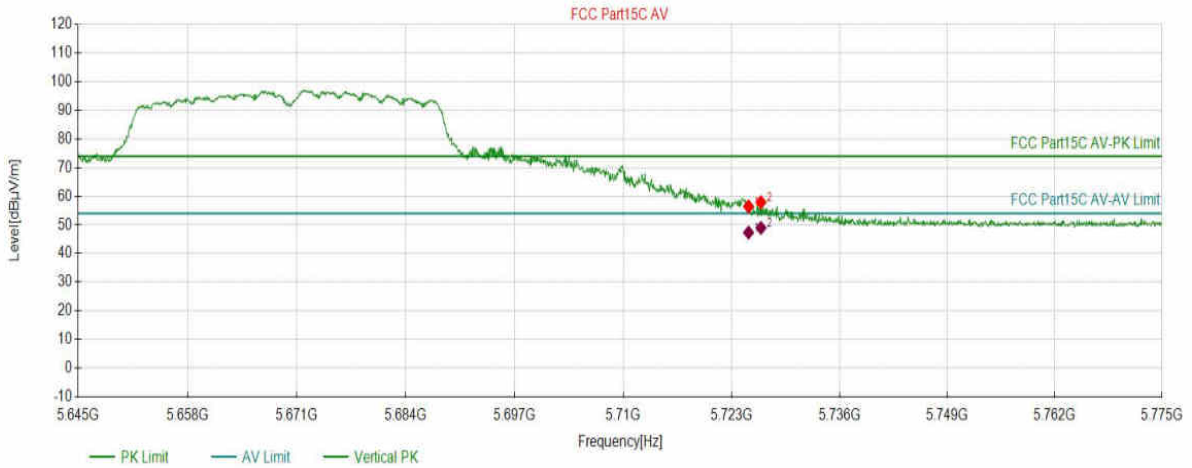

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0550	56.43	17.99	74.00	17.57	150	226	PK	Vertical
2	5726.5508	57.92	18.00	74.00	16.08	150	196	PK	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	17.99	47.32	54.00	6.68	150	226	Vertical
2	5726.5508	18.00	48.96	54.00	5.04	150	196	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC80_5210	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 12		

Start of Test: 2024-03-01 02:17:07

Test Graph

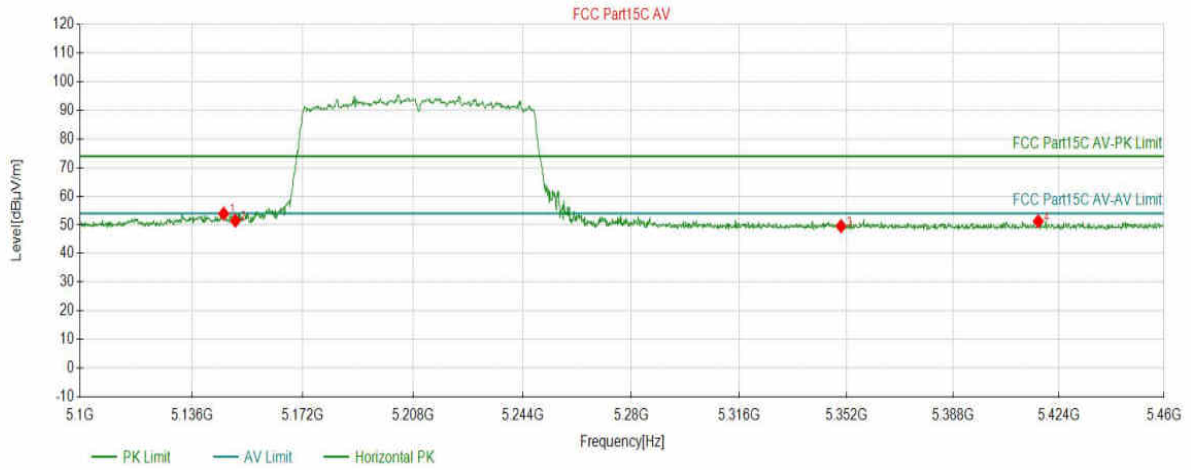

Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5146.2831	53.89	16.47	74.00	20.11	150	155	PK	Horizont
2	5150.0650	51.46	16.46	74.00	22.54	150	155	PK	Horizont
3	5350.1451	49.56	16.65	74.00	24.44	150	133	PK	Horizont
4	5416.9585	51.27	16.85	74.00	22.73	150	4	PK	Horizont

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC80_5210	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 12		

Start of Test: 2024-03-01 02:17:55

Test Graph

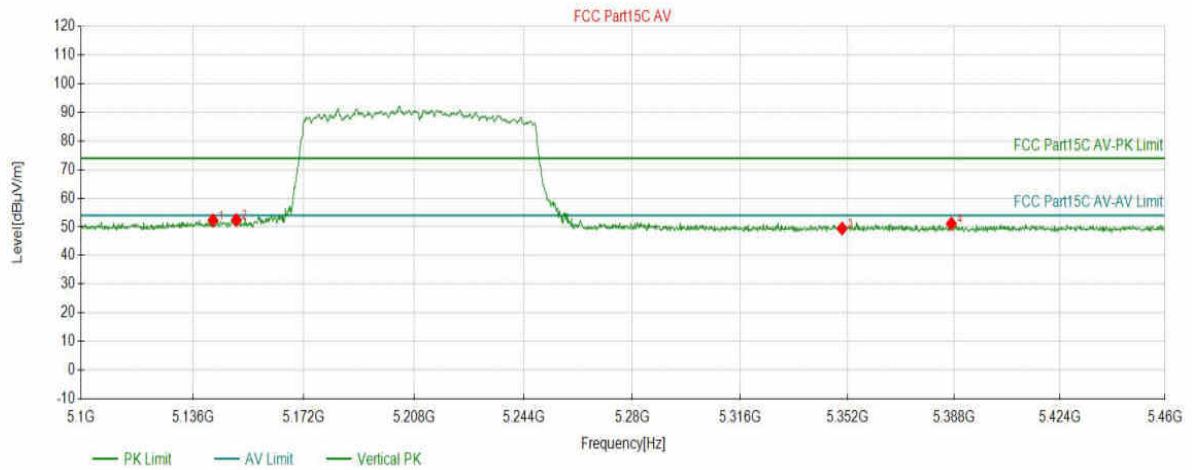

Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5142.5013	52.29	16.48	74.00	21.71	150	252	PK	Vertical
2	5150.0650	52.40	16.46	74.00	21.60	150	307	PK	Vertical
3	5350.1451	49.45	16.65	74.00	24.55	150	289	PK	Vertical
4	5387.0635	51.11	16.79	74.00	22.89	150	243	PK	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC80_5290	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 14		

Start of Test: 2024-03-01 02:21:08

Test Graph

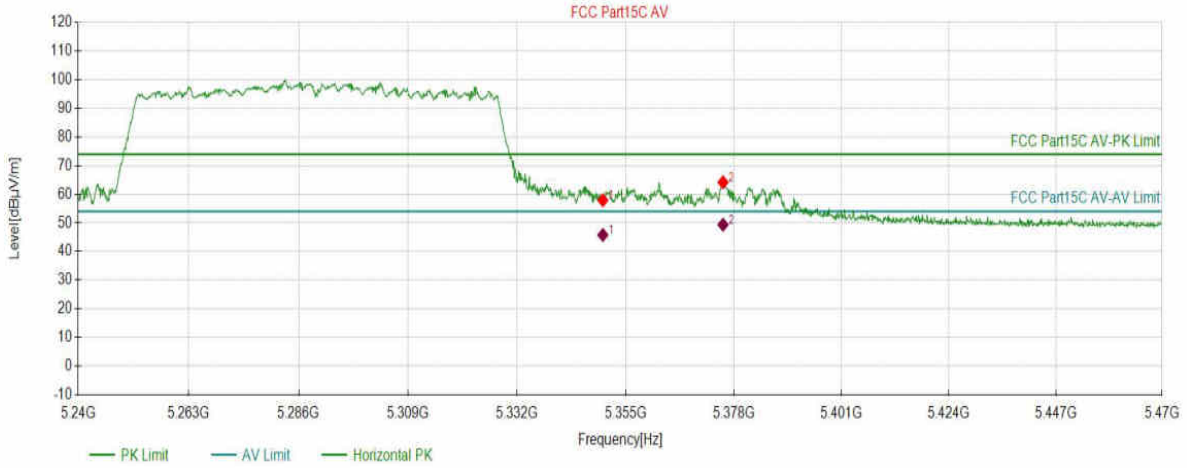

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.1101	57.91	16.65	74.00	16.09	150	151	PK	Horizont
2	5375.6528	64.15	16.75	74.00	9.85	150	160	PK	Horizont


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.1101	16.65	45.78	54.00	8.22	150	151	Horizontal
2	5375.6528	16.75	49.38	54.00	4.62	150	160	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC80_5290	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 14		

Start of Test: 2024-03-01 02:21:57

Test Graph

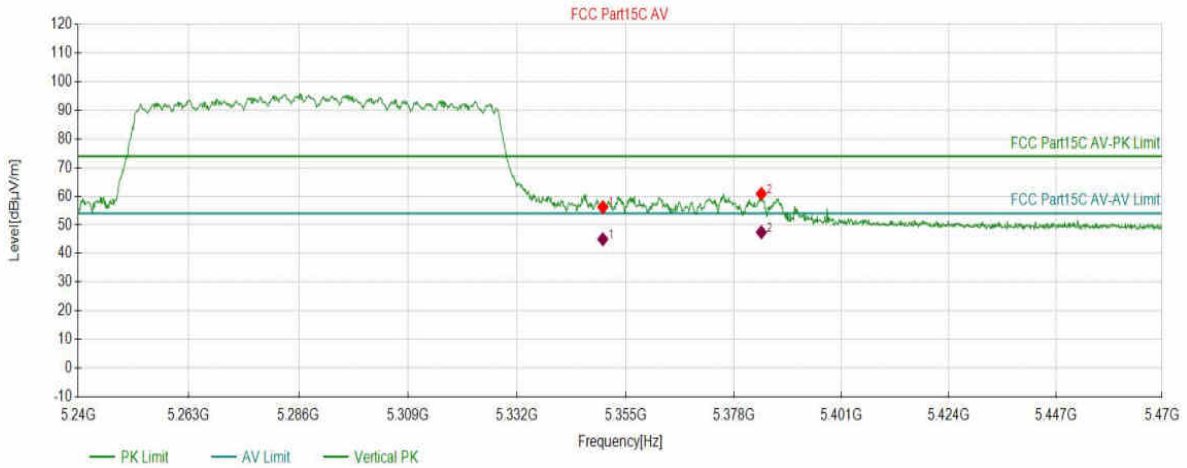

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.1101	56.21	16.65	74.00	17.79	150	1	PK	Vertical
2	5383.8219	60.86	16.78	74.00	13.14	150	354	PK	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.1101	16.65	44.99	54.00	9.01	150	1	Vertical
2	5383.8219	16.78	47.44	54.00	6.56	150	354	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC80_5530	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 12		

Start of Test: 2024-03-01 02:26:16

Test Graph

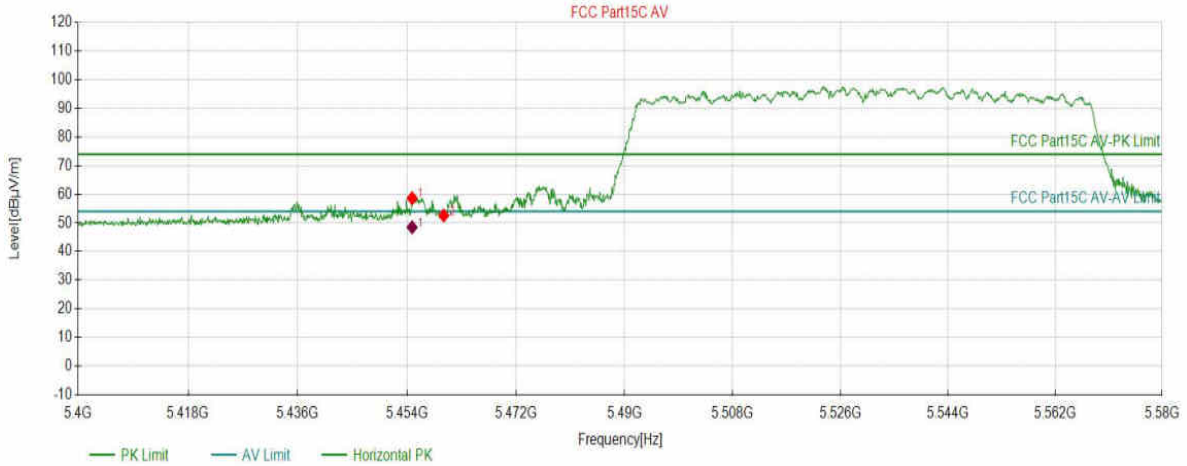

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5454.8374	58.60	16.86	74.00	15.40	150	150	PK	Horizont
2	5460.0600	52.59	16.86	74.00	21.41	150	150	PK	Horizont


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5454.8374	16.86	48.47	54.00	5.53	150	150	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC80_5530	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 12		

Start of Test: 2024-03-01 02:27:04

Test Graph

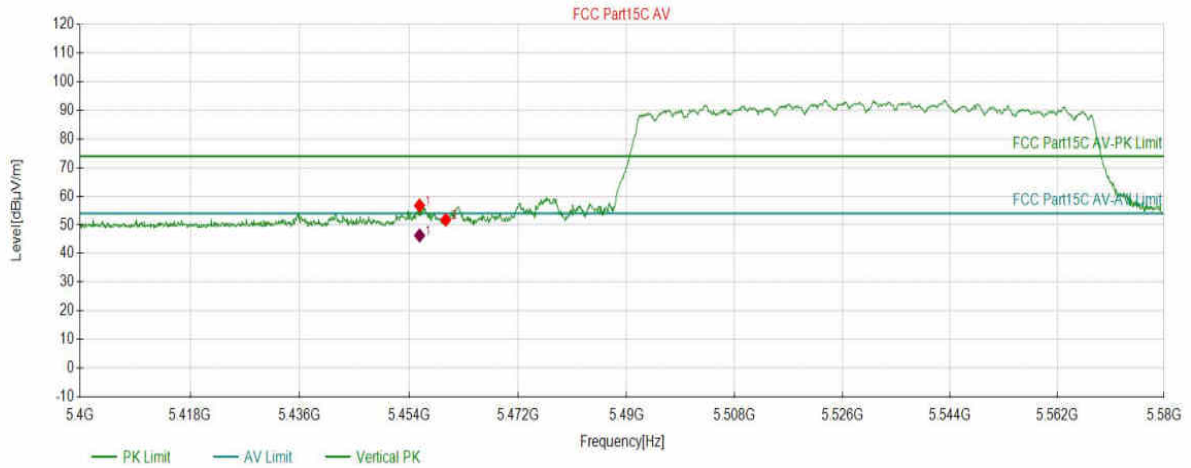

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5455.7379	56.76	16.86	74.00	17.24	150	245	PK	Vertical
2	5460.0600	51.76	16.86	74.00	22.24	150	282	PK	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.7379	16.86	46.30	54.00	7.70	150	245	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC80_5610	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 14		

Start of Test: 2024-03-01 02:34:46

Test Graph

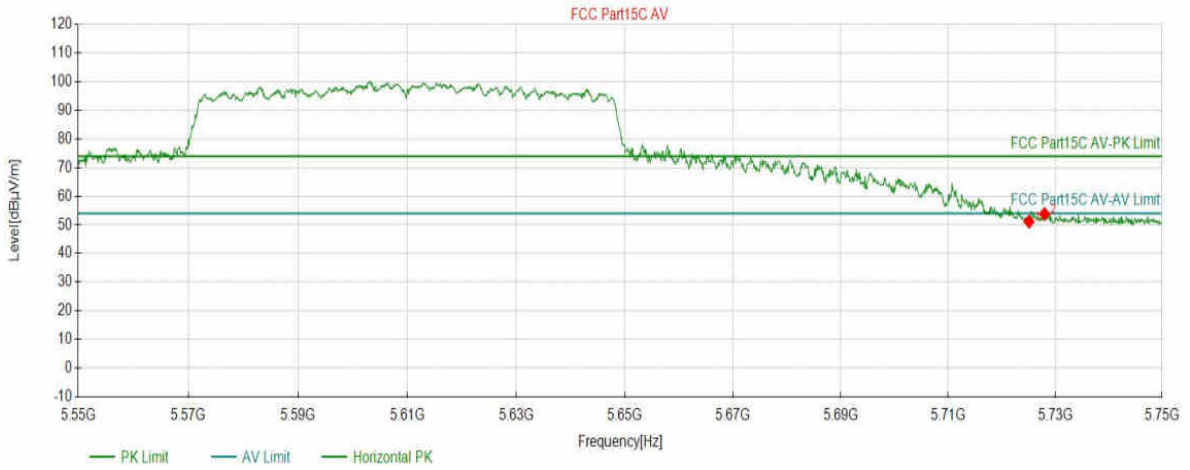


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0875	51.12	17.99	74.00	22.88	150	140	PK	Horizont
2	5727.9890	53.78	18.01	74.00	20.22	150	140	PK	Horizont

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC80_5610	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 14		

Start of Test: 2024-03-01 02:35:35

Test Graph

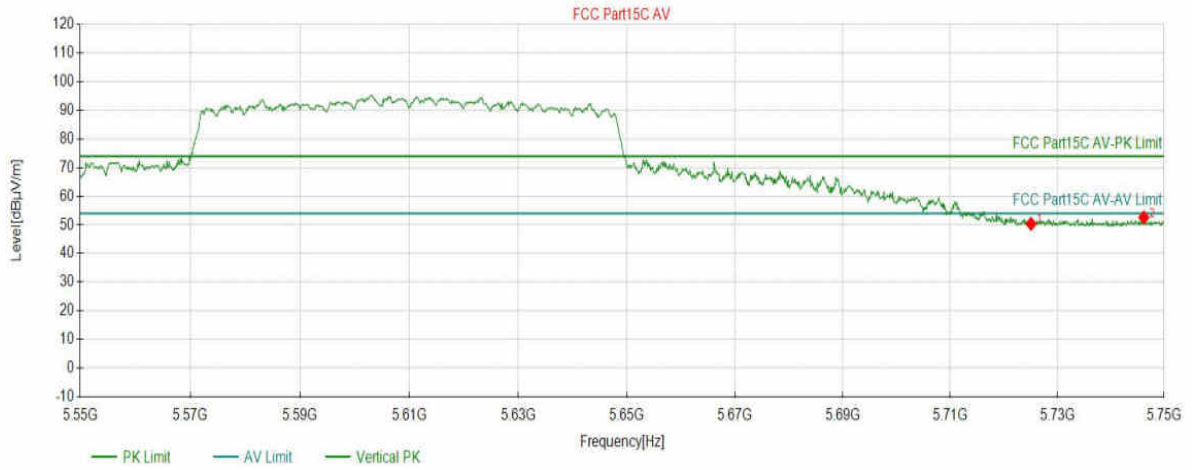


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0875	50.37	17.99	74.00	23.63	150	351	PK	Vertical
2	5746.1981	52.62	18.10	74.00	21.38	150	0	PK	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11A_5700	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 13		

Start of Test: 2024-03-01 02:42:26

Test Graph

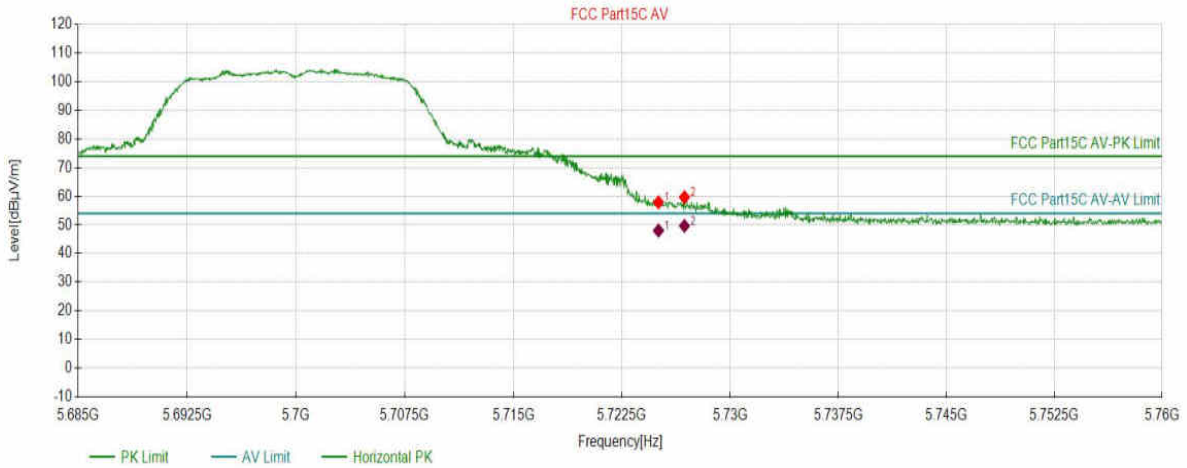

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0325	57.87	17.99	74.00	16.13	150	153	PK	Horizont
2	5726.8334	59.65	18.00	74.00	14.35	150	170	PK	Horizont


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	17.99	48.02	54.00	5.98	150	153	Horizontal
2	5726.8334	18.00	49.65	54.00	4.35	150	170	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11A_5700	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 13		

Start of Test: 2024-03-01 02:46:40

Test Graph

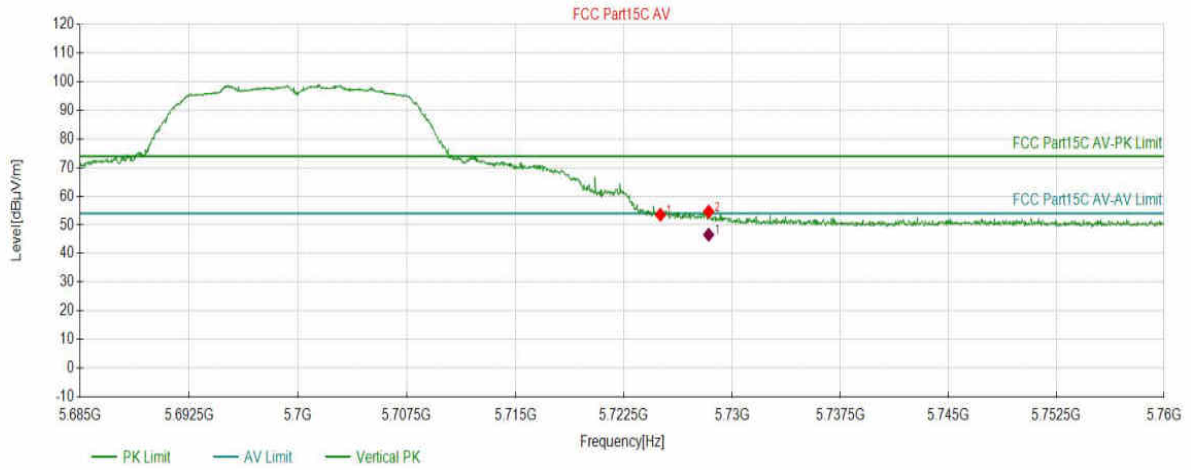

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0325	53.53	17.99	74.00	20.47	150	350	PK	Vertical
2	5728.3717	54.62	18.01	74.00	19.38	150	358	PK	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5728.3717	18.01	46.56	54.00	7.44	150	358	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11N20_5700	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 14		

Start of Test: 2024-03-01 02:51:56

Test Graph

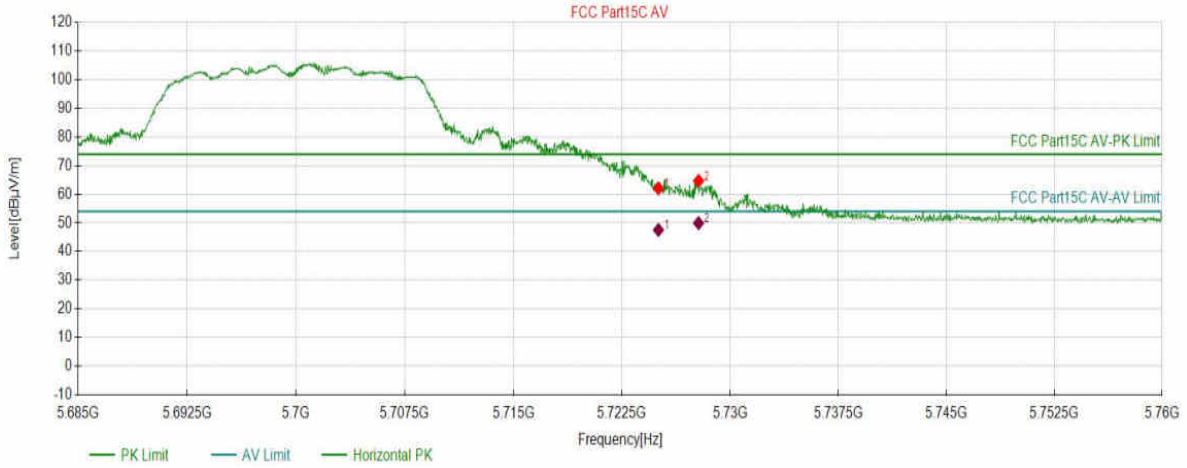

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0325	62.07	17.99	74.00	11.93	150	174	PK	Horizont
2	5727.8089	64.68	18.01	74.00	9.32	150	154	PK	Horizont


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	17.99	47.55	54.00	6.45	150	174	Horizontal
2	5727.8089	18.01	49.92	54.00	4.08	150	154	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11N20_5700	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 14		

Start of Test: 2024-03-01 02:52:44

Test Graph

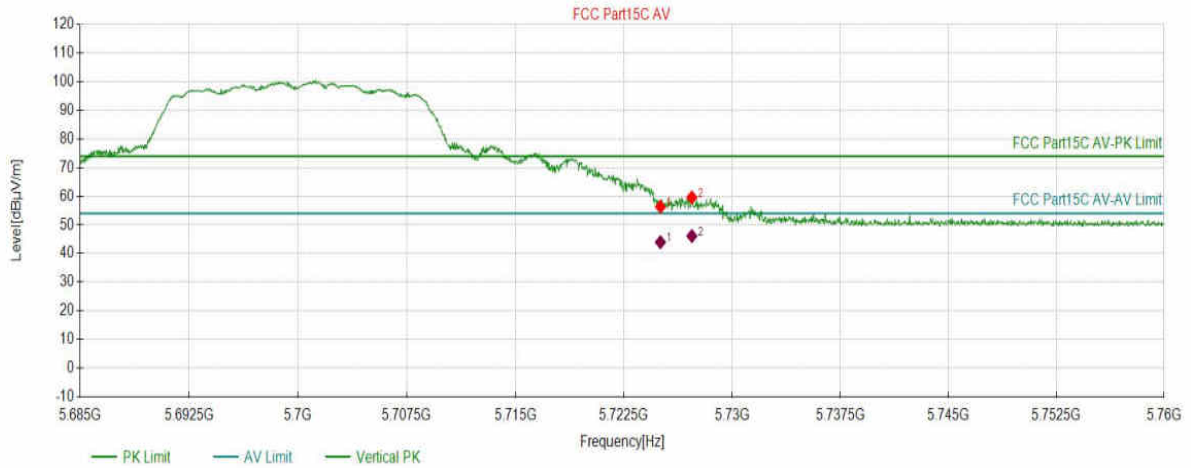

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0325	56.35	17.99	74.00	17.65	150	160	PK	Vertical
2	5727.2086	59.58	18.00	74.00	14.42	150	348	PK	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	17.99	43.97	54.00	10.03	150	160	Vertical
2	5727.2086	18.00	46.11	54.00	7.89	150	348	Vertical

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC20_5320	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 14		

Start of Test: 2024-03-01 02:57:50

Test Graph

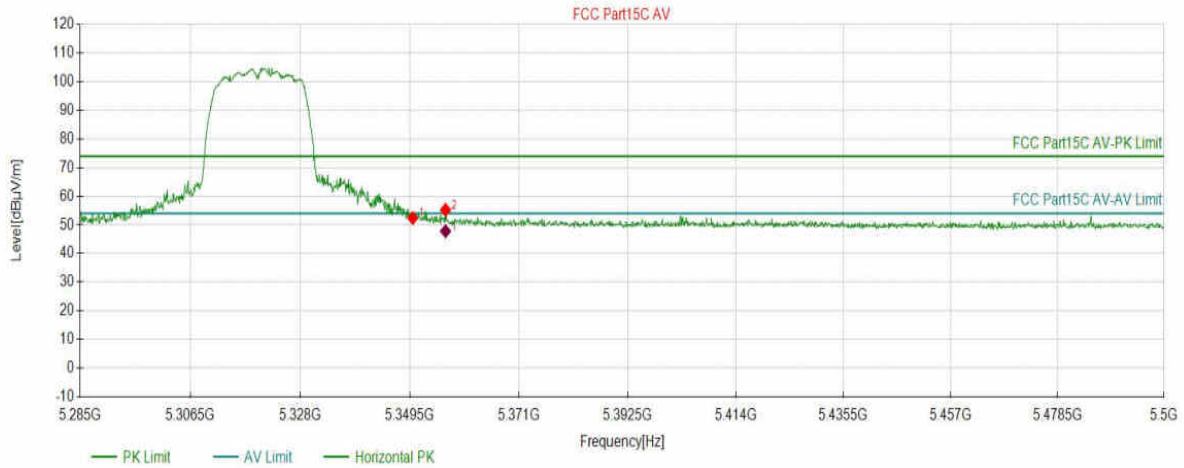

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.0700	52.39	16.65	74.00	21.61	150	174	PK	Horizont
2	5356.5233	55.25	16.67	74.00	18.75	150	148	PK	Horizont

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5356.5233	16.67	47.82	54.00	6.18	150	148	Horizontal

Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP10	SN:	
Mode:	11AC20_5320	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set: 14		

Start of Test: 2024-03-01 02:58:38

Test Graph

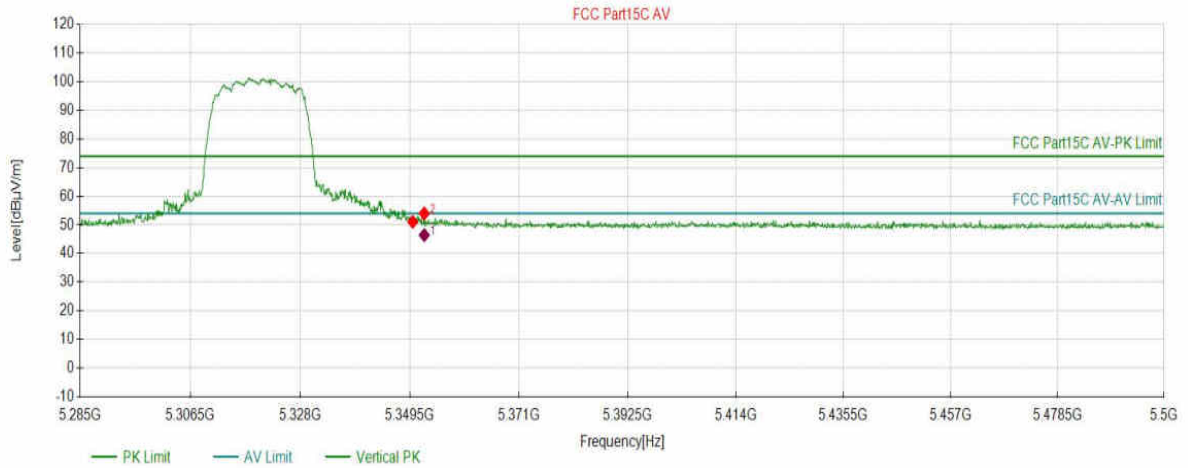


Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.0700	51.05	16.65	74.00	22.95	150	248	PK	Vertical
2	5352.3287	54.00	16.66	74.00	20.00	150	0	PK	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5352.3287	16.66	46.44	54.00	7.56	150	0	Vertical

APPENDIX C - AC Power Line Conducted Emission Test Data

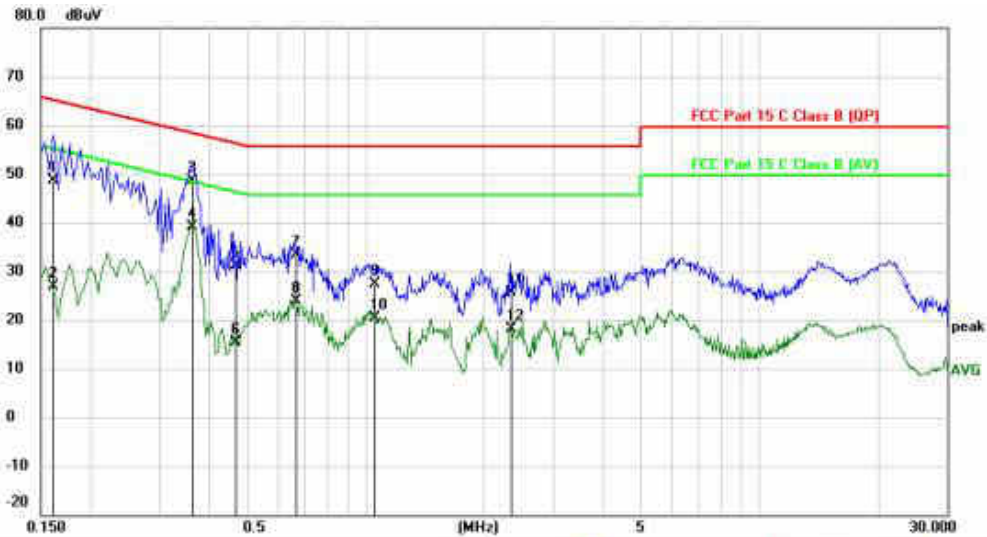


Site: Phase: **N** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60%
 EUT: Tablet
 M/N: MP10-Xenon-V
 Mode: 5G WIFI Mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1609	38.90	9.69	48.59	65.42	-16.83	QP	
2		0.1609	17.21	9.69	26.90	55.42	-28.52	AVG	
3		0.3620	38.80	9.74	48.54	58.68	-10.14	QP	
4	*	0.3620	29.43	9.74	39.17	48.68	-9.51	AVG	
5		0.4663	21.33	9.76	31.09	56.58	-25.49	QP	
6		0.4663	5.50	9.76	15.26	46.58	-31.32	AVG	
7		0.6665	23.61	9.79	33.40	56.00	-22.60	QP	
8		0.6665	13.98	9.79	23.77	46.00	-22.23	AVG	
9		1.0567	17.44	9.83	27.27	56.00	-28.73	QP	
10		1.0567	10.56	9.83	20.39	46.00	-25.61	AVG	
11		2.3360	15.56	9.96	25.52	56.00	-30.48	QP	
12		2.3360	8.24	9.96	18.20	46.00	-27.80	AVG	

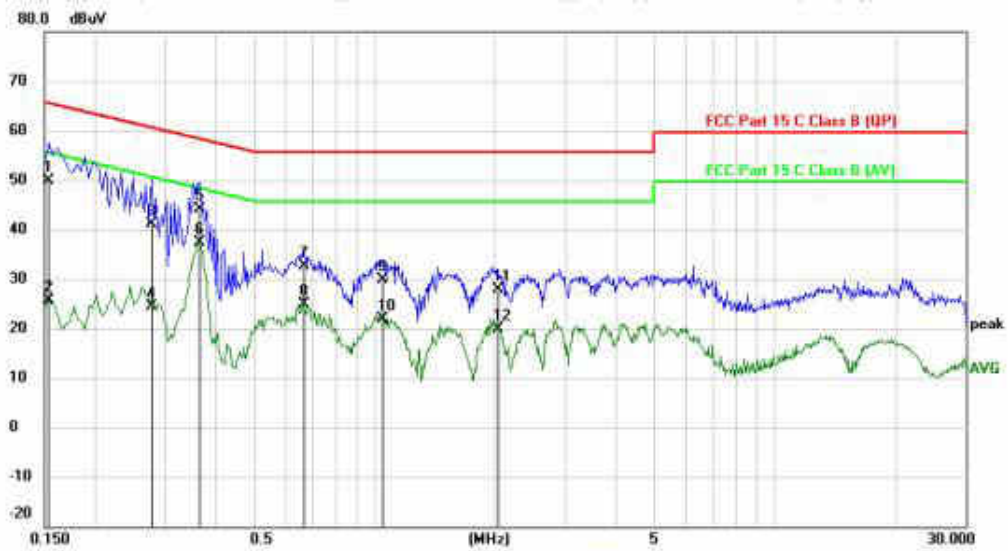


Site: _____ Phase: **L1** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Tablet
 M/N: MP10-Xenon-V
 Mode: 5G WIFI Mode
 Note: _____

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1537	40.13	9.63	49.76	65.80	-16.04	QP	
2		0.1537	15.91	9.63	25.54	55.80	-30.26	AVG	
3		0.2784	31.38	9.66	41.04	60.86	-19.82	QP	
4		0.2784	14.64	9.66	24.30	50.86	-26.56	AVG	
5		0.3665	34.54	9.67	44.21	58.58	-14.37	QP	
6	*	0.3665	27.74	9.67	37.41	48.58	-11.17	AVG	
7		0.6654	22.89	9.71	32.60	56.00	-23.40	QP	
8		0.6654	15.10	9.71	24.81	46.00	-21.19	AVG	
9		1.0472	20.24	9.75	29.99	56.00	-26.01	QP	
10		1.0472	12.07	9.75	21.82	46.00	-24.18	AVG	
11		2.0236	17.98	9.83	27.81	56.00	-28.19	QP	
12		2.0236	10.12	9.83	19.95	46.00	-26.05	AVG	

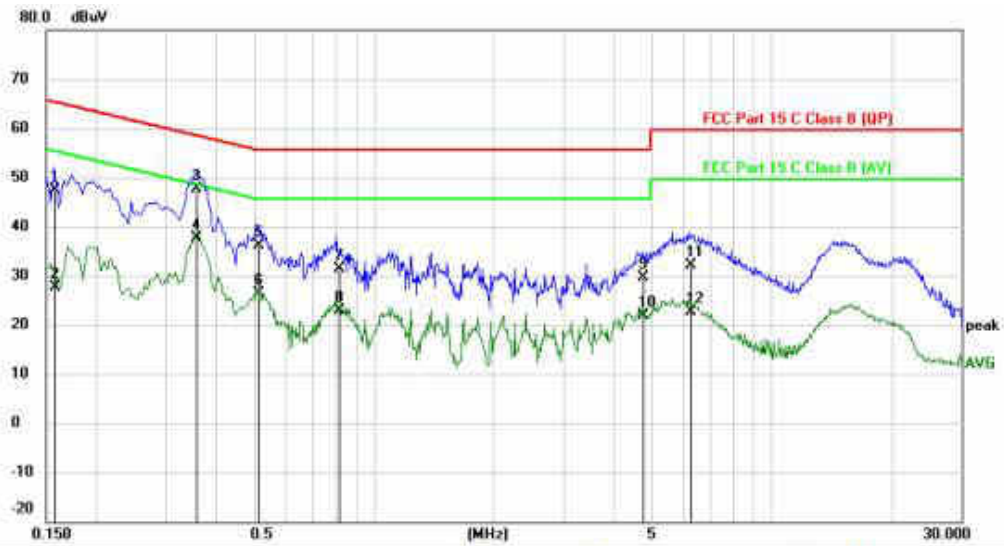


Site: Phase: **N** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Tablet
 M/N: MP16-Xenon-V
 Mode: 5G WIFI Mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1578	37.67	9.69	47.36	65.58	-18.22	QP	
2		0.1578	17.97	9.69	27.66	55.58	-27.92	AVG	
3	*	0.3588	37.88	9.74	47.62	58.76	-11.14	QP	
4		0.3588	27.87	9.74	37.61	48.76	-11.15	AVG	
5		0.5107	26.30	9.76	36.06	56.00	-19.94	QP	
6		0.5107	16.53	9.76	26.29	46.00	-19.71	AVG	
7		0.8187	21.59	9.81	31.40	56.00	-24.60	QP	
8		0.8187	13.08	9.81	22.89	46.00	-23.11	AVG	
9		4.7490	19.47	10.28	29.75	56.00	-26.25	QP	
10		4.7490	11.68	10.28	21.96	46.00	-24.04	AVG	
11		6.2547	21.60	10.50	32.10	60.00	-27.90	QP	
12		6.2547	12.14	10.50	22.64	50.00	-27.36	AVG	

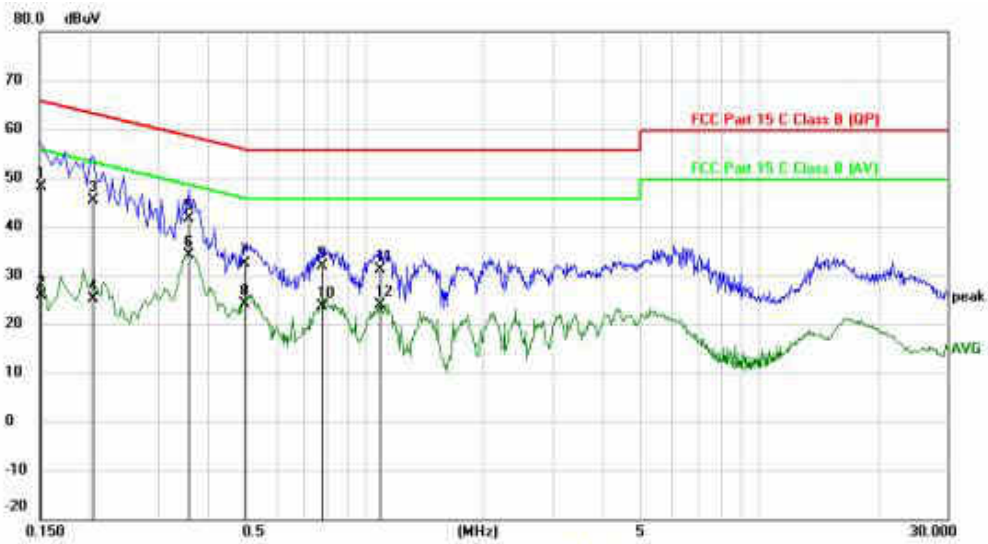


Site: Phase: **L1** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Tablet
 M/N: MP16-Xenon-V
 Mode: 5G WIFI Mode
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1516	38.52	9.63	48.15	65.91	-17.76	QP	
2	0.1516	16.18	9.63	25.81	55.91	-30.10	AVG	
3	0.2048	35.84	9.64	45.48	63.41	-17.93	QP	
4	0.2048	15.51	9.64	25.15	53.41	-28.26	AVG	
5	0.3590	32.06	9.67	41.73	58.75	-17.02	QP	
6 *	0.3590	24.54	9.67	34.21	48.75	-14.54	AVG	
7	0.4949	22.67	9.69	32.36	56.09	-23.73	QP	
8	0.4949	14.46	9.69	24.15	46.09	-21.94	AVG	
9	0.7779	22.12	9.73	31.85	56.00	-24.15	QP	
10	0.7779	13.98	9.73	23.71	46.00	-22.29	AVG	
11	1.0935	21.42	9.75	31.17	56.00	-24.83	QP	
12	1.0935	14.06	9.75	23.81	46.00	-22.19	AVG	

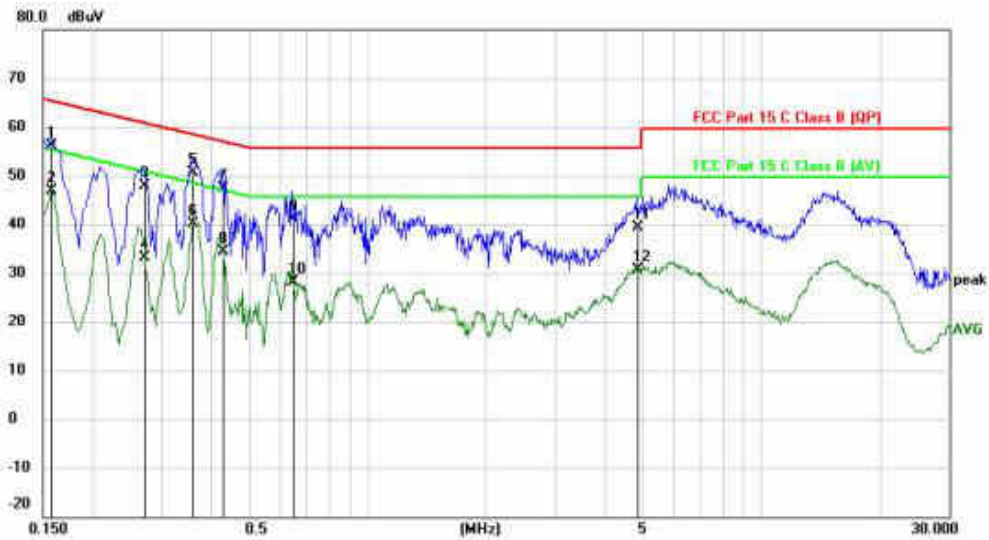

Site: _____ Phase: **N** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Tablet
 M/N: MP24-Xenon-V
 Mode: 5G WIFI Mode
 Note: _____

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1575	46.36	9.69	56.05	65.59	-9.54	QP	
2	0.1575	37.08	9.69	46.77	55.59	-8.82	AVG	
3	0.2716	38.08	9.73	47.81	61.07	-13.26	QP	
4	0.2716	23.34	9.73	33.07	51.07	-18.00	AVG	
5 *	0.3605	40.81	9.74	50.55	58.72	-8.17	QP	
6	0.3605	30.50	9.74	40.24	48.72	-8.48	AVG	
7	0.4297	37.71	9.75	47.46	57.26	-9.80	QP	
8	0.4297	24.61	9.75	34.36	47.26	-12.90	AVG	
9	0.6454	31.43	9.78	41.21	56.00	-14.79	QP	
10	0.6454	18.33	9.78	28.11	46.00	-17.89	AVG	
11	4.8711	29.03	10.30	39.33	56.00	-16.67	QP	
12	4.8711	20.39	10.30	30.69	46.00	-15.31	AVG	

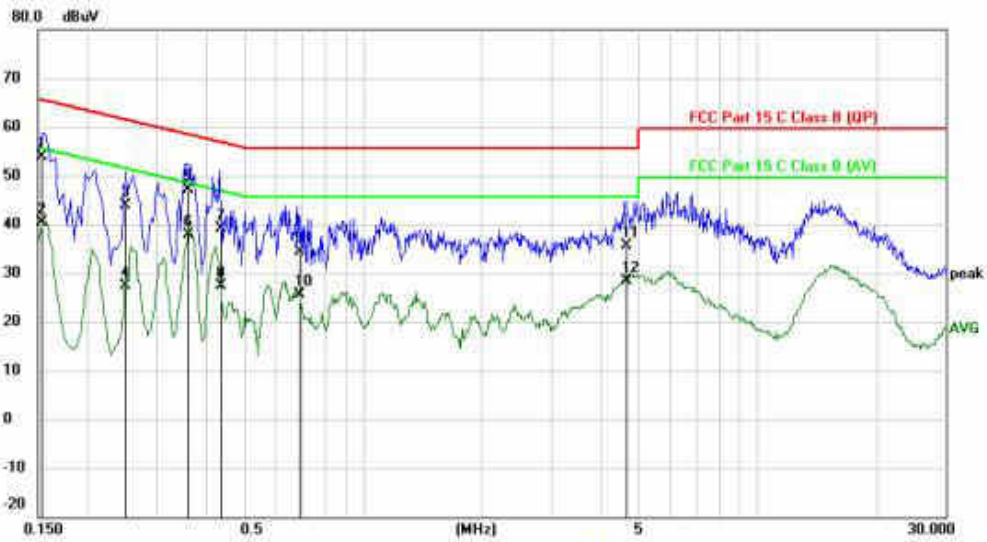

Site: Phase: **L1** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Tablet
 M/N: MP24-Xenon-V
 Mode: 5G WIFI Mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1533	44.16	9.63	53.79	65.82	-12.03	QP	
2		0.1533	30.70	9.63	40.33	55.82	-15.49	AVG	
3		0.2506	34.20	9.65	43.85	61.74	-17.89	QP	
4		0.2506	17.77	9.65	27.42	51.74	-24.32	AVG	
5		0.3597	37.43	9.67	47.10	58.74	-11.64	QP	
6	*	0.3597	28.23	9.67	37.90	48.74	-10.84	AVG	
7		0.4355	29.55	9.68	39.23	57.15	-17.92	QP	
8		0.4355	17.69	9.68	27.37	47.15	-19.78	AVG	
9		0.6869	24.66	9.71	34.37	56.00	-21.63	QP	
10		0.6869	15.90	9.71	25.61	46.00	-20.39	AVG	
11		4.6715	25.41	10.17	35.58	56.00	-20.42	QP	
12		4.6715	18.24	10.17	28.41	46.00	-17.59	AVG	

END OF REPORT