


# Test Report

Project Information			
EUT:	Tablet	Environment:	22.0°C 42%
Model:	Xenon MP16	SN:	
Mode:	11B_2437	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 15		

Start of Test: 2024-02-28 00:45:40

## Test Graph

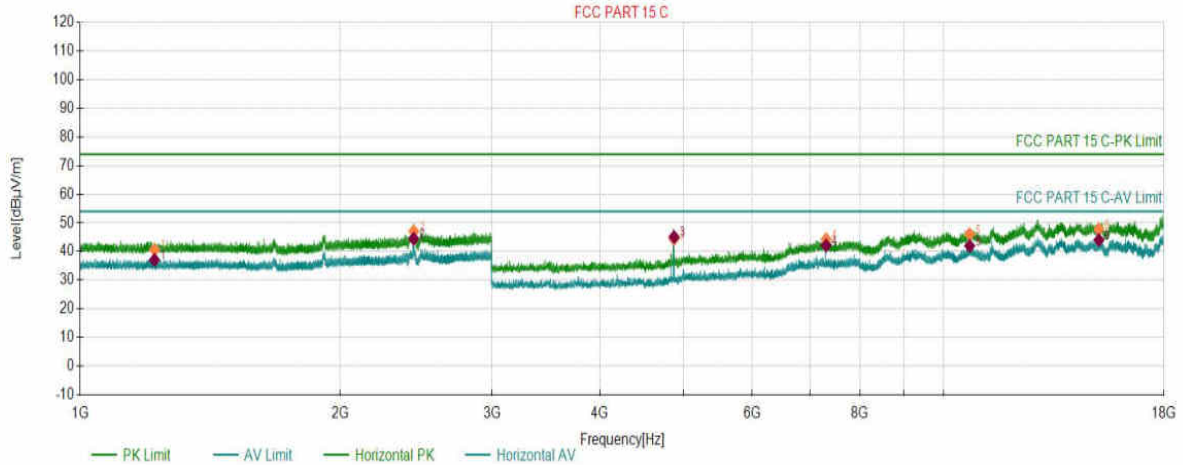

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1219.4110	2.35	40.63	74.00	33.37	150	192	Horizontal
2	2434.4717	7.32	47.08	74.00	26.92	150	30	Horizontal
3	4873.5937	-9.50	44.38	74.00	29.62	150	164	Horizontal
4	7309.7155	-1.17	44.28	74.00	29.72	150	204	Horizontal
5	10719.3860	5.49	46.08	74.00	27.92	150	307	Horizontal
6	15130.3565	11.69	47.81	74.00	26.19	150	50	Horizontal

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1219.4110	2.35	37.07	54.00	16.93	150	192	Horizontal
2	2434.4717	7.32	44.47	54.00	9.53	150	30	Horizontal
3	4873.5937	-9.50	45.09	54.00	8.91	150	164	Horizontal
4	7309.7155	-1.17	42.11	54.00	11.89	150	204	Horizontal
5	10719.3860	5.49	41.95	54.00	12.05	150	307	Horizontal
6	15130.3565	11.69	44.02	54.00	9.98	150	50	Horizontal

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.0°C 42%
Model:	Xenon MP16	SN:	
Mode:	11B_2437	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 15		

Start of Test: 2024-02-28 00:47:20

## Test Graph

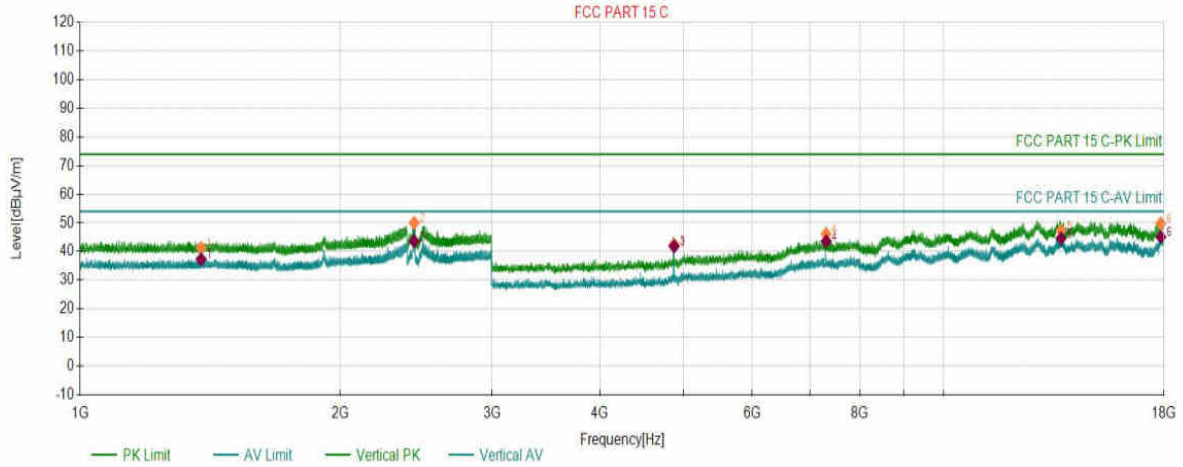

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1380.8190	3.14	41.27	74.00	32.73	150	137	Vertical
2	2437.2719	7.34	50.05	74.00	23.95	150	212	Vertical
3	4873.5937	-9.50	42.43	74.00	31.57	150	176	Vertical
4	7311.9656	-1.18	46.15	74.00	27.85	150	216	Vertical
5	13681.2841	10.84	47.32	74.00	26.68	150	216	Vertical
6	17846.2423	14.16	49.83	74.00	24.17	150	226	Vertical

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1380.8190	3.14	37.32	54.00	16.68	150	137	Vertical
2	2437.2719	7.34	43.60	54.00	10.40	150	212	Vertical
3	4873.5937	-9.50	41.82	54.00	12.18	150	176	Vertical
4	7311.9656	-1.18	43.59	54.00	10.41	150	216	Vertical
5	13681.2841	10.84	44.60	54.00	9.40	150	216	Vertical
6	17846.2423	14.16	45.10	54.00	8.90	150	226	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.0°C 42%
Model:	Xenon MP16	SN:	
Mode:	11B_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 13		

Start of Test: 2024-02-28 00:51:37

## Test Graph

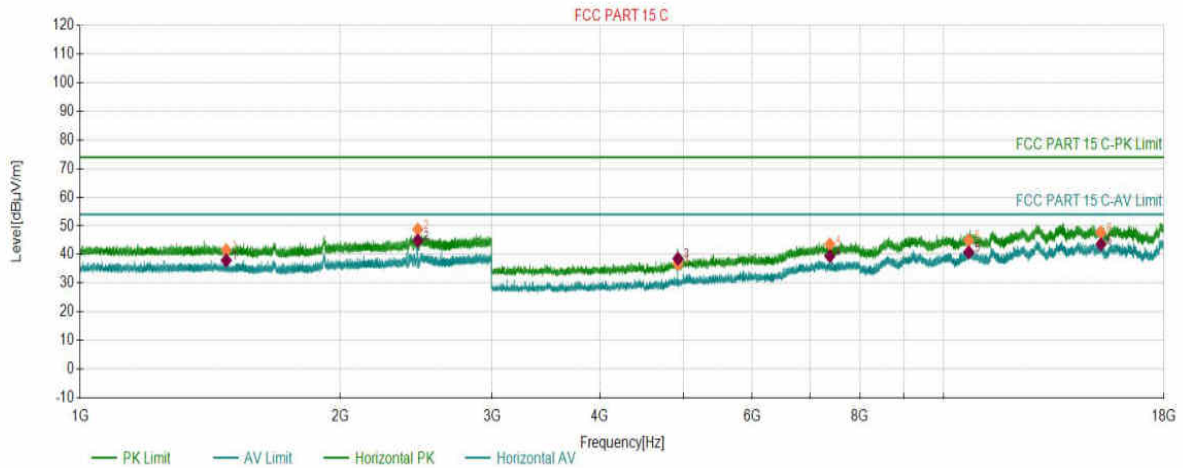

PK Final Data List								
NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1476.3238	3.36	41.51	74.00	32.49	150	352	Horizontal
2	2460.8730	7.48	48.76	74.00	25.24	150	182	Horizontal
3	4923.8462	-9.16	36.68	74.00	37.32	150	165	Horizontal
4	7384.7192	-1.63	43.55	74.00	30.45	150	194	Horizontal
5	10693.1347	5.42	44.93	74.00	29.07	150	126	Horizontal
6	15215.8608	12.29	47.67	74.00	26.33	150	234	Horizontal


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1476.3238	3.36	37.97	54.00	16.03	150	352	Horizontal
2	2460.8730	7.48	44.89	54.00	9.11	150	182	Horizontal
3	4923.8462	-9.16	38.56	54.00	15.44	150	165	Horizontal
4	7384.7192	-1.63	39.43	54.00	14.57	150	194	Horizontal
5	10693.1347	5.42	40.82	54.00	13.18	150	126	Horizontal
6	15215.8608	12.29	43.59	54.00	10.41	150	234	Horizontal

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.0°C 42%
Model:	Xenon MP16	SN:	
Mode:	11B_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 13		

Start of Test: 2024-02-28 00:53:18

## Test Graph

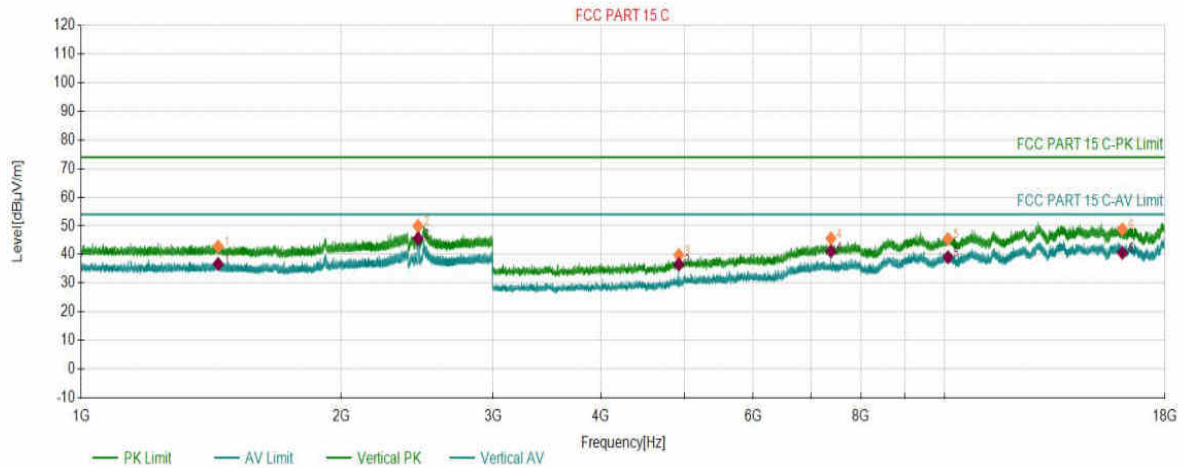

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1441.1221	3.31	42.83	74.00	31.17	150	205	Vertical
2	2455.4728	7.45	49.96	74.00	24.04	150	138	Vertical
3	4923.0962	-9.16	39.84	74.00	34.16	150	164	Vertical
4	7386.2193	-1.64	45.62	74.00	28.38	150	202	Vertical
5	10090.1045	4.71	45.47	74.00	28.53	150	40	Vertical
6	16063.4032	10.97	48.84	74.00	25.16	150	2	Vertical

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1441.1221	3.31	36.71	54.00	17.29	150	205	Vertical
2	2455.4728	7.45	45.59	54.00	8.41	150	138	Vertical
3	4923.0962	-9.16	36.58	54.00	17.42	150	164	Vertical
4	7386.2193	-1.64	41.14	54.00	12.86	150	202	Vertical
5	10090.1045	4.71	39.06	54.00	14.94	150	40	Vertical
6	16063.4032	10.97	40.61	54.00	13.39	150	2	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.0°C 42%
Model:	Xenon MP16	SN:	
Mode:	11B_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-28 01:05:07

## Test Graph

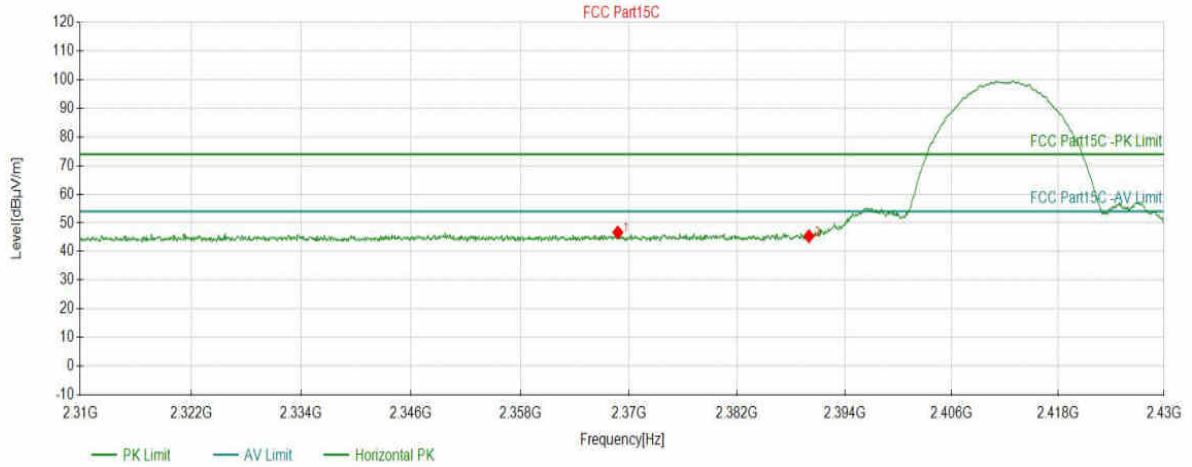


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2368.7694	46.66	5.67	74.00	27.34	150	158	PK	Horizont
2	2390.0200	45.38	5.65	74.00	28.62	150	215	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.0°C 42%
Model:	Xenon MP16	SN:	
Mode:	11B_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-28 01:05:55

## Test Graph

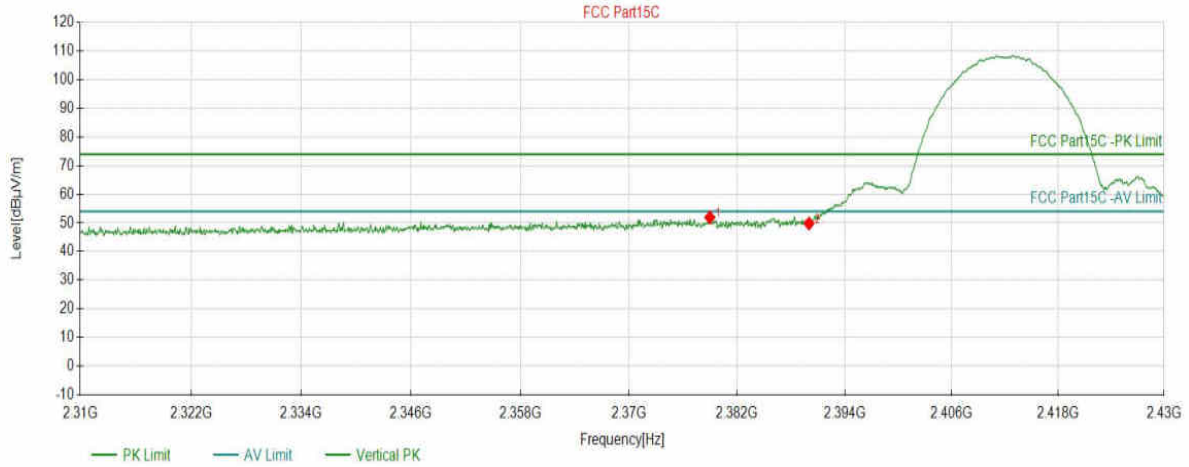


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2378.9745	51.94	5.66	74.00	22.06	150	142	PK	Vertical
2	2390.0200	49.78	5.65	74.00	24.22	150	134	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.0°C 42%
Model:	Xenon MP16	SN:	
Mode:	11B_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 13		

Start of Test: 2024-02-28 01:08:29

## Test Graph

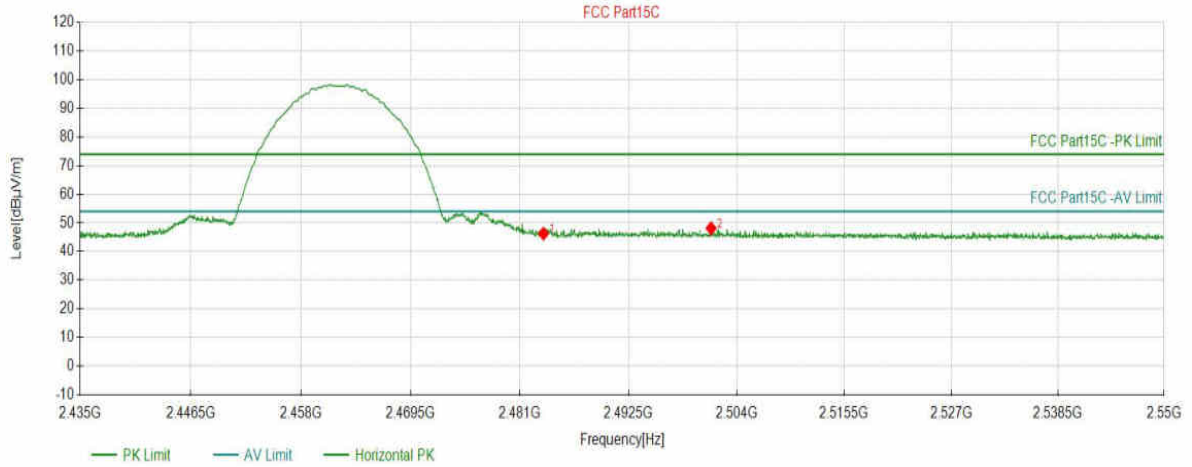


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	46.24	6.24	74.00	27.76	150	214	PK	Horizont
2	2501.3004	48.14	6.36	74.00	25.86	150	238	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.0°C 42%
Model:	Xenon MP16	SN:	
Mode:	11B_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 13		

Start of Test: 2024-02-28 01:09:29

## Test Graph

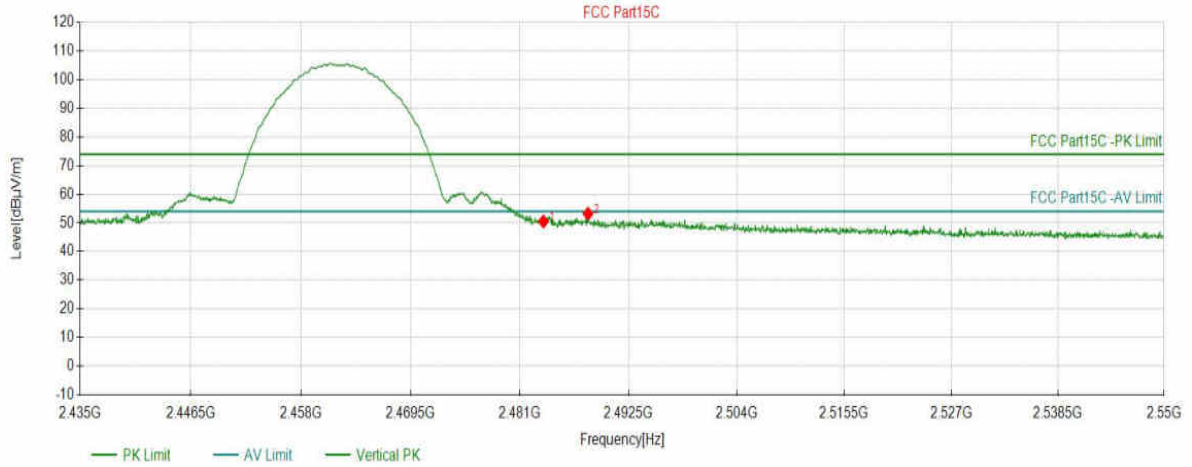

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	50.51	6.24	74.00	23.49	150	126	PK	Vertical
2	2488.2244	53.21	6.28	74.00	20.79	150	129	PK	Vertical




# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11G_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 12		

Start of Test: 2024-03-01 21:52:14

## Test Graph

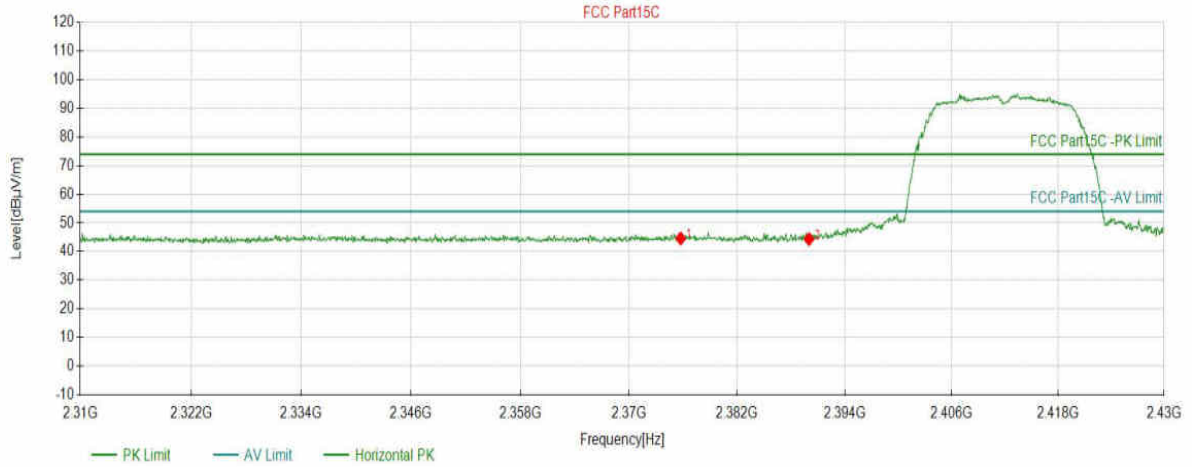


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2375.7329	44.56	5.66	74.00	29.44	150	6	PK	Horizont
2	2390.0200	44.33	5.65	74.00	29.67	150	36	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11G_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 12		

Start of Test: 2024-03-01 21:53:04

## Test Graph

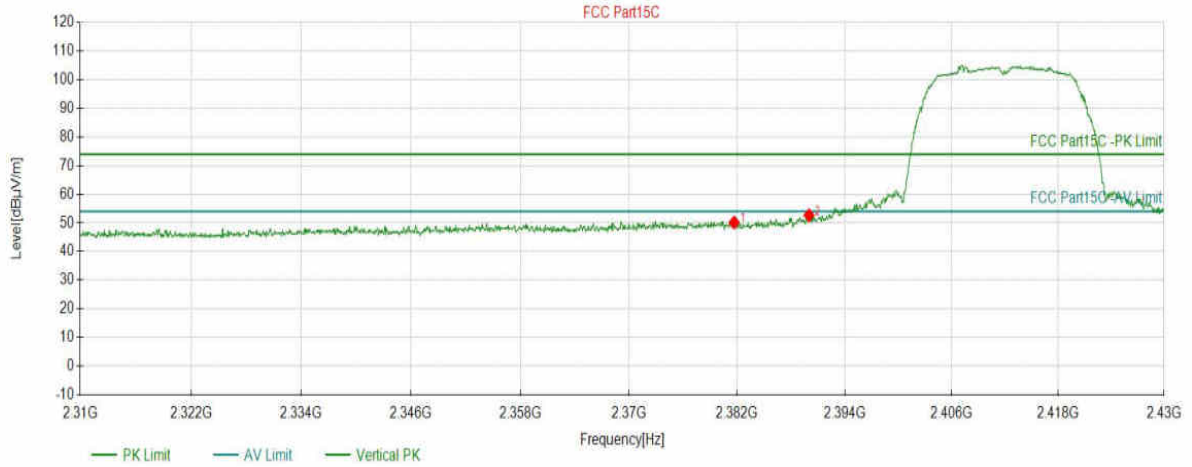


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2381.6758	50.13	5.66	74.00	23.87	150	43	PK	Vertical
2	2390.0200	52.66	5.65	74.00	21.34	150	140	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11G_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 11		

Start of Test: 2024-03-01 21:56:01

## Test Graph

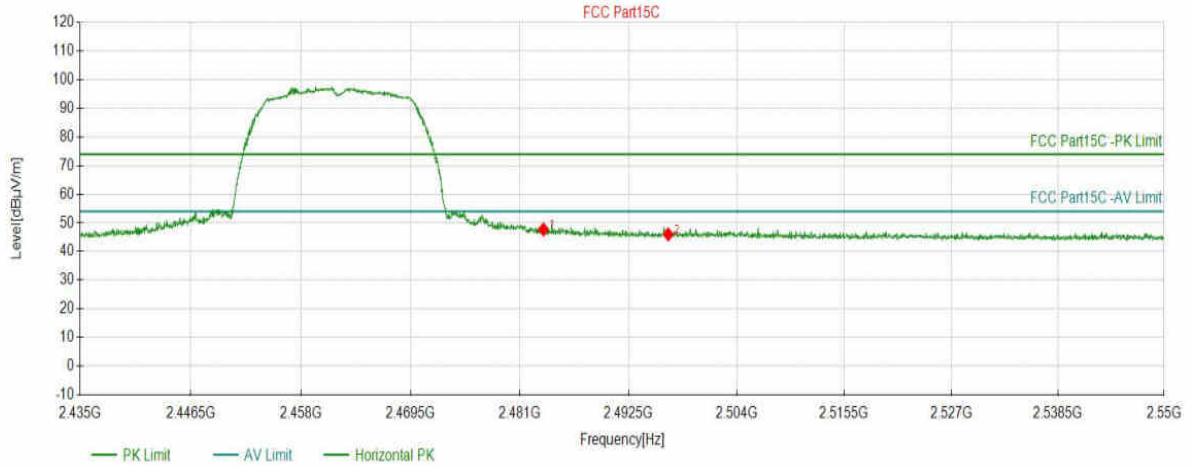


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	47.69	6.24	74.00	26.31	150	231	PK	Horizont
2	2496.7372	46.00	6.34	74.00	28.00	150	94	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11G_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 11		

Start of Test: 2024-03-01 21:57:02

## Test Graph

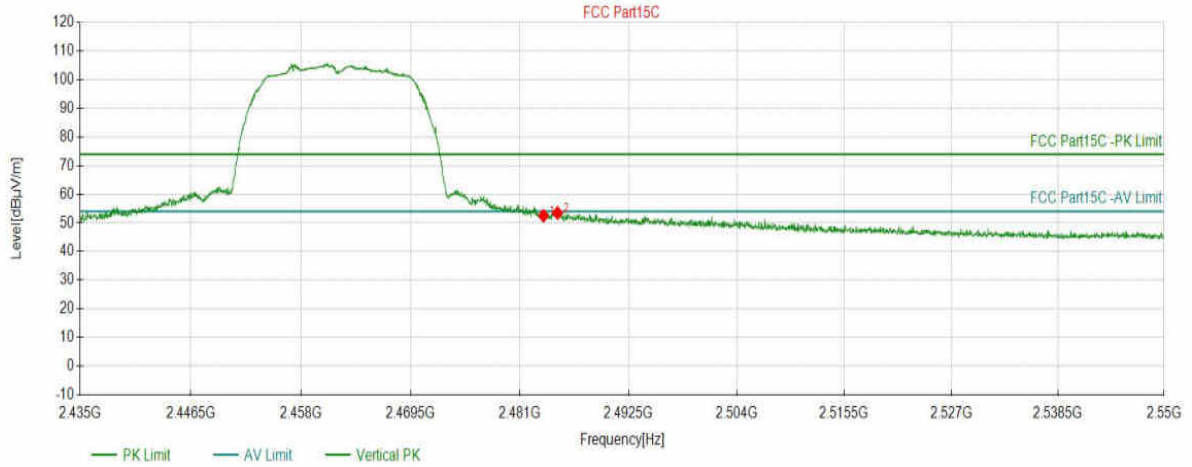


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	52.51	6.24	74.00	21.49	150	207	PK	Vertical
2	2485.0033	53.45	6.25	74.00	20.55	150	121	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11N20_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-03-01 22:00:35

## Test Graph

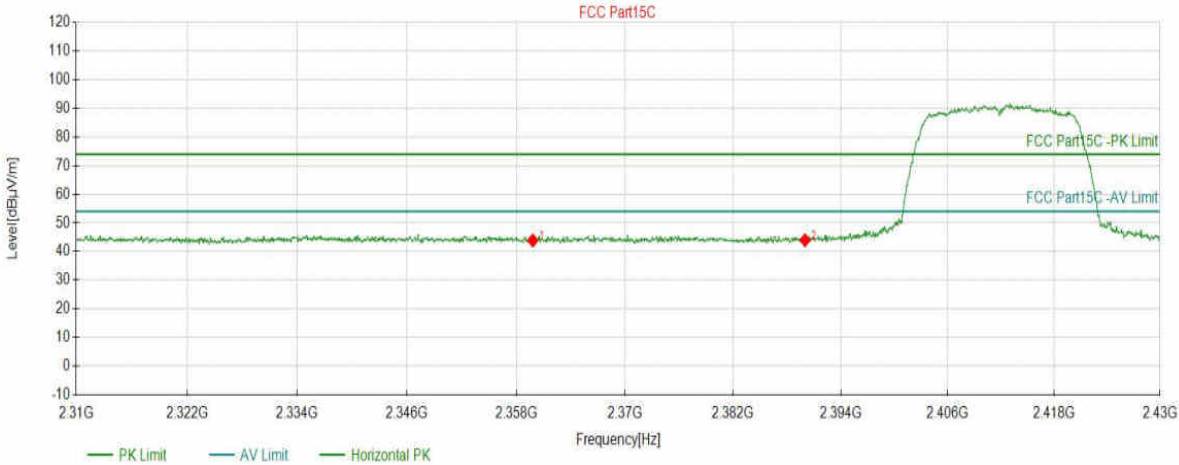


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2359.8249	43.84	5.68	74.00	30.16	150	88	PK	Horizont
2	2390.0200	43.97	5.65	74.00	30.03	150	70	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11N20_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-03-01 22:01:23

## Test Graph

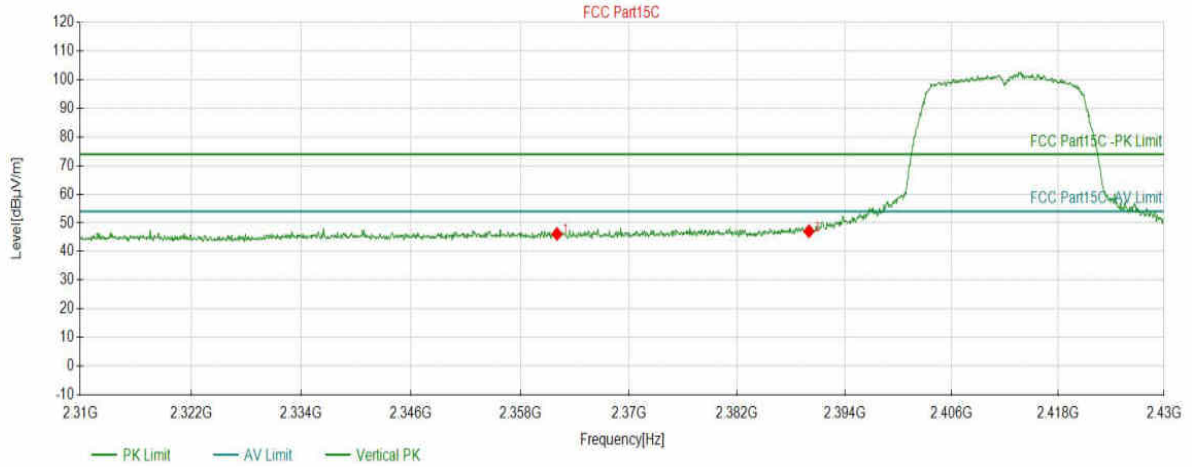


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2362.0460	46.13	5.68	74.00	27.87	150	208	PK	Vertical
2	2390.0200	47.10	5.65	74.00	26.90	150	199	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11N20_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-03-01 22:04:01

## Test Graph

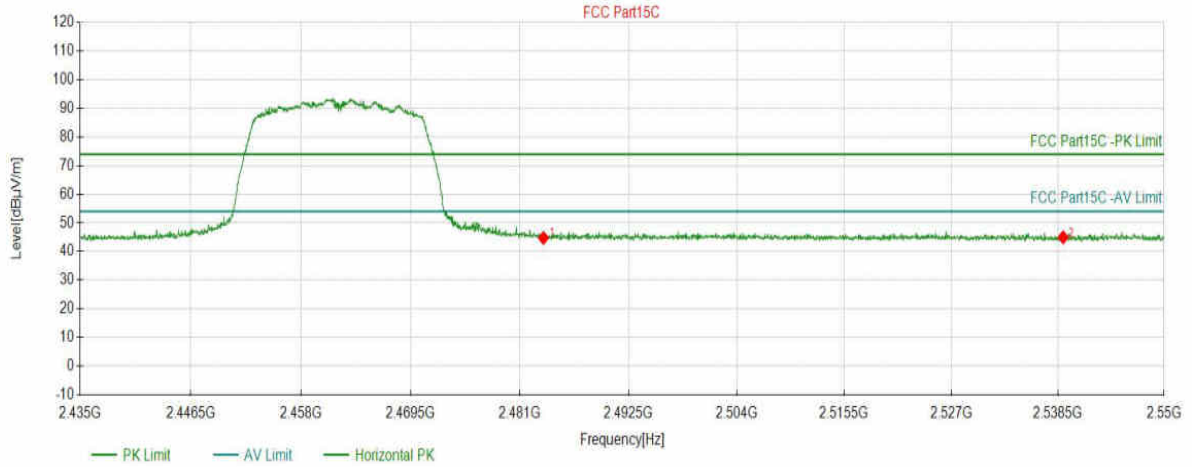


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	44.74	6.24	74.00	29.26	150	209	PK	Horizont
2	2539.0714	44.96	6.45	74.00	29.04	150	266	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11N20_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-03-01 22:05:02

## Test Graph

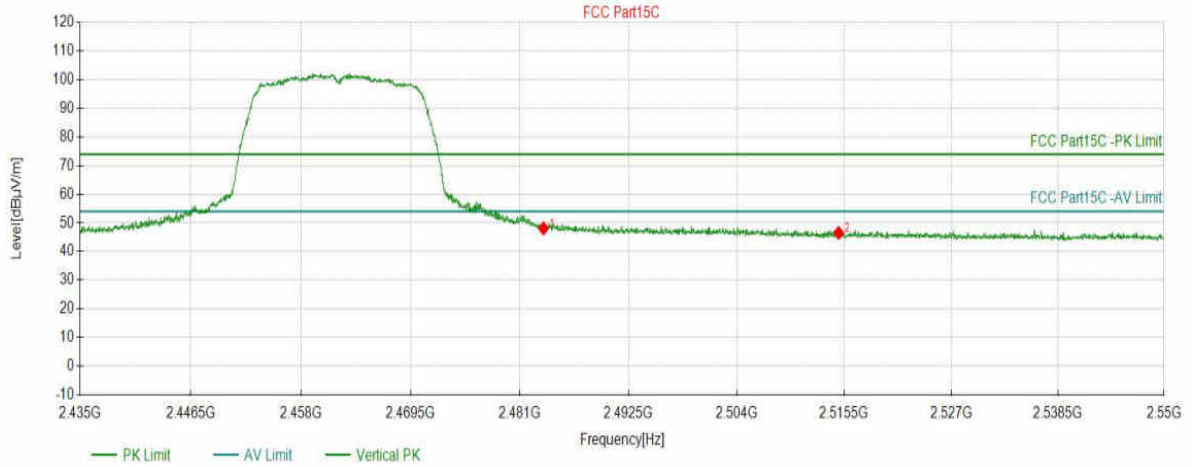

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	48.07	6.24	74.00	25.93	150	219	PK	Vertical
2	2514.9133	46.51	6.40	74.00	27.49	150	153	PK	Vertical




# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11N40_2422	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-03-01 22:07:27

## Test Graph

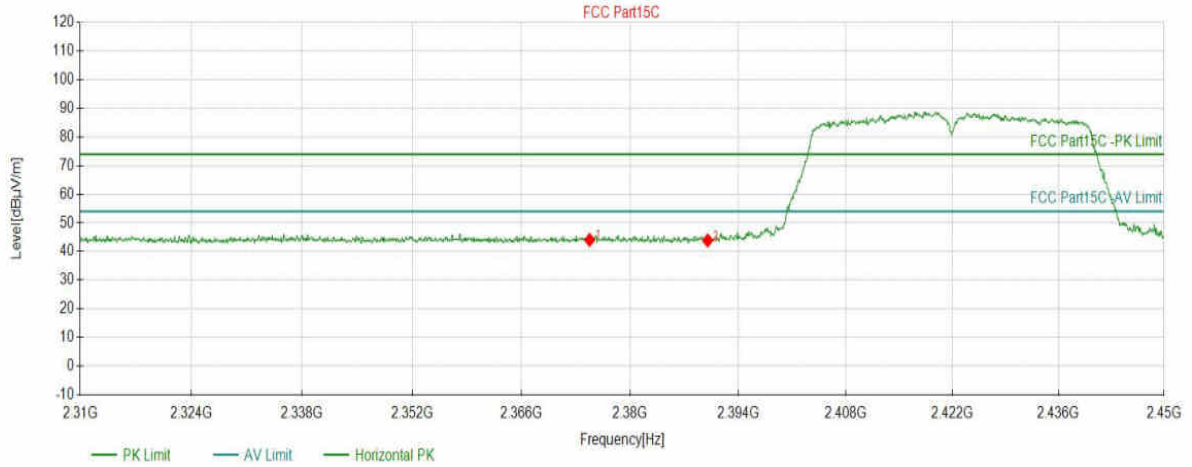

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2374.7824	44.05	5.67	74.00	29.95	150	358	PK	Horizont
2	2390.0500	43.86	5.65	74.00	30.14	150	360	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11N40_2422	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-03-01 22:08:16

## Test Graph

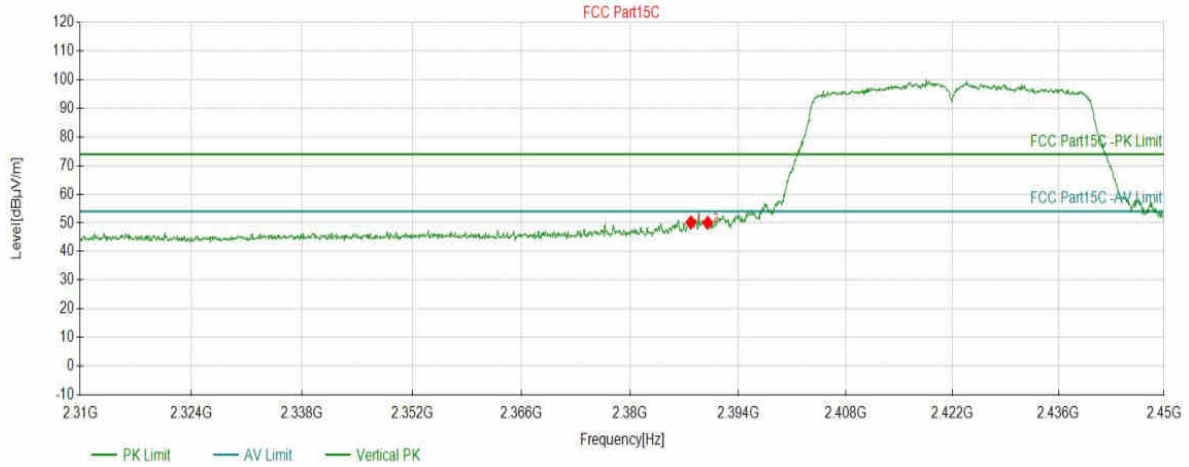


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2387.8789	50.16	5.65	74.00	23.84	150	202	PK	Vertical
2	2390.0500	50.00	5.65	74.00	24.00	150	211	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11N40_2452	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 7		

Start of Test: 2024-03-01 22:11:21

## Test Graph

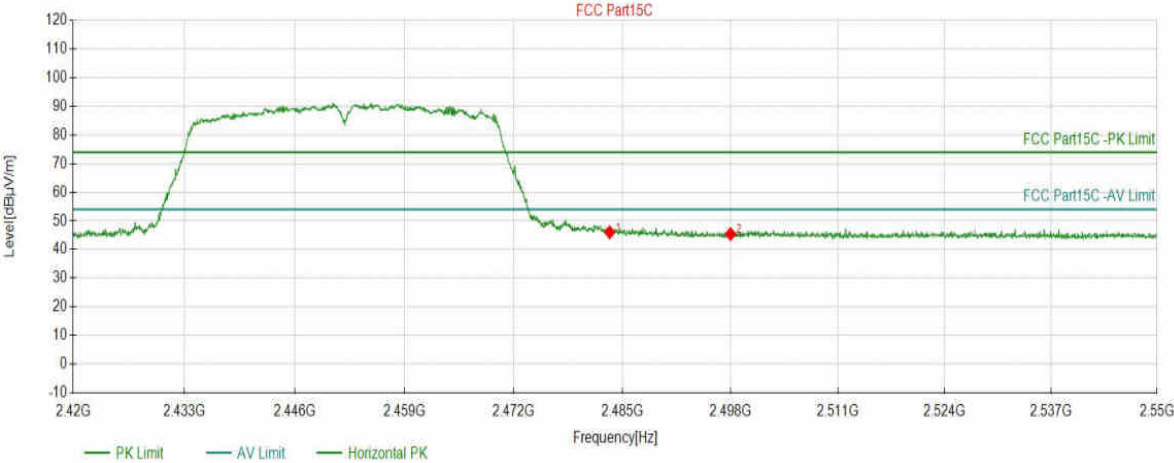


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5045	46.01	6.24	74.00	27.99	150	129	PK	Horizont
2	2498.0260	45.42	6.35	74.00	28.58	150	223	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 47%
Model:	Xenon MP16	SN:	
Mode:	11N40_2452	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 7		

Start of Test: 2024-03-01 22:12:21

## Test Graph

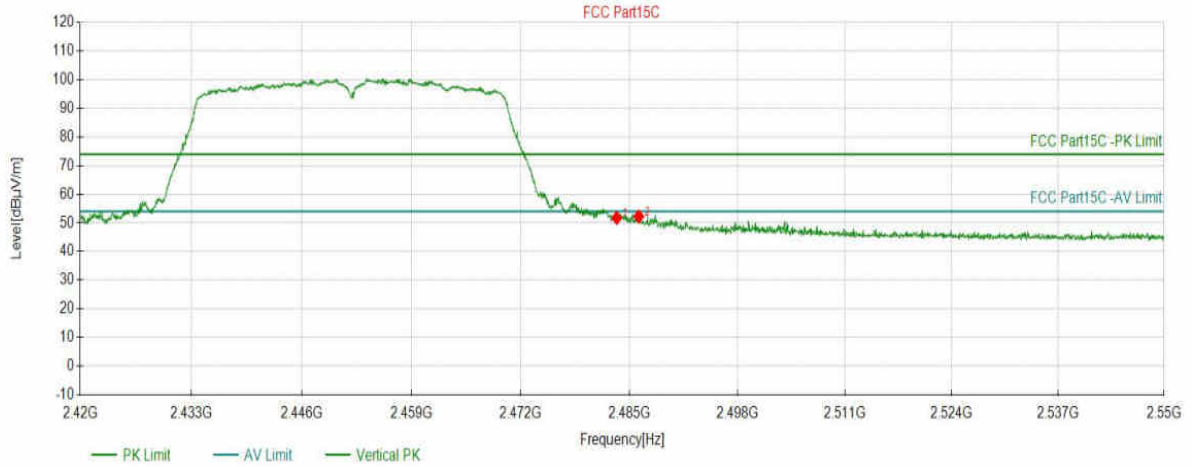

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5045	51.72	6.24	74.00	22.28	150	218	PK	Vertical
2	2486.1487	52.22	6.26	74.00	21.78	150	215	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11B_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-26 23:54:58

## Test Graph

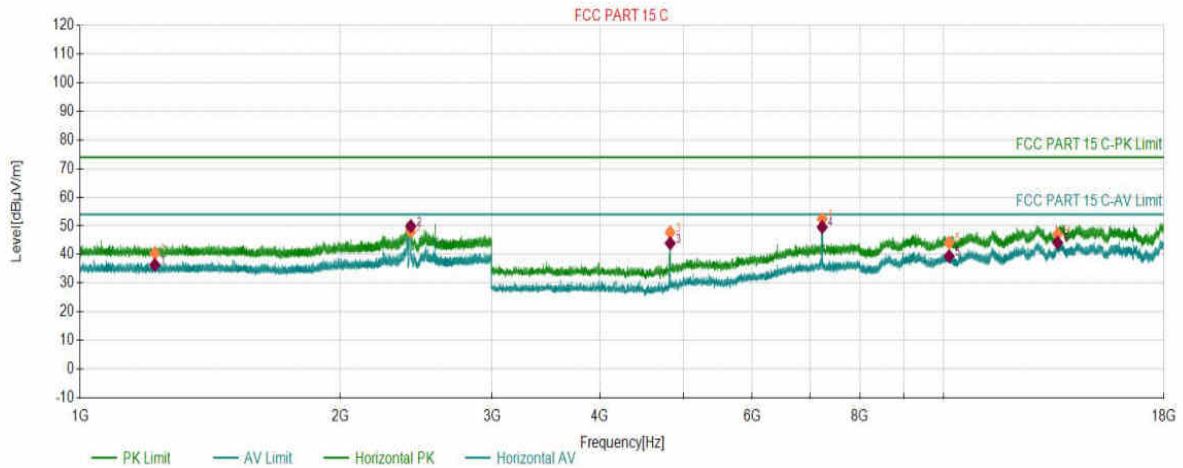

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1220.4110	2.36	40.44	74.00	33.56	150	154	Horizontal
2	2415.2708	7.21	48.02	74.00	25.98	150	241	Horizontal
3	4823.3412	-9.82	47.73	74.00	26.27	150	176	Horizontal
4	7234.7117	-1.40	52.41	74.00	21.59	150	194	Horizontal
5	10147.8574	4.78	44.14	74.00	29.86	150	42	Horizontal
6	13553.7777	10.29	47.14	74.00	26.86	150	186	Horizontal

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1220.4110	2.36	36.39	54.00	17.61	150	154	Horizontal
2	2415.2708	7.21	49.89	54.00	4.11	150	241	Horizontal
3	4823.3412	-9.82	43.94	54.00	10.06	150	176	Horizontal
4	7234.7117	-1.40	49.58	54.00	4.42	150	194	Horizontal
5	10147.8574	4.78	39.44	54.00	14.56	150	42	Horizontal
6	13553.7777	10.29	44.11	54.00	9.89	150	186	Horizontal

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11B_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-26 23:56:39

## Test Graph

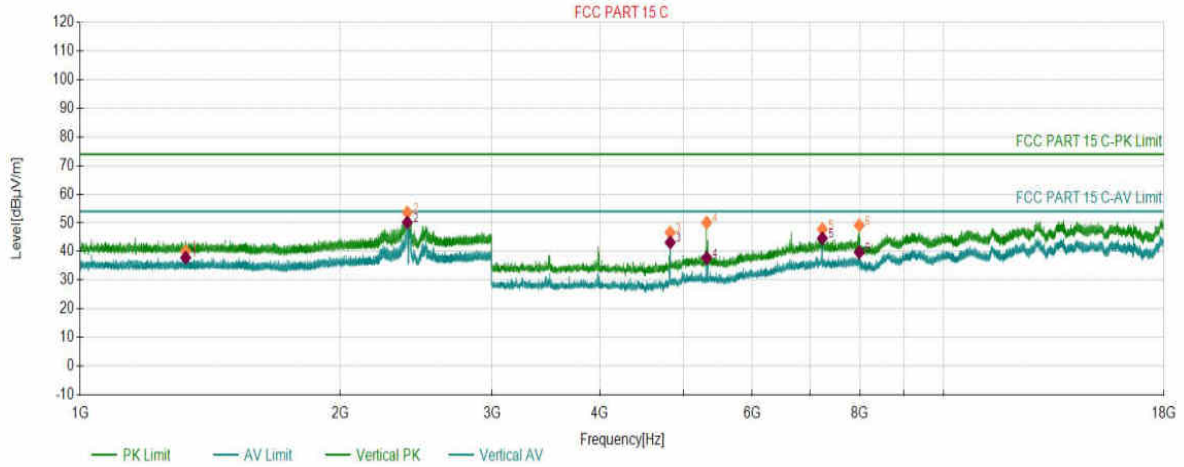

PK Final Data List								
NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1325.1163	2.80	40.12	74.00	33.88	150	3	Vertical
2	2392.7696	7.11	53.61	74.00	20.39	150	224	Vertical
3	4823.3412	-9.82	46.64	74.00	27.36	150	213	Vertical
4	5316.8658	-8.23	50.11	74.00	23.89	150	115	Vertical
5	7236.9618	-1.39	47.77	74.00	26.23	150	205	Vertical
6	7986.2493	-0.52	49.14	74.00	24.86	150	145	Vertical


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1325.1163	2.80	37.86	54.00	16.14	150	3	Vertical
2	2392.7696	7.11	50.16	54.00	3.84	150	224	Vertical
3	4823.3412	-9.82	43.17	54.00	10.83	150	213	Vertical
4	5316.8658	-8.23	37.80	54.00	16.20	150	115	Vertical
5	7236.9618	-1.39	44.60	54.00	9.40	150	205	Vertical
6	7986.2493	-0.52	39.74	54.00	14.26	150	145	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11B_2437	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 15		

Start of Test: 2024-02-27 00:02:25

## Test Graph

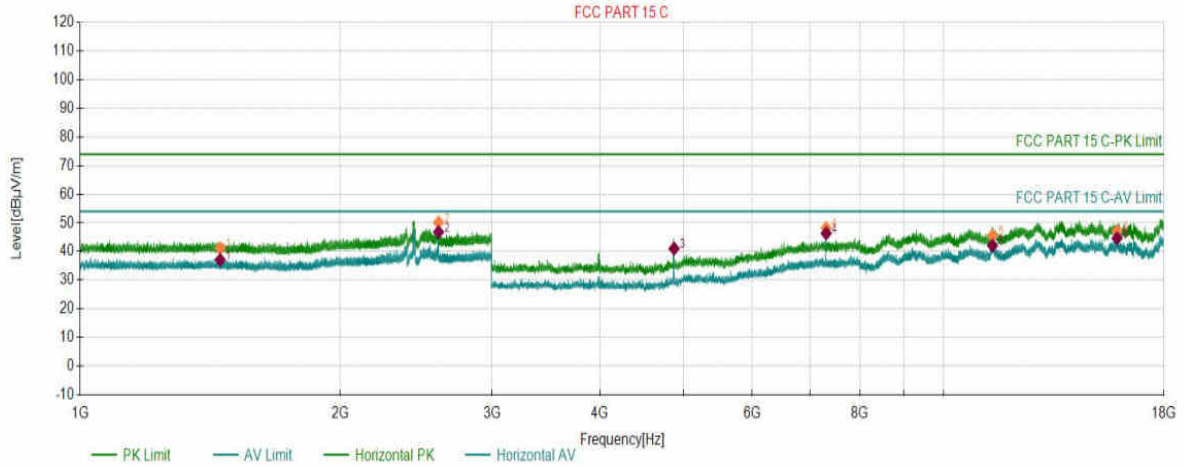

PK Final Data List								
NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1452.5226	3.33	41.21	74.00	32.79	150	320	Horizontal
2	2600.1800	7.02	50.13	74.00	23.87	150	175	Horizontal
3	4873.5937	-9.50	41.02	74.00	32.98	150	177	Horizontal
4	7311.9656	-1.18	48.19	74.00	25.81	150	186	Horizontal
5	11393.6697	6.37	45.45	74.00	28.55	150	6	Horizontal
6	15881.1441	12.15	47.13	74.00	26.87	150	129	Horizontal


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1452.5226	3.33	37.09	54.00	16.91	150	320	Horizontal
2	2600.1800	7.02	46.80	54.00	7.20	150	175	Horizontal
3	4873.5937	-9.50	41.04	54.00	12.96	150	177	Horizontal
4	7311.9656	-1.18	46.35	54.00	7.65	150	186	Horizontal
5	11393.6697	6.37	42.09	54.00	11.91	150	6	Horizontal
6	15881.1441	12.15	44.64	54.00	9.36	150	129	Horizontal

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11B_2437	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 15		

Start of Test: 2024-02-27 00:04:06

## Test Graph

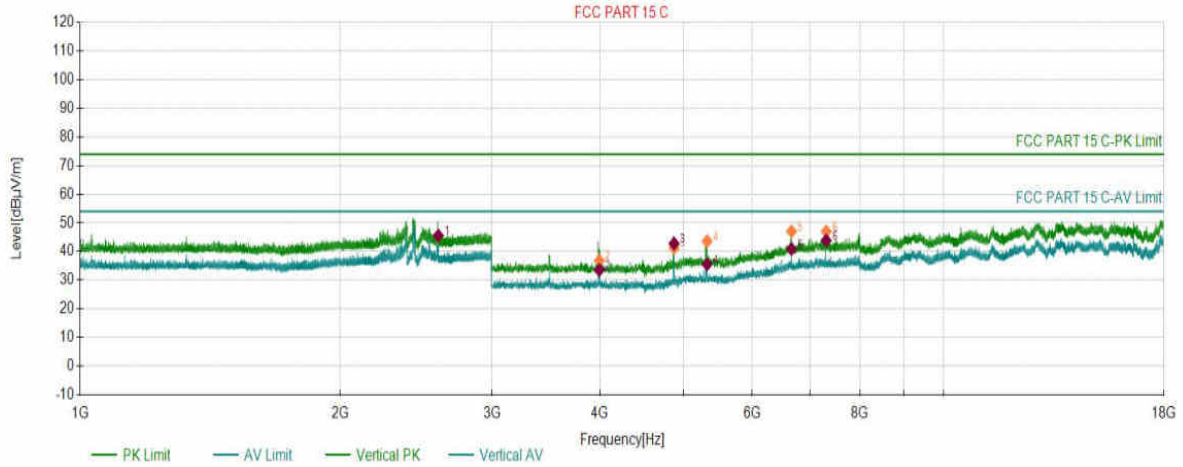

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2599.0800	7.03	45.53	74.00	28.47	150	222	Vertical
2	3993.0497	-13.32	36.83	74.00	37.17	150	41	Vertical
3	4873.5937	-9.50	41.30	74.00	32.70	150	173	Vertical
4	5322.1161	-8.24	43.62	74.00	30.38	150	115	Vertical
5	6666.1833	-3.24	47.05	74.00	26.95	150	88	Vertical
6	7312.7156	-1.19	47.02	74.00	26.98	150	194	Vertical

### AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2599.0800	7.03	45.58	54.00	8.42	150	222	Vertical
2	3993.0497	-13.32	33.57	54.00	20.43	150	41	Vertical
3	4873.5937	-9.50	42.80	54.00	11.20	150	173	Vertical
4	5322.1161	-8.24	35.55	54.00	18.45	150	115	Vertical
5	6666.1833	-3.24	40.90	54.00	13.10	150	88	Vertical
6	7312.7156	-1.19	43.85	54.00	10.15	150	194	Vertical




# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11B_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 13		

Start of Test: 2024-02-27 00:08:46

## Test Graph

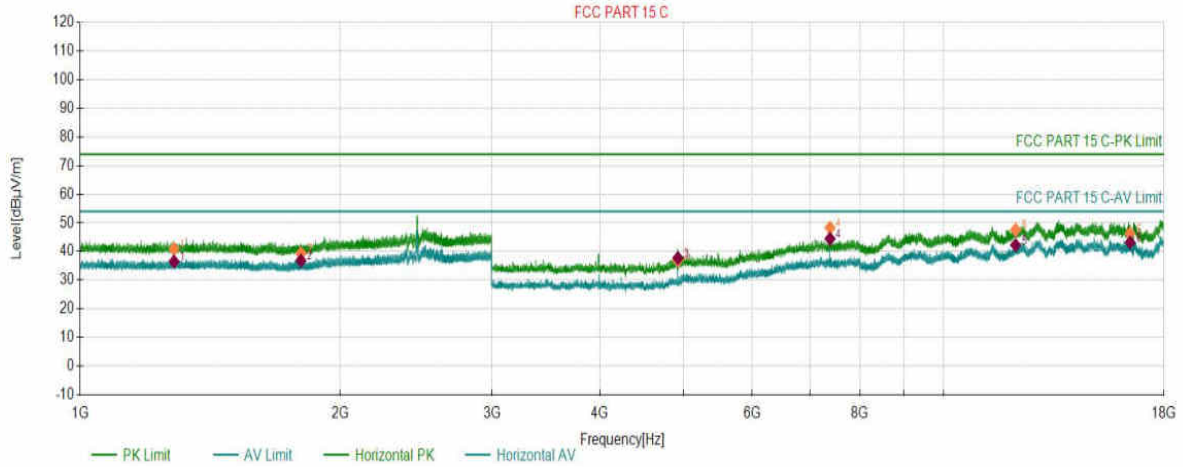

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1284.6142	2.59	40.92	74.00	33.08	150	339	Horizontal
2	1801.7401	3.37	39.37	74.00	34.63	150	136	Horizontal
3	4923.8462	-9.16	36.89	74.00	37.11	150	232	Horizontal
4	7386.9693	-1.64	48.29	74.00	25.71	150	184	Horizontal
5	12116.7058	6.27	47.59	74.00	26.41	150	147	Horizontal
6	16442.1721	12.35	46.29	74.00	27.71	150	204	Horizontal

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1284.6142	2.59	36.52	54.00	17.48	150	339	Horizontal
2	1801.7401	3.37	36.86	54.00	17.14	150	136	Horizontal
3	4923.8462	-9.16	37.75	54.00	16.25	150	232	Horizontal
4	7386.9693	-1.64	44.46	54.00	9.54	150	184	Horizontal
5	12116.7058	6.27	42.24	54.00	11.76	150	147	Horizontal
6	16442.1721	12.35	43.17	54.00	10.83	150	204	Horizontal

# Test Report

Project Information			
EUT:	Tablet	Environment:	21.1°C 41%
Model:	Xenon MP10	SN:	
Mode:	11B_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 13		

Start of Test: 2024-02-27 00:10:27

## Test Graph

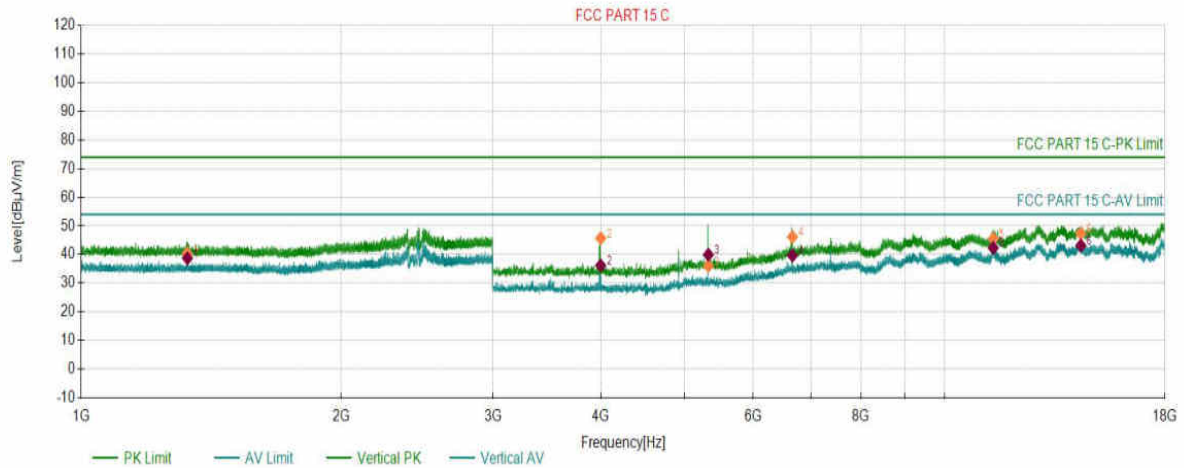

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1327.6164	2.82	40.44	74.00	33.56	150	79	Vertical
2	3996.7998	-13.30	45.71	74.00	28.29	150	287	Vertical
3	5325.8663	-8.24	36.05	74.00	37.95	150	98	Vertical
4	6664.6832	-3.24	46.18	74.00	27.82	150	107	Vertical
5	11385.4193	6.24	45.50	74.00	28.50	150	69	Vertical
6	14380.3190	11.14	47.32	74.00	26.68	150	325	Vertical

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1327.6164	2.82	38.72	54.00	15.28	150	79	Vertical
2	3996.7998	-13.30	36.21	54.00	17.79	150	287	Vertical
3	5325.8663	-8.24	39.94	54.00	14.06	150	98	Vertical
4	6664.6832	-3.24	39.66	54.00	14.34	150	107	Vertical
5	11385.4193	6.24	42.31	54.00	11.69	150	69	Vertical
6	14380.3190	11.14	43.14	54.00	10.86	150	325	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11B_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-22 16:56:53

## Test Graph

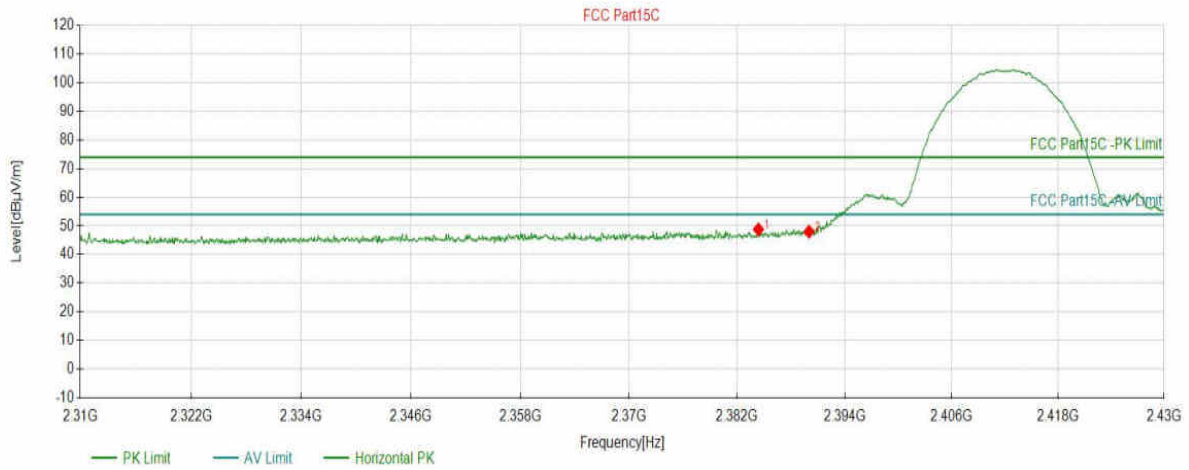


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2384.3772	48.77	5.66	74.00	25.23	150	216	PK	Horizont
2	2390.0200	47.99	5.65	74.00	26.01	150	221	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11B_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2024-02-22 16:57:34

## Test Graph

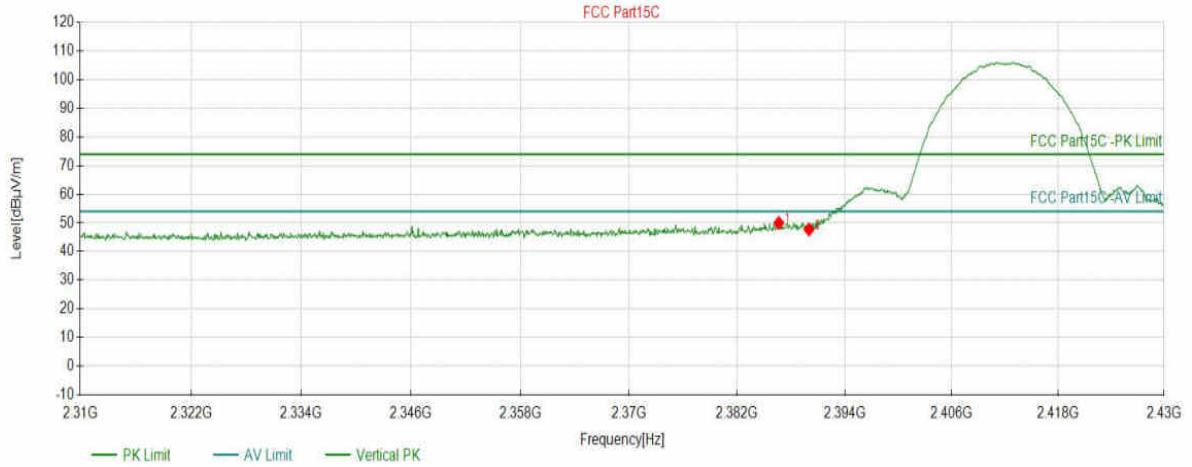


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2386.6583	49.96	5.65	74.00	24.04	150	246	PK	Vertical
2	2390.0200	47.70	5.65	74.00	26.30	150	241	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11B_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 13		

Start of Test: 2024-02-22 17:06:14

## Test Graph

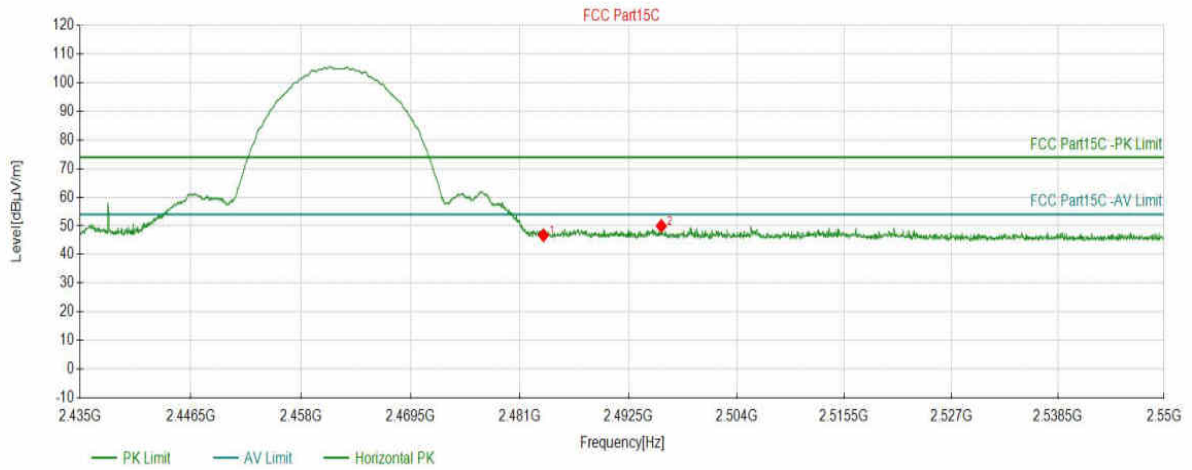


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	46.75	6.24	74.00	27.25	150	240	PK	Horizont
2	2496.0087	49.96	6.33	74.00	24.04	150	249	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11B_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 13		

Start of Test: 2024-02-22 17:07:06

## Test Graph

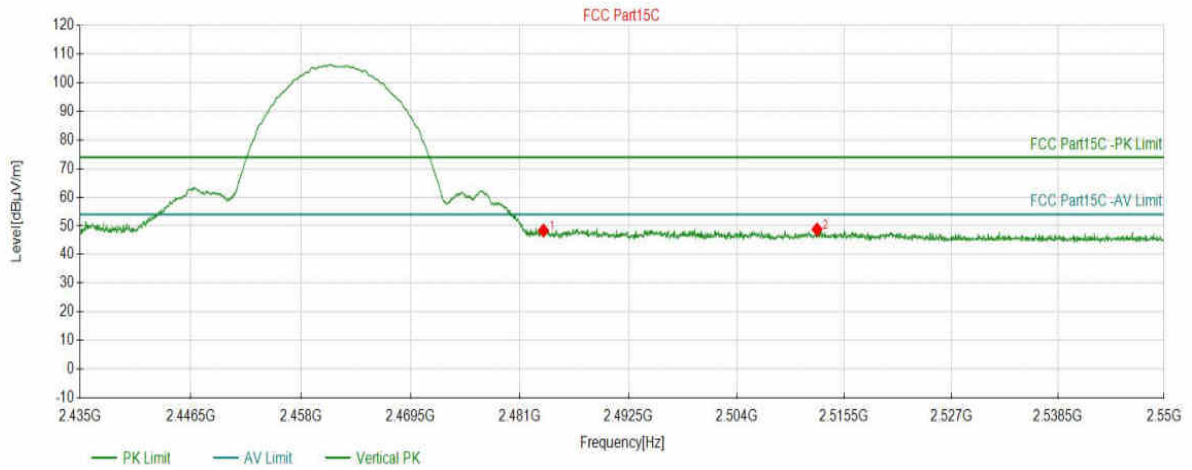


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	48.36	6.24	74.00	25.64	150	312	PK	Vertical
2	2512.6125	48.78	6.39	74.00	25.22	150	238	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11G_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 12		

Start of Test: 2024-02-22 17:11:44

## Test Graph

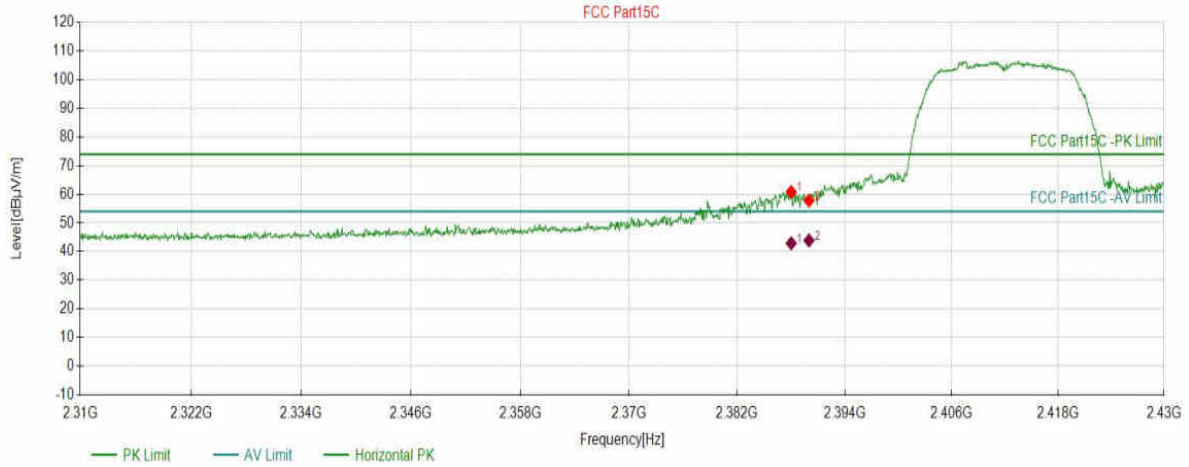

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2388.0390	60.77	5.65	74.00	13.23	150	213	PK	Horizont
2	2390.0200	57.79	5.65	74.00	16.21	150	209	PK	Horizont

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.0390	5.65	42.89	54.00	11.11	150	213	Horizontal
2	2390.0200	5.65	43.89	54.00	10.11	150	209	Horizontal

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11G_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 12		

Start of Test: 2024-02-22 17:12:39

## Test Graph

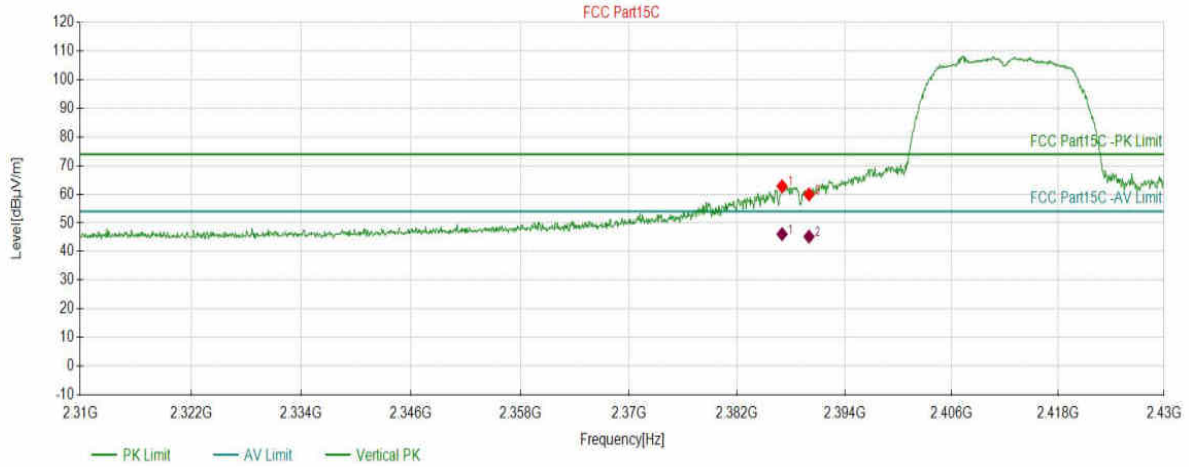

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2387.0185	62.77	5.65	74.00	11.23	150	303	PK	Vertical
2	2390.0200	59.93	5.65	74.00	14.07	150	312	PK	Vertical

AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.0185	5.65	46.10	54.00	7.90	150	303	Vertical
2	2390.0200	5.65	45.22	54.00	8.78	150	312	Vertical




# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11G_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 11		

Start of Test: 2024-02-22 17:22:28

## Test Graph

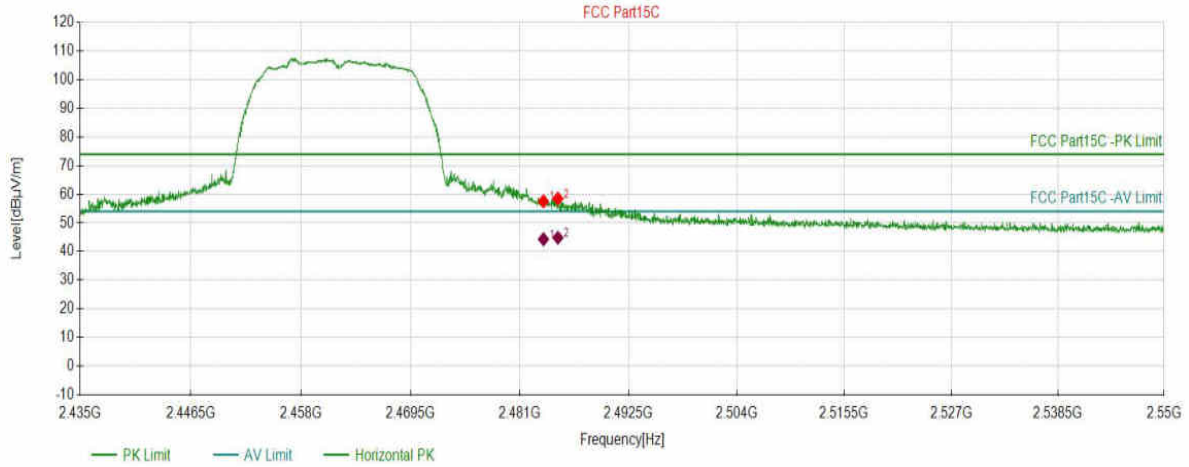

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	57.53	6.24	74.00	16.47	150	243	PK	Horizont
2	2485.0417	58.45	6.25	74.00	15.55	150	243	PK	Horizont

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5078	6.24	44.30	54.00	9.70	150	243	Horizontal
2	2485.0417	6.25	44.81	54.00	9.19	150	243	Horizontal

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11G_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 11		

Start of Test: 2024-02-22 17:23:21

## Test Graph

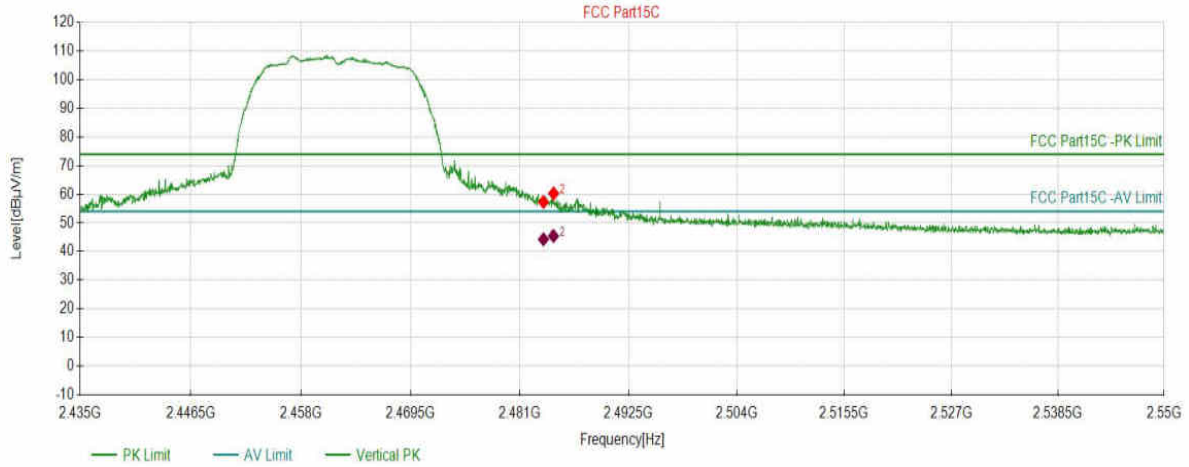

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	57.29	6.24	74.00	16.71	150	312	PK	Vertical
2	2484.5815	60.28	6.25	74.00	13.72	150	312	PK	Vertical

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5078	6.24	44.26	54.00	9.74	150	312	Vertical
2	2484.5817	6.25	45.40	54.00	8.60	191.7	307.2	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11N20_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-02-22 17:33:28

## Test Graph

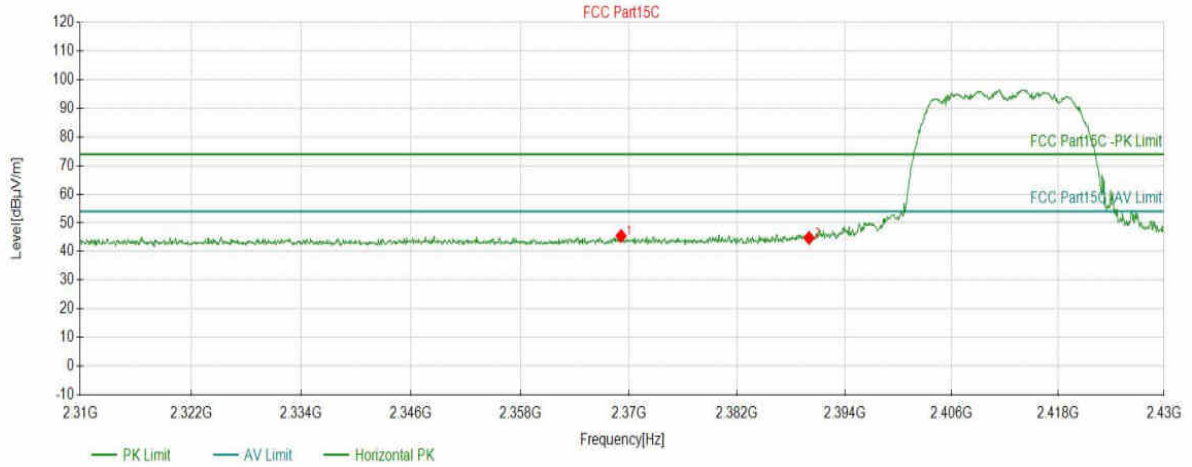

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2369.1296	45.43	5.67	74.00	28.57	150	102	PK	Horizont
2	2390.0200	44.75	5.65	74.00	29.25	150	227	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11N20_2412	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-02-22 17:34:17

## Test Graph

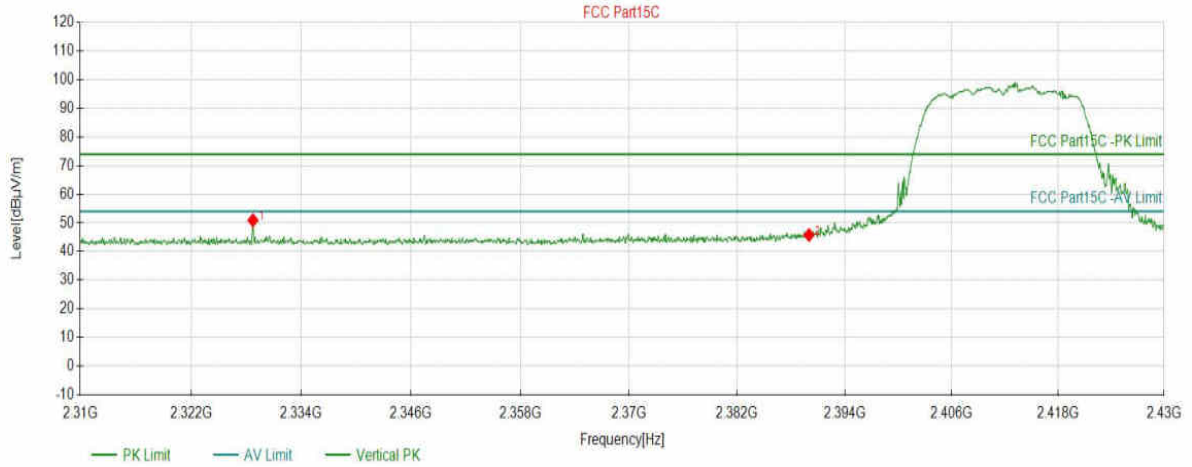


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2328.7294	50.89	5.71	74.00	23.11	150	105	PK	Vertical
2	2390.0200	45.75	5.65	74.00	28.25	150	239	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11N20_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-02-22 17:36:47

## Test Graph

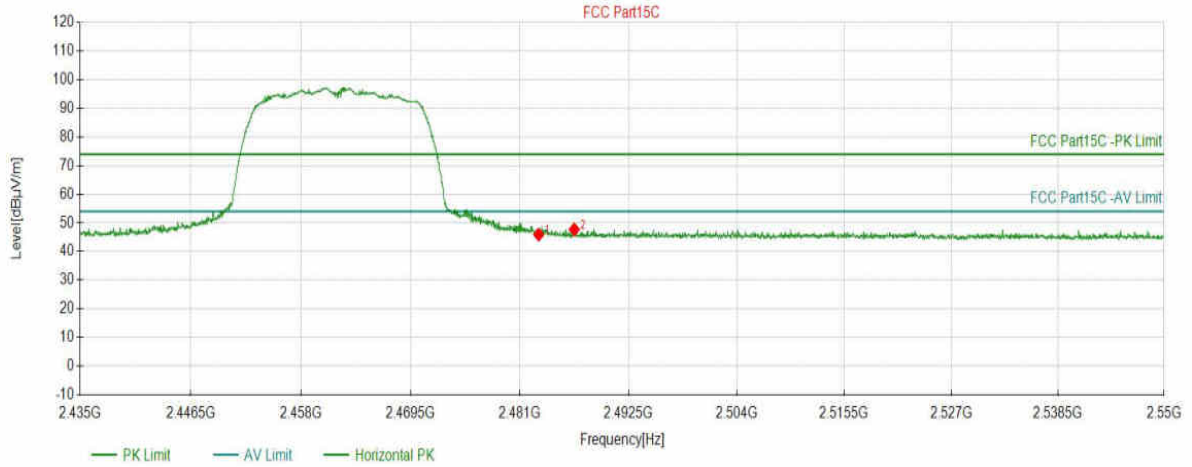


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.0093	45.93	6.24	74.00	28.07	150	325	PK	Horizont
2	2486.7673	47.71	6.26	74.00	26.29	150	234	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11N20_2462	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-02-22 17:37:48

## Test Graph

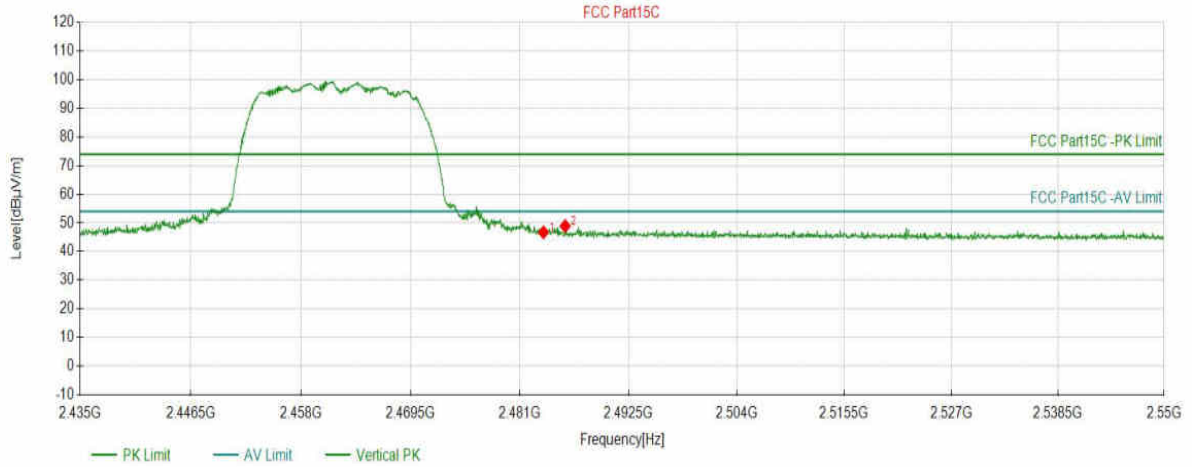


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	46.72	6.24	74.00	27.28	150	314	PK	Vertical
2	2485.8086	48.89	6.26	74.00	25.11	150	236	PK	Vertical

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11N40_2422	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-02-22 17:56:05

## Test Graph

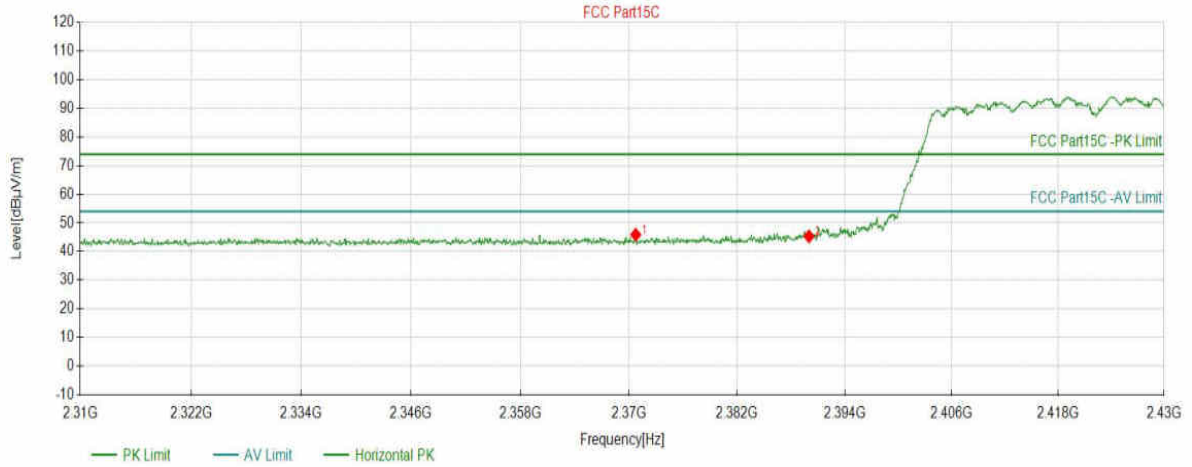

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2370.7504	45.88	5.67	74.00	28.12	150	219	PK	Horizont
2	2390.0200	45.31	5.65	74.00	28.69	150	239	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11N40_2422	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 6		

Start of Test: 2024-02-22 17:58:32

## Test Graph

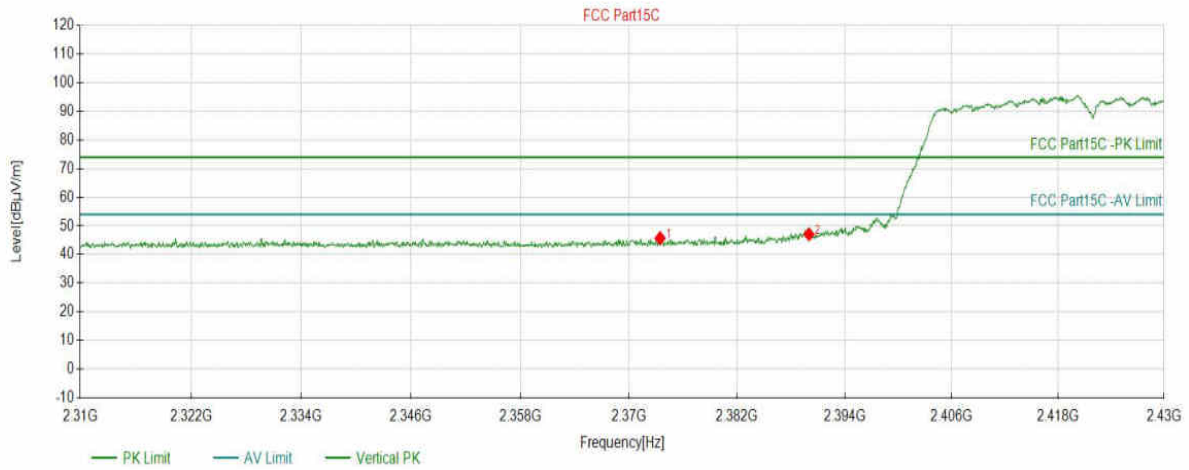

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2373.4517	45.70	5.67	74.00	28.30	150	302	PK	Vertical
2	2390.0200	47.07	5.65	74.00	26.93	150	238	PK	Vertical




# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11N40_2452	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 7		

Start of Test: 2024-02-24 09:27:18

## Test Graph

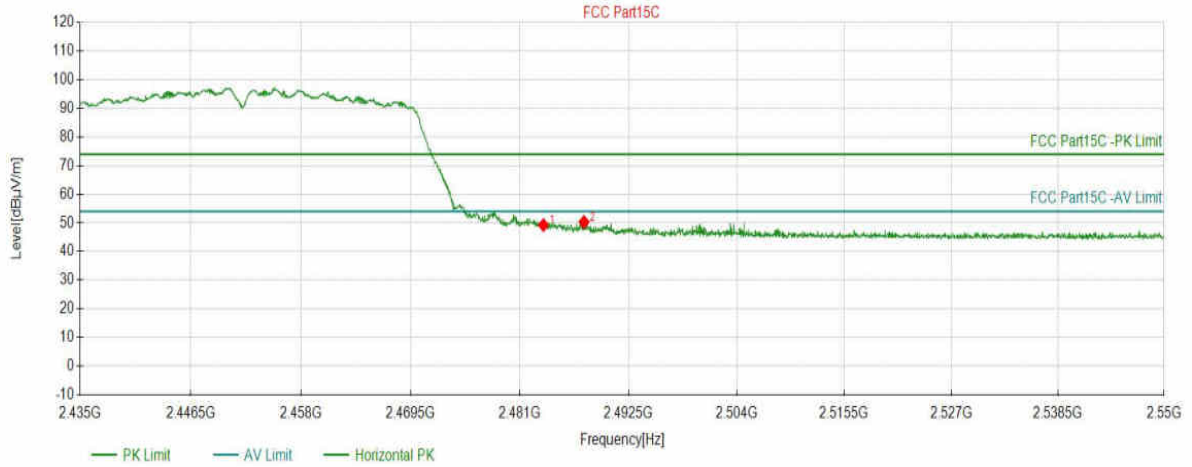


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	49.23	6.24	74.00	24.77	150	202	PK	Horizont
2	2487.8026	50.31	6.27	74.00	23.69	150	116	PK	Horizont

# Test Report

Project Information			
EUT:	Tablet	Environment:	22.7°C 64%
Model:	MP10-Xenon	SN:	
Mode:	11N40_2452	Voltage:	DC 12V
Customer:		Engineer:	Soho Liu
Remark:	Power set : 7		


Start of Test: 2024-02-24 09:28:19

## Test Graph

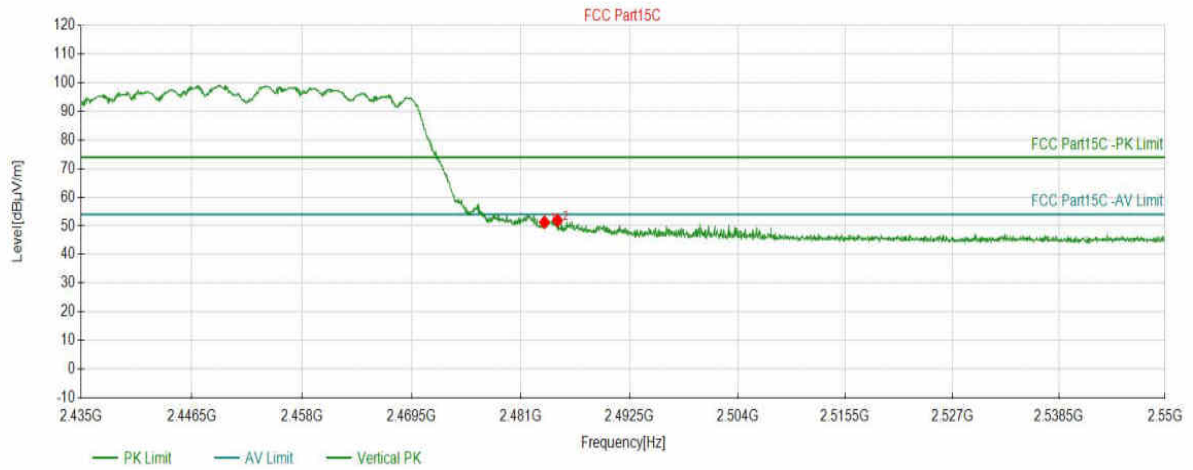


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5078	51.27	6.24	74.00	22.73	150	230	PK	Vertical
2	2484.8883	51.91	6.25	74.00	22.09	150	230	PK	Vertical

### APPENDIX C – AC Power Line Conducted Emission Test Data

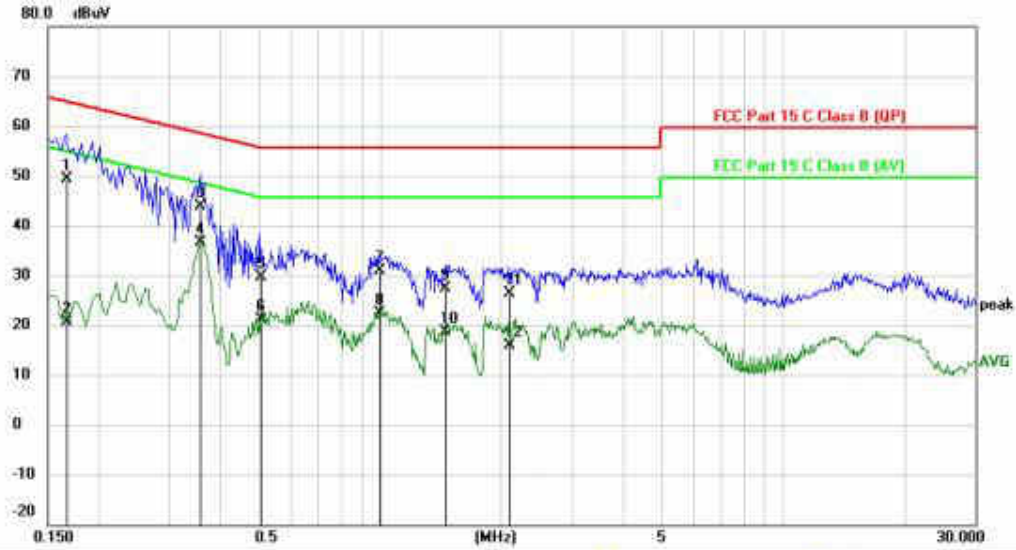


Site: \_\_\_\_\_ Phase: **L1** Temperature: 26  
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Tablet  
 M/N: MP10-Xenon-V  
 Mode: 2.4G WIFI Mode  
 Note: \_\_\_\_\_

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1664	39.71	9.63	49.34	65.14	-15.80	QP	
2		0.1664	11.05	9.63	20.68	55.14	-34.46	AVG	
3		0.3594	34.32	9.67	43.99	58.74	-14.75	QP	
4	*	0.3594	26.89	9.67	36.56	48.74	-12.18	AVG	
5		0.5061	20.02	9.69	29.71	56.00	-26.29	QP	
6		0.5061	11.42	9.69	21.11	46.00	-24.89	AVG	
7		0.9979	21.22	9.75	30.97	56.00	-25.03	QP	
8		0.9979	12.66	9.75	22.41	46.00	-23.59	AVG	
9		1.4561	17.63	9.78	27.41	56.00	-28.59	QP	
10		1.4561	8.80	9.78	18.58	46.00	-27.42	AVG	
11		2.0898	16.54	9.84	26.38	56.00	-29.62	QP	
12		2.0898	6.04	9.84	15.88	46.00	-30.12	AVG	

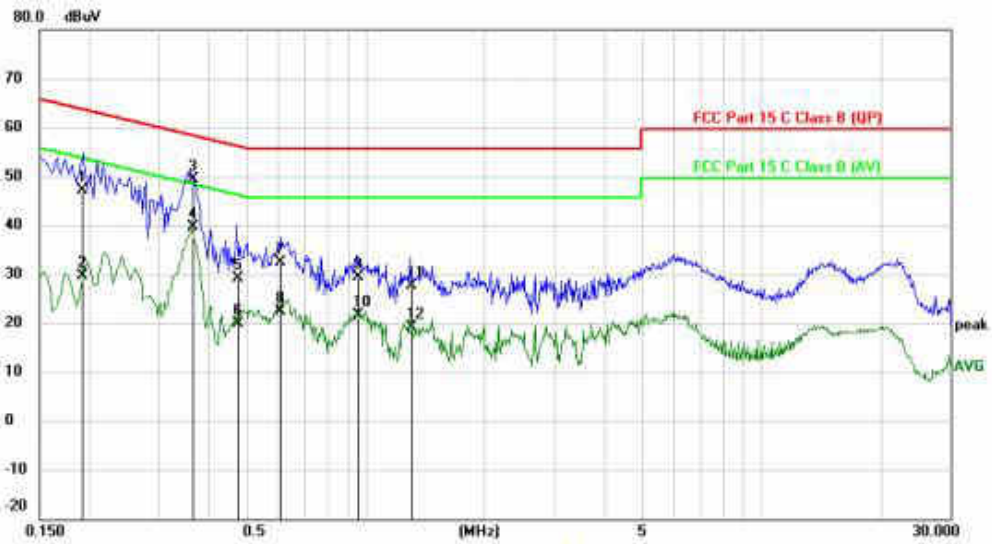


Site: \_\_\_\_\_ Phase: **N** Temperature: 26  
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Tablet  
 M/N: MP10-Xenon-V  
 Mode: 2.4G WIFI Mode  
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1923	37.52	9.71	47.23	63.94	-16.71	QP	
2	0.1923	19.85	9.71	29.56	53.94	-24.38	AVG	
3	0.3636	39.75	9.74	49.49	58.65	-9.16	QP	
4 *	0.3636	29.98	9.74	39.72	48.65	-8.93	AVG	
5	0.4741	19.40	9.76	29.16	56.44	-27.28	QP	
6	0.4741	10.20	9.76	19.96	46.44	-26.48	AVG	
7	0.6090	22.70	9.78	32.48	56.00	-23.52	QP	
8	0.6090	12.64	9.78	22.42	46.00	-23.58	AVG	
9	0.9576	19.66	9.83	29.49	56.00	-26.51	QP	
10	0.9576	11.91	9.83	21.74	46.00	-24.26	AVG	
11	1.3002	17.82	9.86	27.68	56.00	-28.32	QP	
12	1.3002	9.26	9.86	19.12	46.00	-26.88	AVG	

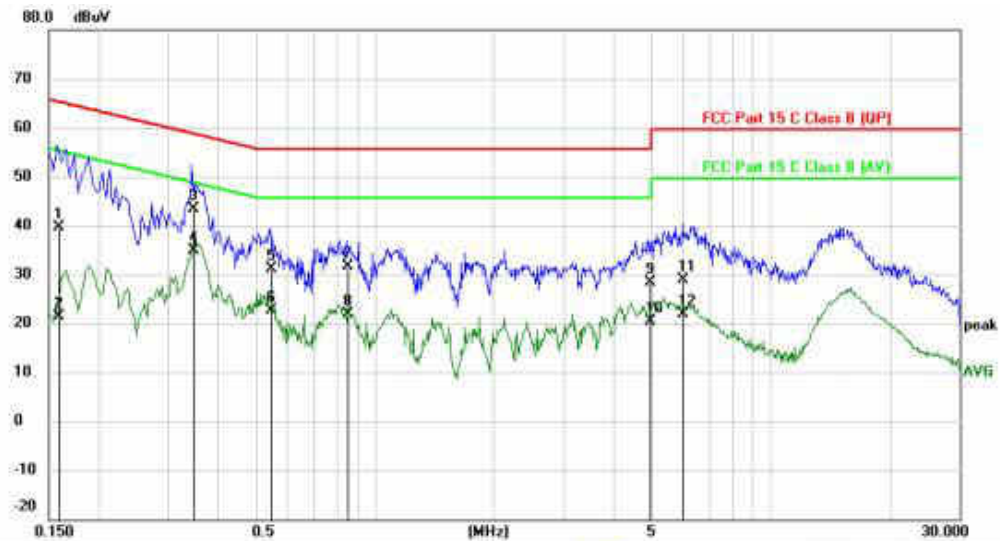


Site: \_\_\_\_\_ Phase: **L1** Temperature: 26  
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Tablet  
 M/N: MP16-Xenon-V  
 Mode: 2.4G WIFI Mode  
 Note: \_\_\_\_\_

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1584	30.05	9.63	39.68	65.55	-25.87	QP	
2	0.1584	11.77	9.63	21.40	55.55	-34.15	AVG	
3	0.3465	33.60	9.66	43.26	59.05	-15.79	QP	
4 *	0.3465	25.28	9.66	34.94	49.05	-14.11	AVG	
5	0.5456	21.35	9.69	31.04	56.00	-24.96	QP	
6	0.5456	12.85	9.69	22.54	46.00	-23.46	AVG	
7	0.8499	21.81	9.73	31.54	56.00	-24.46	QP	
8	0.8499	12.22	9.73	21.95	46.00	-24.05	AVG	
9	4.9706	18.07	10.22	28.29	56.00	-27.71	QP	
10	4.9706	10.15	10.22	20.37	46.00	-25.63	AVG	
11	6.0085	18.55	10.36	28.91	60.00	-31.09	QP	
12	6.0085	11.55	10.36	21.91	50.00	-28.09	AVG	

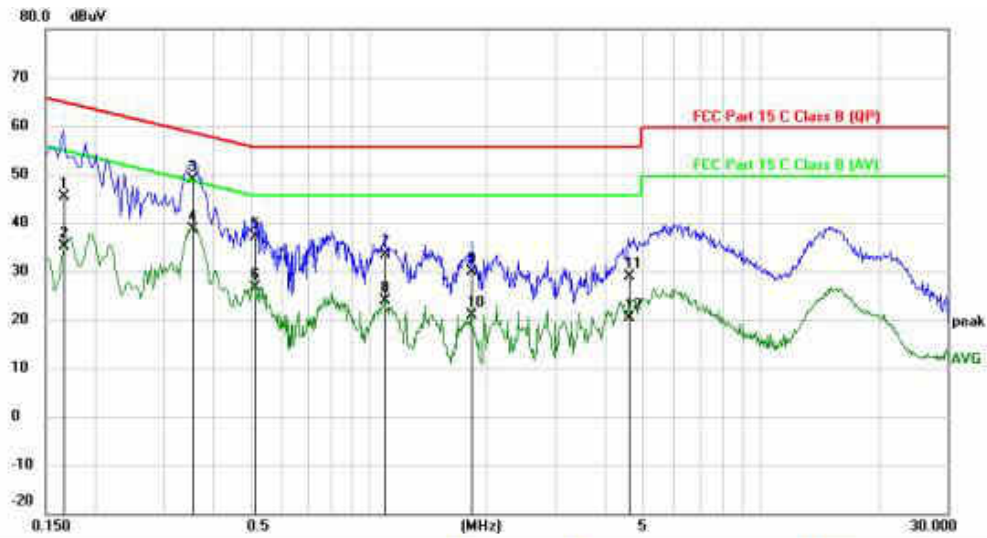


Site: \_\_\_\_\_ Phase: **N** Temperature: 26  
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Tablet  
 M/N: MP16-Xenon-V  
 Mode: 2.4G WIFI Mode  
 Note: \_\_\_\_\_

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1664	35.65	9.70	45.35	65.14	-19.79	QP	
2	0.1664	25.44	9.70	35.14	55.14	-20.00	AVG	
3 *	0.3542	39.06	9.74	48.80	58.86	-10.06	QP	
4	0.3542	28.93	9.74	38.67	48.86	-10.19	AVG	
5	0.5137	27.46	9.76	37.22	56.00	-18.78	QP	
6	0.5137	16.94	9.76	26.70	46.00	-19.30	AVG	
7	1.0980	23.47	9.84	33.31	56.00	-22.69	QP	
8	1.0980	13.93	9.84	23.77	46.00	-22.23	AVG	
9	1.8293	19.95	9.90	29.85	56.00	-26.15	QP	
10	1.8293	10.93	9.90	20.83	46.00	-25.17	AVG	
11	4.6070	18.71	10.26	28.97	56.00	-27.03	QP	
12	4.6070	10.18	10.26	20.44	46.00	-25.56	AVG	

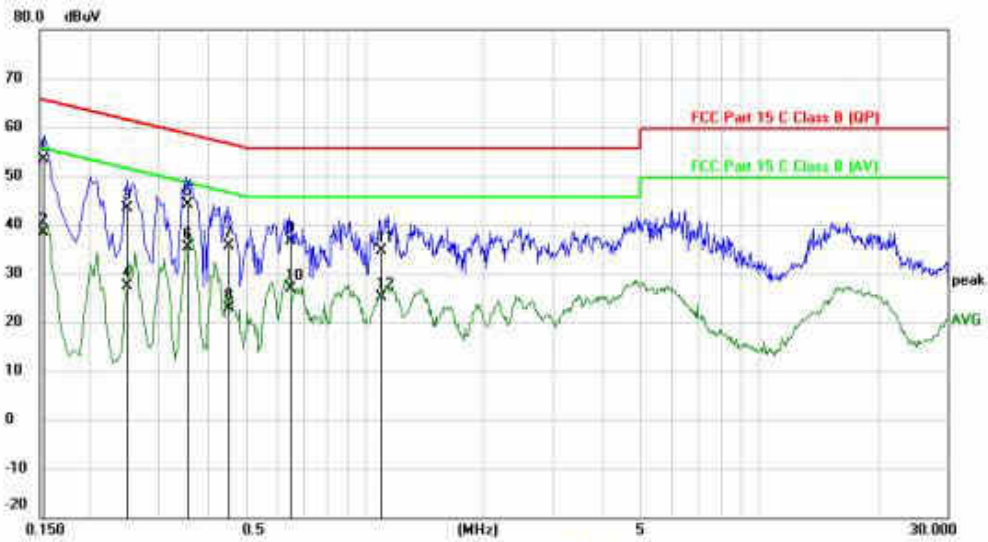

Site: Phase: **L1** Temperature: 26  
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Tablet  
 M/N: MP24-Xenon-V  
 Mode: 2.4G WIFI Mode  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1527	43.67	9.63	53.30	65.85	-12.55	QP	
2		0.1527	28.83	9.63	38.46	55.85	-17.39	AVG	
3		0.2501	33.71	9.65	43.36	61.75	-18.39	QP	
4		0.2501	17.78	9.65	27.43	51.75	-24.32	AVG	
5		0.3543	34.44	9.67	44.11	58.86	-14.75	QP	
6		0.3543	25.59	9.67	35.26	48.86	-13.60	AVG	
7		0.4495	25.96	9.68	35.64	56.88	-21.24	QP	
8		0.4495	13.23	9.68	22.91	46.88	-23.97	AVG	
9		0.6467	26.88	9.71	36.59	56.00	-19.41	QP	
10		0.6467	17.06	9.71	26.77	46.00	-19.23	AVG	
11		1.1009	24.90	9.76	34.66	56.00	-21.34	QP	
12		1.1009	15.37	9.76	25.13	46.00	-20.87	AVG	

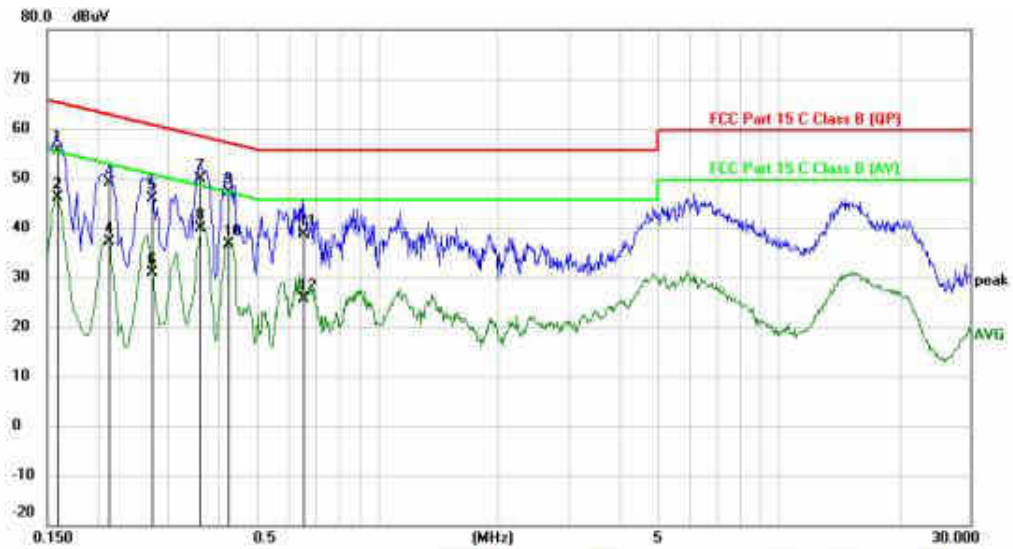

Site: Phase: **N** Temperature: 25  
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Tablet  
 M/N: MP24-Xenon-V  
 Mode: 2.4G WIFI Mode  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1587	45.87	9.69	55.56	65.53	-9.97	QP	
2		0.1587	36.53	9.69	46.22	55.53	-9.31	AVG	
3		0.2131	39.52	9.71	49.23	63.08	-13.85	QP	
4		0.2131	27.46	9.71	37.17	53.08	-15.91	AVG	
5		0.2737	36.11	9.73	45.84	61.00	-15.16	QP	
6		0.2737	21.17	9.73	30.90	51.00	-20.10	AVG	
7	*	0.3608	40.25	9.74	49.99	58.71	-8.72	QP	
8		0.3608	30.21	9.74	39.95	48.71	-8.76	AVG	
9		0.4220	37.37	9.75	47.12	57.41	-10.29	QP	
10		0.4220	26.82	9.75	36.57	47.41	-10.84	AVG	
11		0.6532	28.92	9.79	38.71	56.00	-17.29	QP	
12		0.6532	15.80	9.79	25.59	46.00	-20.41	AVG	

**END OF REPORT**