

Page 1 of 69

# **FCC Test Report**

Report No.: AGC02031201001FE03

FCC ID	: OMCBTAUD2
APPLICATION PURPOSE	: Original Equipment
PRODUCT DESIGNATION	: Bluetooth Module
BRAND NAME	: C-chip
MODEL NAME	: F-3320
APPLICANT	: Icon Health and Fitness, Inc.
DATE OF ISSUE	: Nov. 04, 2020
STANDARD(S)	: FCC Part 15.247
REPORT VERSION	: V1.0

Attestation of Global Constant (Shenzhen) Co., Ltd

nplianc



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



# **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	© /	Nov. 04, 2020	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festive/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter explorization of AGE" the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



# TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	
2.1. PRODUCT DESCRIPTION	
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. RECEIVER INPUT BANDWIDTH	
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	8
2.9. EQUIPMENT MODIFICATIONS	
2.10. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	
5.2. EQUIPMENT USED IN TESTED SYSTEM	
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. 20DB BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	21
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamp Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.	e written authorization of AGC. The test results



9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	
10. RADIATED EMISSION	
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SETUP	
10.3. LIMITS AND MEASUREMENT RESULT	
10.4. TEST RESULT	
11. NUMBER OF HOPPING FREQUENCY	
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	54
11.3. MEASUREMENT EQUIPMENT USED	
11.4. LIMITS AND MEASUREMENT RESULT	54
12. TIME OF OCCUPANCY (DWELL TIME)	
12.1. MEASUREMENT PROCEDURE	
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
12.3. MEASUREMENT EQUIPMENT USED	
12.4. LIMITS AND MEASUREMENT RESULT	
13. FREQUENCY SEPARATION	
13.1. MEASUREMENT PROCEDURE	
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
13.3. MEASUREMENT EQUIPMENT USED	
13.4. LIMITS AND MEASUREMENT RESULT	
14. FCC LINE CONDUCTED EMISSION TEST	
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	61
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF EUT	

# **1. VERIFICATION OF CONFORMITY**

Applicant	Icon Health and Fitness, Inc.	
Address	1500 South 1000 West, Logan, Utah, United States, 84321, USA	
Manufacturer	SHENZHENSHI XINZHONGXIN TECHNOLOGY CO., LTD.	
Address	Block 3, Dong Huan Industrial Park, Sha Jing Town, Bao'an District, Shenzhen City, Guangdong, Province, China	
Factory	SHENZHENSHI XINZHONGXIN TECHNOLOGY CO., LTD.	
Address	Block 3, Dong Huan Industrial Park, Sha Jing Town, Bao'an District, Shenzhen City, Guangdong, Province, China	
Product Designation	Bluetooth Module	
Brand Name	C-chip	
Test Model	F-3320	
Date of test	Oct. 30, 2020 to Nov. 03, 2020	
Deviation	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BR/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Prepared By

**Reviewed By** 

Eddy · Liu

Eddy Liu Project Engineer

Nov. 03, 2020

Max Zhans

Max Zhang Reviewer

Nov. 04, 2020


Approved By

Forrest Lei Authorized Officer

Nov. 04, 2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated freshing/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





# 2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Bluetooth Module". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480 GHz	
RF Output Power	6.185dBm (Max)	
Bluetooth Version	V5.0	
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps	
Number of channels	79	
Hardware Version	V1.0	
Software Version	V2.6	
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)	
Antenna Gain	OdBi	
Power Supply	DC 5V	

### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
8	0	2402 MHz
	• 1	2403 MHz
0	38	2440 MHz
2402~2480MHz	39	2441 MHz
	40	2442 MHz
	77	2479 MHz
	78	2480 MHz



### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode: 40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55, 36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63, 42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14, 51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49, 20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37, 65, 32, 70, 52, 27, 59, 22, 62, 39

#### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.



The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

# 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: OMCBTAUD2** filing to comply with the FCC PART 15.247 requirements.

# 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

### 2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



# **3. MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.1 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±4.0 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted,  $Uc = \pm 0.8$ dB
- Uncertainty of spurious emissions, conducted, Uc = ±2.7dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %
- Uncertainty of Dwell Time:  $Uc = \pm 2\%$
- Uncertainty of Frequency:  $Uc = \pm 2 \%$

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand resting in section of a stamp. Is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day affective for the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



### **4. DESCRIPTION OF TEST MODES**

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π/4-DQPSK
5	Middle channel π/4-DQPSK
6	High channel π/4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode π/4-DQPSK
12	Hopping mode 8DPSK

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

#### Software Setting

Test Commands PAUSE RADIO STATUS RADIO STATUS FULL TISTART TADATAI TADATAI TADATAA TADATAA TADATAA TADATAA		-Test Arguments - LO Freq. (MHz) Power (Atn. Mag. Exp)	2402 2 -2 0	Close Help Execute Reset
Test Results Save to file I C:\Users\ago\AppDat	irowse :a\Local		lay : 🕫 Standau stapplog txt	rd C BER
adio Test CFG PKT su adio Test TXDATA1 su adio Test CFG PKT su	ccessfu ccessfu			^


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand of the test results of the test results been altered in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day affective is not permitted without the written authorization of AGC of the test results be addressed to AGC by agc@agc~cert.com.




# **5. SYSTEM TEST CONFIGURATION**

**5.1. CONFIGURATION OF EUT SYSTEM** 

Radiated Emission Configure:



Conducted Emission Configure:



#### 5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Module	F-3320	OMCBTAUD2	EUT
2	Control Box	N/A	F-3320	AE

#### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Compliant



# 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA	

### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	TRECEIVER R&S ESPI 101206		101206	May 15, 2020	May 14, 2021
LISN	R&S	ESH2-Z5	100086	Jul. 03, 2020	Jul. 02, 2021
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

### TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator ZHINAN		E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 09, 2019	Jan. 08, 2021
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



# 7. PEAK OUTPUT POWER

### 7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW  $\geq$ RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.


Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

# PEAK POWER TEST SETUP



# Spectrum Analyzer



**RF** Cable


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in the stand of the stand in the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT							
FOR GFSK MOUDULATION       Frequency (GHz)     Peak Power (dBm)     Applicable Limits (dBm)     Pass or Fail							
2.402 2.961		21	Pass				
2.441	3.103	21	Pass				
2.480	3.530	21	Pass				

#### CH0

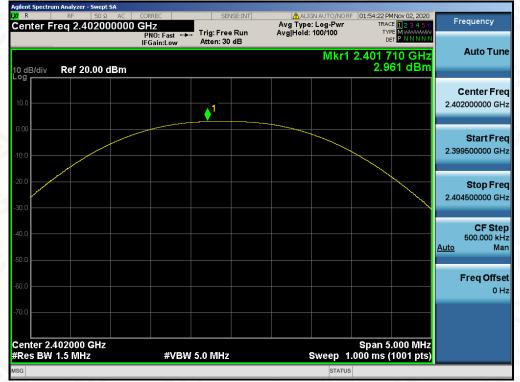

#### Report No.: AGC02031201001FE03 Page 15 of 69





CH78

gilent Spectrum Analyzer - Swept SA			
R RF 50 Ω AC Center Freq 2.48000000		ALIGN AUTO/NORF 01:55:29 P Avg Type: Log-Pwr TRA	Frequency
senter 11eq 2.4000000	PNO: Fast +++ Trig: Free Run	Avg Hold: 100/100	
	IFGain:Low Atten: 30 dB		
		Mkr1 2.479 §	995 GHZ
10 dB/div Ref 20.00 dBm		3.5	30 dBm
			Center F
10.0			2.480000000
	<b>↓</b>		2.48000000
0.00			
			Start F
10.0			2.477500000
20.0			
			Stop F
30.0			2.482500000
40.0			CF S
10.0			500.000 Auto
50.0			Auto
60.0			Freq Of
70.0			
Center 2.480000 GHz		Span 5	.000 MHz
Res BW 1.5 MHz	#VBW 5.0 MHz	Sweep 1.000 ms	(1001 pts)
ISG		STATUS	



#### Report No.: AGC02031201001FE03 Page 16 of 69

PEAK OUTPUT POWER MEASUREMENT RESULT							
FOR Π/4-DQPSK MODULATION       Frequency (GHz)     Peak Power (dBm)     Applicable Limits (dBm)     Pass or Fail							
2.402	5.465	21	Pass				
2.441	5.411	21	Pass				
2.480	5.757	21	Pass				

CH0



#### Report No.: AGC02031201001FE03 Page 17 of 69





CH78





10 dB/div

Center 2.402000 GHz #Res BW 1.5 MHz

#### Report No.: AGC02031201001FE03 Page 18 of 69

Frequency

Auto Tune

**Center Freq** 

Start Freq

Stop Freq

CF Step 500.000 kHz Ma

**Freq Offset** 0 Hz

Span 5.000 MHz Sweep 1.000 ms (1001 pts)

PEAK OUTPUT POWER MEASUREMENT RESULT								
	FOR 8-DPSK MODULATION							
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail					
2.402	6.019	21	Pass					
2.441	5.968	21	Pass					
2.480	6.185	21	Pass					



CH0

Compliances Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Perton Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. g/Inspection The test results Sf the test report.

#VBW 5.0 MHz

#### Report No.: AGC02031201001FE03 Page 19 of 69





CH78






# 8. 20DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

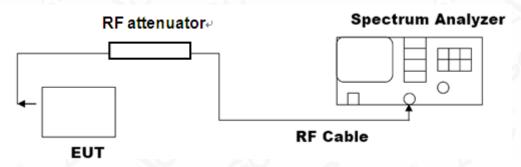


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand of the report is not permitted without the written authorization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day and a test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 8.3. LIMITS AND MEASUREMENT RESULTS

MEASUREMENT RESULT FOR GFSK MOUDULATION					
Annliaghla Limita		Measurement Resul	t		
Applicable Limits	Test Data	a (MHz)	Criteria		
	Low Channel	0.962	PASS		
N/A	Middle Channel	0.962	PASS		
	High Channel	0.961	PASS		

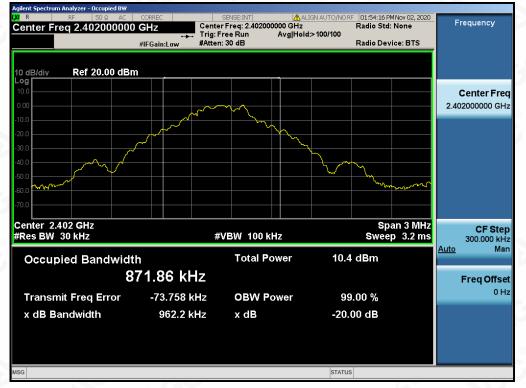

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





MEASUREMENT RESULT FOR II /4-DQPSK MODULATION						
Annlinghla Limita		Measurement Resu	lt			
Applicable Limits	Test Data	(MHz)	Criteria			
	Low Channel	1.332	PASS			
N/A	Middle Channel	1.342	PASS			
	High Channel	1.335	PASS			

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand of the test results of the test results been at the report is not permitted without the writter aphorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL


#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





MEASUREMENT RESULT FOR 8-DPSK MODULATION						
Measurement Result						
Applicable Limits	Test Data	(MHz)	Criteria			
	Low Channel	1.309	PASS			
N/A	Middle Channel	1.312	PASS			
	High Channel	1.313	PASS			

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

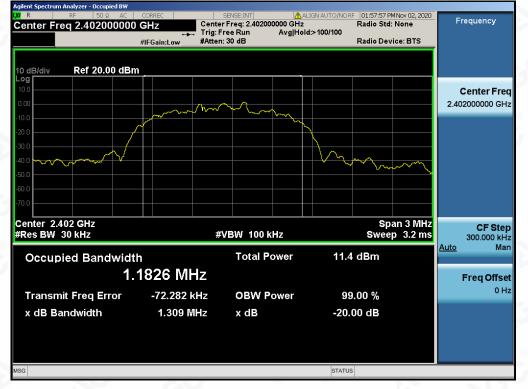



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





# 9. CONDUCTED SPURIOUS EMISSION

# 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
   RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 8.2

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


#### 9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEA	SUREMENT RESULT				
Annlinghta Limita	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS			
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS			





# TEST RESULT FOR ENTIRE FREQUENCY RANGE TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 8DPSK MODULATION IN LOW CHANNEL

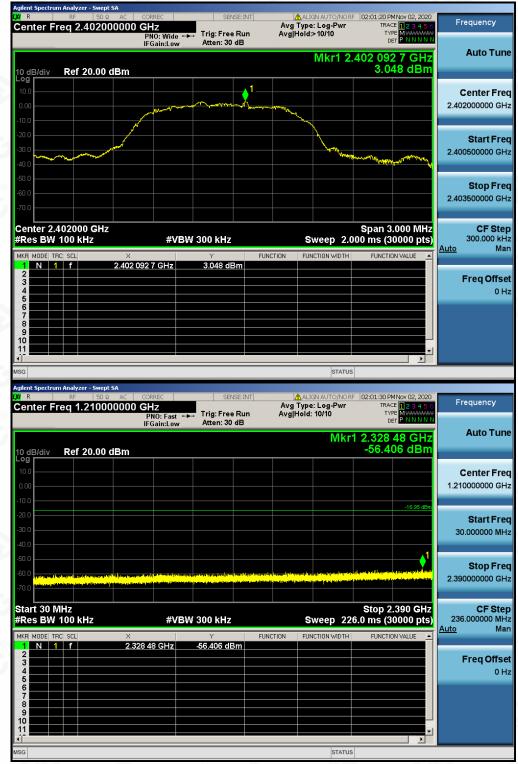





Agilent Spectrum A (X) R Center Frei	RF 50 Ω	AC CORREC 50000 GHz PNO: F	ast 🛶 Trig:Fi	BENSE:INT	Avg	Nalign auto/Nor Type: Log-Pwr Iold: 10/10	TRAC	MNov 02, 2020 CE 1 2 3 4 5 6 PE M <del>WWWWW</del>	Frequency
	Ref 20.00 c	IFGain:	Low Atten:	30 dB		Mkr	1 20.534	4 8 GHz 89 dBm	Auto Tune
Log 10.0 0.00									Center Freq 13.741750000 GHz
-10.0 -20.0 -30.0 -40.0							1	-16.95 dBm	Start Freq 2.483500000 GHz
-50.0 -60.0 -70.0									<b>Stop Freq</b> 25.000000000 GHz
Start 2.48 G #Res BW 10	90 kHz	X	#VBW 300 kH	F	UNCTION	Sweep 2	2.152 s (3	5.00 GHz 0000 pts) IN VALUE	<b>CF Step</b> 2.251650000 GHz <u>Auto</u> Man
1         N         1           2	f	20.534 8 GH	Hz -48.089	dBm					Freq Offset 0 Hz
MSG						STATUS	3		


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festive/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter explorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



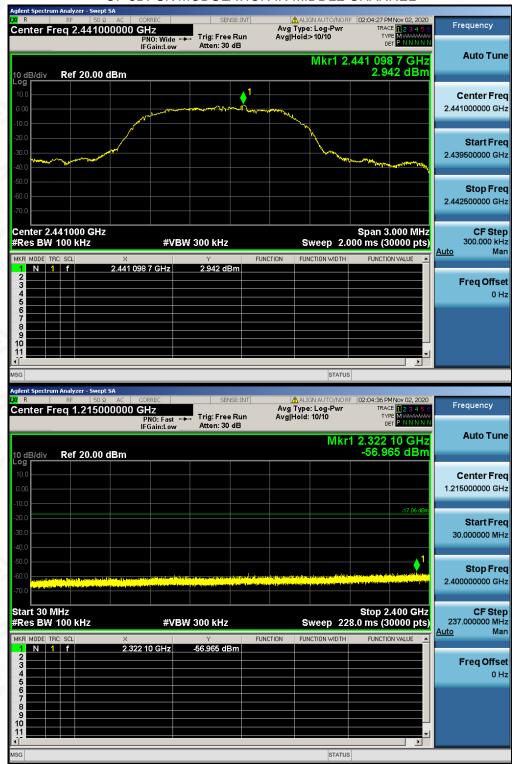

### TEST PLOT OF OUT OF BAND EMISSIONS OF 8DPSK MODULATION IN MIDDLE CHANNEL





Agilent Spectrum An		AC CORREC	SENSE	INIT	ALIGN AUTO/NOR	E 02:05:01 D	1Nov 02, 2020	
Center Fred				Avg	Type: Log-Pwr Hold: 10/10	TRAC	E 123456	Frequency
	ef 20.00 dB	IFGain:Low				1 20.602	2 4 GHz 36 dBm	Auto Tune
Log 10.0 0.00 -10.0								Center Freq 13.741750000 GHz
-20.0 -30.0 -40.0							-17.06 dBm	Start Freq 2.483500000 GHz
-50.0 -60.0 <b></b>								<b>Stop Freq</b> 25.000000000 GHz
Start 2.48 GI #Res BW 10	0 kHz	X	BW 300 kHz Y	FUNCTION	Sweep 2	2.152 s (3	5.00 GHŻ 0000 pts)	<b>CF Step</b> 2.251650000 GHz <u>Auto</u> Man
2 3 4 5 6 7 8 9 10		20.602 4 GHz	-48.536 dBn					Freq Offset 0 Hz
MSG					STATUS	6	• •	


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festive/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter explorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



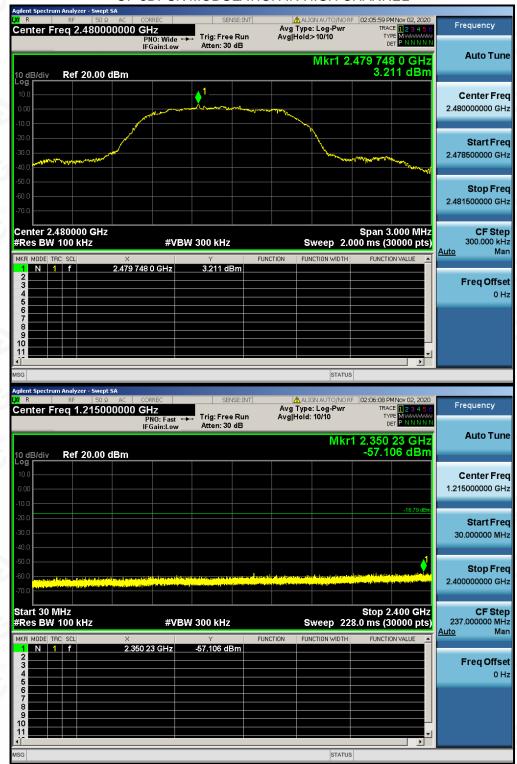

### TEST PLOT OF OUT OF BAND EMISSIONS OF 8DPSK MODULATION IN HIGH CHANNEL





Agilent Spectr											
<mark>⊯</mark> ℝ Center F	req 1	50 Ω 3.7500	00000 G	RREC				IGN AUTO/NORF e: Log-Pwr I: 10/10	TRAC	MNov 02, 2020 CE 123456 PE M	Frequency
	IFGain:Low Atten: 30 dB Mkr1 20.631 1 GHz									1 1 GHz	Auto Tune
10 dB/div 10.0 0.00	Rer	20.00 0									Center Freq 13.750000000 GHz
-20.0									1	-16.79 dBm	<b>Start Freq</b> 2.500000000 GHz
-50.0 -60.0											<b>Stop Freq</b> 25.00000000 GHz
Start 2.5 #Res BW	<b>i 100 k</b> TRC  SCL		×		<b>№ 300 kHz</b> Y	FUNG	CTION   FUI	Sweep 2	2.152 s (3	5.00 GHz 0000 pts) DN VALUE	<b>CF Step</b> 2.25000000 GHz <u>Auto</u> Man
1 2 3 4 5 6 7 8 9 10 11 ↓			20.631	1 GHz	-48.948 dE	3mi 					Freq Offset 0 Hz
MSG STATUS											


Note: The 8DPSK modulation is the worst case and only those data recorded in the report.




#### TEST RESULT FOR BAND EDGE

#### GFSK MODULATION IN LOW CHANNEL


Hopping off

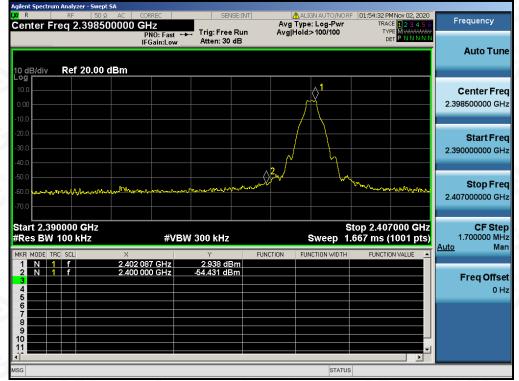

Hopping on

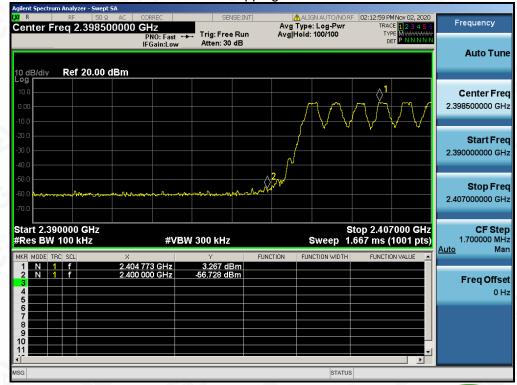




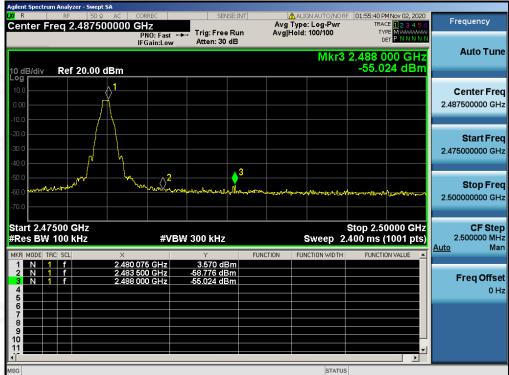


# GFSK MODULATION IN HIGH CHANNEL

Hopping off

Hopping on

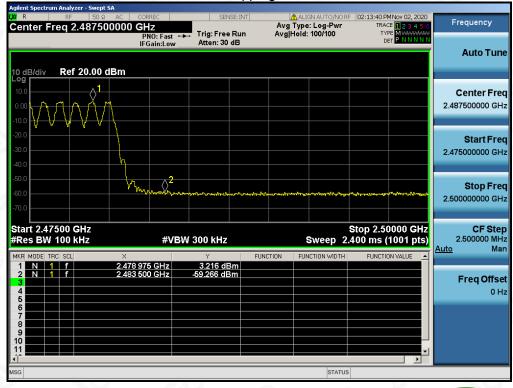



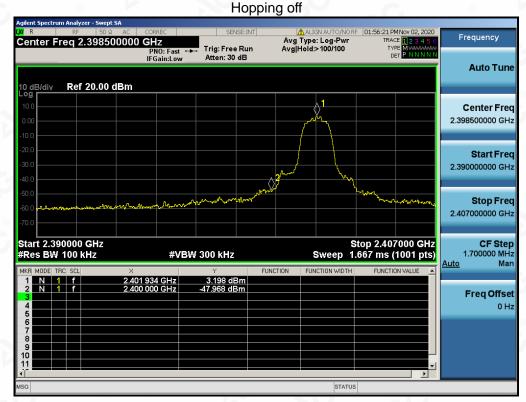


# $\pi$ /4-DQPSK MODULATION IN LOW CHANNEL

Hopping on






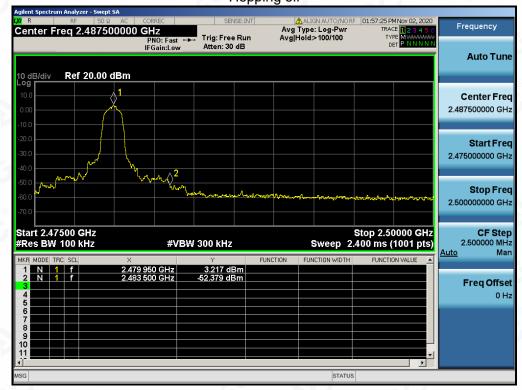


# $\pi$ /4-DQPSK MODULATION IN HIGH CHANNEL Hopping off

Hopping on

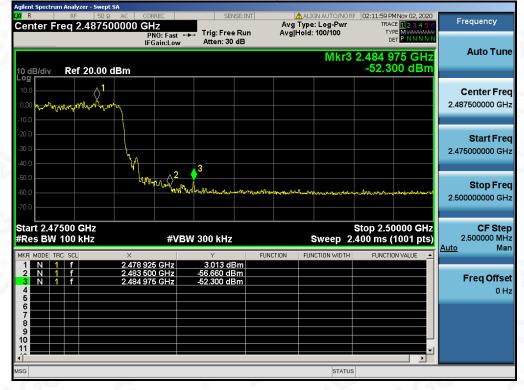



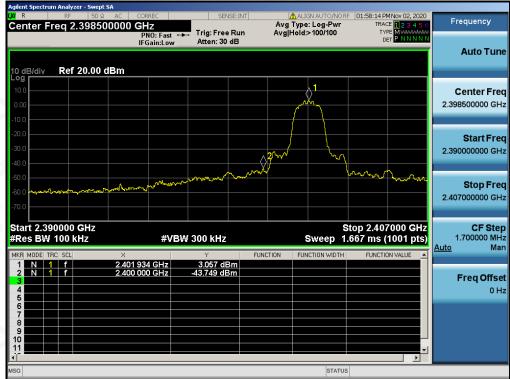


# 8-DPSK MODULATION IN LOW CHANNEL

Hopping off

Hopping on





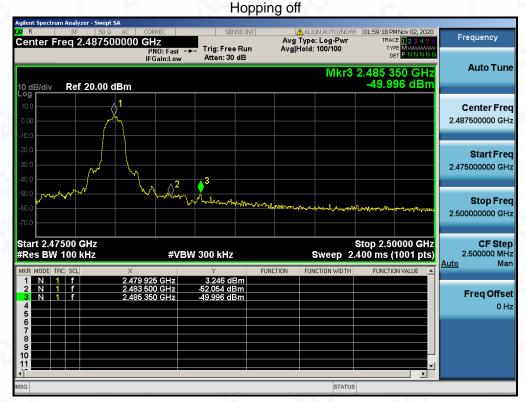

# 8-DPSK MODULATION IN HIGH CHANNEL

Hopping on





# **10. RADIATED EMISSION**

#### **10.1. MEASUREMENT PROCEDURE**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.