



FCC RADIO TEST REPORT

FCC ID: OMO-M-19

Product : Quadrocopter Remote Control 2.4Ghz FHSS System
Trade Name : Lacrosse
Model Name : MC-131
Serial Model : N/A
Report No. : NTEK-2013NT0603113F

Prepared for

La Crosse Technology Ltd.

2809 Losey Blvd. South, La Crosse, Wisconsin, United States

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name : La Crosse Technology Ltd.
Address : 2809 Losey Blvd. South, La Crosse, Wisconsin, United States
Manufacturer's Name : La Crosse Technology Ltd.
Address : 2809 Losey Blvd. South, La Crosse, Wisconsin, United States

Product description

Product name..... : Quadcopter Remote Control 2.4Ghz FHSSSystem
Model and/or type reference : MC-131
Serial Model : N/A
Rating(s)..... : DC 3.0V

Standards : FCC Part15.249

Test procedure..... ANSI C63.4-2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test :
Date (s) of performance of tests..... : 11 May 2013 ~24 May 2013
Date of Issue..... : 24 May 2013
Test Result..... : **Pass**

Testing Engineer : Apple Huang
(Apple Huang)
Technical Manager : Tom Zhang
(Tom Zhang)
Authorized Signatory : Bovey Yang
(Bovey Yang)

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . ANTENNA REQUIREMENT	12
3.1 STANDARD REQUIREMENT	12
3.2 EUT ANTENNA	12
3.3 CONDUCTED EMISSION MEASUREMENT	13
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.3.2 TEST PROCEDURE	14
3.3.3 DEVIATION FROM TEST STANDARD	14
3.3.4 TEST SETUP	14
3.2.5 TEST RESULT	15
3.4 RADIATED EMISSION MEASUREMENT	16
3.4.1 RADIATED EMISSION LIMITS	16
3.4.2 TEST PROCEDURE	17
3.4.3 DEVIATION FROM TEST STANDARD	17
3.4.4 TEST SETUP	18
3.4.5 TEST RESULTS (BLOW 30MHZ)	20
3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	21
3.4.7 TEST RESULTS (ABOVE 1000 MHZ)	23
3.4.8 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	29
4 . BANDWIDTH TEST	33
4.1 TEST PROCEDURE	33
4.2 DEVIATION FROM STANDARD	33
4.3 TEST SETUP	33
4.4 TEST RESULTS	34
5 . EUT TEST PHOTO	37
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.249)			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.203	Antenna Requirement	Pass	
15.249	Radiated Spurious Emission	Pass	
15.205	Band Edge Emission	Pass	
15.249	Occupied Bandwidth	Pass	

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Quadrocopter Remote Control 2.4Ghz FHSSSystem	
Trade Name	Lacrosse	
Model Name	MC-131	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Quadrocopter Remote Control 2.4Ghz FHSSSystem	
	Operation Frequency:	2402~2480MHz
	Modulation Type:	FSK
	Antenna Designation:	PCB Antenna
	Antenna Gain(Peak)	0.8 dBi
	EIRP	64.06dbuv/m@3m(AVG)
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Adapter	N/A	
Battery	1.5V*2cell "AAA" alkaline battery	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel No.	TX frequency (MHz)
CH1	2403.9
CH2	2441.6
CH3	2480.6

3.

Table for Filed Antenna

Ant .	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	N/A	0.8	Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX CH1
Mode 2	TX CH2
Mode 3	TX CH3


For Conducted Emission	
Final Test Mode	Description
Mode 1	N/A

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX CH1
Mode 2	TX CH2
Mode 3	TX CH3

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT use new battery.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Lacrosse	MC-131	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS**Radiation Test equipment**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	160400005	Jul. 06. 2012
2	Test Receiver	R&S	ESPI	101318	Jul. 06. 2012
3	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06. 2012
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	Jul. 06. 2012
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	Jul. 06. 2012
6	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06. 2012
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	Jul. 06. 2012
8	Amplifier	EM	EM-30180	060538	Jul. 06. 2012
9	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06. 2012
10	Power Meter	R&S	NRVS	100696	Jul. 06. 2012

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Receiver	R&S	ESCI	101160	Jul. 06. 2012
2	LISN	R&S	ENV216	101313	Jul. 06. 2012
3	LISN	EMCO	3816/2	00042990	Jul. 06. 2012
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	Jul. 06. 2012
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	Jul. 06. 2012
6	Absorbing clamp	R&S	MOS-21	100423	Jul. 06. 2012

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It complies with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	CISPR
5.0 -30.0			60.00	50.00	CISPR

0.15 -0.5			66 - 56 *	56 - 46 *	LP002.
0.50 -5.0			56.00	46.00	LP002.
5.0 -30.0			60.00	50.00	LP002.

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

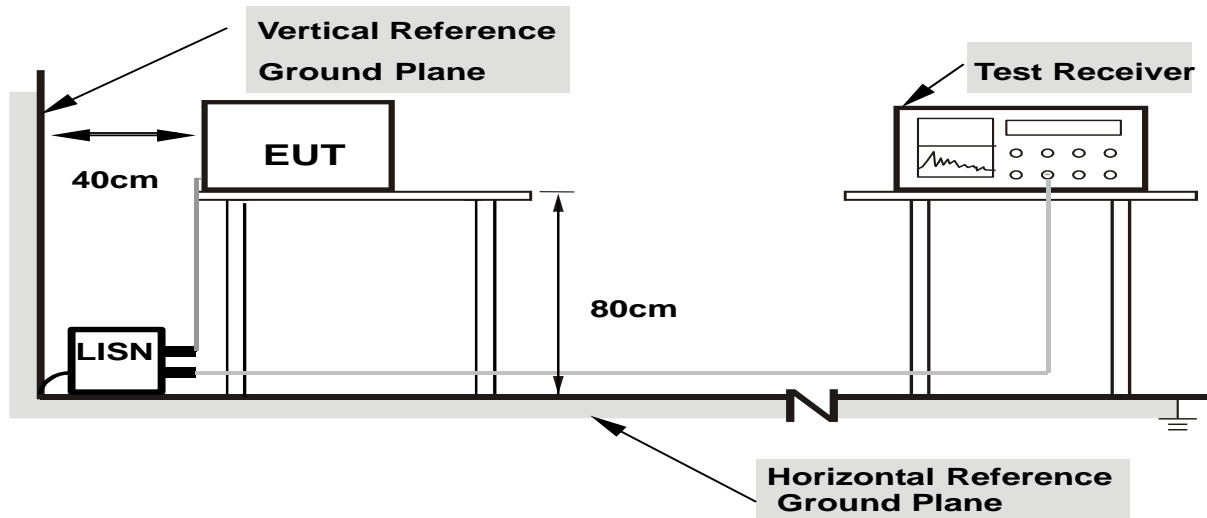

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.2.5 TEST RESULT

EUT :	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Model Name. :	MC-131
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	N/A	Test Mode :	N/A

3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.249)

Frequency of Emission (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
2400 - 2483.5	50	500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.4.3 DEVIATION FROM TEST STANDARD


No deviation

3.4.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

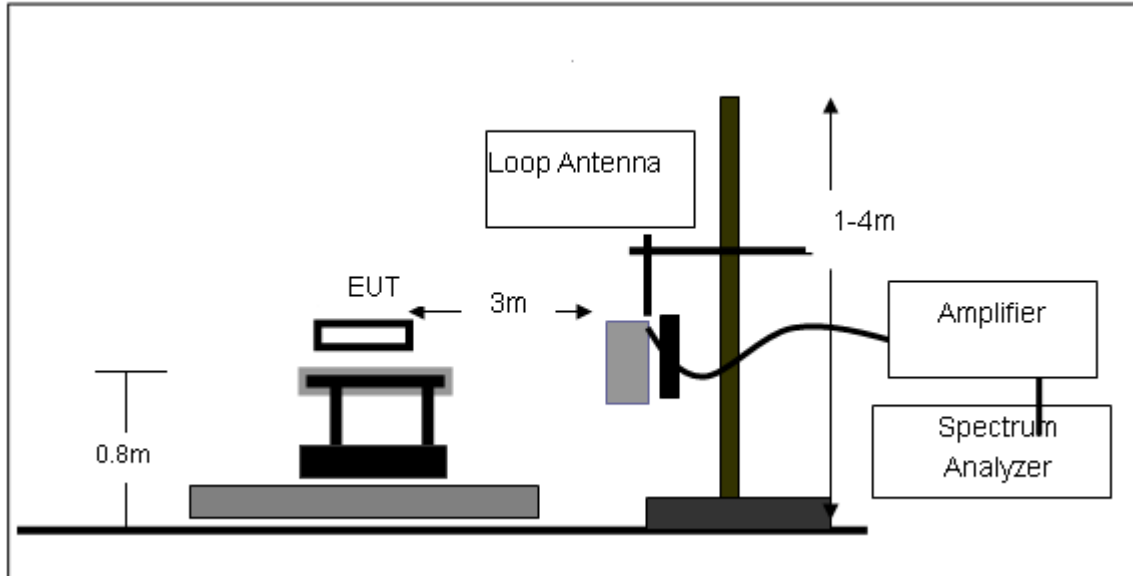

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

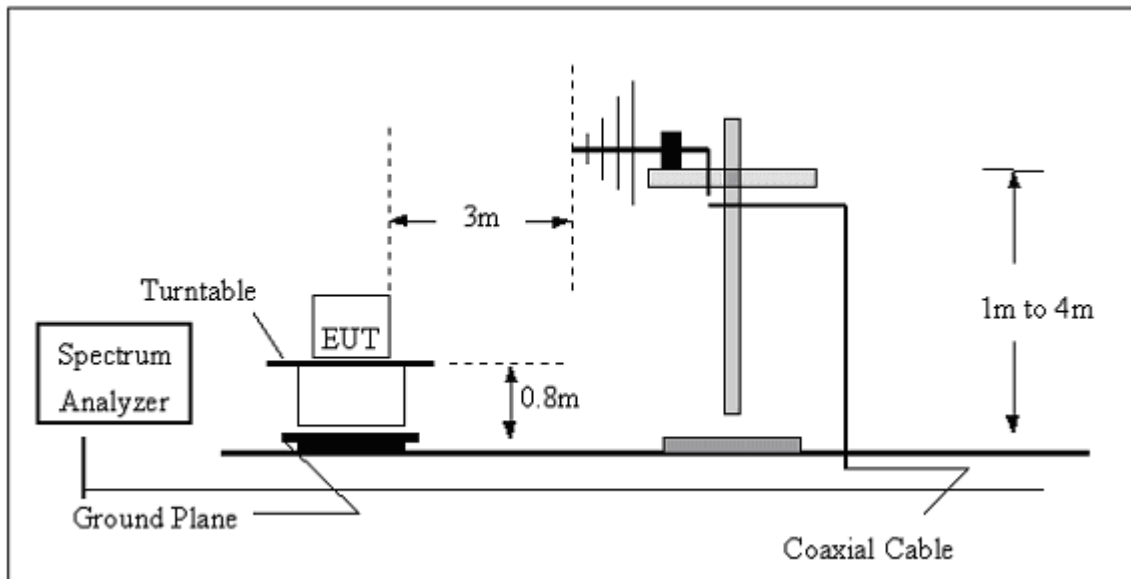

(C) Radiated Emission Test-Up Frequency Above 1GHz

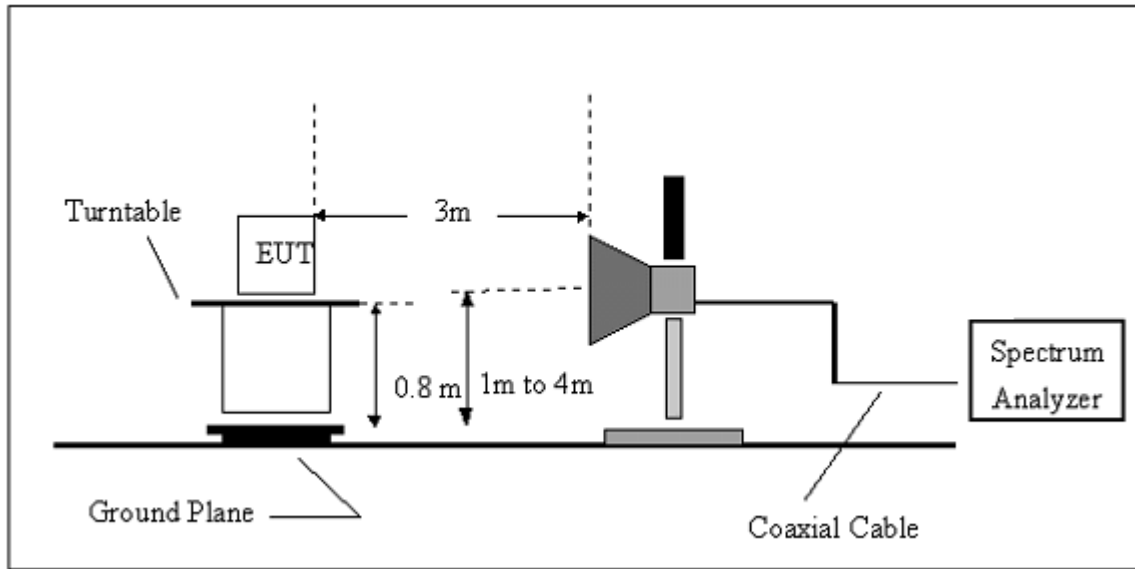

3.4.5 TEST RESULTS (BELOW 30MHz)

EUT :	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Model Name. :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

EUT :	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
33.3278	9.93	16.59	26.52	40	-13.48	QP
110.9571	12.75	11.47	24.22	43.5	-19.28	QP
133.6188	14.25	11.96	26.21	43.5	-17.29	QP
166.068	12.75	10.36	23.11	43.5	-20.39	QP
330.1949	9.44	14.95	24.39	46	-21.61	QP
515.4374	11.45	19.42	30.87	46	-15.13	QP

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.

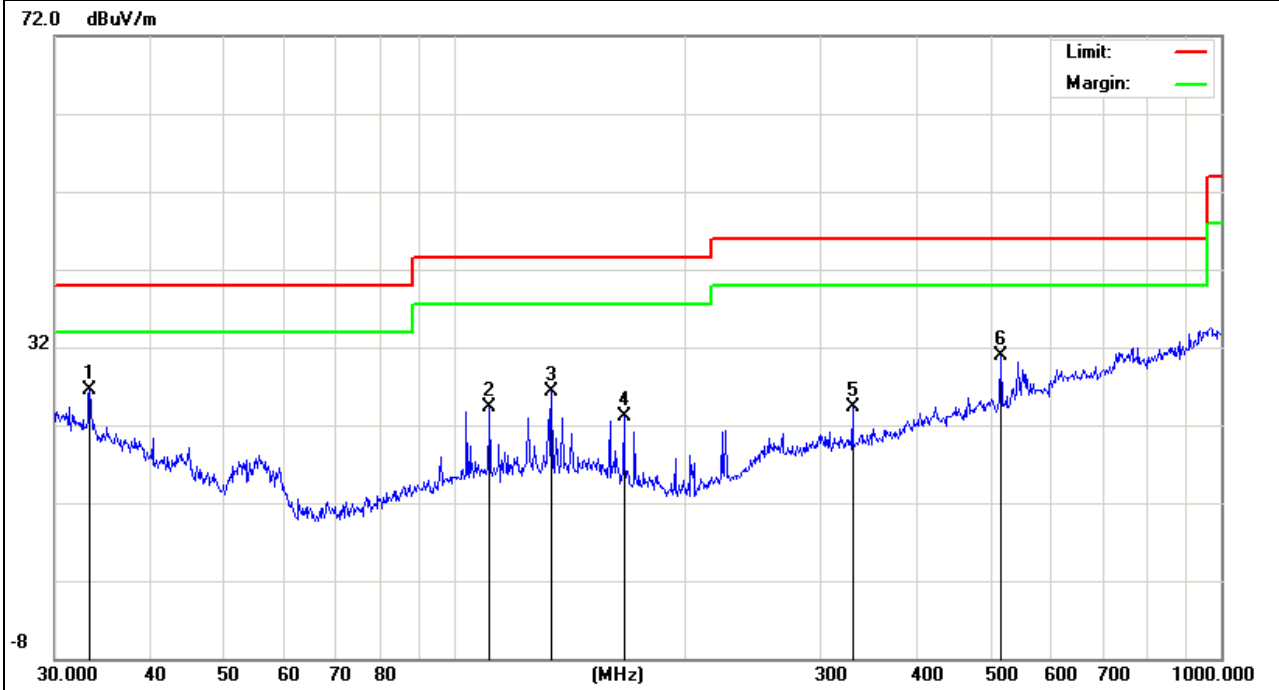


EUT :	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
33.2111	6.62	16.65	23.27	40	-16.73	QP
118.1861	6.4	11.74	18.14	43.5	-25.36	QP
200.688	12.41	8.74	21.15	43.5	-22.35	QP
265.6757	9.16	13.83	22.99	46	-23.01	QP
554.8251	6.78	21.65	28.43	46	-17.57	QP
903.3093	7.56	25.77	33.33	46	-12.67	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

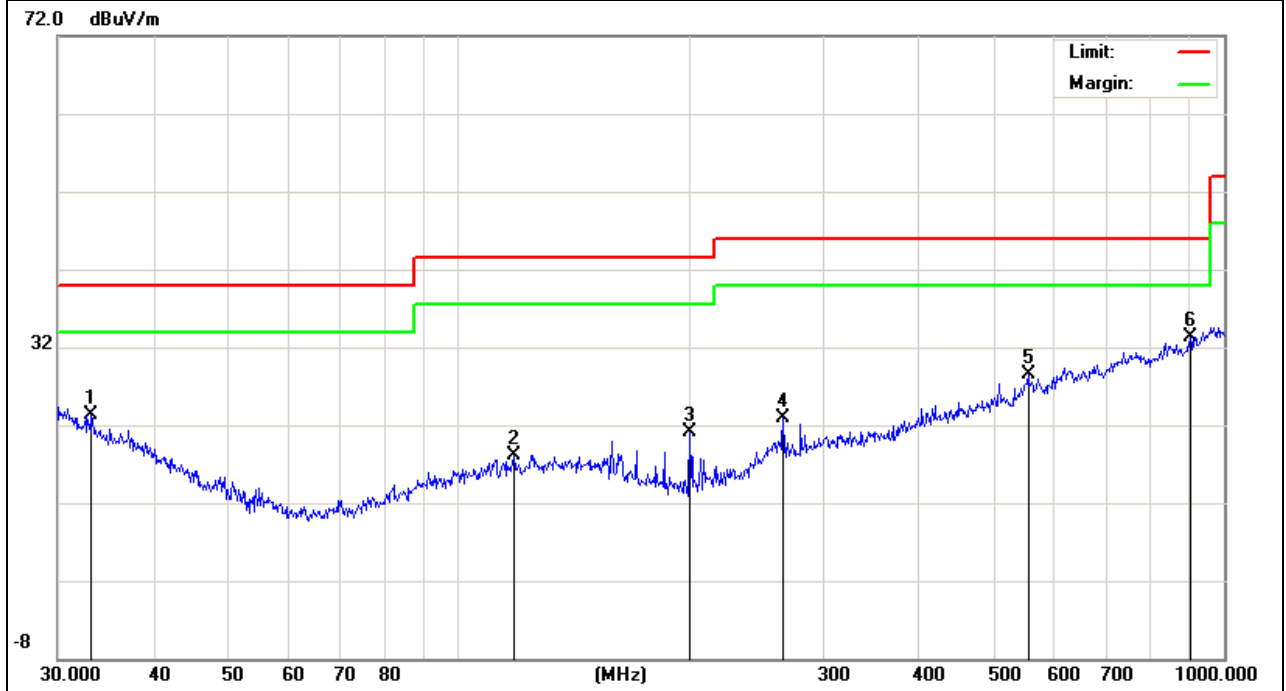


3.4.7 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2403.9MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2403.9	100.02	-12.99	87.03	114.00	-26.97	peak
4825	73.54	-3.59	69.95	74.00	-4.05	peak
4825	52.48	-3.59	48.89	54.00	-5.11	AVG
7205	60.98	-0.96	60.02	74.00	-13.98	peak
7205	46.48	-0.96	45.52	54.00	-8.48	AVG


Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 No emission detected above 18GHz.

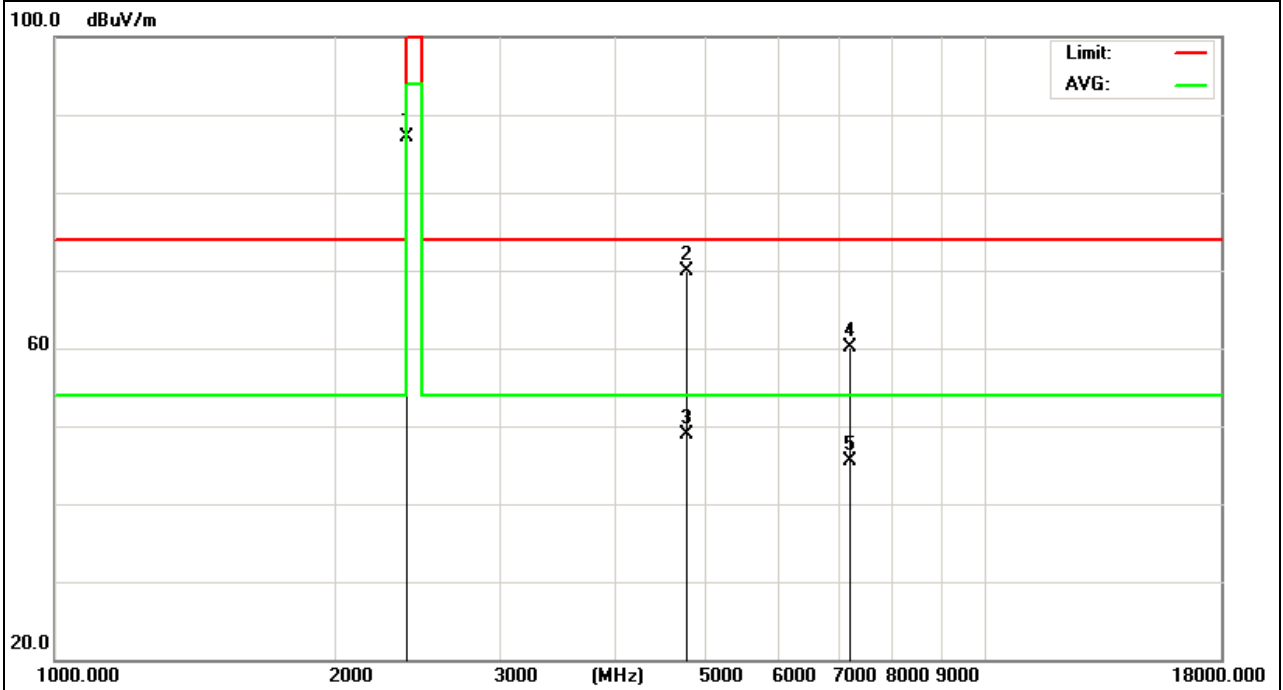

EUT :	Quadcopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2403.9MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2403.9	100.06	-12.99	87.07	114.00	-26.93	peak
3592.5	59.37	-9.20	50.17	74.00	-23.83	peak
4825	72.67	-3.59	69.08	74.00	-4.92	peak
4825	52.88	-3.59	49.29	54.00	-4.71	AVG
7205	64.06	-0.96	63.1	74.00	-10.90	peak
7205	45.96	-0.96	45	54.00	-9.00	AVG


Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 No emission detected above 18GHz.

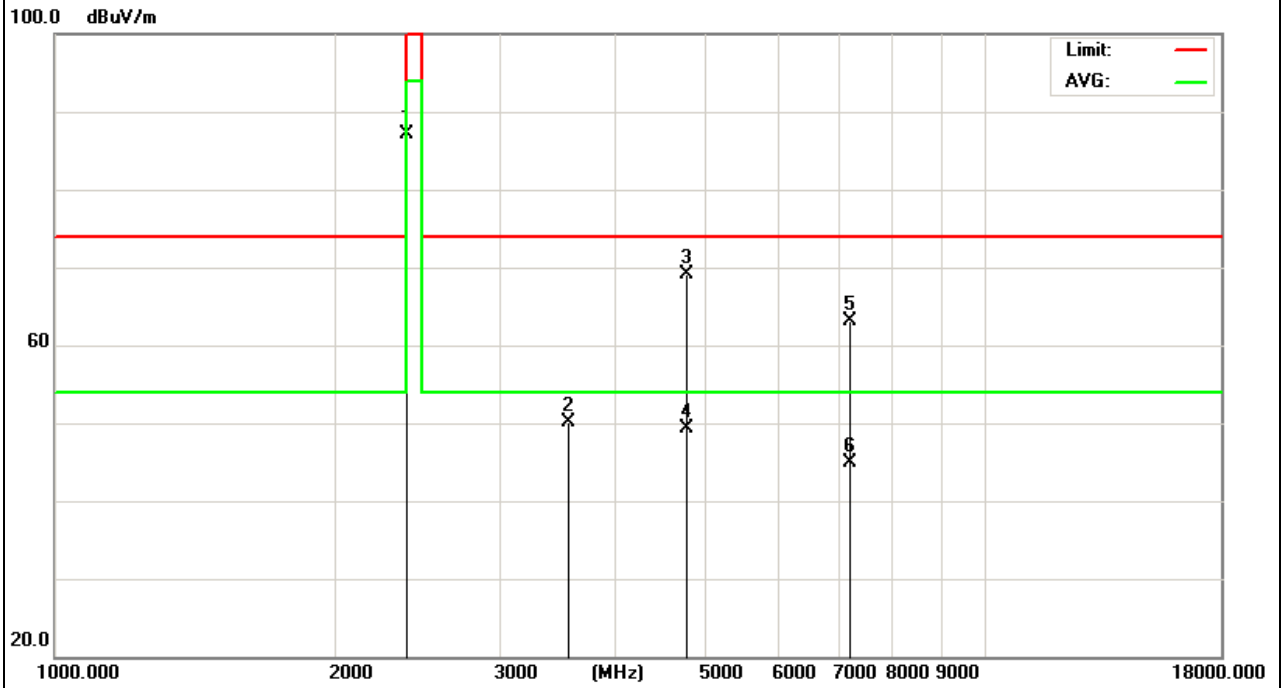

EUT :	Quadcopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2441.6MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441.6	100	-12.93	87.07	114.00	-26.93	peak
3677.5	60.15	-8.85	51.3	74.00	-22.70	peak
4910	72.96	-3.73	69.23	74.00	-4.77	peak
4910	52.77	-3.73	49.04	54.00	-4.96	AVG
7332.5	62.99	-0.82	62.17	74.00	-11.83	peak
7332.5	45.44	-0.82	44.62	54.00	-9.38	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 No emission detected above 18GHz.

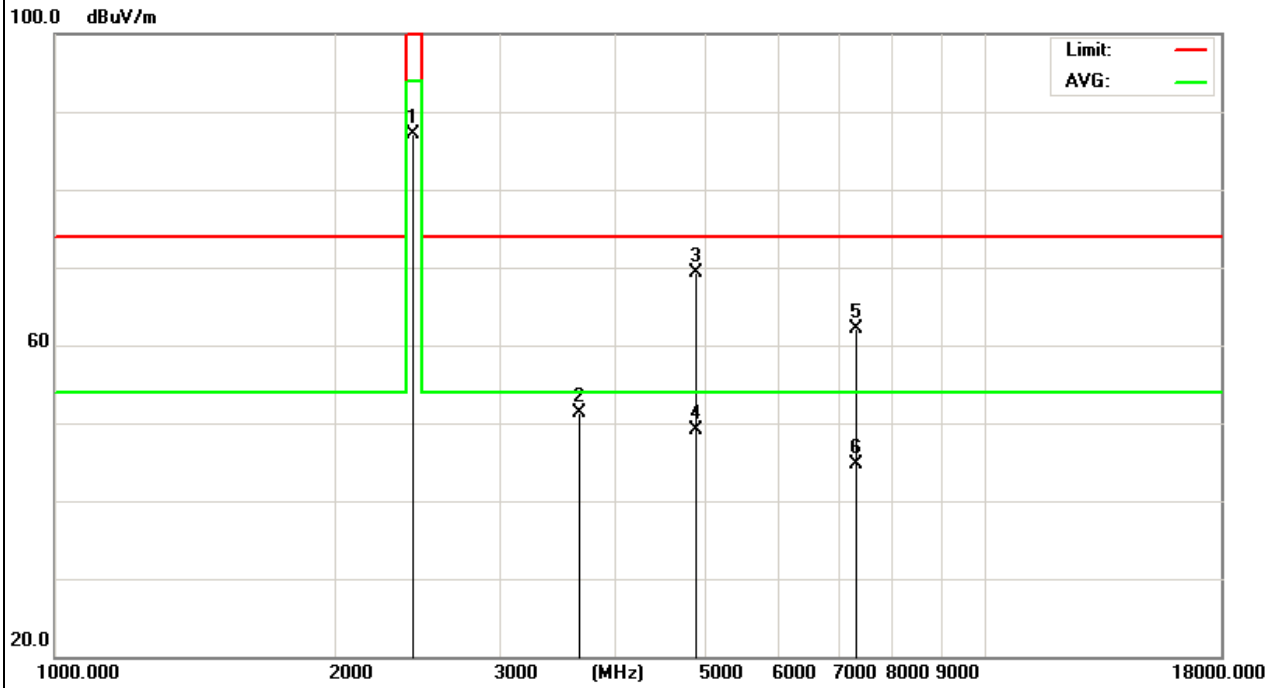


EUT :	Quadcopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2441.6MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2441.6	99.49	-12.93	86.56	114.00	-27.44	peak
4910	75.2	-3.73	71.47	74.00	-2.53	peak
4910	54.64	-3.73	50.91	54.00	-3.09	AVG
7332.5	62.77	-0.82	61.95	74.00	-12.05	peak
7332.5	46.41	-0.82	45.59	54.00	-8.41	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.


No emission detected above 18GHz.

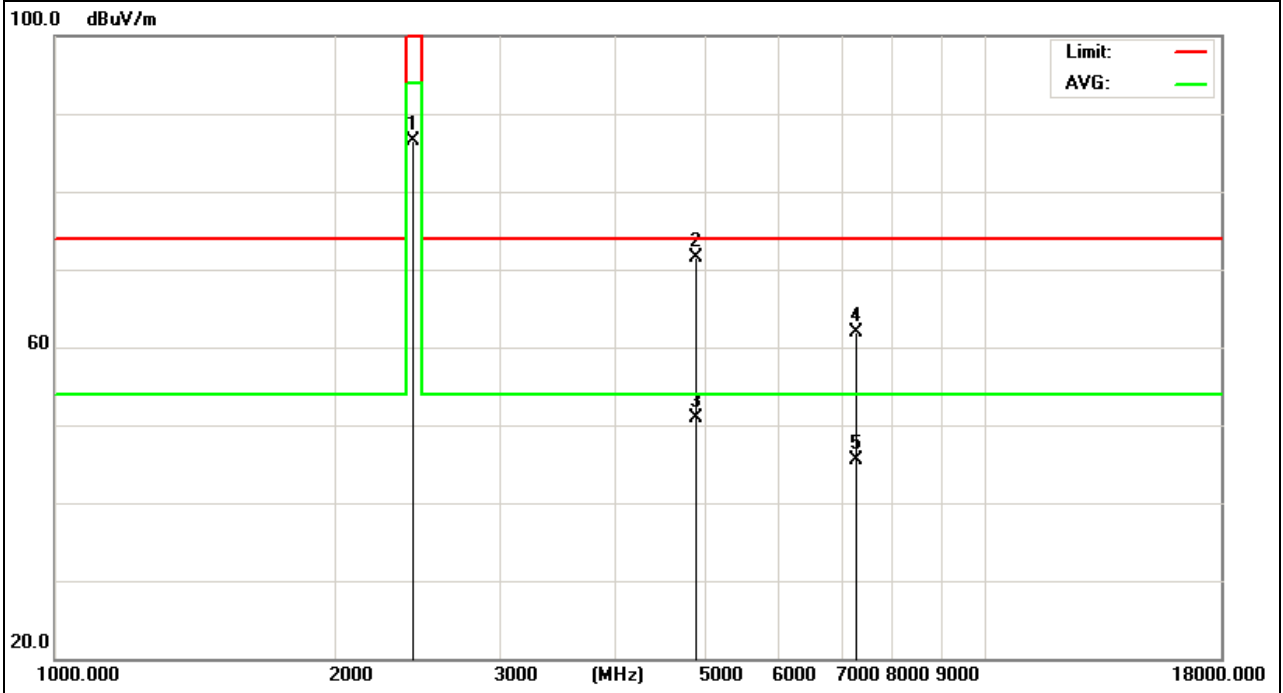

EUT :	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2480.6MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2480.6	98.73	-12.77	85.96	114.00	-28.04	peak
3720.0	59.71	-8.59	51.12	74.00	-22.88	peak
4952.5	72.90	-3.55	69.35	74.00	-4.65	peak
4952.5	51.74	-3.55	48.19	54.00	-5.81	AVG
7460.0	65.49	-0.68	64.81	74.00	-9.19	peak
7460.0	45.99	-0.68	45.31	54.00	-8.69	AVG


Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 No emission detected above 18GHz.

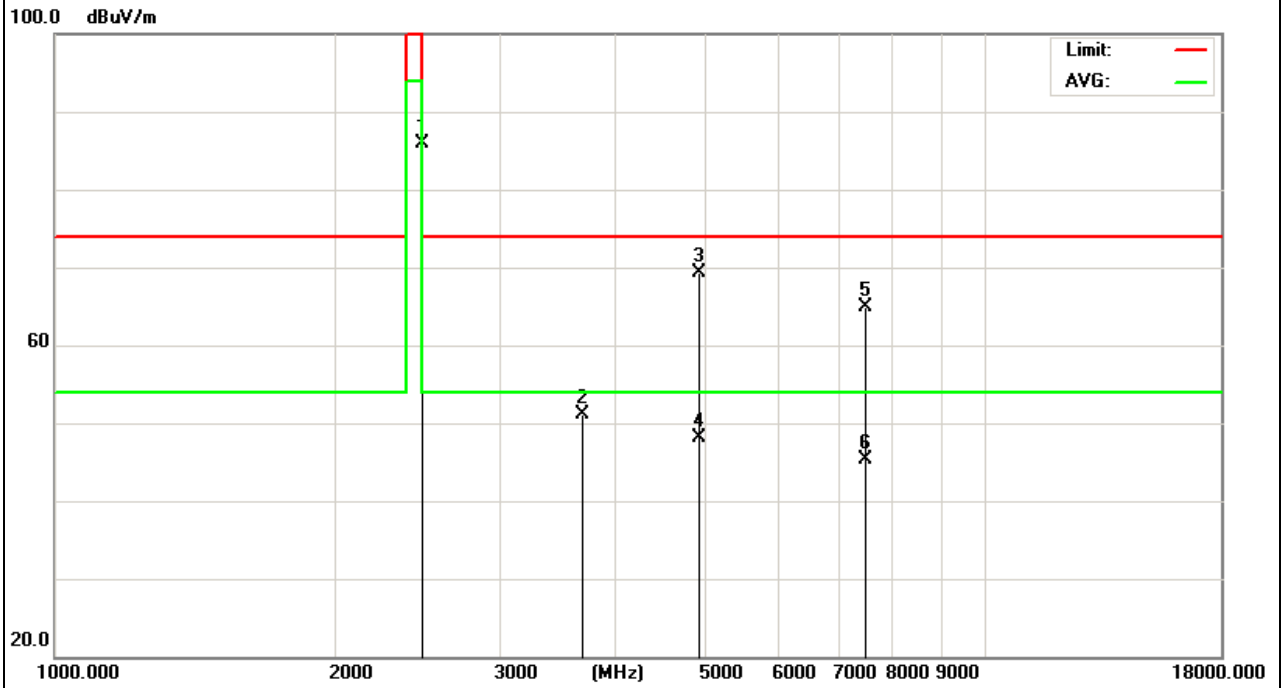

EUT :	Quadcopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2480.6MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2480.6	100.95	-12.77	88.18	114.00	-25.82	peak
3720	57.61	-8.59	49.02	74.00	-24.98	peak
4952.5	76.05	-3.55	72.5	74.00	-1.5	peak
4952.5	52.64	-3.55	49.09	54.00	-4.91	AVG
7460	62.85	-0.68	62.17	74.00	-11.83	peak
7460	45.65	-0.68	44.97	54.00	-9.03	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 No emission detected above 18GHz.

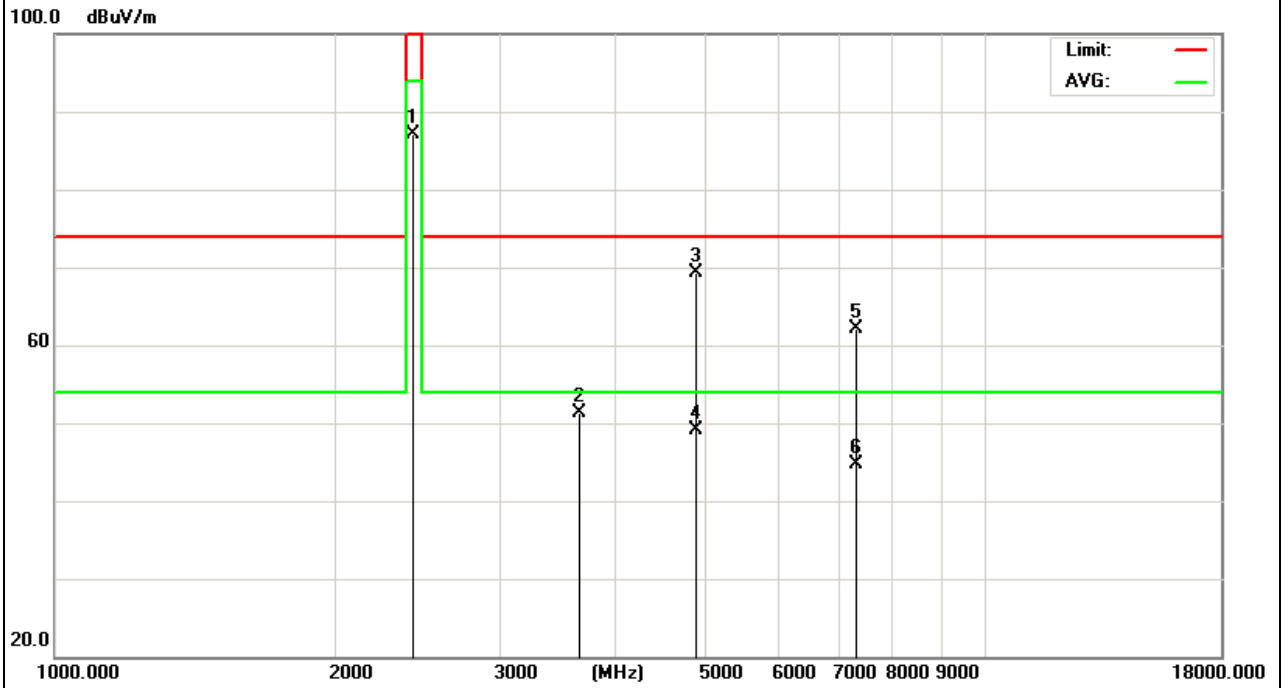


3.4.8 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

EUT :	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2403.9MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2398.825	47.39	-13.00	34.39	74.00	-39.61	peak
2400.000	44.35	-12.99	31.36	74.00	-42.64	peak


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

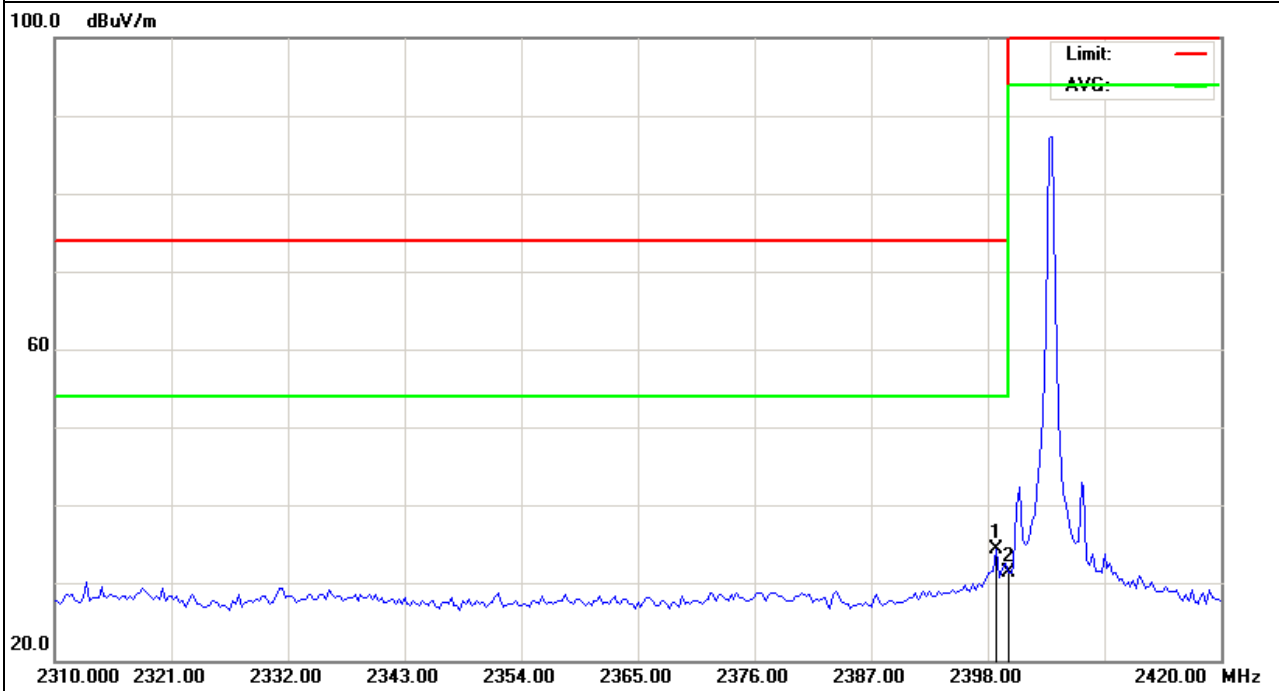

EUT :	Quadcopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2403.9MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2399.375	52.72	-12.99	39.73	74.00	-34.27	peak
2400.000	46.02	-12.99	33.03	74.00	-40.97	peak


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

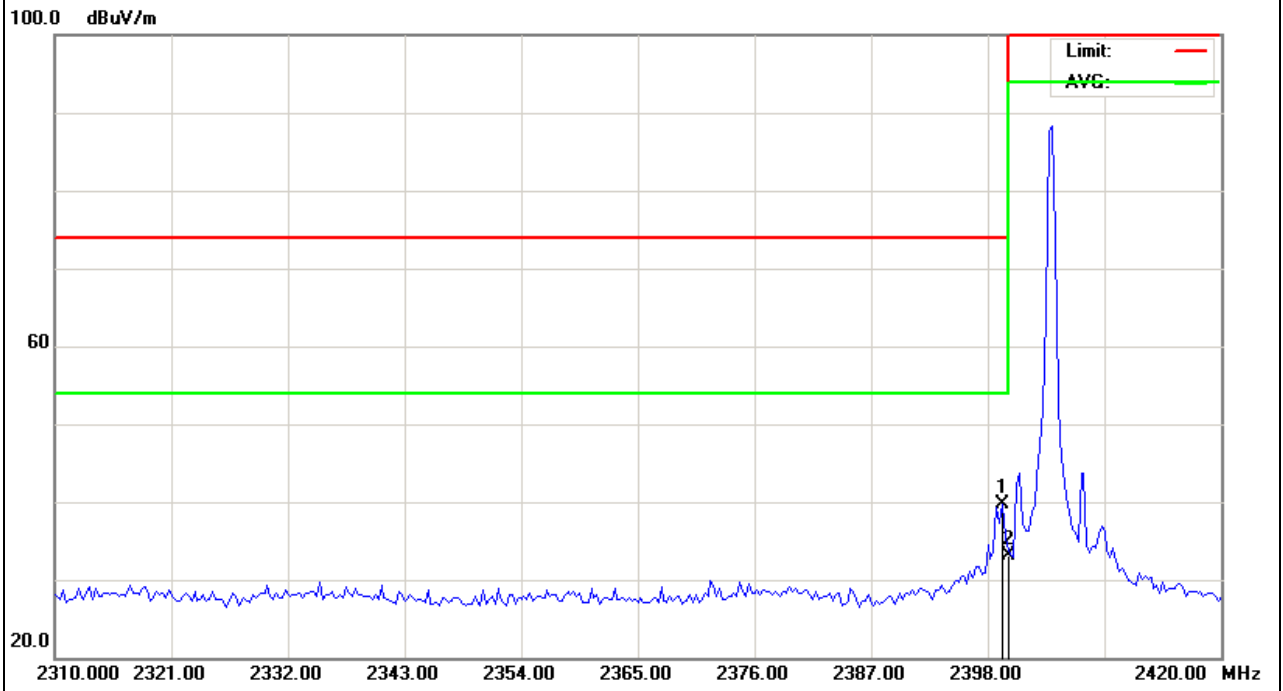

EUT :	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2480.6MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.500	49.44	-12.78	36.66	74.00	-37.34	peak
2484.500	56.80	-12.78	44.02	74.00	-29.98	peak


Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

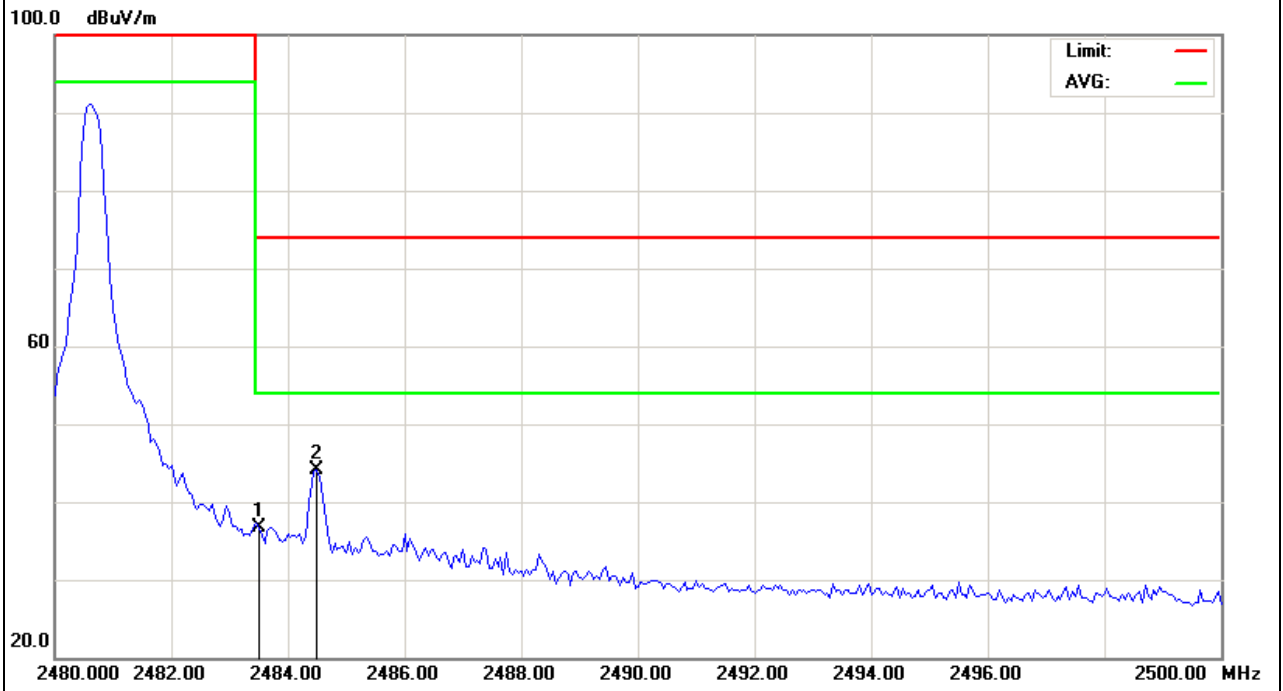

EUT :	Quadcopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX /2480.6MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.500	50.08	-12.78	37.30	74.00	-36.70	peak
2485.250	57.93	-12.78	45.15	74.00	-28.85	peak

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

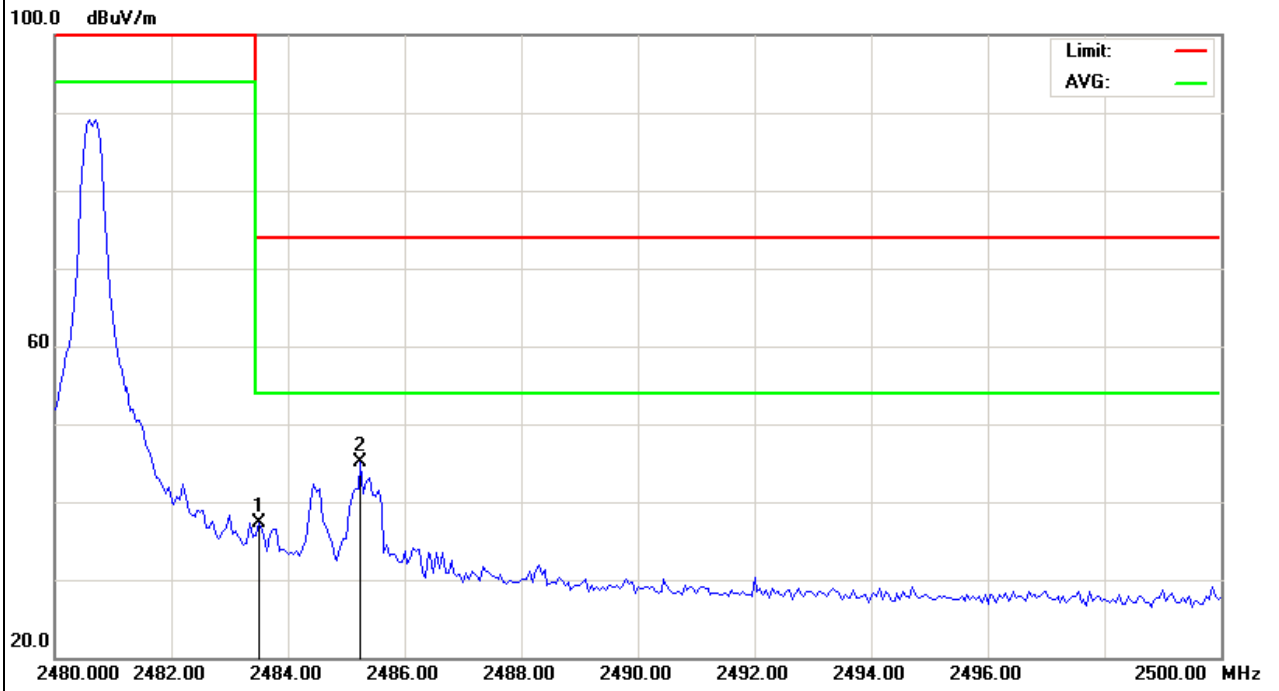

4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW \geq RBW, Sweep time = Auto.

4.2 DEVIATION FROM STANDARD

No deviation.

4.3 TEST SETUP



4.4 TEST RESULTS

EUT :	Quadrocopter Remote Control 2.4Ghz FHSSSystem	Model Name :	MC-131
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.0V
Test Mode :	TX		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (kHz)	99% Bandwidth (kHz)
CH1	2403.9	546.047	475.262
CH2	2441.6	561.148	495.346
CH3	2480.6	546.333	492.624


The Lowest Channel: 2403.9MHz

Agilent		R	T	Freq/Channel	
Ch Freq 2.4039 GHz		Trig Free		Center Freq 2.40390000 GHz	
Occupied Bandwidth				Start Freq 2.40240000 GHz	
Ref 0 dBm		Atten 10 dB		Stop Freq 2.40540000 GHz	
				CF Step 300.000000 kHz Auto Man	
Center 2.404 GHz		Span 3 MHz		Freq Offset 0.00000000 Hz	
#Res BW 100 kHz		#VBW 300 kHz		Sweep 5 ms (401 pts)	
Occupied Bandwidth 475.2622 kHz		Occ BW % Pwr		99.00 %	
Transmit Freq Error		-5.323 kHz		x dB	
x dB Bandwidth		546.047 kHz		-20.00 dB	
				Signal Track On Off	
				Scale Type Log Lin	

The Middle Channel: 2441.6MHz

Agilent		R	T	Trace/View	
Ch Freq 2.4416 GHz		Trig Free		Trace 1 2 3	
Occupied Bandwidth				Clear Write	
Ref 0 dBm		Atten 10 dB		Max Hold	
				Min Hold	
Center 2.442 GHz		Span 3 MHz		View	
#Res BW 100 kHz		#VBW 300 kHz		Blank	
Sweep 5 ms (401 pts)				More 1 of 2	
Occupied Bandwidth 495.3461 kHz		Occ BW % Pwr		99.00 %	
Transmit Freq Error		19.538 kHz		x dB	
x dB Bandwidth		561.148 kHz		-20.00 dB	

The High Channel:2480.6MHz

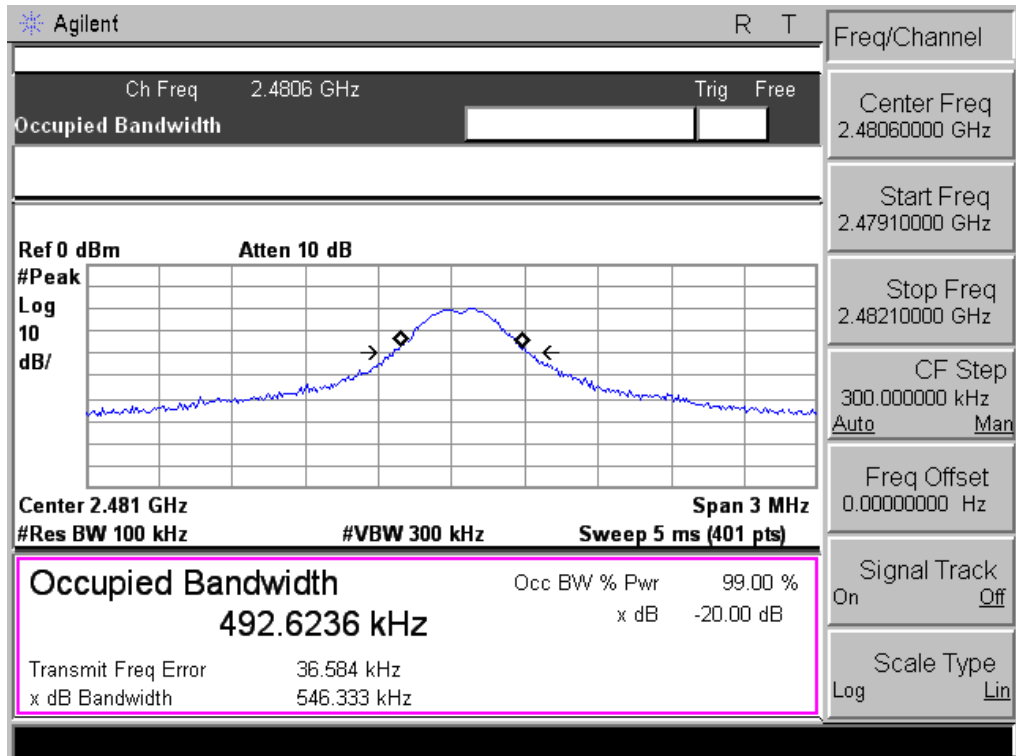

5. EUT TEST PHOTO

Radiated Measurement Photos

