


Annex B

Fundamental Field Strength


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 902.964MHz, Emax: 89.94dBµV/m, RBW: 1MHz

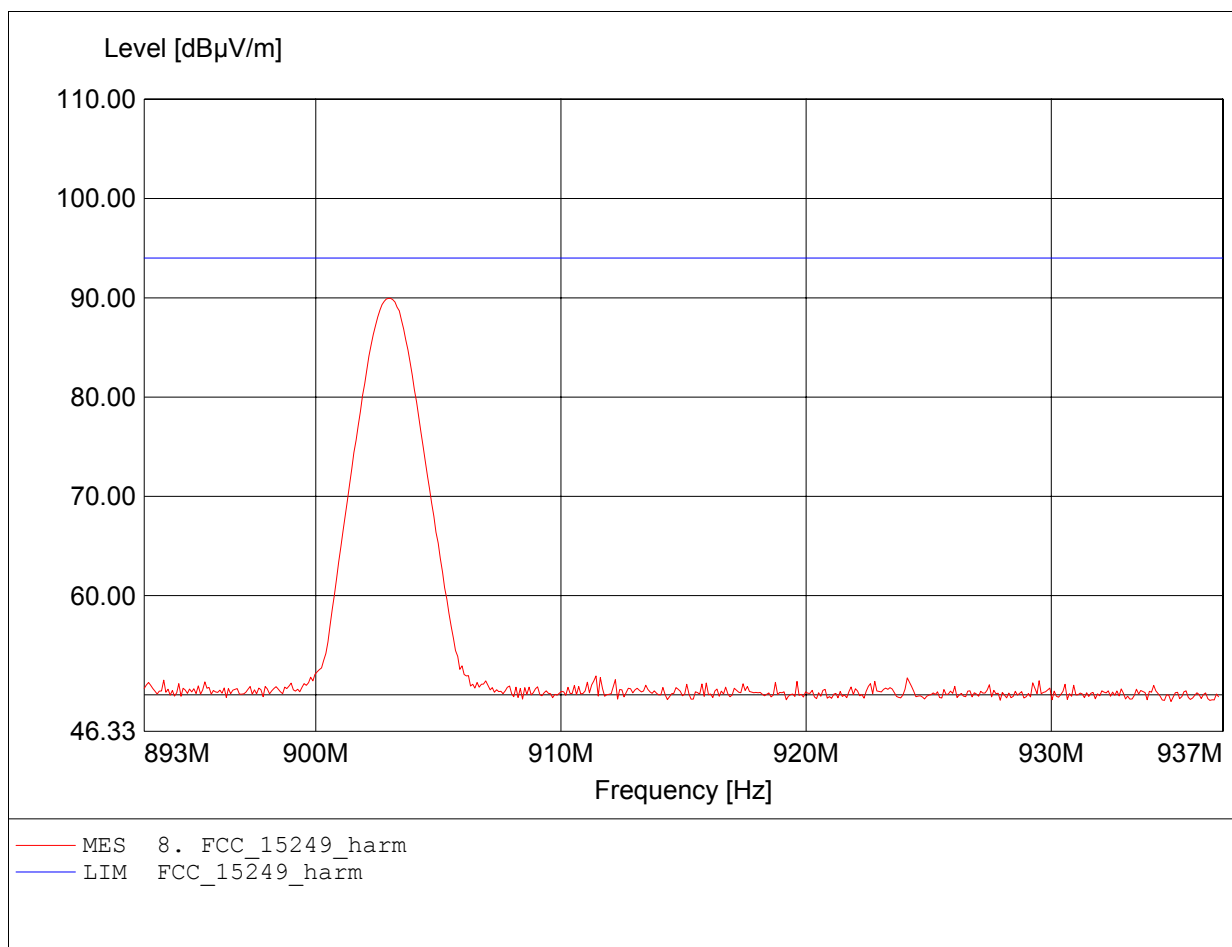


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 902.964MHz, Emax: 71.17dBµV/m, RBW: 1MHz

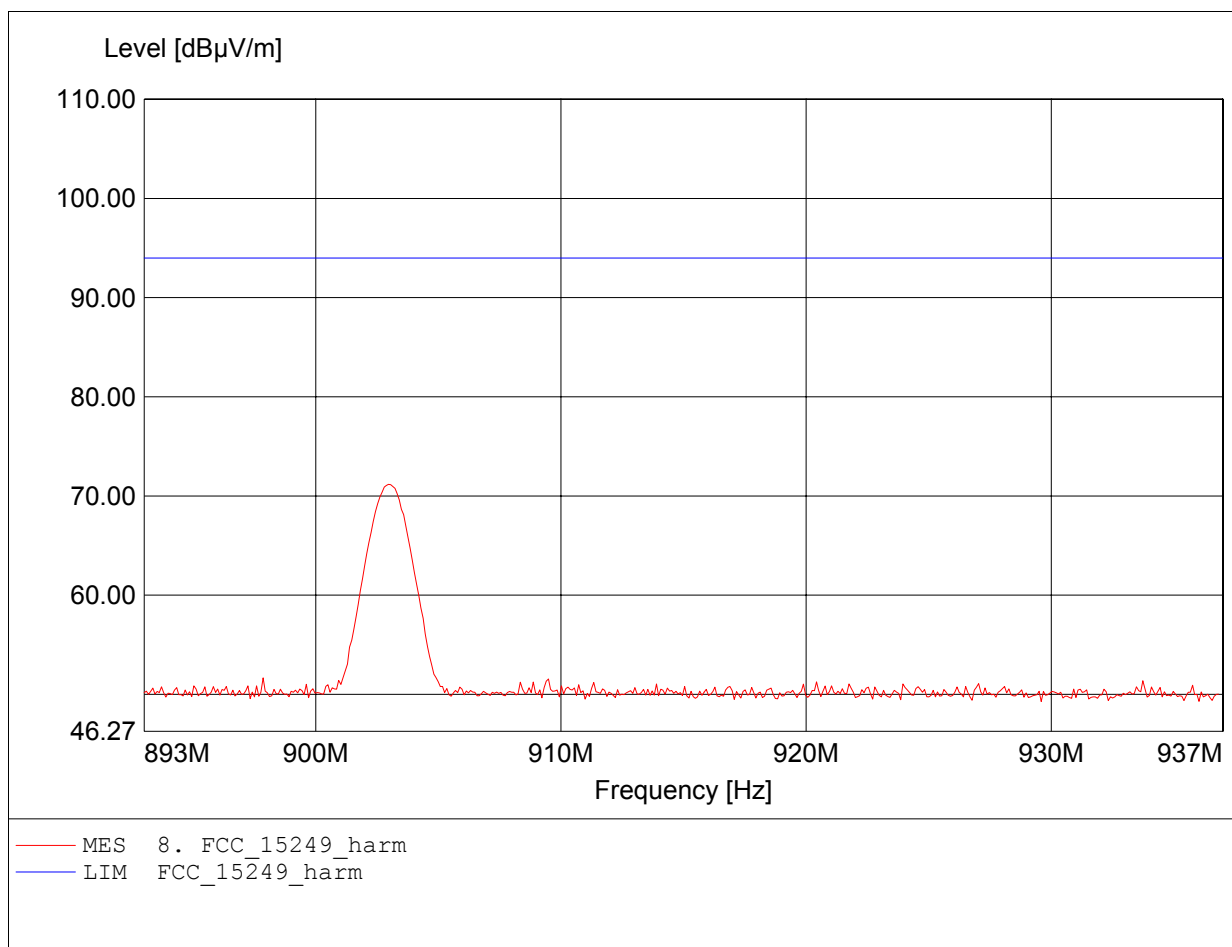


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 915.044MHz, Emax: 89.32dBµV/m, RBW: 1MHz

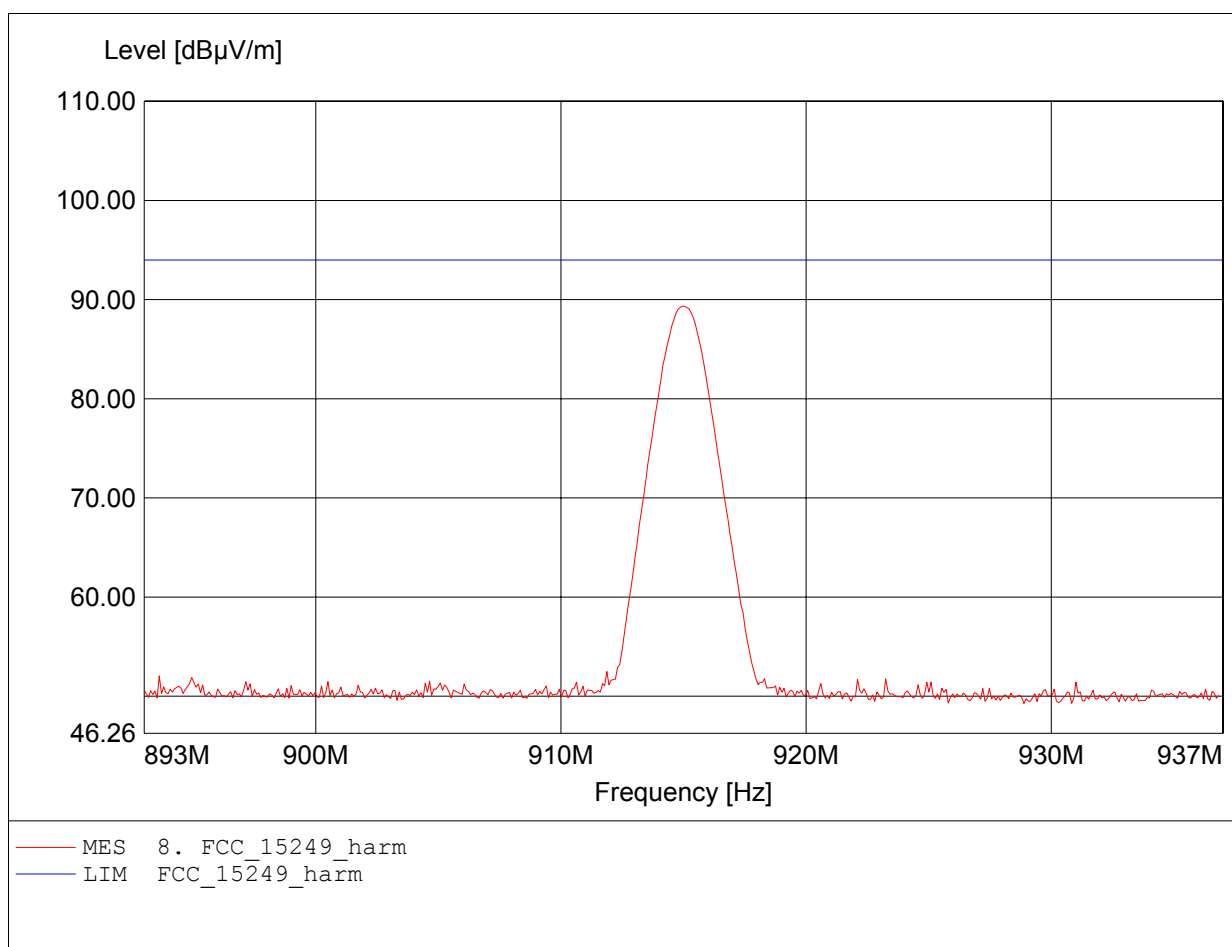


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 914.956MHz, Emax: 70.03dBµV/m, RBW: 1MHz

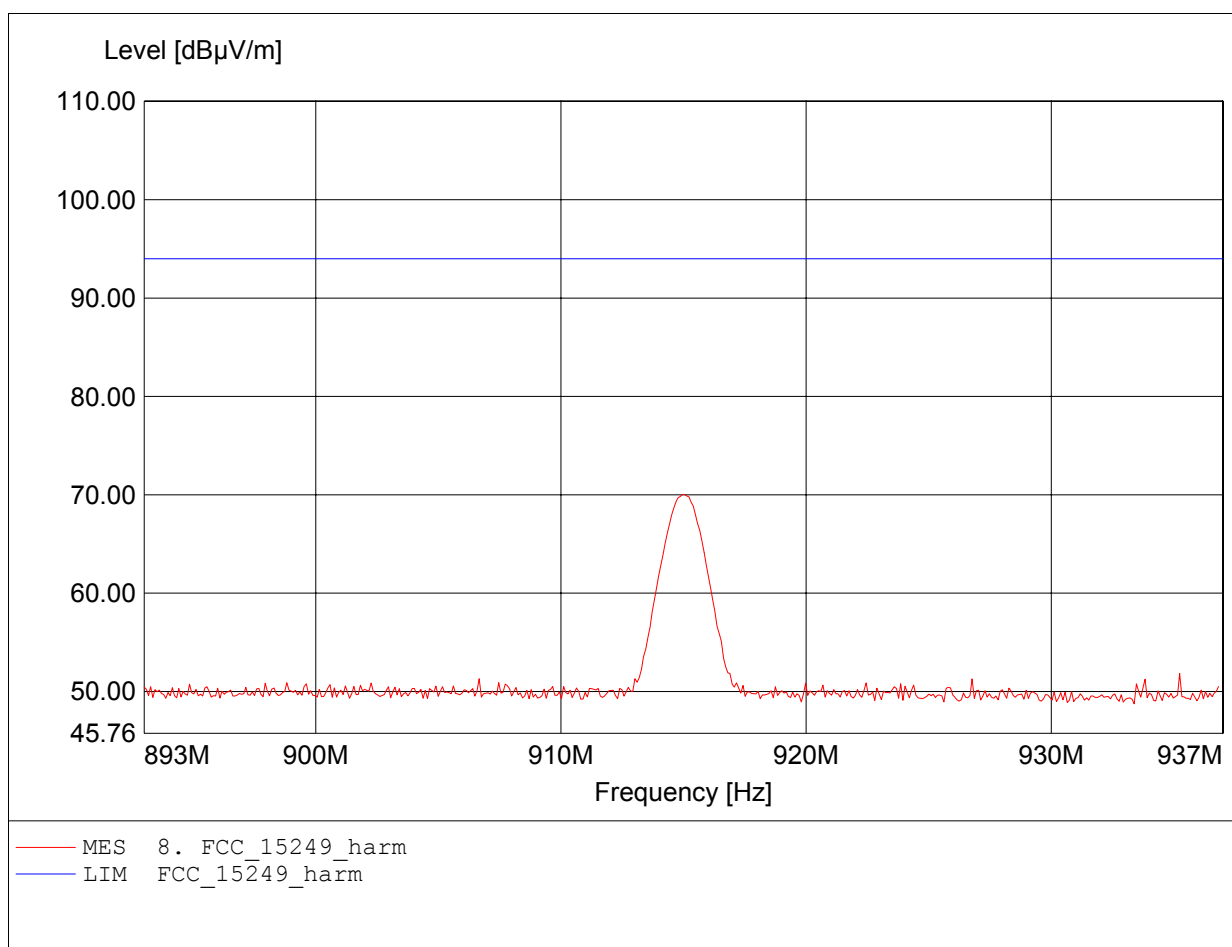


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 926.948MHz, Emax: 89.18dBµV/m, RBW: 1MHz

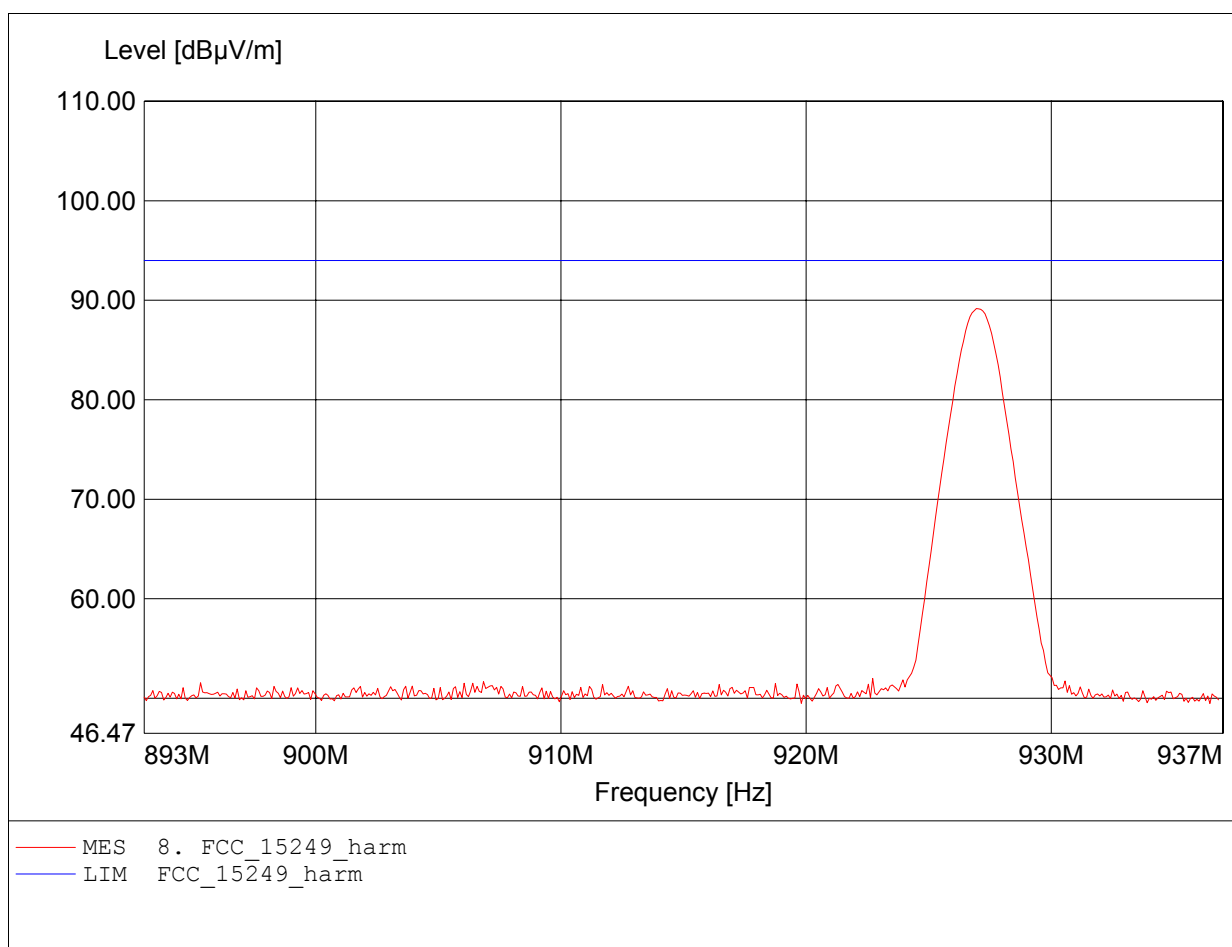

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 927.036MHz, Emax: 72.63dBµV/m, RBW: 1MHz

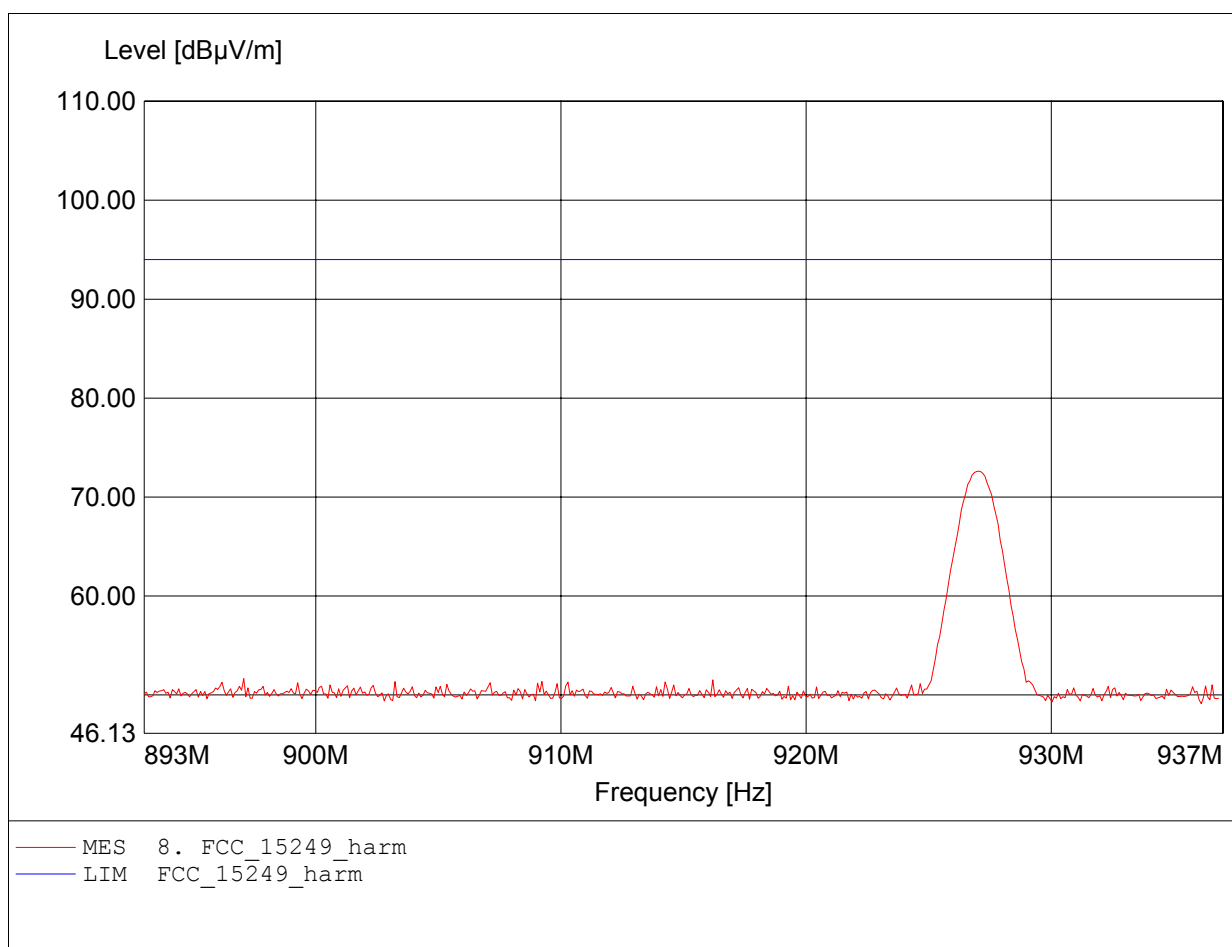


Annex C

Spurious Emissions radiated - Transmitter operating


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Traansmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.615MHz, Emax: 32.47dBµV/m, RBW: 100kHz

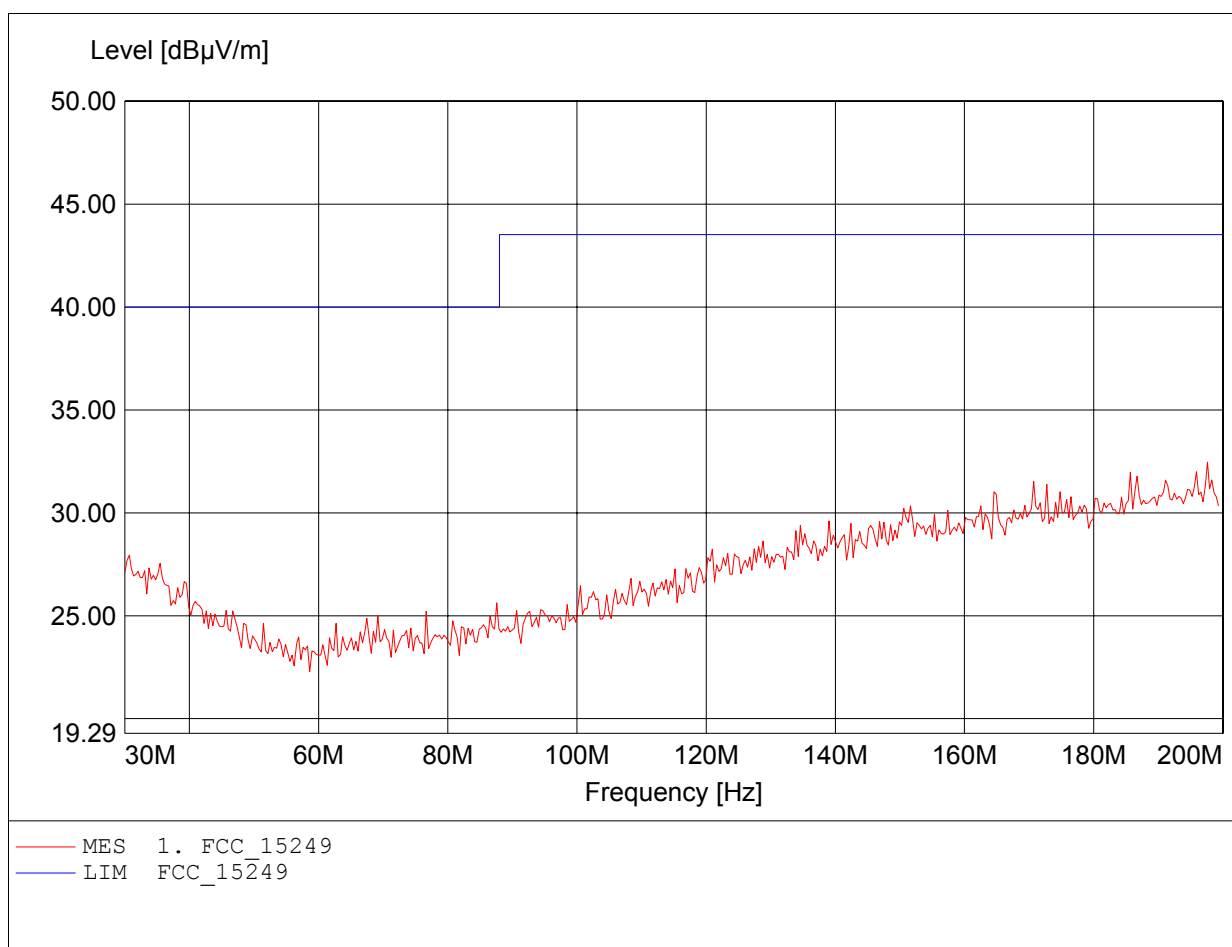


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Traansmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 180.922MHz, Emax: 32.02dBµV/m, RBW: 100kHz

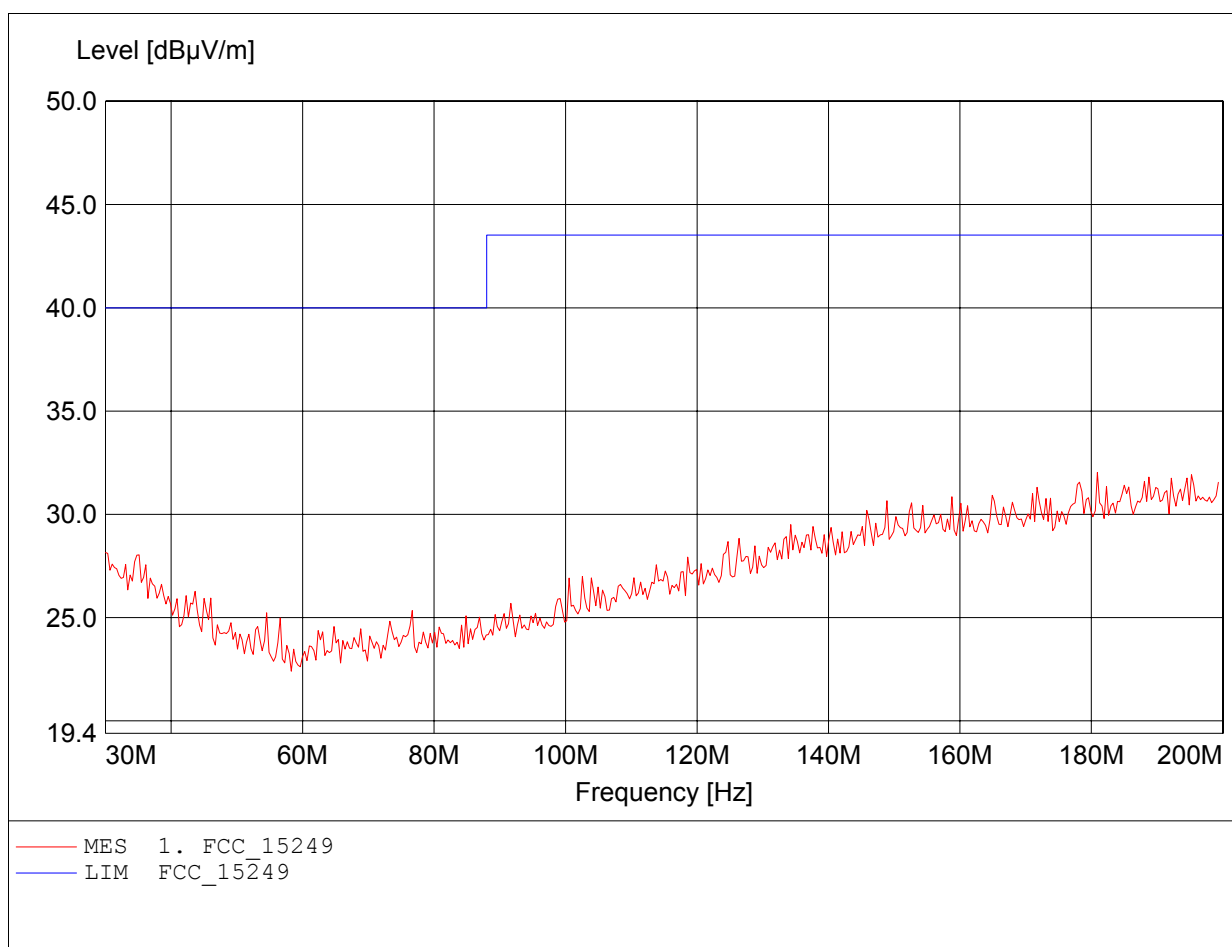


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 883.711MHz, Emax: 38.45dBµV/m, RBW: 100kHz

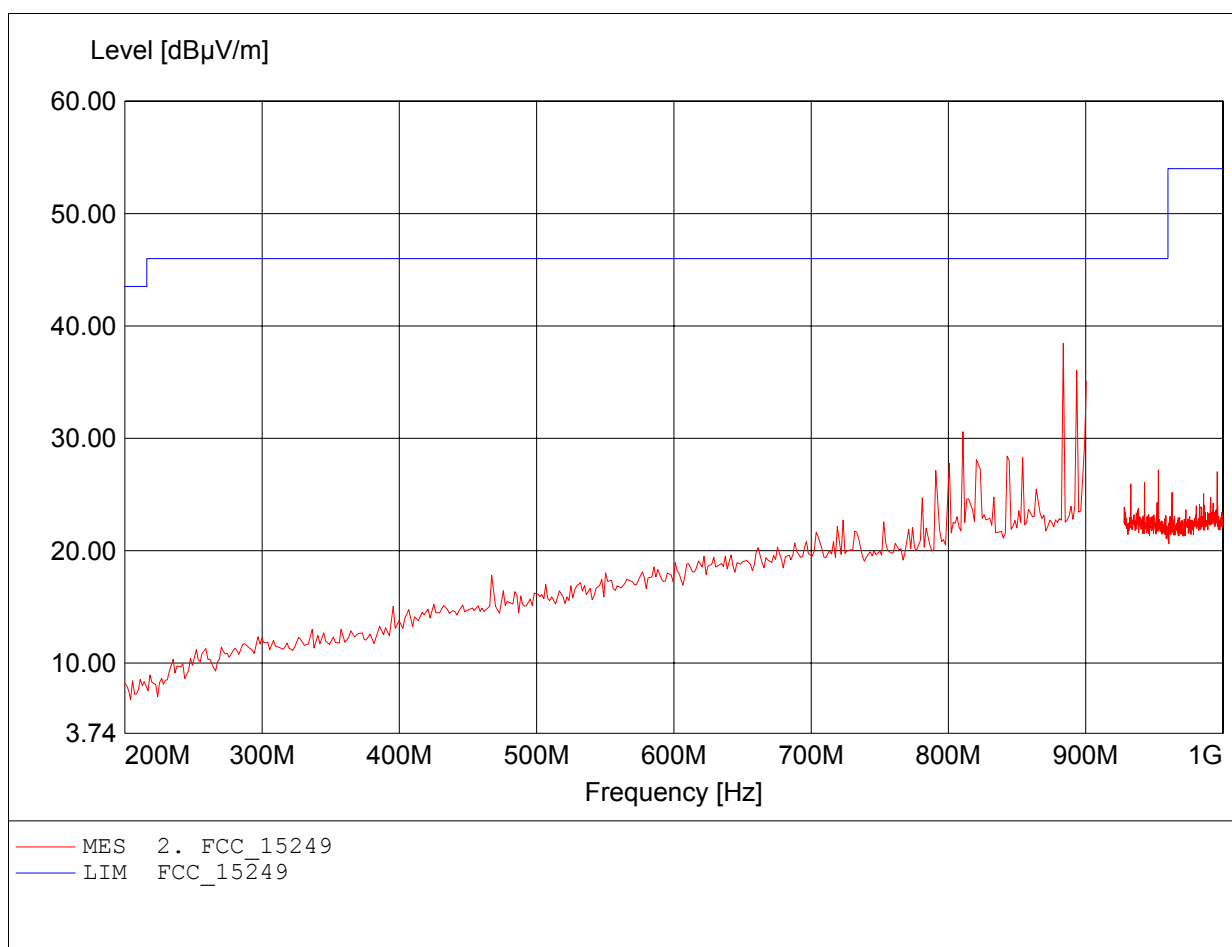


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 883.711MHz, Emax: 24.32dBµV/m, RBW: 100kHz

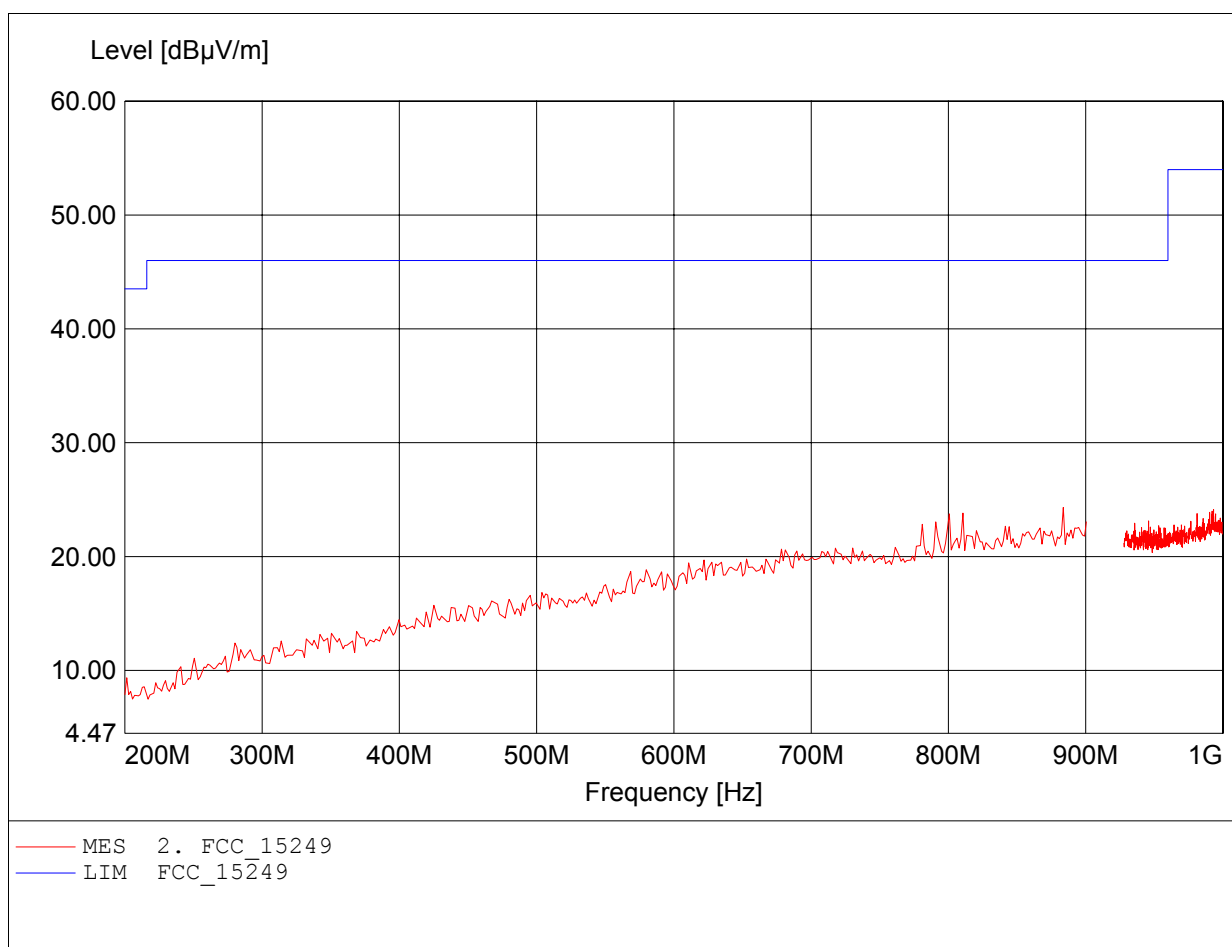


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 1.806GHz, Emax: 49.07dBµV/m, RBW: 1MHz

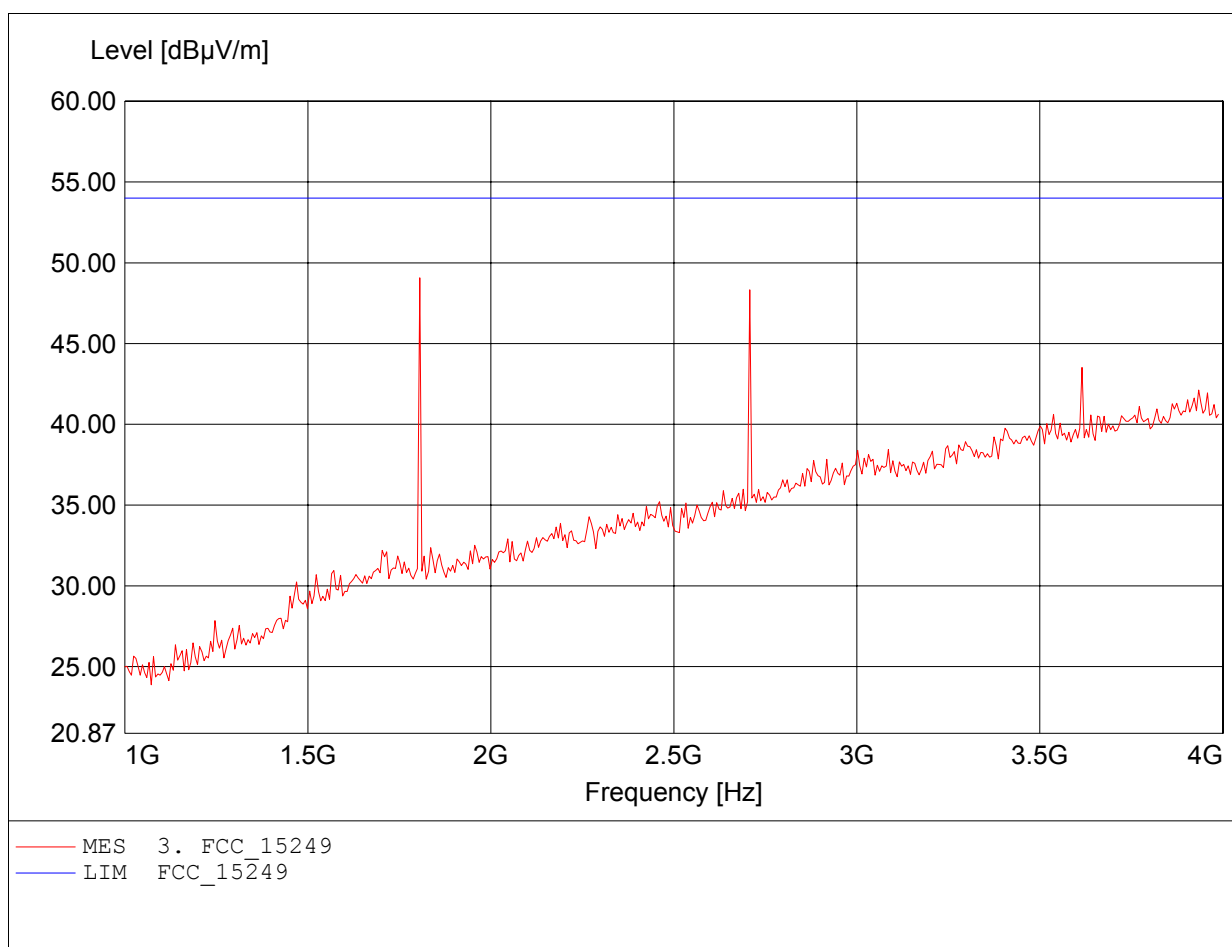


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.707GHz, Emax: 51.86dBµV/m, RBW: 1MHz

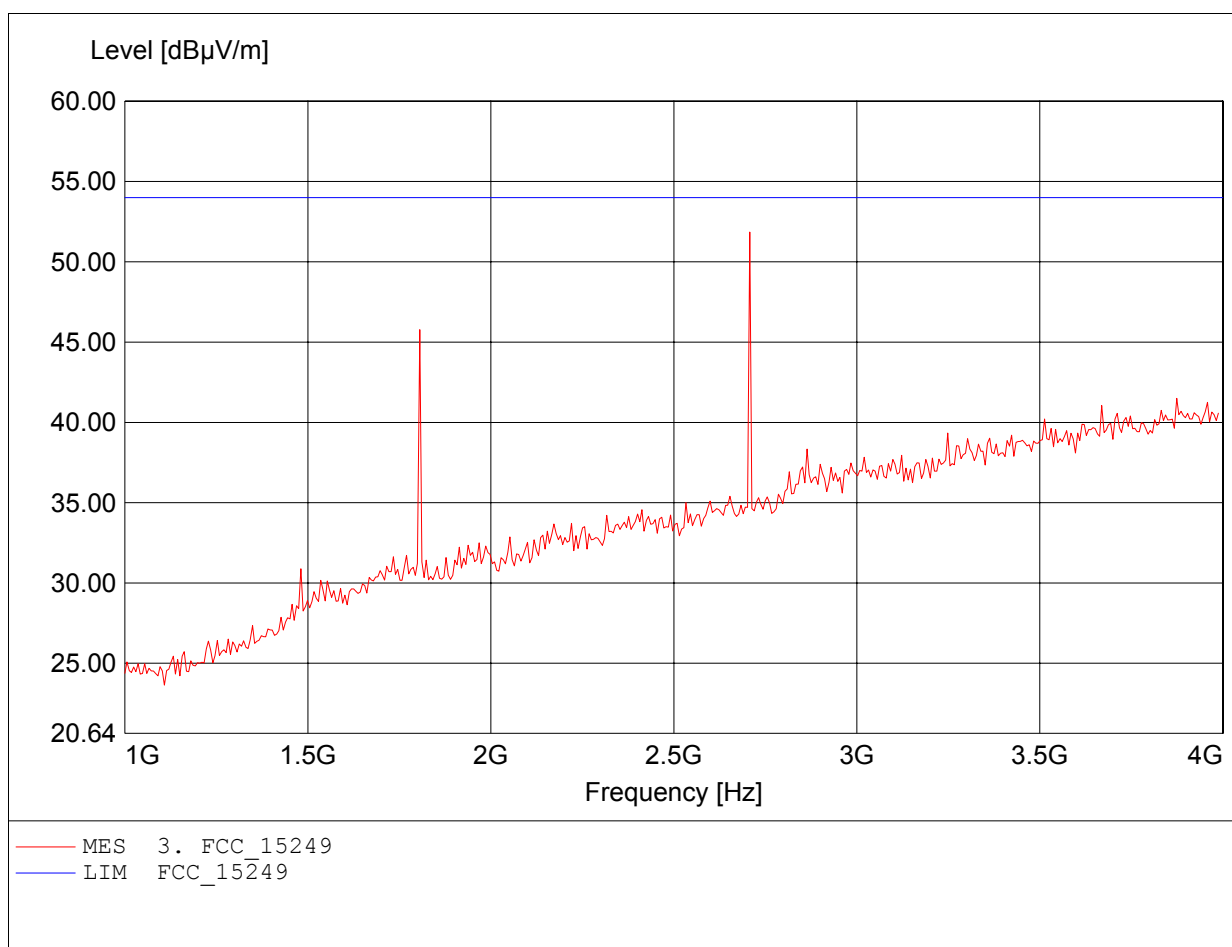


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.471GHz, Emax: 43.29dBµV/m, RBW: 1MHz

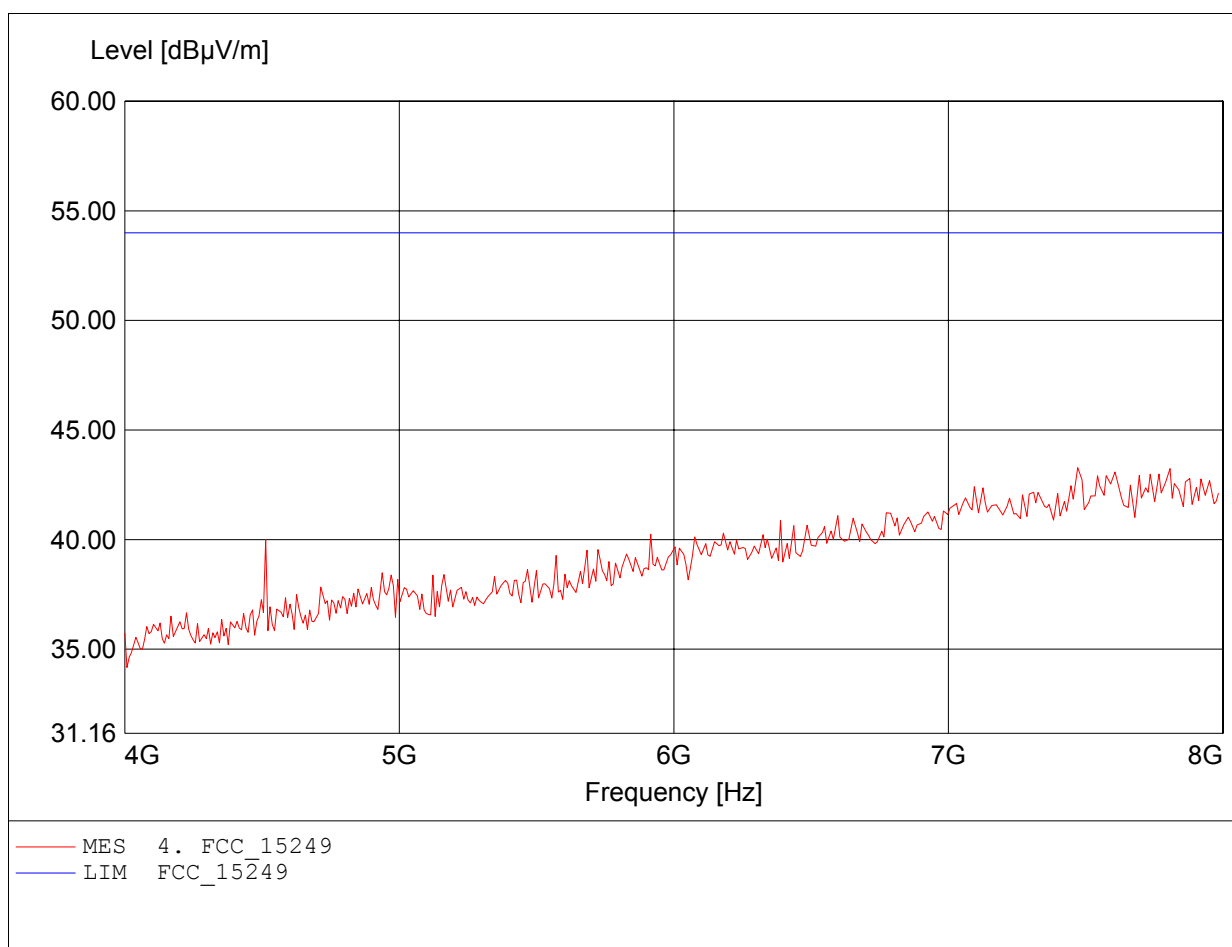


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.607GHz, Emax: 43.39dBµV/m, RBW: 1MHz

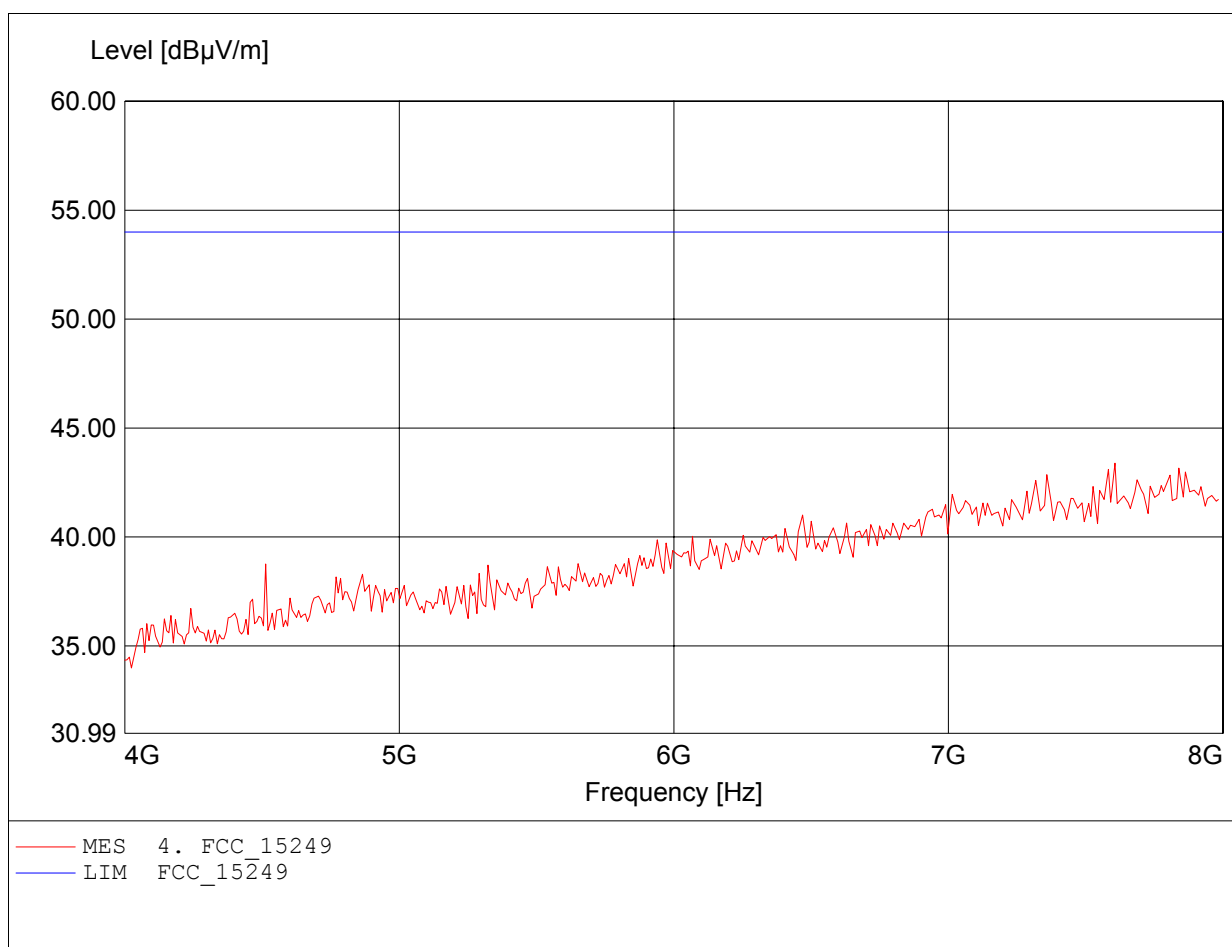


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.792GHz, Emax: 47.78dBµV/m, RBW: 1MHz

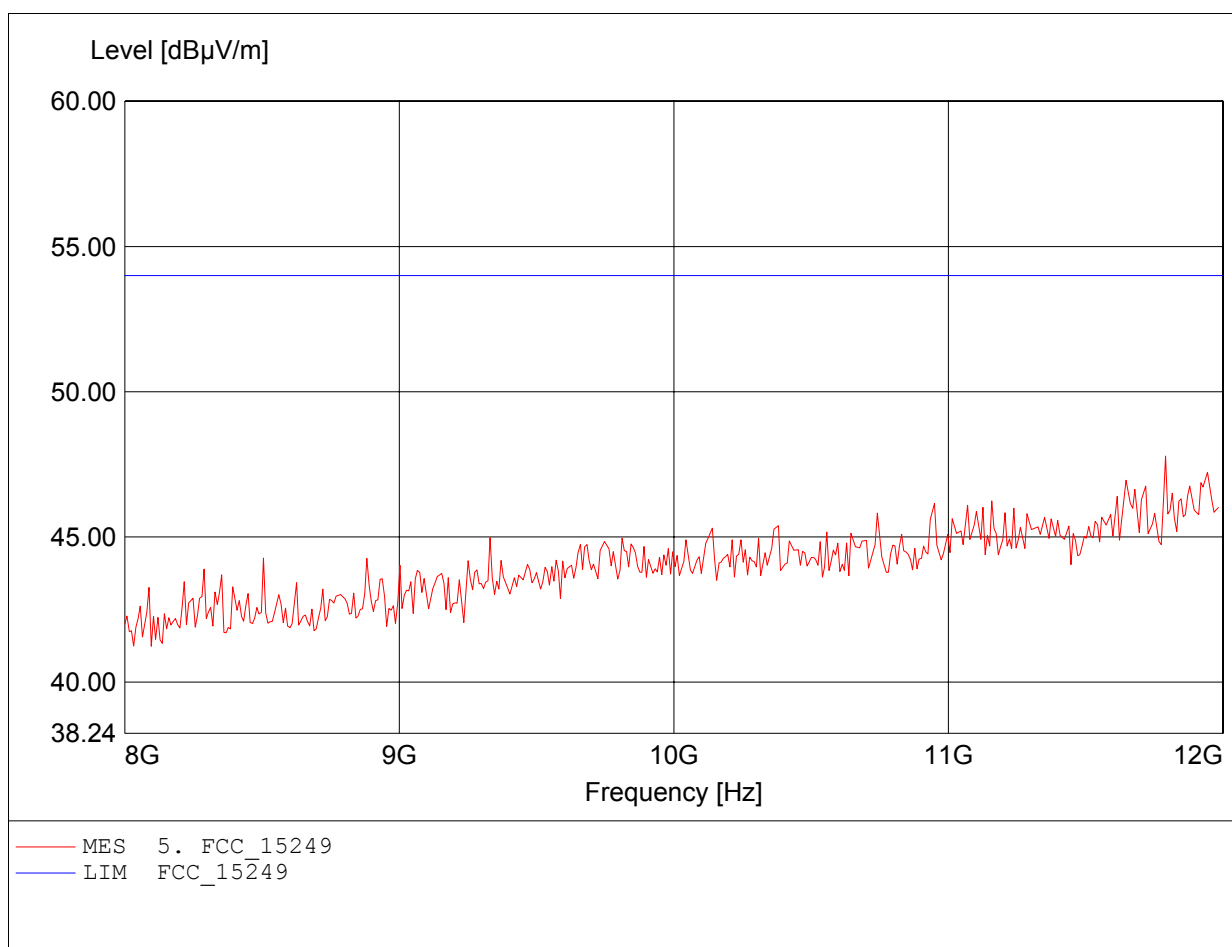


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 903 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.816GHz, Emax: 47.56dBµV/m, RBW: 1MHz

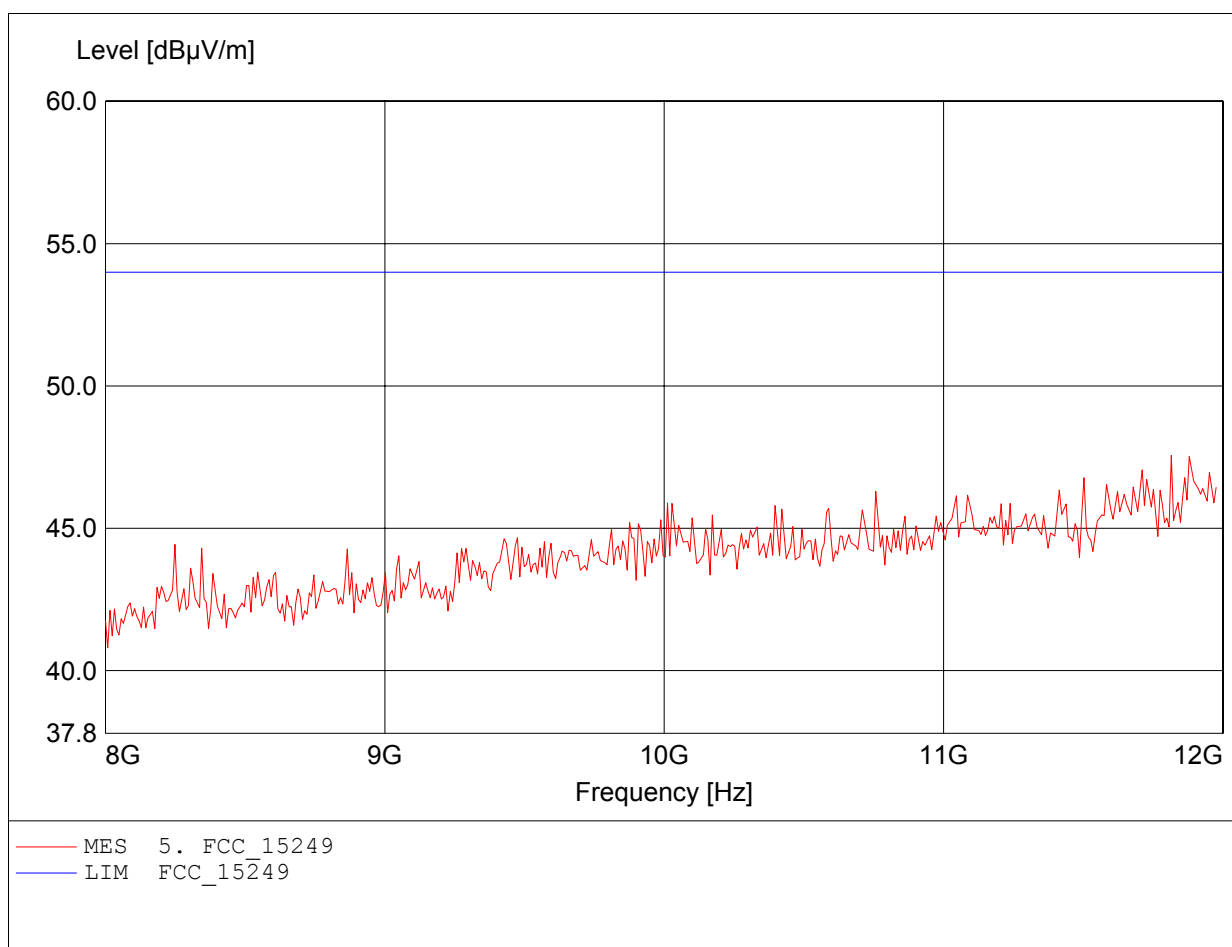


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Traansmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 173.086MHz, Emax: 32.90dBµV/m, RBW: 100kHz

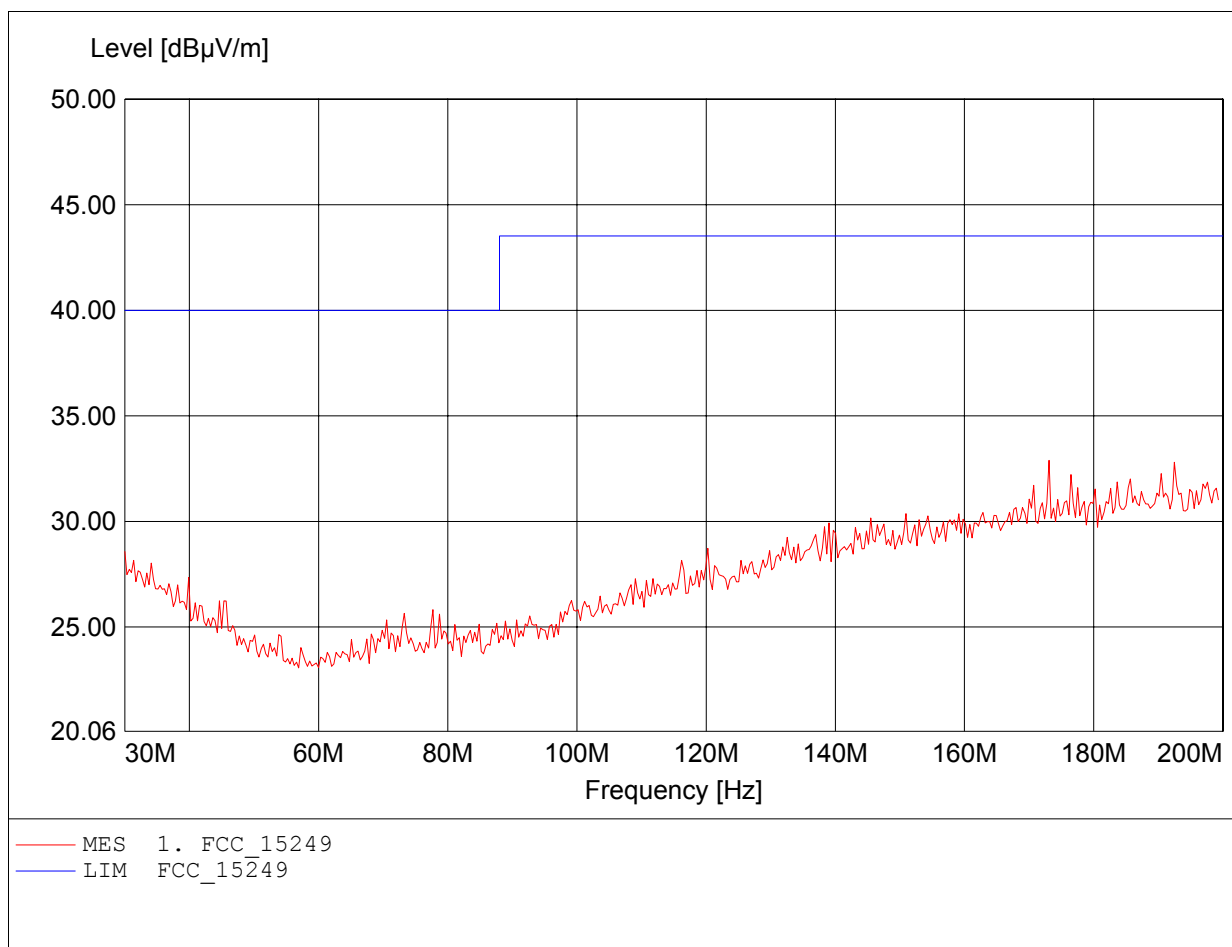


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Traansmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 181.944MHz, Emax: 31.94dBµV/m, RBW: 100kHz

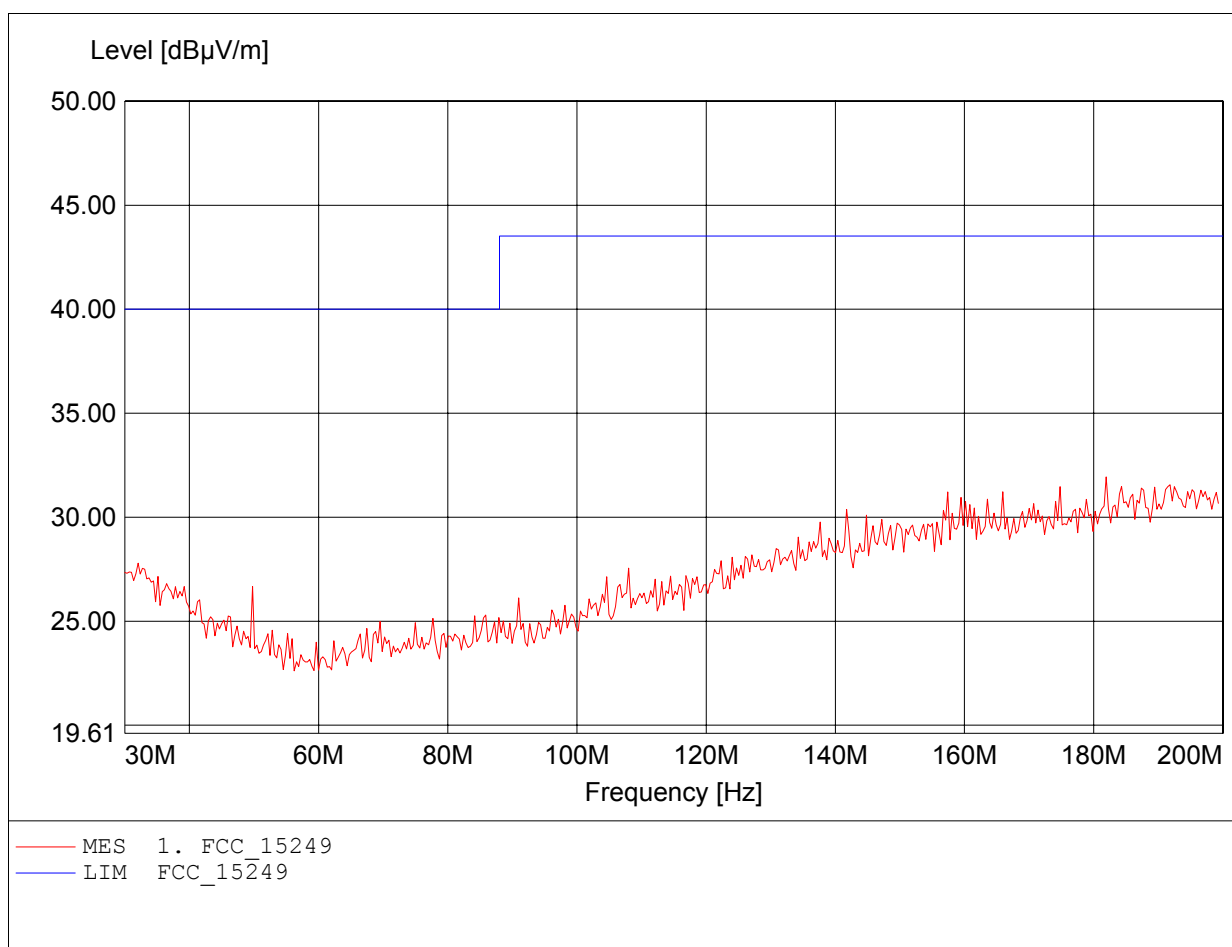


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 896.373MHz, Emax: 37.46dBµV/m, RBW: 100kHz

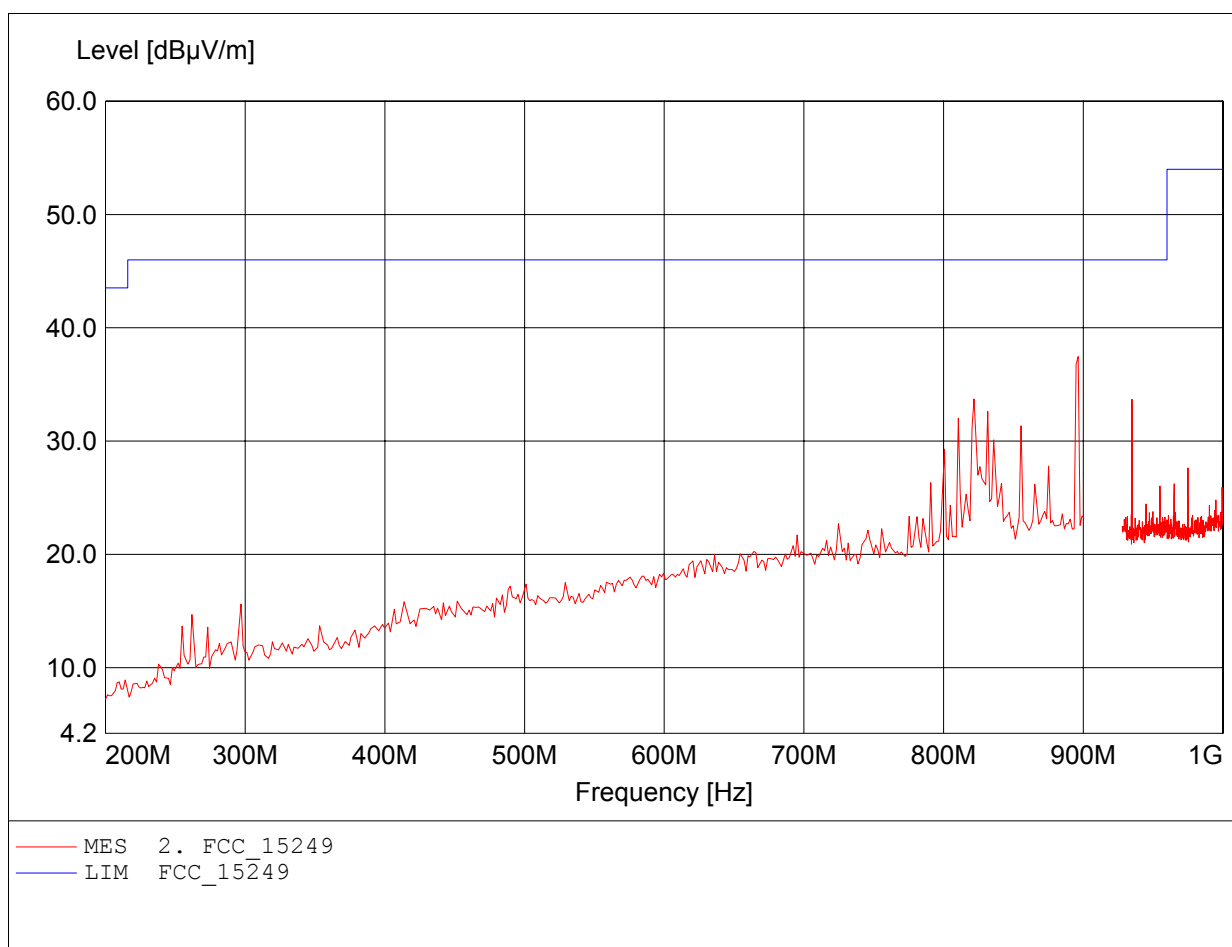


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 810.557MHz, Emax: 24.76dBµV/m, RBW: 100kHz

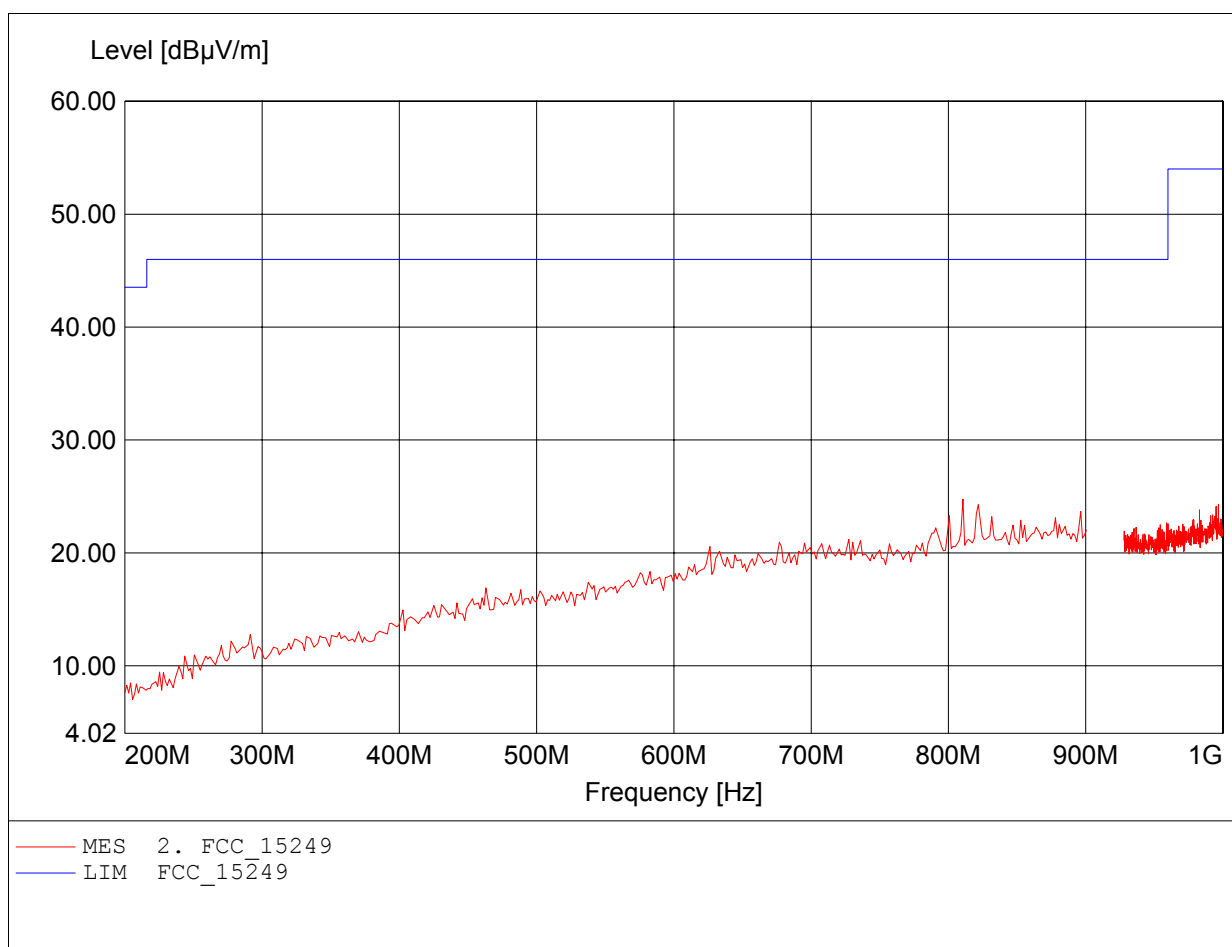


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 1.830GHz, Emax: 49.91dBµV/m, RBW: 1MHz

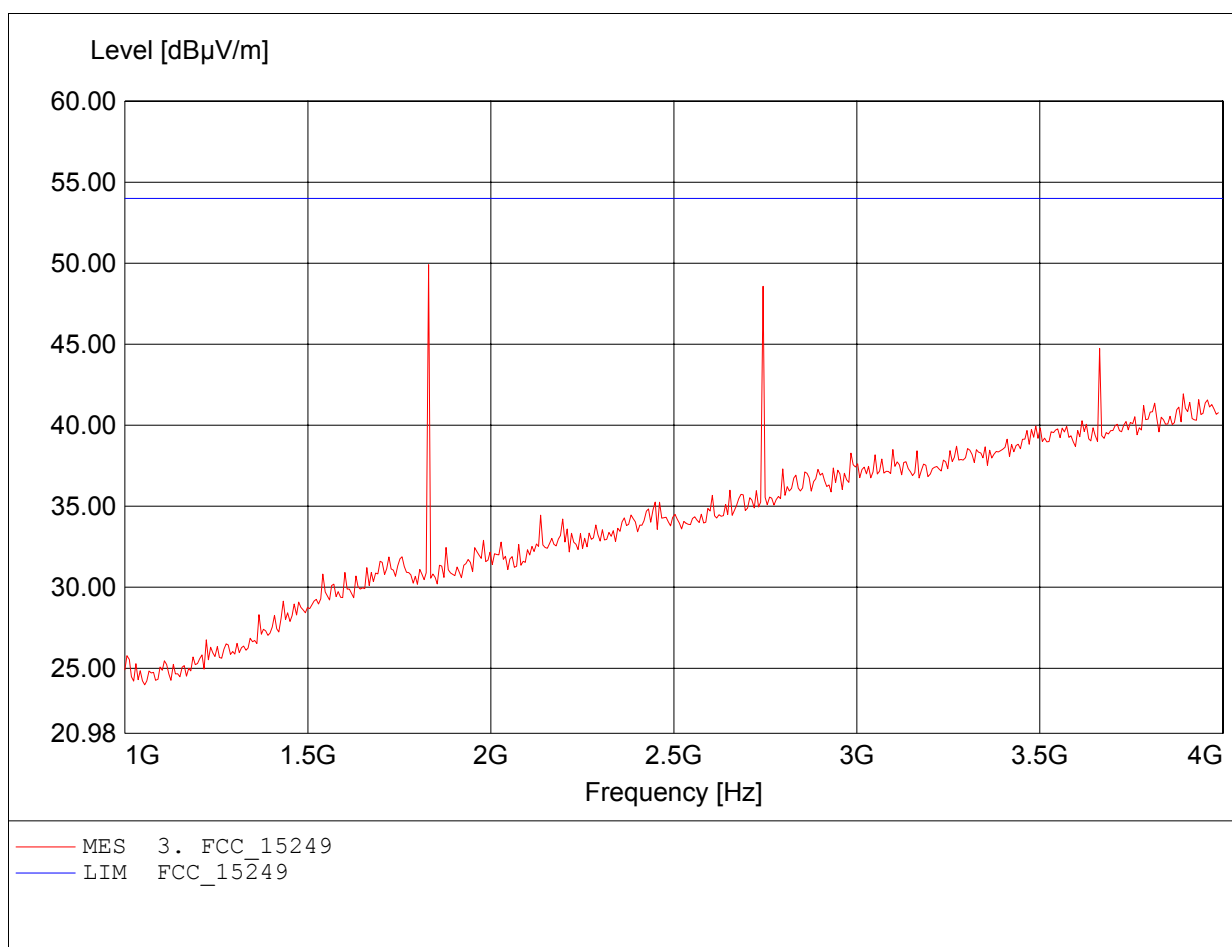


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.743GHz, Emax: 52.98dBµV/m, RBW: 1MHz

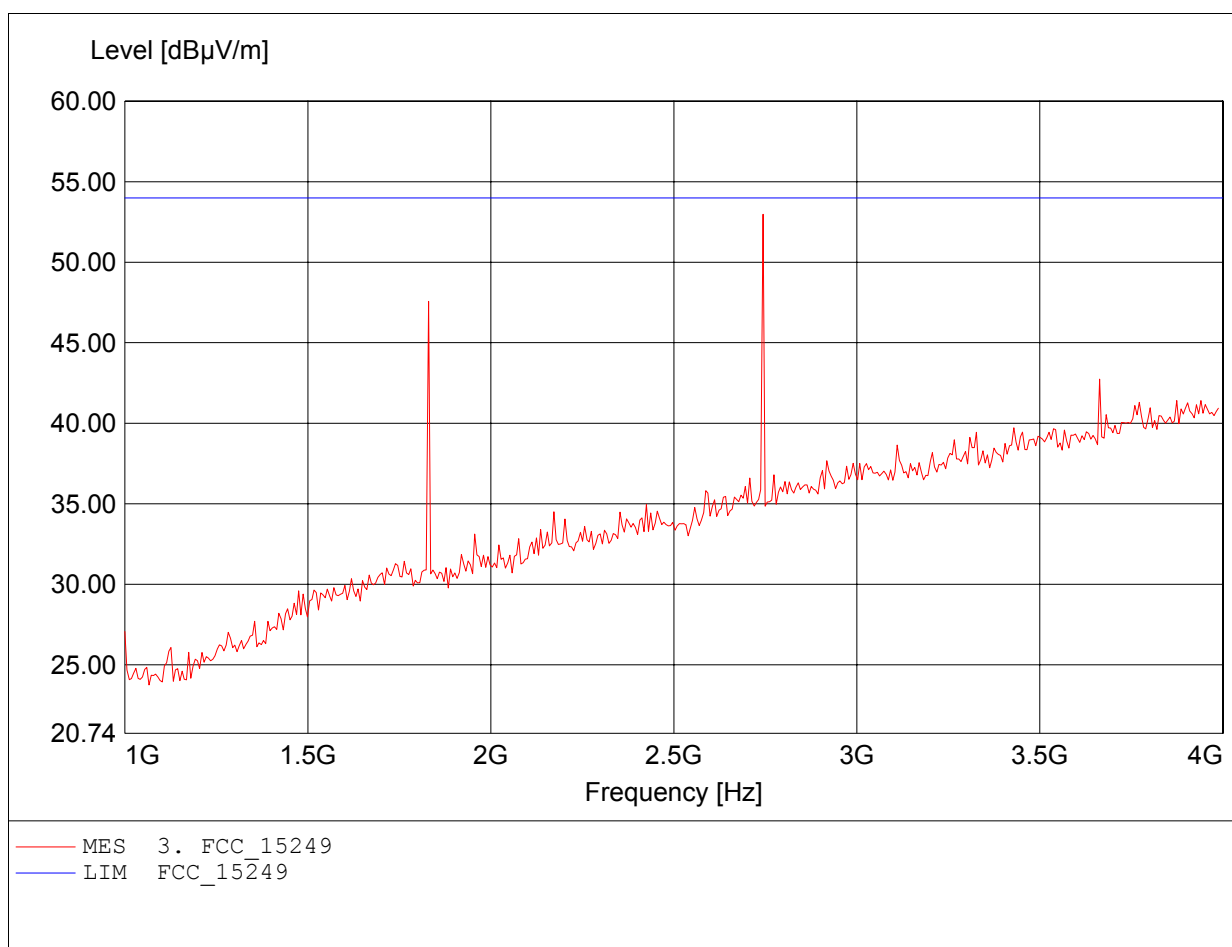


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.735GHz, Emax: 42.61dBµV/m, RBW: 1MHz

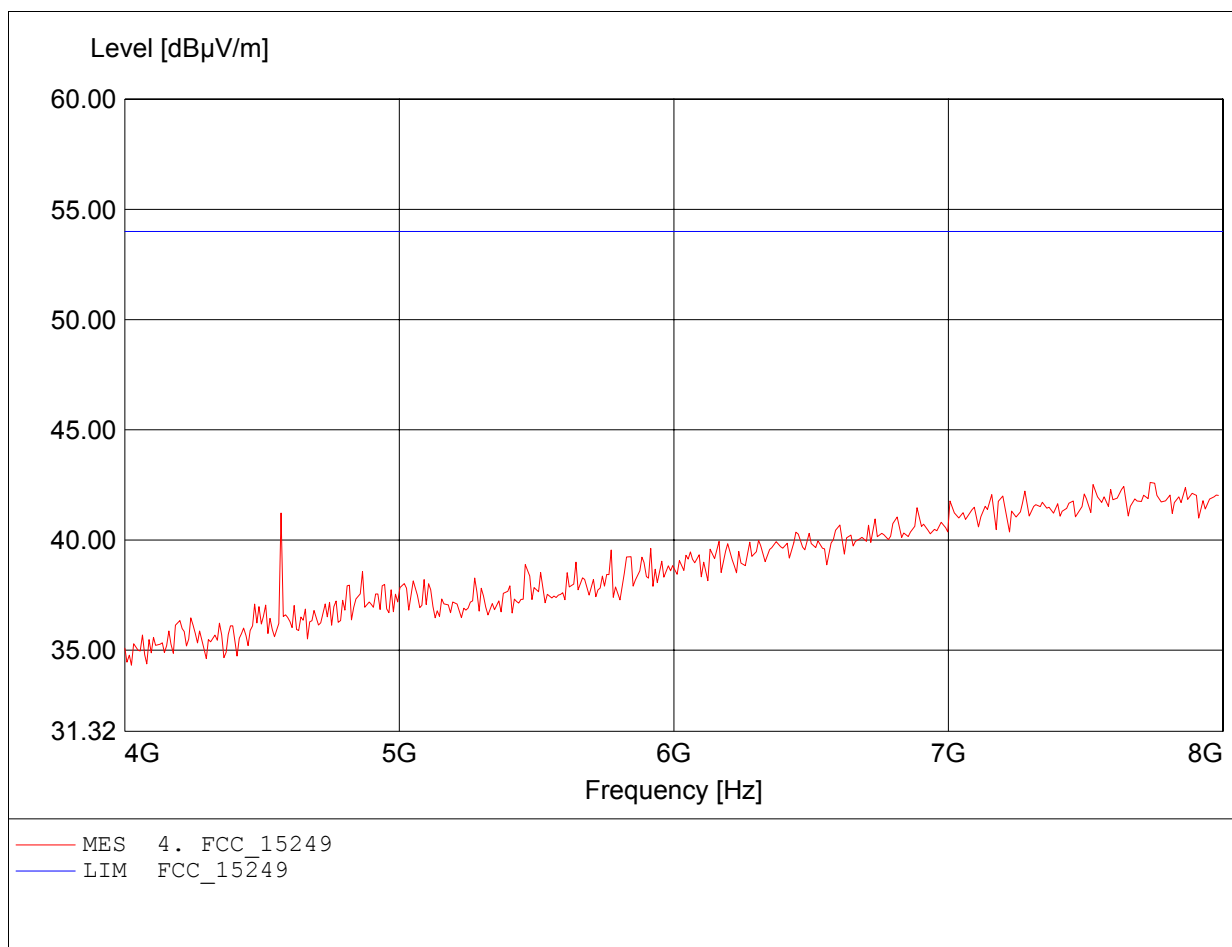


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.864GHz, Emax: 42.79dBµV/m, RBW: 1MHz

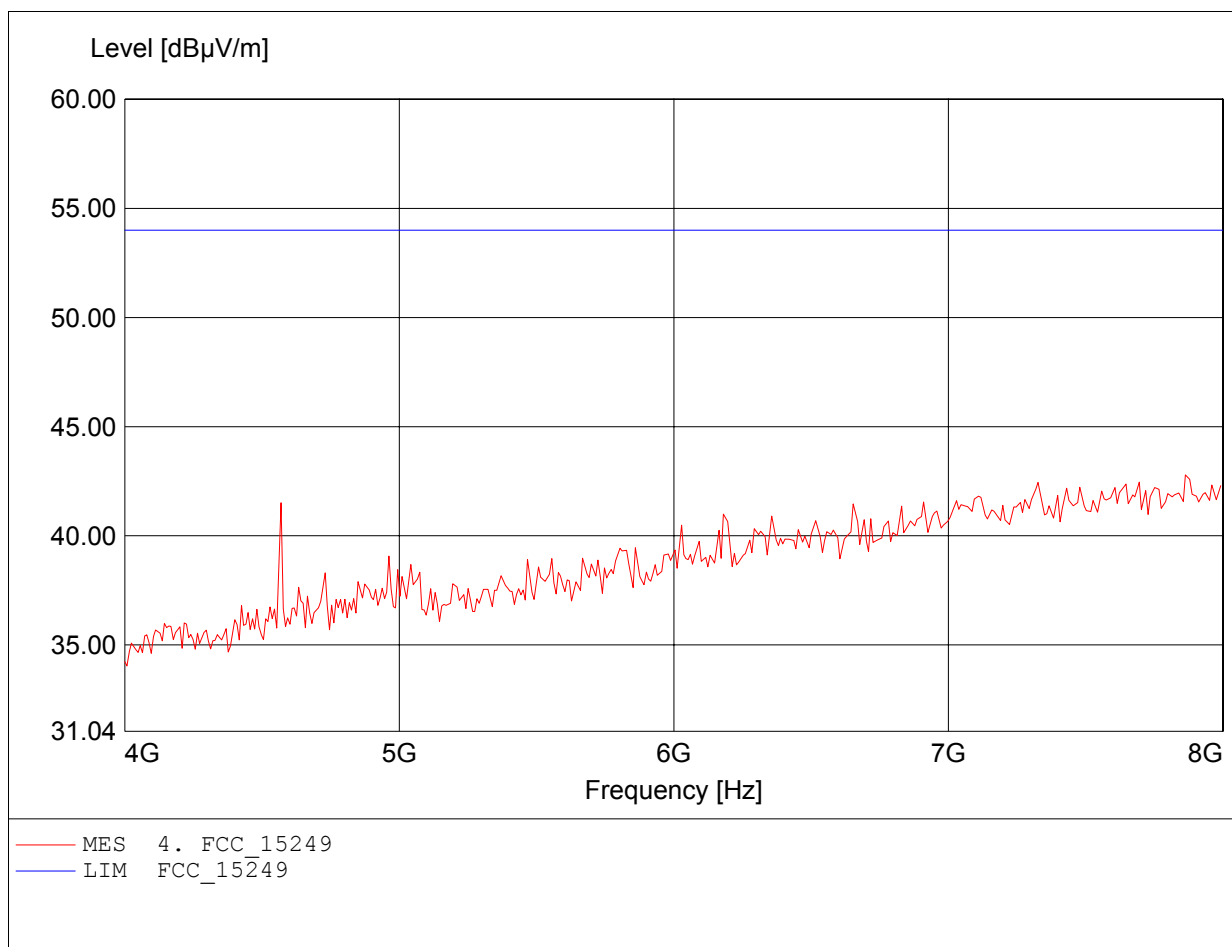


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.880GHz, Emax: 46.77dBµV/m, RBW: 1MHz

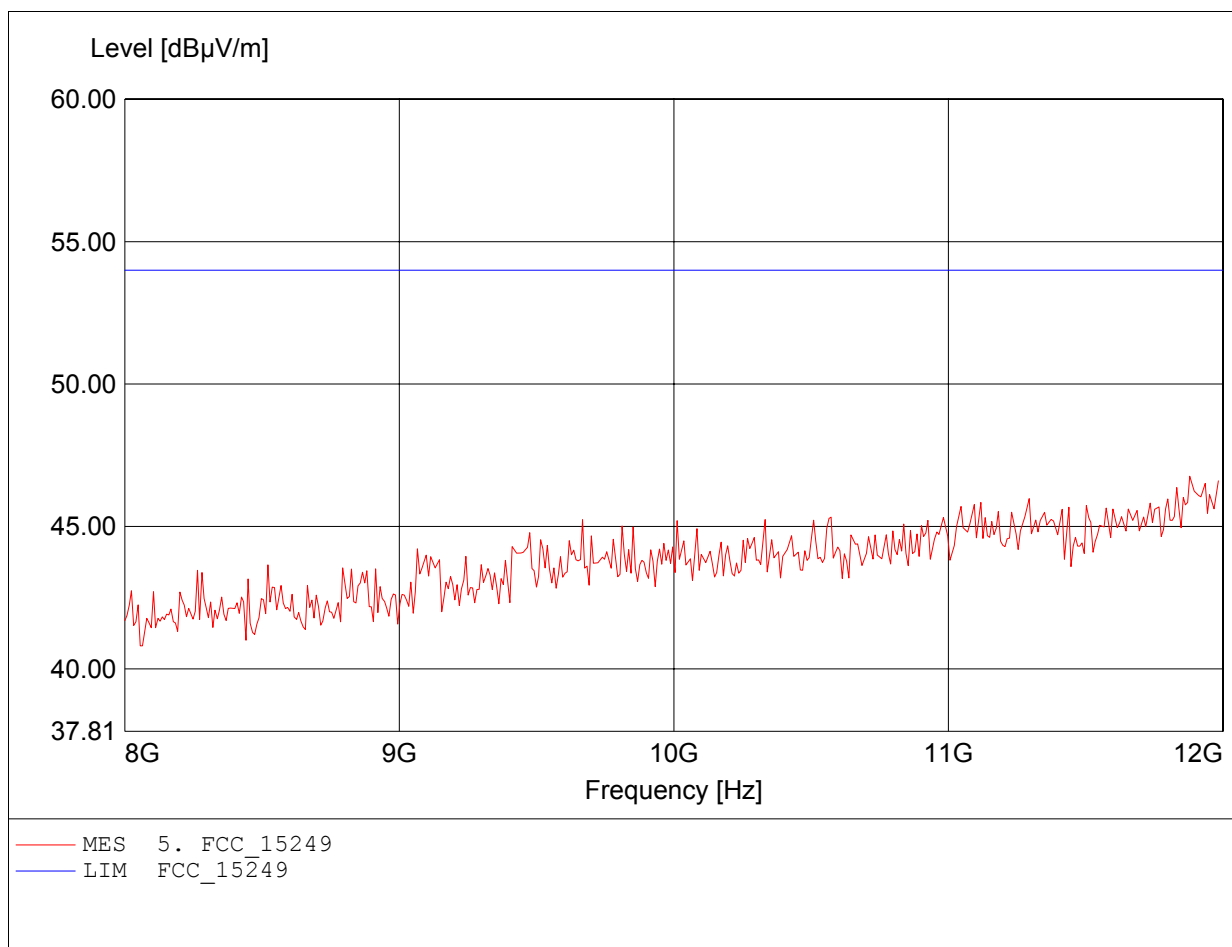


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 915 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.880GHz, Emax: 46.85dBµV/m, RBW: 1MHz

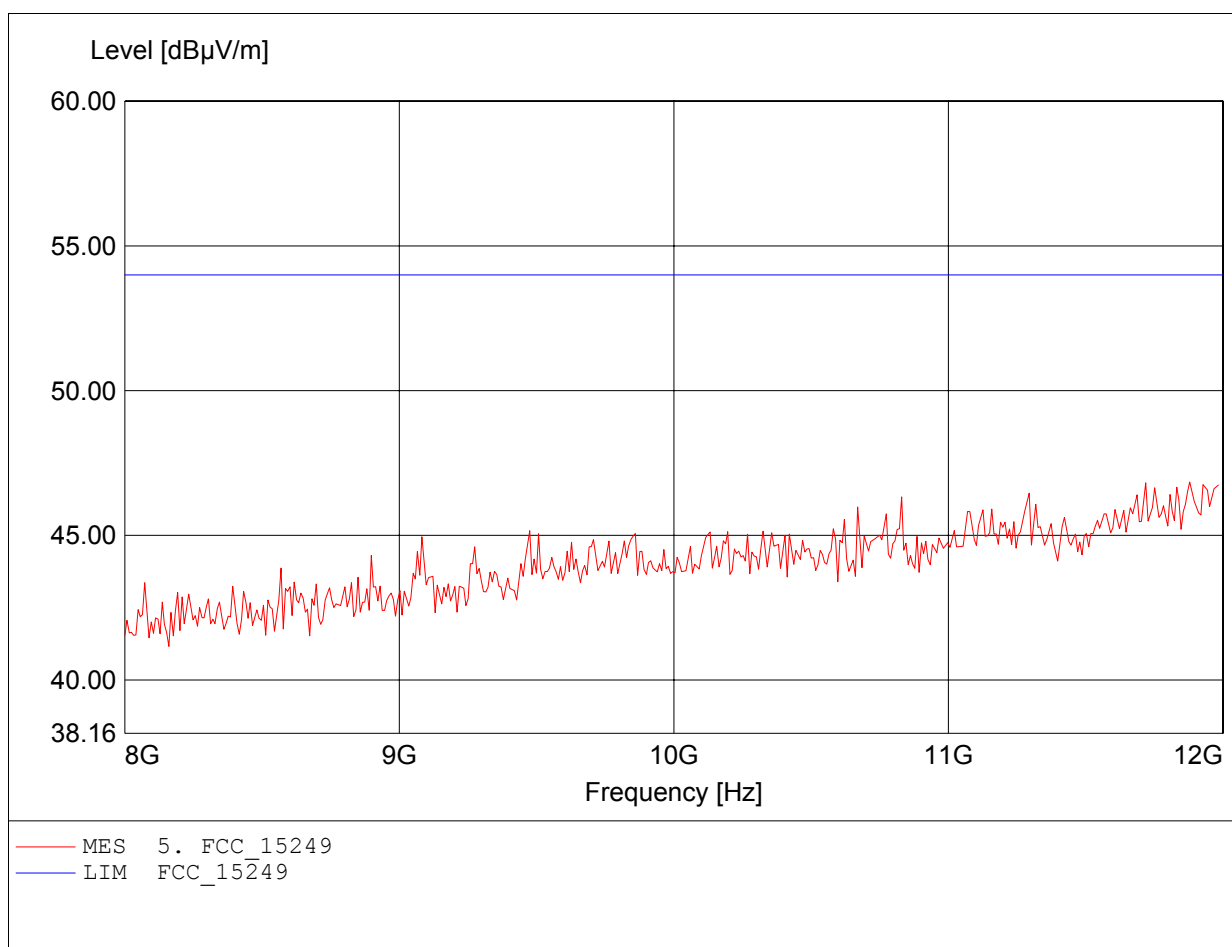


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 185.351MHz, Emax: 40.65dBµV/m, RBW: 100kHz

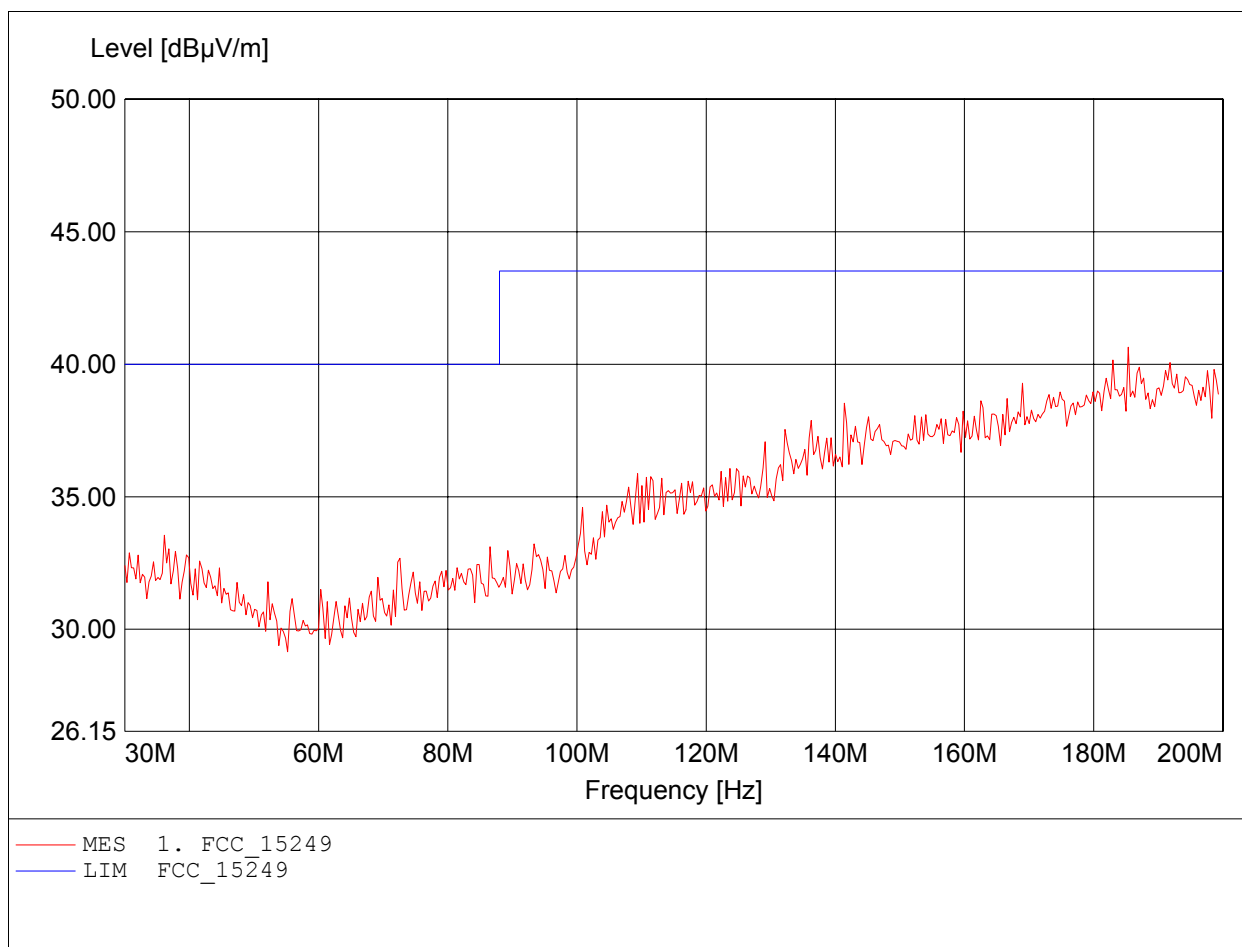


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 184.329MHz, Emax: 41.01dBµV/m, RBW: 100kHz

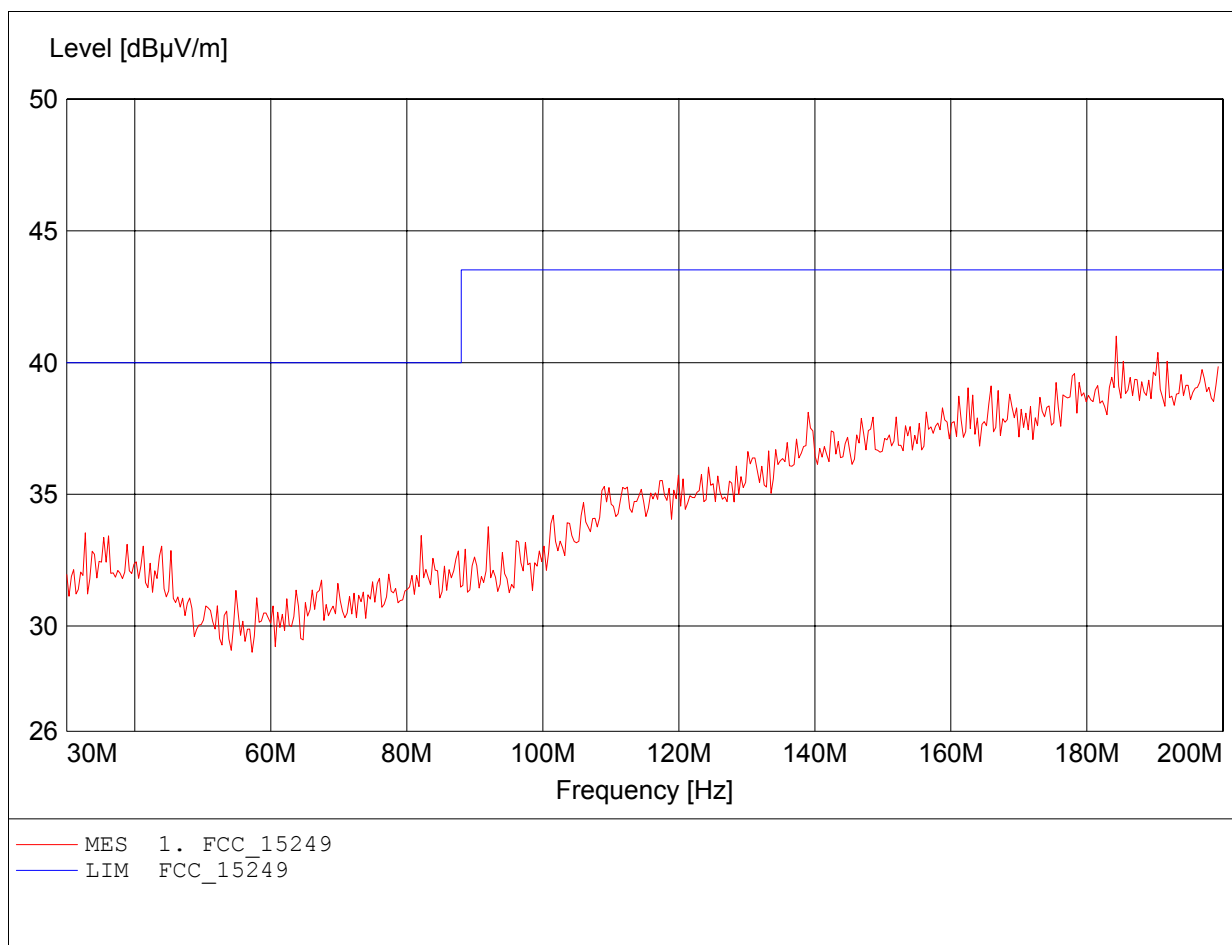


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 928.000MHz, Emax: 42.79dBµV/m, RBW: 100kHz

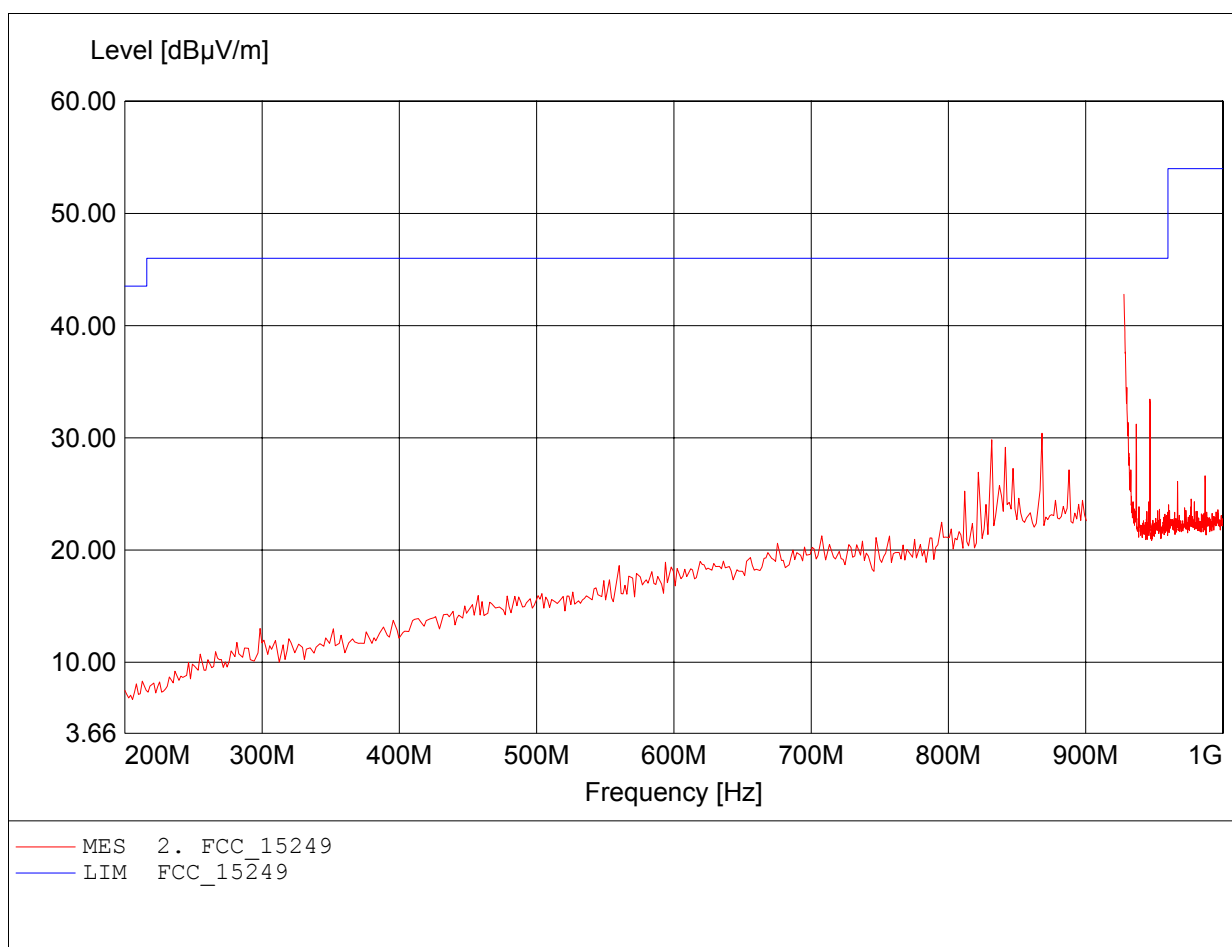


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 928.000MHz, Emax: 27.37dBµV/m, RBW: 100kHz

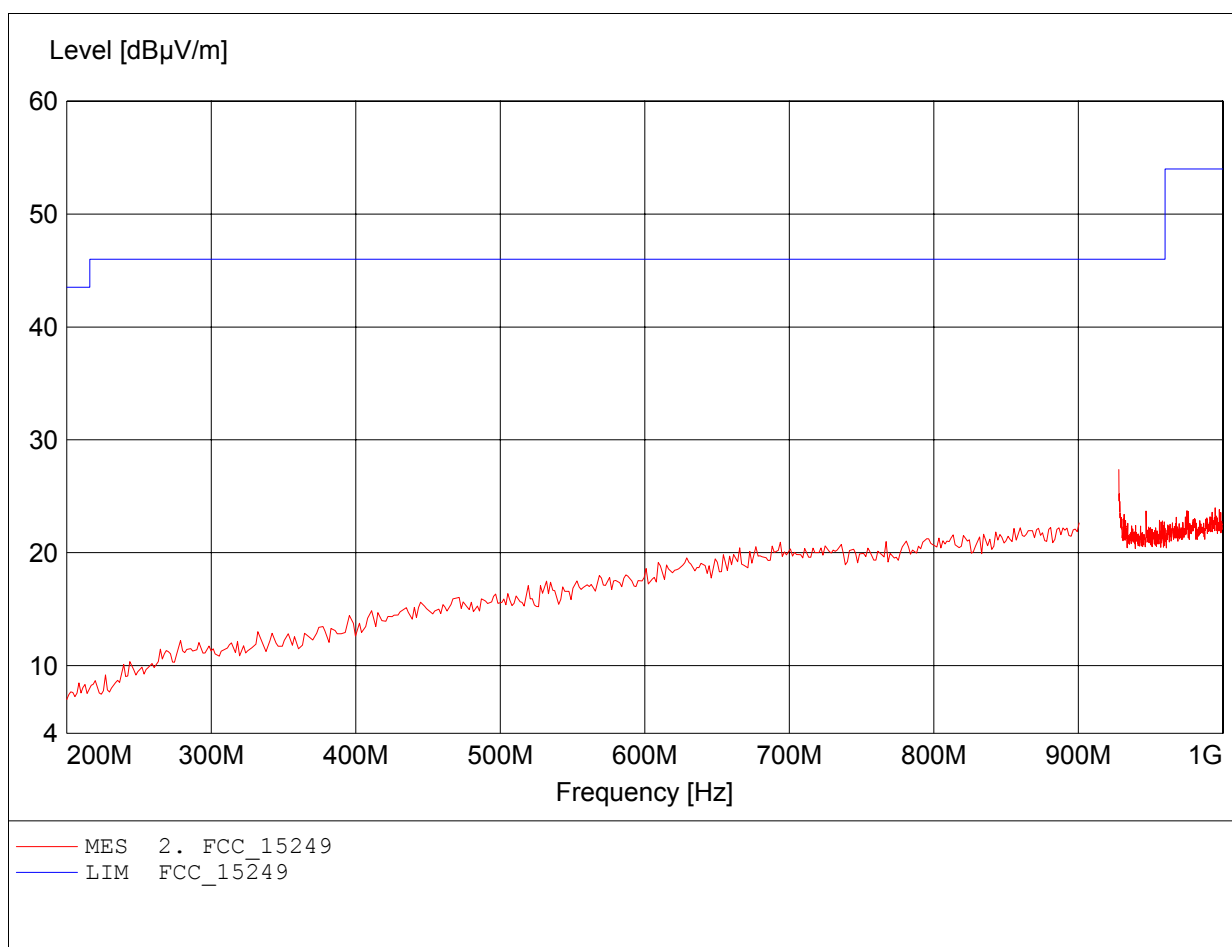


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.780GHz, Emax: 51.87dBµV/m, RBW: 1MHz

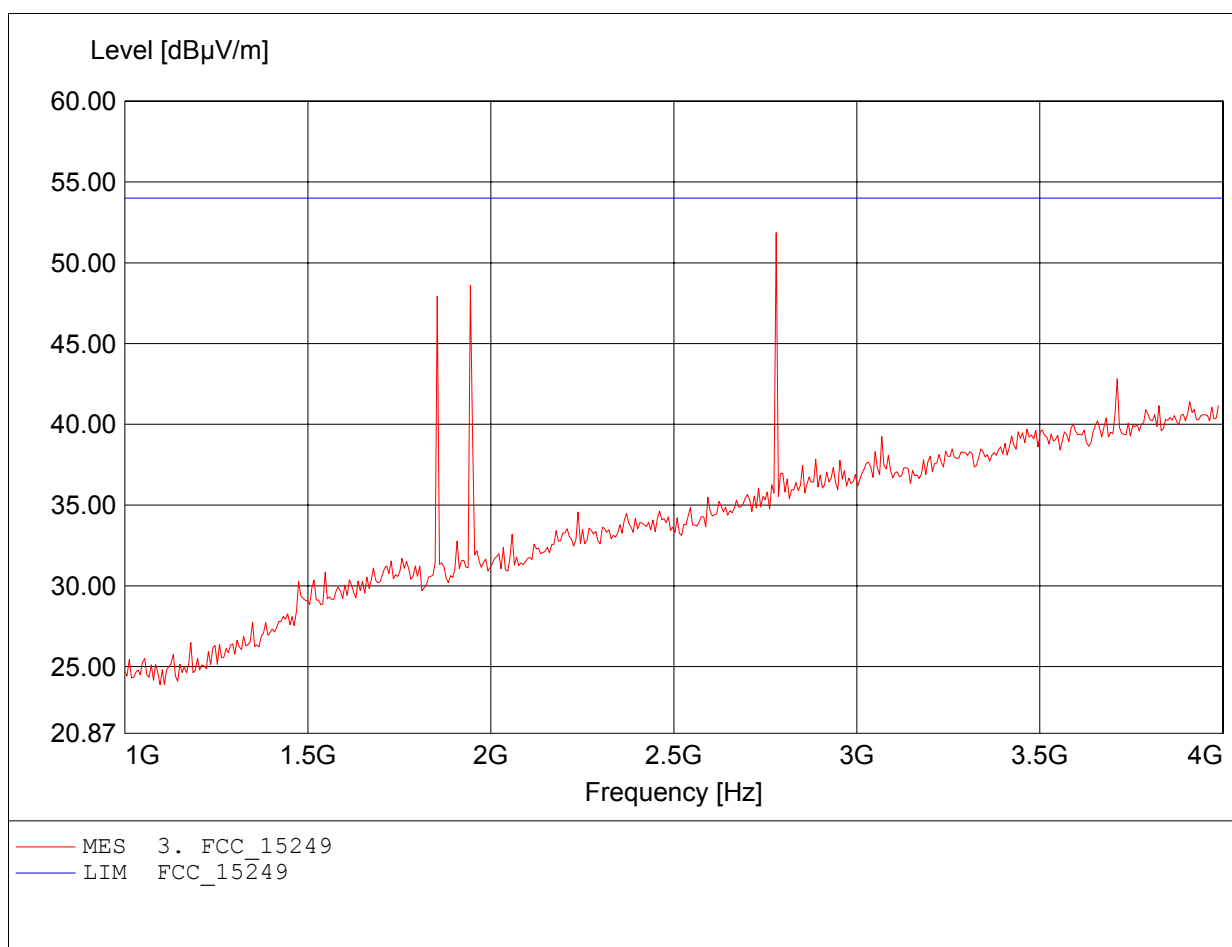


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 1.854GHz, Emax: 51.41dBµV/m, RBW: 1MHz

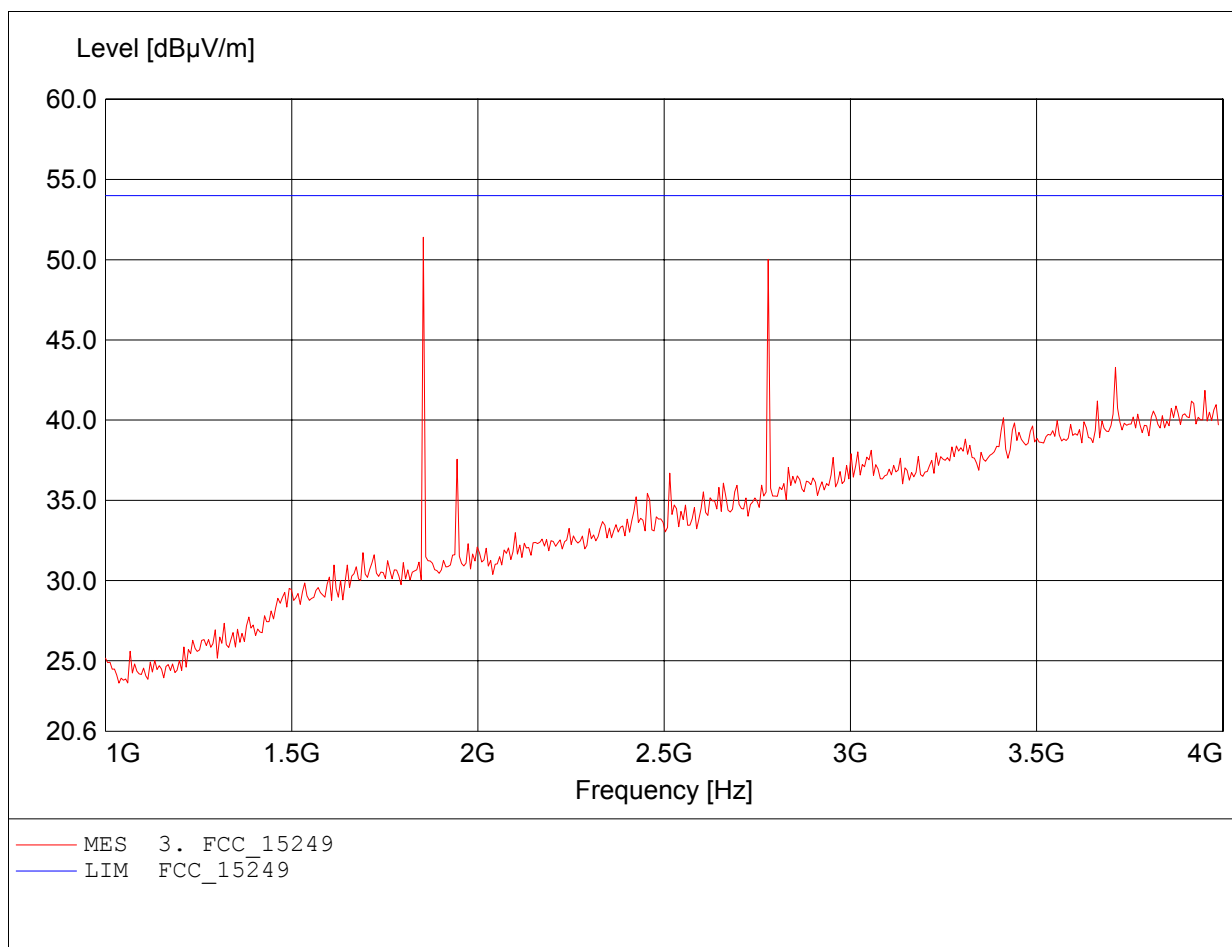


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.543GHz, Emax: 43.05dBµV/m, RBW: 1MHz

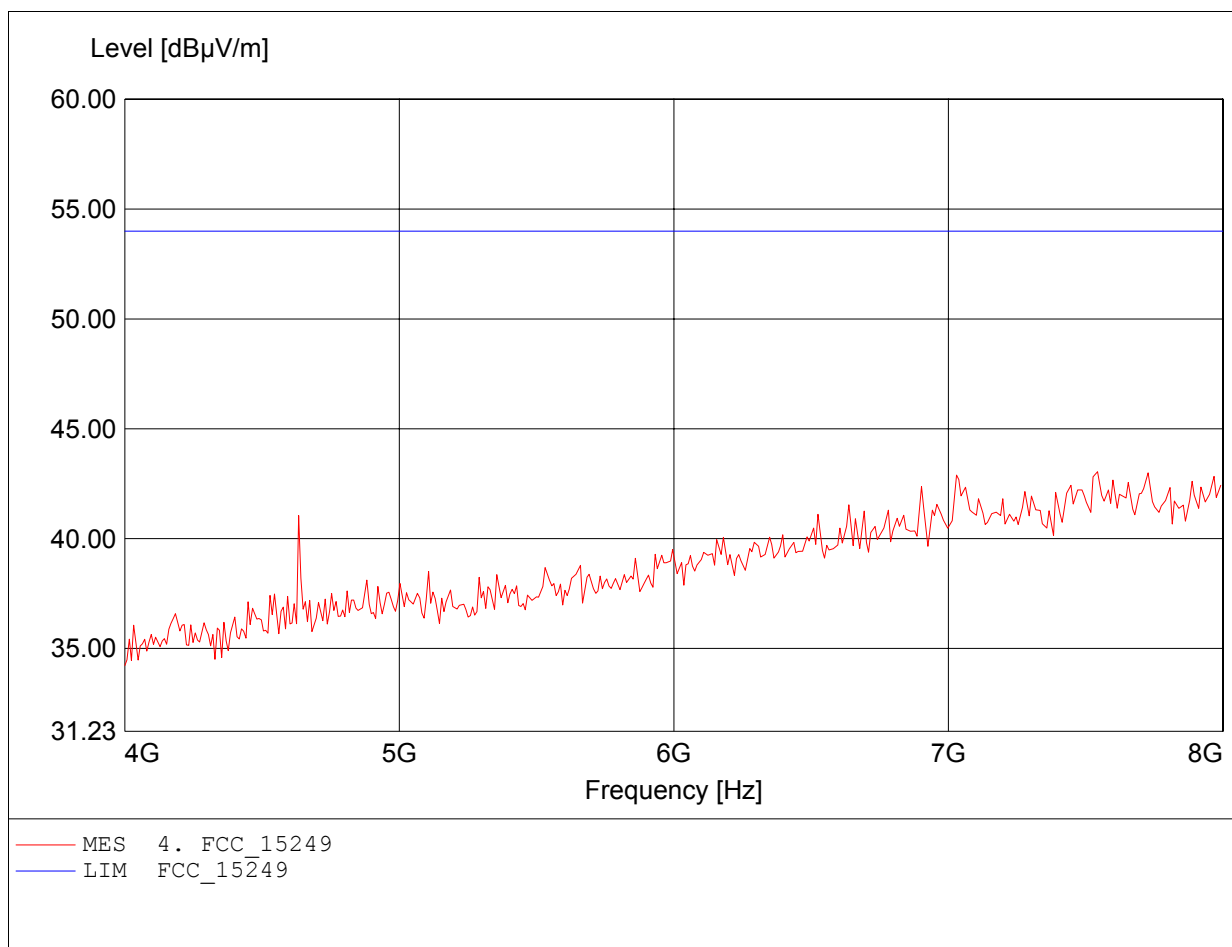


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.511GHz, Emax: 43.20dBµV/m, RBW: 1MHz

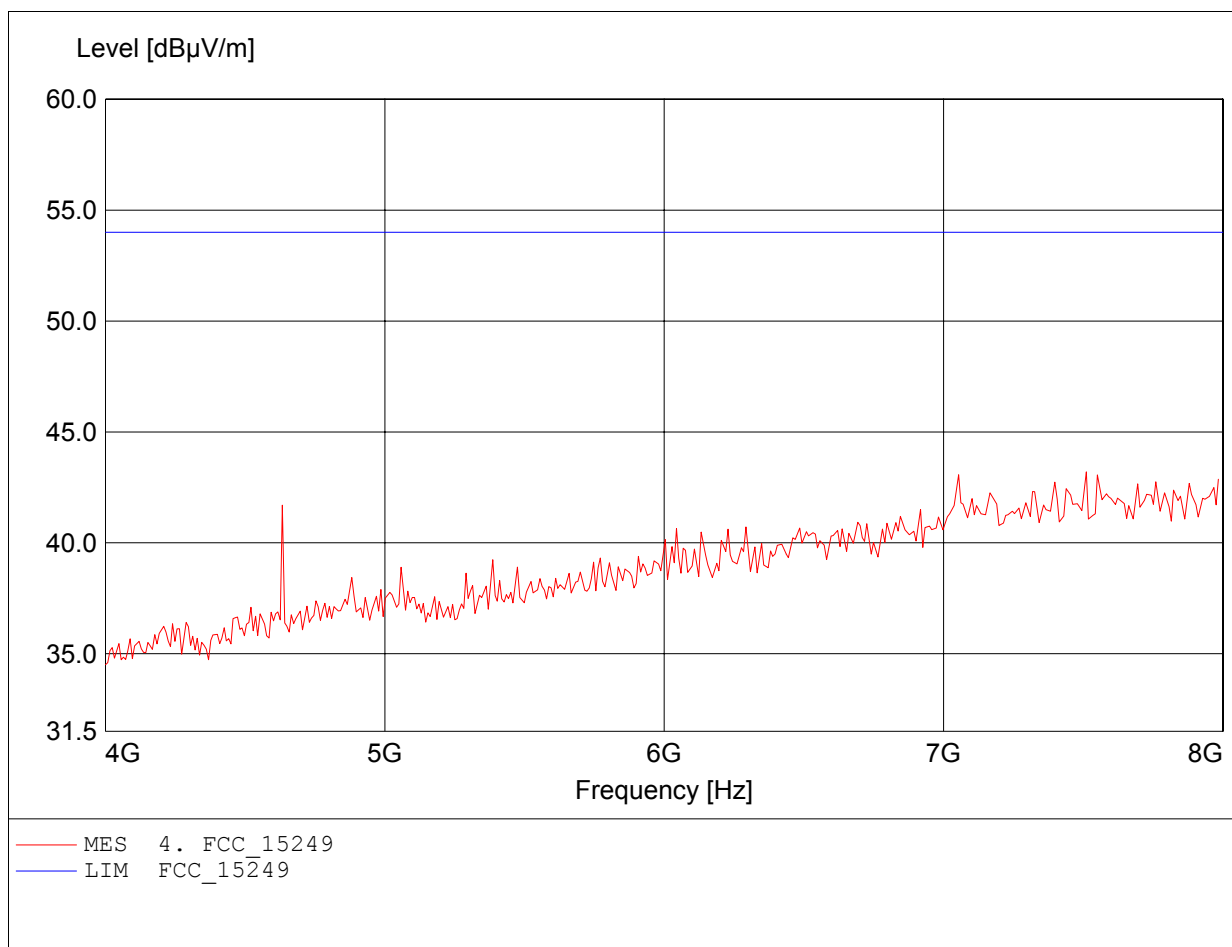


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.695GHz, Emax: 47.51dBµV/m, RBW: 1MHz

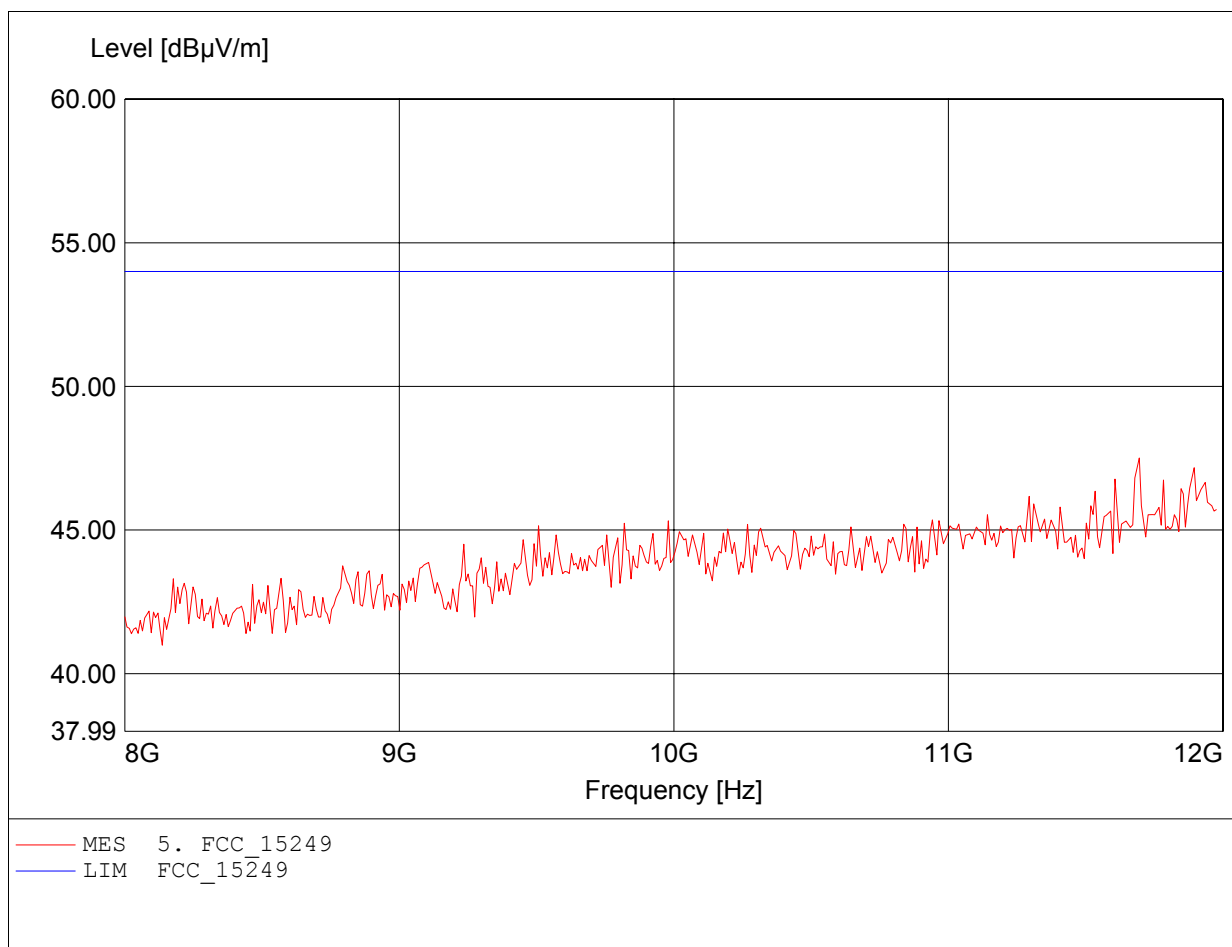

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Transmitter
Model: TX-50U / Mod. FSK Channel: 927 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.896GHz, Emax: 47.74dBµV/m, RBW: 1MHz

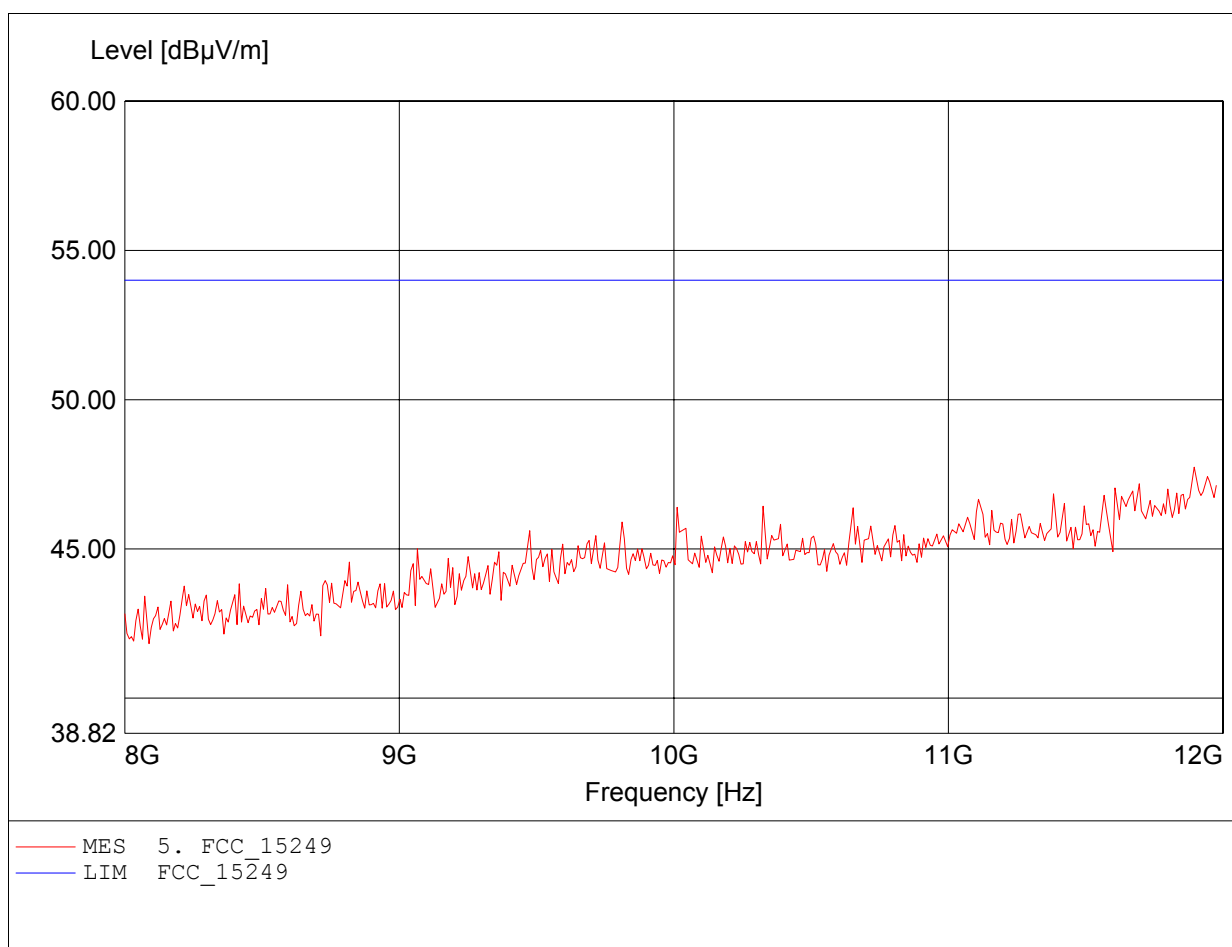

Annex D


Occupied Bandwidth

**RSS Gen
Occupied Bandwidth**

EUT	Transmitter
Model	TX-50U
Approval Holder	LaCrosse Technology Asia Limited
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins ETS Product Service GmbH / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 905 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	



Marker 1 [T1]	RBW	5 kHz	RF Att	20 dB
Ref Lvl	-9.97 dBm	VBW	20 kHz	
0 dBm	902.98747495 MHz	SWT	50 ms	Unit dBm

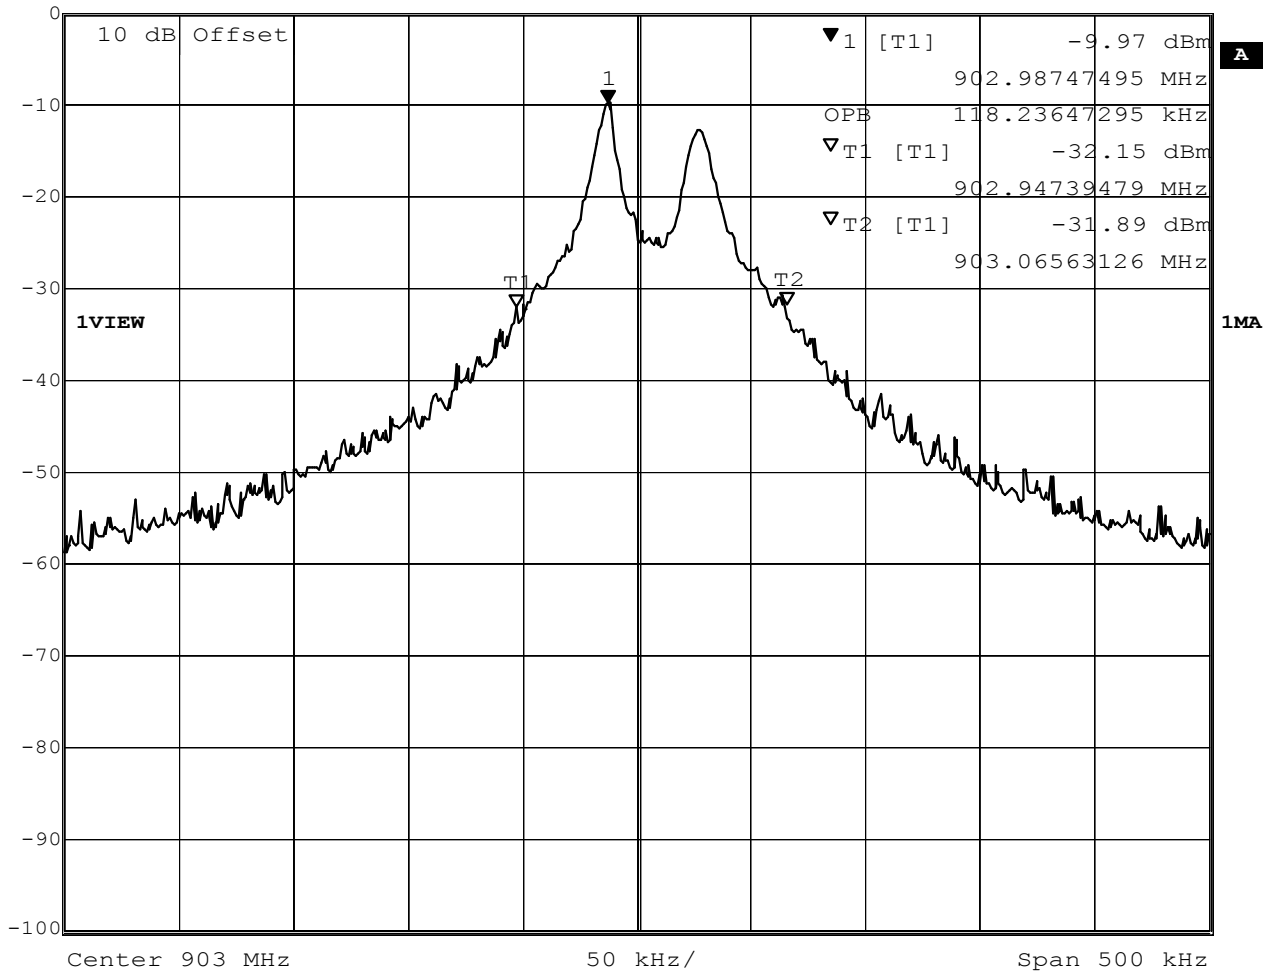


Comment A: Occupied bandwidth: 118.2 KHz
Date: 16.MAY.2008 14:46:02

Measurement diagram

Eurofins ETS Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

**RSS Gen
Occupied Bandwidth**

EUT	Transmitter
Model	TX-50U
Approval Holder	LaCrosse Technology Asia Limited
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins ETS Product Service GmbH / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 915 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	

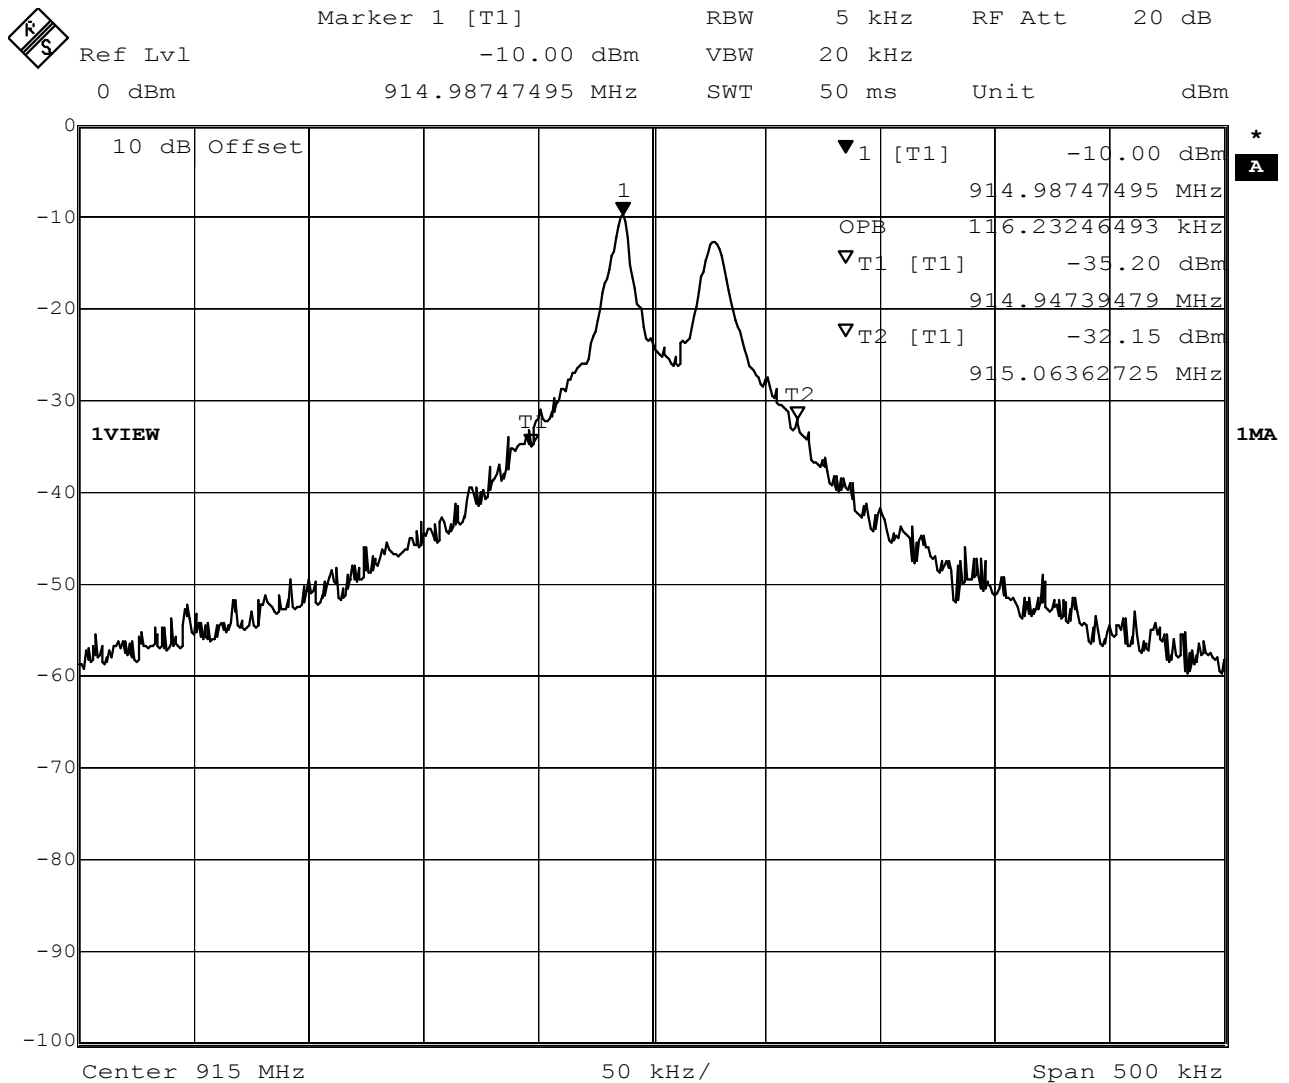

Comment A: Occupied bandwidth: 116.2 KHz
 Date: 16.MAY.2008 14:48:30


Measurement diagram

**RSS Gen
Occupied Bandwidth**

EUT	Transmitter
Model	TX-50U
Approval Holder	LaCrosse Technology Asia Limited
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins ETS Product Service GmbH / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 927 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	



Ref Lvl	Marker 1 [T1]	RBW	5 kHz	RF Att	20 dB
0 dBm	-9.99 dBm	VBW	20 kHz		
	926.98747495 MHz	SWT	50 ms	Unit	dBm

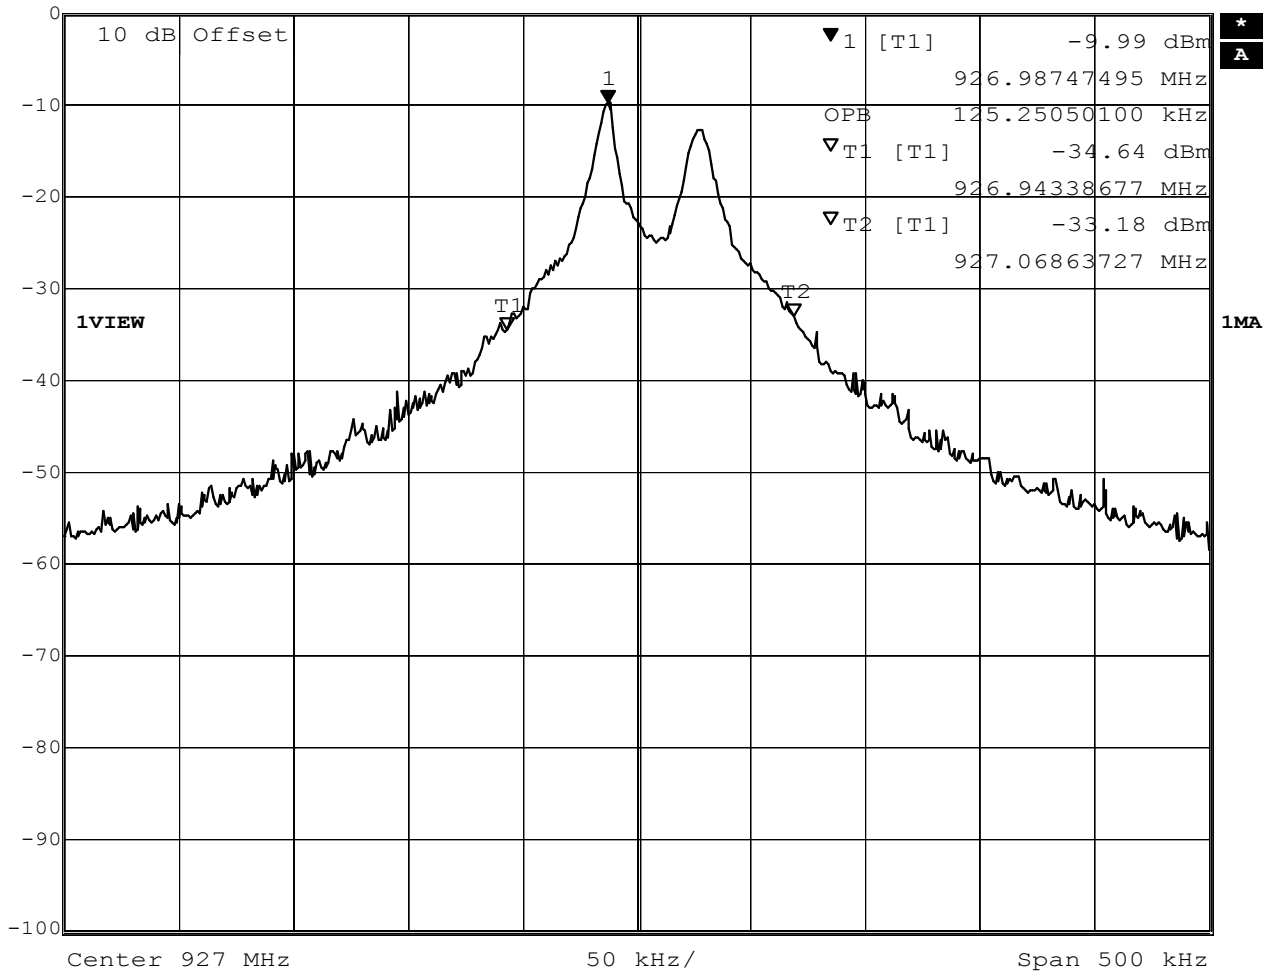

Comment A: Occupied bandwidth: 125.3 KHz
Date: 16.MAY.2008 14:50:04

Measurement diagram

Eurofins ETS Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany