


Annex B

Fundamental Field Strength


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 905.080MHz, Emax: 70.85dBµV/m, RBW: 1MHz

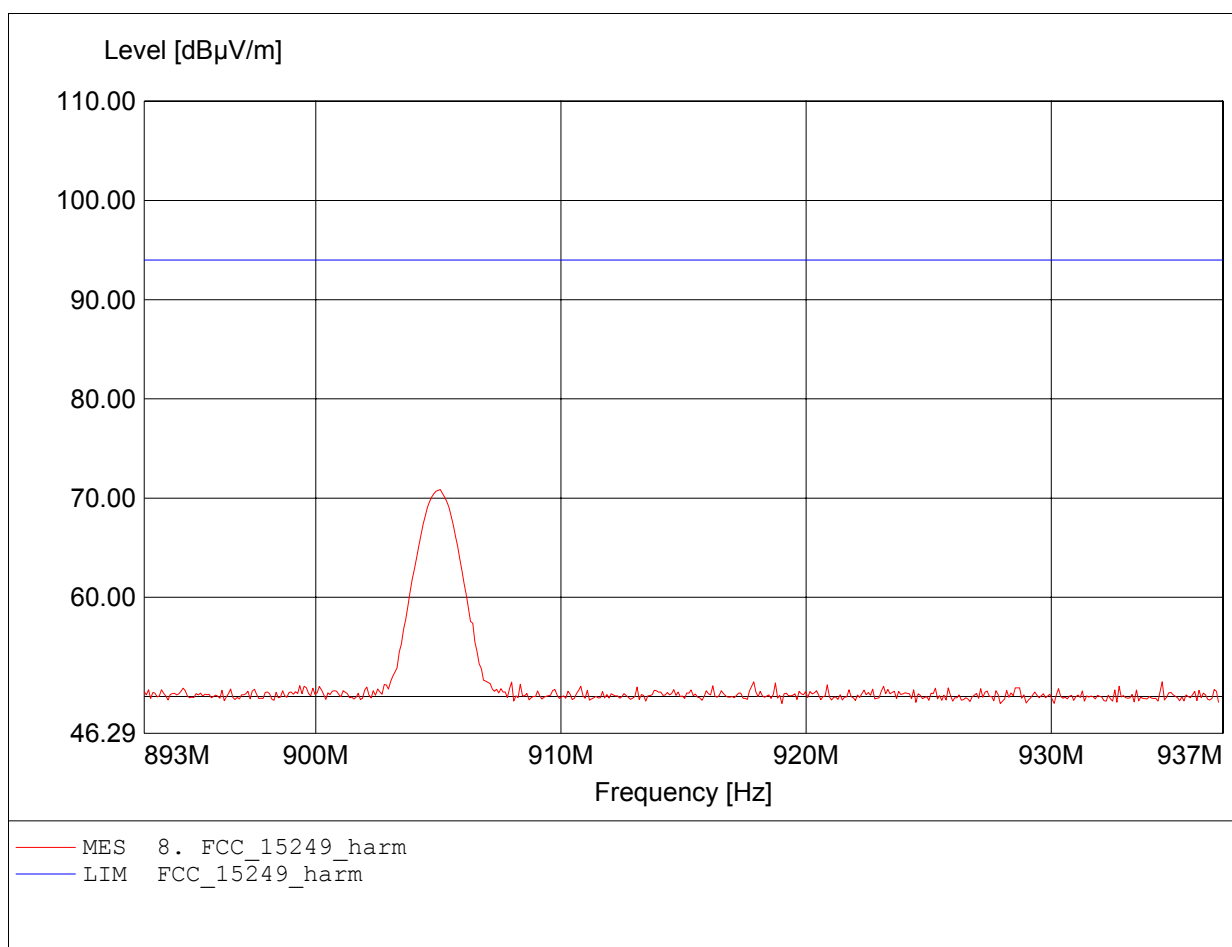


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 904.992MHz, Emax: 73.40dBµV/m, RBW: 1MHz

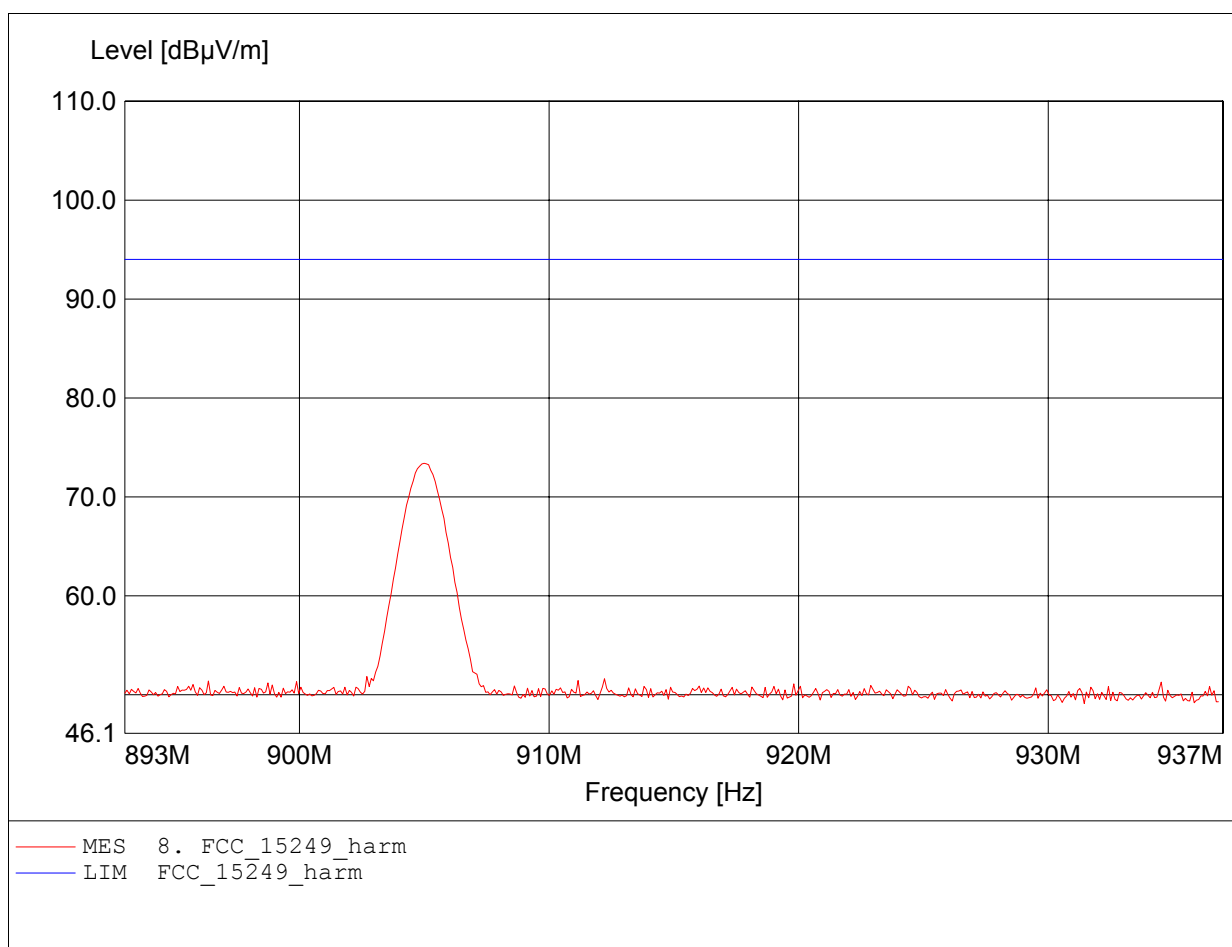


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 912.928MHz, Emax: 73.54dBµV/m, RBW: 1MHz

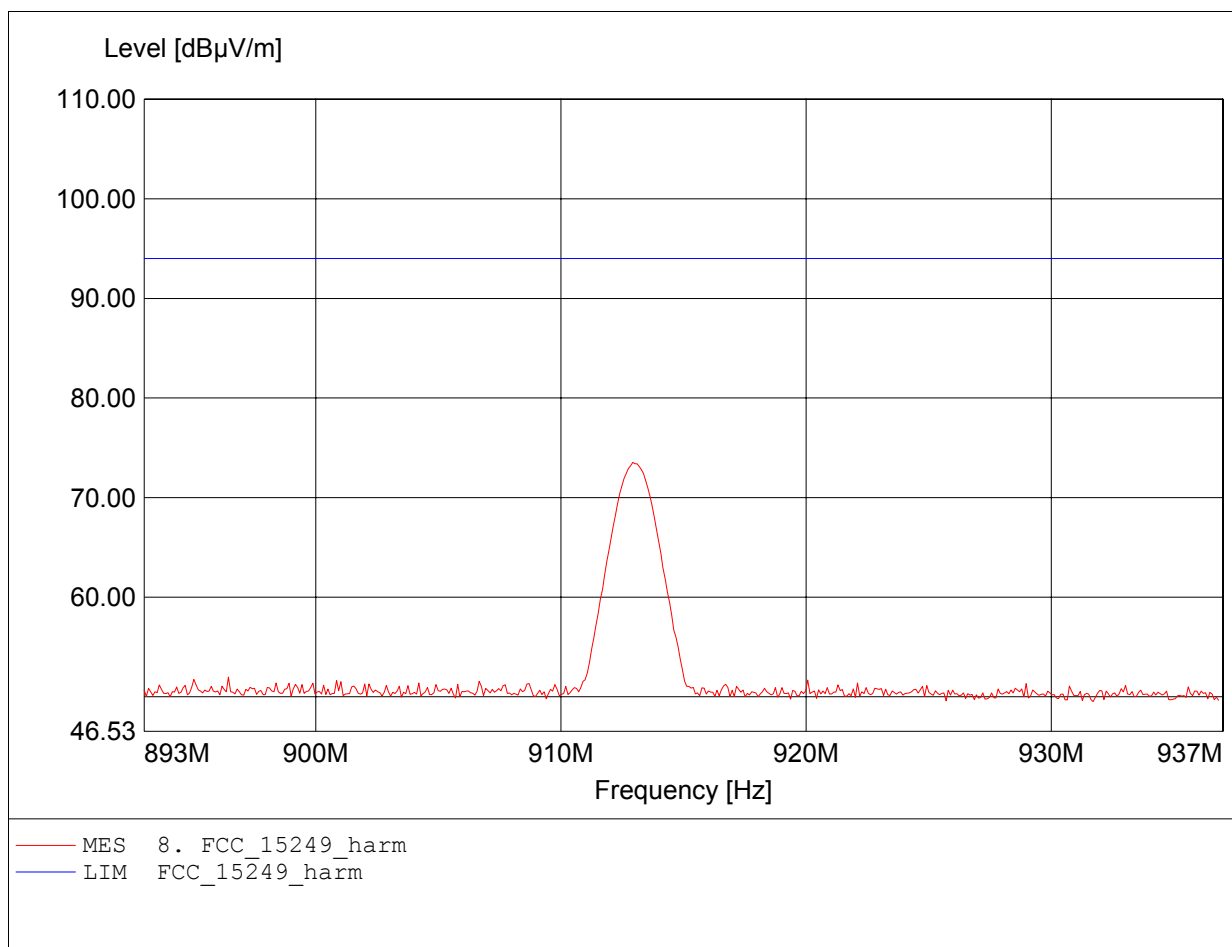


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 913.016MHz, Emax: 77.29dBµV/m, RBW: 1MHz

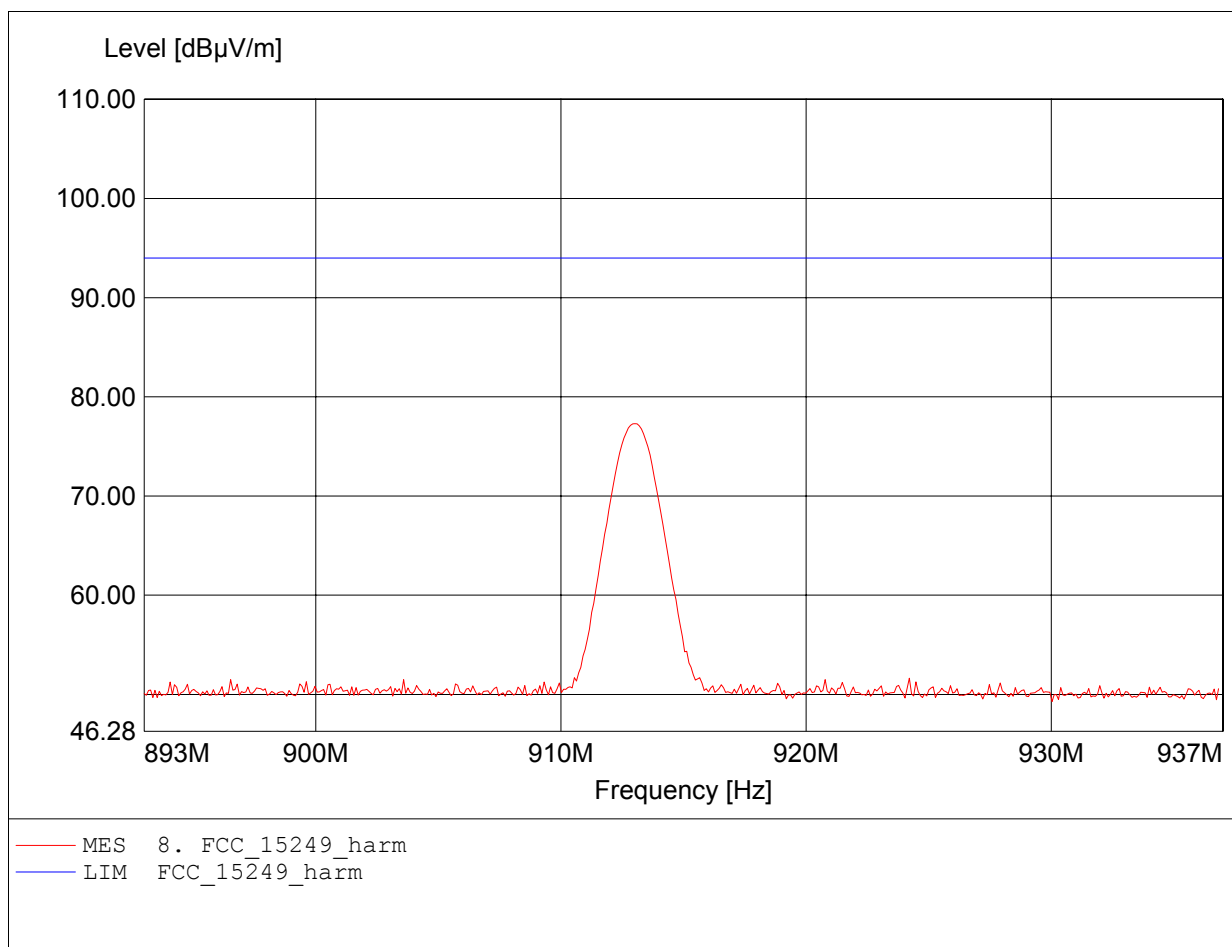


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 923.068MHz, Emax: 75.22dBµV/m, RBW: 1MHz

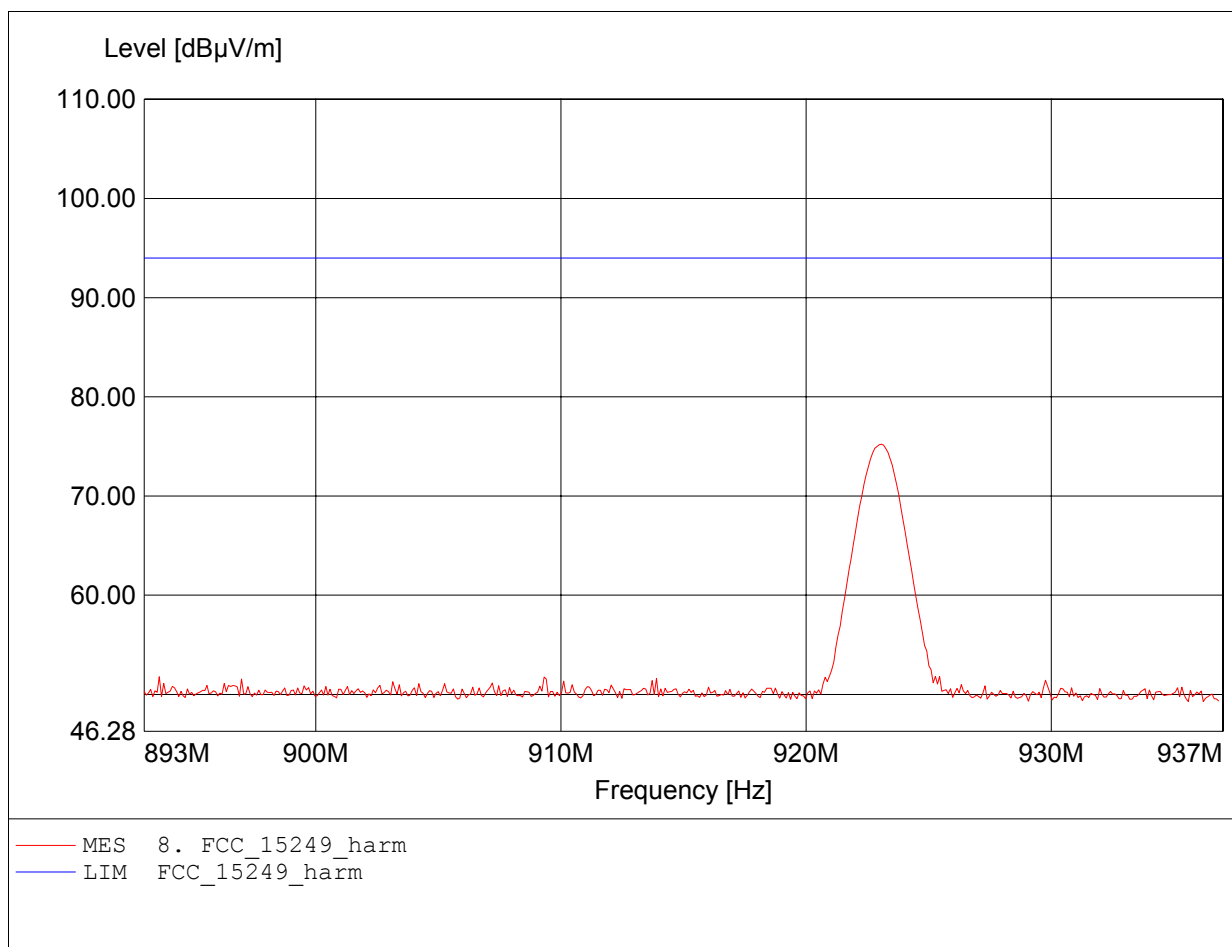

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 923.068MHz, Emax: 77.79dBµV/m, RBW: 1MHz

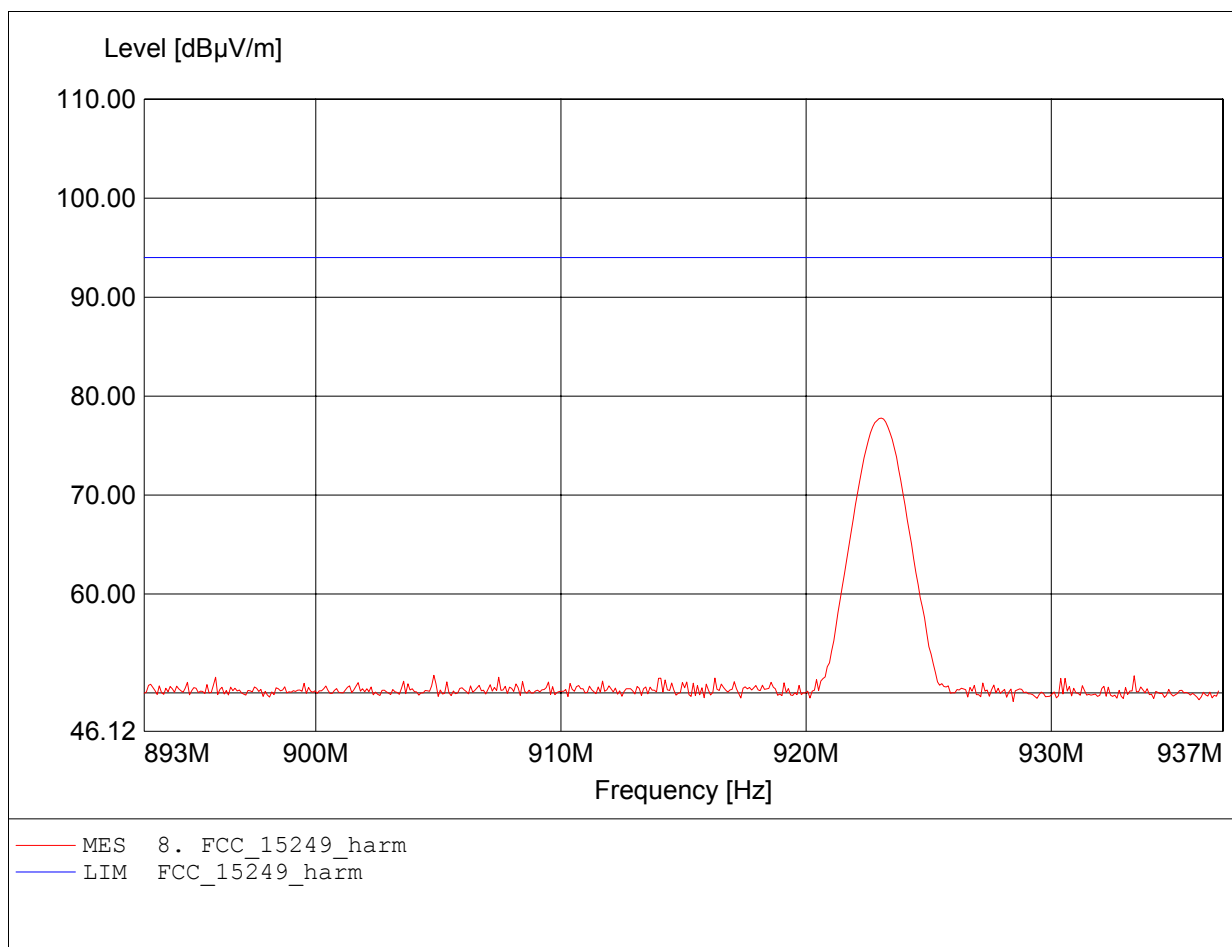


Annex C

Spurious Emissions radiated - Transmitter operating


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.934MHz, Emax: 32.33dBµV/m, RBW: 100kHz

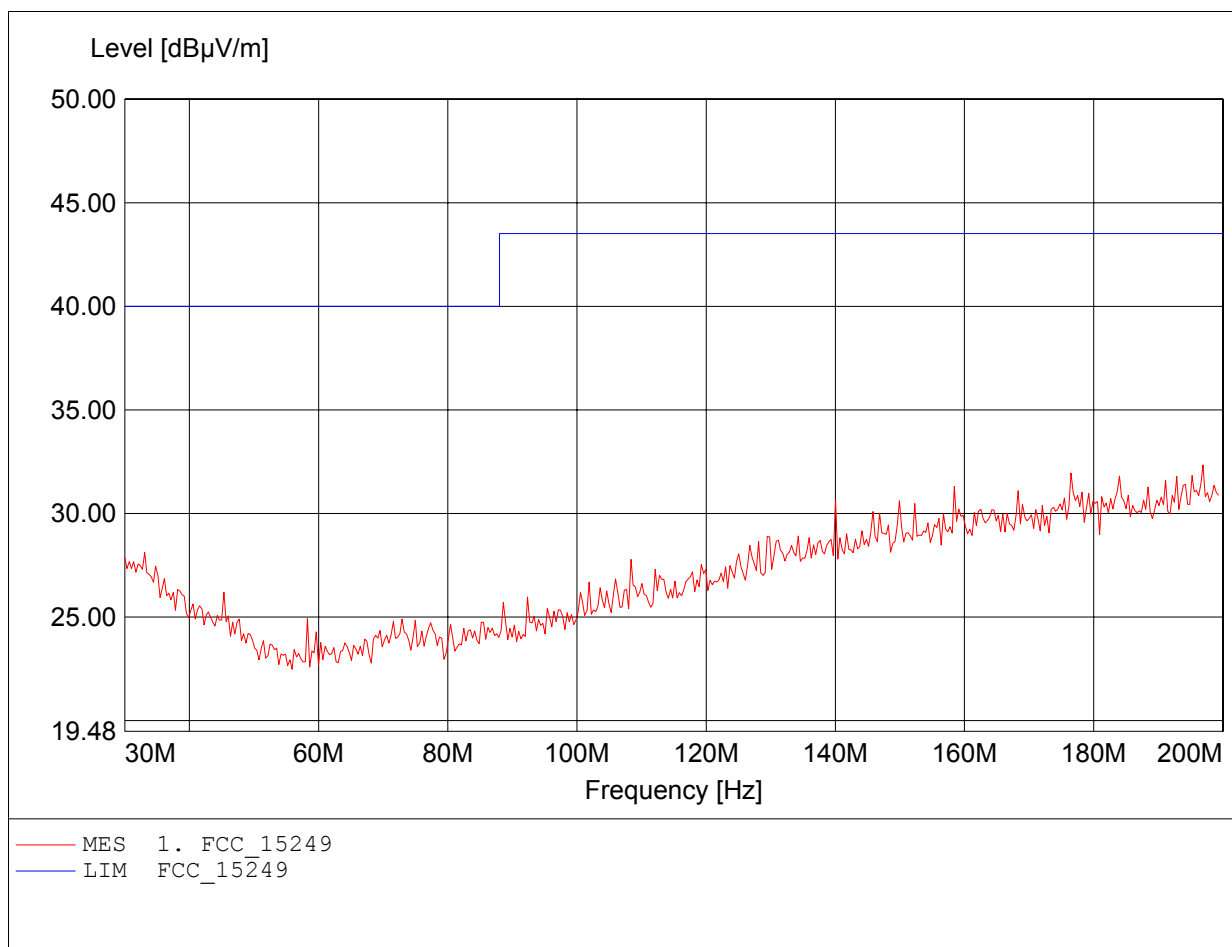


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.802MHz, Emax: 32.43dBµV/m, RBW: 100kHz

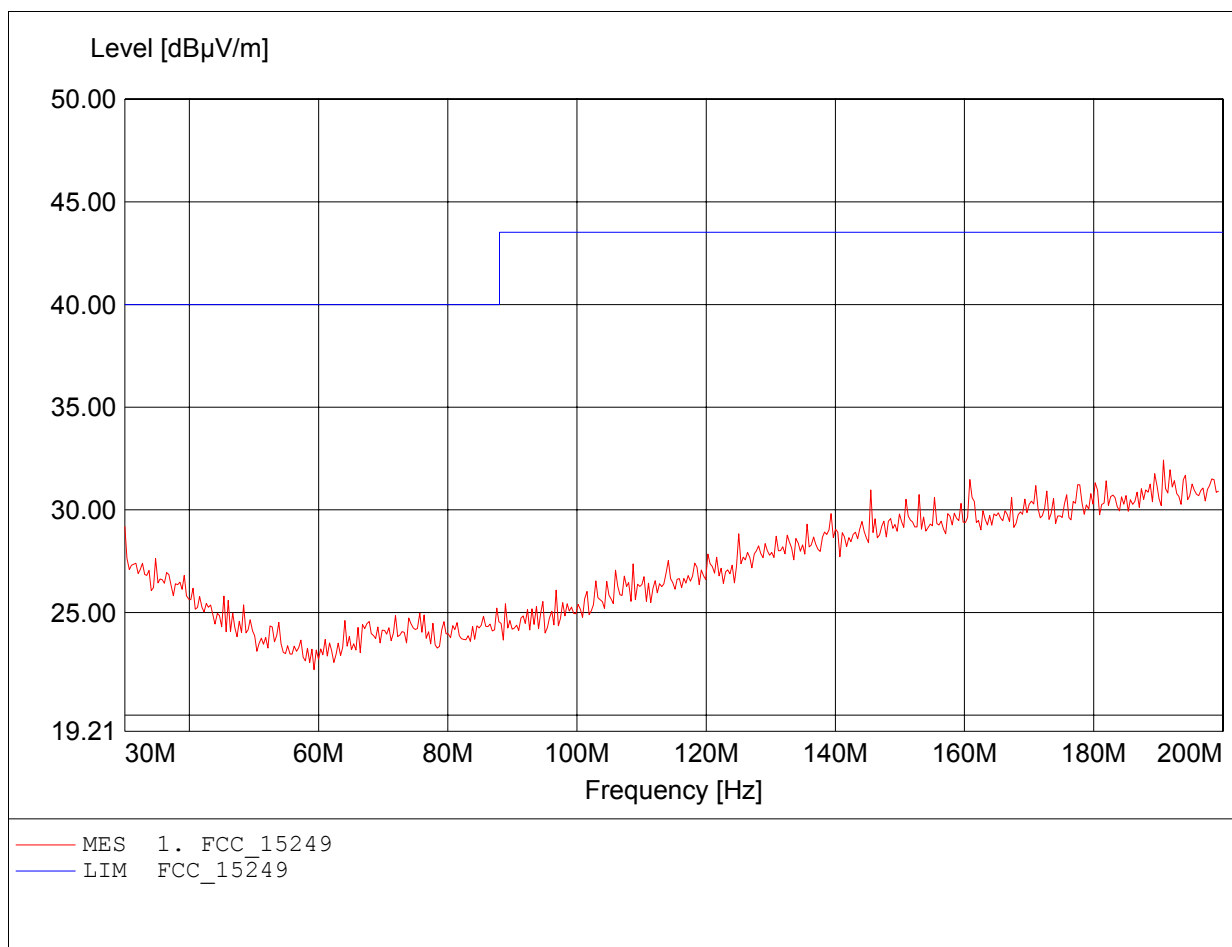


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 984.994MHz, Emax: 25.09dBµV/m, RBW: 100kHz

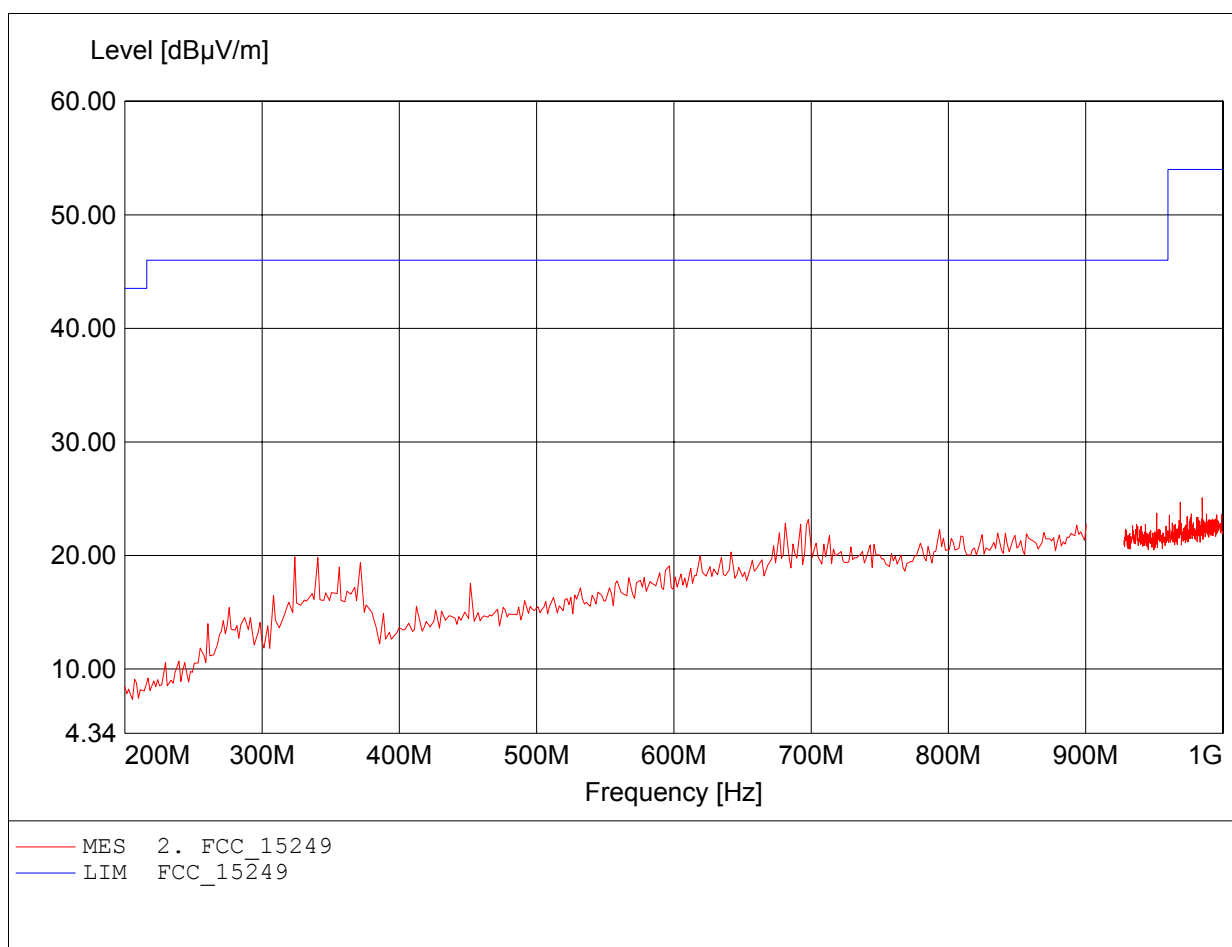


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 793.675MHz, Emax: 32.75dBµV/m, RBW: 100kHz

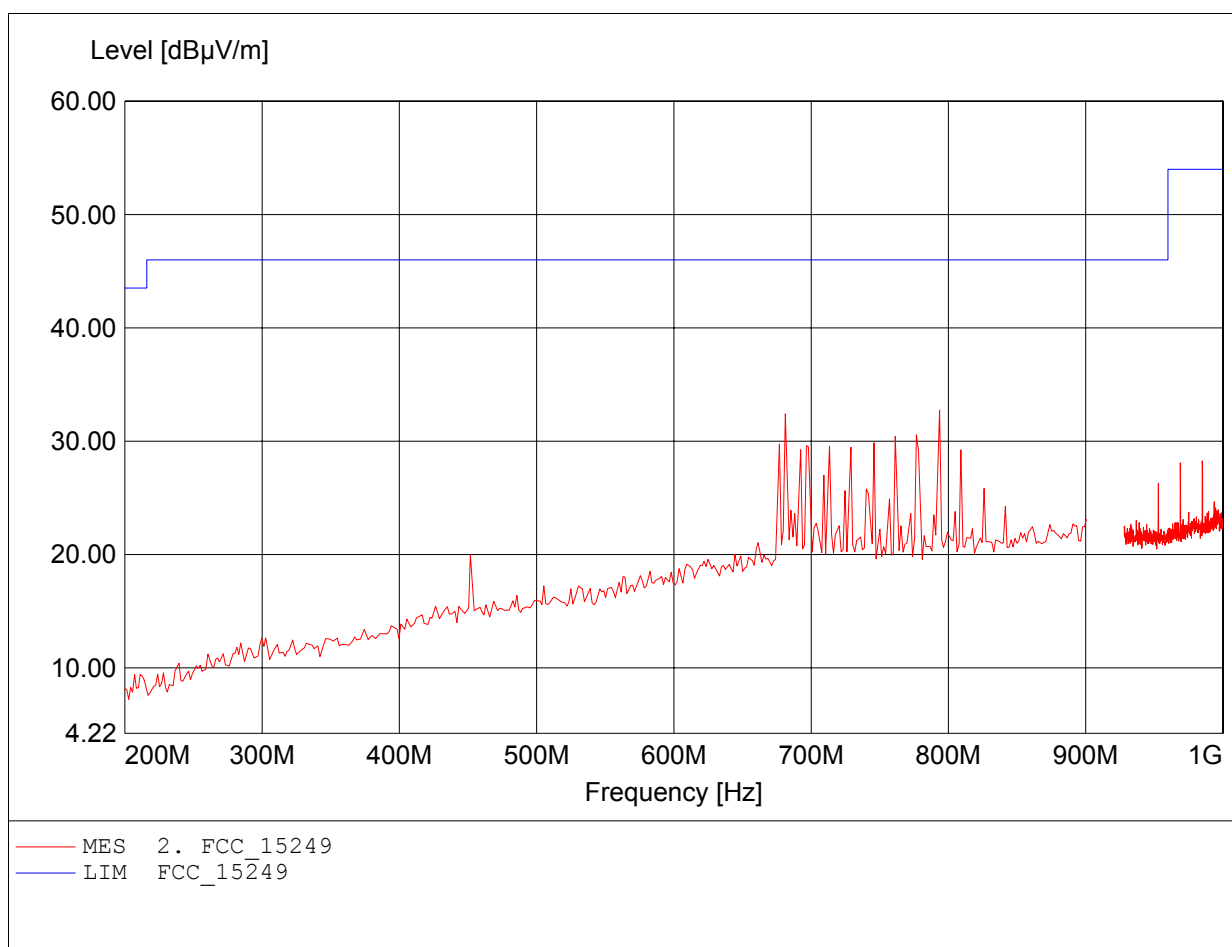


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 1.812GHz, Emax: 58.62dBµV/m, RBW: 1MHz

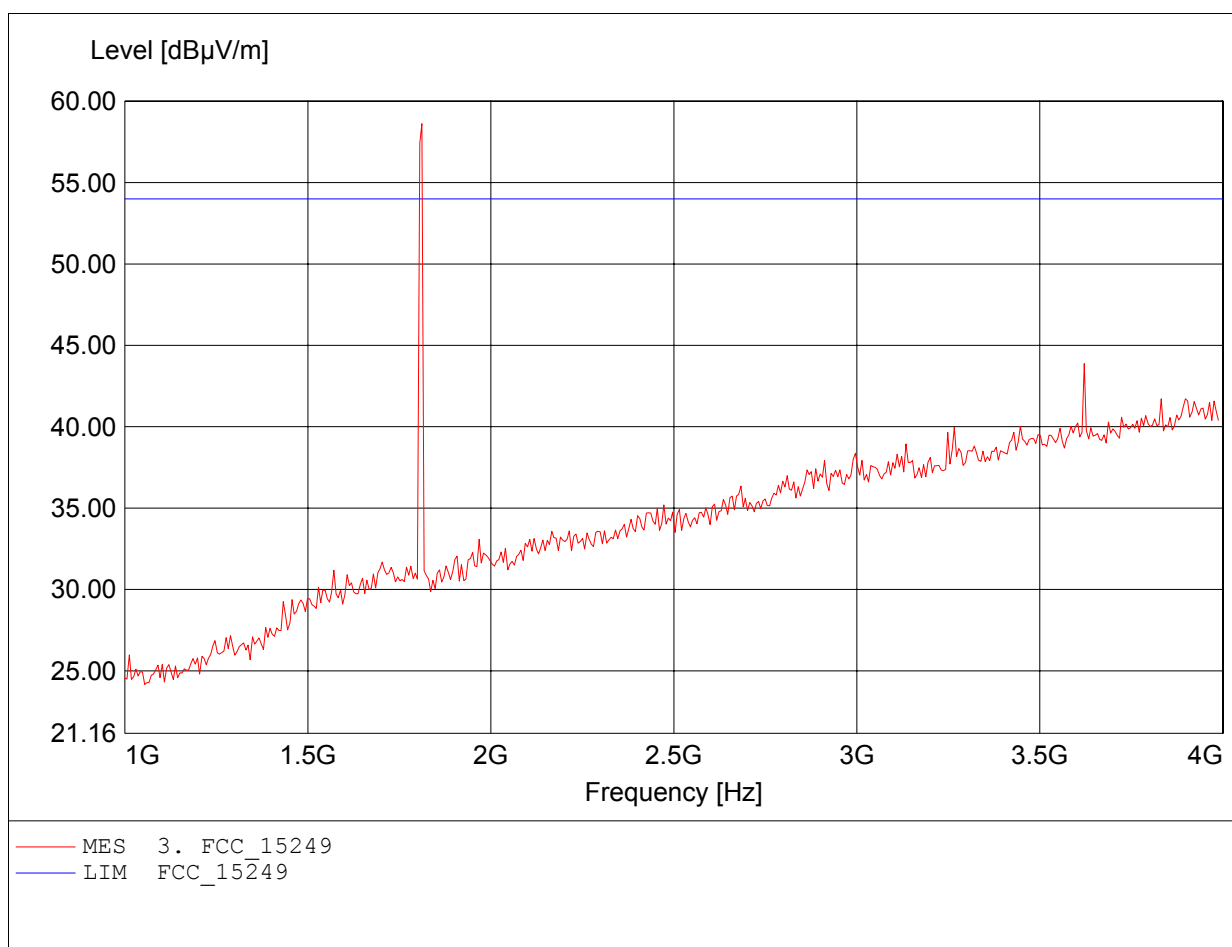


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249 Detector:average
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.810GHz, Emax: 39.68dBµV/m, RBW: 1MHz

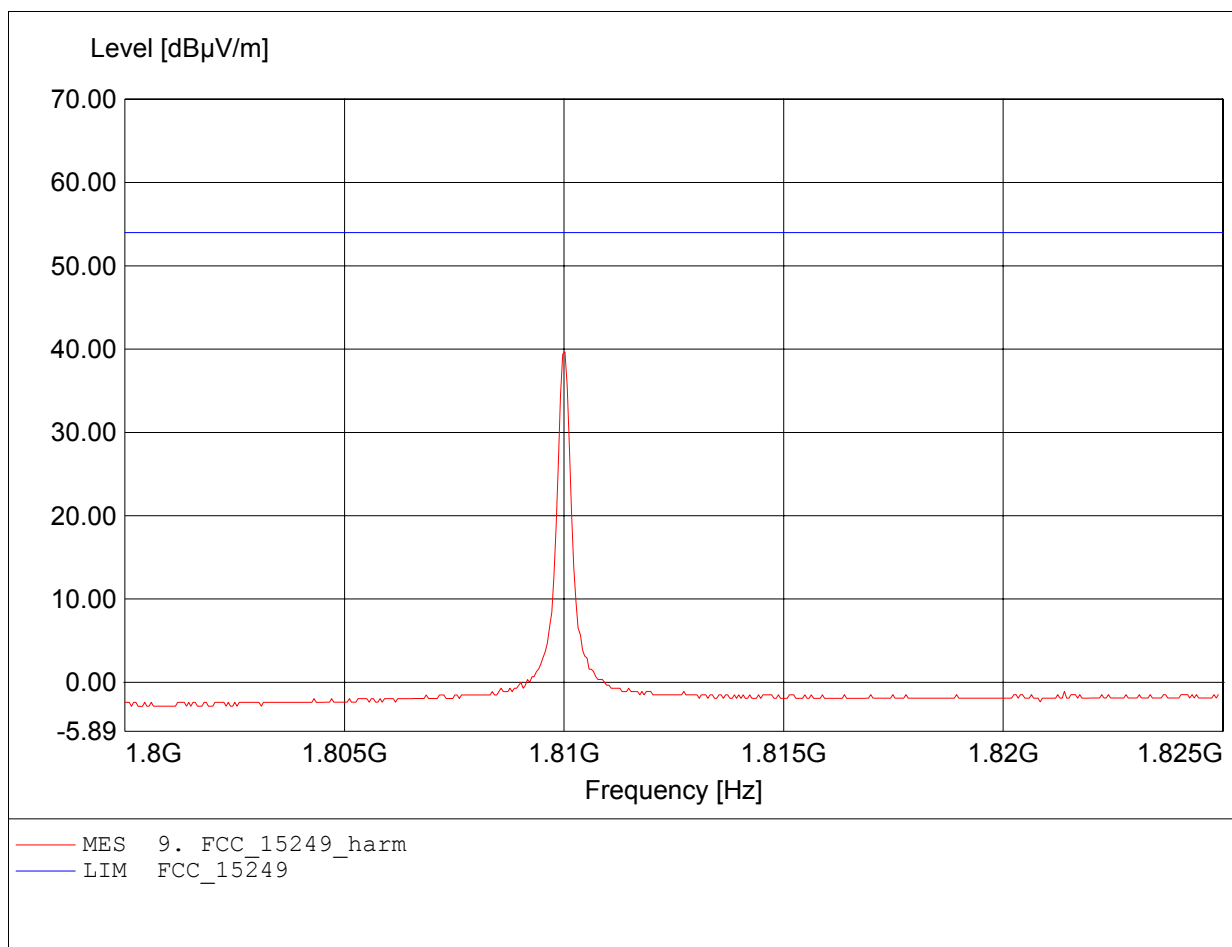


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 1.812GHz, Emax: 46.56dBµV/m, RBW: 1MHz

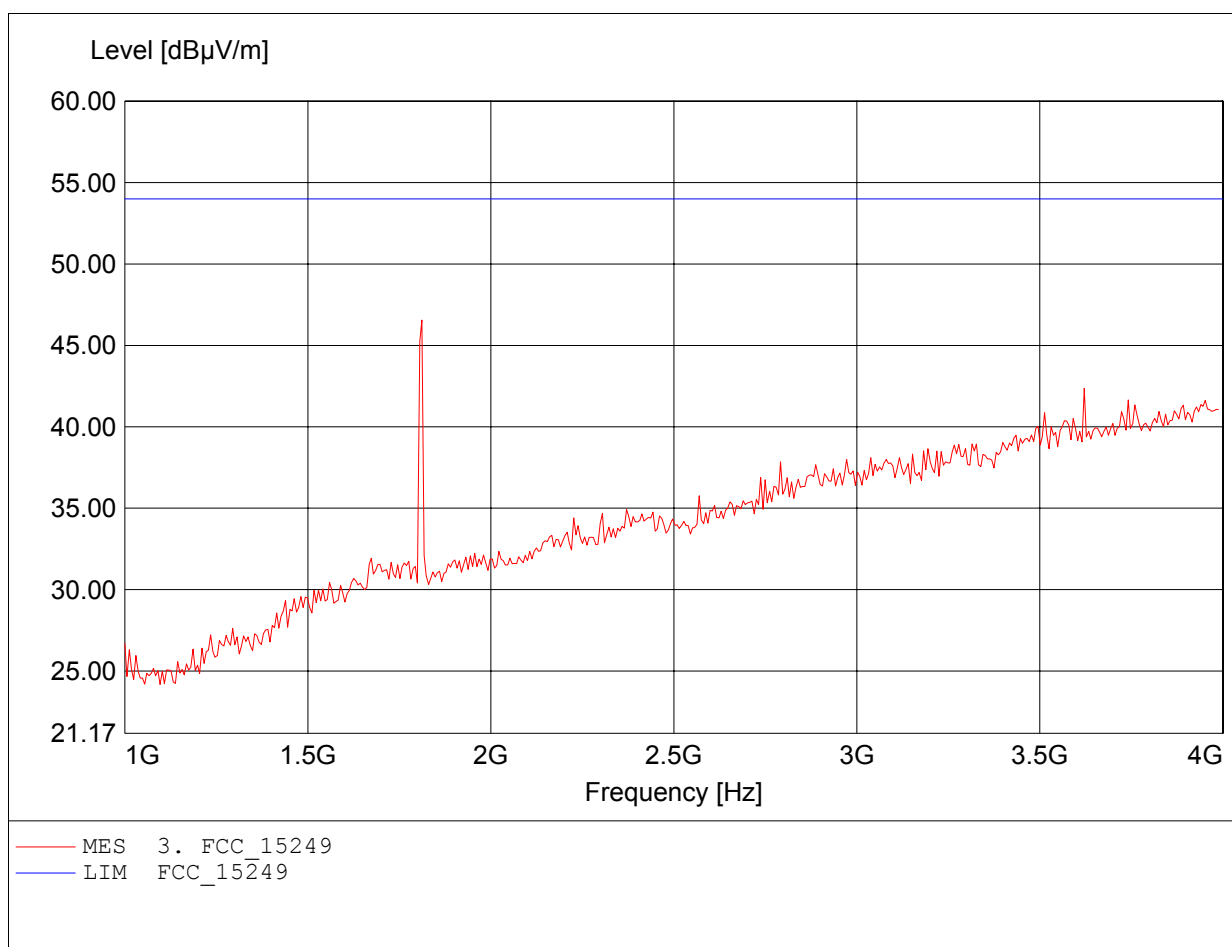


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.487GHz, Emax: 43.24dBµV/m, RBW: 1MHz

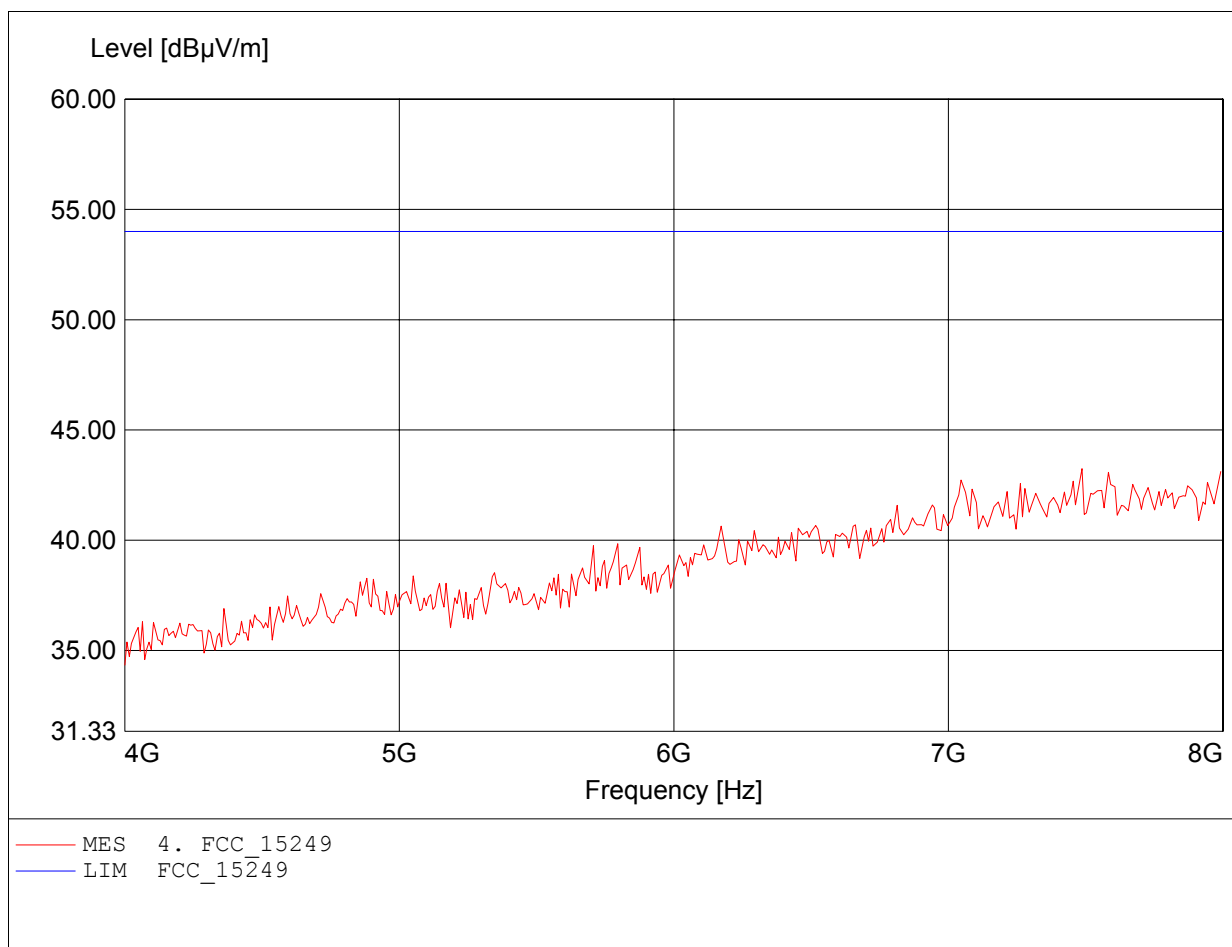


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.711GHz, Emax: 43.20dBµV/m, RBW: 1MHz

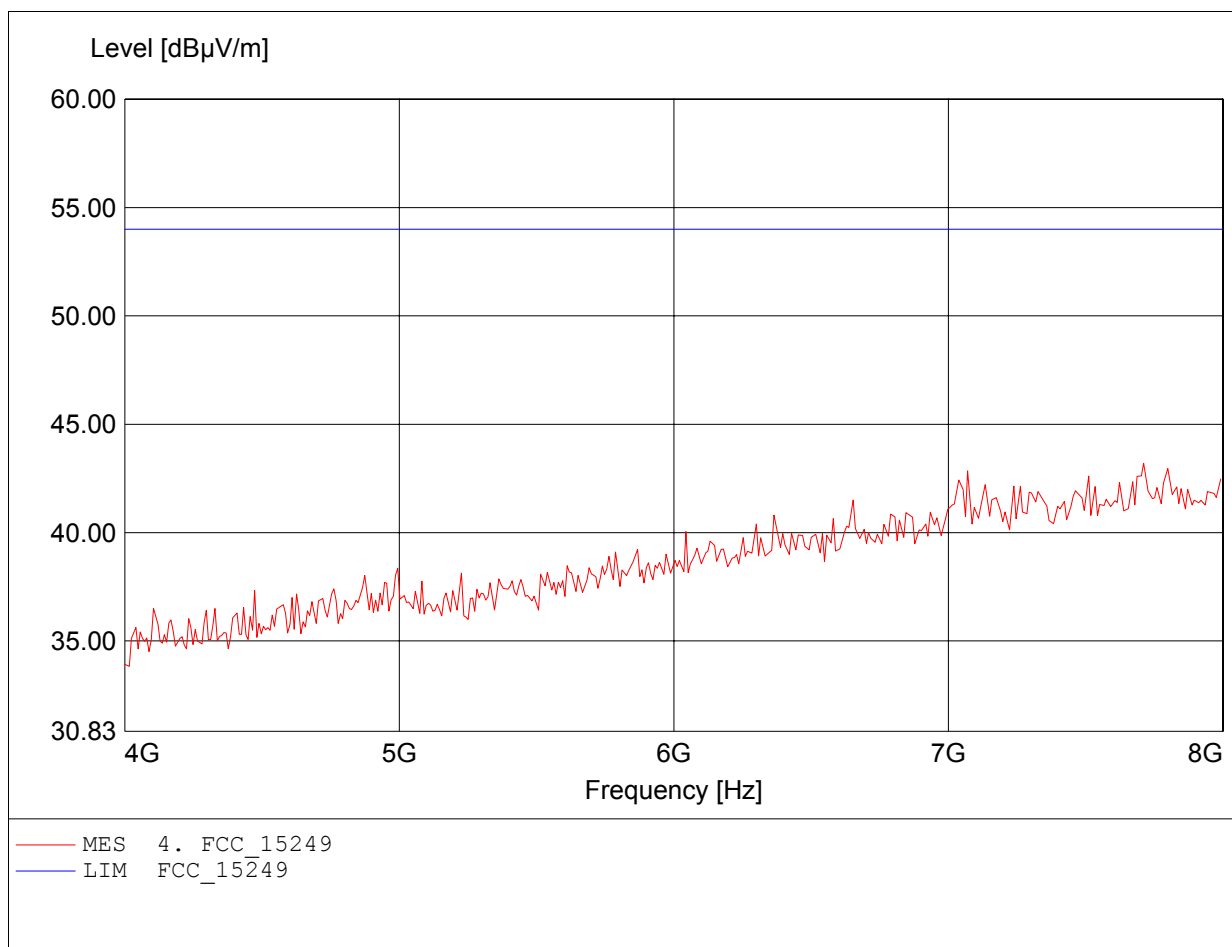


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.808GHz, Emax: 47.17dBµV/m, RBW: 1MHz

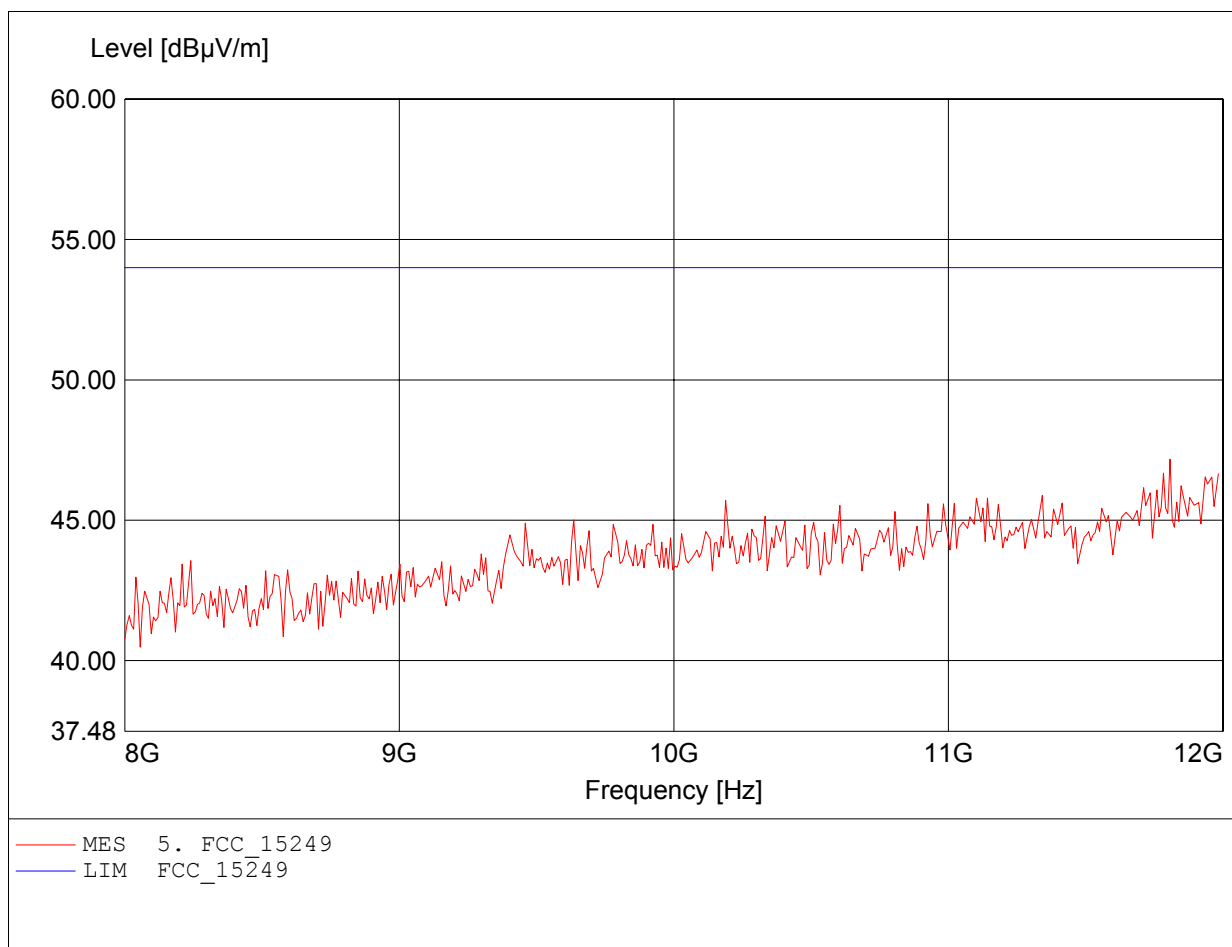


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 905 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.872GHz, Emax: 47.22dBµV/m, RBW: 1MHz

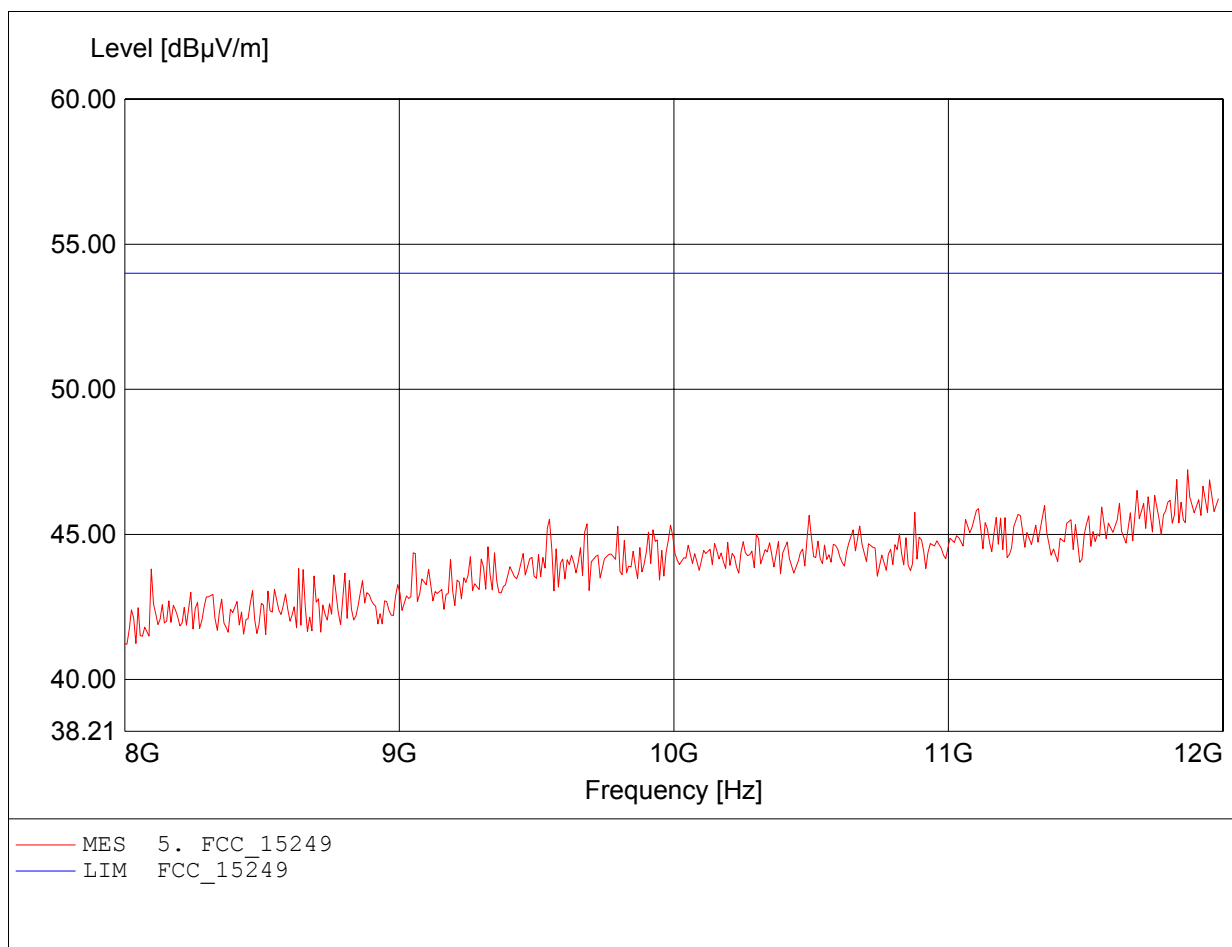


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 180.581MHz, Emax: 31.63dBµV/m, RBW: 100kHz

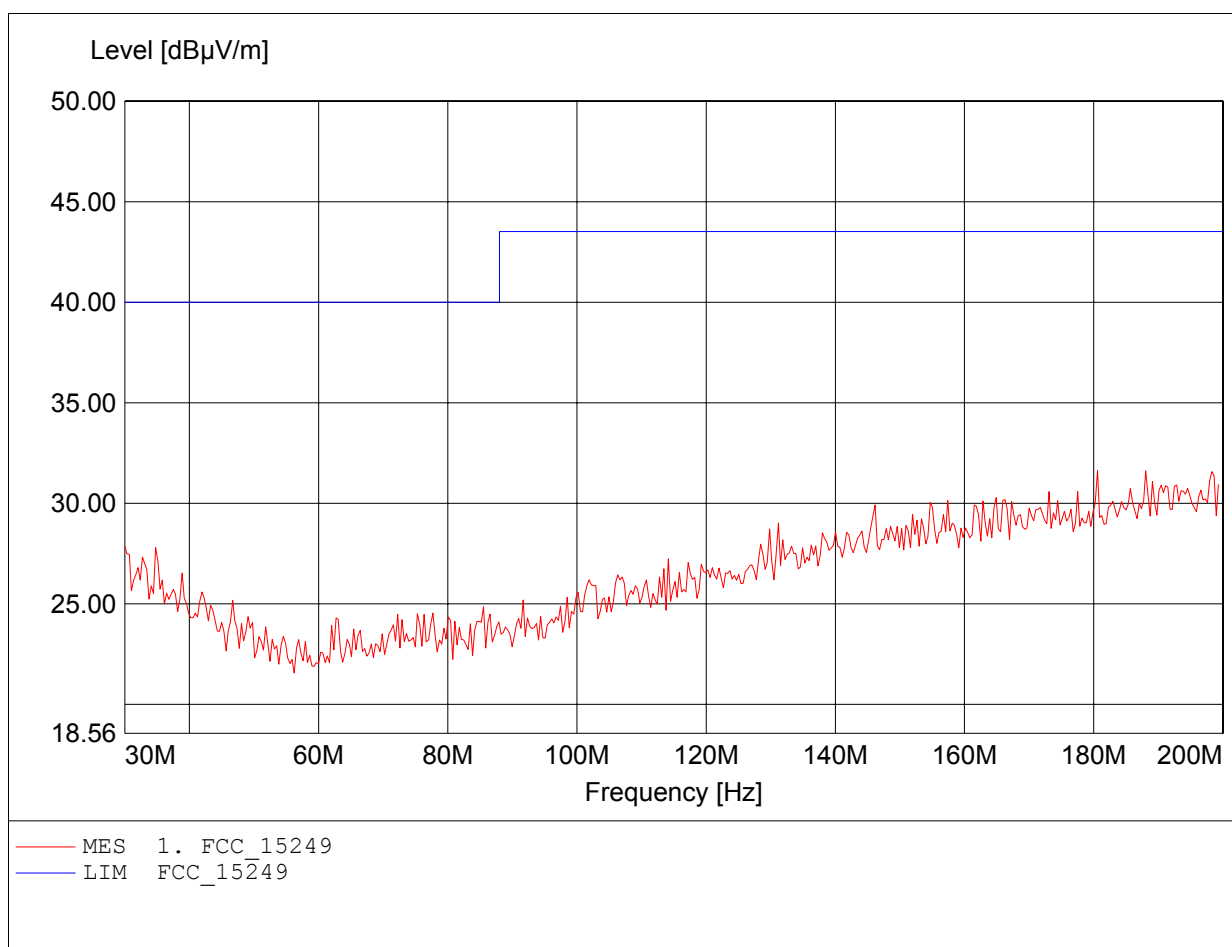


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.120MHz, Emax: 31.72dBµV/m, RBW: 100kHz

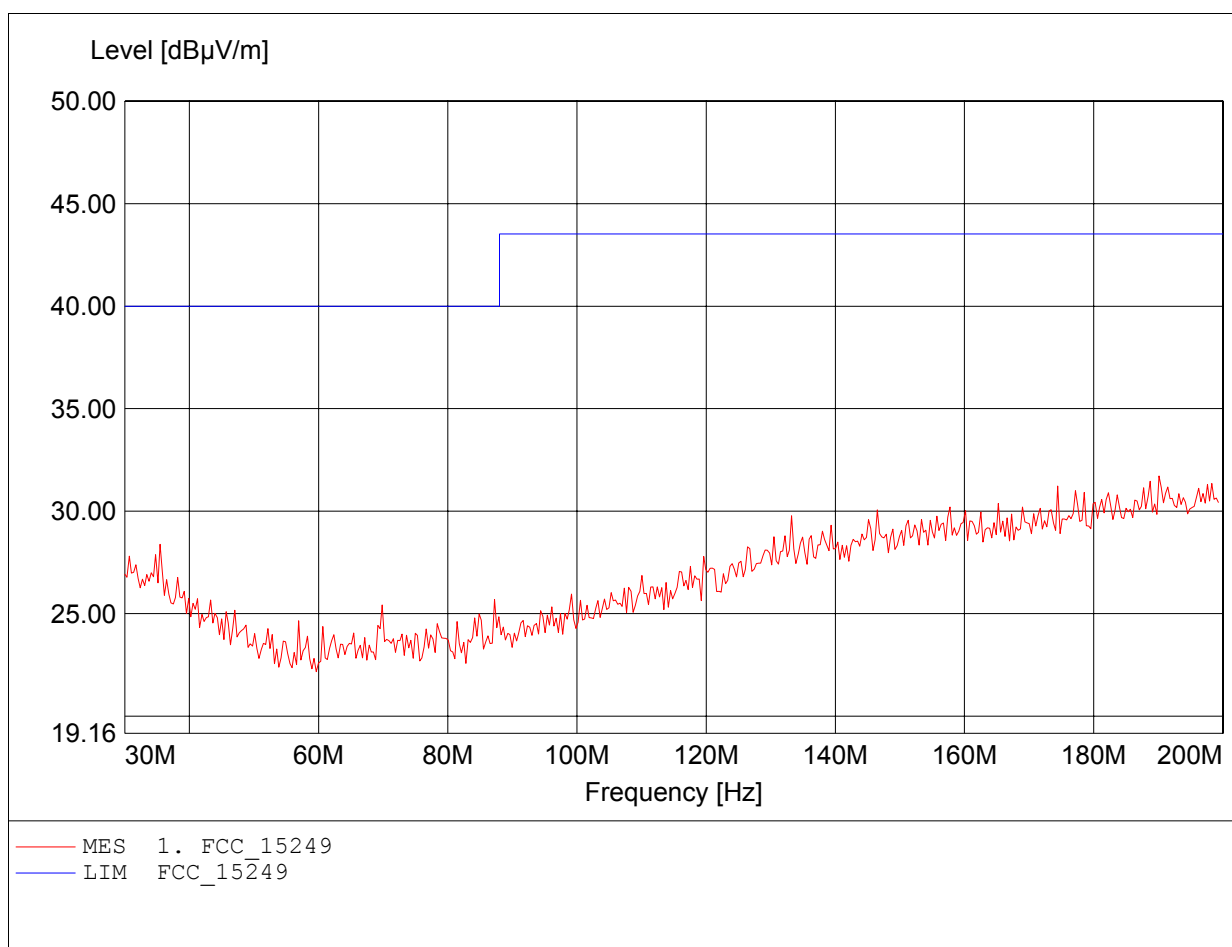


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 993.074MHz, Emax: 24.87dBµV/m, RBW: 100kHz

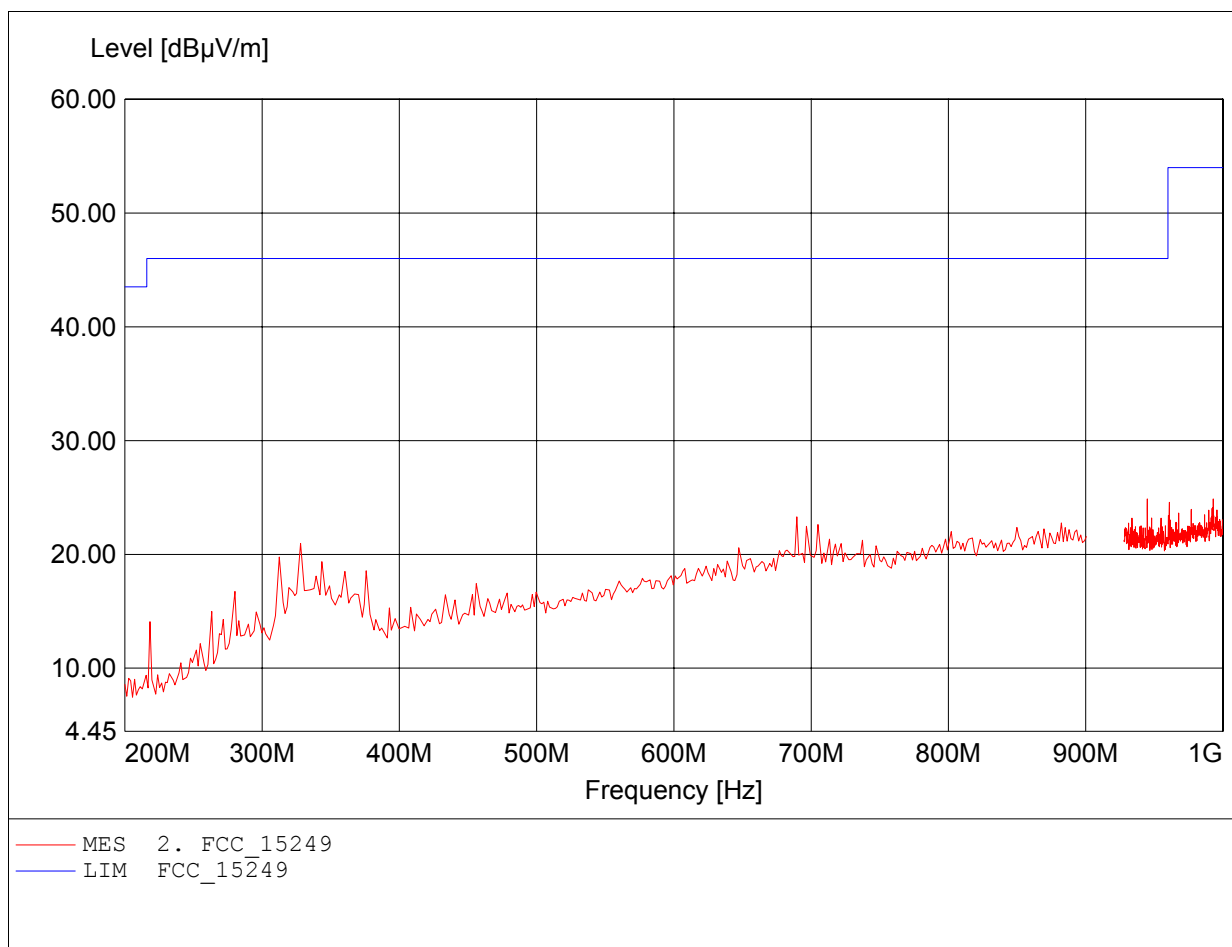


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 689.571MHz, Emax: 34.35dBµV/m, RBW: 100kHz

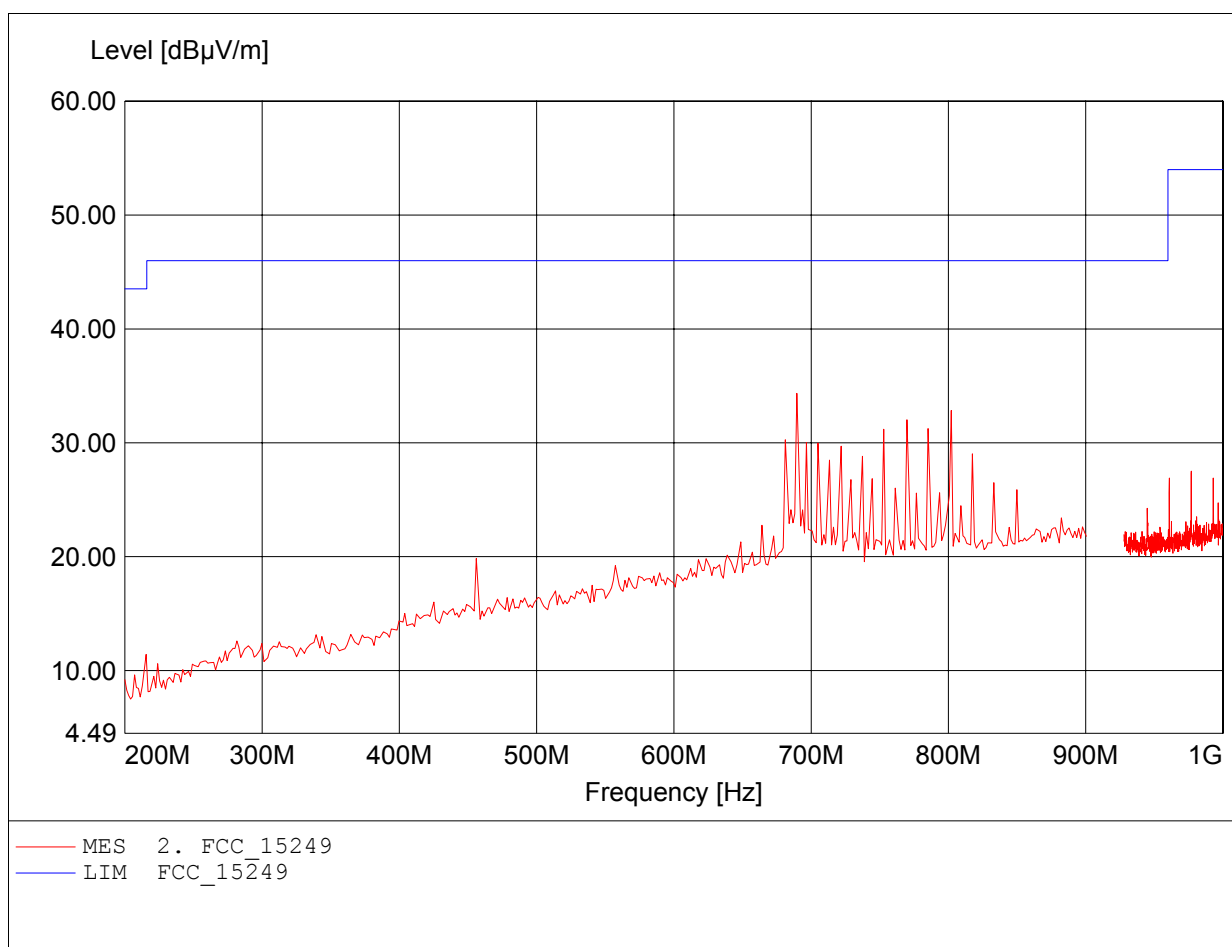


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 1.826GHz, Emax: 63.57dBµV/m, RBW: 1MHz

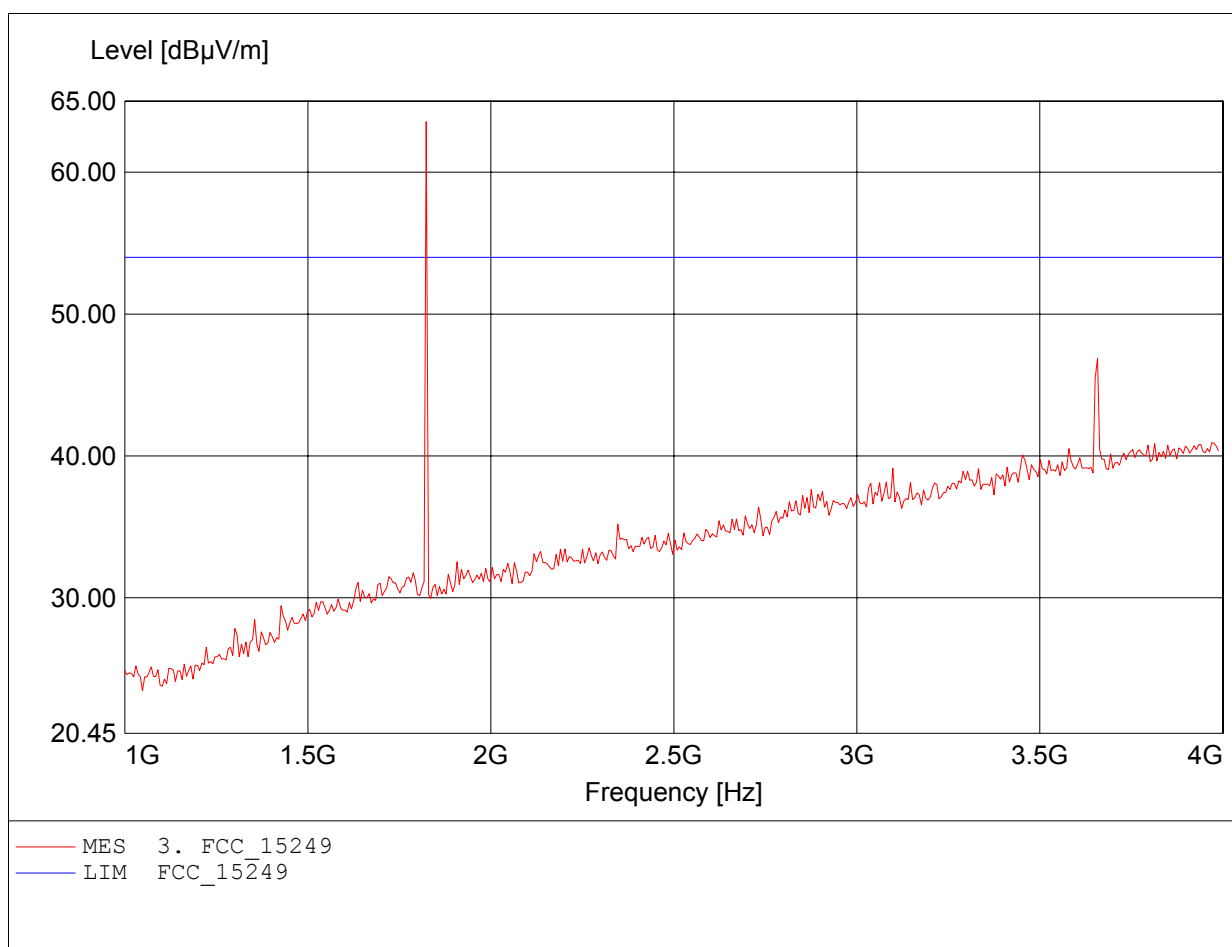


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249 Detector: average
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.826GHz, Emax: 43.15dBµV/m, RBW: 1MHz

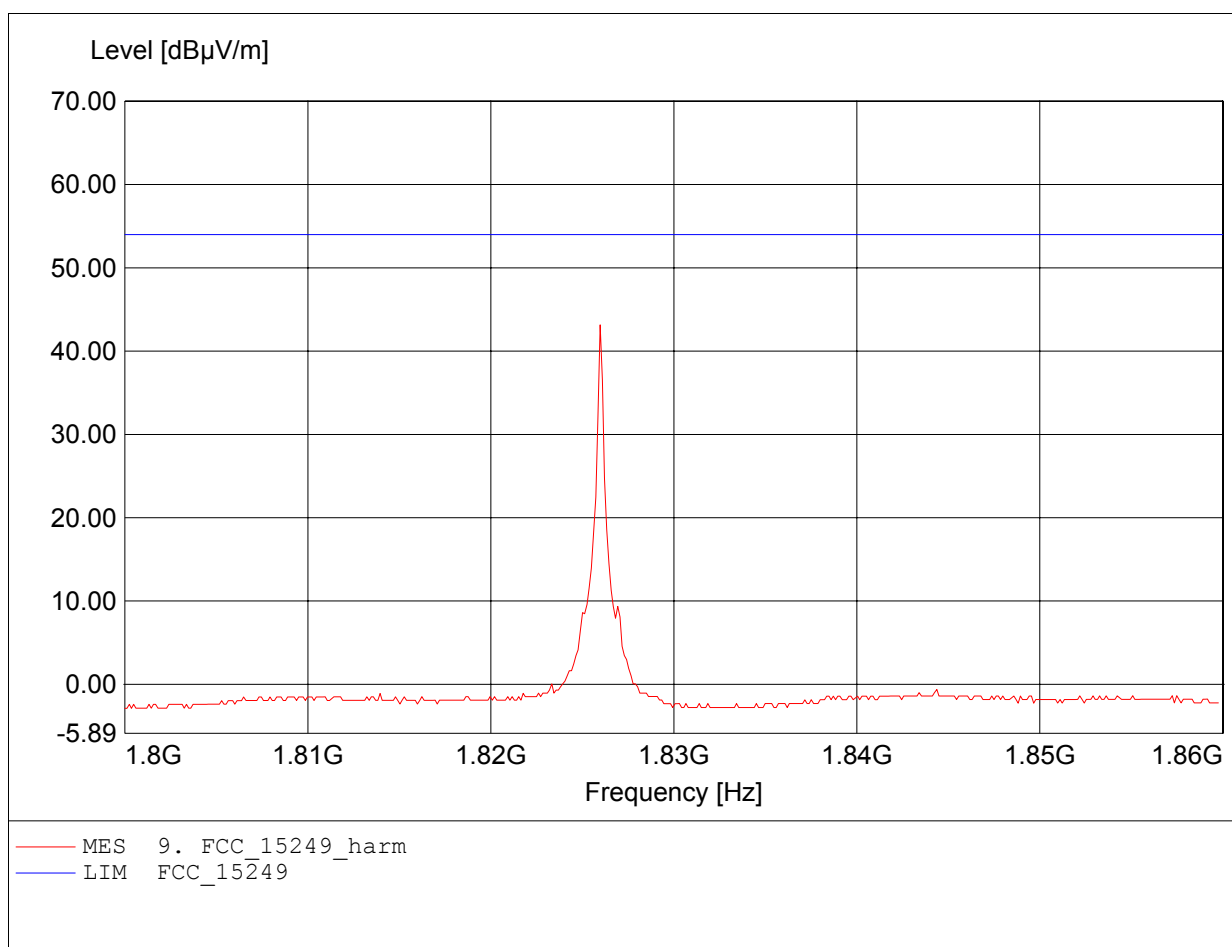


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 1.824GHz, Emax: 47.50dBµV/m, RBW: 1MHz

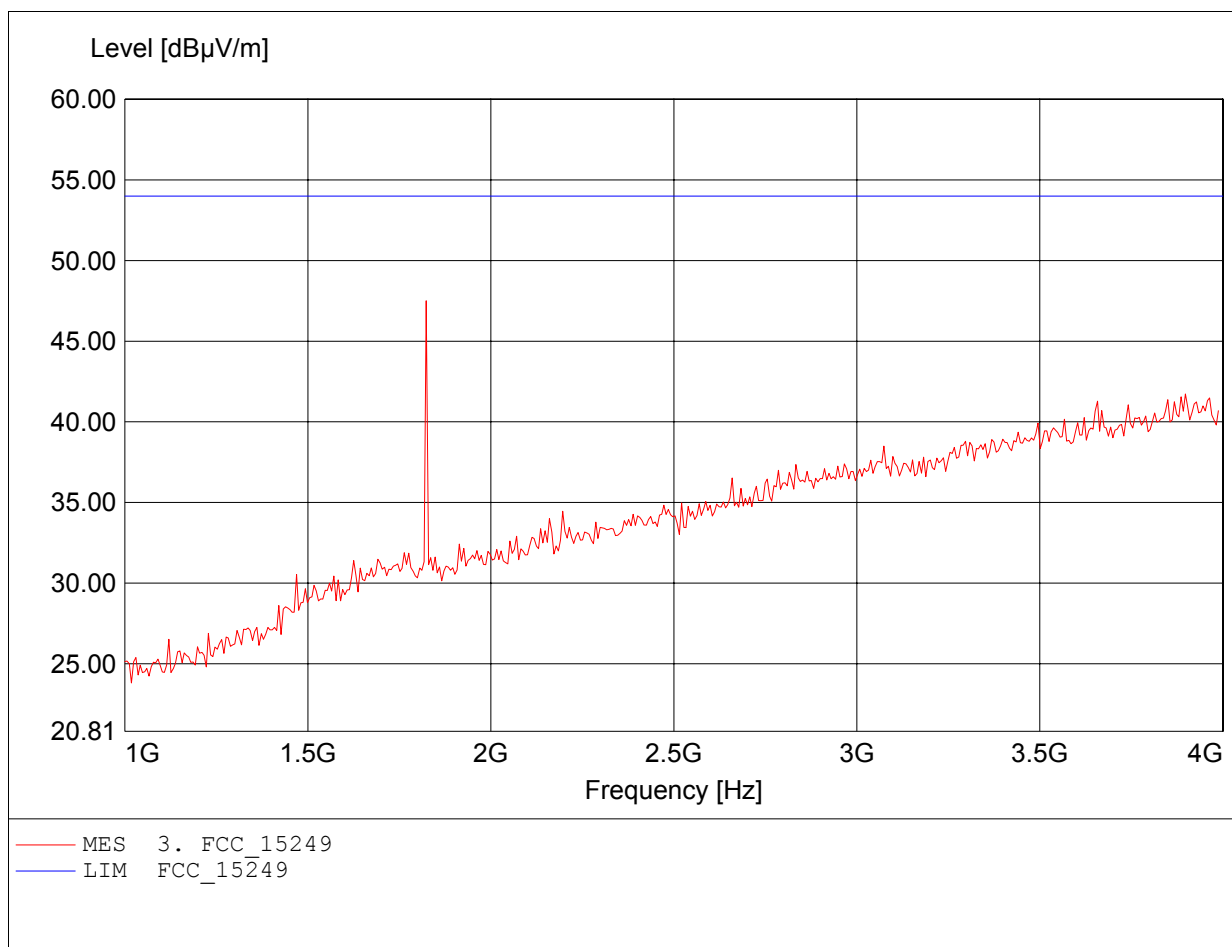


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.888GHz, Emax: 43.29dBµV/m, RBW: 1MHz

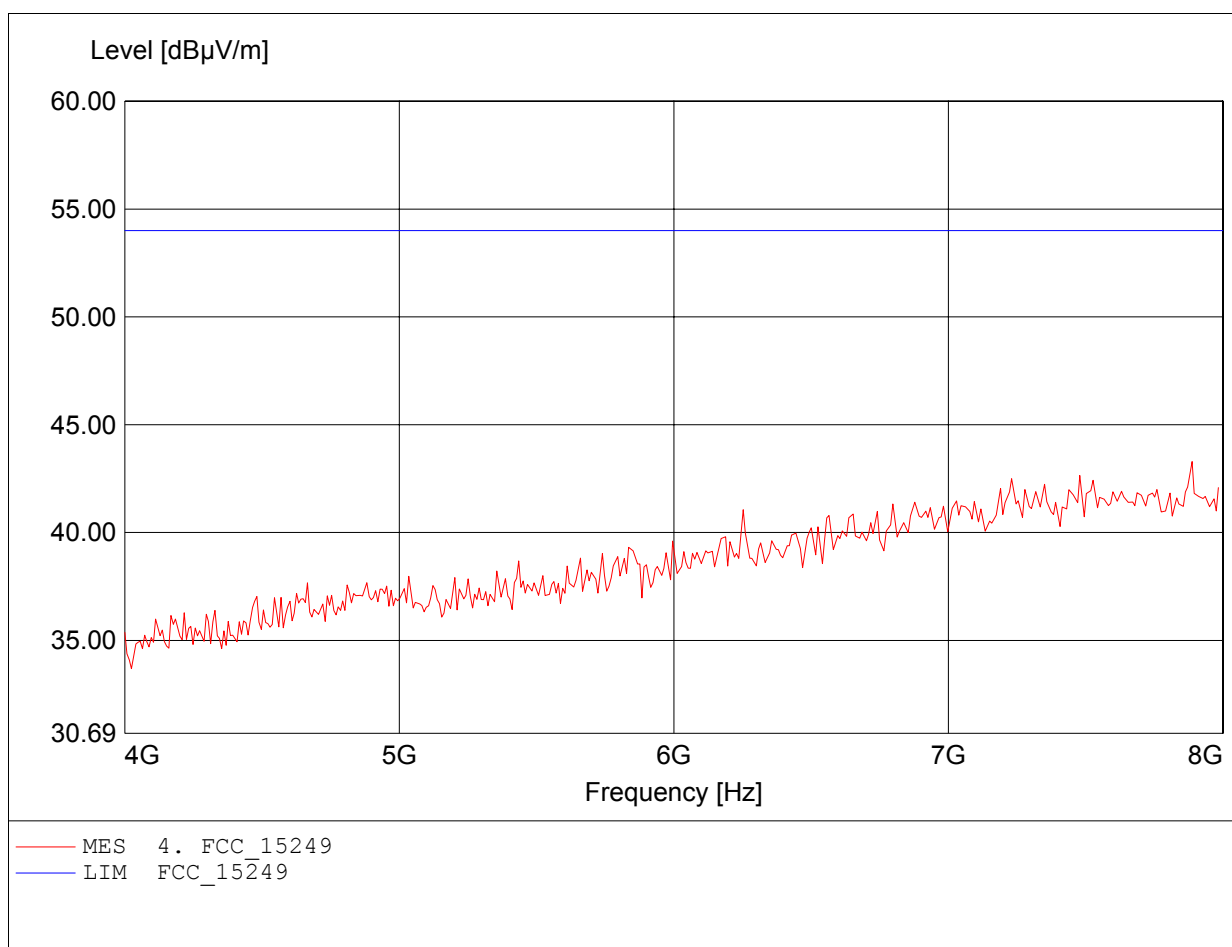


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.824GHz, Emax: 43.30dBµV/m, RBW: 1MHz

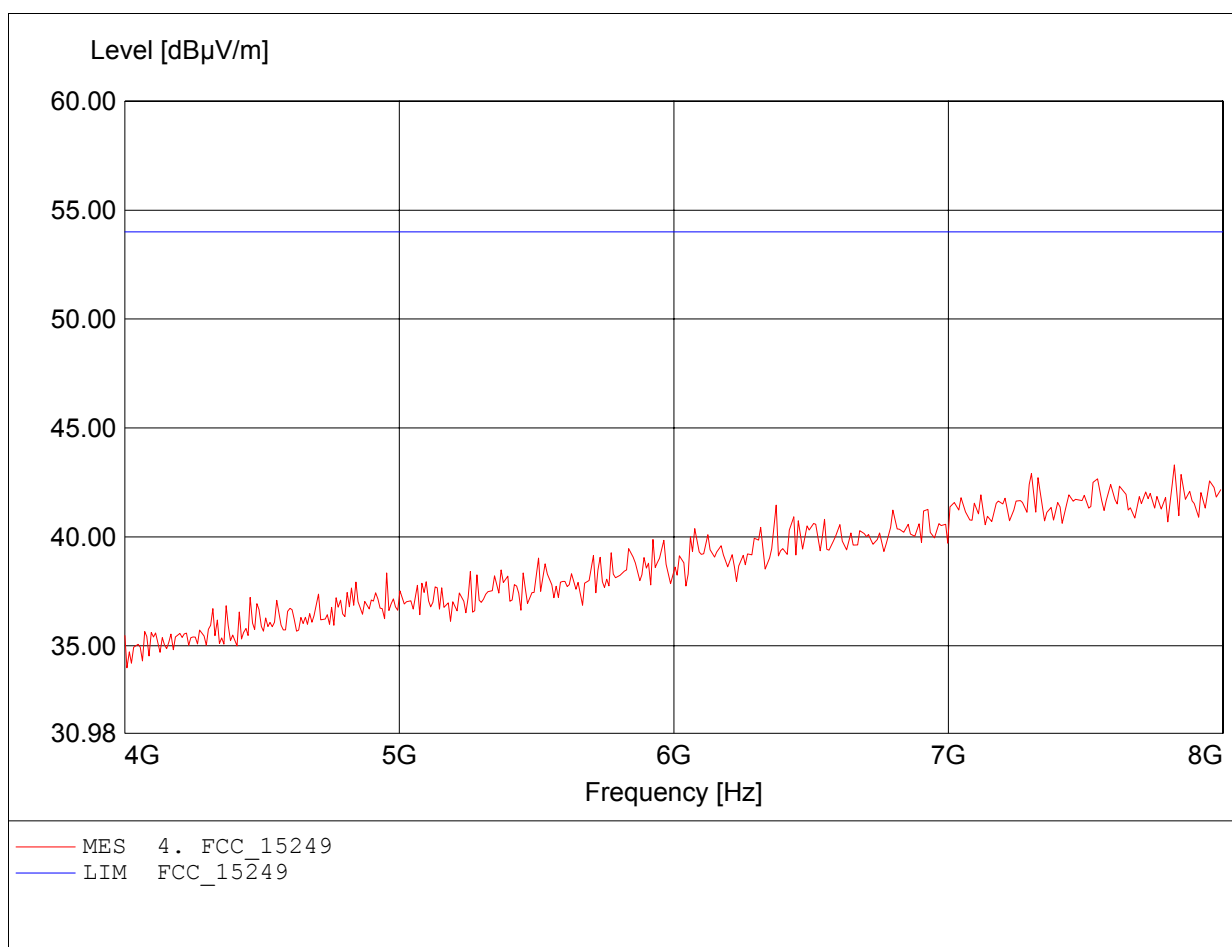


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.022GHz, Emax: 47.23dBµV/m, RBW: 1MHz

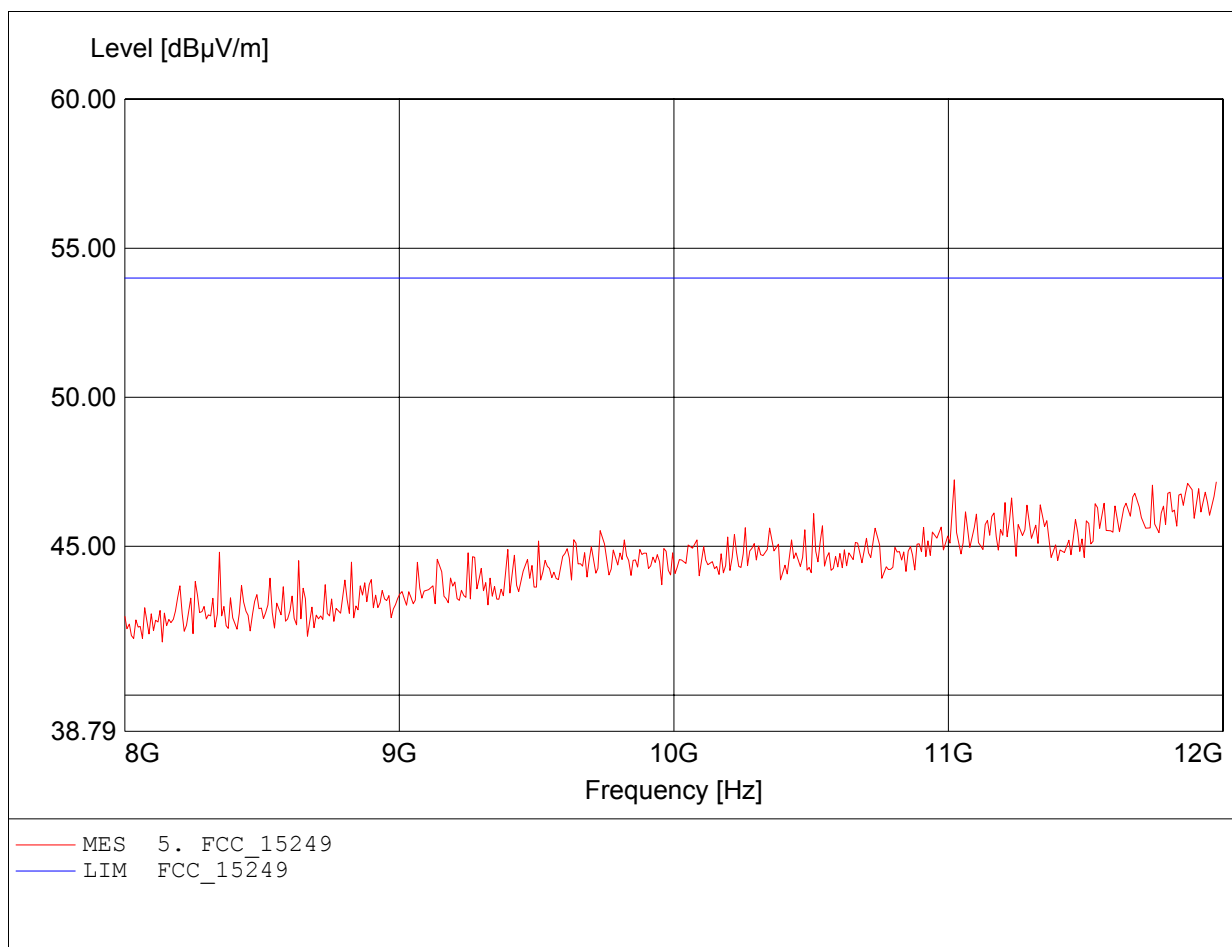


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.880GHz, Emax: 47.12dBµV/m, RBW: 1MHz

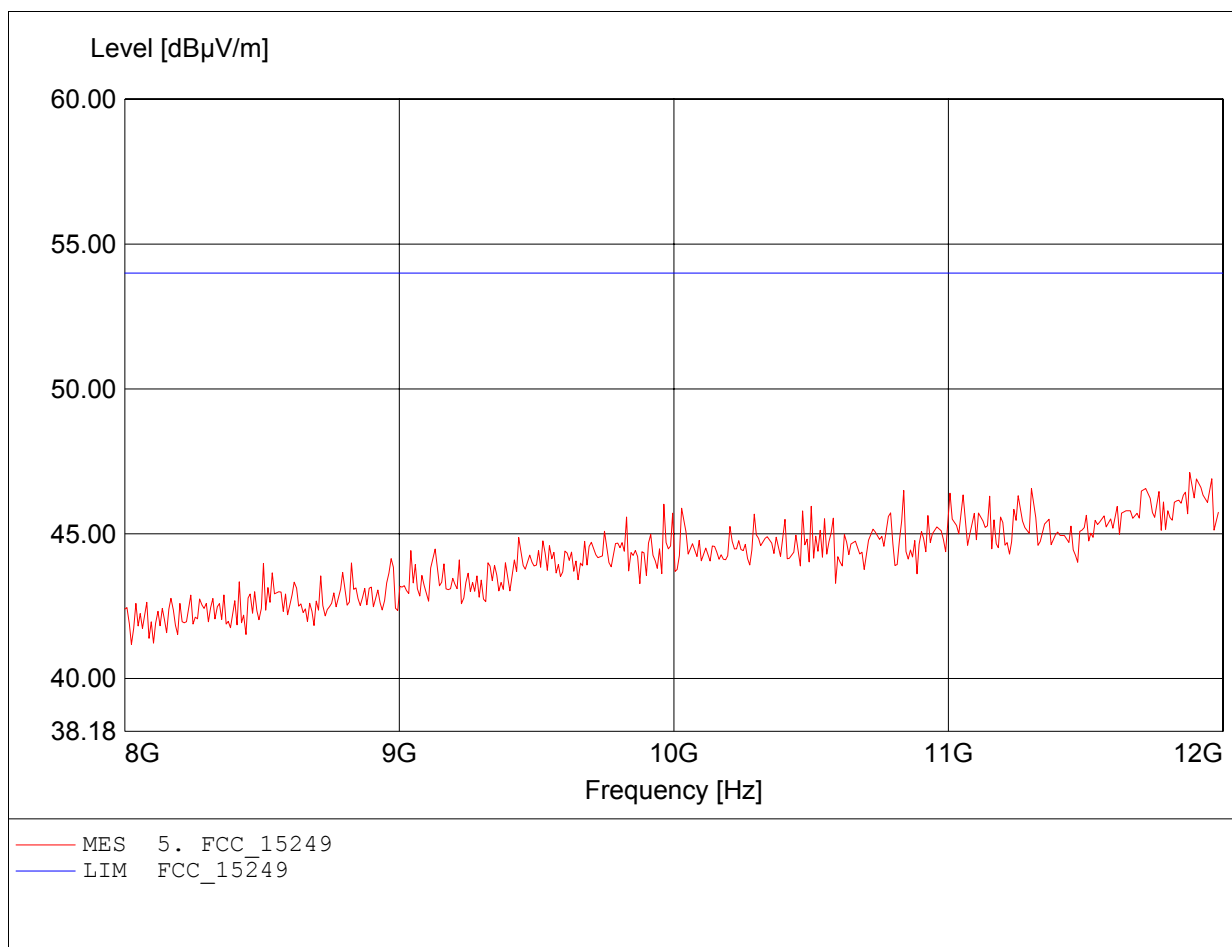


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 188.758MHz, Emax: 32.27dBµV/m, RBW: 100kHz

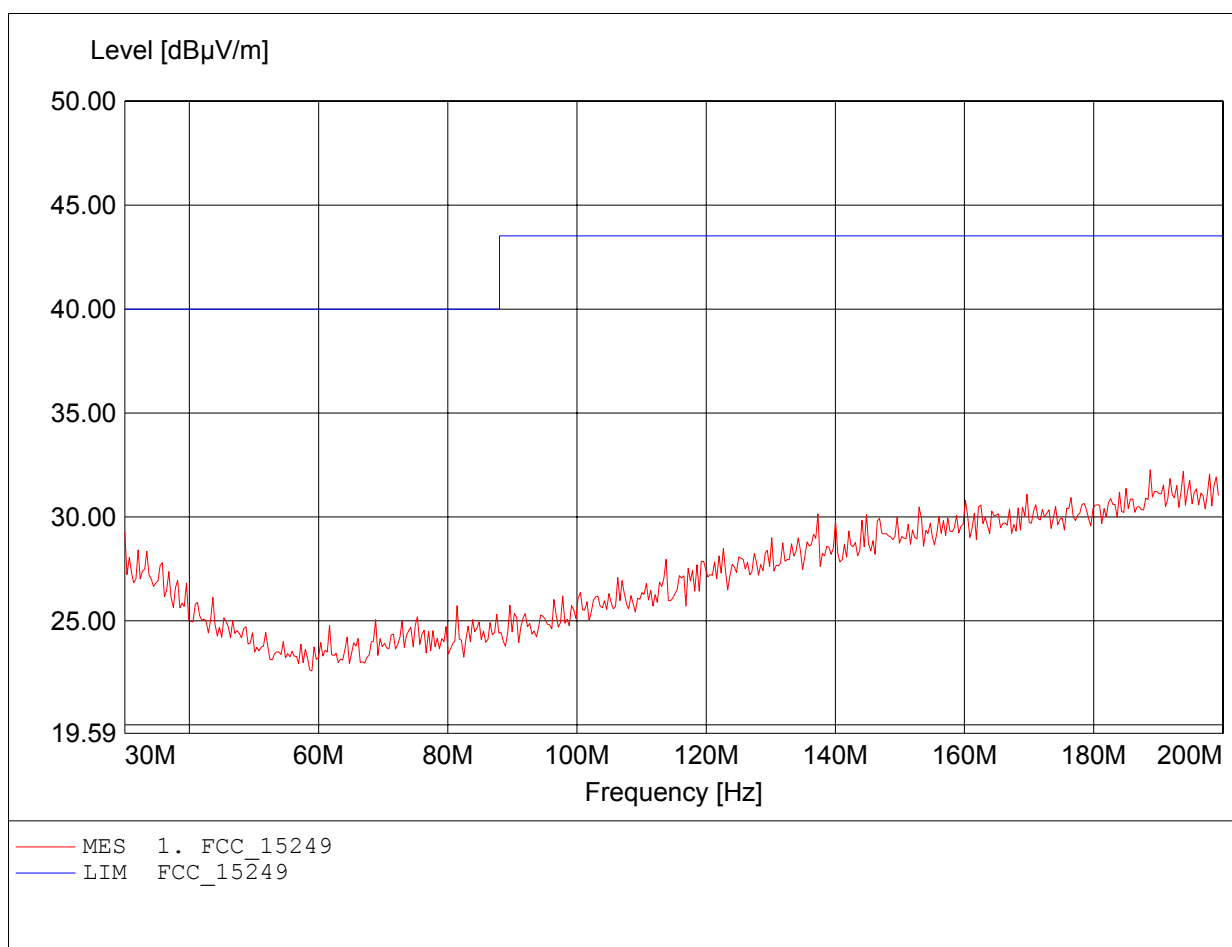


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 32.55dBµV/m, RBW: 100kHz

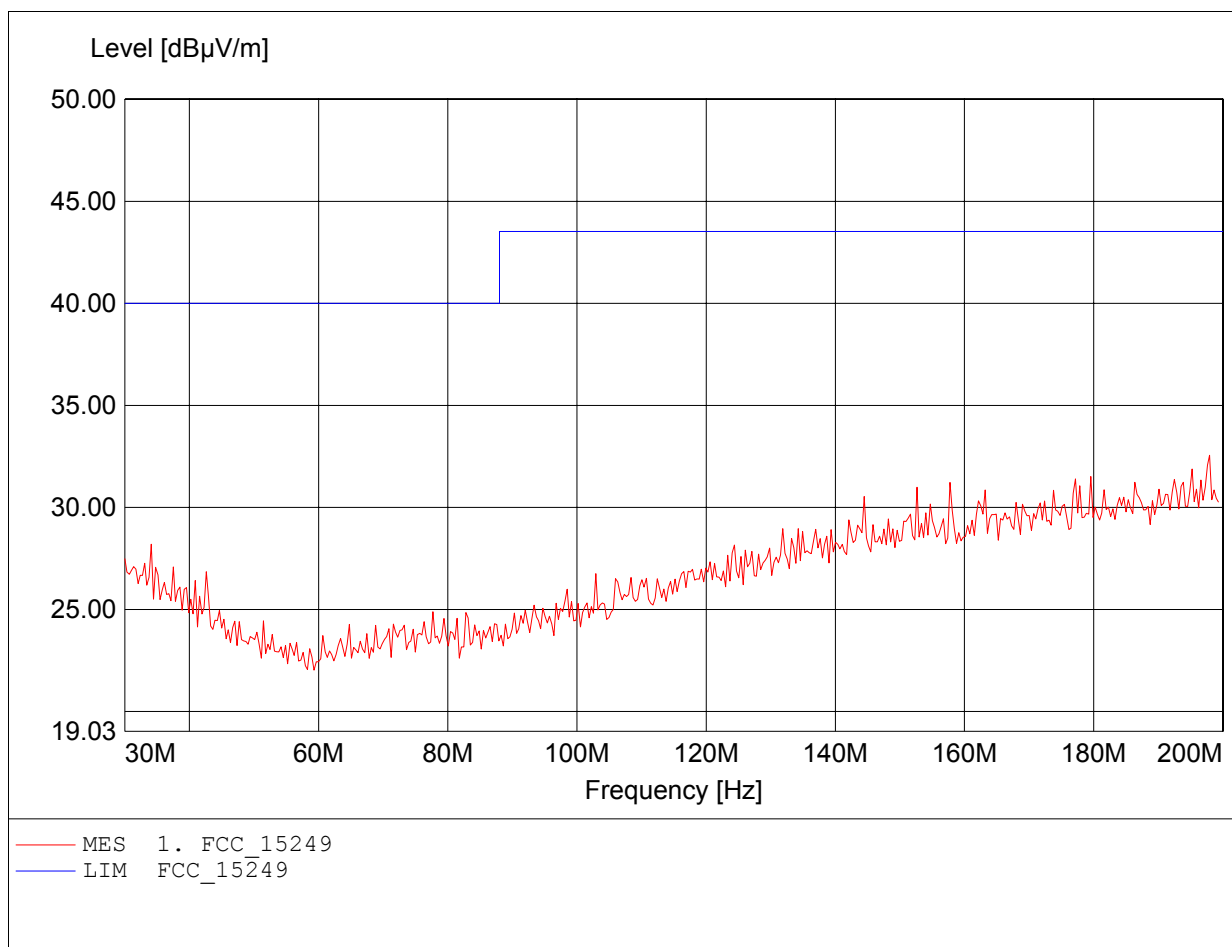


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 699.419MHz, Emax: 24.16dBµV/m, RBW: 100kHz

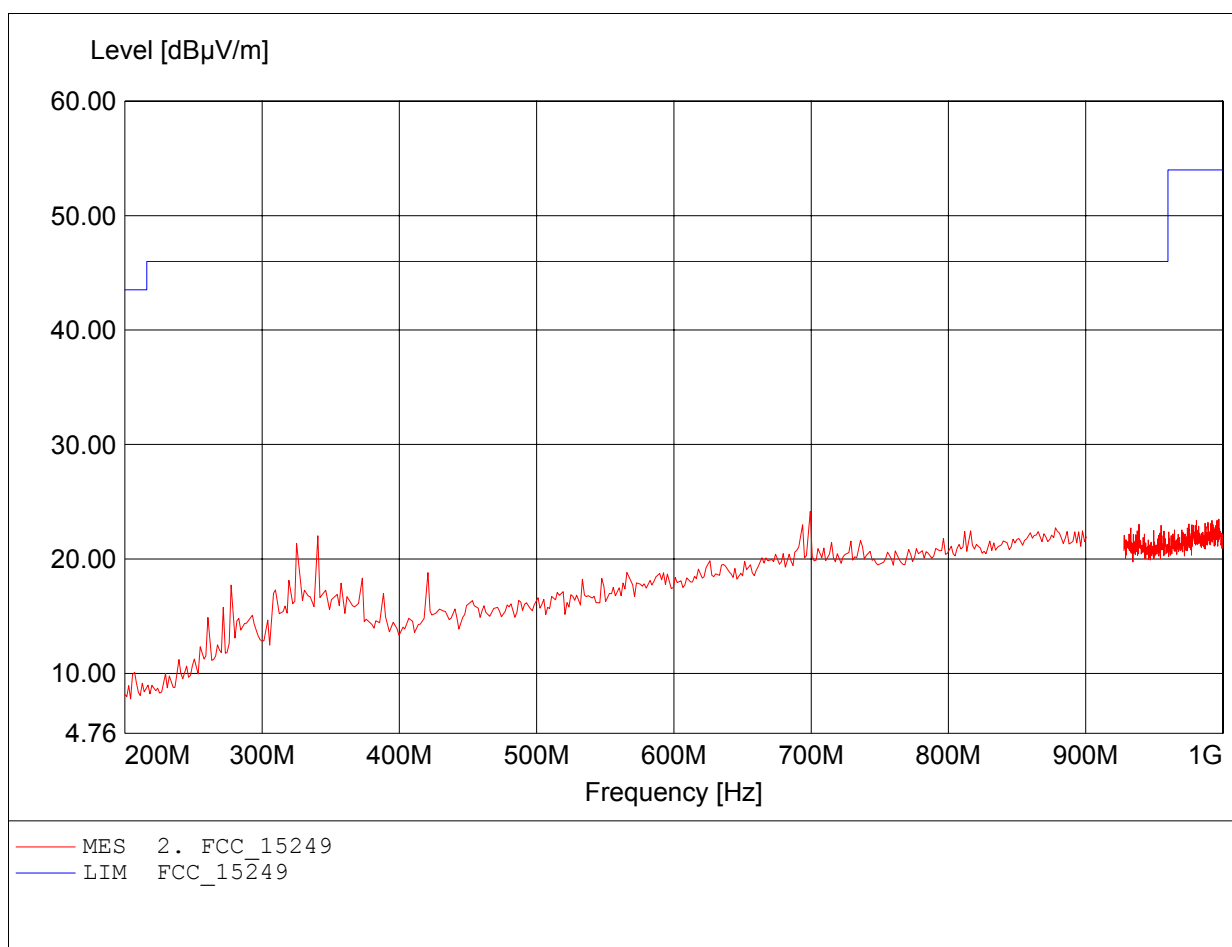


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 699.419MHz, Emax: 32.53dBµV/m, RBW: 100kHz

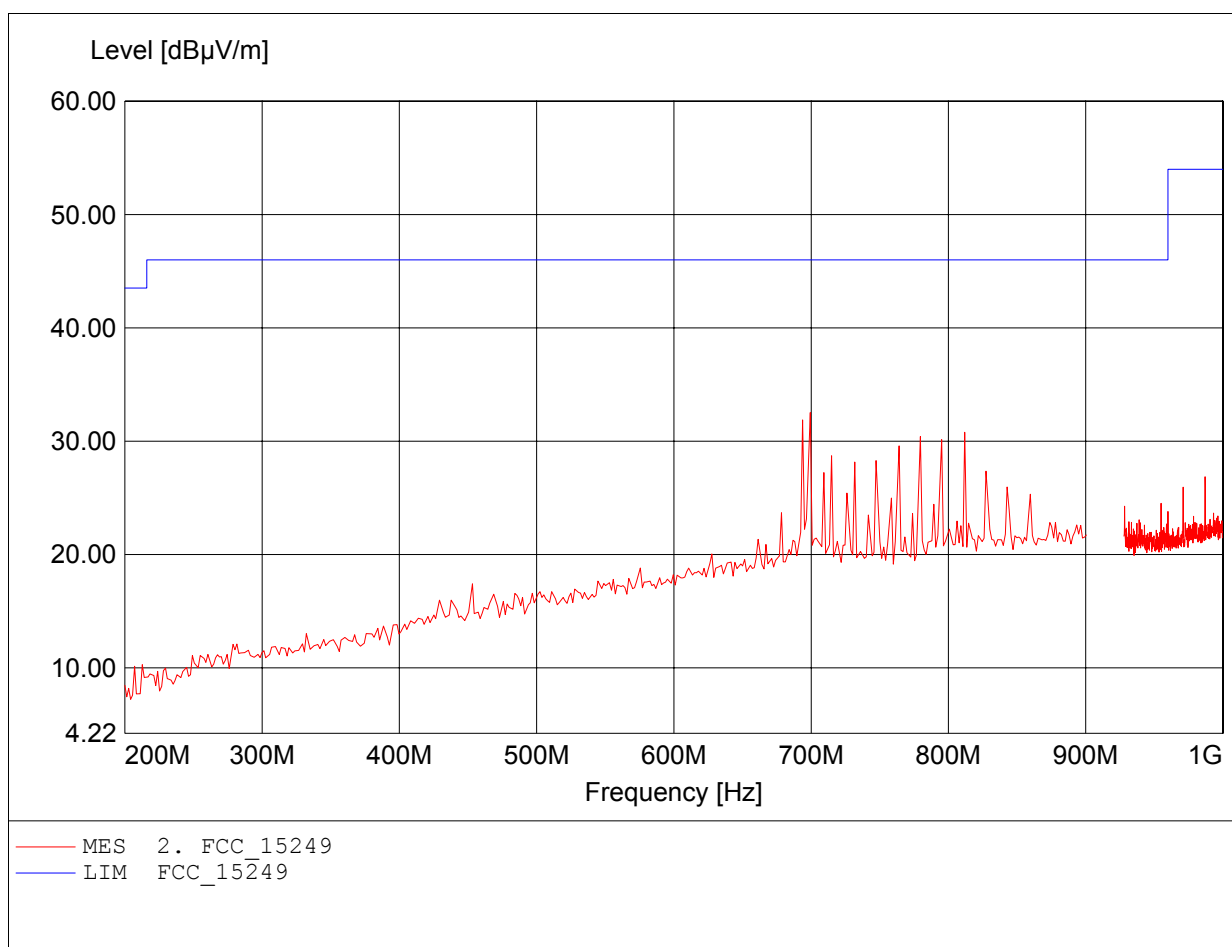


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 1.846GHz, Emax: 60.73dBµV/m, RBW: 1MHz

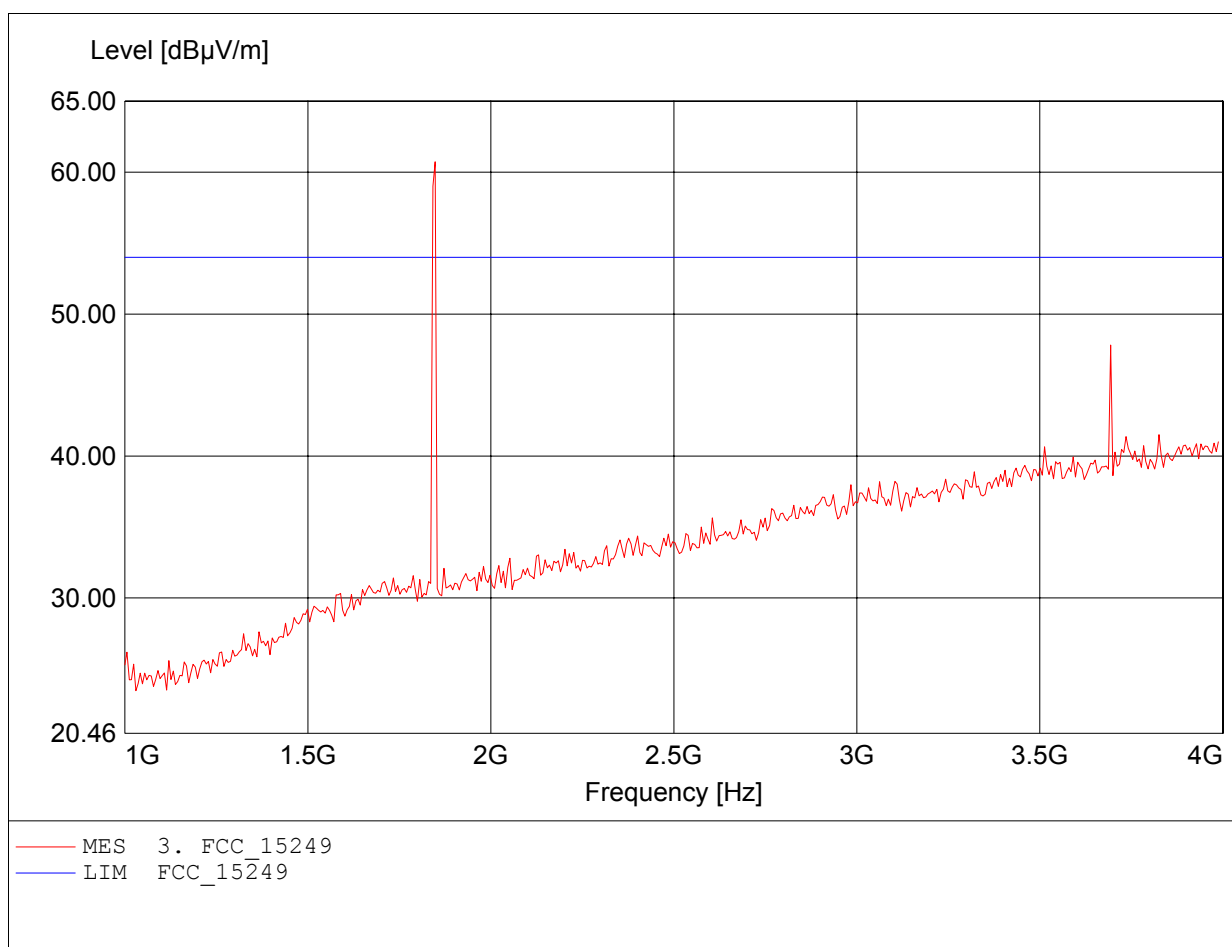


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.846GHz, Emax: 41.39dBµV/m, RBW: 1MHz

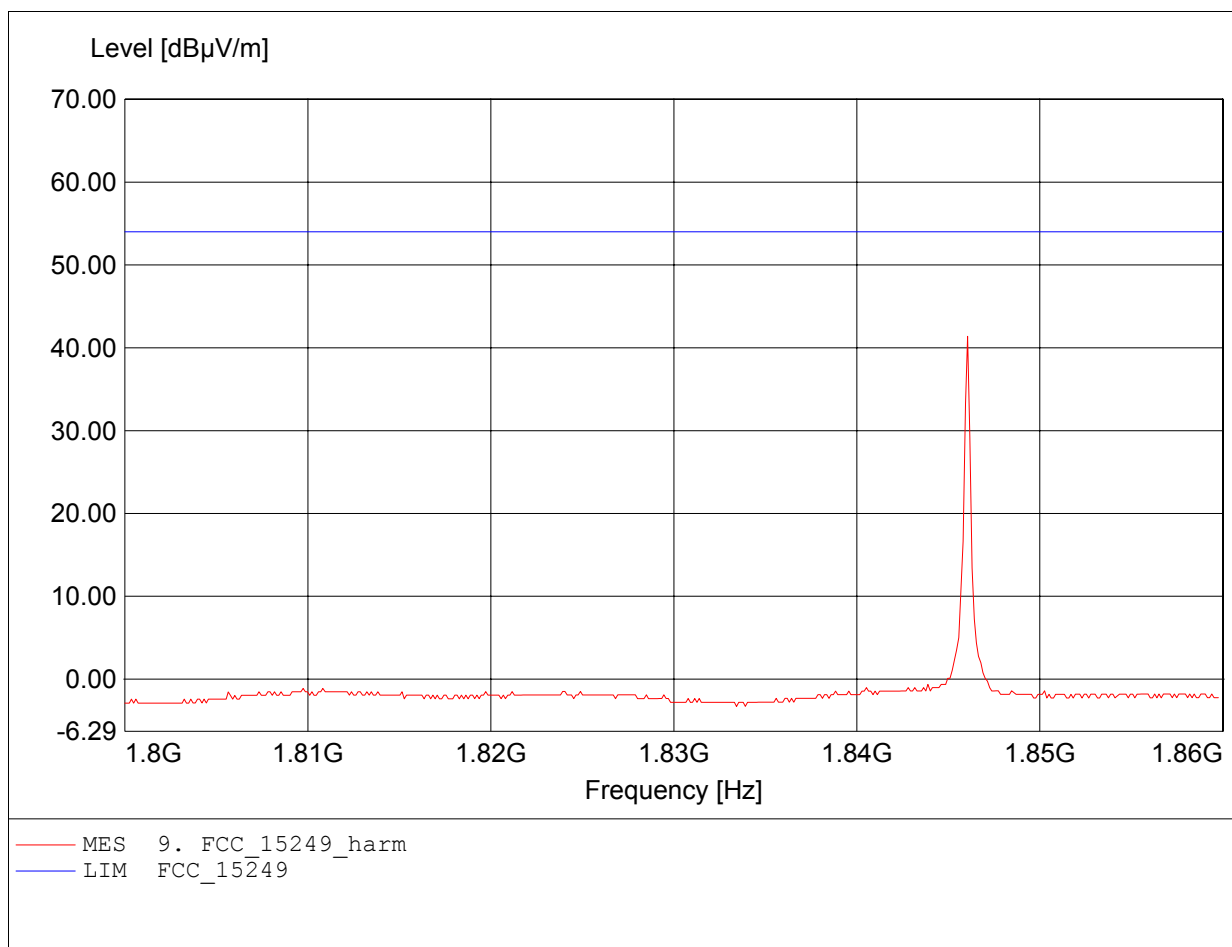


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 1.848GHz, Emax: 47.90dBµV/m, RBW: 1MHz

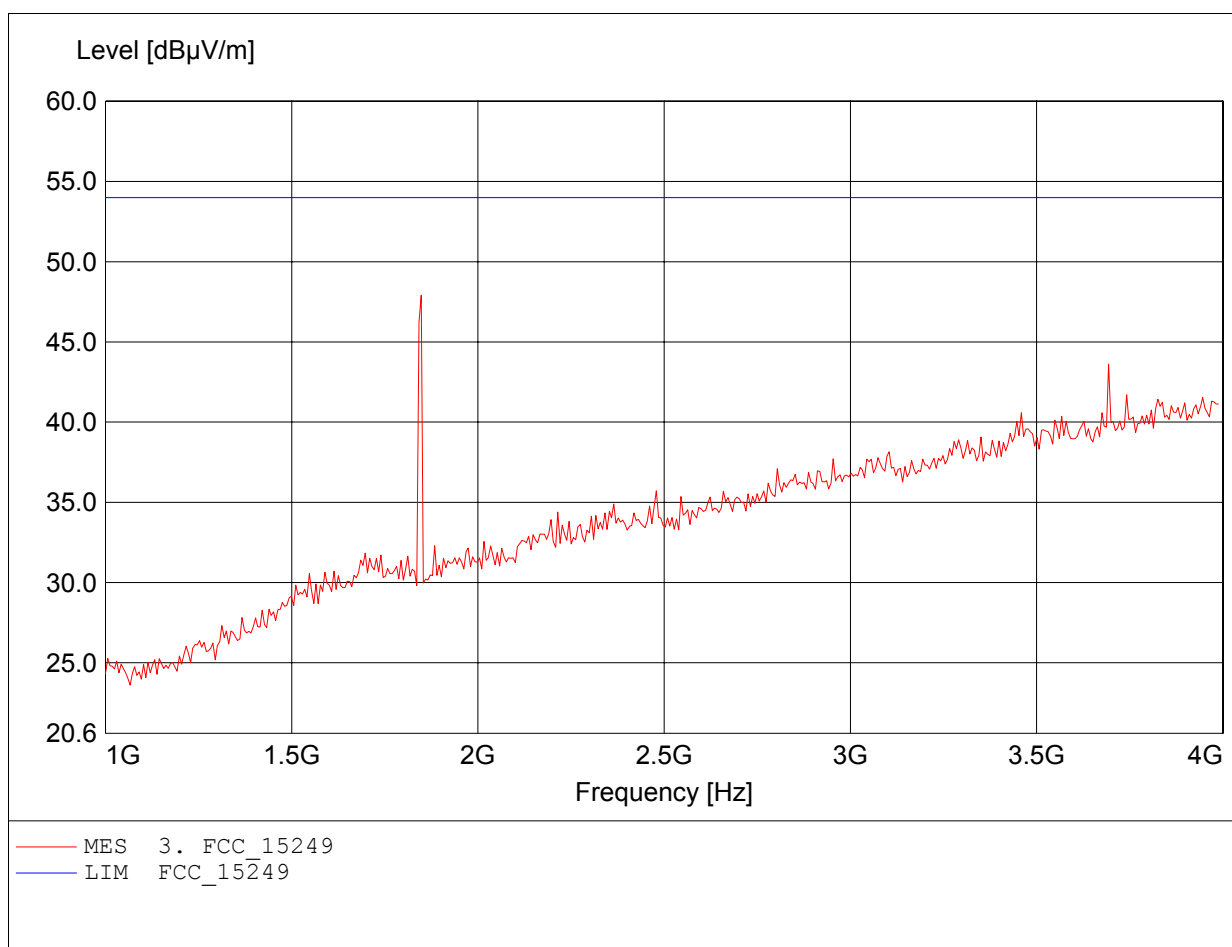


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.816GHz, Emax: 43.34dBµV/m, RBW: 1MHz

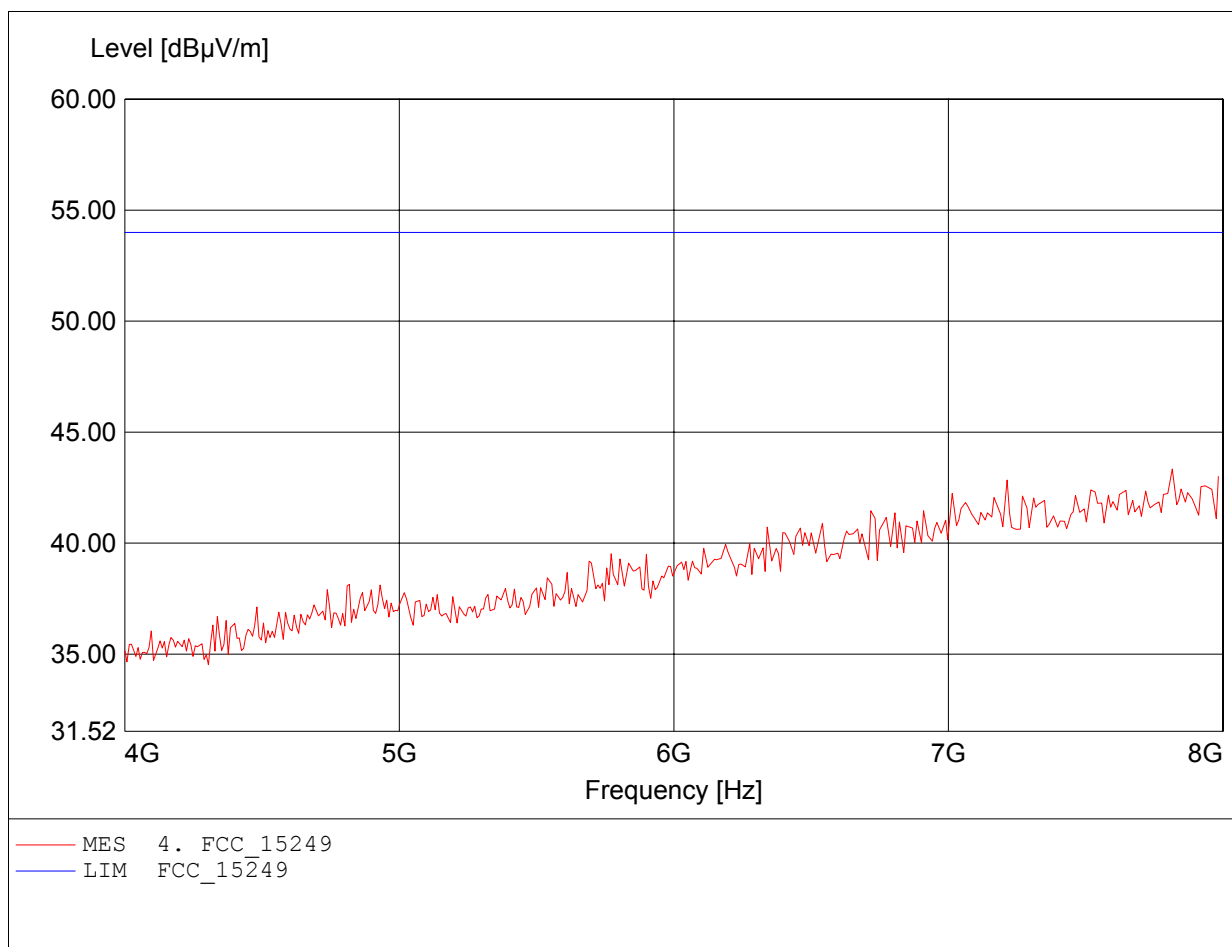


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.752GHz, Emax: 43.16dBµV/m, RBW: 1MHz

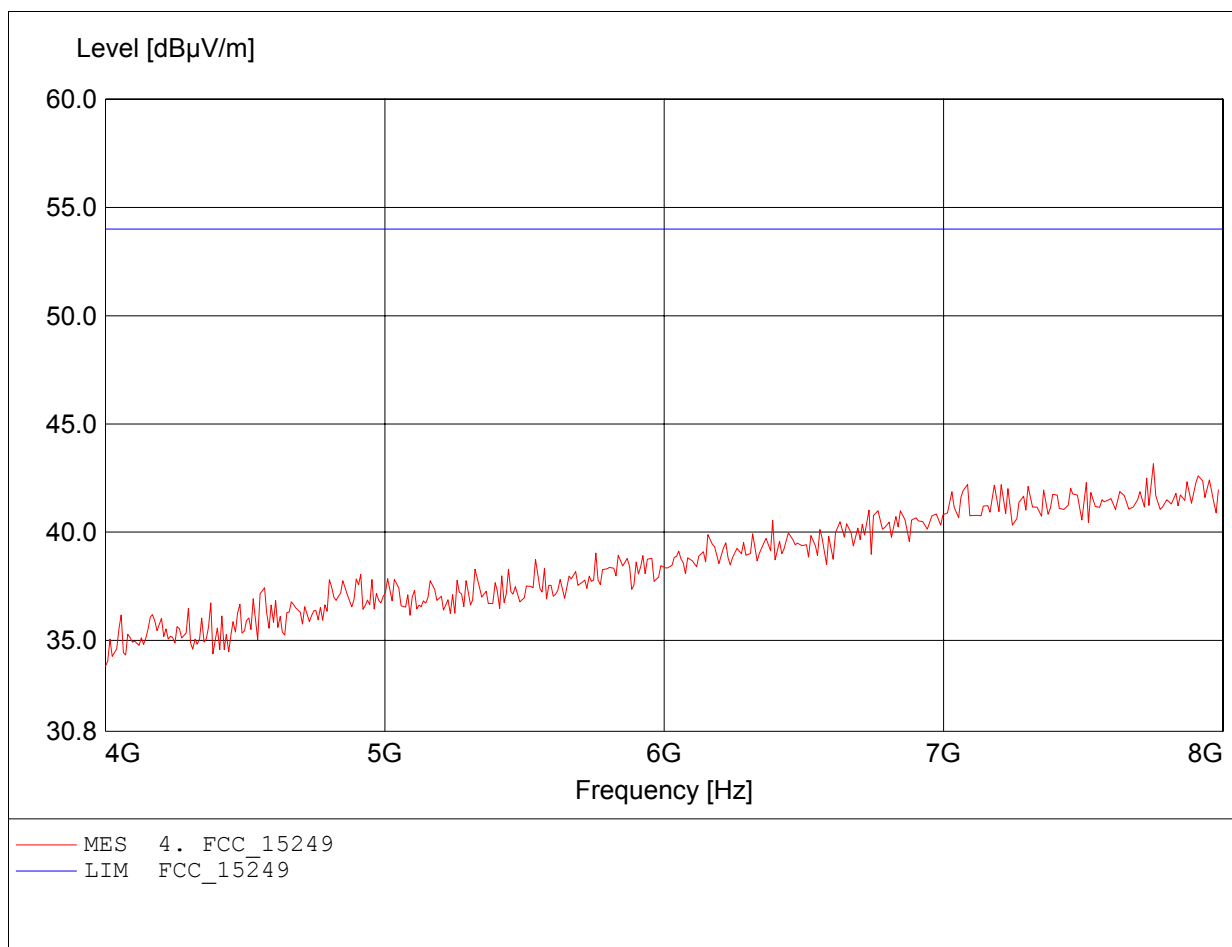


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.888GHz, Emax: 47.44dBµV/m, RBW: 1MHz

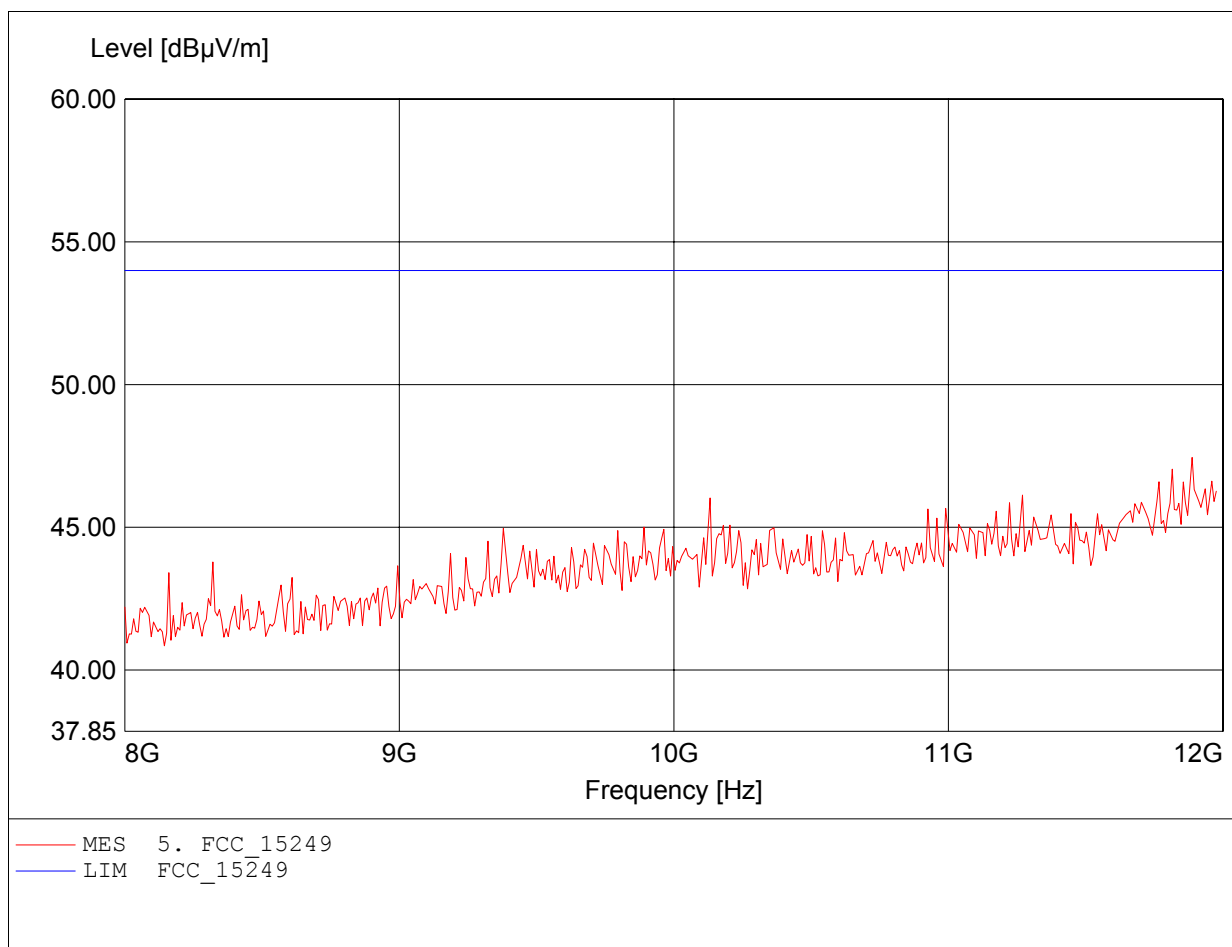

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Mod. FSK Channel: 923 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.880GHz, Emax: 46.99dBµV/m, RBW: 1MHz

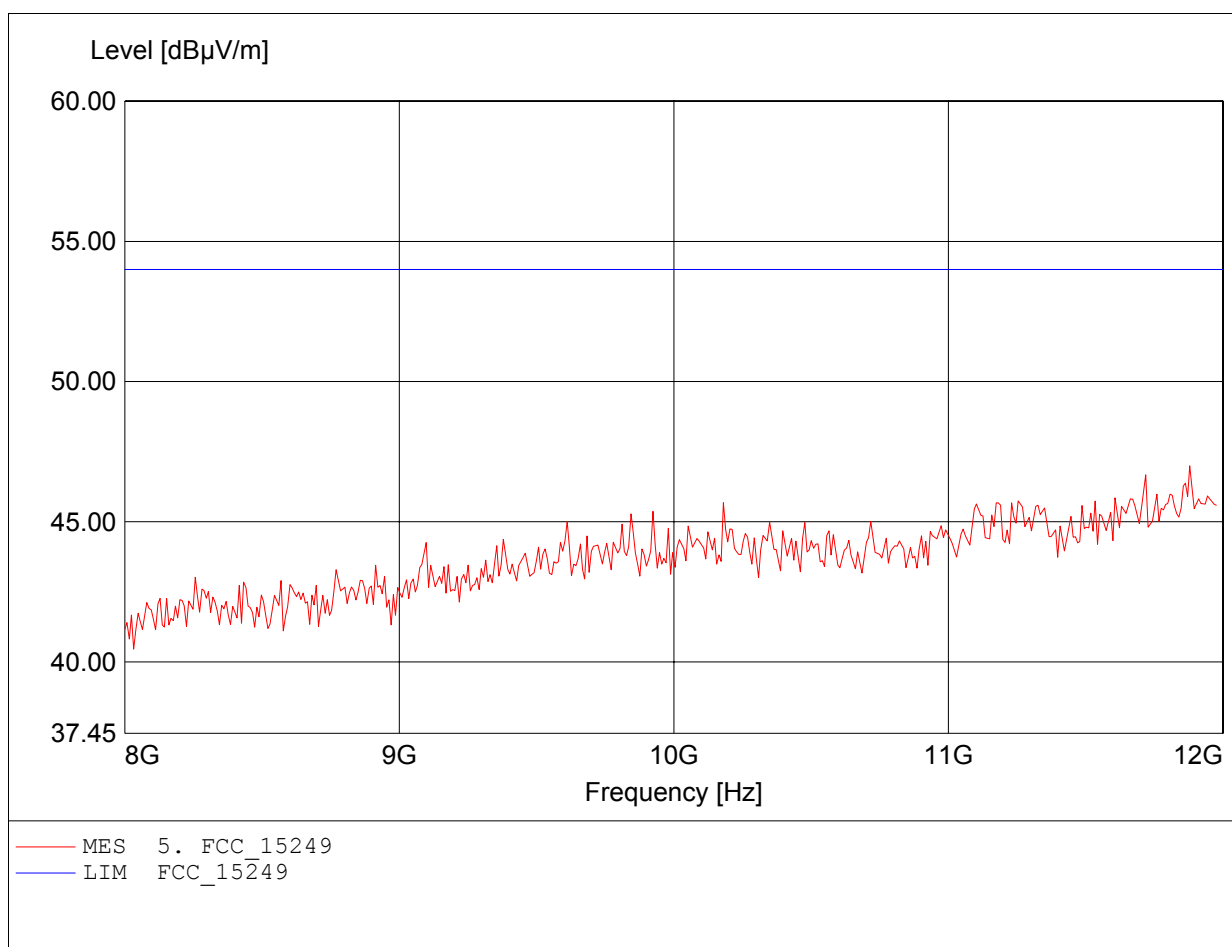


Annex D

Maximum 20 dB bandwidth / Occupied Bandwidth

**RSS Gen
Occupied Bandwidth**

EUT	Weather Direct
Model	WD3105U
Approval Holder	LaCrosse Technology Asia Limited
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins ETS Product Service GmbH / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 905 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	

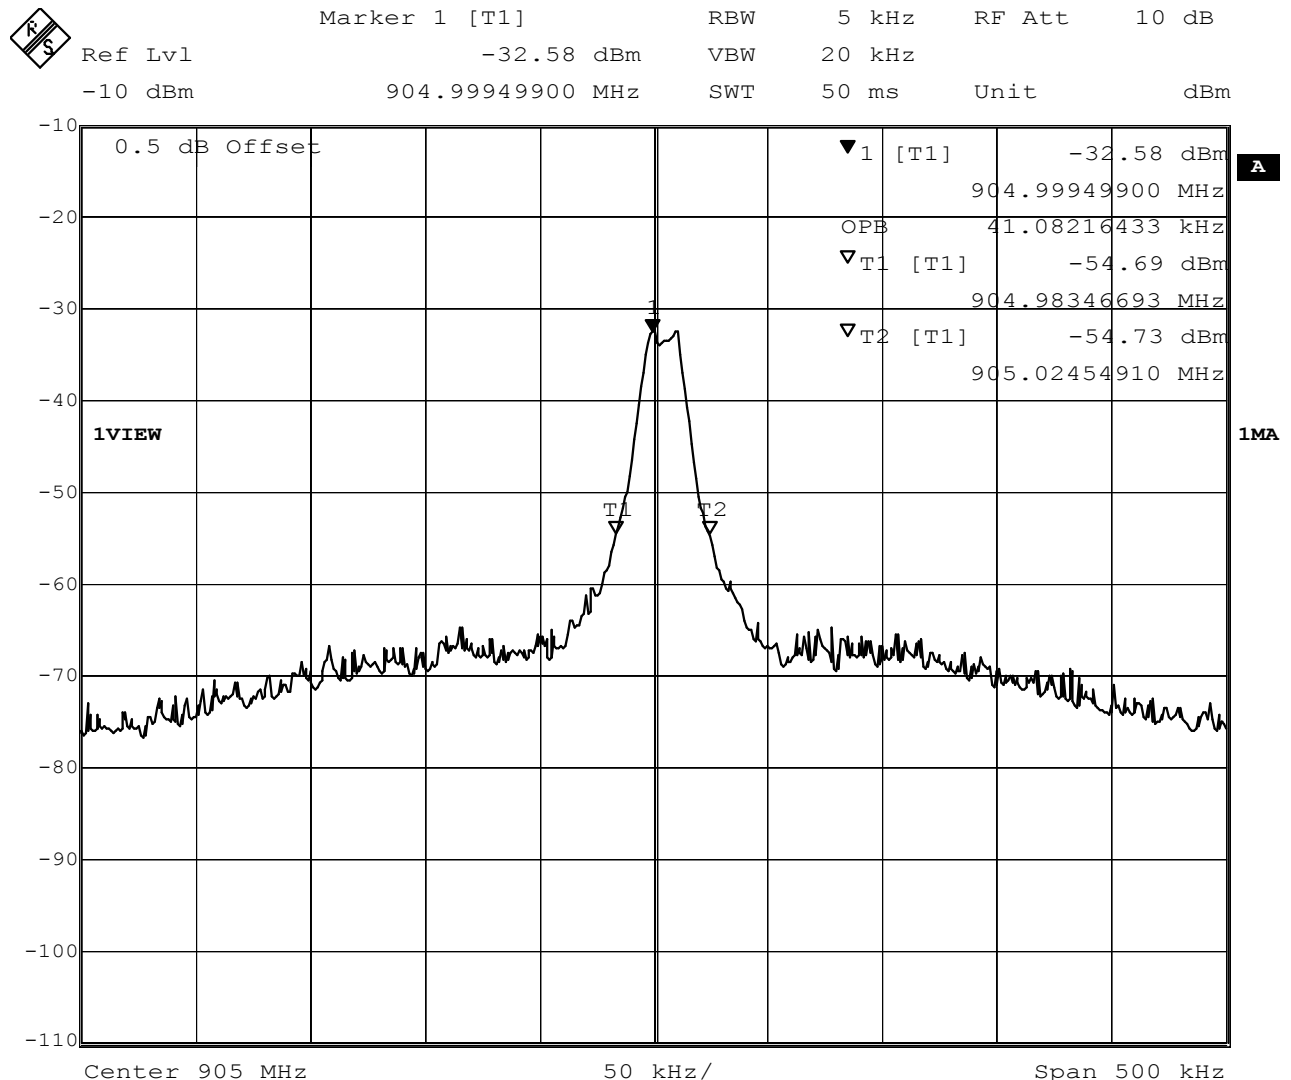


Comment A: Occupied bandwidth: 41.1 KHz
 Date: 16.MAY.2008 14:31:09

Measurement diagram

Eurofins ETS Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**RSS Gen
Occupied Bandwidth**

EUT	Weather Direct
Model	WD3105U
Approval Holder	LaCrosse Technology Asia Limited
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins ETS Product Service GmbH / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 913 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	

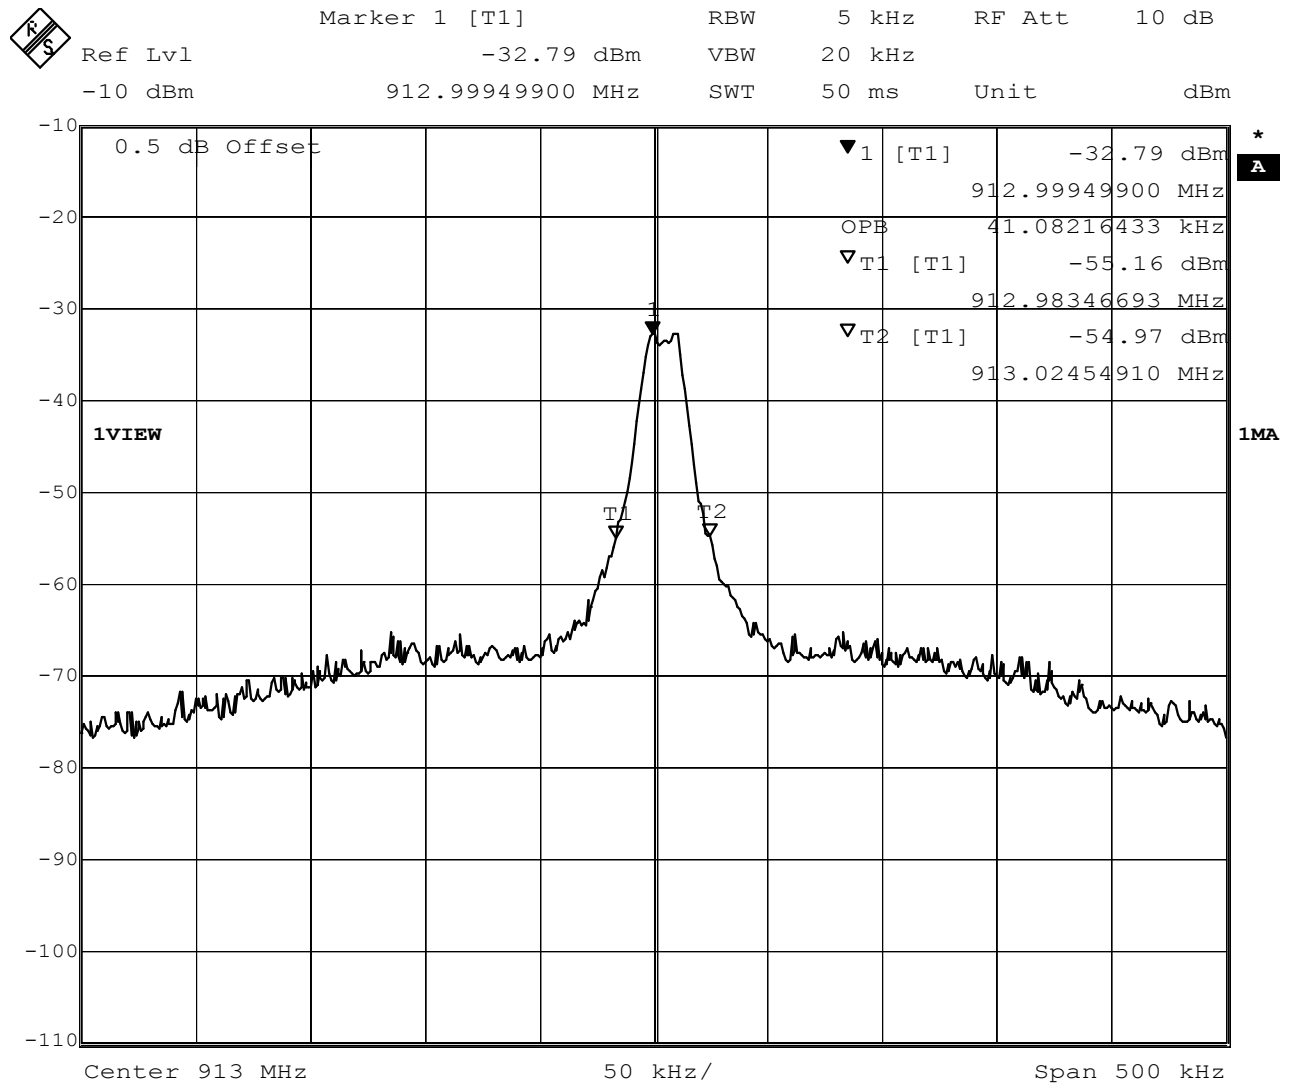


Comment A: Occupied bandwidth: 41.1 KHz
 Date: 16.MAY.2008 14:35:29

Measurement diagram

Eurofins ETS Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**RSS Gen
Occupied Bandwidth**

EUT	Weather Direct
Model	WD3105U
Approval Holder	LaCrosse Technology Asia Limited
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins ETS Product Service GmbH / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 923 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	

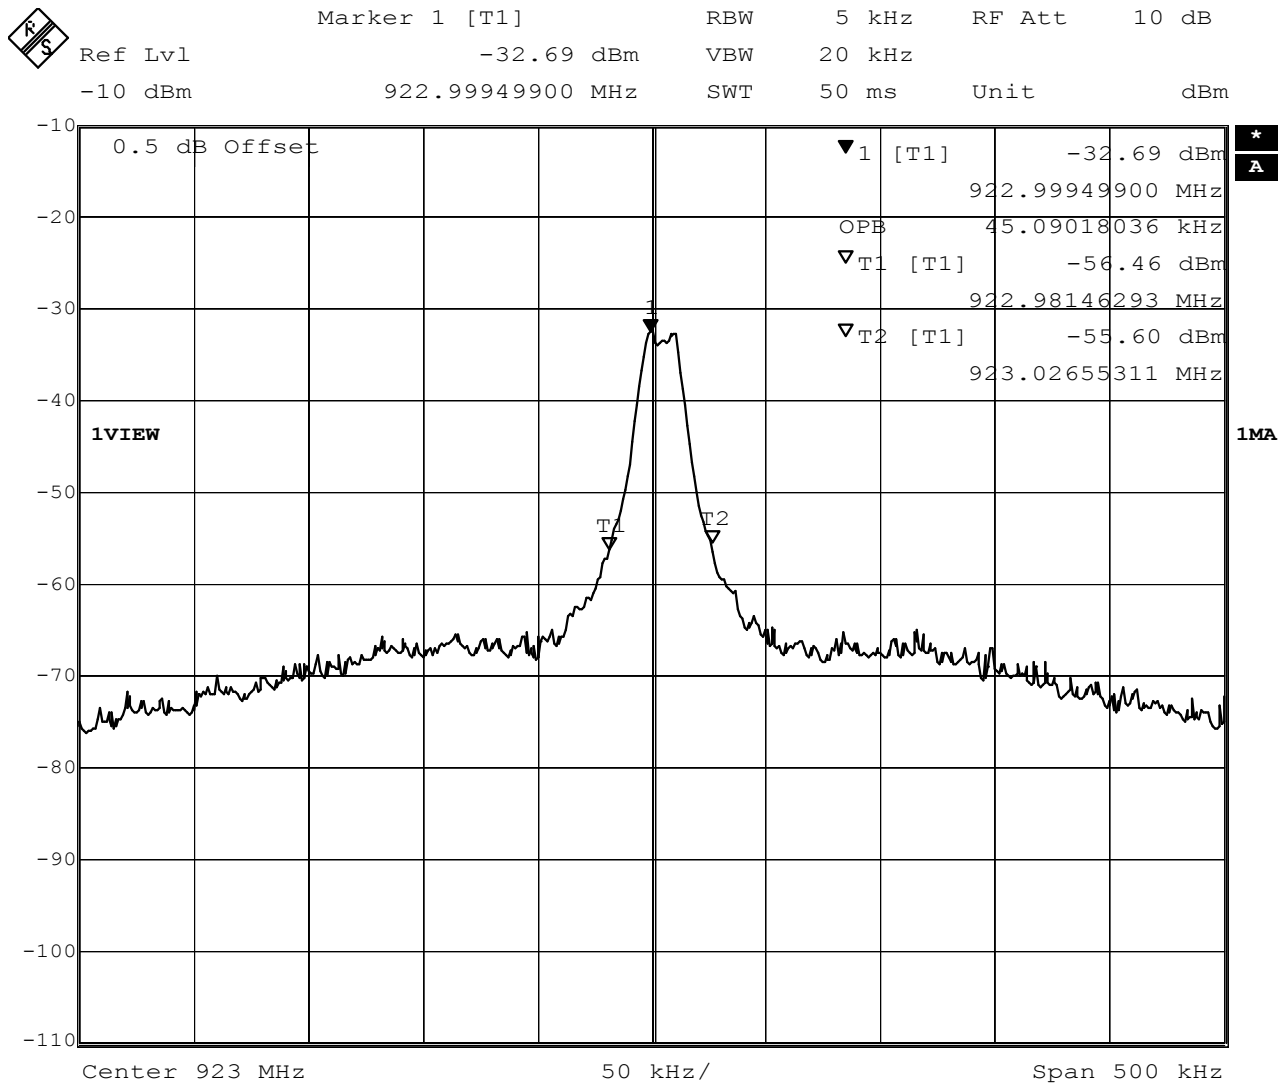

Comment A: Occupied bandwidth: 45.1 KHz
 Date: 16.MAY.2008 14:37:21


Measurement diagram

Annex E

Receiver radiated emissions


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:197.615MHz Emax:33.32dBµV/m RBW: 100 kHz

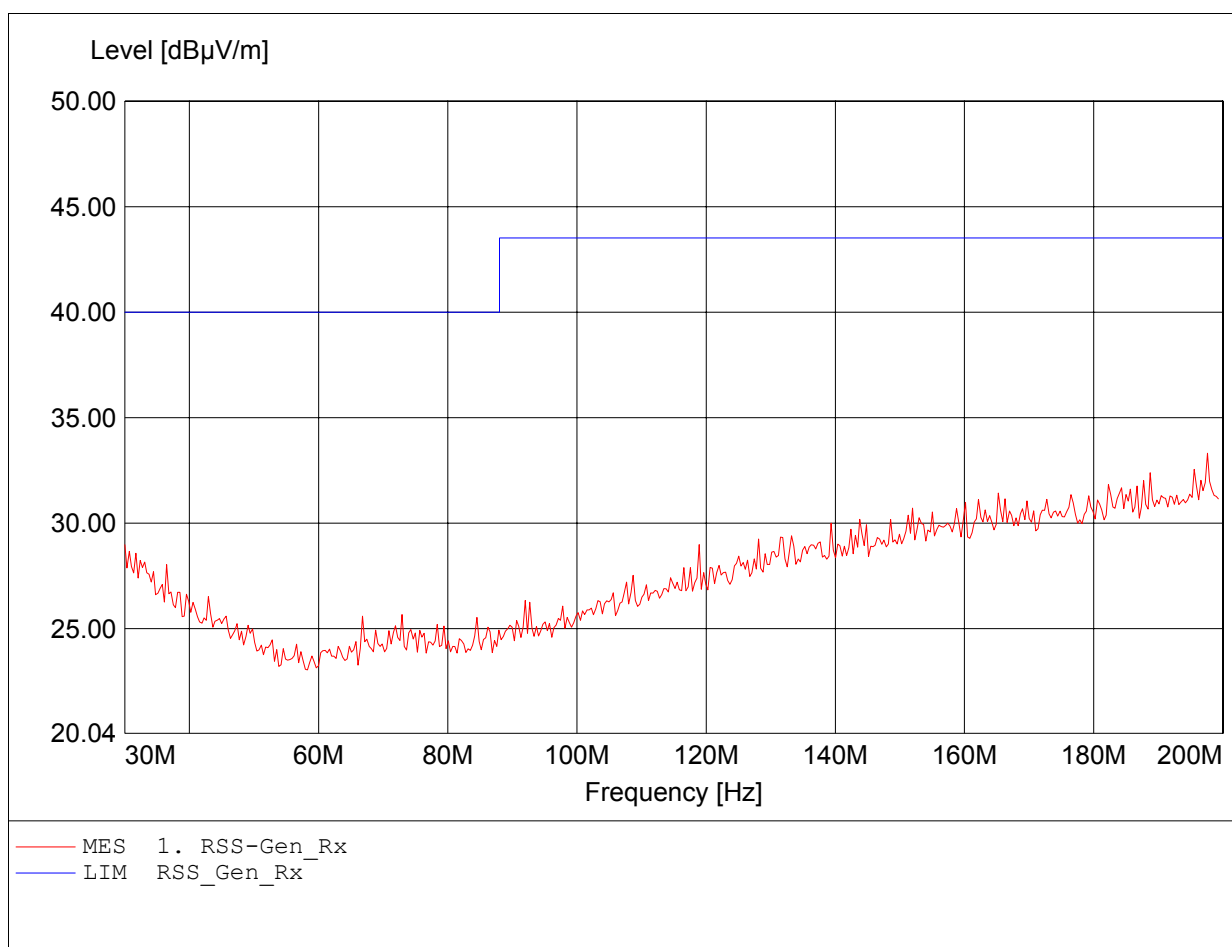


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:196.593MHz Emax:31.81dBµV/m RBW: 100 kHz

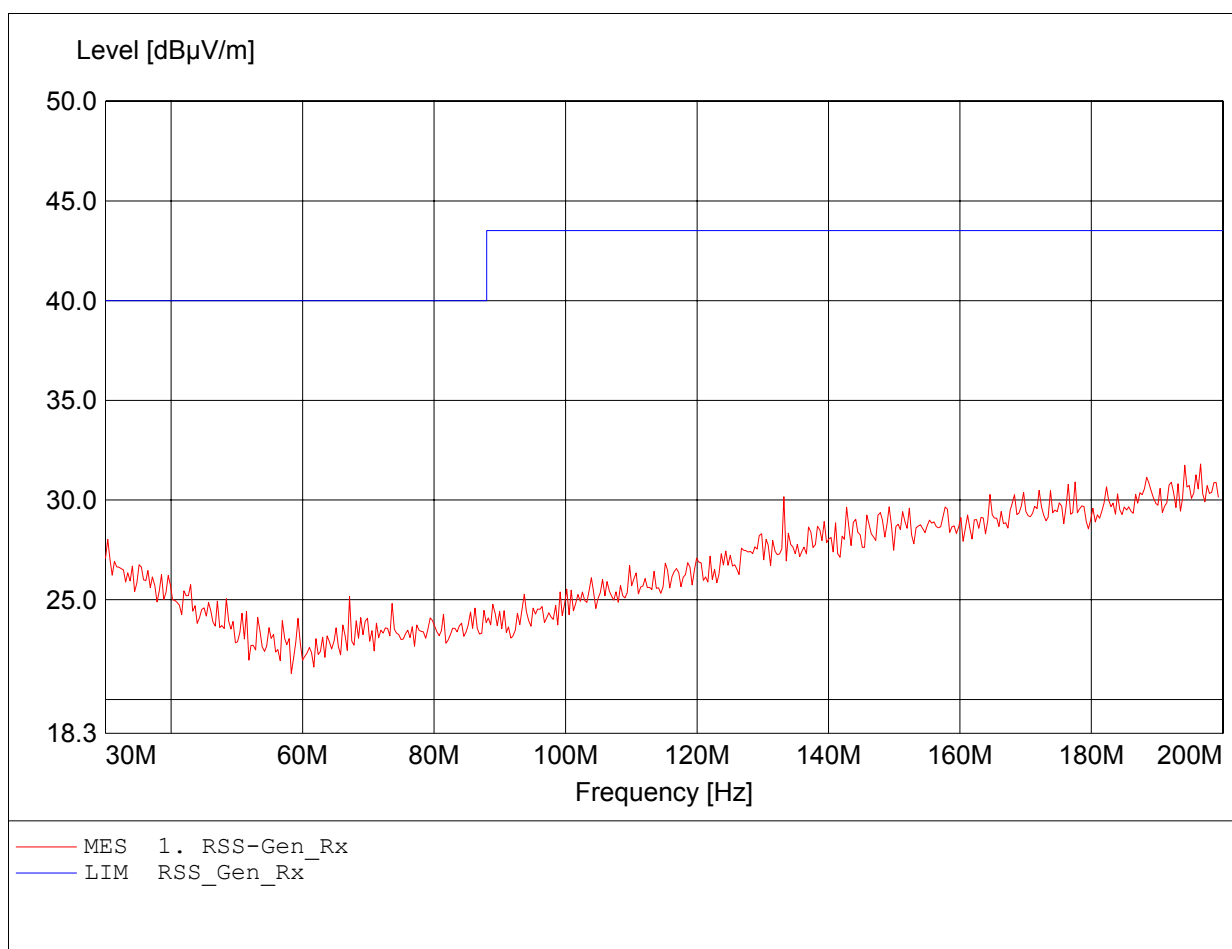


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:993.587MHz Emax:23.73dBµV/m RBW: 100 kHz

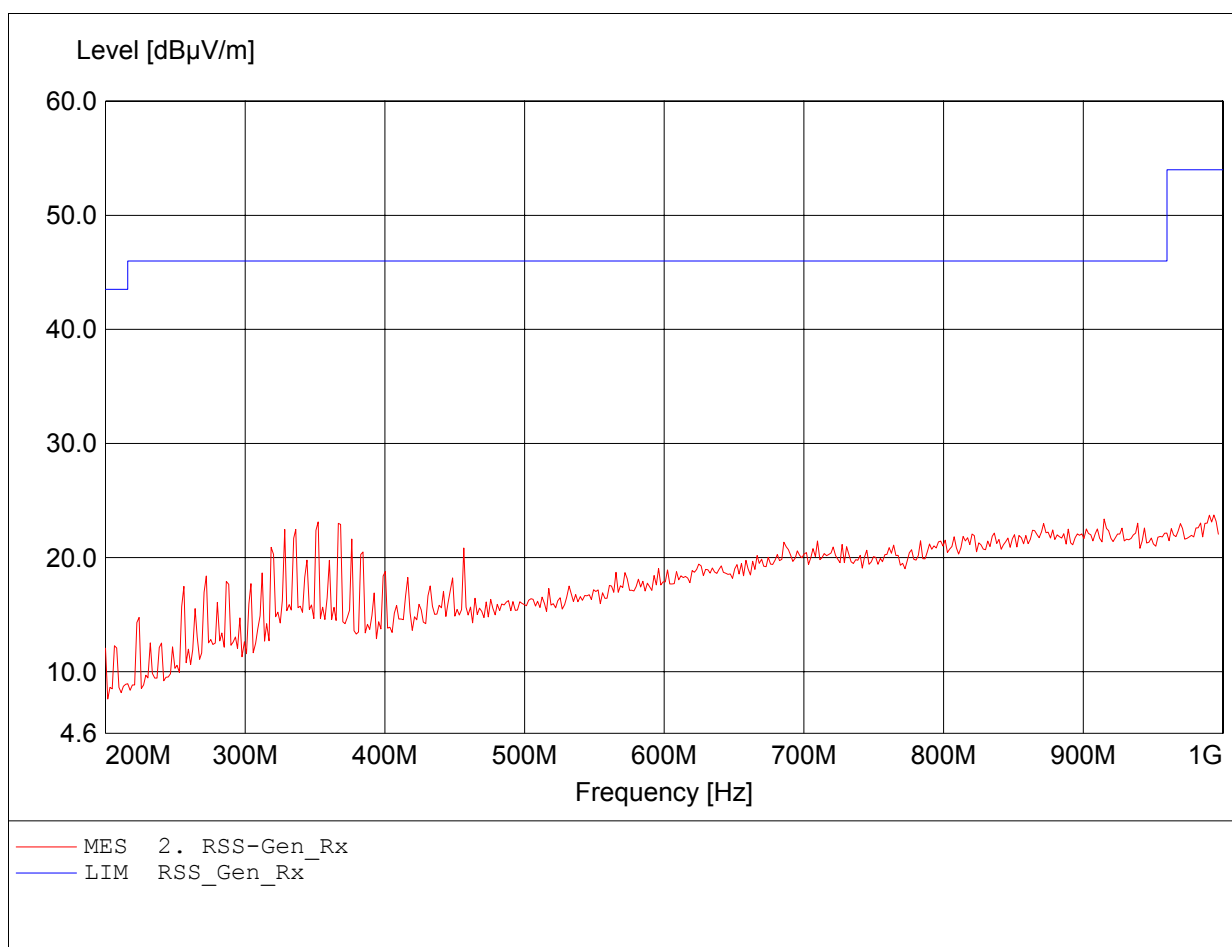


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:993.587MHz Emax:24.04dBµV/m RBW: 100 kHz

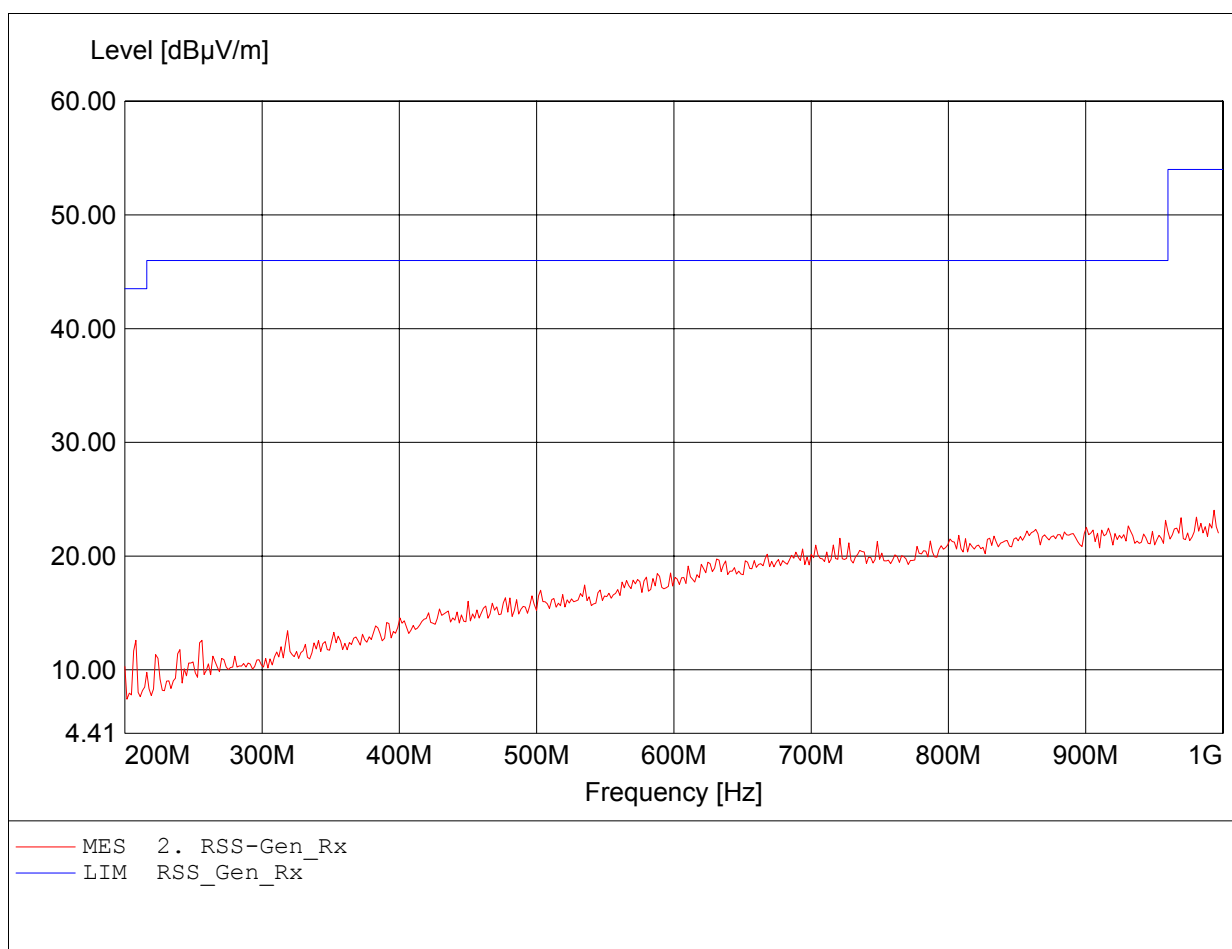

**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.868GHz Emax:41.85dBµV/m RBW: 1 MHz

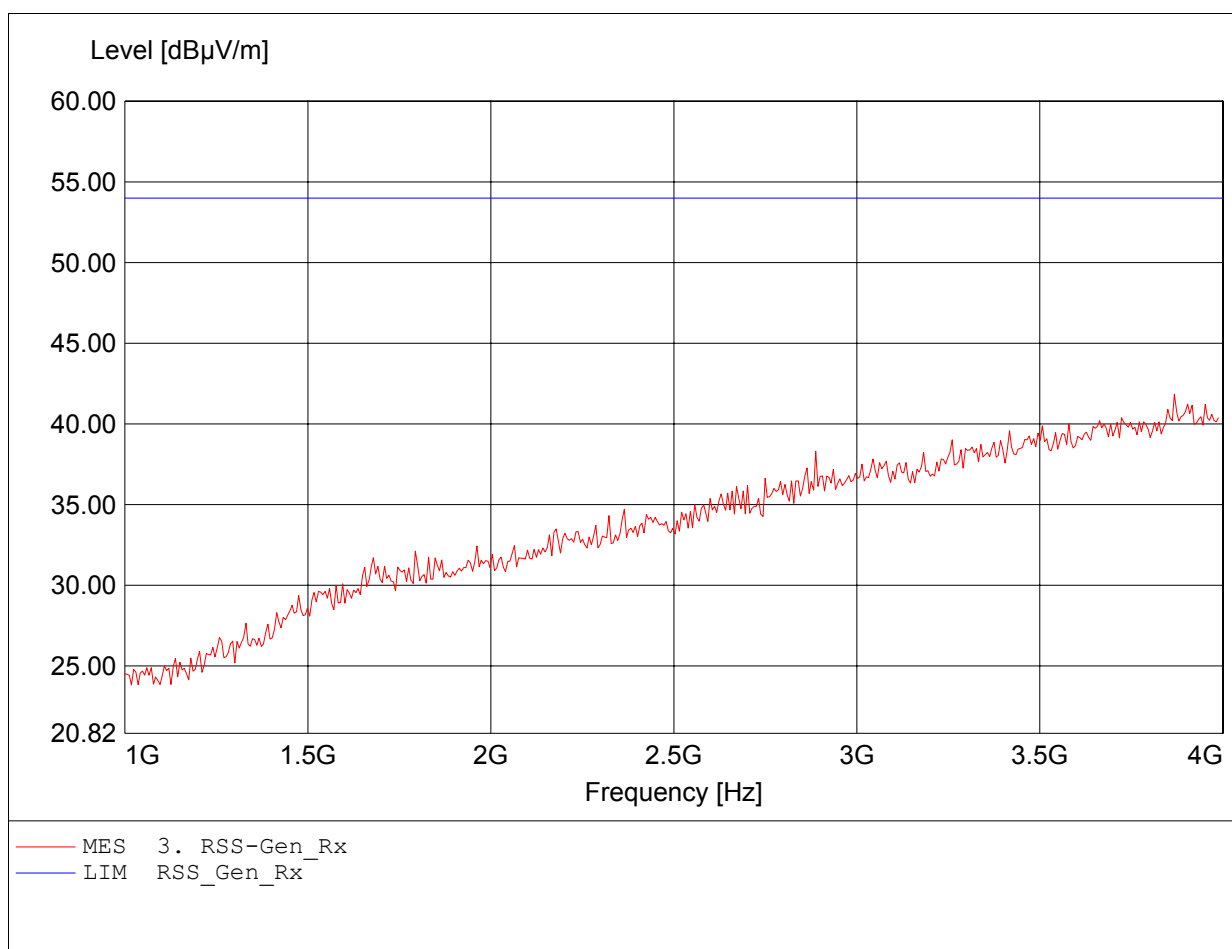

**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: LaCrosse Technology Asia Limited
EUT: Weather Direct
Model: WD3105U / Channel: 913 MHz
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Treffke
Test Conditions: 23°C / Unom.: 2x1.5 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.802GHz Emax:42.01dBµV/m RBW: 1 MHz

