

2. Date/Clock setting

Set the current date and time.

1. Select the date display format.
 - Press the **MEMU** button on the back of the computer.
 - Release the **MEMU** button when a text pattern is displayed on the screen. The date/clock setting screen appears.
 - Continue with date/clock setting.

Formating operation:



After a text pattern is formed, the screen turns light up.



2. Enter the "Year", "Month" and "Day".
 - Enter the "Year", "Month" and "Day" in the display order.
 - Press the **MEMU** button on the back of the computer to confirm with the **SSE** button. Enter the last 2 digits of the year.
 - Increase/decrease: **MEMU** (or) **Confirm**: **SSE**



3. Select the clock display format.
 - Press the **MEMU** button on the back of the computer to confirm with the **SSE** button.
 - Increase/decrease: **MEMU** (or) **Confirm**: **SSE**



4. Enter the "Hour" and "Minute".
 - Enter the "Hour" and "Minute" in the display order.
 - Press the **MEMU** button on the back of the computer to confirm with the **SSE** button, and then enter the "Minute" in the same way.
 - Increase/decrease: **MEMU** (or) **Confirm**: **SSE**



5. After you set the date/clock, press the **MEMU** button to proceed to the next set up item.



ENG-11


How to install the unit on your bicycle

1. Attach the bracket to the stem or handlebar



The Flex-Tight™ bracket can be attached to either the stem or the handlebar depending on how the bracket will stand on the bicycle.

Caution: Tighten the dial on the bracket band by hand only. Over-tightening can damage the screen brackets.

When attaching the Flex-Tight™ bracket to the stem

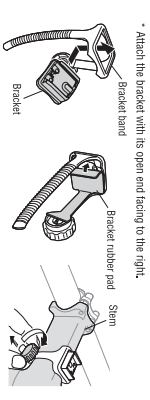


When attaching the Flex-Tight™ bracket to the handlebar

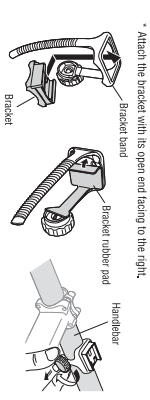

ENG-5

2. Mount the speed sensor and magnet

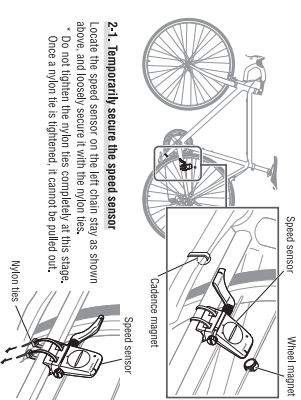

2-1. Temporarily secure the speed sensor

Locate the speed sensor on the left chain stay as shown above and loosely secure it with the nylon ties.

Do not tighten the nylon ties completely at this stage. Once a nylon tie is tightened, it cannot be pulled out.

2-2. Mount the magnet

1. Loosen the set screws both on the SPEED side and CADENCE side of the speed sensor and turn the sensor in the direction of the arrow on the left.
2. Turn the sensor so that it faces the sensor zone on the SPEED side.
3. Temporarily secure the cadence magnet inside the sensor zone on the CADENCE side.

When the speed sensor is not positioned against the crank with nylon ties, so that it faces the sensor zone on the CADENCE side.

After you move the speed sensor, adjust the position so that the two magnets face the relevant sensor zone.

After adjustment, tighten the nylon ties firmly to secure the speed sensor.

ENG-7

1. Formatting/Restarting operation

Formatting operation: (At initial purchase, or reset all to default.)

Caution: All data are lost to the default and deleted.

1. While pressing the **MEMU** button on the back of the computer, release the **MEMU** button when a text pattern is displayed on the screen. The date/clock setting screen appears.

Formating operation:



When all screen items light up without any text pattern displayed on the screen, the formatting operation has not been completed properly. Perform the formatting operation again.

Restarting operation: (When you replace batteries, or an error is displayed.)

1. Press the **AC** button on the back of the computer.

Continue with date/clock setting.



Most of the settings and file data saved are retained for the restarting operation (see start of page 9).

ENG-10

ENG-10

ENG-7


ENG-5

ENG-11

Basic operation of the computer

Functions on the measurement screen

The measurement screen displays 4 different types of data, which are switched by pressing the **MEMU** button. The display data are as follows.

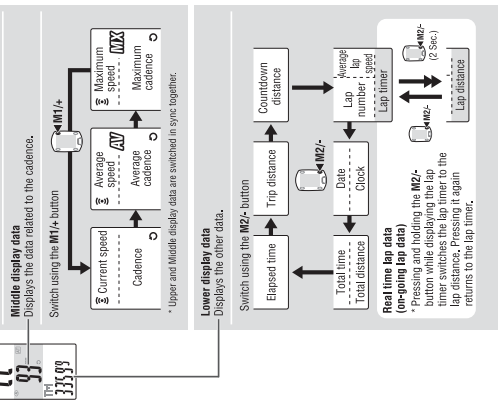

ENG-15

Contents

- 1 Introduction
- 2 About the product
- 3 Proper use of the CatEye V2z
- 4 Description of computer and its parts
- 5 Computer
- 6 Accessories
- 7 Wheel selection and tire circumference (WHEEL)
- 8 Screen display
- 9 How to install the unit on your bicycle
- 10 How to attach the bracket to the stem or handlebar
- 11 How to mount the speed sensor and magnet
- 12 How to attach the sensor to the wheel
- 13 How to use the measurement unit
- 14 How to use the auto-mode
- 15 How to use the odometer (ODO INPUT)
- 16 How to use the speed sensor (SPEED)
- 17 How to use the cadence sensor (CADENCE)
- 18 How to use the real time lap data (LAP)
- 19 How to use the target cadence zone (CDC.ZONE)
- 20 How to use the target zone (TZ)
- 21 How to use the trouble shooting
- 22 How to use the basic operation of the computer
- 23 How to use the functions on the measurement screen
- 24 How to use the speed sensor
- 25 How to use the cadence sensor
- 26 How to use the real time lap data
- 27 How to use the target cadence zone
- 28 How to use the target zone
- 29 How to use the trouble shooting
- 30 How to use the basic operation of the computer
- 31 How to use the functions on the measurement screen
- 32 How to use the speed sensor
- 33 How to use the cadence sensor
- 34 How to use the real time lap data
- 35 How to use the target cadence zone
- 36 How to use the target zone
- 37 How to use the trouble shooting
- 38 How to use the basic operation of the computer
- 39 How to use the functions on the measurement screen
- 40 How to use the speed sensor
- 41 How to use the cadence sensor
- 42 How to use the real time lap data
- 43 How to use the target cadence zone
- 44 How to use the target zone
- 45 How to use the trouble shooting
- 46 How to use the basic operation of the computer
- 47 How to use the functions on the measurement screen
- 48 How to use the speed sensor
- 49 How to use the cadence sensor
- 50 How to use the real time lap data
- 51 How to use the target cadence zone
- 52 How to use the target zone
- 53 How to use the trouble shooting
- 54 How to use the basic operation of the computer
- 55 How to use the functions on the measurement screen
- 56 How to use the speed sensor
- 57 How to use the cadence sensor
- 58 How to use the real time lap data
- 59 How to use the target cadence zone
- 60 How to use the target zone
- 61 How to use the trouble shooting
- 62 How to use the basic operation of the computer
- 63 How to use the functions on the measurement screen
- 64 How to use the speed sensor
- 65 How to use the cadence sensor
- 66 How to use the real time lap data
- 67 How to use the target cadence zone
- 68 How to use the target zone
- 69 How to use the trouble shooting
- 70 How to use the basic operation of the computer
- 71 How to use the functions on the measurement screen
- 72 How to use the speed sensor
- 73 How to use the cadence sensor
- 74 How to use the real time lap data
- 75 How to use the target cadence zone
- 76 How to use the target zone
- 77 How to use the trouble shooting
- 78 How to use the basic operation of the computer
- 79 How to use the functions on the measurement screen
- 80 How to use the speed sensor
- 81 How to use the cadence sensor
- 82 How to use the real time lap data
- 83 How to use the target cadence zone
- 84 How to use the target zone
- 85 How to use the trouble shooting
- 86 How to use the basic operation of the computer
- 87 How to use the functions on the measurement screen
- 88 How to use the speed sensor
- 89 How to use the cadence sensor
- 90 How to use the real time lap data
- 91 How to use the target cadence zone
- 92 How to use the target zone
- 93 How to use the trouble shooting
- 94 How to use the basic operation of the computer
- 95 How to use the functions on the measurement screen
- 96 How to use the speed sensor
- 97 How to use the cadence sensor
- 98 How to use the real time lap data
- 99 How to use the target cadence zone
- 100 How to use the target zone

ENG-2

Proper use of the CatEye V2z

Observe the following instructions for safe usage.

The meaning of icons in this manual:

- Warning: Sections marked with these icons are critical for safe use of the device. Be sure to follow these instructions.
- Caution: Important cautionary notes on the use and operation of the V2z.

Warning!!!

- Do not concentrate on the data while riding. Always be sure to ride safely.
- Do not leave any battery within the reach of children, and dispose of them correctly. If a battery is swallowed, consult a doctor immediately.

Caution:

- Regularly check the positions of the magnets and the speed/cadence sensors and make sure that they are securely mounted. Tighten it firmly if there is any looseness.
- Avoid leaving the main unit / wireless sensor in direct sunlight for extended periods of time.
- Do not disassemble the computer, or speed sensor.
- Do not submerge the computer, or speed sensor, in water.
- Do not use the main unit in rain, snow, or in other adverse weather conditions.
- Do not use the main unit in areas with high electromagnetic interference, such as near TV, PC, radios, mobile phones, or in cars and trains.
- Do not use the main unit in areas with high radio frequency interference, such as near mobile phones, or in areas with high radio frequency interference.
- Do not use the main unit in areas with high radio frequency interference, such as near mobile phones, or in areas with high radio frequency interference.
- Do not use the main unit in areas with high radio frequency interference, such as near mobile phones, or in areas with high radio frequency interference.
- Do not use the main unit in areas with high radio frequency interference, such as near mobile phones, or in areas with high radio frequency interference.

2.4GHz digital wireless system

2.4GHz-frequency digital communication technology, which is used for wireless LAN, is widely used in many areas. However, the digital wireless system is not compatible with other digital wireless communication systems. Therefore, the digital wireless system may be affected by other digital wireless communication systems. To avoid this, please do not use the digital wireless system in the following situations:

- Near other wireless computers or digitally controlled lights.
- Near other wireless computers or digitally controlled lights.
- Near other wireless computers or digitally controlled lights.

ENG-3

ENG-3

ENG-15

ENG-10

ENG-7

ENG-5

ENG-11

