



198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology  
Development District, Guangzhou, China 510663  
Tel: +86 20 82155555 Fax: +86 20 82075059  
Email: [sgs\\_internet\\_operations@sgs.com](mailto:sgs_internet_operations@sgs.com)  
**FEDERAL COMMUNICATIONS COMMISSION**  
Registration number: 282399


Report No.: GZEM110700254101  
Page: 1 of 50  
FCC ID: ONFC1104B

## TEST REPORT

Application No.:	GZEM11070025411RF
Applicant:	TELE RADIO AB
FCC ID:	ONFC1104B
Product Name:	Radio module
Product Description:	Remote radio control unit on the machine
Model No.:	D00005-05
Standards:	FCC PART 15 Subpart C: 2010 section 15.247
Date of Receipt:	2011-07-14
Date of Test:	2011-07-28 to 2011-08-26
Date of Issue:	2011-09-06
Test Result :	<b>Pass*</b>

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 3 of this report for further detail.

Authorized Signature:



**Strong Yao**  
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2011-09-06		Original

Authorized for issue by:			
Tested By			2011-07-28 to 2011-08-26
	(Ryan Yang) /Signature		Date
Prepared By			2011-09-01
	(Ryan Yang) /Signature		Date
Checked By			2011-09-06
	(Strong Yao) /Reviewer		Date



### 3 Test Summary

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(1)(i)	ANSI C63.10: Clause 6.9.1	PASS
Carrier Frequencies Separated	FCC PART 15 C section 15.247(a)(1)	DA 00-705	PASS
Hopping Channel Number	FCC PART 15 C section 15.247(a)(1)(i)	DA 00-705	PASS
Dwell Time	FCC PART 15 C section 15.247(a)(1)(i)	DA 00-705	PASS
Pseudorandom Frequency Hopping Sequence	FCC PART 15 C section 15.247(a)(1)	DA 00-705	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(2)	ANSI C63.10: Clause 6.10.1	PASS
Conducted Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 6.7	PASS
Radiated Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10: Clause 6.9.1	PASS

**Remark:**

N/A: not applicable. Refer to the relative section for the details.

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

DA 00-705: "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems"



## 4 Contents

<b>1</b>	<b>COVER PAGE</b>	<b>1</b>
<b>2</b>	<b>VERSION</b>	<b>2</b>
<b>3</b>	<b>TEST SUMMARY</b>	<b>3</b>
<b>4</b>	<b>CONTENTS</b>	<b>4</b>
<b>5</b>	<b>GENERAL INFORMATION</b>	<b>5</b>
5.1	Client Information	5
5.2	General Description of E.U.T.	5
5.3	Details of E.U.T.	5
5.4	Description of Support Units	6
5.5	Deviation from Standards	6
5.6	Abnormalities from Standard Conditions	6
5.7	Other Information Requested by the Customer	6
5.8	Test Location	6
5.9	Test Facility	7
<b>6</b>	<b>EQUIPMENT USED DURING TEST</b>	<b>8</b>
<b>7</b>	<b>TEST RESULTS</b>	<b>9</b>
7.1	E.U.T. test conditions	9
7.2	Antenna Requirement	11
7.3	Occupied Bandwidth	12
7.4	Carrier Frequencies Separated	15
7.5	Hopping Channel Number	18
7.6	Dwell Time	20
7.7	Pseudorandom Frequency Hopping Sequence	25
7.8	Maximum Peak Output Power	27
7.9	Conducted Spurious Emissions	31
7.10	Radiated Spurious Emissions	37
7.11	Band Edges Requirement	49



## 5 General Information

### 5.1 Client Information

Applicant: TELE RADIO AB  
Address of Applicant: Datavägen 21, SE-436 32 Askim, Sweden

### 5.2 General Description of E.U.T.

Product Name: Radio module  
Product Description: Remote radio control unit on the machine  
Model No.: D00005-05

### 5.3 Details of E.U.T.

Operating Frequency 903.0125 MHz to 926.9875 MHz  
Type of Modulation: GFSK  
Number of Channels 64 Channels  
Channel Separation: 375 kHz  
Frequency band 903.0125-926.9875MHz is divided into 64 channels, which are evenly spread over the entire frequency band.  
The channel separation is 375 kHz.  
Dwell time Per channel is less than 0.4s.  
Antenna Type External Detachable RSMA connector  
Length: 1.2m  
Antenna gain: 3 dBi  
Power Supply: DC 3.3V for radio module.



#### **5.4 Description of Support Units**

The EUT has been tested with associated equipment which is supplied by the client.

#### **5.5 Deviation from Standards**

Biconical and log periodic antennas were used instead of dipole antennas.

#### **5.6 Abnormalities from Standard Conditions**

None.

#### **5.7 Other Information Requested by the Customer**

None.

#### **5.8 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,  
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



## 5.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**  
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.
- **ACMA**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.
- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**  
Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.
- **CNAS (Lab Code: L0167)**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.
- **FCC (Registration No.: 282399)**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.
- **Industry Canada (Registration No.: 4620B-1)**  
The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.
- **VCCI (Registration No.: R-2460 and C-2584)**  
The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460 and C-2584 respectively.
- **CBTL (Lab Code: TL129)**  
SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01:2006-10 and Rules of procedure IECEE 02:2006-10, and the relevant IECEE CB-Scheme Operational documents.



## 6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2011-09-06	2Y
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2012-01-17	1Y
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2012-06-01	1Y
EMC0514	Coaxial cable	SGS	N/A	N/A	2011-12-08	1Y
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2011-10-28	1Y
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2011-12-20	1Y
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2011-12-20	1Y
EMC2026	Horn Antenna 1-18GHz	R&S	BBHA 9120D	9120D-841	2011-10-28	1Y
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2011-09-11	1Y
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2012-01-17	1Y
EMC0049	Amplifier	Agilent	8447D	2944A10862	2012-04-21	1Y
EMC0075	310N Amplifier	Sonoma	310N	272683	2011-10-25	1Y
EMC0523	Active Loop Antenna	EMCO	6502	42963	2011-11-17	1Y
EMC2041	Broad-Band Horn Antenna(14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9170	9170-375	2012-06-01	1Y
EMC0530	10m Semi- Anechoic Chamber	ETS	N/A	N/A	2012-05-10	2Y

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0006	DMM	Fluke	73	70681569	2011-12-16	1Y
EMC0007	DMM	Fluke	73	70671122	2011-12-16	1Y





## 7 Test Results

### 7.1 E.U.T. test conditions

**Power supply:** DC 3.3V  
**Temperature:** 20.0 -25.0 °C  
**Humidity:** 38-50 % RH  
**Atmospheric Pressure:** 1000 -1010 mbar

**Test frequencies and frequency range:** According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

#### Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

#### Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified



## SGS-CSTC Standards Technical Services Co., Ltd.

Report No.: GZEM110700254101

Page: 10 of 50

FCC ID: ONFC1104B

### **Working band and channels selective:**

The device's working band is 903.0125-926.9875MHz and has 64 channels, so test frequencies are the lowest channel: 0 channel(903.0125 MHz), middle channel: 31 channel(914.8125 MHz) and highest channel: 63 channel(926.9875 MHz)



## 7.2 Antenna Requirement

### Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna

The antenna use special External Detachable RSMA connector as unique coupling to the intentional radiator and no consideration of replacement by user. The best case gain of the antenna is 3dBi.

**Test result: The unit does meet the FCC requirements.**

### 7.3 Occupied Bandwidth


**Test Requirement:** FCC Part 15 C section 15.247

(a)(1)(i) For frequency hopping systems operating in the 902-928 MHz band: The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

**Test Method:** ANSI C63.10: Clause 6.9.1

**Test Status:** Test the EUT in continuous transmitting mode at the lowest (903.0125 MHz), middle (914.8125 MHz) and highest (926.9875 MHz) channel with normal modulation.

**Test Configuration:**

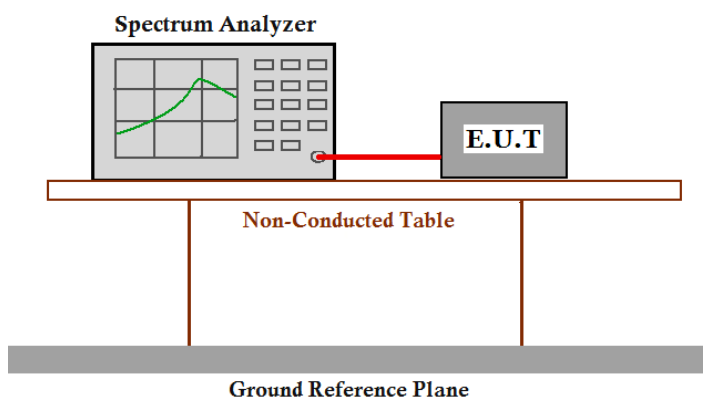

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centring on a hopping channel;
3. Set the spectrum analyzer: RBW  $\geq$  1% of the 20dB bandwidth VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20 dB points bandwidth.


**Test result:**

Test Channel	20 dB Bandwidth (KHz)	Limit (KHz)
Lowest	15.63	500.00
Middle	15.73	500.00
Highest	15.33	500.00




Result plot as follows:

Lowest Channel:

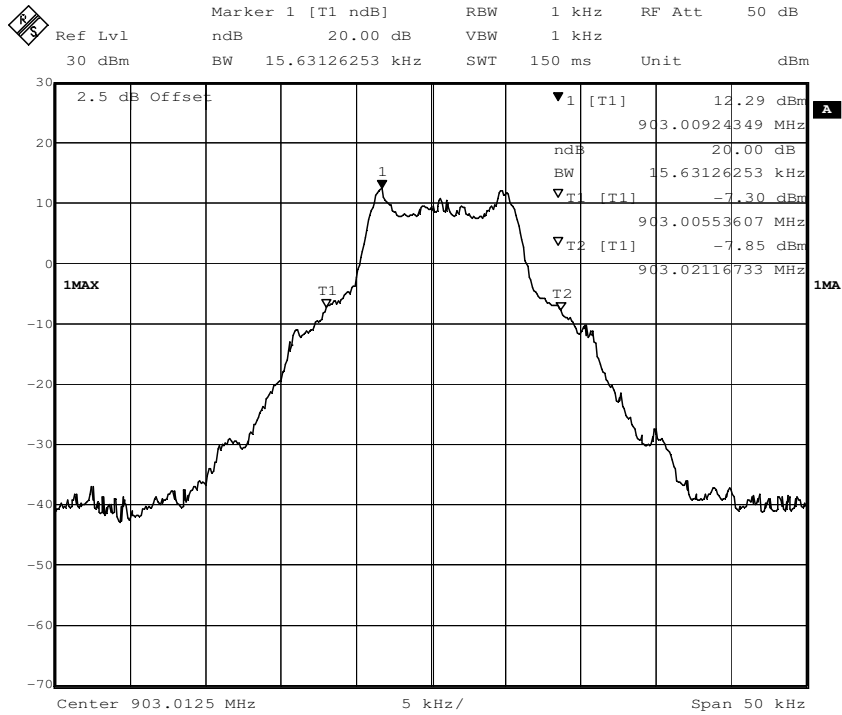


Middle Channel:

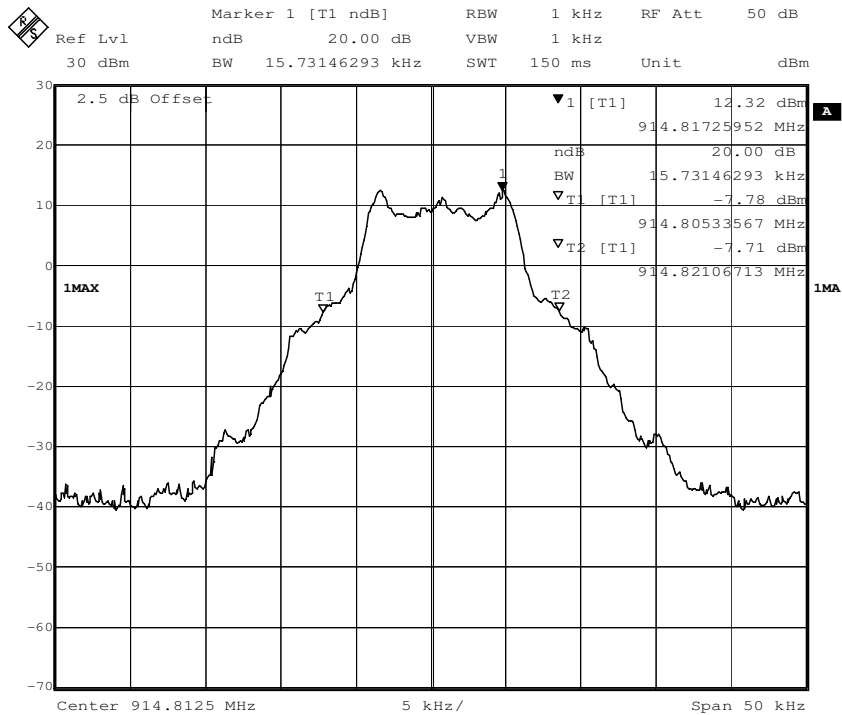



Highest Channel:

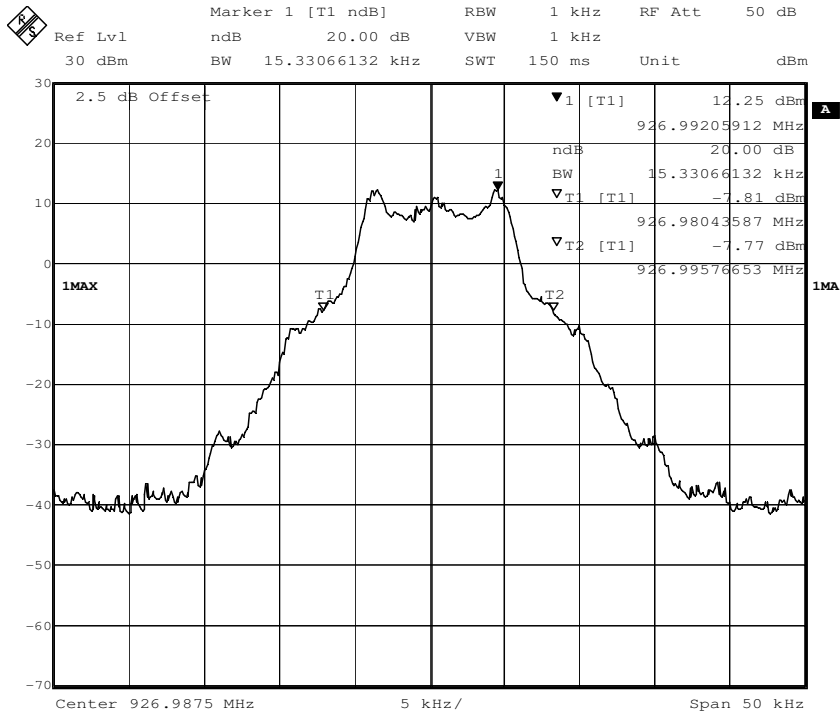

**7.4 Carrier Frequencies Separated**


**Test Requirement:** FCC Part 15 C section 15.247

(a)(1)Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

**Test Method:** DA 00-705

**Test Status:** Test the EUT in hopping mode and continuous transmitting mode at the lowest (903.0125 MHz), middle (914.8125 MHz) and highest (926.9875 MHz) channel with normal modulation. Compliance test in hopping mode with normal modulation as the worst case was found

**Test Configuration:**

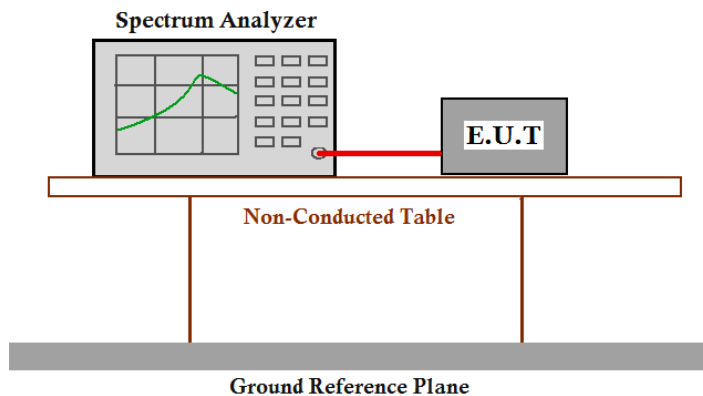

**Test Procedure:**


1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  1% of the span, VBW  $\geq$  RBW, Sweep = auto; Detector Function = Peak. Trace = Max, hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

**Test result:**


Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels	377.756KHz	Pass
Middle Channels	377.756KHz	Pass
Upper Channels	380.762KHz	Pass



1. Lowest Channels: Carrier Frequencies Separated

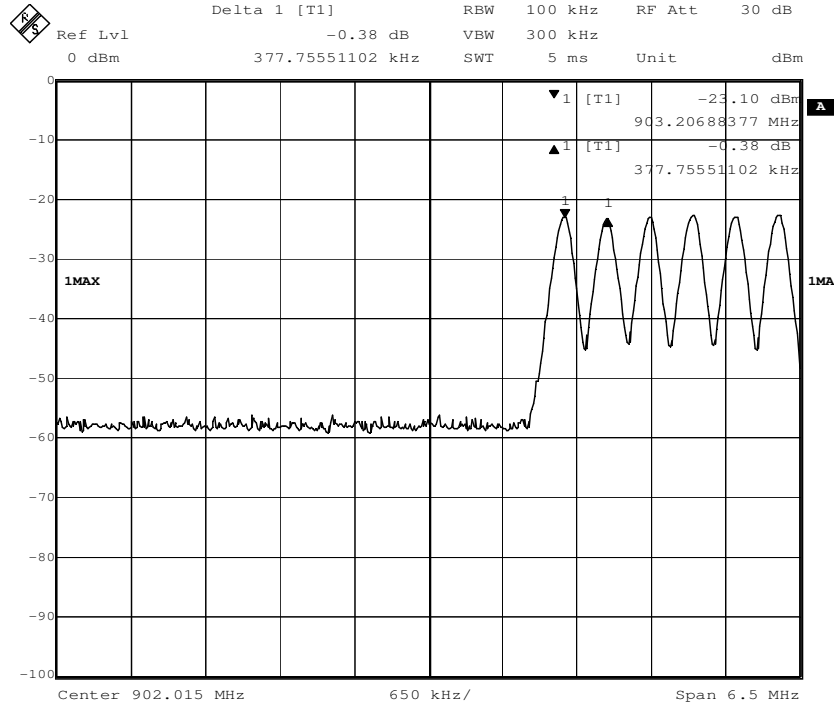

2. Middle Channels: Carrier Frequencies Separated

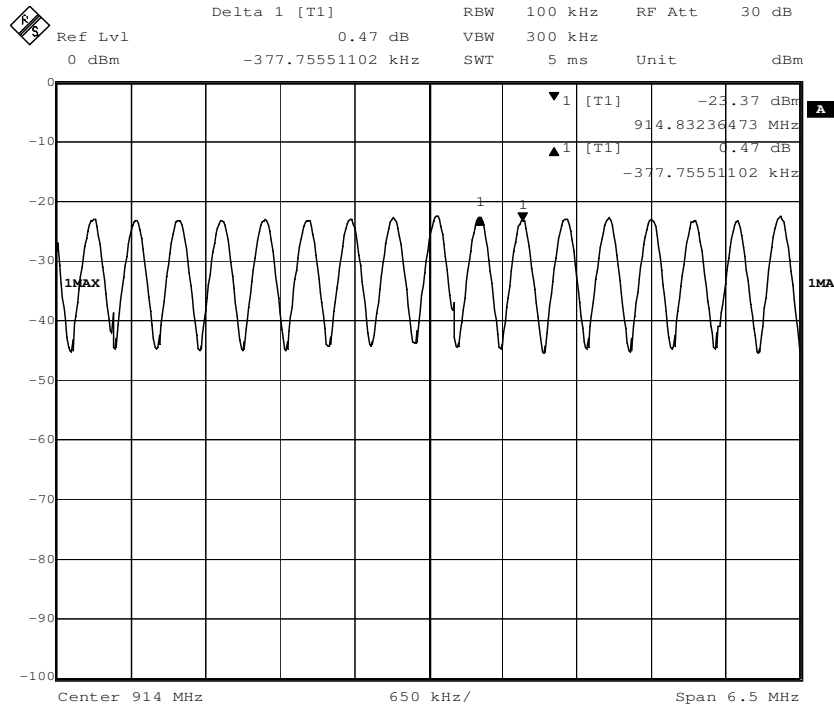






## 7.5 Hopping Channel Number

**Test Requirement:** FCC Part15 C section 15.247  
 (a)(1)(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

**Test Method:** DA 00-705

**Test Status:** Test the EUT in hopping mode with normal modulation..

**Test Configuration:**

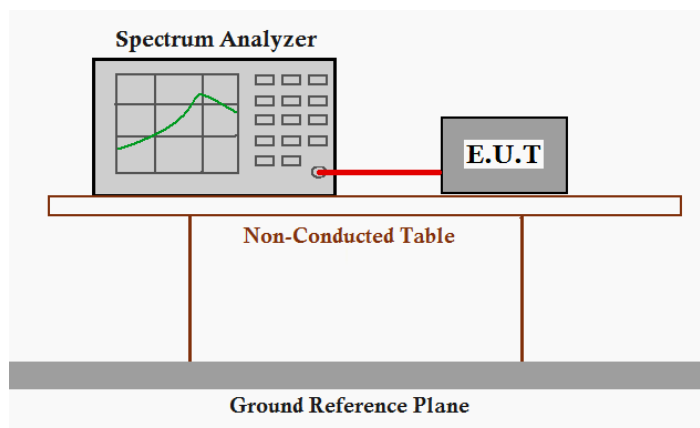


### Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 902 MHz. stop frequency = 928 MHz. Submit the test result graph.



Test result: Total channels are 64 channels.

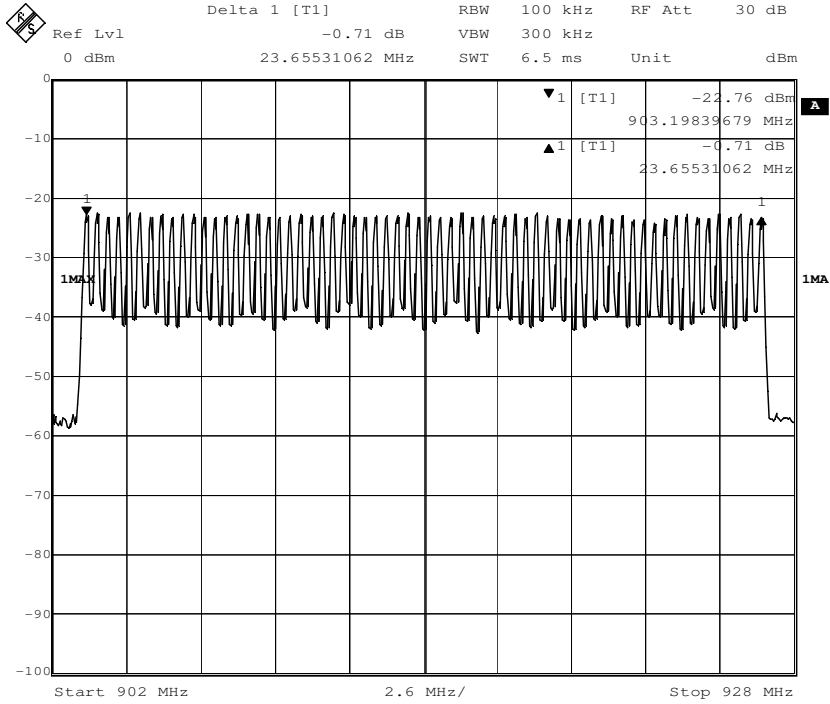

Test result: The unit does meet the FCC requirements.

**7.6 Dwell Time**


**Test Requirement:** FCC Part 15 C section 15.247

(a)(1)(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

**Test Method:** DA 00-705

**Test Status:** Test the EUT in hopping mode with normal modulation and record the dwell time per channel at the lowest (903.0125 MHz), middle (914.8125 MHz) and highest (926.9875 MHz) channel.

**Test Configuration:**

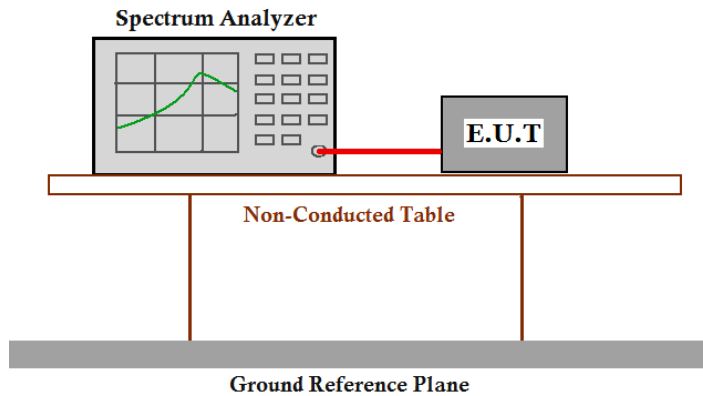

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
  2. Set spectrum analyzer span = 0. centered on a hopping channel;
  3. Set RBW = 1 MHz and VBW = 1 MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = Max hold;
  4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). Repeat this test for each variation.
- The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.



**Test Result:**

The test period:  $T = 20$  s (20 dB bandwidth <250 kHz, channel number>50)

1. **Channel 0:** 903.0125MHz

Dwell time =  $20/10^4 * 40.080160 = 0.3216$  s

2. **Channel 31:** 914.8125MHz

Dwell time =  $20/10^4 * 43.086172 = 0.3447$  s

3. **Channel 63:** 926.9875MHz

Dwell time =  $20/10^4 * 39.879760 = 0.3190$  s



The results are not greater than 0.4 seconds.

**The unit does meet the FCC requirements.**





Please refer the graph as below:

1. Lowest channel:

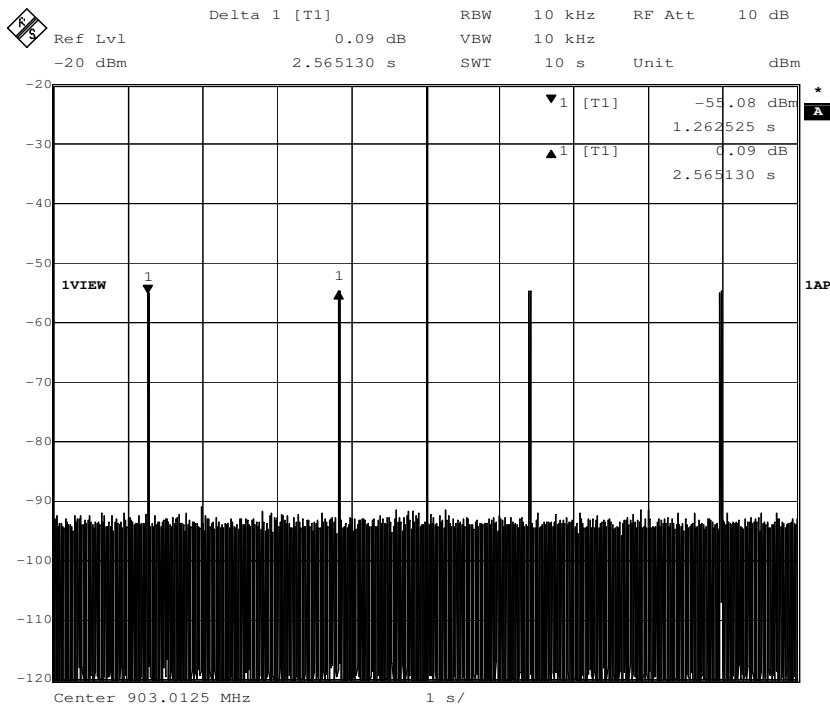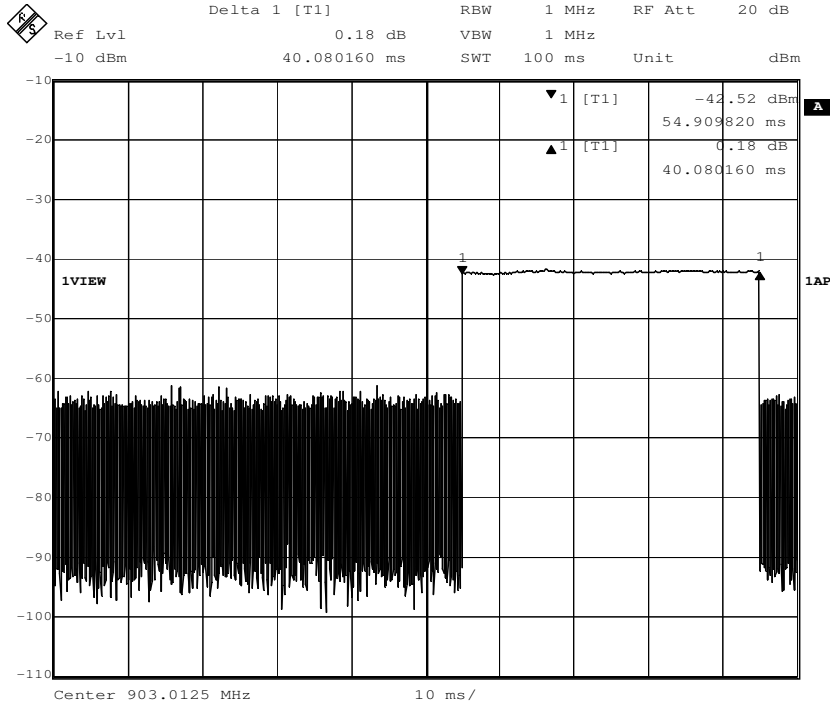





2. Middle Channel:

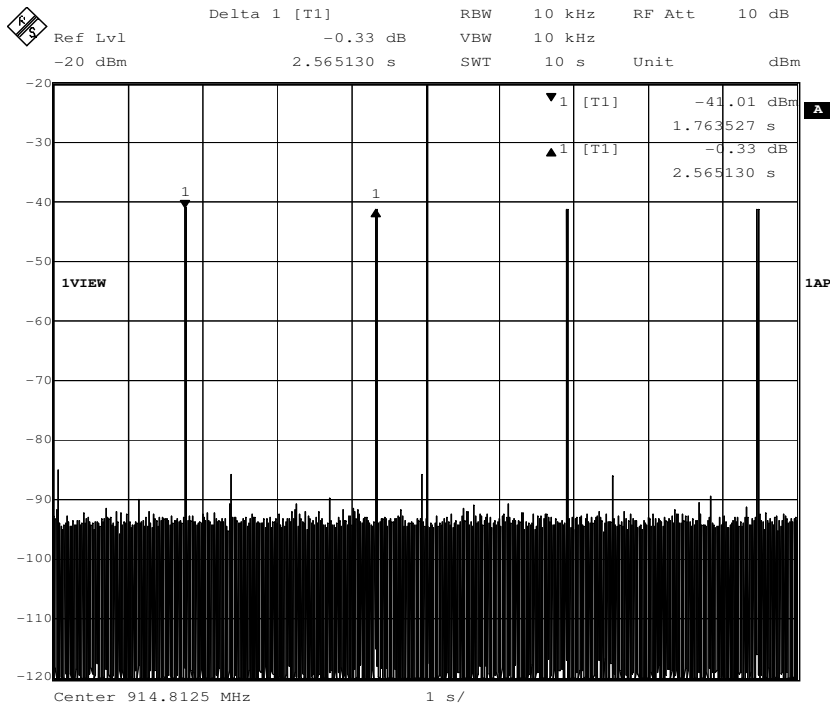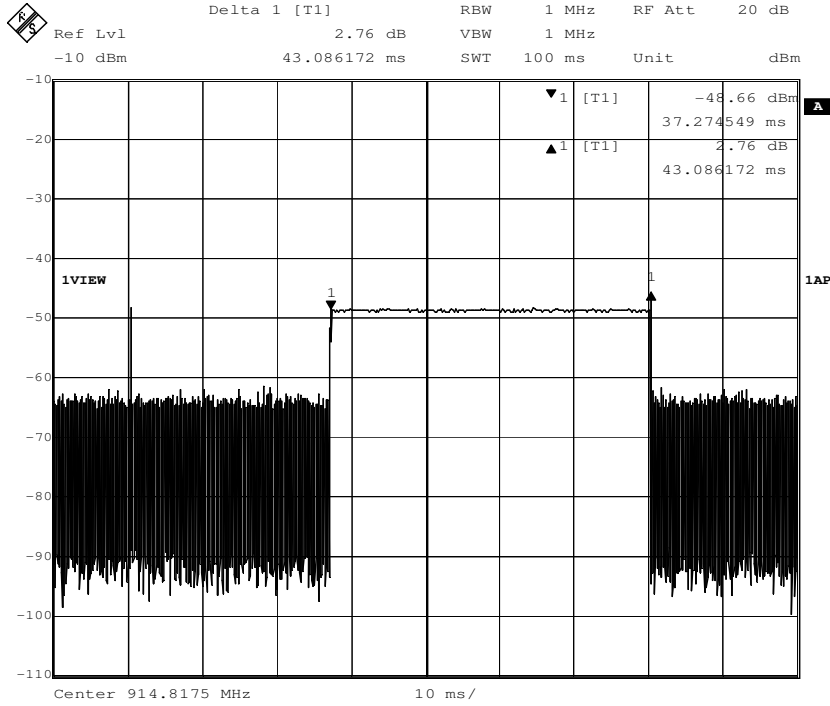



3. Highest Channel:

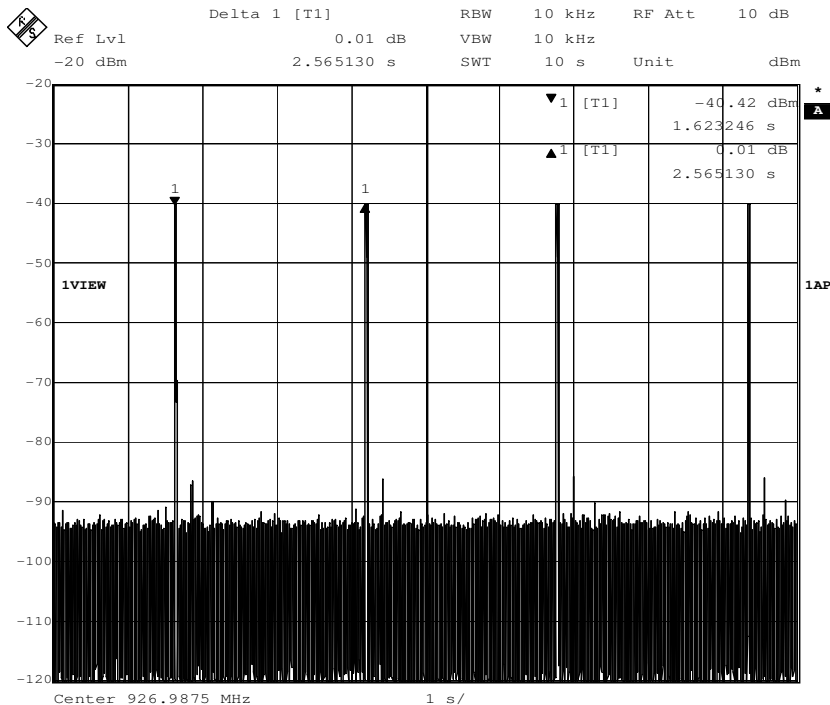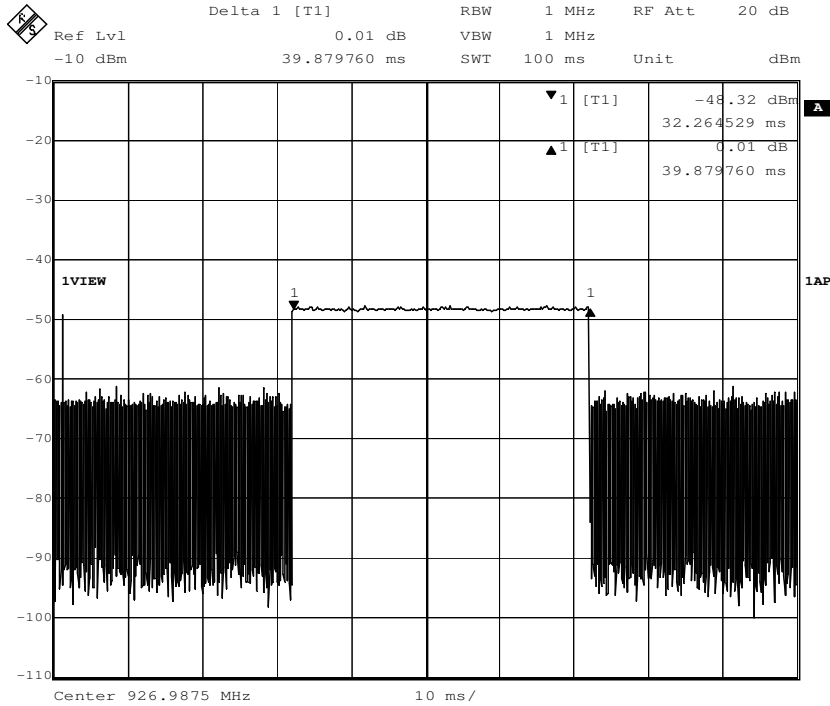





## 7.7 Pseudorandom Frequency Hopping Sequence

### 7.7.1 Standard requirement

15.247(a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.



### 7.7.2 EUT Pseudorandom Frequency Hopping Sequence

Frequency band 903.0125 to 926.9875 MHz is divided into 15 frequency banks. Each frequency bank holds 64 channels which are evenly spread over the entire frequency band. The channel separation is  $15 \times 25\text{kHz} = 375\text{kHz}$ .


Each unit is programmed with a unique 32 bit ID code which is used as “seed” for the algorithm given in the previous section. The algorithm creates a pseudo-randomly ordered list of the 64 channels. Each channel never appears more than one time in the list so each channel in the bank is used equally by the unit.

The radio protocol is designed so that a unit never transmits on a channel for more than 40ms. During a period of 20 seconds the occupancy time for each channel in the bank is  $20 / 64 = 0.3125$  seconds.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 7.8 Maximum Peak Output Power

- Test Requirement:** FCC Part 15 C section 15.247  
 (b)(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.
- Test Method:** ANSI C63.10: Clause 6.10.1
- Test mode:** Test the EUT in continuous transmitting mode at the lowest (903.0125 MHz), middle (914.8125 MHz) and highest (926.9875 MHz) channel with normal modulation
- Test Configuration:**

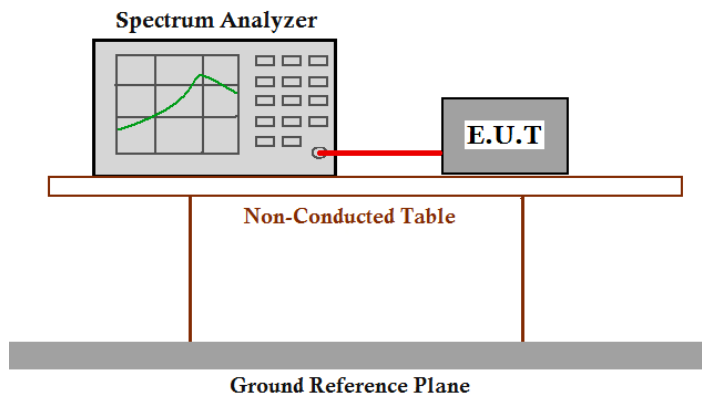

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = RBW > the 20 dB bandwidth of the emission being measured. VBW ≥ RBW. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.




Channel Number>50


Test Result:				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	903.0125	13.49	30.0	Pass
Middle	914.8125	13.49	30.0	Pass
Highest	926.9875	13.44	30.0	Pass
Remark: cable lose=2.5dB				
Test result: The unit does meet the FCC requirements.				
Test result plot as follows:				



Lowest Channel:

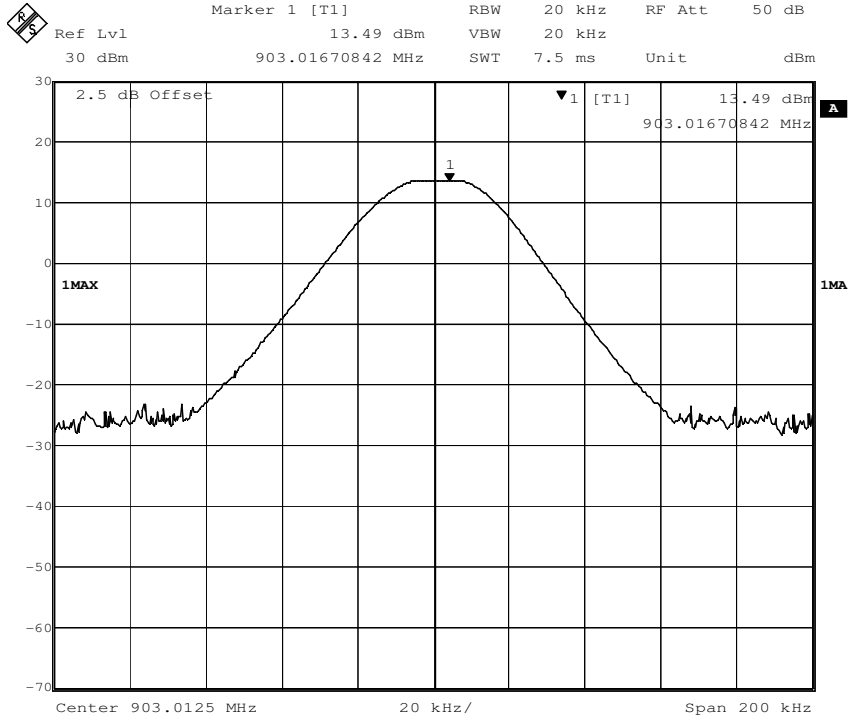


Middle Channel:

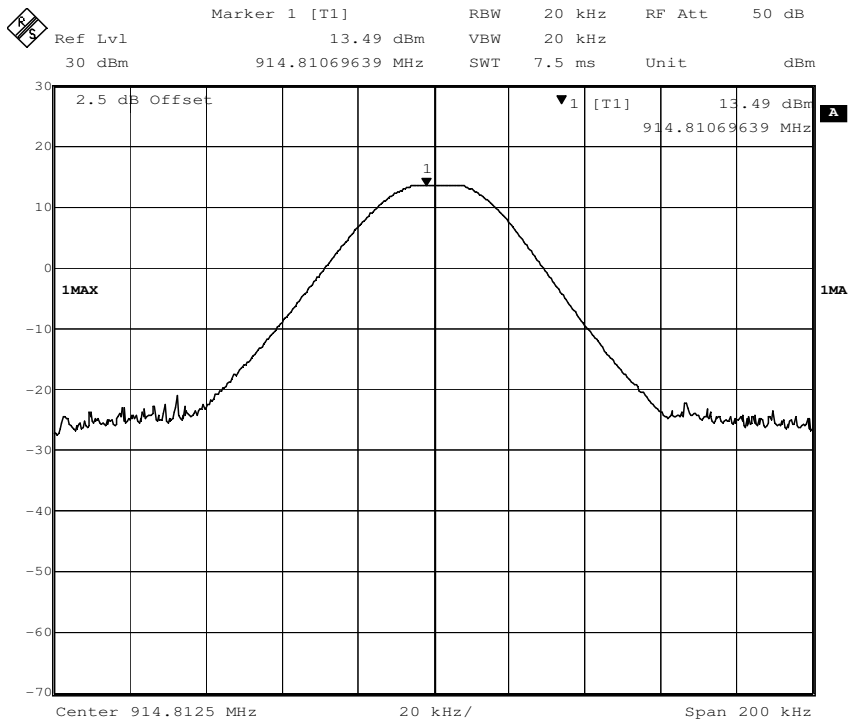



Highest Channel:

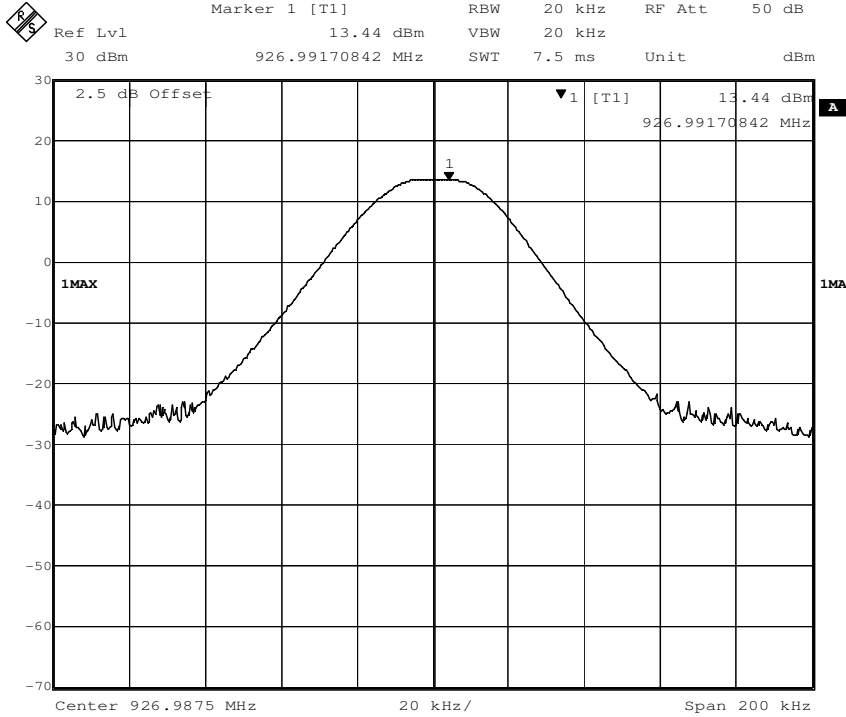

## 7.9 Conducted Spurious Emissions


**Test Requirement:** FCC Part15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

**Test Method:** ANSI C63.10: Clause 6.7

**Test Status:** Test the EUT in continuous transmitting mode at the lowest (903.0125 MHz), middle (914.8125 MHz) and highest (926.9875 MHz) channel with normal modulation

**Test Configuration:**

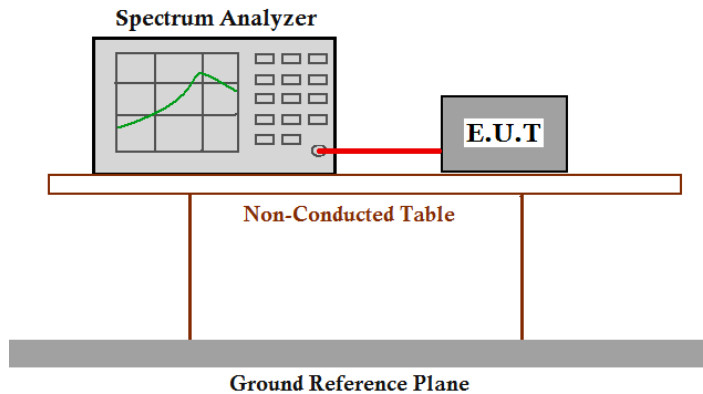

**Test Procedure:**


1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak (Max. hold).

Test result plot as follows:




Lowest Channel:

30 M to 1 GHz

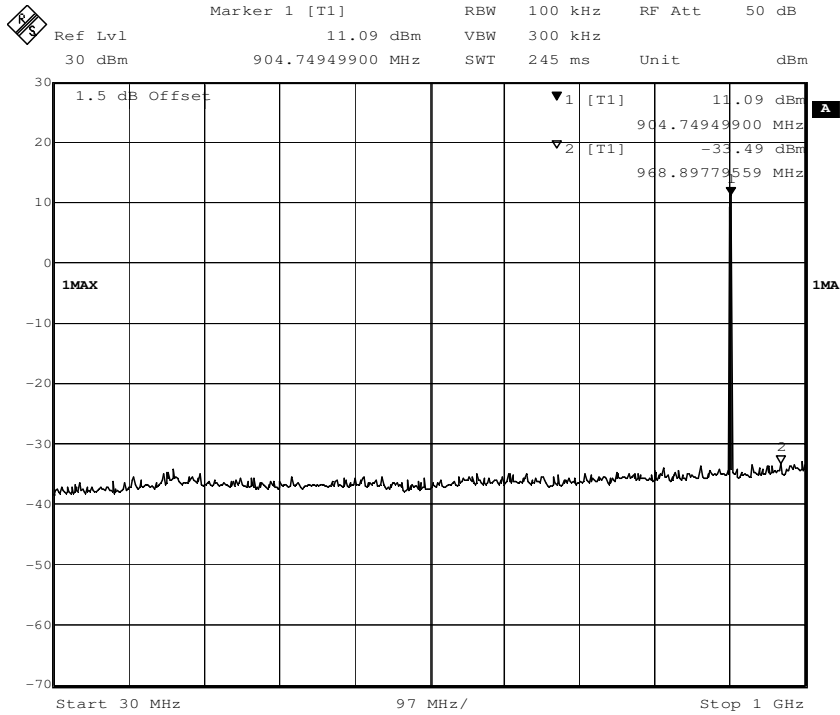


1 G to 5 GHz

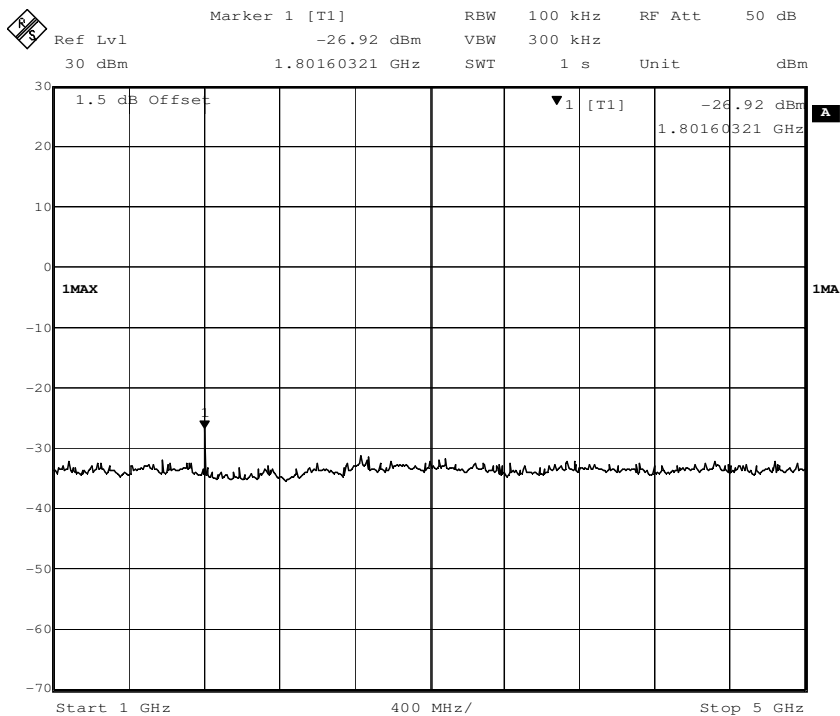






5 G to 25 GHz

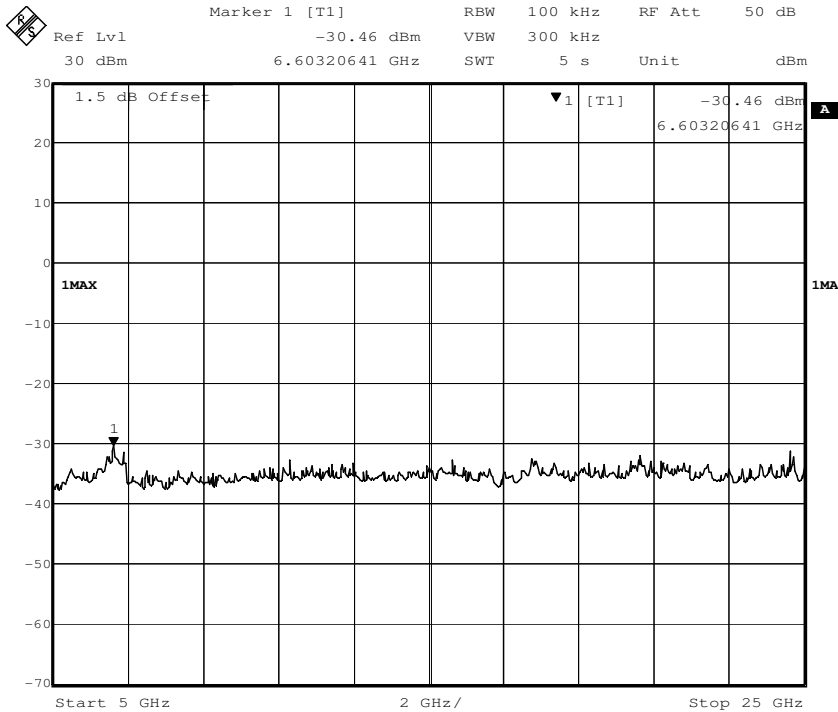


Middle Channel:

30 M to 1 GHz

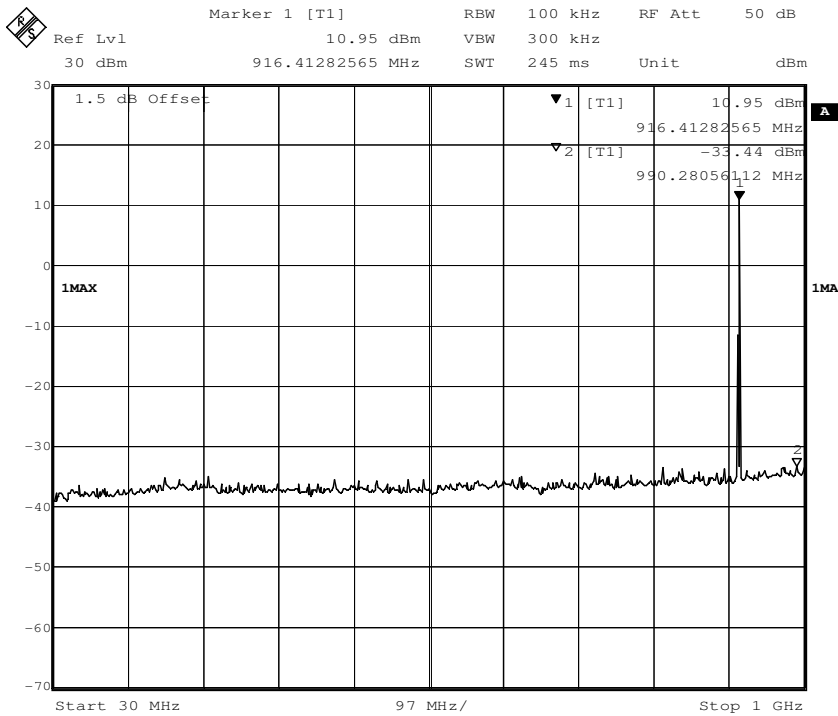




1 G to 5 GHz

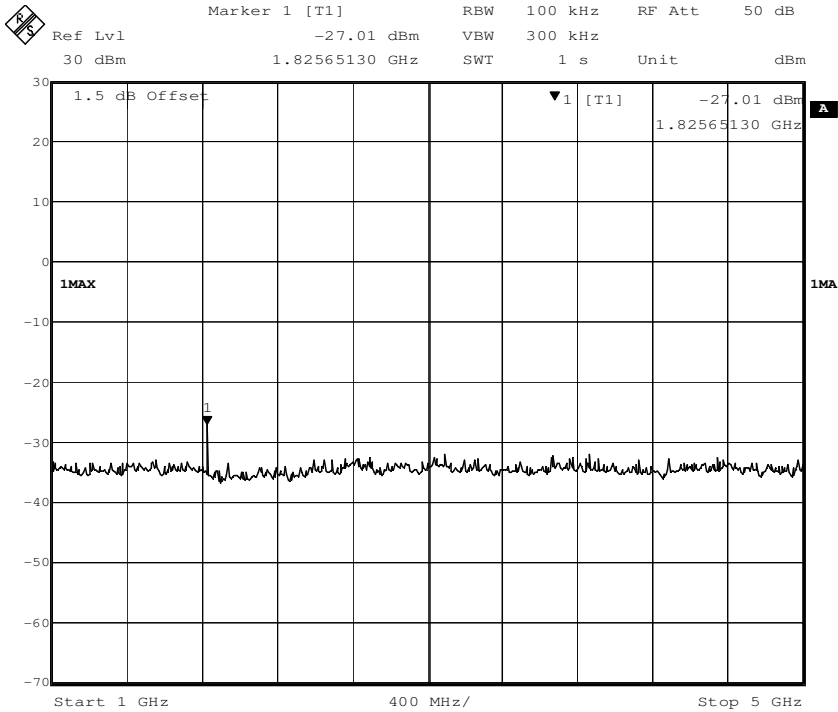


5 G to 25 GHz

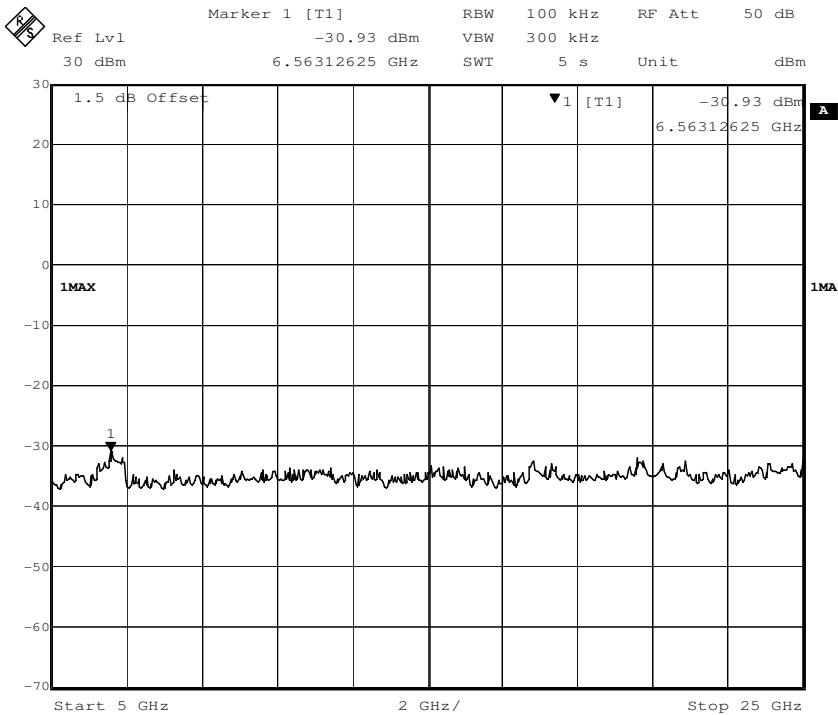




Highest Channel:  
30 M to 1 GHz

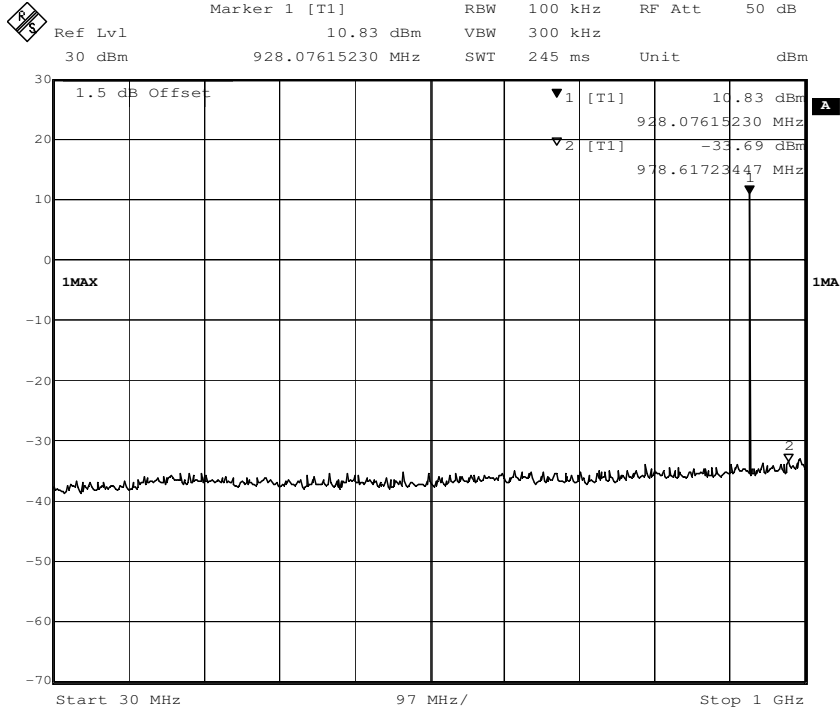


1 G to 5 GHz

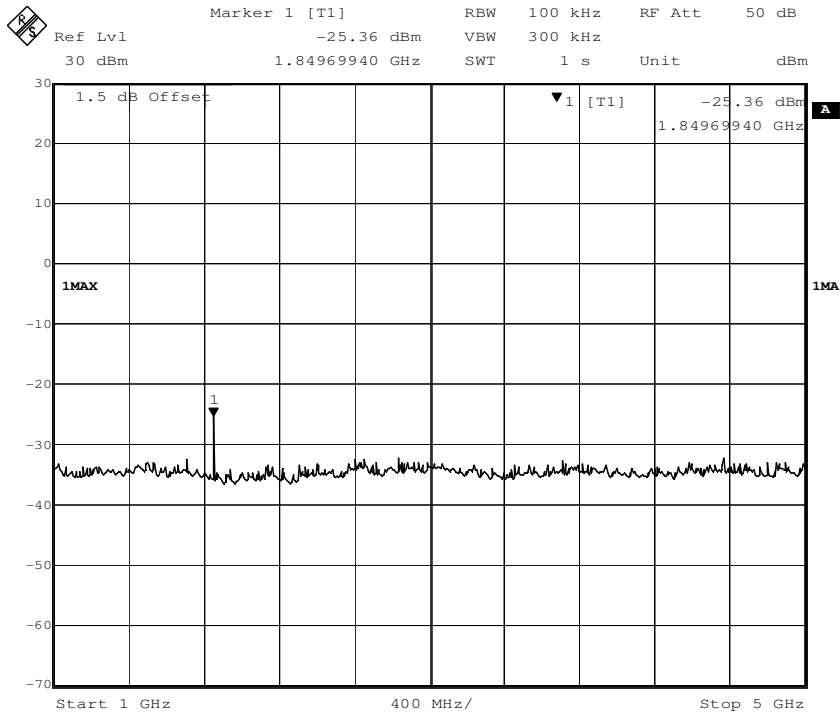



5 G to 25 GHz

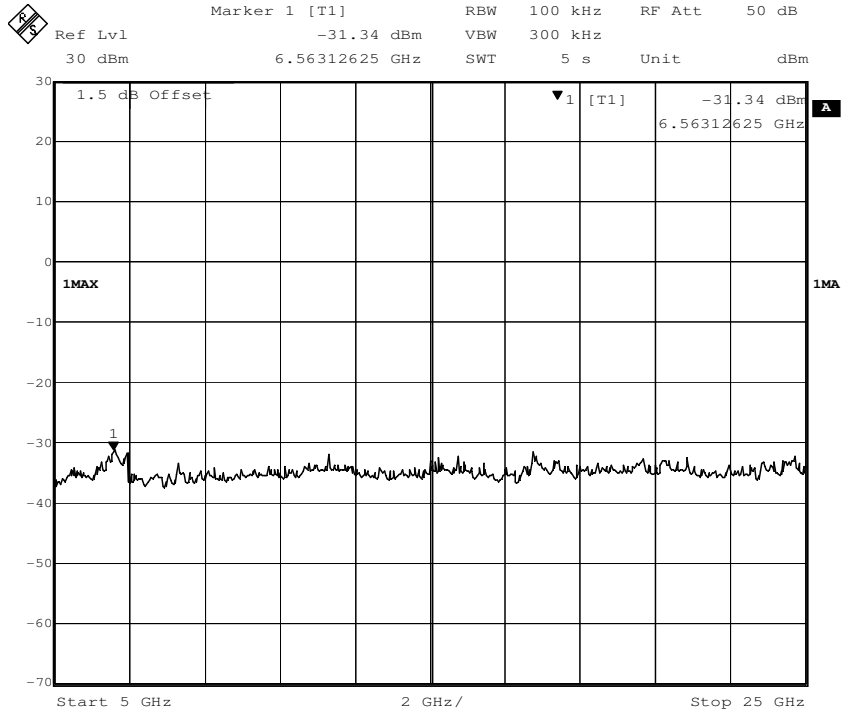




## 7.10 Radiated Spurious Emissions


<b>Test Requirement:</b>	FCC Part15 C section 15.247  (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
<b>Test Method:</b>	ANSI C63.10: Clause 6.4, 6.5 and 6.6
<b>Test Status:</b>	Test the EUT in continuous transmitting mode at the lowest (903.0125 MHz), middle (914.8125 MHz) and highest (926.9875 MHz) with normal modulation
<b>Detector:</b>	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold
<b>15.209 Limit:</b>	40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz 54.0 dB $\mu$ V/m above 960MHz

**Test Configuration:**

- 1) 30 MHz to 1 GHz emissions:

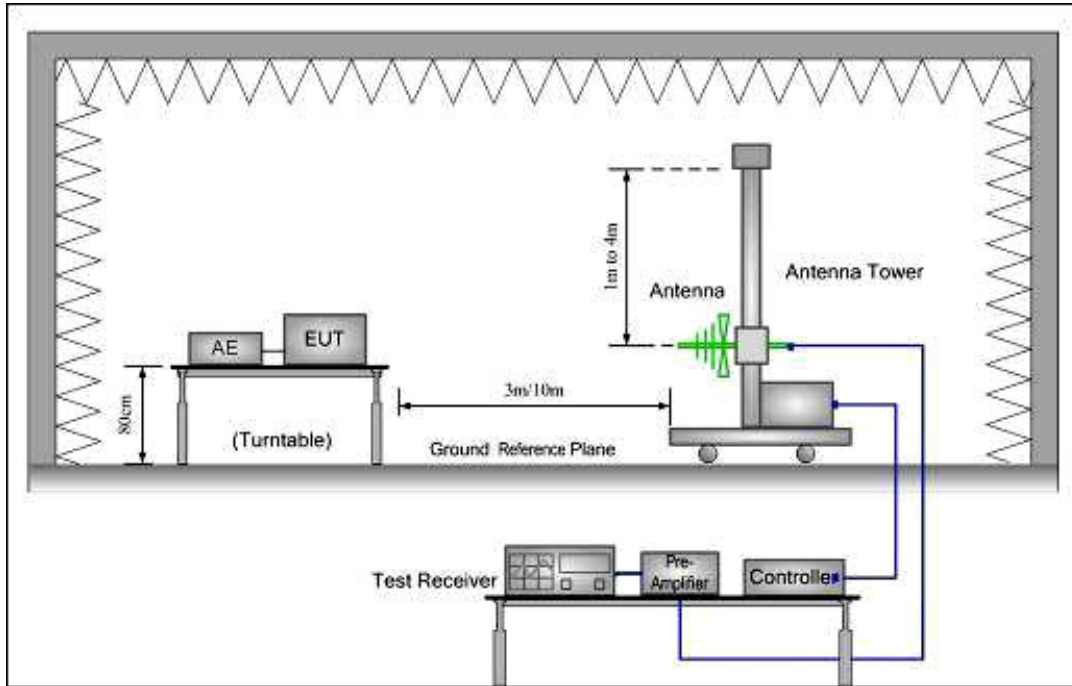

- 2) 1 GHz to 40 GHz emissions:

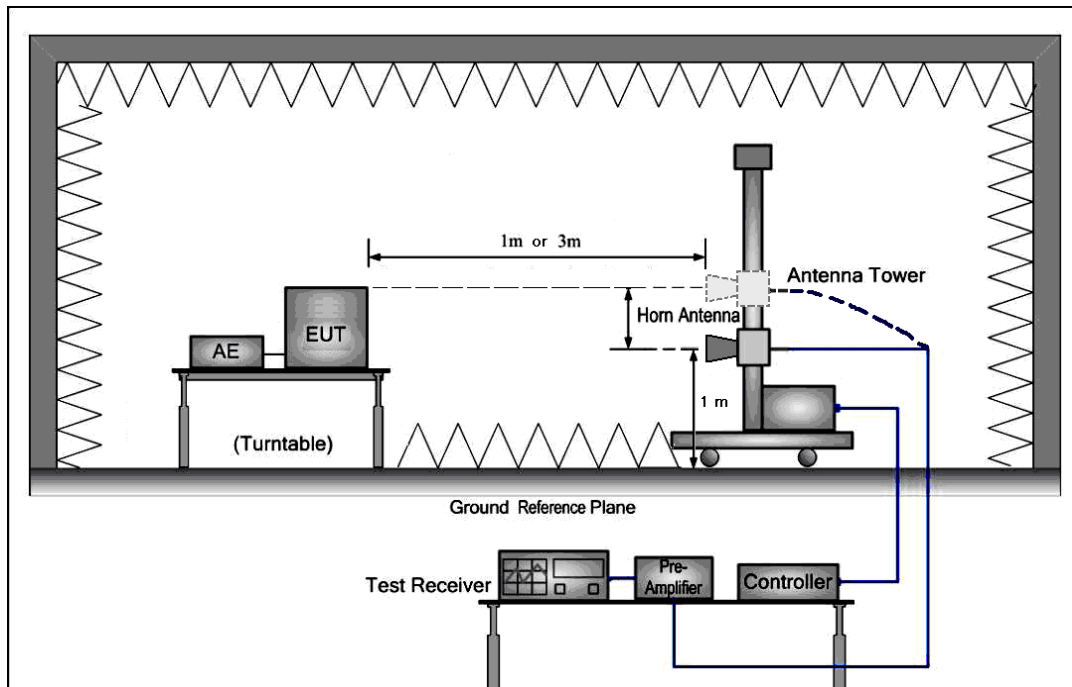



**Test Procedure:** The receiver was scanned from 30 MHz to 10GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.



7.10.1 Harmonic and other spurious emissions


7.10.1.1 Test at low Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

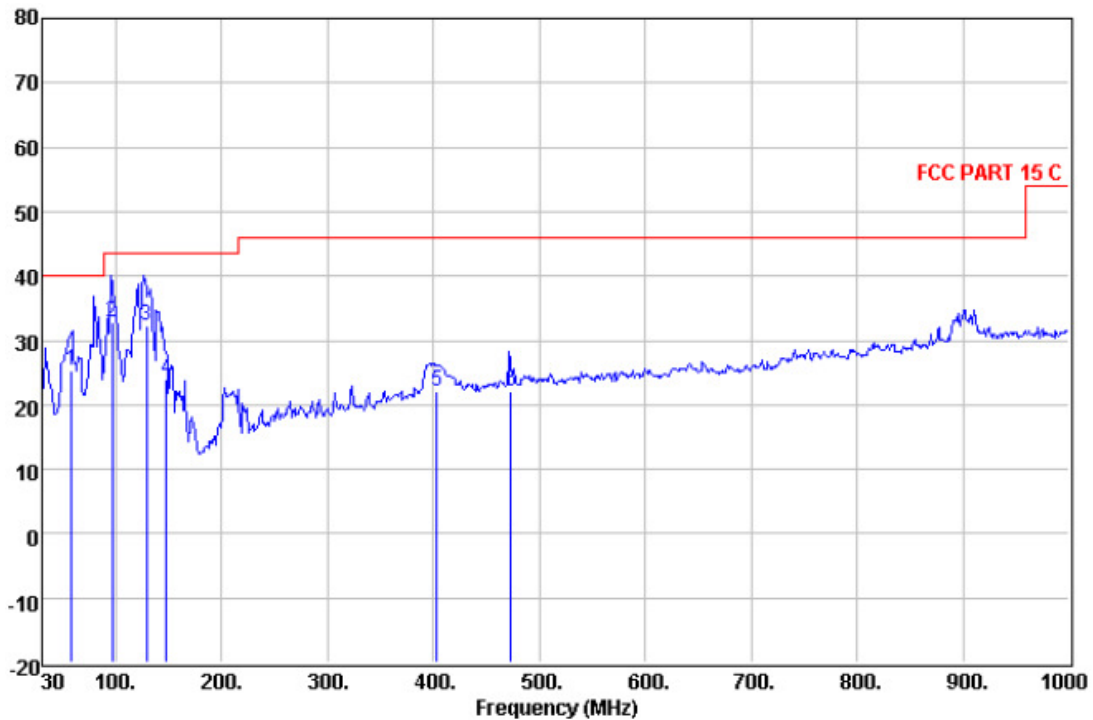

Quasi-peak measurement


Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier	Level	Over Limit	Limit	Remark
MHz	dBμV	dB/m	dB	dB	dBμV/m	dB	dBμV/m	
58.130	47.66	4.72	0.70	27.85	25.23	-14.77	40.00	QP
95.960	49.61	10.01	0.96	27.69	32.89	-10.61	43.50	QP
128.940	46.68	11.98	1.12	27.52	32.26	-11.24	43.50	QP
147.370	40.39	9.85	1.19	27.43	24.00	-19.50	43.50	QP
403.450	31.60	16.11	2.09	27.78	22.02	-23.98	46.00	QP
473.290	30.48	17.17	2.29	27.97	21.97	-24.03	46.00	QP





**Horizontal:**

Peak scan  
 Level (dBμV/m)

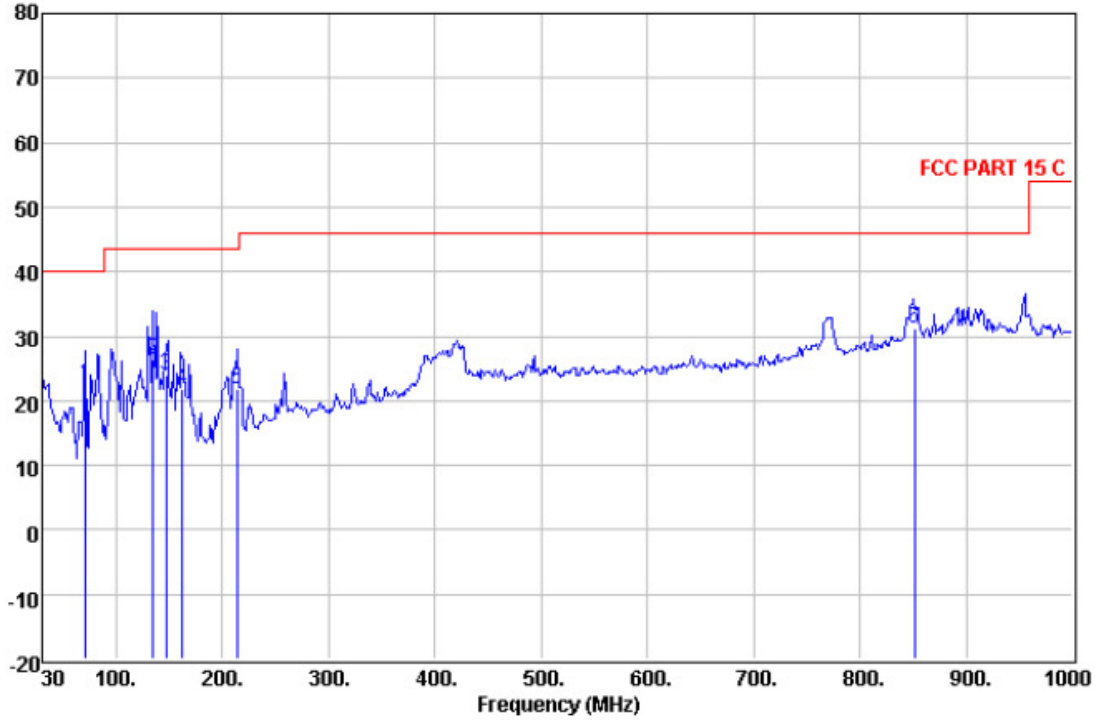

Quasi-peak measurement

Freq	ReadAntenna	Cable	Preamp	Over	Limit	Limit	Line	Remark
MHz	Level	Factor	Loss	Factor	Level	Limit	dBμV/m	
	dBμV	dB/m	dB	dB	dBμV/m	dB		
70.740	44.97	4.69	0.81	27.79	22.68	-17.32	40.00	QP
134.760	41.12	11.73	1.15	27.49	26.51	-16.99	43.50	QP
146.400	40.18	9.99	1.18	27.44	23.91	-19.59	43.50	QP
161.920	39.03	8.90	1.23	27.37	21.79	-21.71	43.50	QP
213.330	38.34	9.27	1.39	27.21	21.79	-21.71	43.50	QP
851.590	34.58	20.50	3.30	27.15	31.23	-14.77	46.00	QP



1~10 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

**Peak Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
1805.90	61.12	35.45	25.32	4.90	55.89	74.00	V
2709.00	57.62	34.86	28.20	6.39	57.35	74.00	V
4515.00	49.03	34.30	30.80	10.40	55.93	74.00	V
1805.90	56.27	35.45	25.32	4.90	51.04	74.00	H
2708.00	51.88	34.86	28.18	6.39	51.59	74.00	H
3612.10	51.75	34.45	29.17	9.25	55.72	74.00	H

**Average Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
1805.90	54.30	35.45	25.32	4.90	49.07	54.00	V
2709.00	52.25	34.86	28.20	6.39	51.98	54.00	V
4524.00	45.25	34.30	30.80	10.22	51.97	54.00	V
1806.00	50.63	35.45	25.32	4.90	45.40	54.00	H
2709.10	43.68	34.86	28.20	6.39	43.41	54.00	H
3612.10	47.63	34.45	29.17	9.25	51.60	54.00	H




7.10.1.2 Test at middle Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

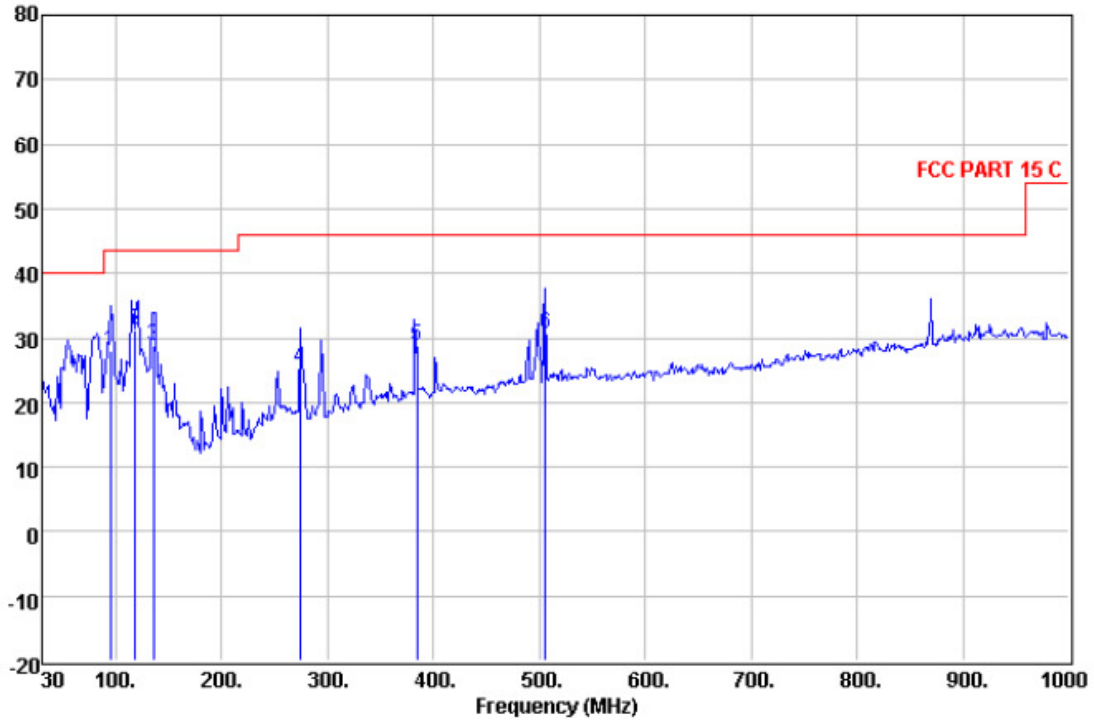


Quasi-peak measurement

Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Over Limit	Limit Line	Remark
MHz	dBμV	dB/m	dB	dB	dBμV/m	dB	dBμV/m	
94.990	44.90	9.80	0.95	27.69	27.96	-15.54	43.50	QP
118.270	45.93	11.77	1.08	27.57	31.21	-12.29	43.50	QP
135.730	43.60	11.62	1.15	27.48	28.89	-14.61	43.50	QP
273.470	38.64	12.18	1.70	27.11	25.41	-20.59	46.00	QP
384.050	38.88	15.54	2.05	27.67	28.80	-17.20	46.00	QP
505.300	38.74	17.45	2.42	28.06	30.55	-15.45	46.00	QP



**Horizontal:**

Peak scan  
 Level (dBμV/m)

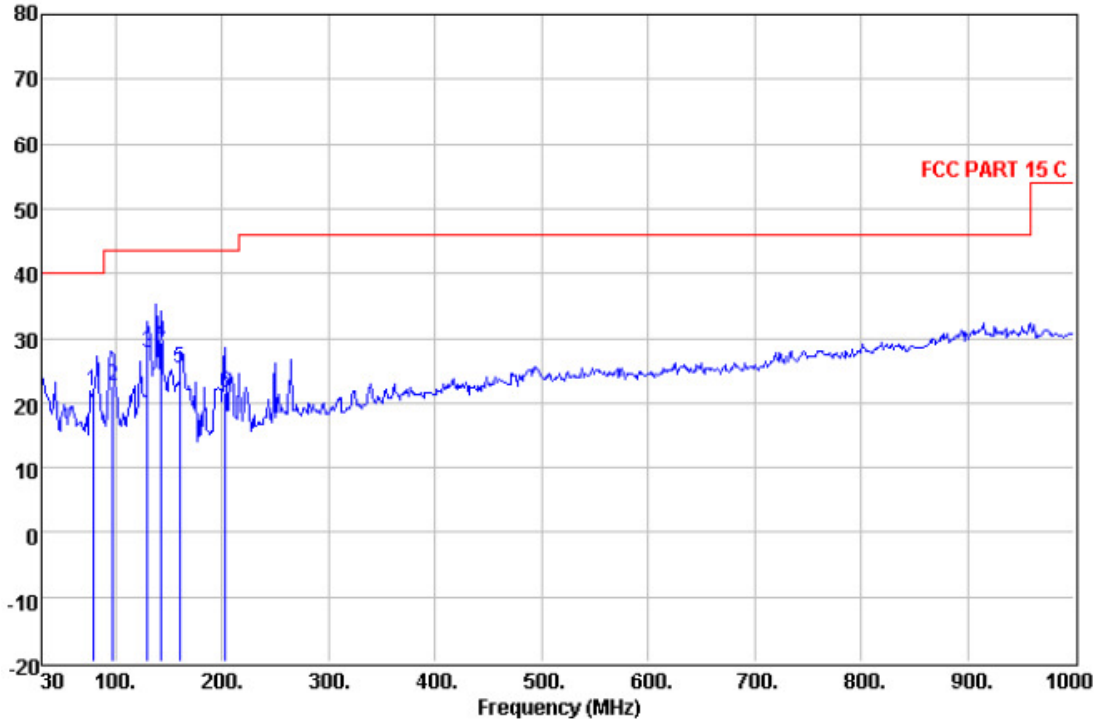

Quasi-peak measurement

Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Over Limit	Limit	Remark
MHz	dBμV	dB/m	dB	dB	dBμV/m	dB	dBμV/m	
78.500	42.72	5.95	0.88	27.75	21.80	-18.20	40.00	QP
96.930	39.21	10.16	0.97	27.69	22.65	-20.85	43.50	QP
129.910	42.04	12.00	1.13	27.51	27.66	-15.84	43.50	QP
142.520	44.94	10.55	1.17	27.46	29.20	-14.30	43.50	QP
159.980	42.48	8.90	1.22	27.38	25.22	-18.28	43.50	QP
202.660	38.43	8.96	1.32	27.24	21.47	-22.03	43.50	QP



1~10 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

**Peak Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
1829.00	61.49	35.43	25.42	4.96	56.44	74.00	V
2744.50	57.18	34.84	28.28	6.40	57.02	74.00	V
3653.00	49.15	34.43	29.22	9.03	52.97	74.00	V
1829.00	56.11	35.43	25.42	4.96	51.06	74.00	H
2744.30	50.98	34.84	28.28	6.40	50.82	74.00	H
3659.30	51.41	34.43	29.23	9.03	55.24	74.00	H

**Average Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
1829.70	54.80	35.43	25.42	4.96	49.75	54.00	V
2744.50	51.90	34.84	28.28	6.40	51.74	54.00	V
3653.00	45.68	34.43	29.22	9.03	49.50	54.00	V
1829.00	52.36	35.43	25.42	4.96	47.31	54.00	H
2744.50	45.87	34.84	28.28	6.40	45.71	54.00	H
3659.30	44.57	34.43	29.23	9.03	48.40	54.00	H




7.10.1.3 Test at high Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBµV/m)

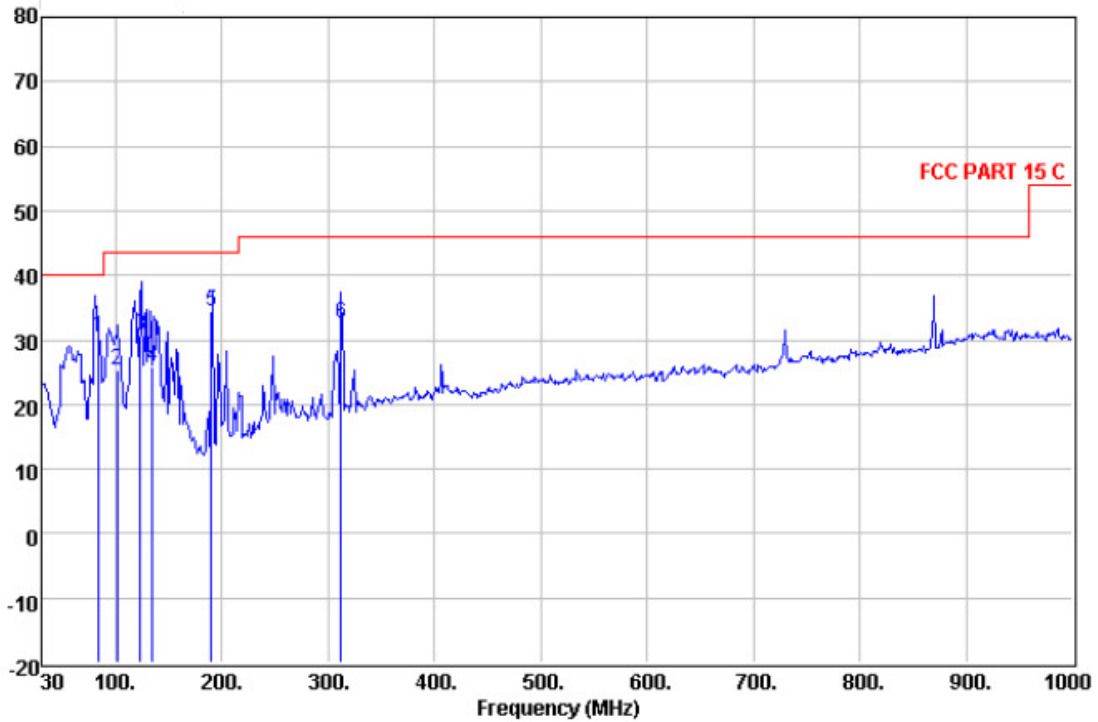


Quasi-peak measurement

Freq MHz	ReadAntenna Level dBµV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Level dBµV/m	Over Limit dB	Limit Line dBµV/m	Remark
83.350	50.21	7.14	0.90	27.74	30.51	-9.49	40.00	QP
100.810	41.01	10.97	1.00	27.68	25.30	-18.20	43.50	QP
123.120	45.12	11.87	1.10	27.55	30.54	-12.96	43.50	QP
134.760	40.51	11.73	1.15	27.49	25.90	-17.60	43.50	QP
190.050	51.90	8.40	1.28	27.27	34.31	-9.19	43.50	QP
312.270	44.53	13.27	1.85	27.16	32.49	-13.51	46.00	QP



**Horizontal:**

Peak scan  
 Level (dBμV/m)

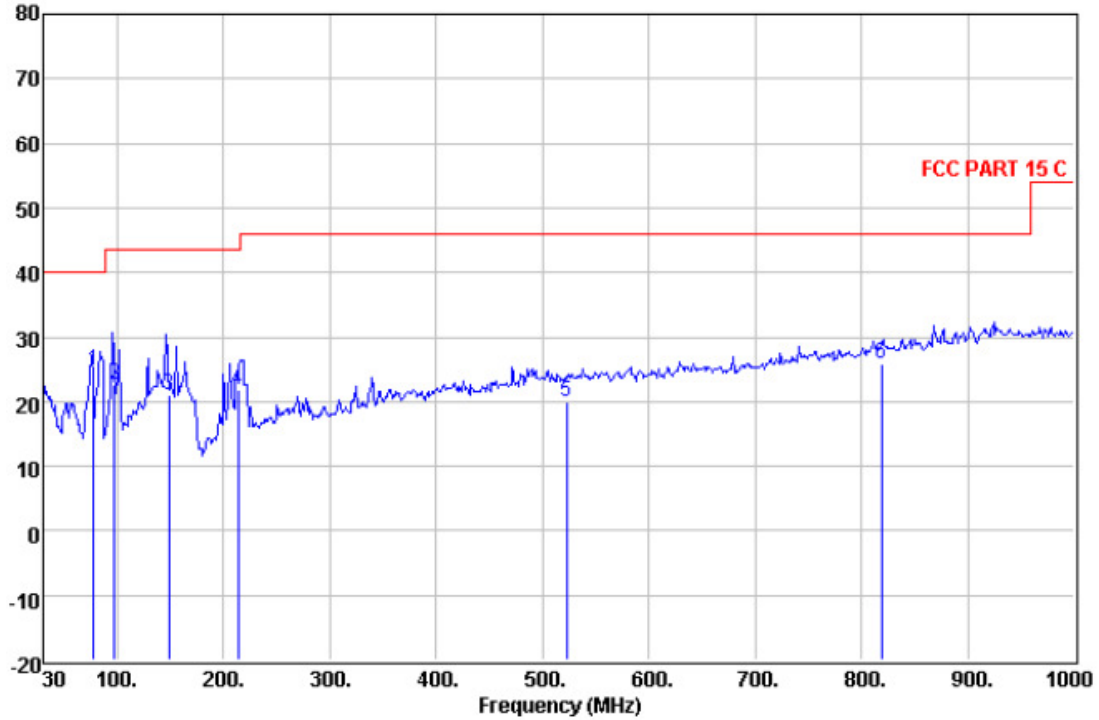

Quasi-peak measurement

Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Over Limit	Limit Line	Remark
MHz	dBμV	dB/m	dB	dB	dBμV/m	dB	dBμV/m	
77.530	45.83	5.78	0.88	27.76	24.73	-15.27	40.00	QP
96.930	39.13	10.16	0.97	27.69	22.57	-20.93	43.50	QP
148.340	37.46	9.71	1.19	27.43	20.93	-22.57	43.50	QP
213.330	38.37	9.27	1.39	27.21	21.82	-21.68	43.50	QP
522.760	27.91	17.58	2.45	28.12	19.82	-26.18	46.00	QP
818.610	29.53	20.50	3.17	27.45	25.75	-20.25	46.00	QP



1~10 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
1854.10	59.99	35.41	25.55	5.01	55.14	74.00	V
2785.00	56.05	34.82	28.38	6.42	56.03	74.00	V
3709.00	49.01	34.41	29.29	8.81	52.70	74.00	V
1853.80	55.42	35.41	25.55	5.01	50.57	74.00	H
2785.00	51.93	34.82	28.38	6.42	51.91	74.00	H
3709.00	48.93	34.41	29.29	8.81	52.62	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
1854.10	55.98	35.41	25.55	5.01	51.13	54.00	V
2785.00	51.98	34.82	28.38	6.42	51.96	54.00	V
3708.00	42.49	34.41	29.29	8.92	46.29	54.00	V
1853.80	51.47	35.41	25.55	5.01	46.62	54.00	H
2785.00	51.60	34.82	28.38	6.42	51.58	54.00	H
3709.00	44.14	34.41	29.29	8.81	47.83	54.00	H

Remark:

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.
- 4). Y: rotate EUT by 90° vertically.  
X: rotate EUT by 90° clockwise.  
Z: EUT as Radiated Spurious Emission test setup photograph in section 8.1 of this report.

Note: Radiated Spurious Emission test setup photograph in section 8.1 of this report is the worst case and reported.

**Test result: The unit does meet the FCC requirements.**



**7.11 Band Edges Requirement**

**Test Requirement:** FCC Part15 C section 15.247


(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Frequency Band:** 902 MHz to 928 MHz

**Test Method:** ANSI C63.10: Clause 6.9

**Test Status:** Test the EUT in hopping mode and continuous transmitting mode at the lowest (903.0125 MHz), middle (914.8125 MHz) and highest (926.9875 MHz) channel with normal modulation. Compliance test in hopping mode with normal modulation as the worst case was found

**Test Configuration:**

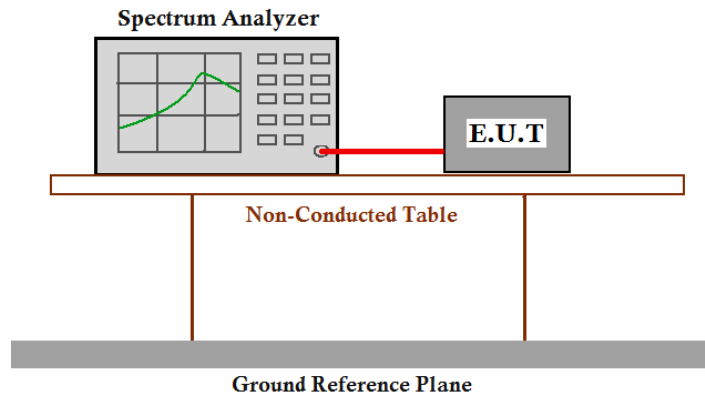

**Test Procedure:** Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge.

The band edges was measured and recorded Result:


The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.


The graph as below. Represents the emissions take for this device.



Low channel:

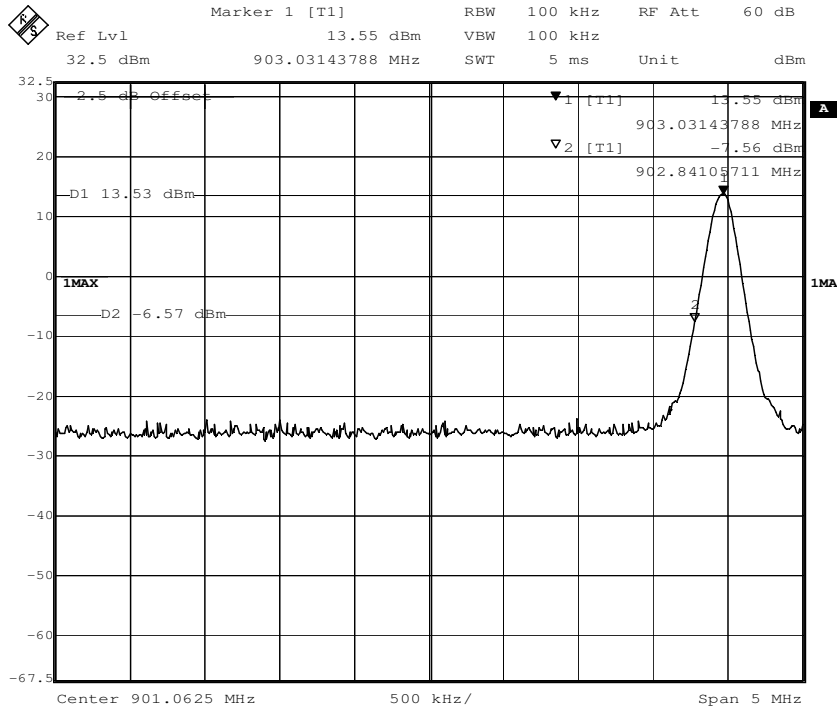

Highest Channel:

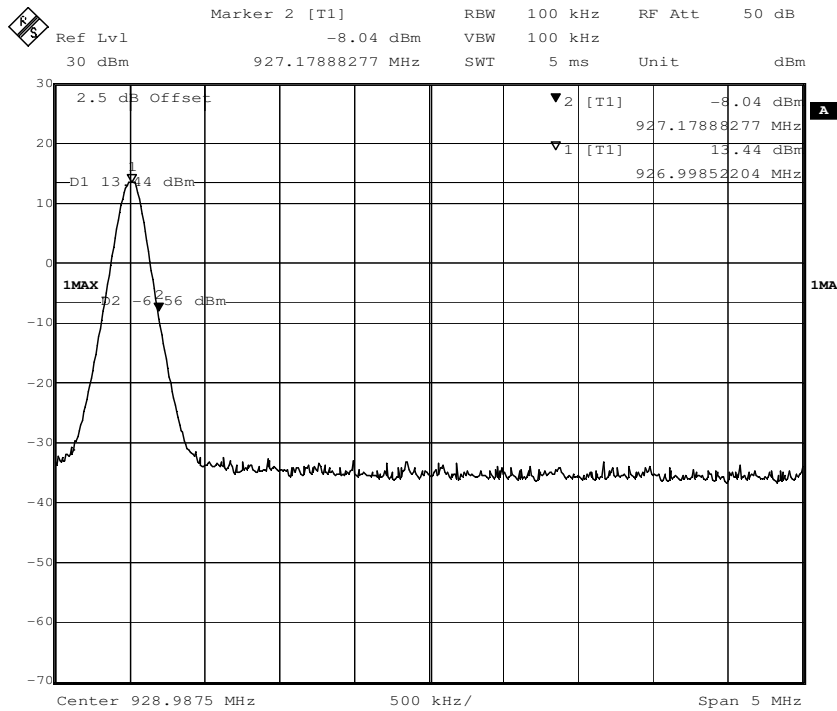

**Test result: The unit does meet the FCC requirements.**

**--End of Report--**