

## EMC TEST REPORT

### No. 140701439SHA-001

Applicant : TELE RADIO AB  
Datavägen 21, SE-436 32 Askim, Sweden

Manufacturer : TELE RADIO AB  
Datavägen 21, SE-436 32 Askim, Sweden

Equipment : RF Module

Type/Model : D00007-03, D7-3, CL-TR338-1

#### SUMMARY

The equipment complies with the requirements according to the following standard(s):

**47CFR Part 15 (2014):** Radio Frequency Devices

**RSS 210 (Issue 8, December 2010):** Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment


**RSS-Gen (Issue 4, November 2014):** General Requirements and Information for the Certification of Radio Apparatus

**ANSI C63.4 (2009):** American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

**ANSI C63.10 (2009):** American National Standard for Testing Unlicensed Wireless Devices


Date of issue: Dec 10, 2014

Prepared by:

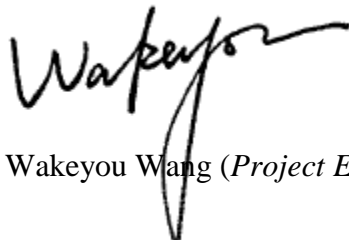

Wakeyou Wang (*Project Engineer*)

Reviewed by:

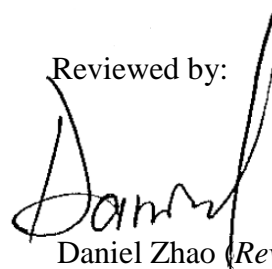

Daniel Zhao (*Reviewer*)



**FCC ID: ONFC1406A**  
**IC: 4807A-C1406A**

## **Description of Test Facility**

Name: Intertek Testing Services Limited Shanghai  
Address: Building 86, No. 1198 Qinzhou Rd., North, Shanghai 200233, P.R. China

FCC Registration Number: 236597  
IC Assigned Code: 2042B-1

Name of contact: Jonny Jing  
Tel: +86 21 61278271  
Fax: +86 21 54262353

## Content

<b>SUMMARY</b> .....	<b>1</b>
<b>DESCRIPTION OF TEST FACILITY</b> .....	<b>2</b>
<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
1.1 Applicant Information.....	4
1.2 Identification of the EUT .....	4
1.3 Technical specification .....	5
1.4 Mode of operation during the test / Test peripherals used.....	5
<b>2. TEST SPECIFICATION</b> .....	<b>6</b>
2.1 Instrument list .....	6
2.2 Test Standard .....	6
<b>3. FUNDAMENTAL EMISSION</b> .....	<b>8</b>
3.1 Test limit .....	8
3.2 Test Configuration .....	8
3.3 Test procedure and test setup.....	8
3.4 Test protocol .....	9
<b>4. SPURIOUS EMISSION</b> .....	<b>10</b>
4.1 Test limit .....	10
4.2 Test Configuration .....	10
4.3 Test procedure and test setup.....	11
4.4 Test protocol .....	12
<b>5. FREQUENCY STABILITY (TEMPERATURE VARIATION)</b> .....	<b>18</b>
5.1 Test limit .....	18
5.2 Test Configuration .....	18
5.3 Test procedure and test setup.....	18
5.4 Test protocol .....	19
<b>6. FREQUENCY STABILITY (VOLTAGE VARIATION)</b> .....	<b>20</b>
6.1 Test limit .....	20
6.2 Test Configuration .....	20
6.3 Test procedure and test setup.....	20
6.4 Test protocol .....	21
<b>7. POWER LINE CONDUCTED EMISSION</b> .....	<b>22</b>
7.1 Limit.....	22
7.2 Test configuration .....	22
7.3 Test procedure and test set up.....	23
7.4 Test protocol .....	24
<b>8. 20DB BANDWIDTH</b> .....	<b>25</b>
8.1 Limit.....	25
8.2 Test configuration .....	25
8.3 Test procedure and test set up.....	25
8.4 Test protocol .....	26
<b>9. OCCUPIED BANDWIDTH</b> .....	<b>27</b>
9.1 Limit.....	27
9.2 Test configuration .....	27
9.3 Test procedure and test set up.....	27
9.4 Test protocol .....	28



## **1. General Information**

### **1.1 Applicant Information**

Applicant: TELE RADIO AB  
Datavägen 21, SE-436 32 Askim, Sweden

Name of contact: Jesper Ribbe

Tel: +46 31 7485460

Fax: +46 31 685464

Manufacturer: TELE RADIO AB  
Datavägen 21, SE-436 32 Askim, Sweden

Date of sample receipt: Aug 1, 2014

Sample Identification No: /

Date of test: Aug 1, 2014 ~ Nov 20, 2014

### **1.2 Identification of the EUT**

Equipment: RF Module

Type/model: D00007-03, D7-3, CL-TR338-1

FCC ID: ONFC1406A

IC: 4807A-C1406A



### 1.3 Technical specification

Operation Frequency Band:	13.56MHz - 13.56MHz
Modulation:	ASK
Antenna Designation:	PCB antenna
Rating:	DC 2.8 - 4.2V (powered by the host device)
Description of EUT:	There are three models. They are electrically identical except for different model names. Therefore, the model D00007-03 was chosen to perform test as representative. The EUT is a RFID Module.
Channel Description:	One channel only, namely 13.56MHz.

### 1.4 Mode of operation during the test / Test peripherals used

For the EUT can be configured in any axes as the user wants, it was set up in three axis (X, Y, Z) and performed test. The three axes were tested one by one while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

Host device: Transceiver T14-4 manufactured by TELE RADIO AB



## 2. Test Specification

### 2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESCS 30	R&S	EC 2107	2014-10-21	2015-10-20
Test Receiver	ESIB 26	R&S	EC 3045	2014-10-20	2015-10-19
A.M.N.	ESH2-Z5	R&S	EC 3119	2014-1-9	2015-1-8
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2014-4-27	2015-4-26
Horn antenna	HF 906	R&S	EC 3049	2013-4-28	2015-4-27
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2014-4-12	2015-4-11
Semi-anechoic chamber	-	Albatross project	EC 3048	2014-5-11	2015-5-10
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2014-1-8	2015-1-7
Power sensor / Power meter	N1911A/N1921A	Agilent	EC4318	2014-04-12	2015-04-11
Loop Antenna	FMZB 1516	SCHWARZB ECK	/	2013-11-29	2014-11-28
Temperature Camber	SETH-E	tayasaf	EC4315	2014-4-9	2015-4-9

### 2.2 Test Standard

47CFR Part 15 (2014)  
RSS 210 (Issue 8, December 2010)  
RSS-Gen (Issue 4, November 2014)  
ANSI C63.4 (2009)  
ANSI C63.10 (2009)

### 2.3 Test Summary

**This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.**

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Fundamental emission	15.225(a) (b) (c)	RSS210 Clause A2.6 (a) (b) (c)	Pass
Spurious emission	15.225(d)	RSS210 Clause A2.6(d)	Pass
Frequency stability	15.225(e)	RSS210 Clause A2.6	Pass
Power line conducted emission	15.207	RSS-Gen Clause 8.8	Pass
20dB Bandwidth	15.215(c)	/	Pass
Occupied Bandwidth	/	RSS-Gen Clause 6.6	Pass

### 3. Fundamental Emission


Test result: **PASS**

#### 3.1 Test limit

3.1.1 The fundamental emission shall comply with the limits below:

Fundamental Frequency (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50

#### 3.2 Test Configuration

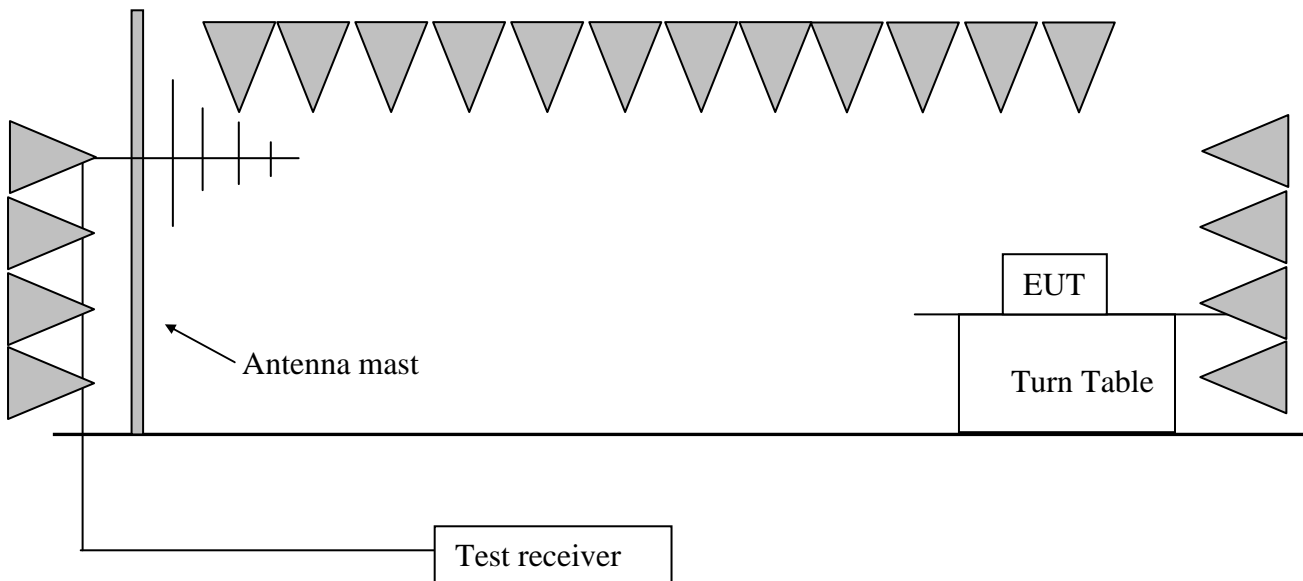

#### 3.3 Test procedure and test setup


The measurement was applied in a 3m semi-anechoic chamber.

The center of the loop antenna shall be 1 m above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The X, Y and Z polarities of the loop antenna were assessed and the max hold reading of the three axes was listed in this report.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as: RBW = 10kHz, VBW = 30kHz



### 3.4 Test protocol

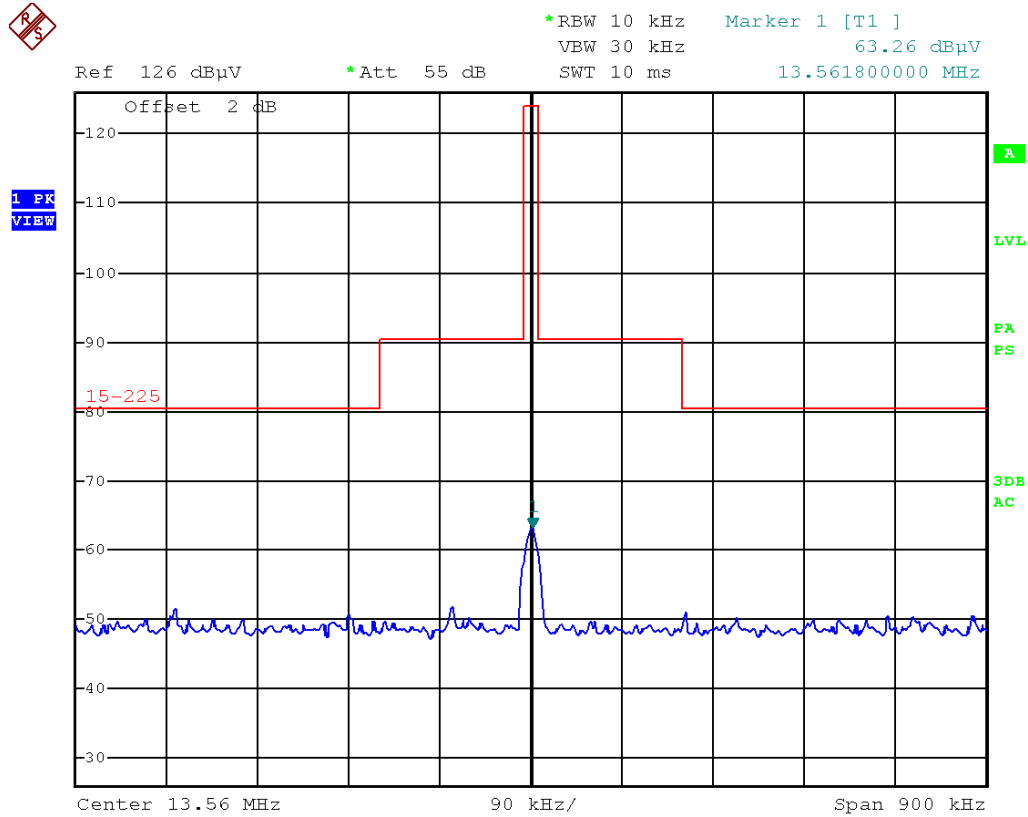

Date: 3.NOV.2014 09:37:18

Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin	Detector
13.56	11.20	63.30	124.00	60.70	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = limit - Corrected Reading

Example: Assuming Antenna Factor = 20.20dB/m, Cable Loss = 2.00dB,

Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.

Then Correct Factor = 20.20 + 2.00 = 22.20dB/m; Corrected Reading = 10dBuV + 22.20dB/m = 32.20dBuV/m; Margin = 40.00dBuV/m - 32.20dBuV/m = 7.80dB.

## 4. Spurious Emission


Test result: **PASS**

### 4.1 Test limit

The emission shall test through the 10th harmonic or to 40GHz, whichever is lower. For emission outside the band 13.110–14.010 MHz, it should comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
0.009 - 0.490	147.6-20lg (F <sub>kHz</sub> )	3
0.490 - 1.705	127.6-20lg (F <sub>kHz</sub> )	3
1.705 - 30.0	69.5	3
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

### 4.2 Test Configuration

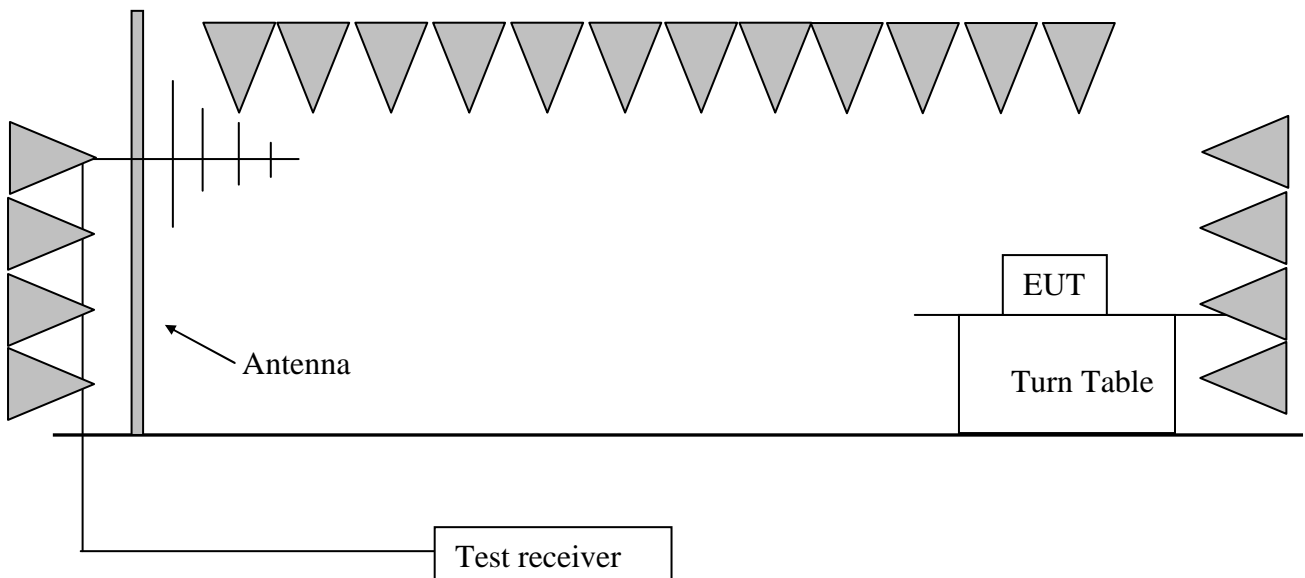

### 4.3 Test procedure and test setup

The measurement was applied in a 3m semi-anechoic chamber.

For emission test lower than 30MHz, The center of the loop antenna shall be 1 m above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level.

Both X, Y and Z polarities of the loop antenna were assessed and the highest reading was listed in this report.

For emission test higher than 30MHz, the EUT and simulators were placed on a 0.8m high turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level. Both horizontal and vertical polarities of the receiving antenna were assessed and the higher reading was listed in this report.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW = 300Hz, VBW = 1kHz (9kHz~0.15MHz)

RBW = 10kHz, VBW = 30kHz (0.15MHz~30MHz)

RBW = 100kHz, VBW = 300kHz (30MHz~1000MHz)


#### 4.4 Test protocol

Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin	Detector
X	6.79	11.40	37.30	69.50	32.20	PK
Y	24.25	10.50	30.90	69.50	38.60	PK
Z	9.36	11.30	28.70	69.50	40.80	PK
H	339.08	16.40	32.40	46.00	13.60	PK
H	366.39	17.40	41.30	46.00	4.70	QP
H	652.04	22.80	39.60	46.00	6.40	PK
V	366.29	17.40	41.10	46.00	4.90	PK
V	652.04	22.80	42.40	46.00	3.60	QP
V	908.64	25.10	37.80	46.00	8.20	PK


- Remark: 1. Correct Factor = Antenna Factor + Cable Loss  
 2. Corrected Reading = Original Receiver Reading + Correct Factor  
 3. Margin = limit - Corrected Reading  
 4. The QP detector is applied only while the Pulse-repetition frequency of assessed frequency is higher than 20Hz.

Example: Assuming Antenna Factor = 20.20dB/m, Cable Loss = 2.00dB,  
 Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.  
 Then Correct Factor = 20.20 + 2.00 = 22.20dB/m; Corrected Reading = 10dBuV + 22.20dB/m = 32.20dBuV/m; Margin = 40.00dBuV/m - 32.20dBuV/m = 7.80dB.


X axis, 9kHz - 30MHz

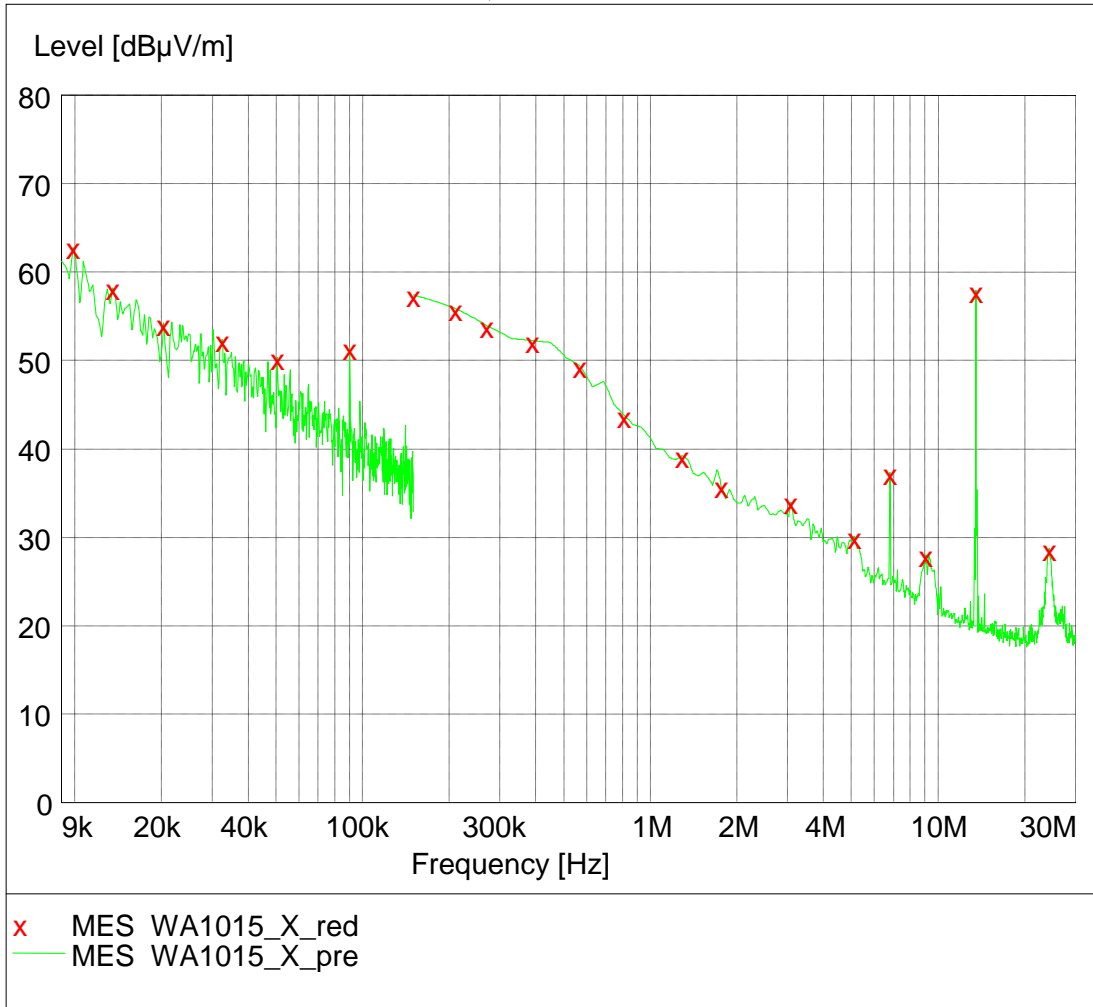


Y axis, 9kHz - 30MHz

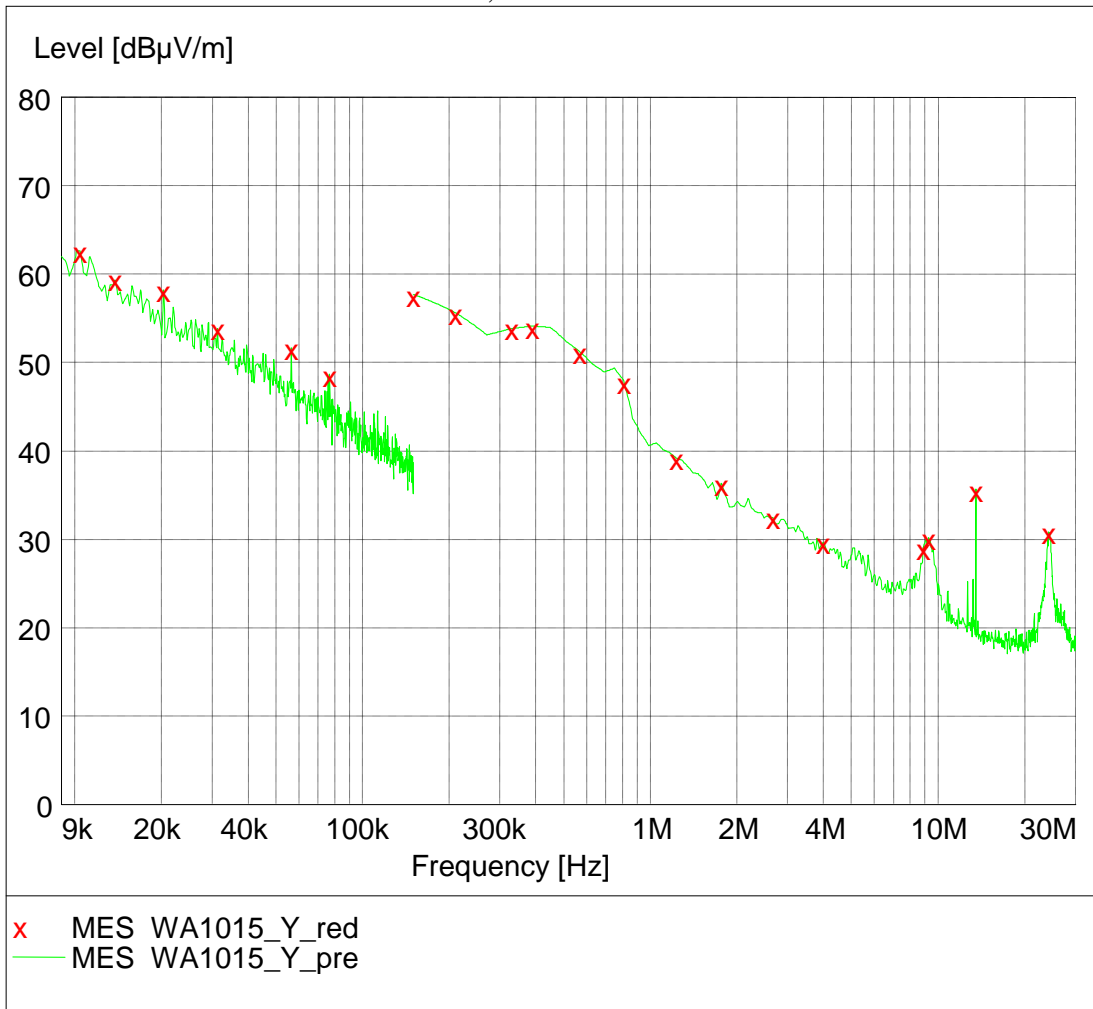

Z axis, 9kHz - 30MHz

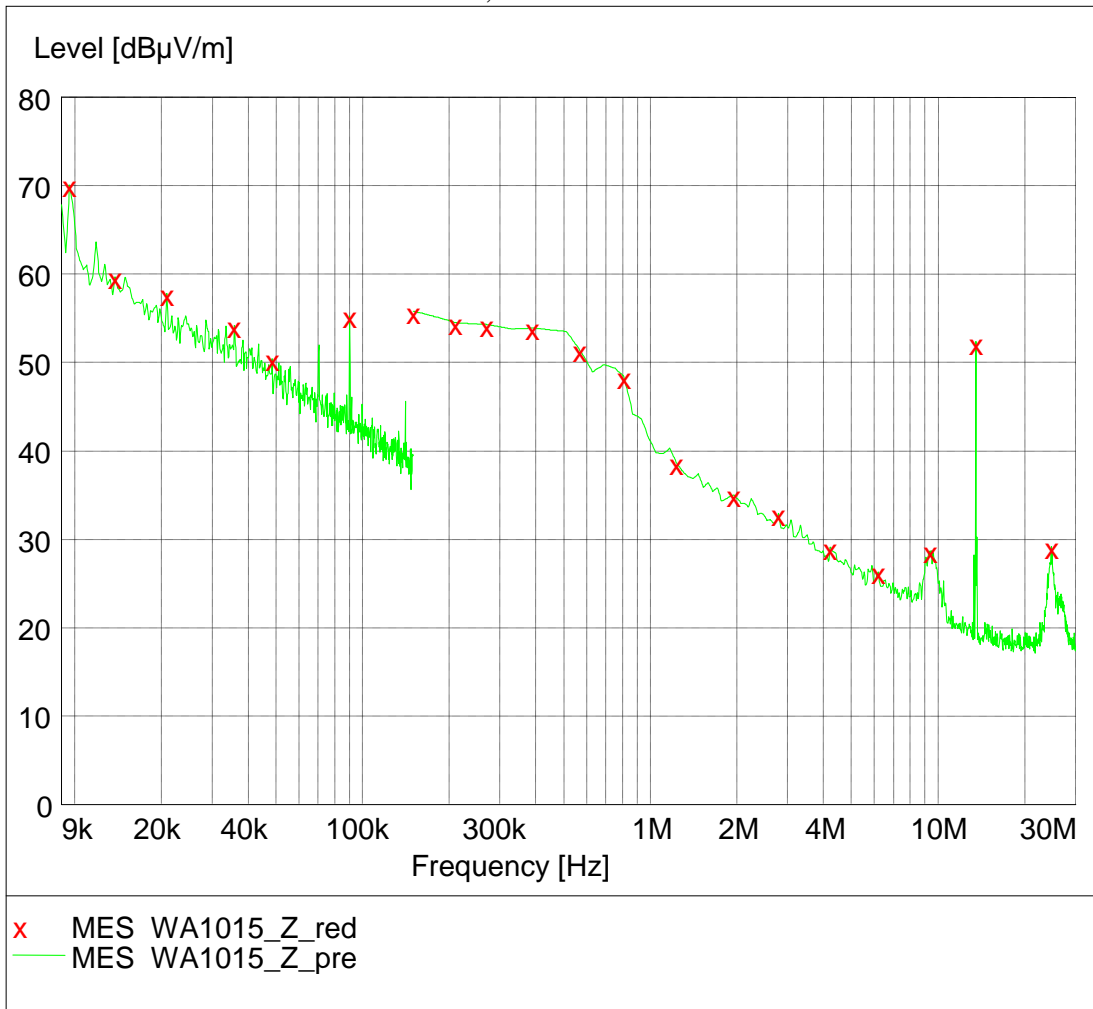


Horizontal, higher than 30MHz

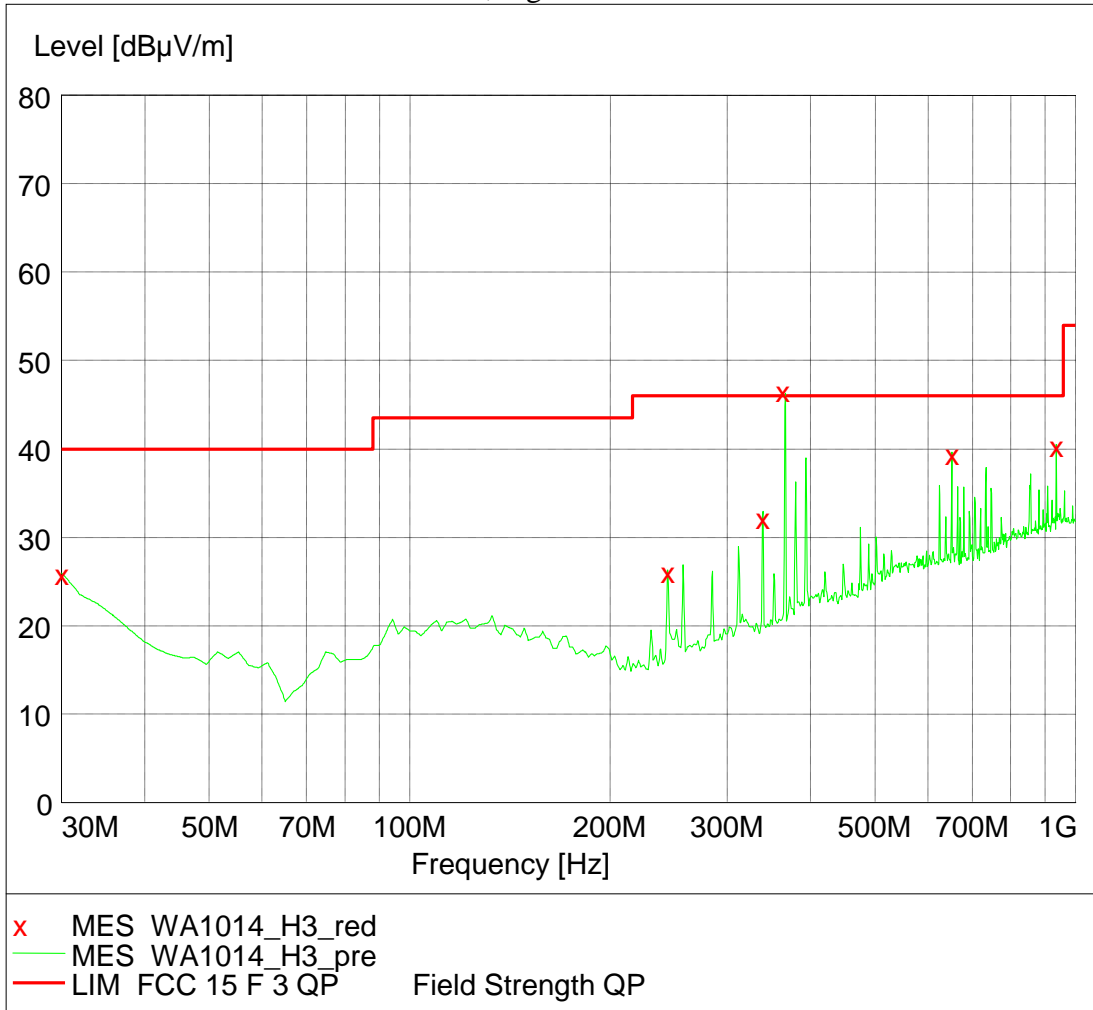



Vertical, higher than 30MHz

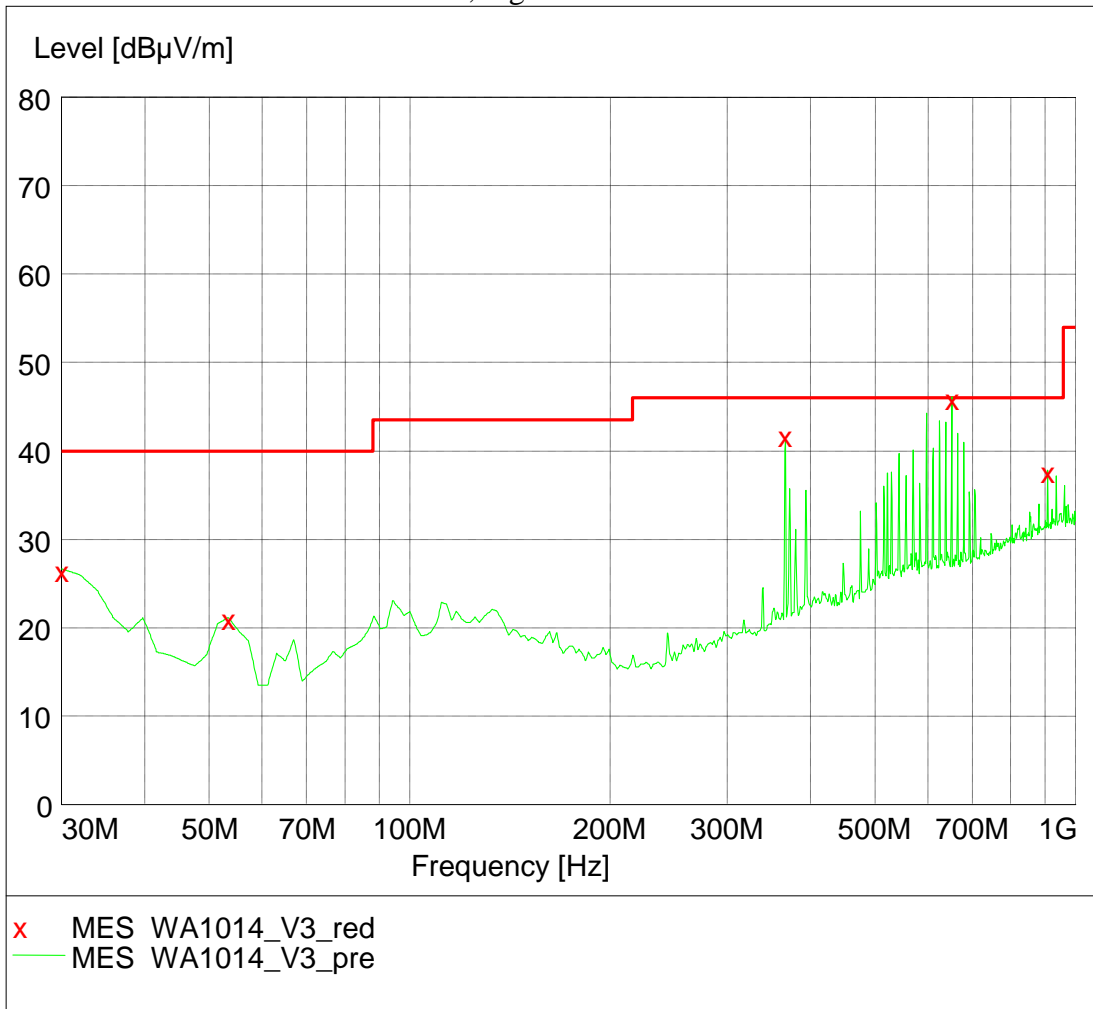


## 5. Frequency Stability (Temperature Variation)

Test result: PASS

### 5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage.

### 5.2 Test Configuration

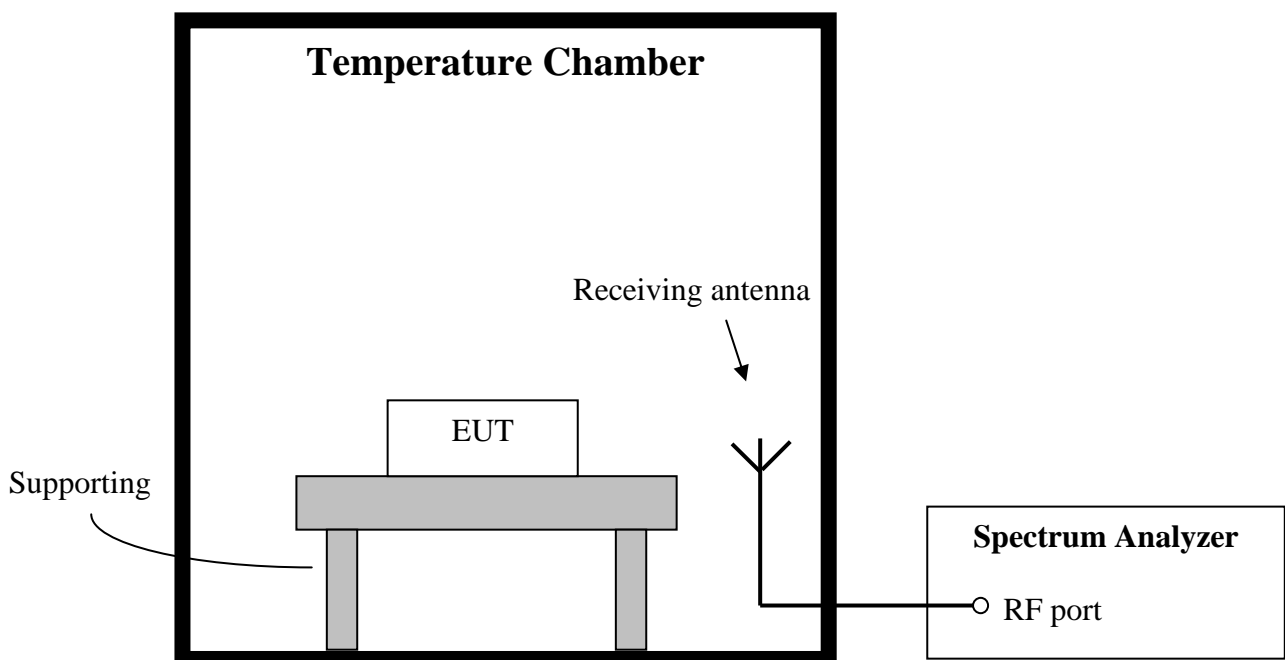

### 5.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.1.

5.4 Test protocol

Voltage (V)	Temp (°C)	Freq measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
3.3	-20	13.56007	13.560	0.0005	0.01
	-10	13.56006		0.0004	
	0	13.56003		0.0002	
	10	13.56003		0.0002	
	20	13.56003		0.0002	
	30	13.56003		0.0002	
	40	13.56003		0.0002	
	50	13.56003		0.0002	


## 6. Frequency Stability (Voltage Variation)

**Test result:** PASS

### 6.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 6.2 Test Configuration

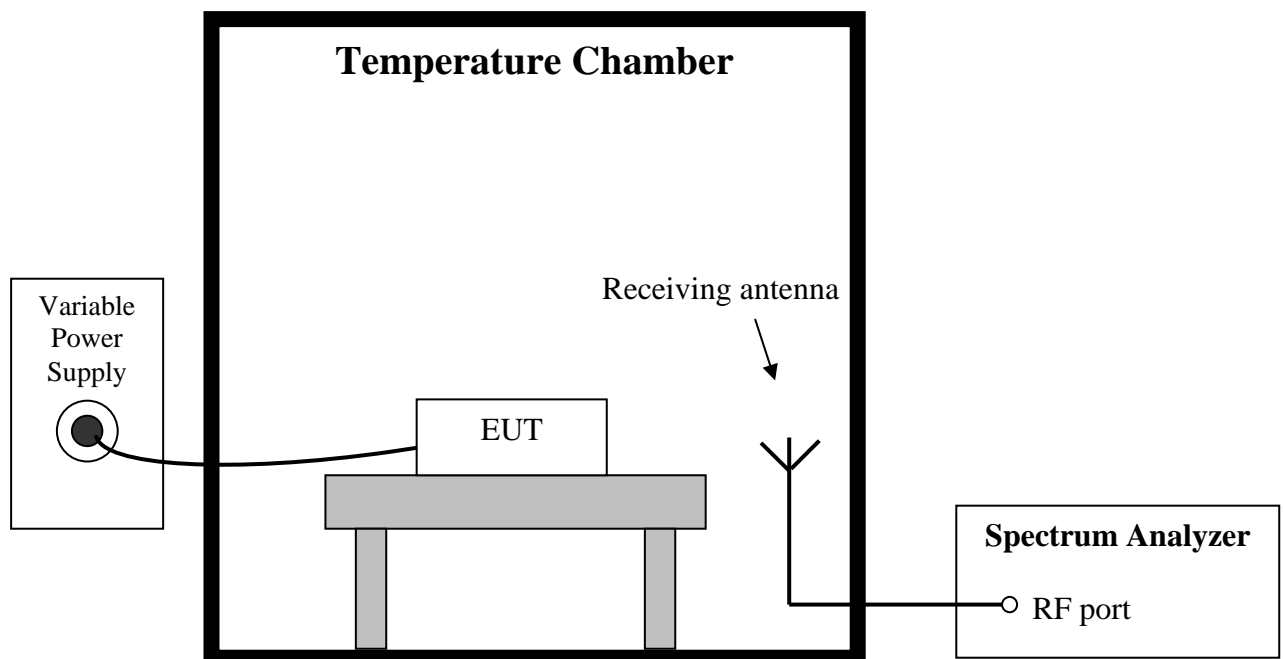

### 6.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.2.

#### 6.4 Test protocol

Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	3.3	13.56003	13.560	0.0002	0.01
	2.38	13.56003		0.0002	
	4.83	13.56003		0.0002	

## 7. Power line conducted emission


**Test result:** Pass

### 7.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 7.2 Test configuration

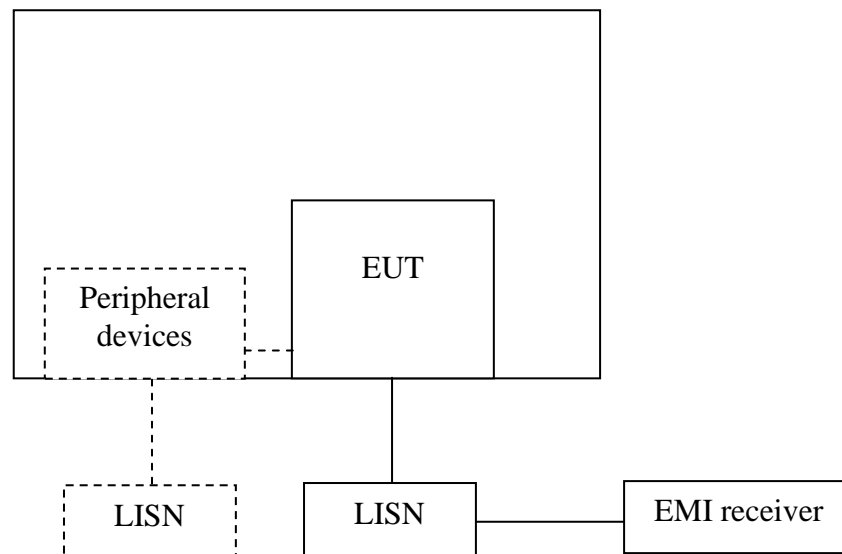

For table top equipment, wooden support is 0.8m height table

For floor standing equipment, wooden support is 0.1m height rack.


### 7.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a  $50\Omega/50\mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50\Omega/50\mu\text{H}$  coupling impedance with  $50\Omega$  termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

Dummy load is applied according to KDB 174176 (RF port is terminated with a resistor).

### 7.4 Test protocol

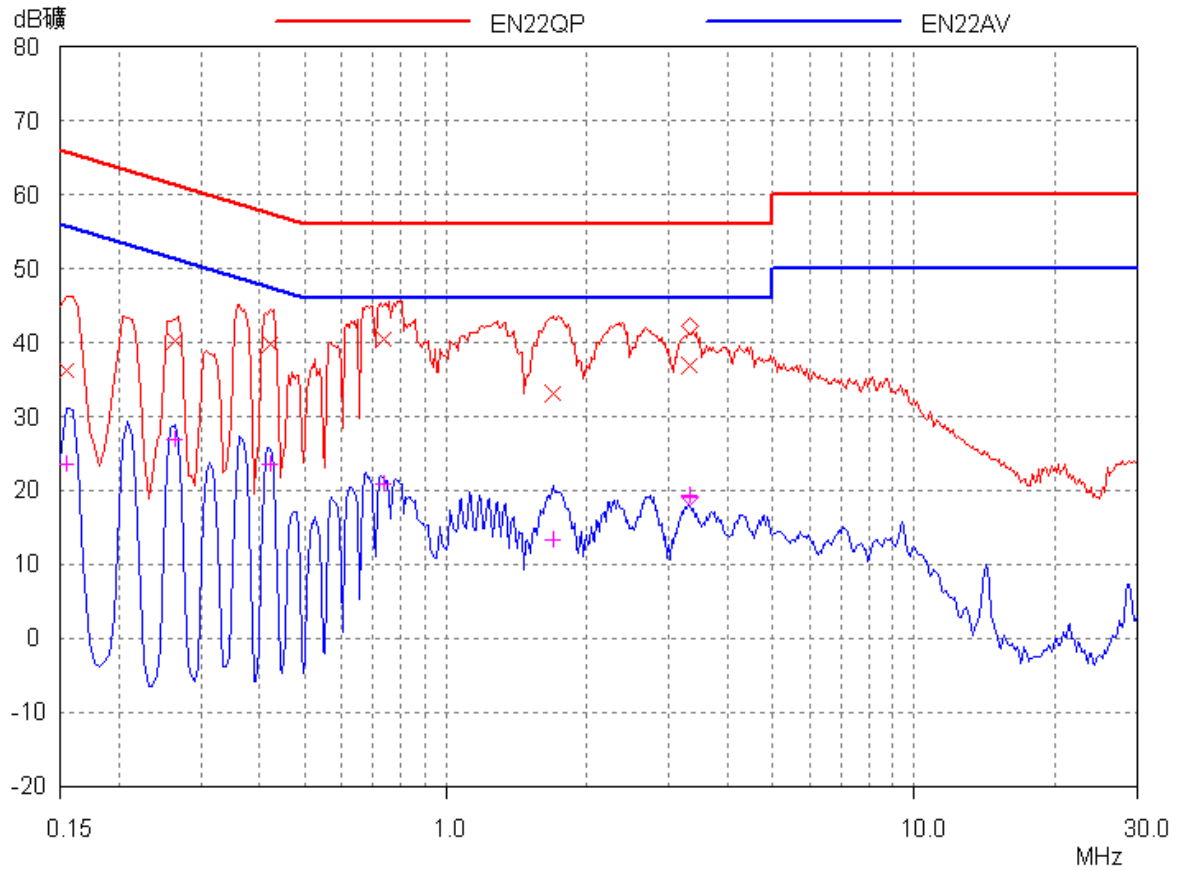

Frequency (MHz)	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
0.15 (N)	3.00	36.21	23.46	65.75	55.75	29.54	32.29
0.26 (L)	3.00	40.20	26.92	61.35	51.35	21.15	24.43
0.42 (N)	3.00	39.73	23.44	57.45	47.45	17.72	24.01
0.74 (N)	3.00	40.44	20.86	56.00	46.00	15.56	25.14
1.70 (L)	3.00	33.09	13.26	56.00	46.00	22.91	32.74
3.30 (N)	3.00	36.79	19.37	56.00	46.00	19.21	26.63

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).  
2. Margin (dB) = Limit - Corrected Reading.




## 8. 20dB Bandwidth

Test result: Pass

### 8.1 Limit

The 20dB bandwidth should be fallen in the allocated operating frequency range.

### 8.2 Test configuration

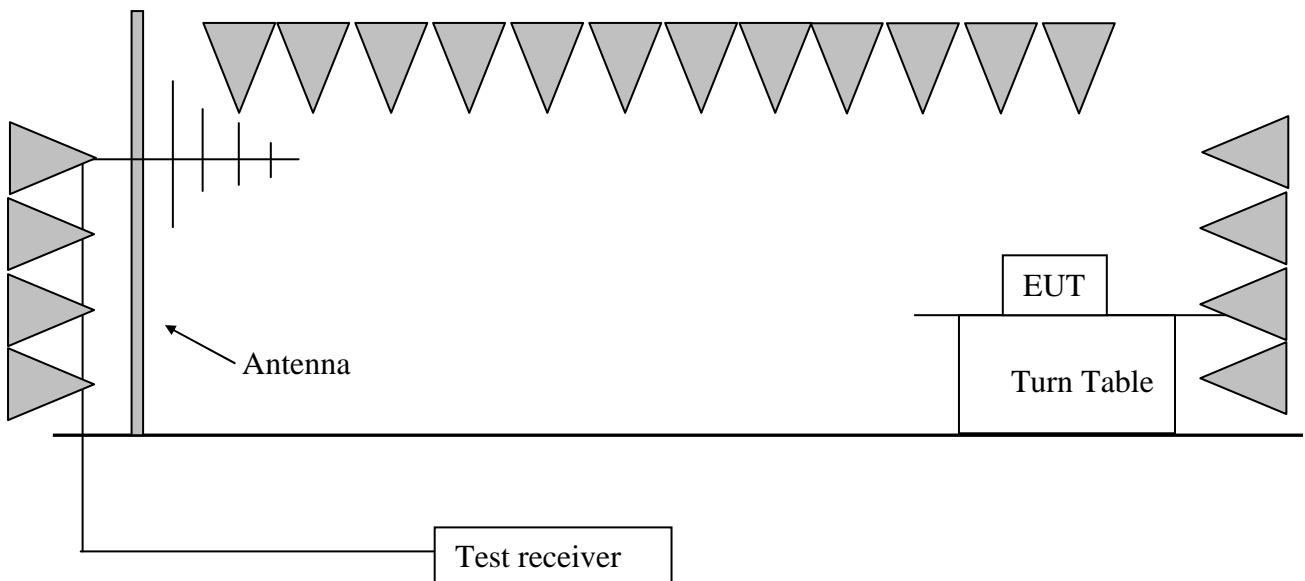

### 8.3 Test procedure and test set up

The measurement was applied in a 3m semi-anechoic chamber.


The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW = 1kHz, VBW = 3kHz

### 8.4 Test protocol

Lower point (MHz)	Higher point (MHz)	Bandwidth (kHz)	Allocated bandwidth (MHz)
13.558	13.563	5	13.110 ~ 14.010

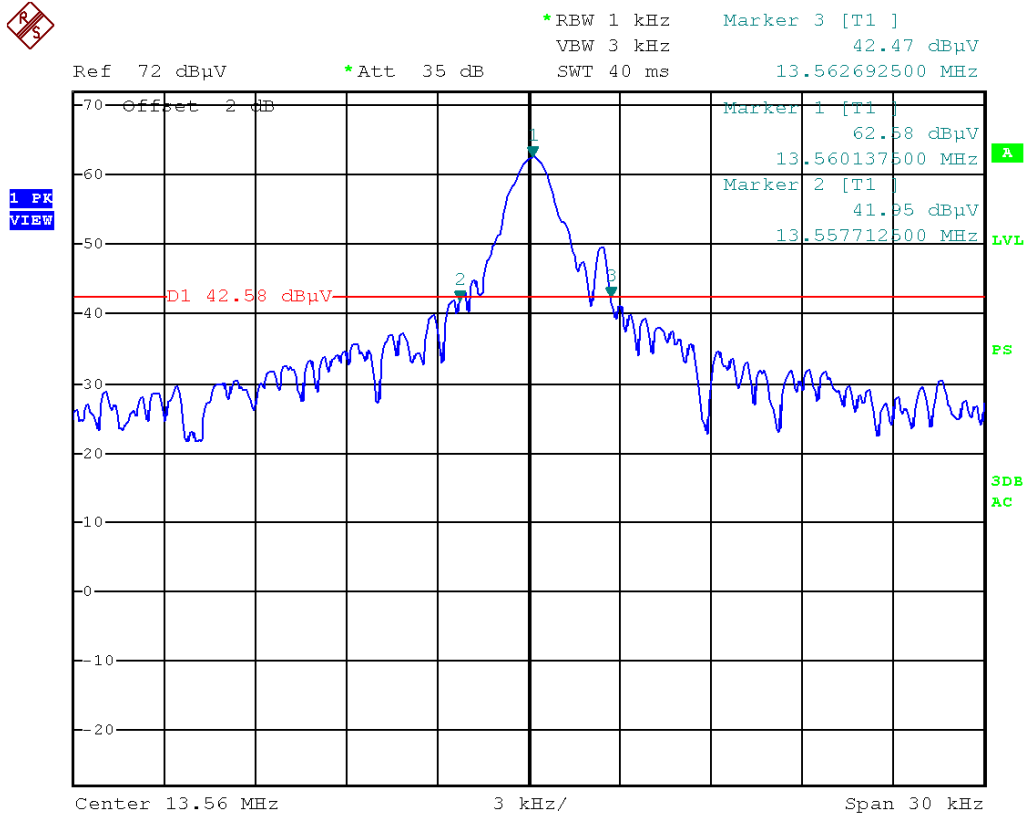


## 9. Occupied Bandwidth

Test result: Tested

### 9.1 Limit

No limit applied.

### 9.2 Test configuration

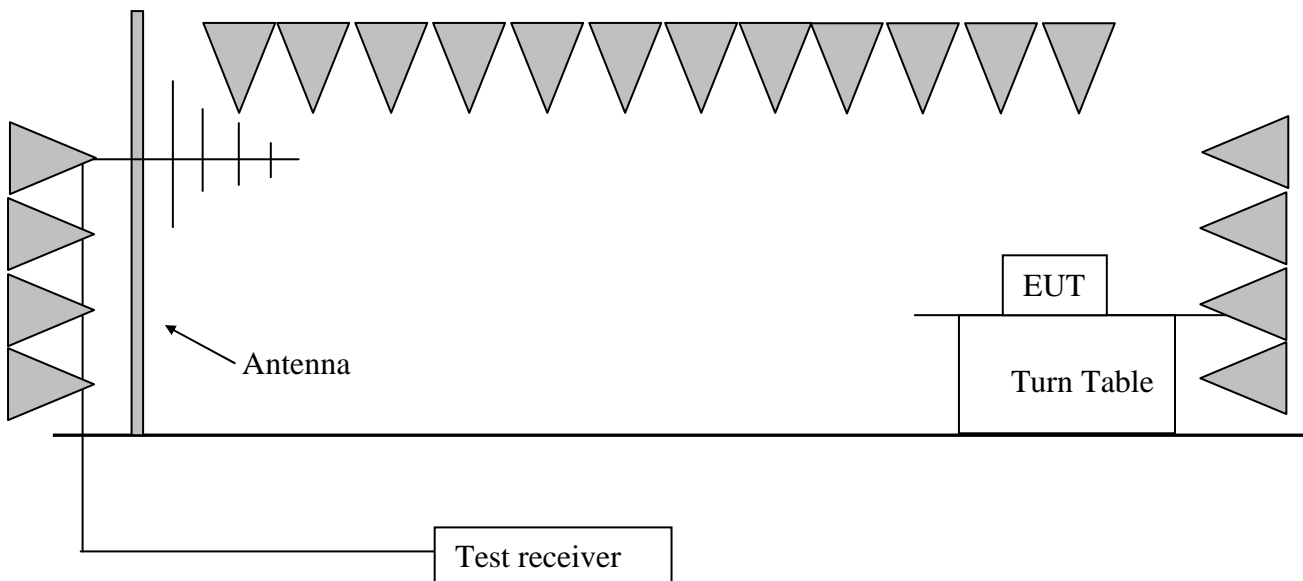

### 9.3 Test procedure and test set up

The measurement was applied in a 3m semi-anechoic chamber.

The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW = 1kHz, VBW = 3kHz

### 9.4 Test protocol

Lower point (MHz)	Higher point (MHz)	99% Occupied Bandwidth (kHz)
13.5593	13.5609	1.60

