

# FCC and ISED Canada Testing of the

Esprit Model Inc.  
JETIDS12US

In accordance with FCC 47 CFR part 15.247 and  
ISED Canada's Radio Standards Specifications  
RSS-247

Prepared for: Esprit Model Inc.  
4253 Pinewood Road  
Melbourne, FL 32934

FCC ID: ONTJETIDS12US  
IC: 10491A-JETIDS12US

## COMMERCIAL-IN-CONFIDENCE

Date: 02. December 2019

Document Number: TP72152278.301 | Version Number: 02



America

Add value.  
Inspire trust.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Authorized Signatory	Peter Walsh	2019 -December-02	
Testing	Thierry Jean-Charles	2019-December-02	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

FCC Accreditation  
Designation Number US1063 Tampa, FL Test Laboratory

Innovation, Science, and Economic Development Canada  
Accreditation  
Site Number 2087A-2 Tampa, FL Test Laboratory

### EXECUTIVE SUMMARY

Samples of this product were tested and found to be in compliance with 15.247 and ISED Canada's RSS-247



A2LA Cert. No. 2955.15

#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America. © TÜV SÜD.

#### DISCLAIMER AND COPYRIGHT

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation. Results of test not covered by our A2LA Accreditation Schedule are marked NUA (Not A2LA Accredited).

TÜV SÜD America  
5610 West Sligh Ave., Suite 100  
Tampa, FL 33634

Phone: 813-284-2715  
[www.tuv-sud-america.com](http://www.tuv-sud-america.com)

TÜV SÜD

TÜV®



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	3
1.3	Brief Summary of Results .....	5
1.4	Product Information .....	6
1.5	Deviations from the Standard.....	9
1.6	EUT Modification Record .....	9
1.7	Test Location .....	9
<b>2</b>	<b>Test Details .....</b>	<b>10</b>
2.1	Antenna Requirements.....	10
2.2	Carrier Frequency Separation.....	11
2.3	Number of Hopping Channels.....	14
2.4	Channel Dwell Time .....	17
2.5	20 dB Bandwidth .....	22
2.6	99% Bandwidth .....	27
2.7	Peak Output Power .....	32
2.8	Band-Edge Compliance of RF Conducted Emissions .....	37
2.9	RF Conducted Spurious Emissions .....	43
2.10	Radiated Spurious Emissions into Restricted Frequency Bands.....	51
2.11	Power Line Conducted Emissions .....	59
<b>3</b>	<b>Test Equipment Information .....</b>	<b>63</b>
3.1	General Test Equipment Used.....	63
<b>4</b>	<b>Diagram of Test Set-ups.....</b>	<b>64</b>
<b>5</b>	<b>Measurement Uncertainty .....</b>	<b>67</b>
<b>6</b>	<b>Accreditation, Disclaimers and Copyright.....</b>	<b>68</b>



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2019-November-25
2	Updated the Product information (Section 1.4.1)	2019-December-02



## 1.2 Introduction

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations Section 15.247 and Innovation Science and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented herein.

Applicant	Esprit Model Inc.
Manufacturer	Esprit Model Inc.
Applicant's Email Address	<a href="mailto:zb@espritmodel.com">zb@espritmodel.com</a>
Model Number(s)	JETIDS12US
Serial Number(s)	1914005990 (Radiated Sample) 1914007890 (RF Conducted Sample)
FCC ID	ONTJETIDS12US
ISED Certification Number	10491A-JETIDS12US
Hardware Version(s)	DS-12-PW-3, DS-12-TFT-3
Software Version(s)	5.02
Number of Samples Tested	2
Test Specification/Issue/Date	US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2019 Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-247 — Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 2, February 2017
Test Plan/Issue/Date	2019-July-24
Order Number	72152278
Date	2019-August-13
Date of Receipt of EUT	2019-July-03
Start of Test	2019-August-16
Finish of Test	2019-November-20
Name of Engineer(s)	Thierry Jean-Charles and Jean N. Rene
Related Document(s)	ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device. US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2019. FCC OET KDB 558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules.



FCC OET KDB 558074 D01 15.247 Meas Guidance v05r02:  
Guidance for Compliance Measurements on Digital  
Transmission System, Frequency Hopping Spread  
Spectrum System, and Hybrid System Devices Operating  
under Section 15.247 of the FCC Rules.



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC Part 15.247 and ISED Canada's RSS-247 is shown below.

**Table 1.3-1: Test Result Summary**

Test Parameter	Test Plan (Yes/No)	Test Result	FCC 47 CFR Rule Part	ISED Canada's RSS	Test Report Page No
Antenna Requirement	Yes	Pass	15.203, 15.204	-----	10
Carrier Frequency Separation	Yes	Pass	15.247(a)(1)	RSS-247 5.1(b)	11
Number of Hopping Channels	Yes	Pass	15.247(a)(1)(iii)	RSS-247 5.1(d)	14
Channel Dwell Time	Yes	Pass	15.247(a)(1)(iii)	RSS-247 5.1(d)	17
20 dB Bandwidth	Yes	Pass	15.247(a)(1)(i)	RSS-247 5.1(a)	22
99% Bandwidth	Yes	Pass	-----	RSS-GEN 6.6	27
Peak Output Power	Yes	Pass	15.247(b)(1)	RSS-247 5.4(b)	32
Band-Edge Compliance of RF Conducted Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	37
RF Conducted Spurious Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	43
Radiated Spurious Emissions into Restricted Frequency Bands	Yes	Pass	15.205, 15.209	RSS-GEN 8.9, 8.10	51
Power Line Conducted Emissions	Yes	Pass	15.207	RSS-GEN 8.8	59



**1.4 Product Information**

**1.4.1 Technical Description**

The EUT is a remote control. The device utilizes a 900 MHz transceiver (LoRa and FSK modes) as well as a 2.4 GHz transceiver. The radios are not capable of transmitting at the same time. The test report documents the compliance of the 2.4 GHz transceiver.

Technical Details

Mode of Operation: FHSS  
 Frequency Range: 2405 MHz - 2480 MHz  
 Number of Channels: 16  
 Channel Separation: 5 MHz  
 Modulations: O-QPSK  
 Antenna Type/Gain: Whip Antenna / 2.1 dBi  
 Input Power: 3.6 VDC Battery, 12 VDC Power Supply

A full description and detailed product specification details are available from the manufacturer.

**Table 1.4.1-1 – Cable Descriptions**

Cable/Port	Description
Power	1.83 m, Not Shielded, 12 VDC Power Supply to EUT
Headphone Audio	1.2 m, Not Shielded, Headphone to EUT

**Table 1.4.1-2 – Support Equipment Descriptions**

Make/Model	Description
Esprit	12 VDC Power Supply, S/N: G1711105043036
N/A	Headphones



**Declaration of Build Status**

EQUIPMENT DESCRIPTION	
Model Name/Number	Jeti Duplex DS-12
Part Number	DS-12US
Hardware Version	DS-12-PW-3, DS-12-TFT-3
Software Version	5.02
FCC ID (if applicable)	ONTJETIDS12US
ISED ID (if applicable)	10491A-JETIDS12US
Technical Description (Please provide a brief description of the intended use of the equipment)	Hand held transmitter for radio controlled models

UN-INTENTIONAL RADIATOR	
Highest frequency generated or used in the device or on which the device operates or tunes	2480MHz
Lowest frequency generated or used in the device or on which the device operates or tunes	400KHz
Class A Digital Device (Use in commercial, industrial or business environment) <input type="checkbox"/>	
Class B Digital Device (Use in residential environment only) <input checked="" type="checkbox"/>	

Power Source			
AC	Single Phase	Three Phase	Nominal Voltage
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	110v
External DC	Nominal Voltage	Maximum Current	
	12v	0.15A	
Battery	Nominal Voltage	Battery Operating End Point Voltage	
	3.3v	4.2v	

EXTREME CONDITIONS			
Maximum temperature	+85	°C	Minimum temperature
			-40 °C

Ancillaries
Please list all ancillaries which will be used with the device.

I hereby declare that the information supplied is correct and complete.

Name: *Zbyněk Hubáček*

Position held: *President*

Date: *11-22-2019*





**1.4.2 Modes of Operation**

The EUT was evaluated in continuous TX mode for the 2.4 GHz transceiver. The test software power setting for the data reported in this document are as follows:

Channels 11-25: Att = 7  
 Channel 26: Att = 15

The device was configured using the worst-case duty cycle configuration as per normal operation.

**1.4.3 Monitoring of Performance**

Preliminary radiated emissions measurements were performed for the EUT in three orthogonal orientations. Additional measurements were performed to determine the antenna port leading to the highest emissions. The measurements reported in this document correspond to the worst-case configuration: EUT flat on the tabletop for the radiated band-edge measurements; EUT set sideways for the radiated spurious emissions.

The EUT RF Conducted measurements were performed with an SMA connector at the U.FL. antenna ports.

The EUT powers off when connected to the AC Mains. The power line conducted emissions evaluation was performed for the EUT off in the charging mode.

**1.4.4 Performance Criteria**

The EUT was evaluated to the requirements of FCC 47 CFR Part 15.247 as well as ISED Canada RSS-247 for the tests documented below.

**Table 1.4.4 -1: Performance Criteria**

Parameter	Requirement
Antenna Requirement	FCC: Section 15.203. 15.204
Carrier Frequency Separation	FCC: Section 15.247(a)(1); ISED Canada:RSS-247 5.1(b)
Number of Hopping Channels	FCC: Section 15.247(a)(1)(iii); ISED Canada: RSS-247 5.1(d)
Dwell Time	FCC; Section 15.247(a)(1)(iii); ISED Canada: RSS-247 5.1(d)
20 dB Bandwidth	FCC: Section 15.247(a)(1)(i); ISED Canada: RSS-247 5.1(a)
99% Bandwidth	ISED Canada: RSS-GEN 6.6
Peak Output Power	FCC: Section 15.247(b)(1); ISED Canada:RSS-247 5.4(b)
Band-Edge Compliance of RF Conducted Emissions	FCC: Section 15.247(d); ISED Canada: RSS-247 5.5
RF Conducted Spurious Emissions	FCC: Section 15.247(d); ISED Canada: RSS-247 5.5
Radiated Spurious Emissions into Restricted Frequency Bands	FCC: Sections 15.205, 15.209; ISED Canada: RSS-GEN 8.9, 8.10
Power Line Conducted Emissions	FCC: Section 15.207; ISED Canada: RSS-GEN 8.8



**1.5 Deviations from the Standard**

The testing was performed without any deviation from the test requirements.

**1.6 EUT Modification Record**

The table below details modifications made to the EUT during the test programme. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted

No modification was necessary to meet the radio requirements. The modifications that were implemented to meet the unintentional emissions requirements are reported in the supplier's declaration of conformity test report.

**1.7 Test Location**

TÜV SÜD Product Service conducted the following tests at our Tampa FL Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Battery Powered Operating		
Antenna Requirement	Thierry Jean-Charles	A2LA
Carrier Frequency Separation	Thierry Jean-Charles	A2LA
Number of Hopping Channels	Thierry Jean-Charles	A2LA
Dwell Time	Thierry Jean-Charles	A2LA
20 dB Bandwidth	Thierry Jean-Charles	A2LA
99% Bandwidth	Thierry Jean-Charles	A2LA
Peak Output Power	Thierry Jean-Charles	A2LA
Band-Edge Compliance of RF Conducted Emissions	Thierry Jean-Charles	A2LA
RF Conducted Spurious Emissions	Thierry Jean-Charles	A2LA
Radiated Spurious Emissions into Restricted Frequency Bands	Thierry Jean-Charles and Jean N. Rene	A2LA
Power Line Conducted Emissions	Thierry Jean-Charles	A2LA

Office Address:

TÜV SÜD America, Inc.  
 5610 W. Sligh Ave, Suite 100  
 Tampa, FL 33634  
 USA



## 2 Test Details

### 2.1 Antenna Requirements

#### 2.1.1 Specification Reference

FCC: Section 15.203, 15.204

#### 2.1.2 Equipment Under Test and Modification State

S/N: 1914007890

#### 2.1.3 Date of Test

8/13/2019

#### 2.1.4 Test Method

N/A

#### 2.1.5 Environmental Conditions

Ambient Temperature	N/A
Relative Humidity	N/A
Atmospheric Pressure	N/A

#### 2.1.6 Test Results

Limit Clause FCC Sections: 15.203, 15,204

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT uses 2.1 dBi whip antennas with u.FL. connectors at the antenna ports. The antennas are internal to the device. The device meets the antenna requirements of FCC Section 15.203.

#### 2.1.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

As this was a visual inspection, no test equipment was used.



## **2.2 Carrier Frequency Separation**

### **2.2.1 Specification Reference**

FCC: Section 15.247(a)(1)  
ISED Canada: RSS-247 5.1(b)

### **2.2.2 Equipment Under Test and Modification State**

SN: 1914007890

### **2.2.3 Date of Test**

10/18/2019

### **2.2.4 Test Method**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to approximately 30% of the channel spacing.

### **2.2.5 Environmental Conditions**


Ambient Temperature	23.9°C
Relative Humidity	41.2 %
Atmospheric Pressure	1010.8 mbar



## 2.2.6 Test Results


### Battery Powered Operating

#### Limit Clause FCC Part 15.247(a)(1); ISD RSS-247 5.1 (b)

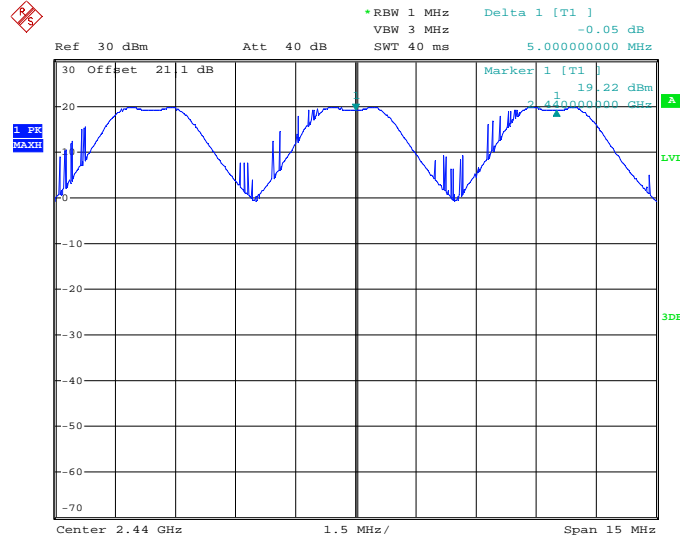

Date: 18.OCT.2019 17:50:07

Figure 2.2.6-1: Carrier Frequency Separation Test Results – AP1

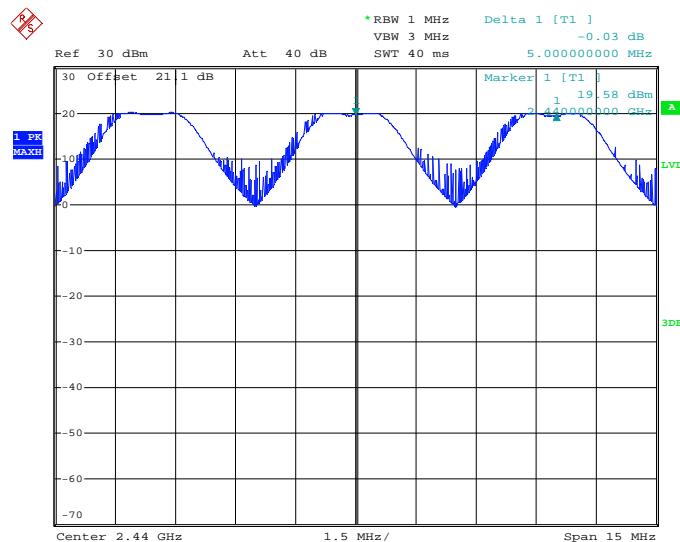

Date: 18.OCT.2019 17:48:39

Figure 2.2.6-2: Carrier Frequency Separation Test Results – AP2



**2.2.7 Test Location and Test Equipment Used**

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	4.50 SP5	24	28-Nov-2019
Attenuator 20dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-20	BEMC02111	N/A	12	27-Jul-2020
Duratest High Frequency Cable Max. frequency 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	12-Oct-2020

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable



## **2.3 Number of Hopping Channels**

### **2.3.1 Specification Reference**

FCC: Section 15.247(a)(1)(iii)  
ISED Canada: RSS-247 5.1(d)

### **2.3.2 Equipment Under Test and Modification State**

SN: 1914007890

### **2.3.3 Date of Test**

10/18/2019

### **2.3.4 Test Method**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture the number of hopping channels. The peak detector max hold function was enabled for the measurements.


### **2.3.5 Environmental Conditions**

Ambient Temperature	23.9°C
Relative Humidity	41.2 %
Atmospheric Pressure	1010.8 mbar

### **2.3.6 Test Results**


Battery Powered Operating

Limit Clause FCC Part 15.247(a)(1)(iii); ISED RSS-247 5.1(d)

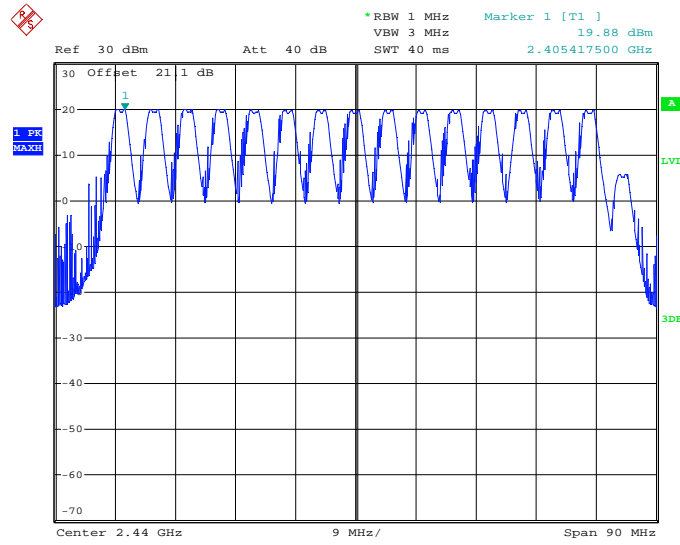

Date: 18.OCT.2019 17:39:40

Figure 2.3.6-1: Number of Hopping Channels Test Results – AP1

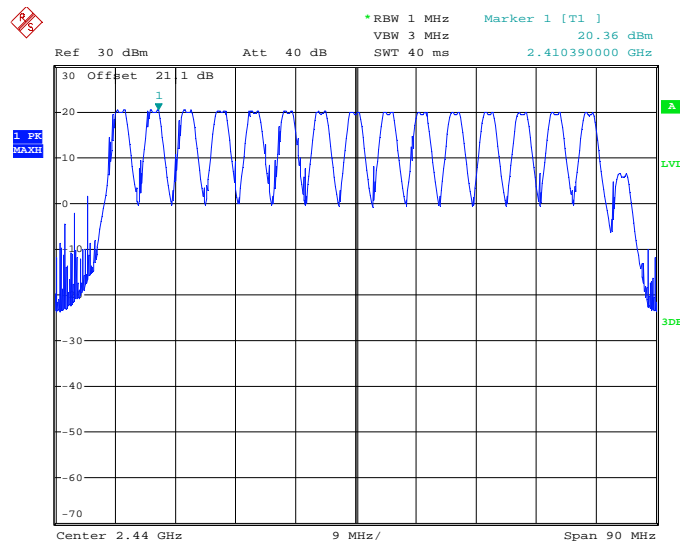

Date: 18.OCT.2019 17:41:35

Figure 2.3.6-2: Number of Hopping Channels Test Results – AP2





**2.3.7 Test Location and Test Equipment Used**

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	4.50 SP5	24	28-Nov-2019
Attenuator 20dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-20	BEMC02111	N/A	12	27-Jul-2020
Duratest High Frequency Cable Max. frequency 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	12-Oct-2020

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable



**2.4 Channel Dwell Time**

**2.4.1 Specification Reference**

FCC: Section 15.247(a)(1)(iii)  
 ISED Canada: RSS-247 5.1(d)

**2.4.2 Equipment Under Test and Modification State**

SN: 1914007890

**2.4.3 Date of Test**

10/21/2019 to 11/20/2019

**2.4.4 Test Method**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set 0 Hz centered on a hopping channel. The RBW was set to less than 30% of the channel spacing and the sweep time adjusted to capture the entire dwell time per channel with peak detector max hold function.

**2.4.5 Environmental Conditions**

Ambient Temperature 24.7°C  
 Relative Humidity 45.3 %  
 Atmospheric Pressure 1015.4 mbar


**2.4.6 Test Results**

Battery Powered Operating

Limit Clause FCC Part 15.247(a)(1)(iii); ISED RSS-247 5.1(d)


**Table 2.4.6-1: Dwell Time Test Results**

Antenna Port	Number of Hops Per Sec. (NHPS)	Number of Hops per Channel Per Sec. (NHPCPS)	Number of hops on a 6.4 s Cycle (NHPC)	Measured Dwell Times (ms)	Dwell Times on a 6.4 s Cycle (ms)	Limit (ms)	Status
AP1	100	6.25	40	2.020	80.80	400	PASS
AP2	100	6.25	40	2.020	80.80	400	PASS

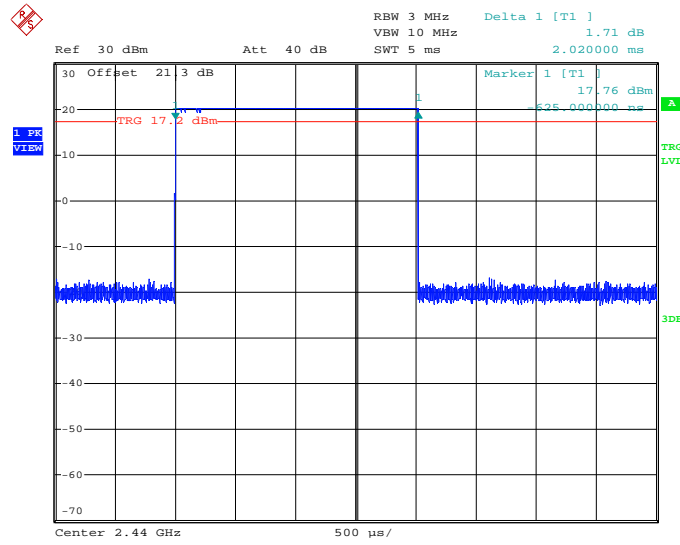


Date: 20.NOV.2019 17:01:17

Figure 2.4.6-1: Channel Dwell Time Test Results – AP1

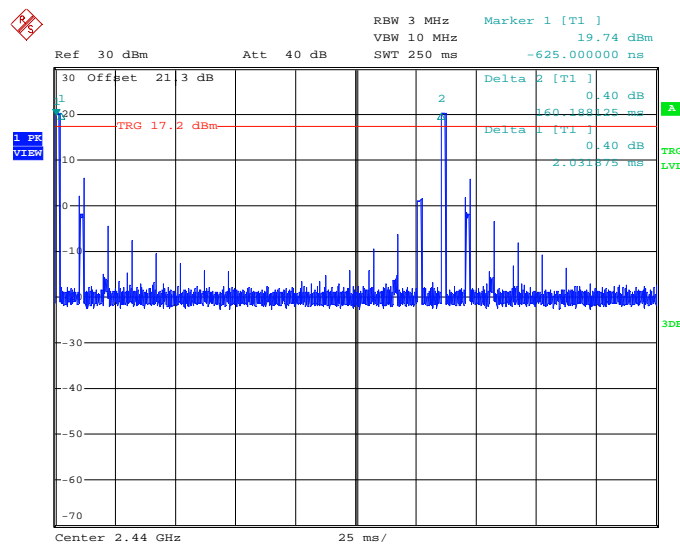


Date: 20.NOV.2019 17:04:50

Figure 2.4.6-2: Channel Dwell Time Test Results – AP1

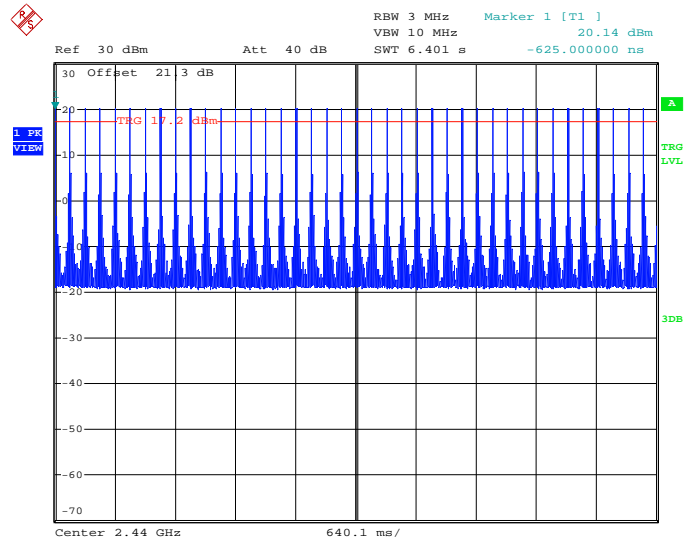


Date: 20.NOV.2019 17:07:24

Figure 2.4.6-3: Channel Dwell Time Test Results – AP1

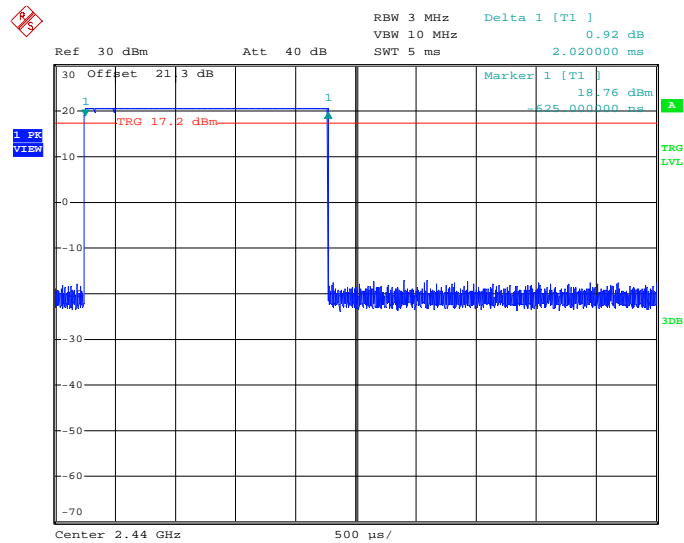


Date: 20.NOV.2019 17:12:07

Figure 2.4.6-4: Channel Dwell Time Test Results – AP2

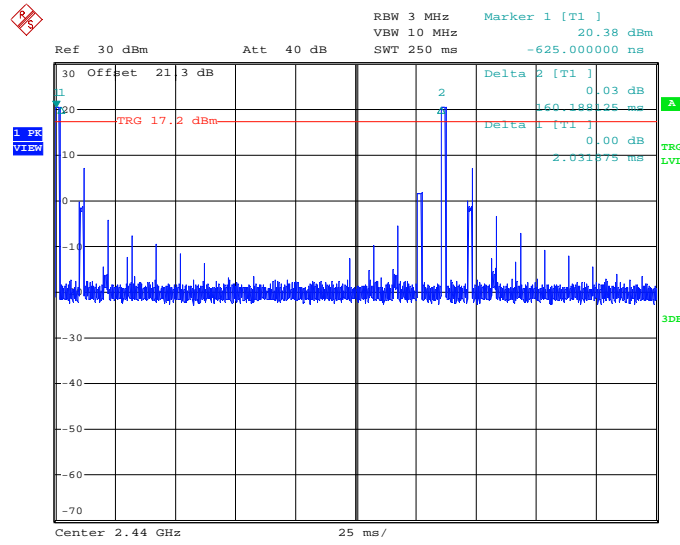

Date: 20.NOV.2019 17:11:09

Figure 2.4.6-5: Channel Dwell Time Test Results – AP2

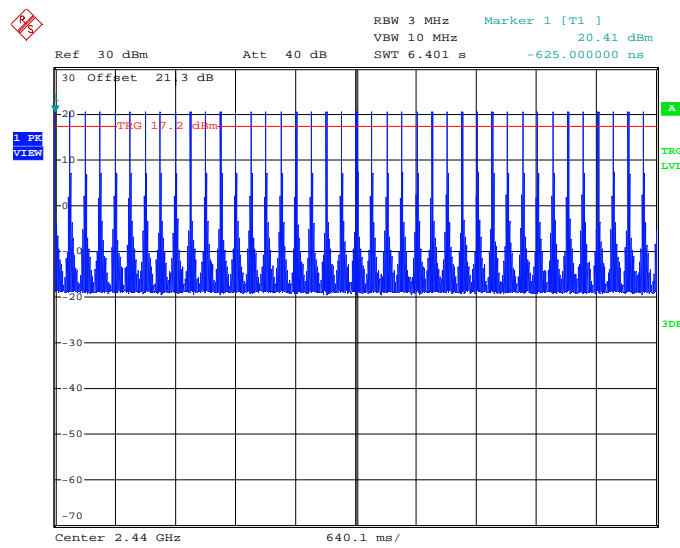

Date: 20.NOV.2019 17:09:21

Figure 2.4.6-6: Channel Dwell Time Test Results – AP2



**2.4.7 Test Location and Test Equipment Used**

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	4.50 SP5	24	28-Nov-2019
Attenuator 20dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-20	BEMC02111	N/A	12	27-Jul-2020
Duratest High Frequency Cable Max. frequency 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	12-Oct-2020

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable



**2.5 20 dB Bandwidth**

**2.5.1 Specification Reference**

FCC: Section 15.247(a)(1)(i)  
 ISED Canada: RSS-247 5.1(a)

**2.5.2 Equipment Under Test and Modification State**

SN: 1914007890

**2.5.3 Date of Test**

10/7/2019 to 10/18/2019

**2.5.4 Test Method**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The spectrum analyzer span was set to 2 to 5 times the estimated bandwidth of the emission. The RBW was set to 1% to 5% of the estimated emission bandwidth. The trace was recorded using the max hold function with a peak detector.

**2.5.5 Environmental Conditions**

Ambient Temperature 23.9°C  
 Relative Humidity 41.2 %  
 Atmospheric Pressure 1010.5 mbar

**2.5.6 Test Results**

Battery Powered Operating


Limit Clause FCC Part 15.247(a)(1)(i), ISED RSS-247 5.1(a)

**Table 2.5.6-1: 20 dB Bandwidth Test Results – AP1**

Frequency (MHz)	20 dB Bandwidth (MHz)
2405	2.48250
2440	2.48125
2480	2.52250





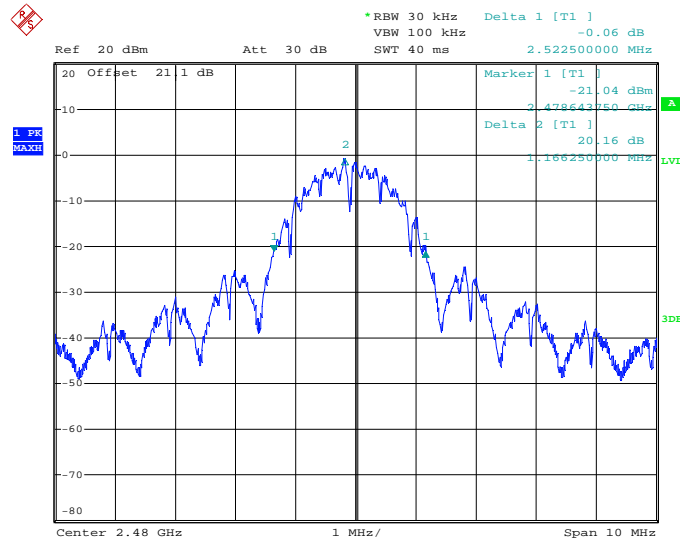


Date: 18.OCT.2019 17:31:12

**Figure 2.5.6-3: 20 dB Bandwidth Test Results – High Channel – AP1**


**Table 2.5.6-2: 20 dB Bandwidth Test Results – AP2**

Frequency (MHz)	20 dB Bandwidth (MHz)
2405	2.43875
2440	2.49875
2480	2.50250

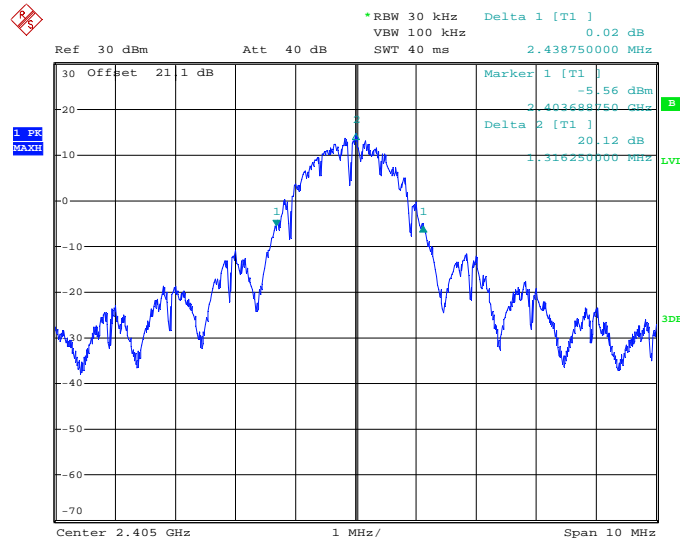


Date: 7.OCT.2019 17:21:21

Figure 2.5.6-4: 20 dB Bandwidth Test Results – Low Channel – AP2

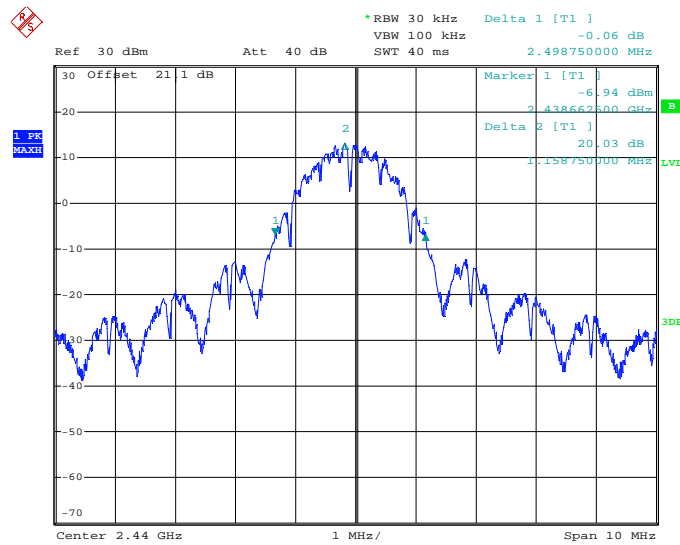

Date: 7.OCT.2019 17:23:55

Figure 2.5.6-5: 20 dB Bandwidth Test Results – Middle Channel – AP2

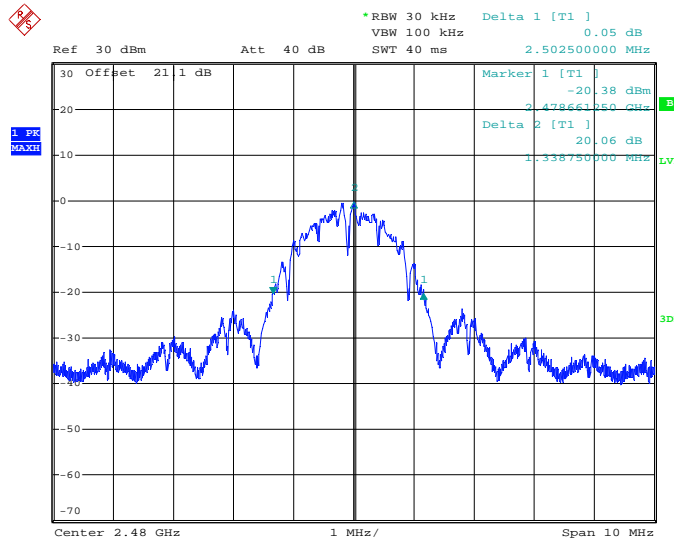

Date: 7.OCT.2019 17:27:05

**Figure 2.5.6-6: 20 dB Bandwidth Test Results – High Channel –AP2**

**2.5.7 Test Location and Test Equipment Used**

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	4.50 SP5	24	28-Nov-2019
Attenuator 20dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-20	BEMC02111	N/A	12	27-Jul-2020
Duratest High Frequency Cable Max. frequency 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	12-Oct-2020

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable



**2.6 99% Bandwidth**

**2.6.1 Specification Reference**

ISED Canada: RSS-GEN 6.6

**2.6.2 Equipment Under Test and Modification State**

SN: 1914007890

**2.6.3 Date of Test**

10/7/2019

**2.6.4 Test Method**

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission. The RBW was set to 1% to 5% of the approximated bandwidth. The occupied 99% bandwidth was measured by using the bandwidth measurement function of the spectrum analyzer with a peak detector.

**2.6.5 Environmental Conditions**

Ambient Temperature 23.8°C  
 Relative Humidity 43.8 %  
 Atmospheric Pressure 1013 mbar


**2.6.6 Test Results**

Battery Powered Operating

Limit Clause ISED RSS-GEN 6.6


**Table 2.6.6-1: 99% Bandwidth Test Results - AP1**

Frequency (MHz)	99% Bandwidth (MHz)
2405	2.2500
2440	2.2800
2480	2.3800

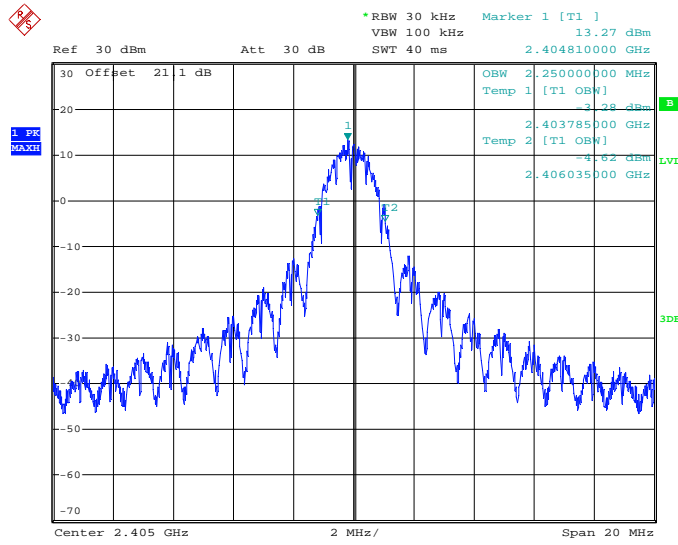


Date: 7.OCT.2019 16:10:50

Figure 2.6.6- 1: 99% Bandwidth Test Results – Low Channel – AP1

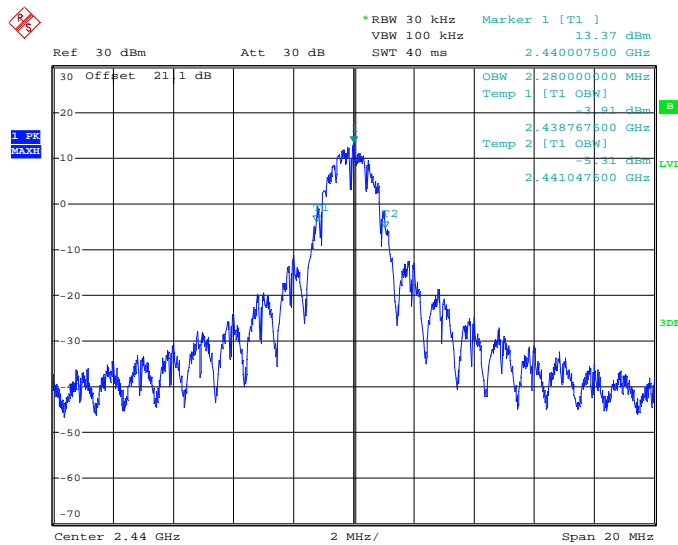

Date: 7.OCT.2019 16:09:38

Figure 2.6.6- 2: 99% Bandwidth Test Results – Middle Channel – AP1

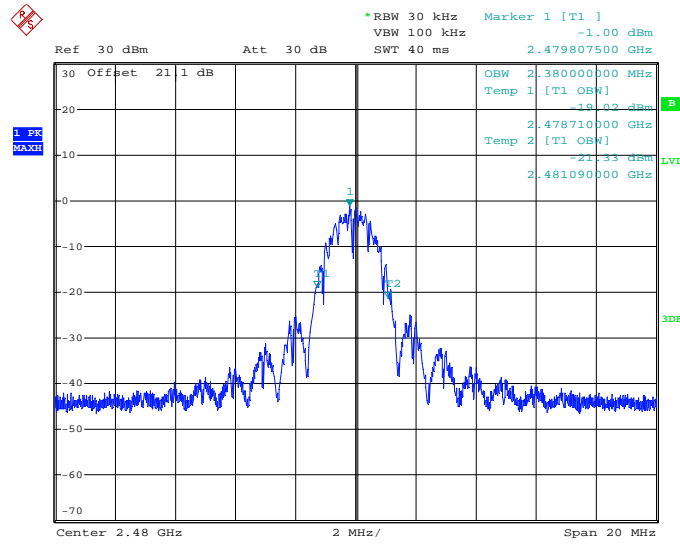


Date: 7.OCT.2019 16:13:24

Figure 2.6.6- 3: 99% Bandwidth Test Results – High Channel – AP1


Table 2.6.6-2: 99% Bandwidth Test Results - AP2

Frequency (MHz)	99% Bandwidth (MHz)
2405	2.2700
2440	2.2525
2480	2.3725

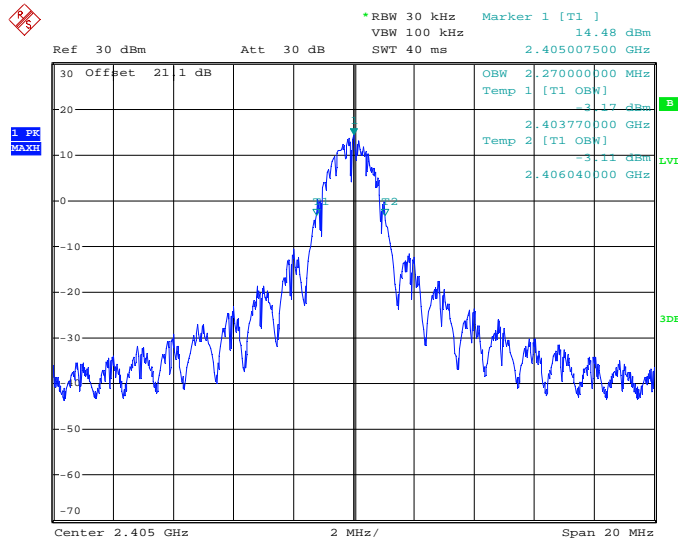


Date: 7.OCT.2019 17:17:19

Figure 2.6.6- 4: 99% Bandwidth Test Results – Low Channel – AP2

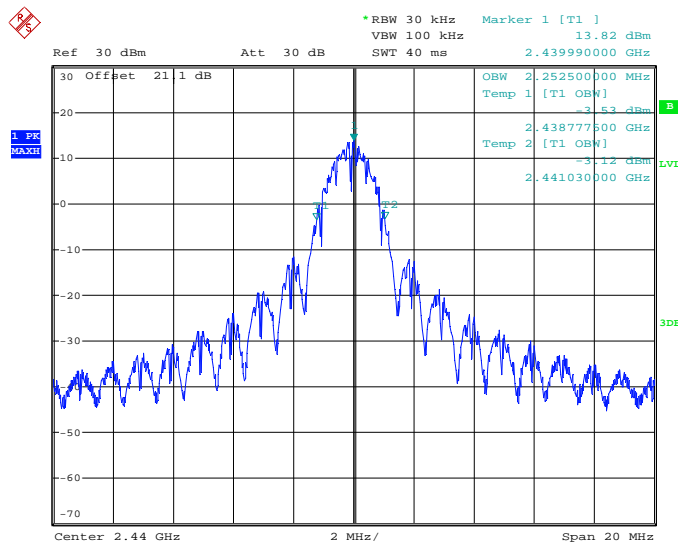

Date: 7.OCT.2019 16:28:08

Figure 2.6.6- 5: 99% Bandwidth Test Results – Middle Channel – AP2

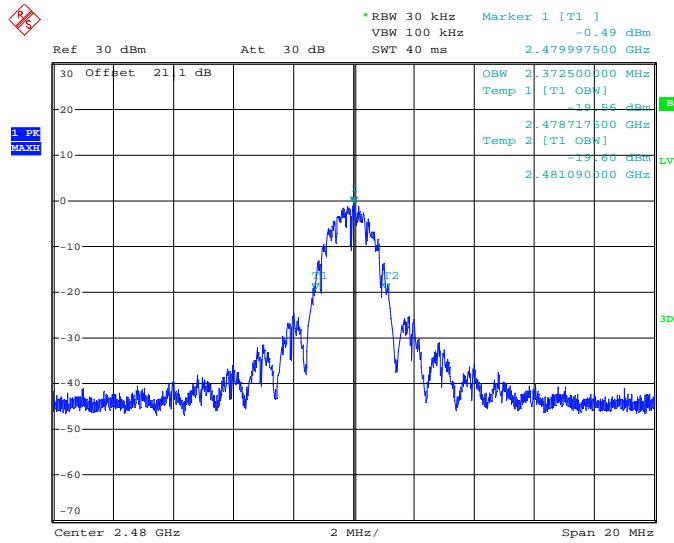

Date: 7.OCT.2019 16:22:43

Figure 2.6.6- 6: 99% Bandwidth Test Results – High Channel – AP2

2.6.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	4.50 SP5	24	28-Nov-2019
Attenuator 20dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-20	BEMC02111	N/A	12	27-Jul-2020
Duratest High Frequency Cable Max. frequency 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	12-Oct-2020

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable





**2.7 Peak Output Power**

**2.7.1 Specification Reference**

FCC Section: 15.247(b)(1)  
 ISED Canada: RSS-247 5.4(b)

**2.7.2 Equipment Under Test and Modification State**

SN: 1914007890

**2.7.3 Date of Test**

10/7/2019

**2.7.4 Test Method**

The fundamental emission output power was measured in accordance with ANSI 63.10 Subclause 7.8.5. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer through suitable attenuation.

**2.7.5 Environmental Conditions**

Ambient Temperature 23.8°C  
 Relative Humidity 43.8 %  
 Atmospheric Pressure 1013.0 mbar

**2.7.6 Test Results**


Battery Powered Operating

Limit Clause FCC Part 15.247(b)(1), ISED RSS-247 5.4(b)

The Maximum Output Power allowed for frequency hopping systems employing at least 75 non-overlapping hopping channels is 1 Watt (30 dBm). For all other frequency hopping systems in the 2400 – 2483.5 MHz band the power limit is 0.125 watts (21 dBm).


**Table 2.7.6-1: Peak Output Power Test Results – AP1**

Frequency (MHz)	Power (dBm)
2405	20.15
2440	19.83
2480	6.26

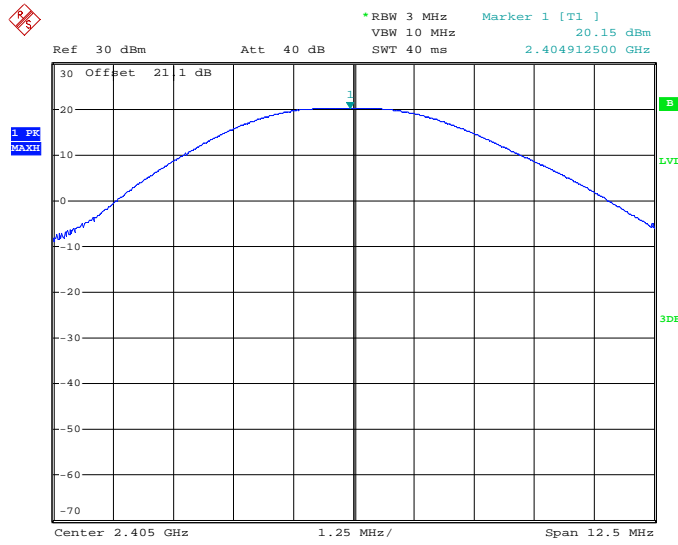


Date: 7.OCT.2019 17:36:38

Figure 2.7.6-1: Peak Output Power Test Results – Low Channel – AP1

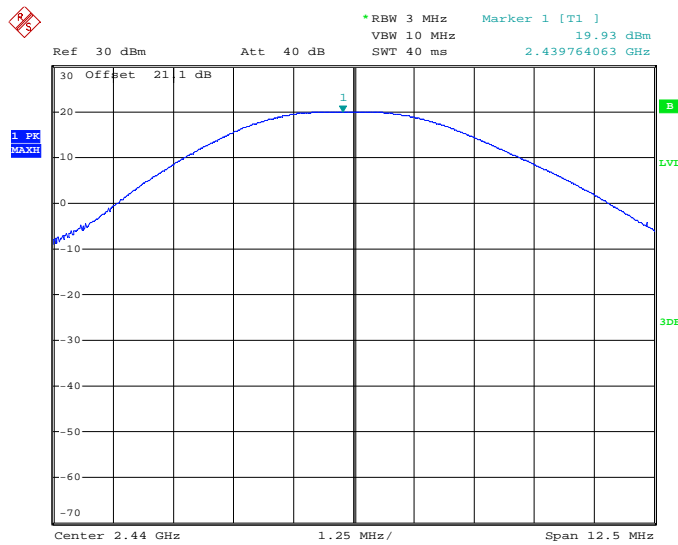

Date: 7.OCT.2019 17:38:22

Figure 2.7.6-2: Peak Output Power Test Results – Middle Channel – AP1

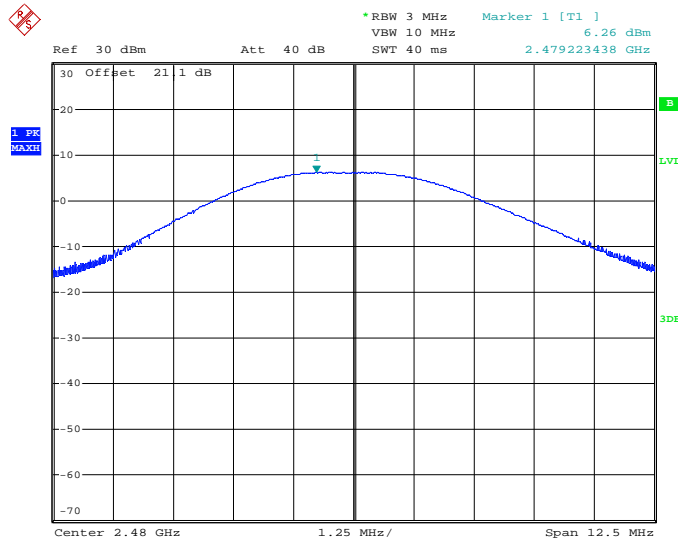


Date: 7.OCT.2019 17:41:09

**Figure 2.7.6-3: Peak Output Power Test Results – High Channel – AP1**


**Table 2.7.6-2: Peak Output Power Test Results – AP2**

Frequency (MHz)	Power (dBm)
2405	20.48
2440	20.08
2480	6.53

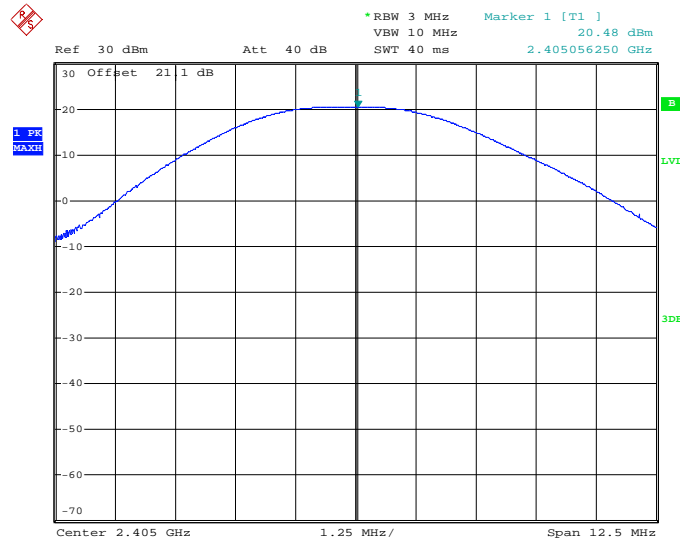


Date: 7.OCT.2019 17:34:29

Figure 2.7.6-4: Peak Output Power Test Results – Low Channel – AP2

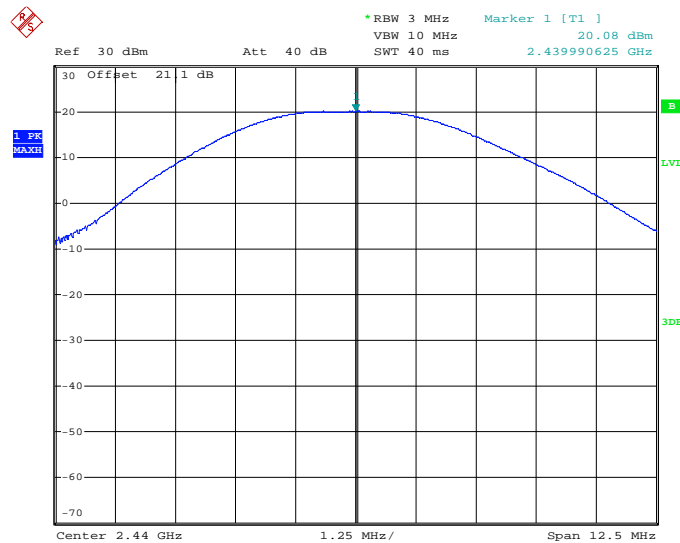

Date: 7.OCT.2019 17:33:37

Figure 2.7.6-5: Peak Output Power Test Results – Middle Channel – AP2

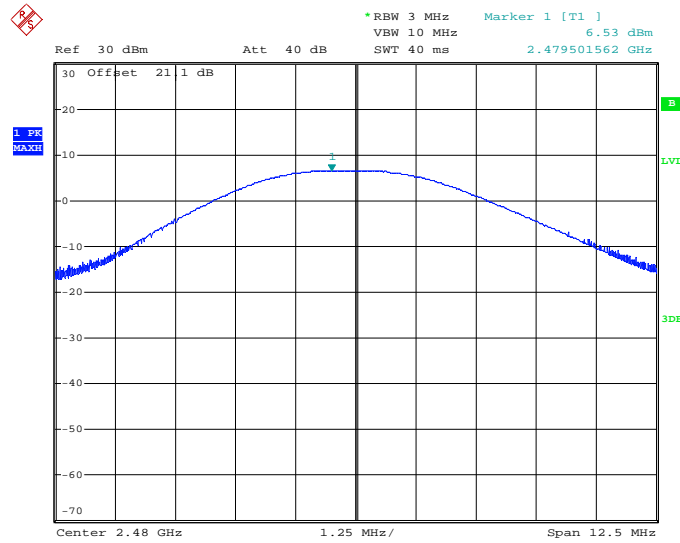

Date: 7.OCT.2019 17:31:47

Figure 2.7.6-6: Peak Output Power Test Results – High Channel – AP2

### 2.7.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	4.50 SP5	24	28-Nov-2019
Attenuator 20dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-20	BEMC02111	N/A	12	27-Jul-2020
Duratest High Frequency Cable Max. frequency 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	12-Oct-2020

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable



## **2.8 Band-Edge Compliance of RF Conducted Emissions**

### **2.8.1 Specification Reference**

FCC: Section 15.247(d)  
ISED Canada: RSS-247 5.5

### **2.8.2 Equipment Under Test and Modification State**

SN: 1914007890

### **2.8.3 Date of Test**

10/18/2019

### **2.8.4 Test Method**

The RF Conducted Emissions at the Band-Edges were measured in accordance with Subclause 7.8.6 of ANSI C63.10. The RF output port of the EUT was connected to the input of the spectrum analyzer through suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, and the VBW was set to  $\geq 300$  kHz.

### **2.8.5 Environmental Conditions**


Ambient Temperature	23.9 °C
Relative Humidity	41.3 %
Atmospheric Pressure	1010.6 mbar

### **2.8.6 Test Results**

Battery Powered Operating


Limit Clause FCC Section 15.247(d), ISED Canada: RSS-247 5.5

In any 100 kHz bandwidth outside of the frequency band the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

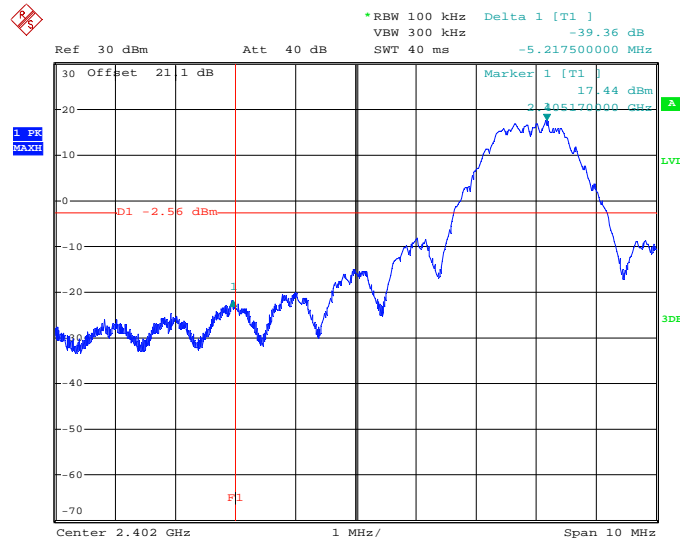


Date: 18.OCT.2019 18:31:17

Figure 2.8.6- 1: RF Conducted Band-Edge – Low Channel – AP1

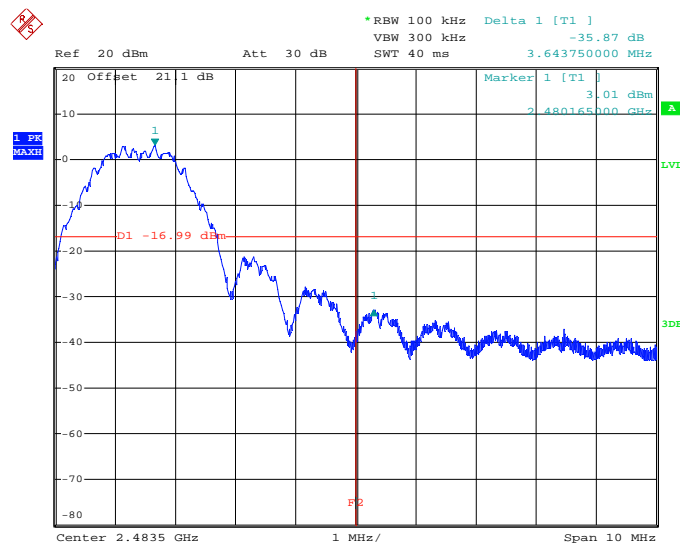


Date: 18.OCT.2019 18:36:52

Figure 2.8.6- 2: RF Conducted Band-Edge – High Channel – AP1

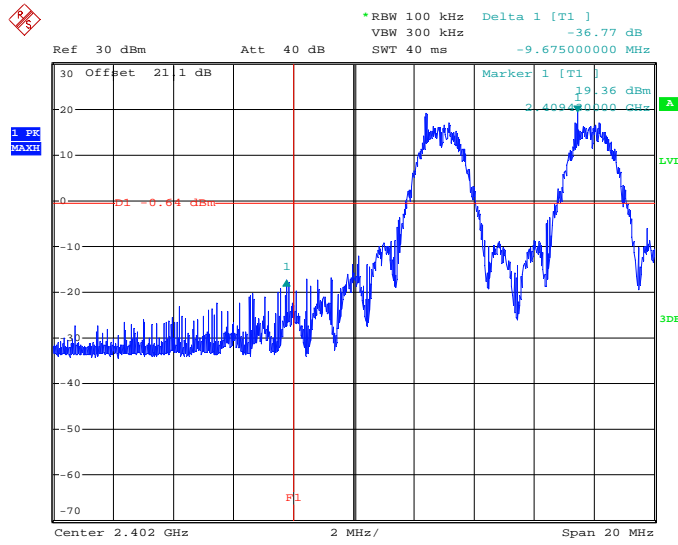

Date: 18.OCT.2019 17:56:38


Figure 2.8.6- 3: RF Conducted Band-Edge – Hopping – AP1

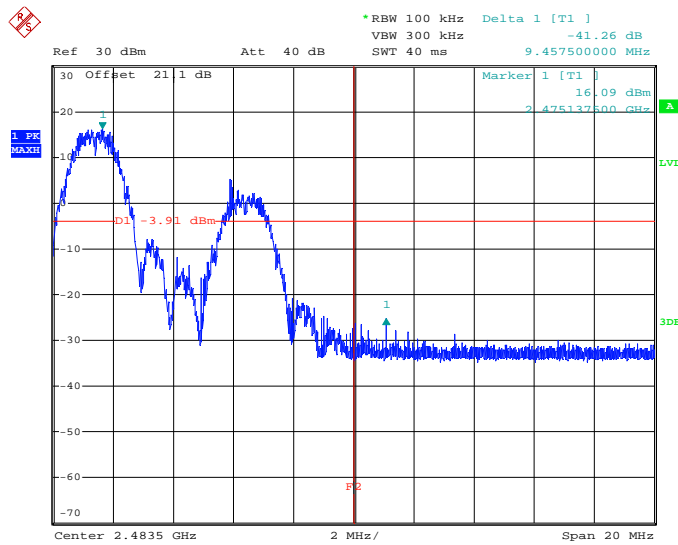

Date: 18.OCT.2019 18:00:15


Figure 2.8.6- 4: RF Conducted Band-Edge – Hopping – AP1



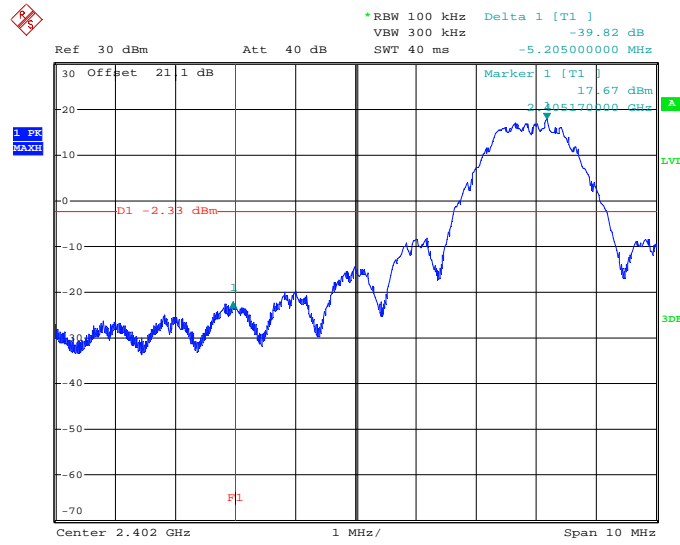


Date: 18.OCT.2019 18:24:23

Figure 2.8.6- 5: RF Conducted Band-Edge – Low Channel – AP2

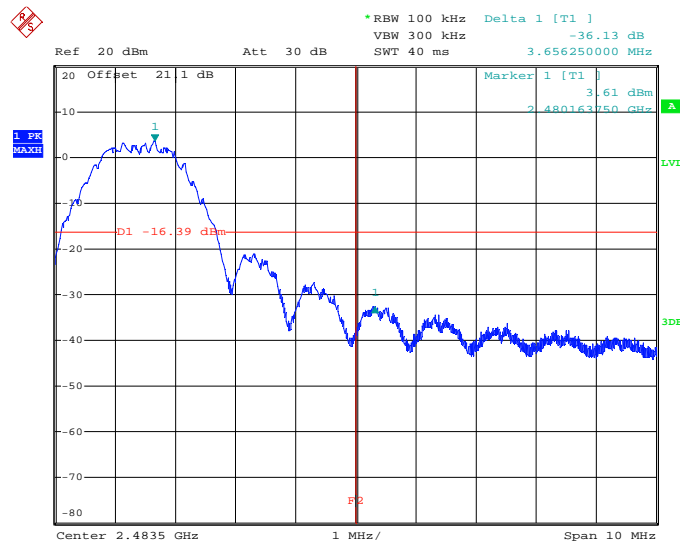


Date: 18.OCT.2019 18:42:57

Figure 2.8.6- 6: RF Conducted Band-Edge – High Channel – AP2

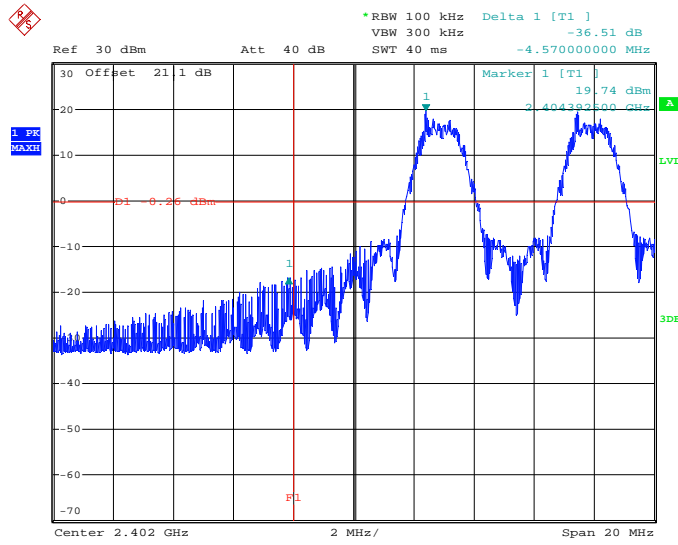

Date: 18.OCT.2019 18:19:46

Figure 2.8.6- 7: RF Conducted Band-Edge – Hopping – AP2

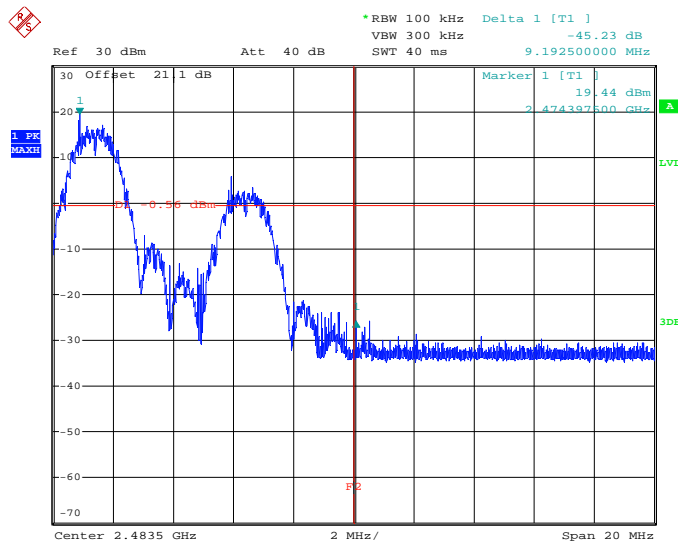

Date: 18.OCT.2019 18:03:58

Figure 2.8.6- 8: RF Conducted Band-Edge – Hopping – AP2



**2.8.7 Test Location and Test Equipment Used**

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	4.50 SP5	24	28-Nov-2019
Attenuator 20dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-20	BEMC02111	N/A	12	27-Jul-2020
Duratest High Frequency Cable Max. frequency 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	12-Oct-2020

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable



## **2.9 RF Conducted Spurious Emissions**

### **2.9.1 Specification Reference**

FCC: Section 15.247(d)  
ISED Canada: RSS-247 5.5

### **2.9.2 Equipment Under Test and Modification State**

SN: 1914007890

### **2.9.3 Date of Test**

10/18/2019 to 10/21/2019

### **2.9.4 Test Method**

The RF Conducted Spurious Emissions were measured in accordance with Subclause 7.8.8 of ANSI C63.10. The RF output port of the equipment under test was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30 MHz to 10 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to 300 kHz. The peak Max Hold function of the analyzer was utilized.

### **2.9.5 Environmental Conditions**


Ambient Temperature	24.5 °C
Relative Humidity	44.8 %
Atmospheric Pressure	1014.2 mbar

### **2.9.6 Test Results**

Battery Powered Operating


Limit Clause FCC Section 15.247(d), ISED Canada: RSS-247 5.5

In any 100 kHz bandwidth outside of the frequency band the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

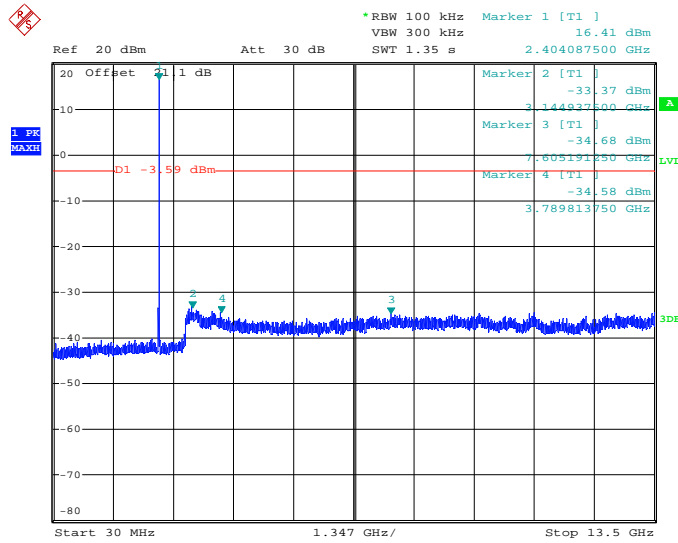


Date: 21.OCT.2019 08:23:33

Figure 2.9.6-1: Conducted Spurious Emissions – Low Channel 30 MHz – 13.5 GHz – AP1

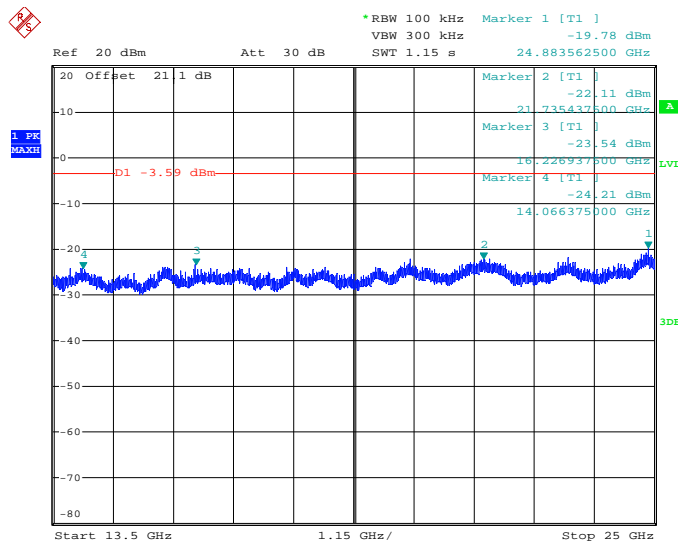


Date: 21.OCT.2019 08:28:44

Figure 2.9.6-2: Conducted Spurious Emissions – Low Channel 13.5 GHz – 25 GHz – AP1

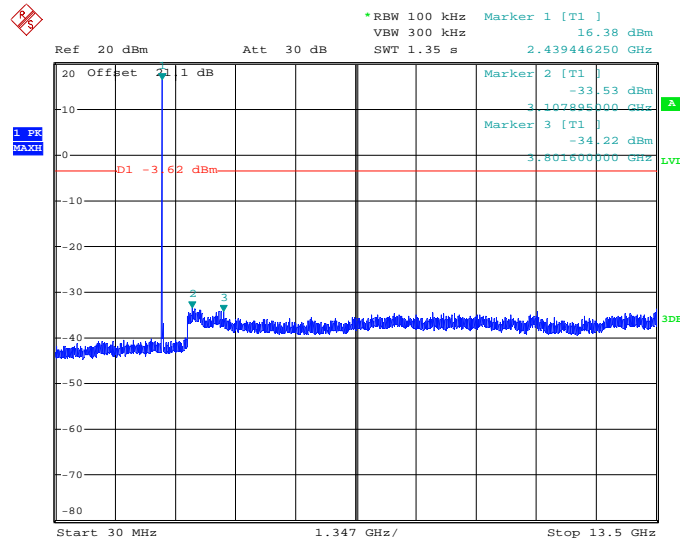


Date: 21.OCT.2019 08:40:38

Figure 2.9.6-3: Conducted Spurious Emissions – Middle Channel – 30 MHz – 13.5 GHz – AP1

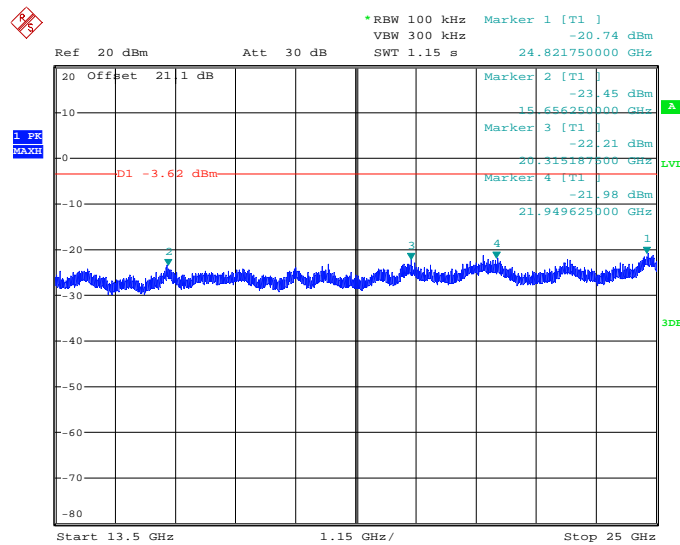


Date: 21.OCT.2019 08:46:29

Figure 2.9.6-4: Conducted Spurious Emissions – Middle Channel – 13.5 GHz – 25 GHz – AP1

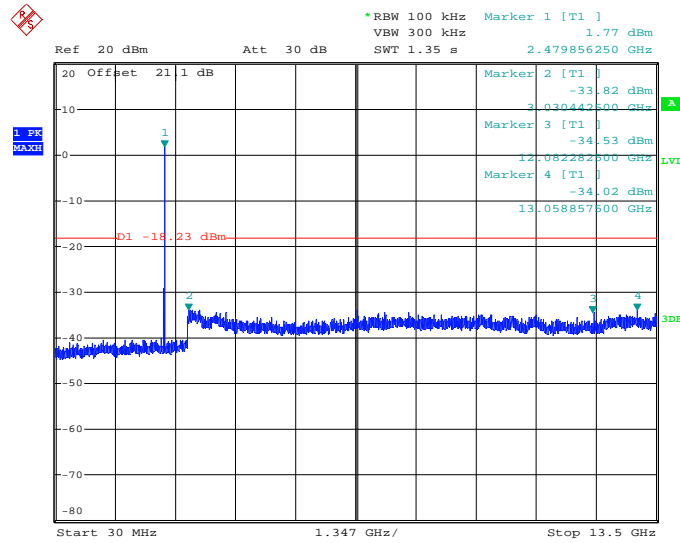


Date: 18.OCT.2019 19:02:59

Figure 2.9.6-5: Conducted Spurious Emissions – High Channel – 30 MHz – 13.5 GHz – AP1

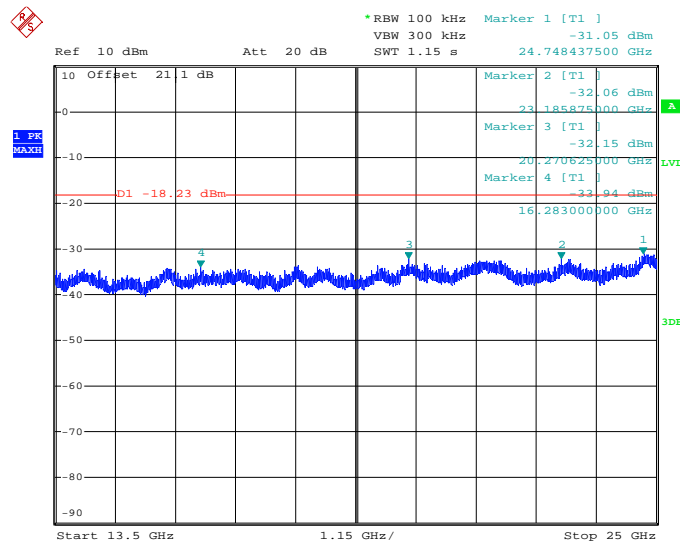


Date: 18.OCT.2019 19:06:19

Figure 2.9.6-6: Conducted Spurious Emissions – High Channel – 13.5 GHz – 25 GHz – AP1

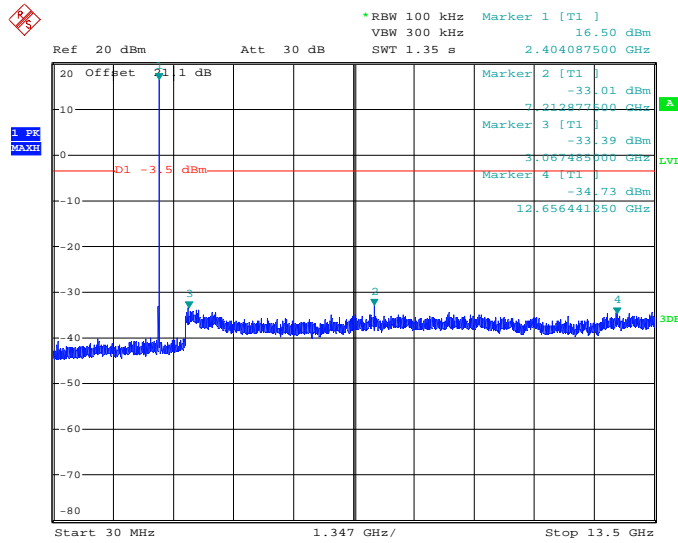

Date: 21.OCT.2019 09:14:14


Figure 2.9.6-7: Conducted Spurious Emissions – Low Channel 30 MHz – 13.5 GHz – AP2

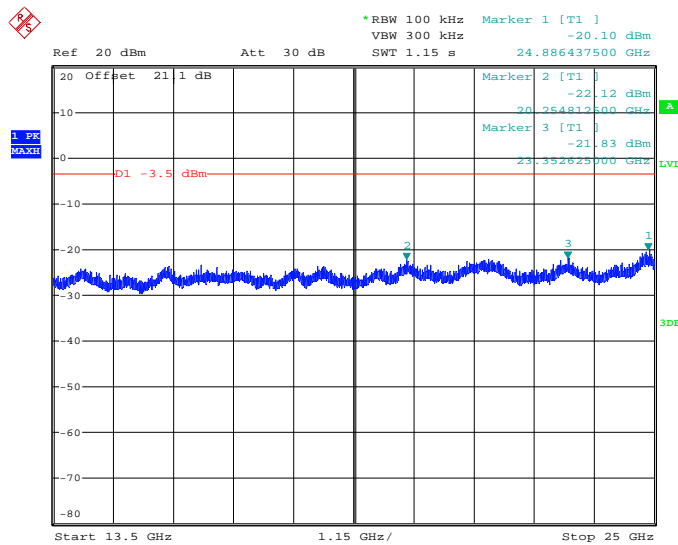

Date: 21.OCT.2019 09:22:04


Figure 2.9.6-8: Conducted Spurious Emissions – Low Channel 13.5 GHz – 25 GHz – AP2



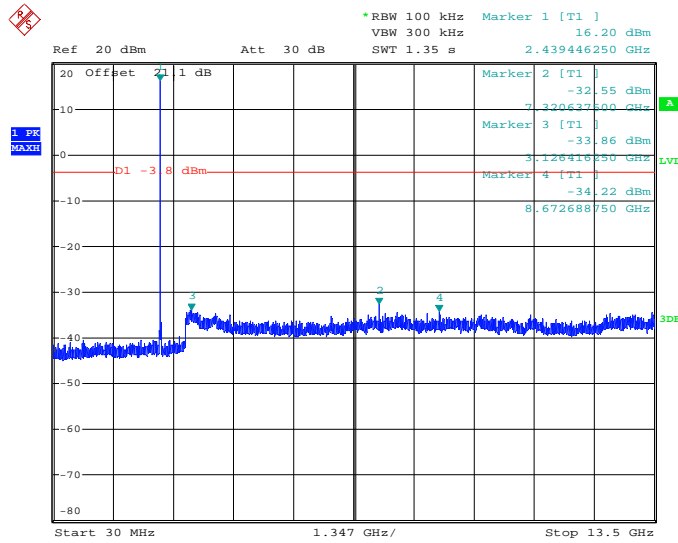


Date: 21.OCT.2019 08:53:41

Figure 2.9.6-9: Conducted Spurious Emissions – Middle Channel – 30 MHz – 13.5 GHz – AP2

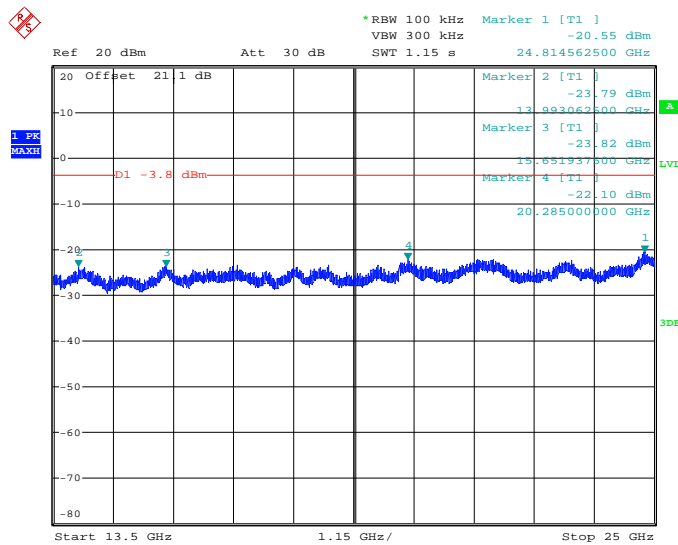


Date: 21.OCT.2019 09:05:27

Figure 2.9.6-10: Conducted Spurious Emissions – Middle Channel – 13.5 GHz – 25 GHz – AP2

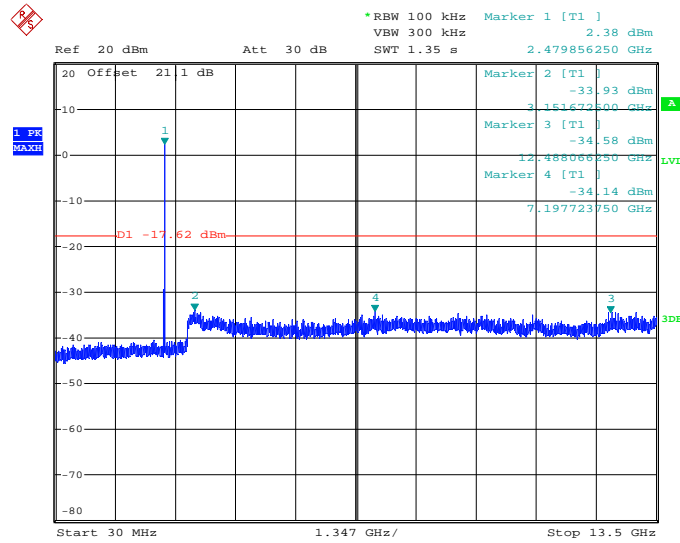

Date: 18.OCT.2019 18:47:06

Figure 2.9.6-11: Conducted Spurious Emissions – High Channel – 30 MHz – 13.5 GHz – AP2

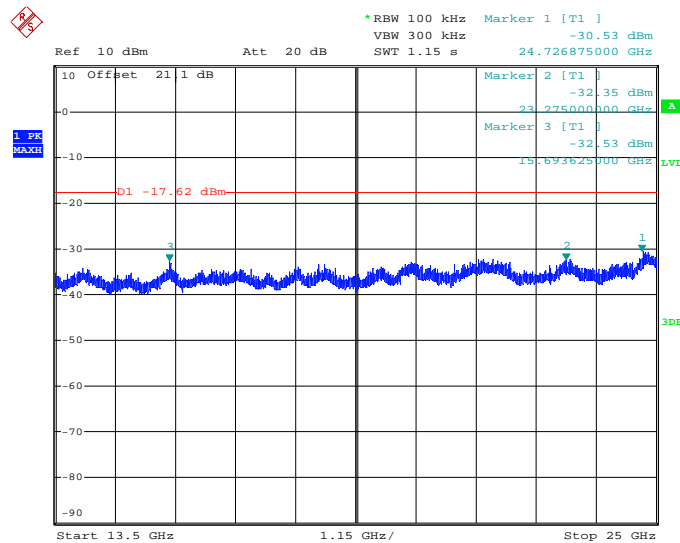

Date: 18.OCT.2019 18:51:21

Figure 2.9.6-12: Conducted Spurious Emissions – High Channel – 13.5 GHz – 25 GHz – AP2



**2.9.7 Test Location and Test Equipment Used**

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	4.50 SP5	24	28-Nov-2019
Attenuator 20dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-20	BEMC02111	N/A	12	27-Jul-2020
Duratest High Frequency Cable Max. frequency 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	12-Oct-2020

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable



## **2.10 Radiated Spurious Emissions into Restricted Frequency Bands**

### **2.10.1 Specification Reference**

FCC Sections: 15.205, 15.209;  
ISED Canada: RSS-GEN 8.9, 8.10

### **2.10.2 Equipment Under Test and Modification State**

SN: 1914005990

### **2.10.3 Date of Test**

8/19/2019 to 10/14/2019

### **2.10.4 Test Method**

Radiated emissions tests were made over the frequency range of 9 kHz to 26 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in Section 15.209.

For measurements below 30 MHz, the receive antenna height was set to 1 m and the EUT was rotated through 360 degrees. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements are made with RBW of 1 MHz and VBW of 3 MHz. Average measurements are performed in the linear scale using VBW of 30 Hz.

### **2.10.5 Duty Cycle Correction**

A duty cycle correction factor corresponding to the logarithm of the dwell time was used for the average measurements.

Duty Cycle Correction =  $20 \cdot \log(2.02/100) = -33.89$  dB

### **2.10.6 Environmental Conditions**

Ambient Temperature	23.8 °C
Relative Humidity	44.9 %
Atmospheric Pressure	1017.3 mbar



**2.10.7 Test Results**

Battery Powered Operating

Limit Clause FCC Sections 15.205, 15.209, ISED Canada: RSS-GEN 8.9, 8.10

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.4090-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3



**Table 2.10.7-1: TX Radiated Spurious Emissions Results**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Low Channel</b>										
2390	60.38	50.93	H	-2.12	58.26	14.92	74.0	54.0	15.7	39.1
2390	55.89	44.95	V	-2.12	53.77	8.94	74.0	54.0	20.2	45.1
4810	49.83	42.99	H	4.11	53.94	13.21	74.0	54.0	20.1	40.8
4810	49.63	42.51	V	4.11	53.74	12.73	74.0	54.0	20.3	41.3
12025	52.83	45.61	H	17.93	70.76	29.65	74.0	54.0	3.2	24.4
12025	49.29	42.00	V	17.93	67.22	26.04	74.0	54.0	6.8	28.0
19240	51.99	44.85	H	14.97	66.96	25.93	83.5	63.5	16.5	37.6
19240	46.54	38.39	V	14.97	61.51	19.47	83.5	63.5	22.0	44.0
<b>Middle Channel</b>										
4880	57.83	50.91	H	4.26	62.09	21.28	74.0	54.0	11.9	32.7
4880	60.50	53.85	V	4.26	64.76	24.22	74.0	54.0	9.2	29.8
7320	62.03	55.12	H	9.25	71.28	30.48	74.0	54.0	2.7	23.5
7320	60.02	53.15	V	9.25	69.27	28.51	74.0	54.0	4.7	25.5
12200	49.66	41.88	H	17.73	67.39	25.72	74.0	54.0	6.6	28.3
12200	45.23	36.90	V	17.73	62.96	20.74	74.0	54.0	11.0	33.3
19520	51.66	42.59	H	14.83	66.49	23.53	83.5	63.5	17.0	40.0
19520	48.57	39.30	V	14.83	63.40	20.24	83.5	63.5	20.1	43.3
<b>2475 MHz</b>										
2483.5	72.24	63.18	H	-1.91	70.33	27.37	74.0	54.0	3.7	26.6
2483.5	67.06	57.87	V	-1.91	65.15	22.06	74.0	54.0	8.9	31.9
4950	56.50	50.12	H	4.41	60.91	20.64	74.0	54.0	13.1	33.4
4950	57.91	51.60	V	4.41	62.32	22.12	74.0	54.0	11.7	31.9
7425	57.15	50.44	H	9.40	66.55	25.95	74.0	54.0	7.4	28.1
7425	55.46	48.43	V	9.40	64.86	23.94	74.0	54.0	9.1	30.1
12375	39.01	28.40	H	17.53	56.54	12.04	74.0	54.0	17.5	42.0
12375	38.57	27.68	V	17.53	56.10	11.32	74.0	54.0	17.9	42.7
19800	46.69	38.54	H	14.53	61.22	19.18	83.5	63.5	22.3	44.3
19800	46.29	37.67	V	14.53	60.82	18.31	83.5	63.5	22.7	45.2
22275	39.01	28.32	H	15.84	54.85	10.26	83.5	63.5	28.7	53.2
22275	38.34	26.14	V	15.84	54.18	8.08	83.5	63.5	29.3	55.4
<b>High Channel</b>										
2483.5	75.58	65.87	H	-1.91	73.67	30.06	74.0	54.0	0.3	23.9
2483.5	67.72	57.78	V	-1.91	65.81	21.97	74.0	54.0	8.2	32.0
4960	44.92	36.08	H	4.43	49.35	6.62	74.0	54.0	24.6	47.4
4960	45.78	37.95	V	4.43	50.21	8.49	74.0	54.0	23.8	45.5

**Note:**

- All emissions above 22.75 GHz were attenuated below the limits and the noise floor of the measurement equipment.
- The average measurements were corrected using a duty cycle correction factor corresponding to the logarithm of the dwell time over 100 ms.
- The emissions above 18 GHz were assessed a test distance of 1m. The limits are adjusted accordingly.
- The emissions generated by the digital circuits were assessed in the SDOC test report.

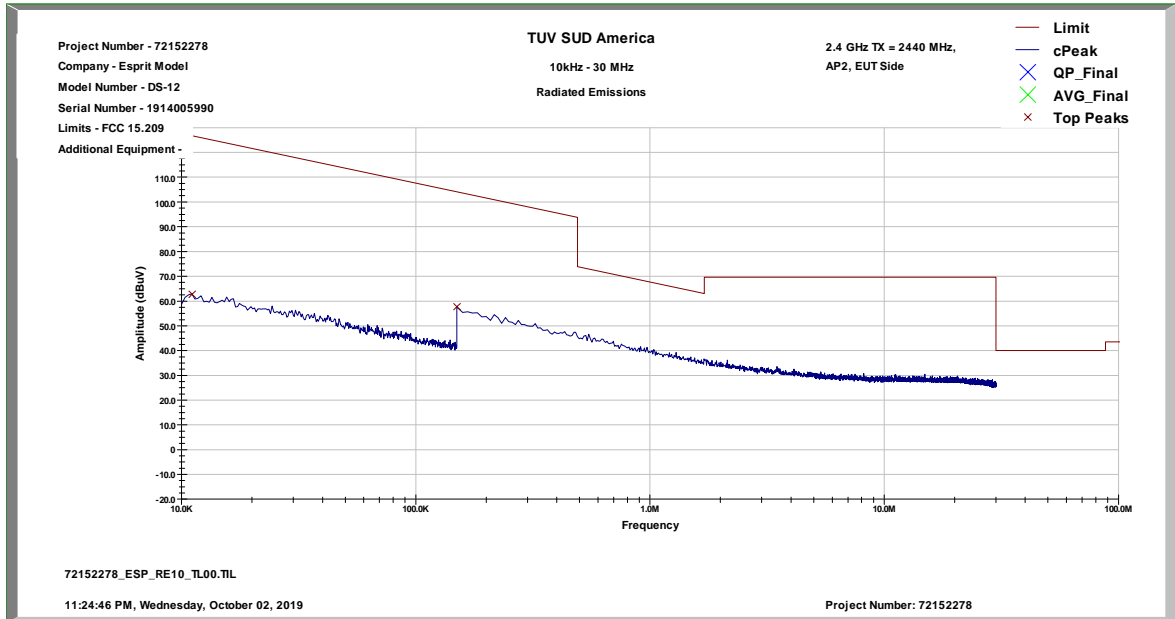


Figure 2.10.7-1: TX Radiated Spurious Emissions – Pre-Scan Plot below 30 MHz

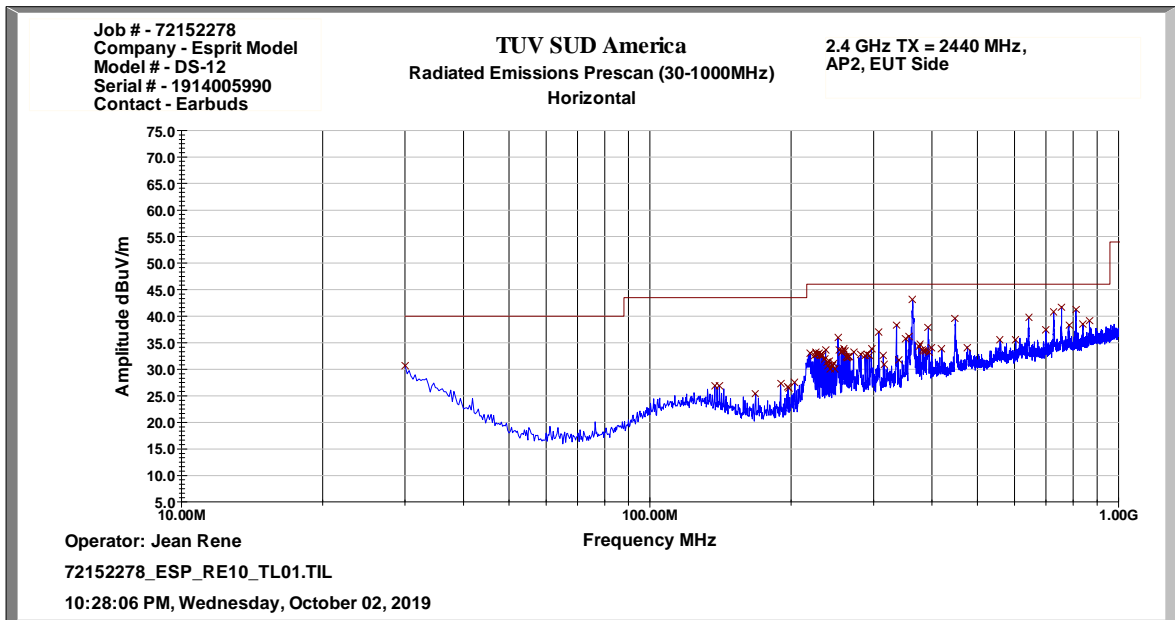


Figure 2.10.7-2: TX Radiated Spurious Emissions – Pre-Scan Plot 30 MHz – 1 GHz – Horizontal Polarization

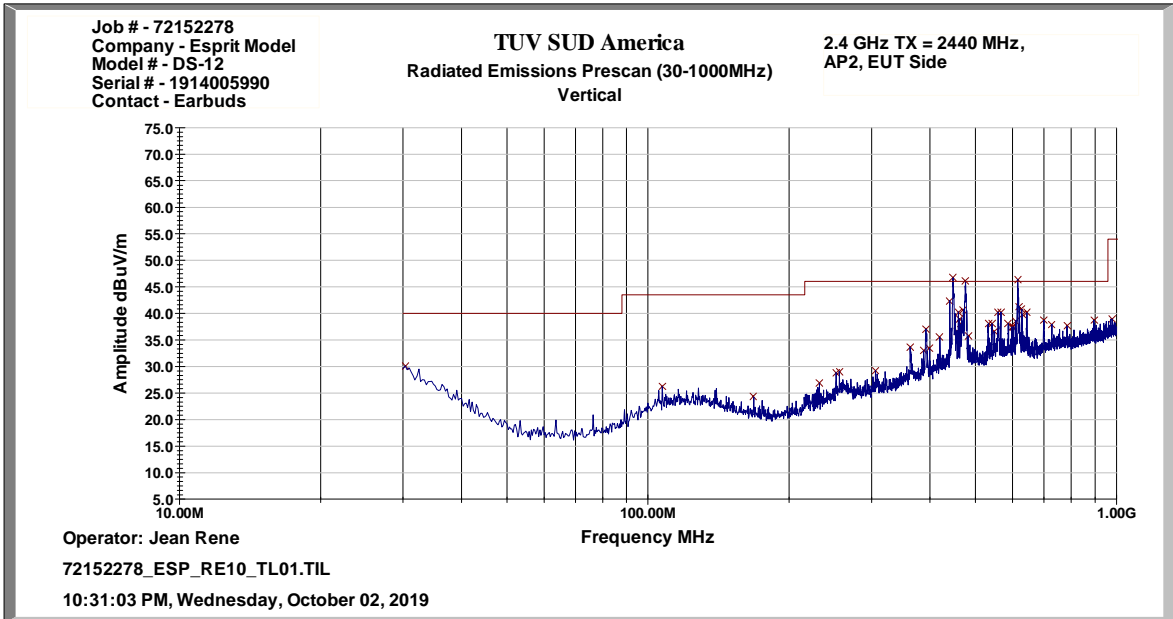


Figure 2.10.7-3: TX Radiated Spurious Emissions – Pre-Scan Plot 30 MHz – 1 GHz – Vertical Polarization

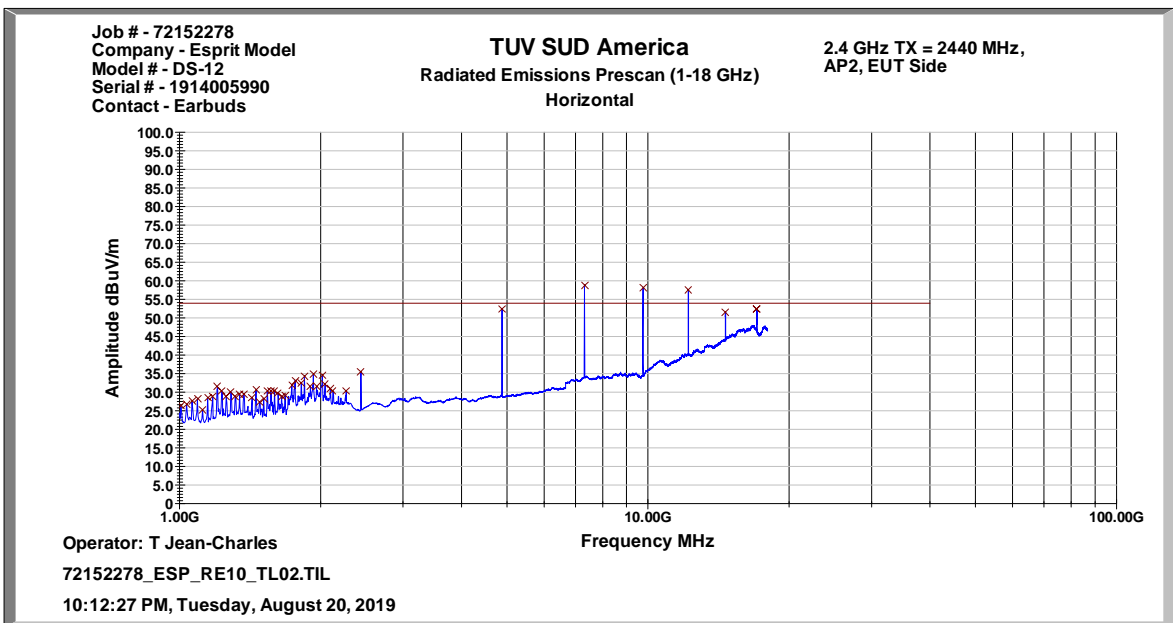
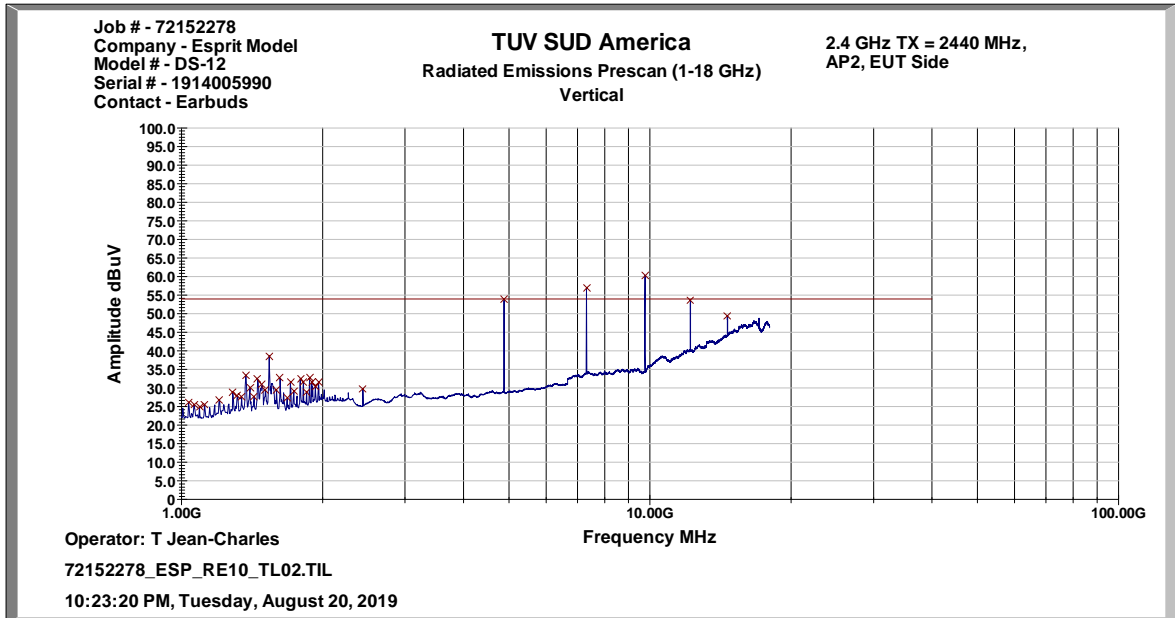
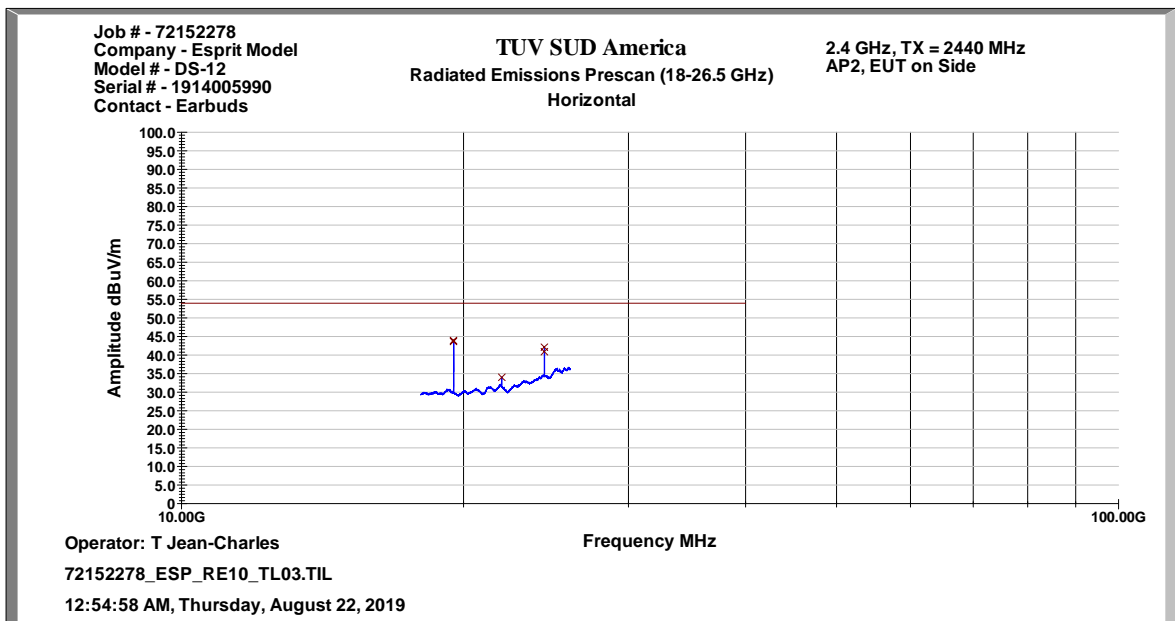


Figure 2.10.7-4: TX Radiated Spurious Emissions – Pre-Scan Plot 1 GHz – 18 GHz – Horizontal Polarization

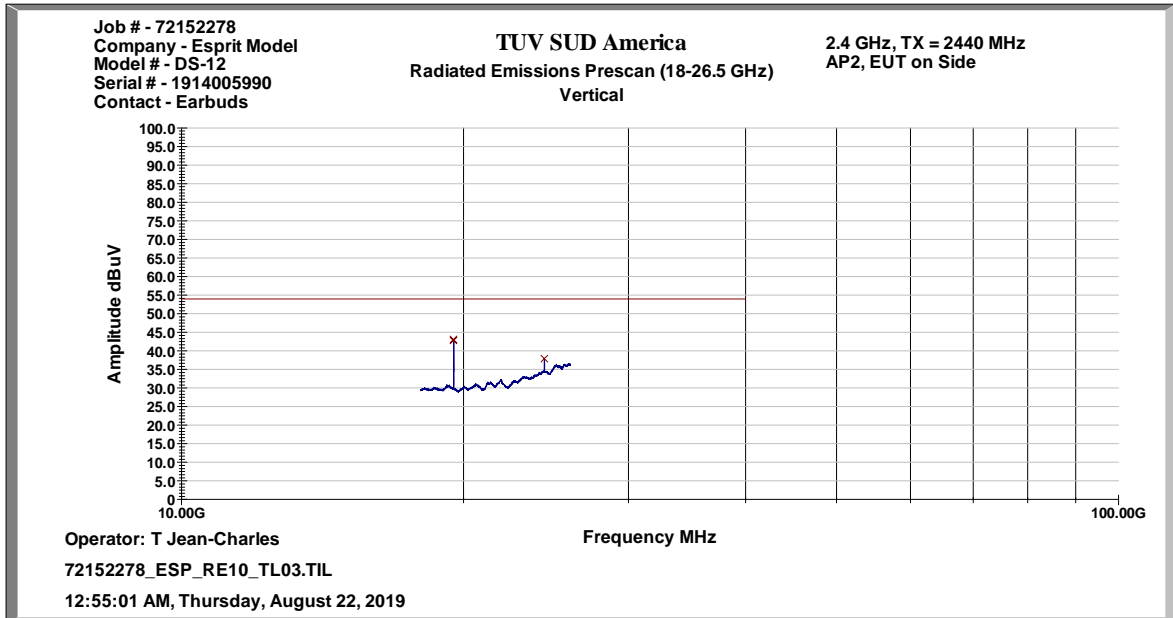




**Figure 2.10.7-5: TX Radiated Spurious Emissions – Pre-Scan Plot 1 GHz – 18 GHz – Vertical Polarization**



**Figure 2.10.7-6: TX Radiated Spurious Emissions – Pre-Scan Plot 18 GHz – 26 GHz – Horizontal Polarization**



**Figure 2.10.7-7: TX Radiated Spurious Emissions – Pre-Scan Plot 18 GHz – 26 GHz – Vertical Polarization**

**2.10.8 Sample Calculations**

$$R_c = R_u + CF_T$$

Where:

- CF<sub>T</sub> = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
- R<sub>U</sub> = Uncorrected Reading
- R<sub>C</sub> = Corrected Level
- AF = Antenna Factor
- CA = Cable Attenuation
- AG = Amplifier Gain
- DC = Duty Cycle Correction Factor

**Example Calculation: Peak**

Corrected Level: 60.38 + (-2.12) = 58.26 dBμV/m  
 Margin: 74 dBμV/m – 58.26 dBμV/m = 15.74 dB

**Example Calculation: Average**

Corrected Level: 50.93 + (-2.12) -33.89 = 14.92 dBμV/m  
 Margin: 54 dBμV/m – 14.92 dBμV/m = 39.08 dB



**2.10.9 Test Location and Test Equipment Used**

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Active Loop Antenna	EMCO	6502	BEMC00078	N/A	24	09-May-2020
9kHz-26.5GHz EMC analyzer/HYZ	Agilent	E7405A	BEMC00523	A.14.06	24	27-Nov-2020
10dB Attenuator	Merrimac	FAN-6-10K	BEMC02086	N/A	12	12-Oct-2020
Tile Automation Software	ETS Lindgren	TILE4! - Version 4.2.A	BEMC02095	4.2A	N/A	NCR
BI LOG PERIODIC, ANTENNA	Schaffner	CBL6112B	TEMC00005	N/A	24	19-Dec-2019
Horn Antenna	Schwarzbeck	BBHA-9170	TEMC00029	N/A	60	23-Aug-2021
EMC Chamber	Panasheild	N/A	TEMC00031	N/A	24	28-Jan-2020
Double Ridge Guide Horn	ETS Lindgren	3117	TEMC00061	N/A	24	13-Feb-2020
18 GHz-40 GHz Microwave Preampfier	COM-power	PAM-840A	TEMC00147	N/A	24	30-May-2020
PAM-118A	Com-Power Corporatio	PAM-118A	TEMC00160	N/A	12	27-Apr-2020
4A & 4B Test Cables	MegaPhase, LLC	1GVT4	TEMC00171	N/A	24	30-May-2020
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-01	TEMC00176	N/A	12	10-Apr-2020
Radiated Cable Set 30 MHz - 1 GHz	TUV SUD Tampa	Cable 2	TEMC00179	N/A	12	07-May-2020
Radiated Cable Set 9 kHz - 30 MHz	TUV SUD Tampa	Cable 2	TEMC00186	N/A	12	08-May-2020

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable



**2.11 Power Line Conducted Emissions**

**2.11.1 Specification Reference**

FCC: Section 15.207  
 ISED Canada: RSS-GEN 8.8

**2.11.2 Equipment Under Test and Modification State**

SN: 1914005990

**2.11.3 Date of Test**

8/16/2019

**2.11.4 Test Method**

ANSI C63.10 section 6.2 was the guiding document for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

**Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss**  
**Margin = Applicable Limit - Corrected Reading**

**2.11.5 Environmental Conditions**

Ambient Temperature 24.5 °C  
 Relative Humidity 45.2 %  
 Atmospheric Pressure 1018.3 mbar

**2.11.6 Test Results**

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.



**Table 2.11.6-1: Power Line Conducted Emissions – Quasi-Peak Detector Results**

Frequency (MHz)	Quasi-peak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	47.98	N	10.1	18.02	66.00
0.402000	34.69	N	10.0	23.12	57.81
0.465000	27.88	N	10.0	28.72	56.60
1.153500	24.54	L1	10.1	31.46	56.00
1.500000	25.19	L1	10.2	30.81	56.00
1.671000	25.14	L1	10.2	30.86	56.00
2.008500	24.74	L1	10.2	31.26	56.00
2.206500	24.30	L1	10.2	31.70	56.00
4.906500	22.85	L1	10.4	33.15	56.00
6.985500	27.55	L1	10.7	32.45	60.00

**Table 2.11.6-2: Power Line Conducted Emissions – Average Detector Results**

Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	30.84	N	10.0	24.22	55.06
0.222000	26.52	N	10.0	26.22	52.74
0.388500	27.40	N	10.0	20.70	48.10
0.411000	23.83	N	10.0	23.80	47.63
0.442500	20.32	N	10.0	26.70	47.02
1.153500	17.10	L1	10.1	28.90	46.00
1.482000	19.05	L1	10.2	26.95	46.00
2.202000	17.81	L1	10.2	28.19	46.00
4.884000	16.11	L1	10.4	29.89	46.00
6.787500	22.02	L1	10.7	27.98	50.00

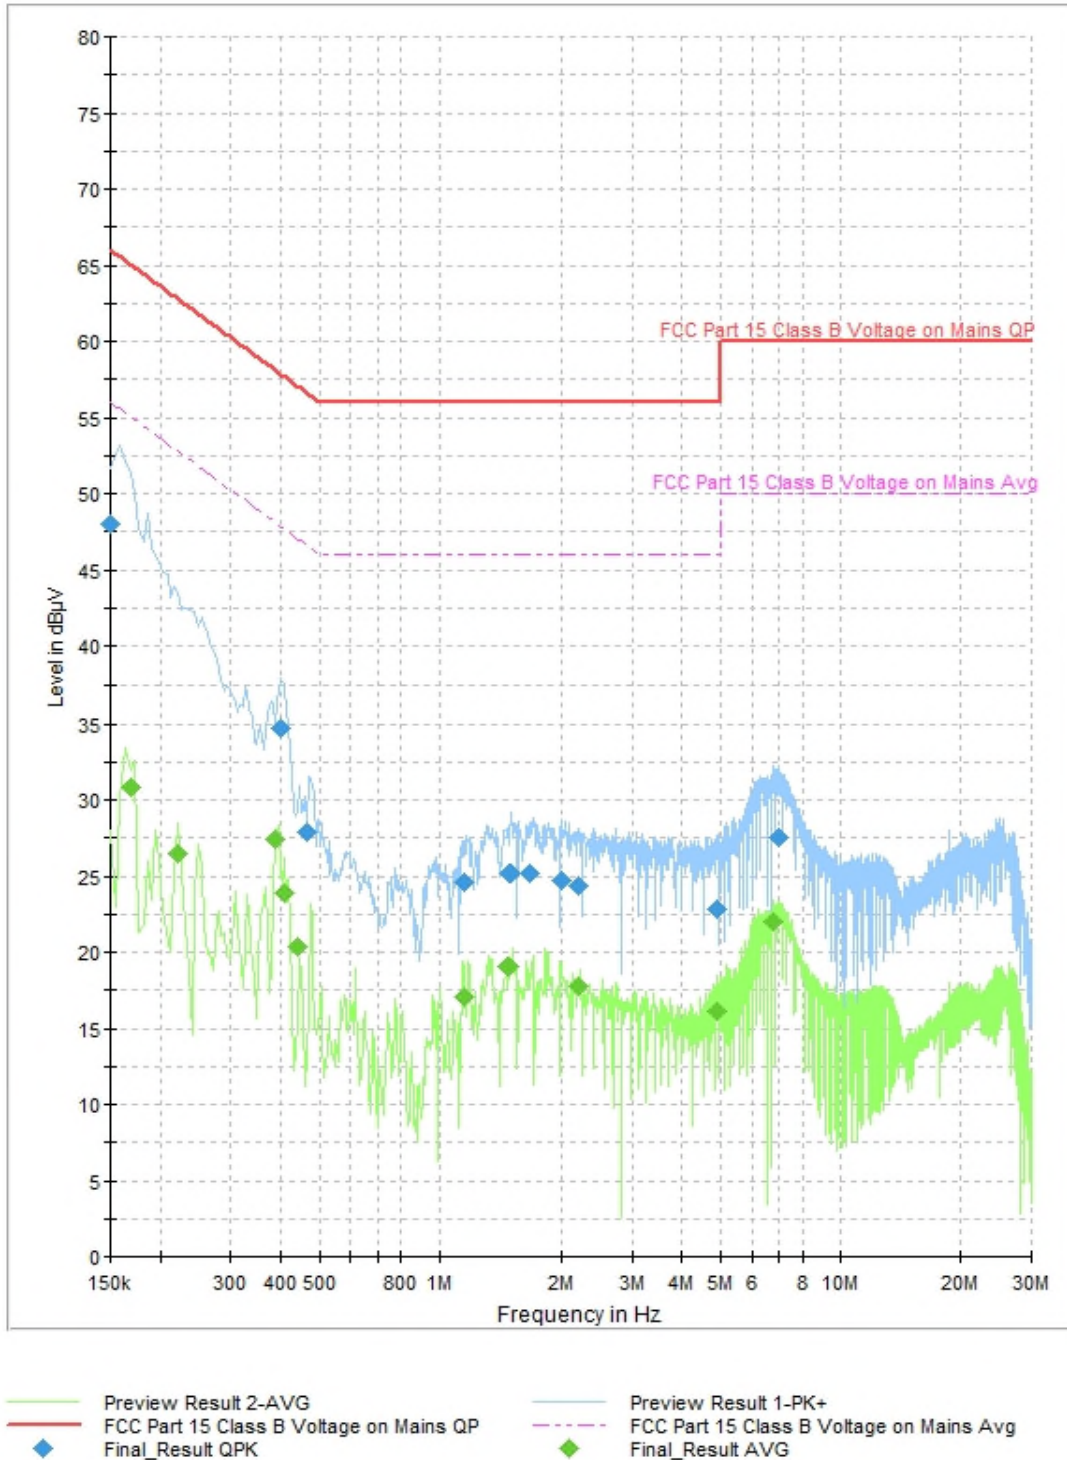


Figure 2.11.6-1: Graphical Results – AC Mains Composite Line and Neutral Plots



**2.11.7 Test Location and Test Equipment Used**

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
LISN	Rohde & Schwarz	ESH3-Z5	TEMC00002	N/A	24	30-Sep-2021
EMI Test Receiver	Rohde & Schwarz	ESCS30	TEMC00011	2.3002.0102.36	24	17-Nov-2019
RFI/EMI Shielded Enclosure	UNIVERSAL SHIELDING CORP.	N/A	TEMC00100	N/A	N/A	NCR
Test Software	Rohde & Schwarz	EMC32	TEMC00184	10.50.00	N/A	NCR

TU - Traceability Unscheduled  
 O/P MON - Traceability Unscheduled  
 N/A - Not Applicable



### 3 Test Equipment Information

#### 3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Active Loop Antenna	EMCO	6502	BEMC00078	N/A	24	09-May-2020
9kHz-26.5GHz EMC analyzer/HYZ	Agilent	E7405A	BEMC00523	A.14.06	24	27-Nov-2020
10dB Attenuator	Merrimac	FAN-6-10K	BEMC02086	N/A	12	12-Oct-2020
Tile Automation Software	ETS Lindgren	TILE4! - Version 4.2.A	BEMC02095	4.2A	N/A	NCR
BI LOG PERIODIC, ANTENNA	Schaffner	CBL6112B	TEMC00005	N/A	24	19-Dec-2019
Horn Antenna	Schwarzbeck	BBHA-9170	TEMC00029	N/A	60	23-Aug-2021
EMC Chamber	Panasheild	N/A	TEMC00031	N/A	24	28-Jan-2020
Double Ridge Guide Horn	ETS Lindgren	3117	TEMC00061	N/A	24	13-Feb-2020
18 GHz-40 GHz Microwave Preamplifier	COM-power	PAM-840A	TEMC00147	N/A	24	30-May-2020
PAM-118A	Com-Power Corporatio	PAM-118A	TEMC00160	N/A	12	27-Apr-2020
4A & 4B Test Cables	MegaPhase, LLC	1GVT4	TEMC00171	N/A	24	30-May-2020
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-01	TEMC00176	N/A	12	10-Apr-2020
Radiated Cable Set 30 MHz - 1 GHz	TUV SUD Tampa	Cable 2	TEMC00179	N/A	12	07-May-2020
Radiated Cable Set 9 kHz - 30 MHz	TUV SUD Tampa	Cable 2	TEMC00186	N/A	12	08-May-2020
LISN	Rohde & Schwarz	ESH3-Z5	TEMC00002	N/A	24	30-Sep-2021
EMI Test Receiver	Rohde & Schwarz	ESCS30	TEMC00011	2.3002.0102.36	24	17-Nov-2019
RFI/EMI Shielded Enclosure	UNIVERSAL SHIELDING CORP.	N/A	TEMC00100	N/A	N/A	NCR
Test Software	Rohde & Schwarz	EMC32	TEMC00184	10.50.00	N/A	NCR
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	4.50 SP5	24	28-Nov-2019
Attenuator 20dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-20	BEMC02111	N/A	12	27-Jul-2020
Duratest High Frequency Cable Max. frequency 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	12-Oct-2020

TU - Traceability Unscheduled

O/P MON - Traceability Unscheduled

N/A - Not Applicable



## 4 Diagram of Test Set-ups

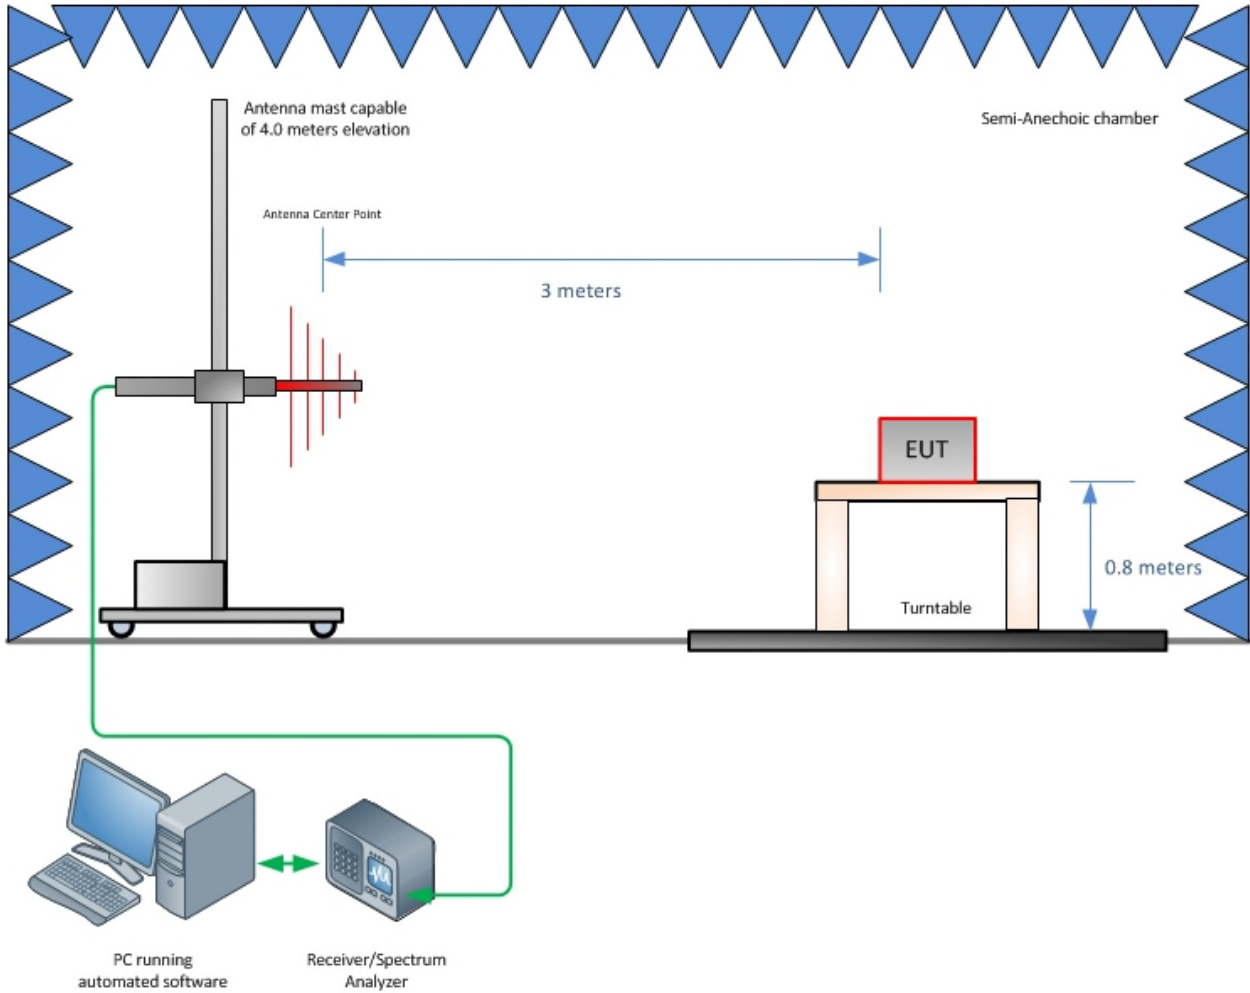
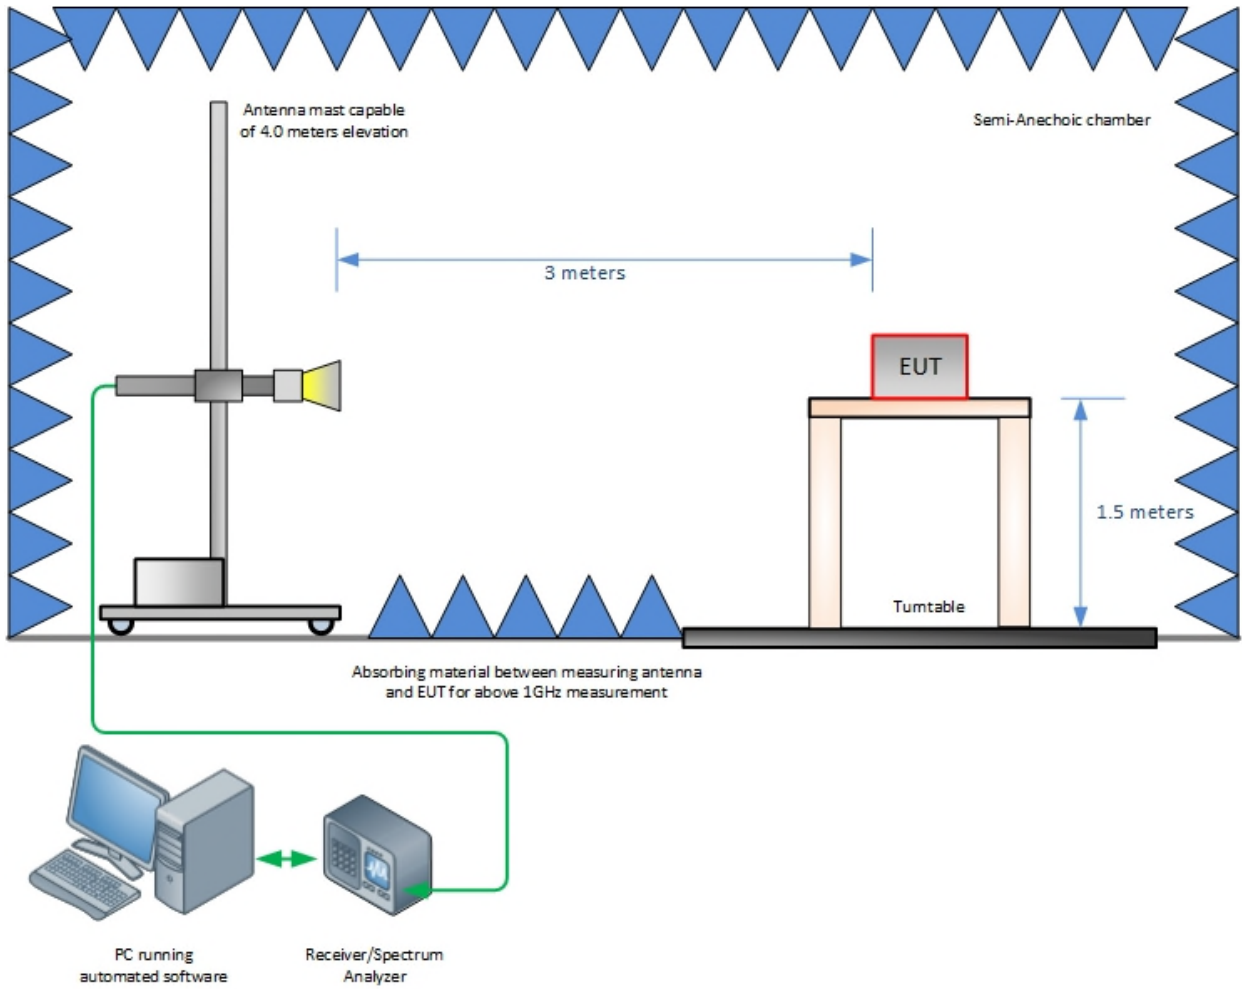
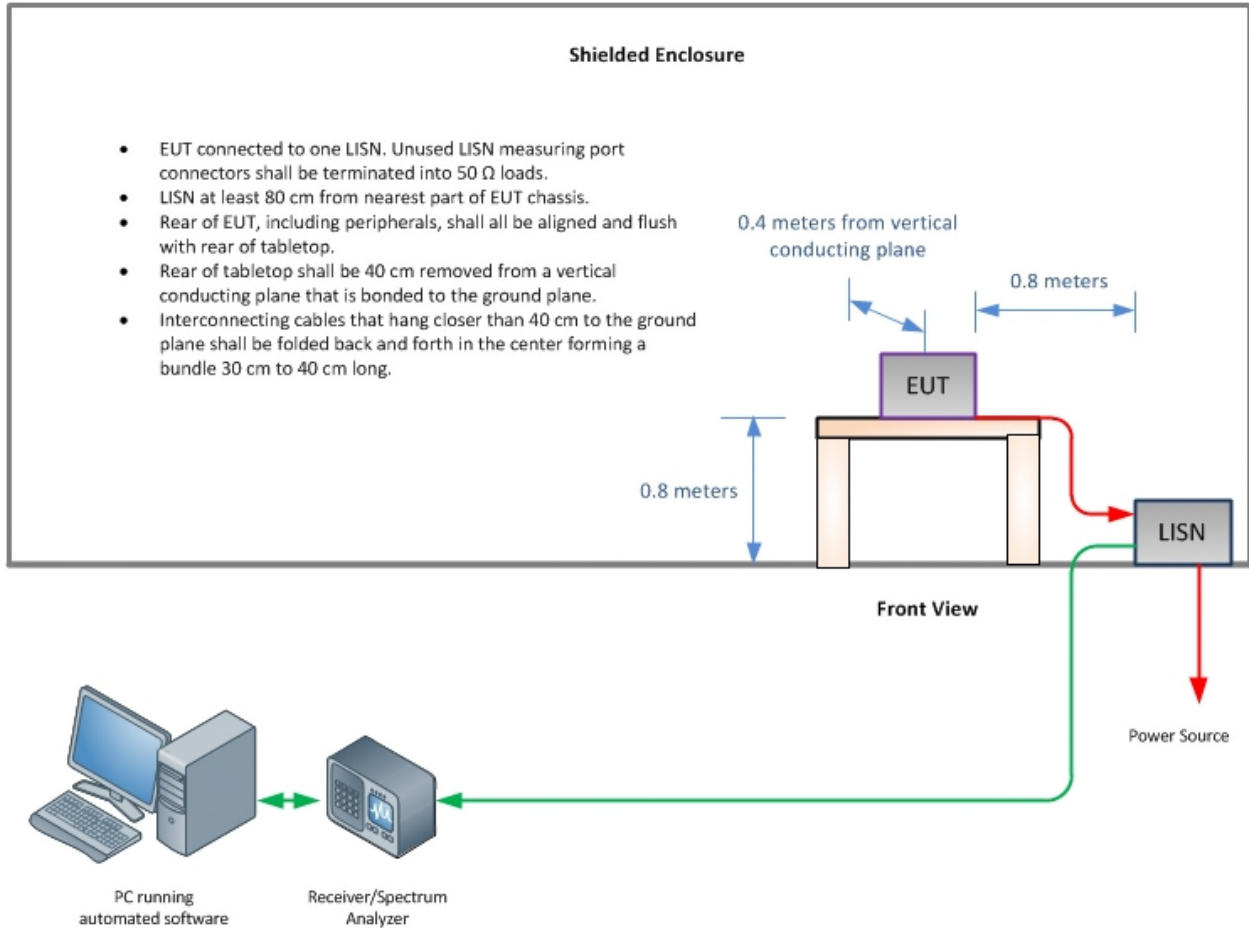


Figure 4-1 - Radiated Emissions Test Setup up to 1 GHz



**Figure 4-2 - Radiated Emissions Test Setup above 1 GHz**



**Figure 4-3 – Conducted Emissions Test Setup**



## 5 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

**Table 6-1 - Values of  $U_{CISPR}$  and  $U_{Lab}$**

Measurement	$U_{CISPR}$	$U_{Lab}$
Conducted disturbance (mains port) (9 kHz – 150 kHz) (150 kHz – 30 MHz)	3.8 dB 3.4 dB	3.71 dB 3.31 dB
Conducted disturbance (telecom port) (150 kHz – 30 MHz 55 dB LCL) (150 kHz – 30 MHz 65 dB LCL) (150 kHz – 30 MHz 75 dB LCL)	5.0 dB 5.0 dB 5.0 dB	4.11 dB 4.50 dB 4.94 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1 000 MHz) (1 – 6 GHz) (6-18 GHz)	6.3 dB 5.2 dB 5.5 dB	5.85 dB 4.48 dB 4.48 dB

**Notes:**

$U_{CISPR}$  resembles a value of measurement uncertainty for a specific test, which was determined by considering uncertainties associated with the quantities listed in CISPR 16-4-2:2011.



## 6 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.