

MEASUREMENT/TECHNICAL REPORT**APPLICANT:** ET&T Technology Co., Ltd.**MODEL NO.:** ET1055C**FCC ID:** ONYET1055C

This report concerns (check one) : **Original Grant** ☒
Class II Change

Equipment type: Touch Screen Controller

Deferred grant requested per 47CFR 0.457(d)(1)(ii)?

Yes _____ No ☒ If yes, defer until: _____ (date)

We, the undersigned, agree to notify the Commission by (date) ____/____/____ of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes _____ No ☒

If no, assumed Part 15, Subpart B for unintentional radiator the new 47 CFR (10-1-90 Edition) provision.

Report Prepared

by **Testing House** ; **Neutron Engineering Inc.**

for **Company** ; **G**

Name ET&T Technology Co., Ltd.

Address 2F, No. 2, Lane 57, Sec. 1, Chien Kuo N. Rd., Taipei, Taiwan, R.O.C.

Applicant Signature:



Robert Cherng / President

CERTIFICATION

We hereby certify that:

The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992)/CISPR 22(1996) and the energy emitted by the sample EUT tested as described in this report is in compliance with CLASS B conducted and radiated emission limits of FCC Rules Part 15, Subpart B/CISPR 22(1996).

Prepared by : Sherry Kuo



Reviewed by : Andy Chiu



Appoved by : George Yao



Issued Date : July 19, 1999

Report No. : NEI-FCCB-99105

Company Stamp:



NEUTRON ENGINEERING INC.

20, Alley 50, Lane 119, Dong Hwu Rd.,

P.O. Box 6-158, Nei Hwu,

Taipei, Taiwan

TEL; (02) 2633-6872 FAX; (02) 2633-4578

Table of Contents

1. General Information.....	
1-1 Product Description.....	4
1-2 Related Submittal(s)/Grant(s).....	4
1-3 Tested System Details.....	5
1-4 Test Methodology.....	6
1-5 Test Facility.....	6
2. System Test Configuration.....	
2-1 Justification.....	7
2-2 EUT Exercise Software.....	7
2-3 Special Accessories.....	8
2-4 Equipment Modifications.....	8
2-5 Configuration of Tested System.....	9
Figure 3-1 Configuration of Tested System.....	11
3. Conducted Emission Datas.....	12
4. Radiated Emission Datas	13
4-1 Reaiated Emission Data.....	13
4-2 Field Strength Calculation.....	14
4-3 Correction Factor Table VS Frequency.....	15

1. GENERAL INFORMATION

1-1. Product Description

The ET&T Technology Co., Ltd. Model : ET1055C (referred to as the EUT in the report) is a USB touch screen controller. The summarized feature of EUT are described as following:

- Resolution: 10 bit ADC
- Touch Panel Type: 4-wire
- Interface: USB Port
- LED: Touch/ Untouch indication
- Power: derived from USB Port
- Power consumption: Idle: 26.8 mA Active: 28mA
- Dimension: 79 x 38 x 21mm
 3.11" x 1.50" x 0.83"
- Operation Temperature: 0~70° C
- Storage Temperature: -55~125° C

1-2. Related Submittal(s) / Grant (s)

1-2-1. Models Covered

Only the EUT model ET1055C is submitted for FCC ID filing.

1-2-2. Models Difference

N/A

1-3. Tested System Details

The FCC IDs for all equipments, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Model No.	FCC ID	Equipment	Cable
SERIES.2-7S	DZL6QBS2	Mouse	Shielded Data Cable
4500DC-E	GWGMULTI82	Monitor	Shielded Data Cable ⁽²⁾ Un-Shielded Power Cord
93V	ANO6282	PC	Shielded Power Cord
DPU-414	N/A(3)	Printer	Shielded Parallel Data Cable Un-Shielded Power Cord
DM-1414V	N/A(3)	Modem	Shielded Serial Data Cable Un-Shielded Power Cord
6311	FVI6311-K	Keyboard	Shielded Data Cable
ET1055C	ONYET1055C	Touch Screen Controller	Shielded Data Cable(1)
KTMT1315	N/A	Touch Screen	Un-Shielded Data Cable

Notes:

(1) EUT submitted for grant.

(2) Monitor's attached video cable without ferrite core.

(3) The support equipment was passed by Declaration of Conformity.

1-4. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (1992)/CISPR 22(1996). Radiated testing was performed at an antenna to EUT distance 10 meters.

1-5. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of No. 5, All 2, Lane 220, Kang Lo St., Nei Hwu, Taipei, Taiwan, R.O.C. of NEUTRON ENGINEERING INC. This site has been fully described in report dated Feb.4,1998 Submitted to your office, and accepted in a letter dated March 28, 1998 (31040/SIT-1300F2).

2. System Test Configuration

2-1. Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). The EUT was connected to support equipment-personal computer and touch screen. Peripherals of PC, such as monitor, keyboard, modem and printer were contained in this system in order to comply with the ANSI C63.4/CISPR22(1996)Rules requirement. The PC operated in the default 640x480/31.5KHz VGA Graphic mode. This operating condition was tested and used to collect the included data.

2-2. EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disk, was inserted into driver A and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:

1. Read (write) from (to) mass storage device (Disk).
2. Send "H" pattern to video port device (Monitor).
3. Send " H " pattern to parallel port device (Printer).
4. Send " H " pattern to COM port device (Modem).
5. Repeated from 1 to 4 continuously.

As the EUT, Keyboard and mouse are strictly input devices, no data is transmitted to (from) them during test. They are, however, continuously scanned for data input activity.

2-3. Special Accessories

Not available for this EUT intended for grant.

2-4. Equipment Modifications

Not available for this EUT intended for grant.

Applicant Signature:Robert Cherng**Date:**July 19, 1999**Type/Printed Name:**

Robert Cherng

Position:

President

2.5 Configuration of Tested System

The configuration of tested system is described as the block diagram shown in next page Figure 3.1 and details information of I/O cable and power cord connection are tabalized as Table A and B. The monitor is powered from a floor mounted receptacle (referred to as the wall outlet in the previous described)was tested.

TABLE A - Test Equipment

Item	Equipment	Mfr.	Model/Type No.	I/O Port	FCC ID	Remark
E-1	Mouse	Logitech	SERIES.2-7S	PS2 Port	DZL6QBS2	
E-2	Monitor	Optquest	4500DC-E	VGA Port	GWGMULTI82	
E-3	PC	IBM	93V	N/A	ANO6282	
E-4	Printer	SII	DPU-414	Centronic Port	N/A(3)	
E-5	Modem	ACCEX	DM-1414V	Com 2 Port	N/A(3)	
E-6	Keyboard	ACER	6311	KB DIN Port	FVI6311-K	
E-7	Touch Screen Controller	ET&T	ET1055C	USB Port	ONYET1055C	EUT
E-8	Touch Screen	KEYTEC	KTMT1315	RJ11 Port	N/A	✱

Remark:

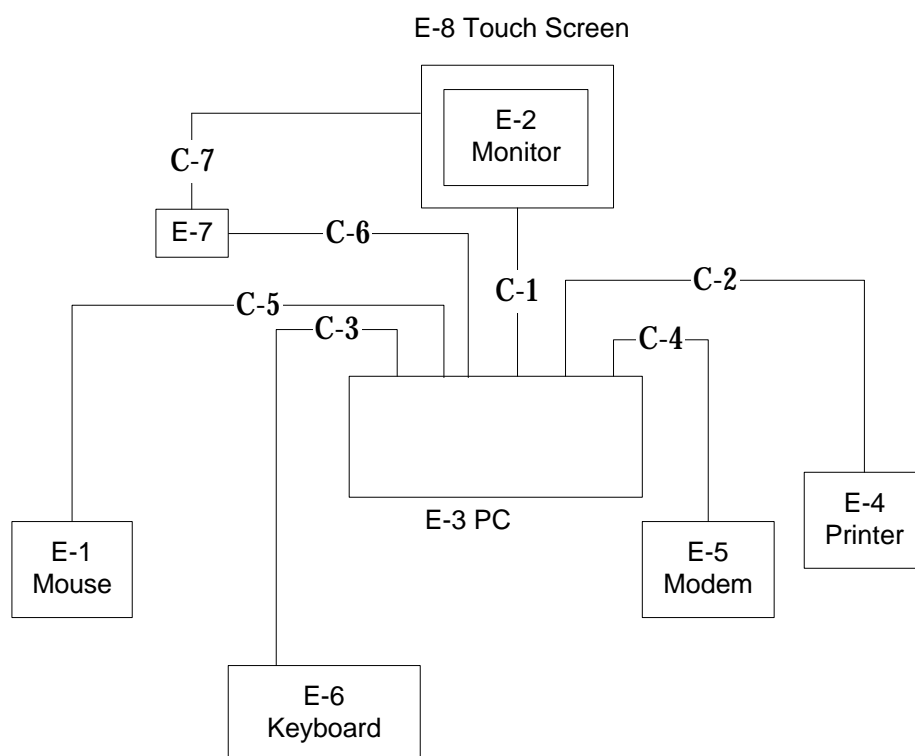
- (1) Unless otherwise denoted as EUT in (Remark) column, device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as ✱ in (Remark) column, Neutron consigns the supporting equipment(s) to the tested system.
- (3) The Support equipment was passed by Declaration of Conformity.

Table B. - Informations Cable Information

Item	I/O Cable	Device Connected	Shielded	Ferrite Core	Detachable/Permanently	Length	Note
C-1	Video Cable	PC-Monitor	Yes	No	Permanently attached	150cm	
C-2	Centronics Cable	PC-Printer	Yes	No	Detachable type	200cm	
C-3	Keyboard Cable	PC-Keyboard	Yes	No	Permanently attached	200cm	
C-4	RS-232 Cable	PC-Modem	Yes	No	Detachable type	120cm	
C-5	Mouse Cable	PC-Mouse	Yes	No	Permanently attached	280cm	
C-6	USB Cable	PC-EUT	Yes	No	Permanently attached	100cm	✱
C-7	RJ11 Cable	EUT-Touch Screen	No	No	Permanently attached	150cm	✱

Note:

(1) Unless otherwise marked as ✱ in (Remark) column, Neutron consigns the supporting equipment(s) to the tested system.

Figure 3.1 Configuration of Tested System

3. Conducted Emission Datas

3.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Judgement: Passed by **-2.20 dB** in mode of **Line** terminal **0.74 MHz**

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe Margins	
		QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dBuV)	Note
0.21	Line	48.91	*	63.13	53.13	-14.22	(QP)
0.32	Line	43.54	*	59.84	49.84	-16.30	(QP)
0.44	Line	43.66	*	56.99	46.99	-13.33	(QP)
0.59	Line	45.05	42.93	56.00	46.00	- 3.07	(AV)
0.74	Line	48.09	43.80	56.00	46.00	- 2.20	(AV)
0.21	Neutral	46.91	*	63.09	53.09	-16.18	(QP)
0.44	Neutral	42.73	*	57.02	47.02	-14.29	(QP)
0.59	Neutral	44.71	43.20	56.00	46.00	- 2.80	(AV)
0.74	Neutral	48.41	43.36	56.00	46.00	- 2.64	(AV)
0.88	Neutral	41.78	*	56.00	46.00	-14.22	(QP)

Remark:

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz. SPA setting in RBW=100KHz,VBW =100KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of<Note>. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Review:



Test Personnel:



Date: July 14, 1999

4. Radiated Emission Datas

- 4.1 The following data lists the significant emission frequency, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.


Judgement: Passed by **-2.27 dB** in polarity of **Vertical** **64.47 MHz**

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
48.35	H	37.00	- 15.08	21.92	30.00	- 8.08	
48.90	V	42.27	- 15.06	27.21	30.00	- 2.79	
64.47	V	44.77	- 17.04	27.73	30.00	- 2.27	
74.40	H	41.97	- 18.00	23.97	30.00	- 6.03	
143.96	H	36.80	- 13.30	23.50	30.00	- 6.50	
162.10	V	37.20	- 13.46	23.74	30.00	- 6.26	
206.90	H	37.50	- 15.14	22.36	30.00	- 7.64	
206.90	V	37.22	- 15.14	22.08	30.00	- 7.92	
218.30	H	33.77	- 14.67	19.10	30.00	- 10.90	
337.10	V	39.60	- 10.35	29.25	37.00	- 7.75	
338.30	H	36.52	- 10.35	26.17	37.00	- 10.83	
462.90	V	39.37	- 6.19	33.18	37.00	- 3.82	

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz. SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of <Note>. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

Review:



Test Personnel:



Date: July 14, 1999

4-2. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor (1)

CF = Cable Attenuation Factor (1)

AG = Amplifier Gain (1) (2)

Remark :

(1) The Correction Factor = AF + CF - AG, as shown in the data tables' Correction Factor column.

(2) AG is not available for Neutron's Open Site Facility

Example of Calculation:

Assume a Receiver Reading of 23.7 dBuV is obtained with an Antenna Factor of 7.2 dBuV and a Cable Factor of 1.1 dBuV. Then:

1. The Correction Factor will be calculated by

$$\text{Correction Factor} = AF + CF - AG = 7.2 + 1.1 - 0 = 8.3 \text{ (dBuV)}$$

as shown in the data tables' Correction Factor column.

2. The Field Strength will be calculated by

$$FS = RA + \text{Correction Factor} = 23.7 + 8.3 = 32 \text{ (dBuV)}.$$

FS is the value shown in the data tables' Corrected Reading column and RA is the value shown in

the data tables' Receiver Reading column. The 32 dBuV/m value was mathematically converted

to its corresponding level in uV/m as:

$$\text{Log}^{-1} [(32.0 \text{ dBuV/m}) / 20] \times 39.8 \text{ (uV/m)}$$

4-3. Correction Factor VS Frequency

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30.00	11.10	0.90
35.00	10.80	0.50
40.00	11.20	1.00
45.00	11.50	0.80
50.00	11.30	1.00
55.00	10.50	1.30
60.00	9.90	1.00
65.00	8.70	1.50
70.00	7.60	1.20
75.00	6.40	1.40
80.00	6.10	1.30
85.00	7.00	1.40
90.00	8.00	1.70
95.00	10.00	1.50
100.00	11.20	1.90
110.00	12.60	2.00
120.00	13.00	1.80
130.00	12.50	1.80
140.00	12.00	2.00
150.00	12.00	2.20
160.00	13.20	2.40
170.00	14.80	2.50
180.00	16.30	2.50
190.00	17.00	2.50
200.00	17.30	2.40
225.00	10.50	2.70
250.00	11.70	3.10
275.00	12.80	3.70
300.00	14.50	4.00
325.00	14.00	4.50
350.00	14.20	4.50
375.00	14.60	4.60
400.00	15.10	4.80
450.00	16.20	5.40
500.00	17.60	6.50
550.00	17.80	7.00
600.00	18.40	7.10
650.00	19.50	7.10
700.00	20.80	7.20
750.00	20.50	7.50
800.00	21.10	8.00
850.00	22.40	8.60
900.00	23.50	8.90
950.00	24.00	9.70
1000.00	24.80	10.30

