

Straubing, July 3, 2007

TEST - REPORT

No. 55456-070375-2 (Edition 2)

for

**i-B2L
Type S/NA**

Active Transponder Tag

Applicant: IDENTEC SOLUTIONS AG

**Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.215 and 15.249**

**Industry Canada Radio Standards
Specifications
RSS-Gen Issue 1, Section 7.2.2 and
RSS-210 Issue 6, Sections 2.2, A2.9
(Category I Equipment)**

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT.....	7
6	Measurement Procedures.....	8
6.1	Bandwidth Measurements	8
6.2	Pulse Train Measurement	9
6.3	Radiated Emission in Fully or Semi Anechoic Room.....	10
6.4	Radiated Emission at Open Field Test Site.....	12
7	Photographs Taken During Testing	13
8	Test Results.....	17
8.1	Occupied Bandwidth.....	19
8.2	Bandwidth of the Emission	23
8.3	Designation of Emissions	25
8.4	Pulse Train Measurement	26
8.5	Restricted Bands of Operation	29
8.6	Radiated Emission Measurement 9 kHz to 30 MHz	30
8.7	Radiated Emission Measurement 30 MHz to 10 GHz	31
8.8	Exposure of Humans to RF Fields.....	32
9	Referenced Regulations	34
10	Revision History	35
11	Charts taken during testing	36

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	i-B2L Type S/NA
Parts ² :	
Serial number(s):	0.390.000.001
Manufacturer:	IDENTEC SOLUTIONS AG
Type of equipment:	Active Transponder Tag
Version:	As delivered
FCC ID:	OO4-ILR-IB2L
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	902 - 928 MHz
Frequency range:	916 MHz
Operating frequency:	916 MHz
Type of modulation:	ASK
Pulse train:	8.76 ms
Pulse width:	100 ms
Number of RF-channels:	1
Channel spacing:	Not Applicable (Wideband)
Designation of emissions ³ :	200kA1D
Type of antenna:	Integrated on printed board
Size/length of antenna:	60 mm
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	Battery supply
Specifications for power supply:	nominal voltage: 3.6 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details	
Applicant (full address):	IDEN TEC SOLUTIONS AG Millenniumspark 2 A-6890 Lustenau
Contact person:	Mr. Reinhold Gantner
Contract identification:	
Receipt of EUT:	May 3, 2007
Date(s) of test:	May 2007
Note(s):	

Report details	
Report number:	55456-070375-2
Edition:	2
Issue date:	July 3, 2007

3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC test site registration number	90926
Industry Canada test site registration:	IC 3050
Contact person:	Mr. Johann Roidt
	Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.215 and 15.249

of the Federal Communication Commission (FCC) and the

Radio Standards Specifications

RSS-210 Issue 6, Sections 2.2, 2.6 and A2.9 (Category I Equipment)

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Mode

Transmitting continuously with modulation.

Configuration of EUT

The EUT was configured as stand alone device.

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification⁴</i>	<i>Cable type</i>	<i>Cable length</i>
	Not Applicable			

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
	Not Applicable			

List of support devices

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
	Not Applicable			

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements


Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 1, sections 4.4.1 and 4.4.2 IC RSS-210 Issue 6, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 1, sections 4.4.1 and 4.4.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.3)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

6.2 Pulse Train Measurement

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-Gen Issue 1, section 4.3
Guide:	ANSI C63.4
Measurement setup:	<input type="checkbox"/> Conducted: See below (direct connection or via test fixture) <input checked="" type="checkbox"/> Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.3)
<p>If antenna is detachable pulse train measurements shall be performed at the antenna connector (conducted measurement). The RF output terminals are connected to a spectrum analyzer or to a diode detector in combination with an oscilloscope. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If antenna is not detachable a test fixture may be used instead of direct connection to RF output terminals.</p> <p>If radiated measurements are performed similar test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. However, the spectrum analyzer may be replaced by a diode detector connected to an oscilloscope.</p>	

6.3 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249 IC RSS-210 Issue 6, section A2.9
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully or semi anechoic room are indicated as prescans.</p>	

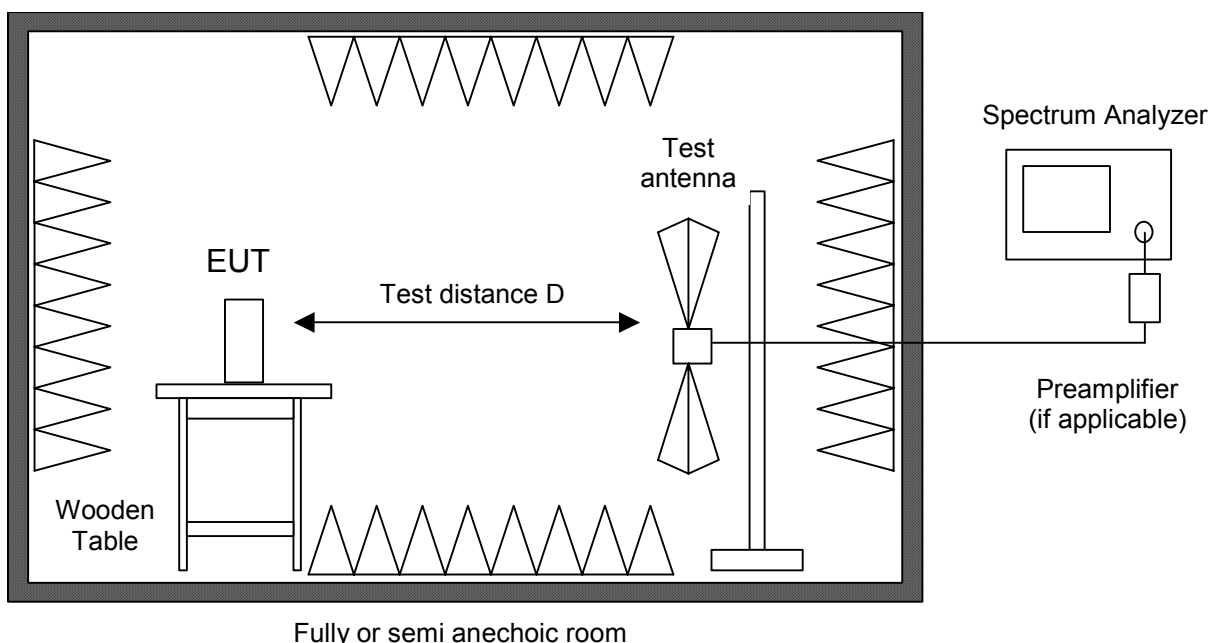

Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	Spectrum analyzer	R 3271	05050023	Advantest
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input type="checkbox"/>	Preamplifier	R14601		Advantest
<input checked="" type="checkbox"/>	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
<input type="checkbox"/>	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
<input checked="" type="checkbox"/>	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
<input checked="" type="checkbox"/>	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
<input type="checkbox"/>	Horn antenna	3115	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	9112-1003	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-04	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-05	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-06	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-07	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens

6.4 Radiated Emission at Open Field Test Site

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.215(b) and 15.249
 IC RSS-210 Issue 6, section A2.9


Guide: ANSI C63.4

Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.

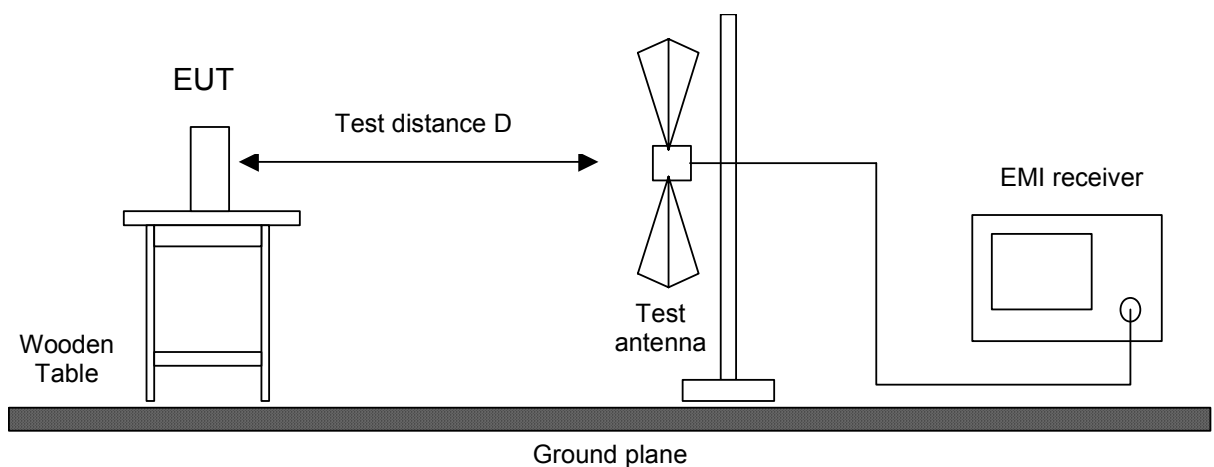

Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI receiver	ESVP	881120/024	Rohde & Schwarz
<input checked="" type="checkbox"/>	Biconical antenna	EG 1 HK 116	842204/001	Rohde & Schwarz
<input checked="" type="checkbox"/>	Log. per. antenna	EG 1 HL 223	841516/023	Rohde & Schwarz
<input checked="" type="checkbox"/>	Open field test site	EG 1	1450	Senton

7 Photographs Taken During Testing

**Test setup for radiated emission measurement
(fully anechoic room)**



**Test setup for radiated emission measurement
(open field test site)**



**Test setup for radiated emission measurement
(open field test site) - continued -**



8 Test Results

FCC CFR 47 Parts 2 and 15			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	19	Recorded
15.215(c)	Bandwidth of the emission	23	Test passed
2.201, 2.202	Class of emission	25	Calculated
15.35(c)	Pulse train measurement for pulsed operation	26	Recorded
15.205(a)	Restricted bands of operation	29	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
15.205(b) 15.249	Radiated emission 9 kHz to 30 MHz	30	Test passed
15.205(b) 15.215(b) 15.249	Radiated emission 30 MHz to 10 GHz	31	Test passed

IC RSS-Gen Issue 1			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.6	Transmitter output power (conducted)	---	Not applicable
4.4.1	Occupied Bandwidth	19	Recorded
3.2(h), 8	Designation of emissions	25	Calculated
4.3	Pulsed operation	26	Recorded
7.2.2	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	---	Not applicable
5.5	Exposure of Humans to RF Fields	32	Exempted from SAR and RF evaluation

IC RSS-210 Issue 6			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.2(a)	Restricted bands and unwanted emission frequencies	29	Test passed
2.2(b)(c), 2.6 A2.9	Unwanted emissions 9 kHz to 30 MHz	30	Test passed
2.2(b)(c), 2.6 A2.9	Unwanted emissions 30 MHz to 10 GHz	31	Test passed

8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.	
	The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.	
	The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
30 MHz to 1000 MHz	10 kHz	
1000 MHz to 40 GHz	100 kHz	
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	May 22, 2007
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):




*RBW 10 kHz Marker 1 [T1]
 VBW 30 kHz 50.43 dBμV
 SWT 200 ms 916.600000000 MHz

Ref 55 dBμV

*Att 0 dB

1 PK
 VIEW

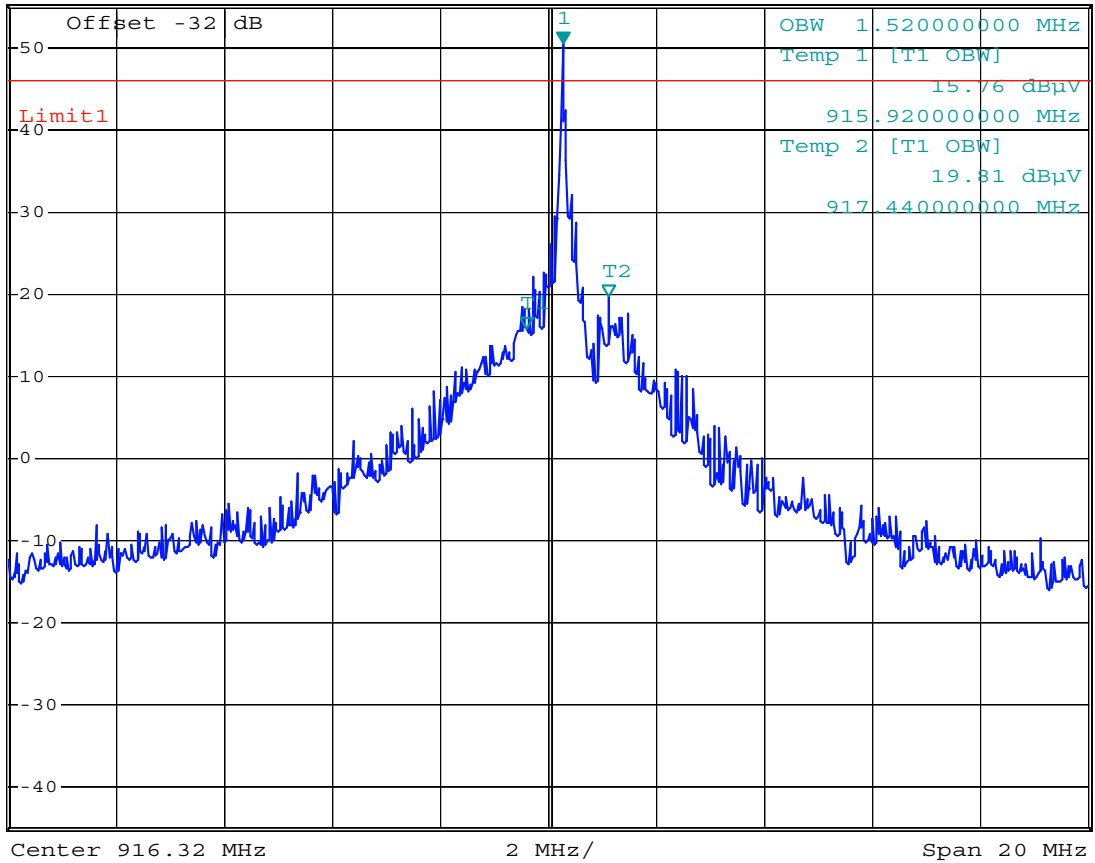

Date: 22.MAY.2007 10:02:35


Occupied Bandwidth (99 %): **1520 kHz**

Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 1, section 4.4.1
Guide:	IC RSS-Gen Issue 1, section 4.4.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	May 22, 2007
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):

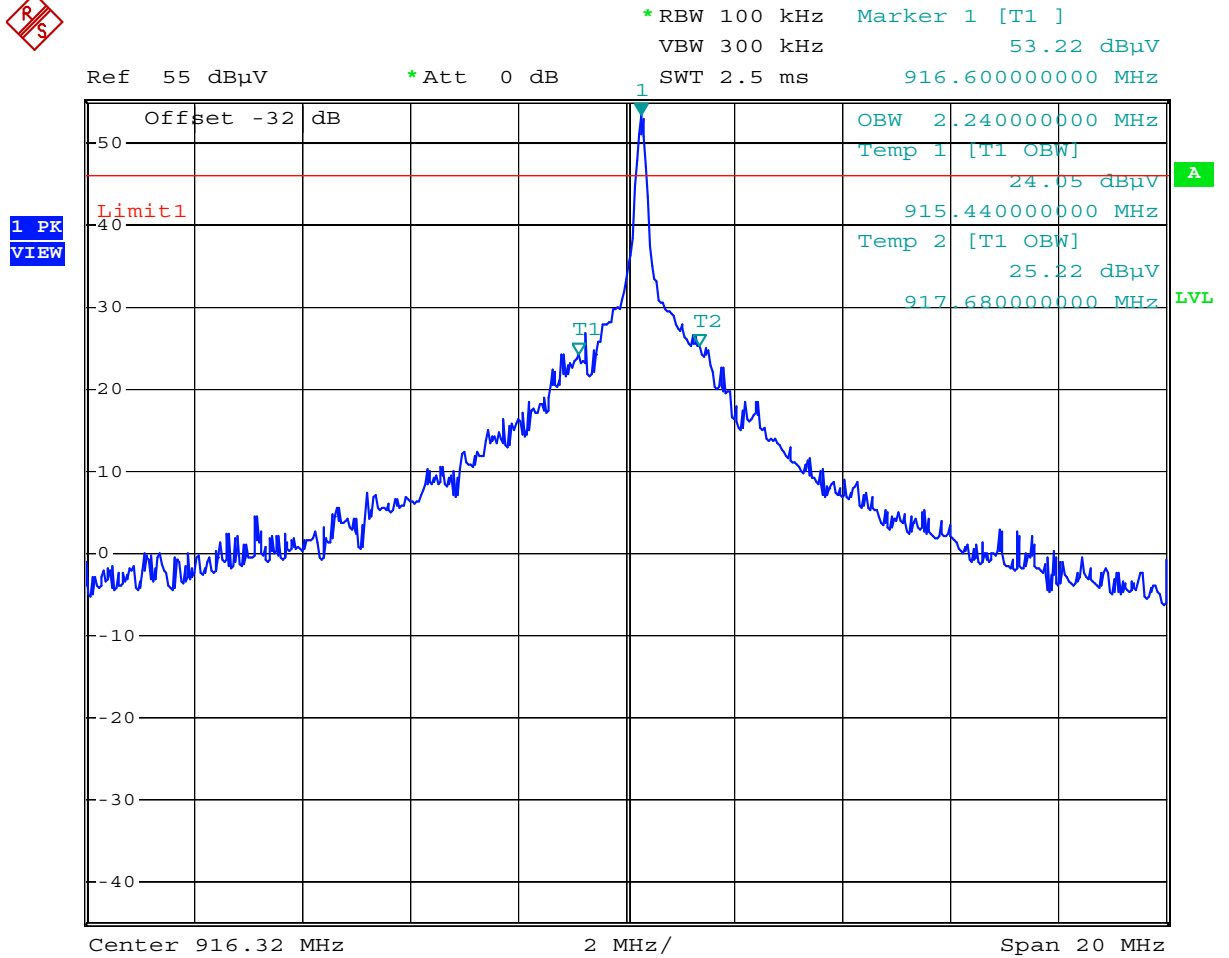

Date: 22.MAY.2007 10:04:21

Occupied Bandwidth (99 %): **2240 kHz**


8.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)	
Guide:	ANSI C63.4	
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
The video bandwidth shall be at least three times greater than the resolution bandwidth.		
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	May 22, 2007
Test site:	Fully anechoic room, cabin no. 2



MARKER 3
 916.8 MHz
 Ref 55 dBµV *Att 0 dB *RBW 10 kHz Marker 3 [T1]
 VBW 30 kHz 23.99 dBµV
 SWT 200 ms 916.800000000 MHz

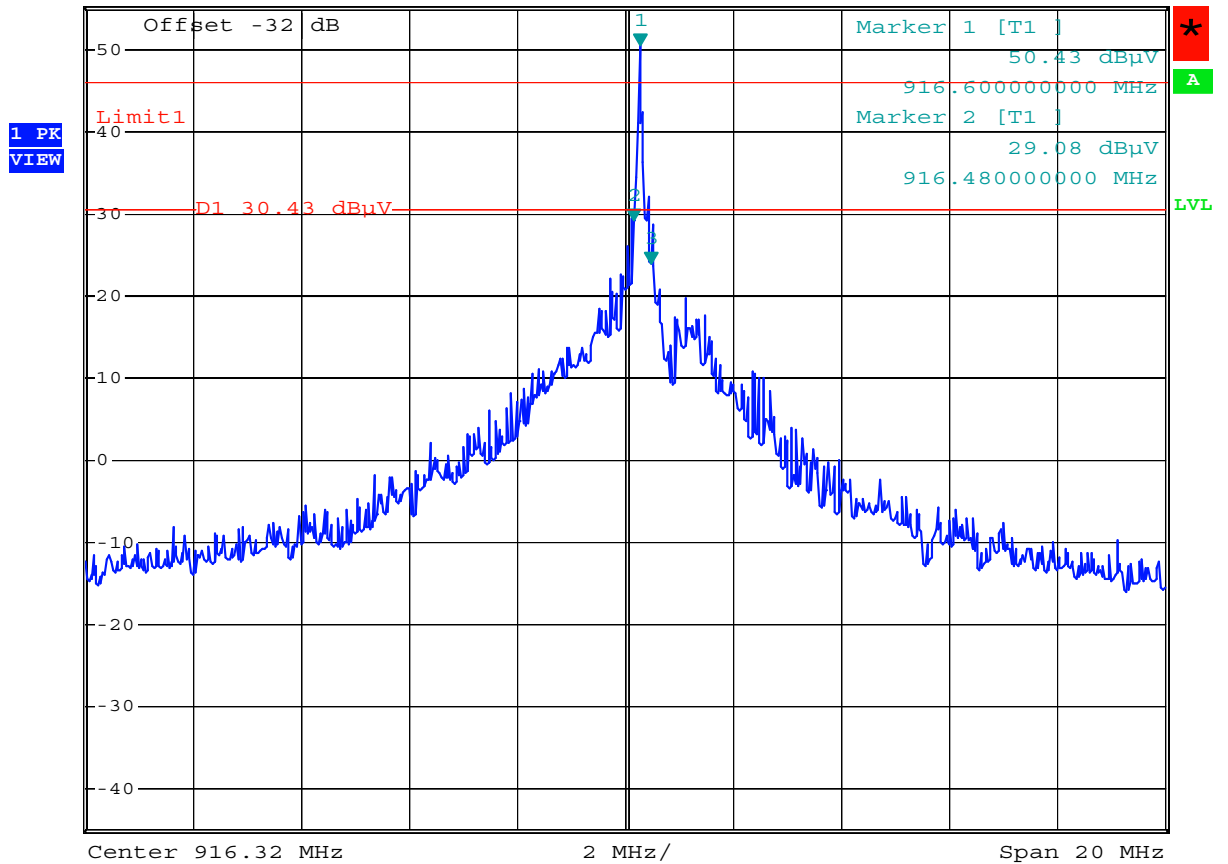

Date: 22.MAY.2007 10:03:26

Permitted frequency band:	902 - 928 MHz	
20 dB bandwidth:	320 kHz	
Carrier frequency stability:	<input type="checkbox"/> specified	<input checked="" type="checkbox"/> not specified
Maximum frequency tolerances:		
Bandwidth of the emission:	within permitted frequency band ⁵ :	
	<input checked="" type="checkbox"/> yes	<input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁵ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 1, sections 3.2(h) and 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	$B = 100 \text{ kHz}$
K = Overall numerical factor	$K = 1$
Calculation:	$B_n = 2 \cdot (100 \text{ kHz}) \cdot 1 = 200 \text{ kHz}$

Designation of Emissions:	200KA1D
---------------------------	----------------

8.4 Pulse Train Measurement

Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-Gen Issue 1, section 4.3
Guide:	ANSI C63.4
Measurement procedure:	Pulse Train Measurement (6.2)

Comment:	
Date of test:	May 22, 2007
Test site:	Fully anechoic room, cabin no. 2

Calculation of pulse train correction:


TX-On-Time (worst case):	T_{on}	=	$4 \cdot 2.19\text{ms} = 8.76 \text{ ms}$
Pulse Train Time:	T_{pt}	=	100 ms
Period Time:	T_{period}	=	100 ms
Pulse Train Correction:	C_{pt}	=	$20 \cdot \text{Log}(T_{on} / T_{period}) \text{ dB}$
		=	-21.15 dB
Used Pulse Train Correction	$C_{pt,used}$	=	-20 dB

Total Pulse Train:



DELTA MARKER 1
 2.19 ms
 Ref 55 dBµV *Att 0 dB

RBW 100 kHz Delta 1 [T1]
 VBW 300 kHz 3.32 dB
 SWT 2.5 ms 2.190000 ms

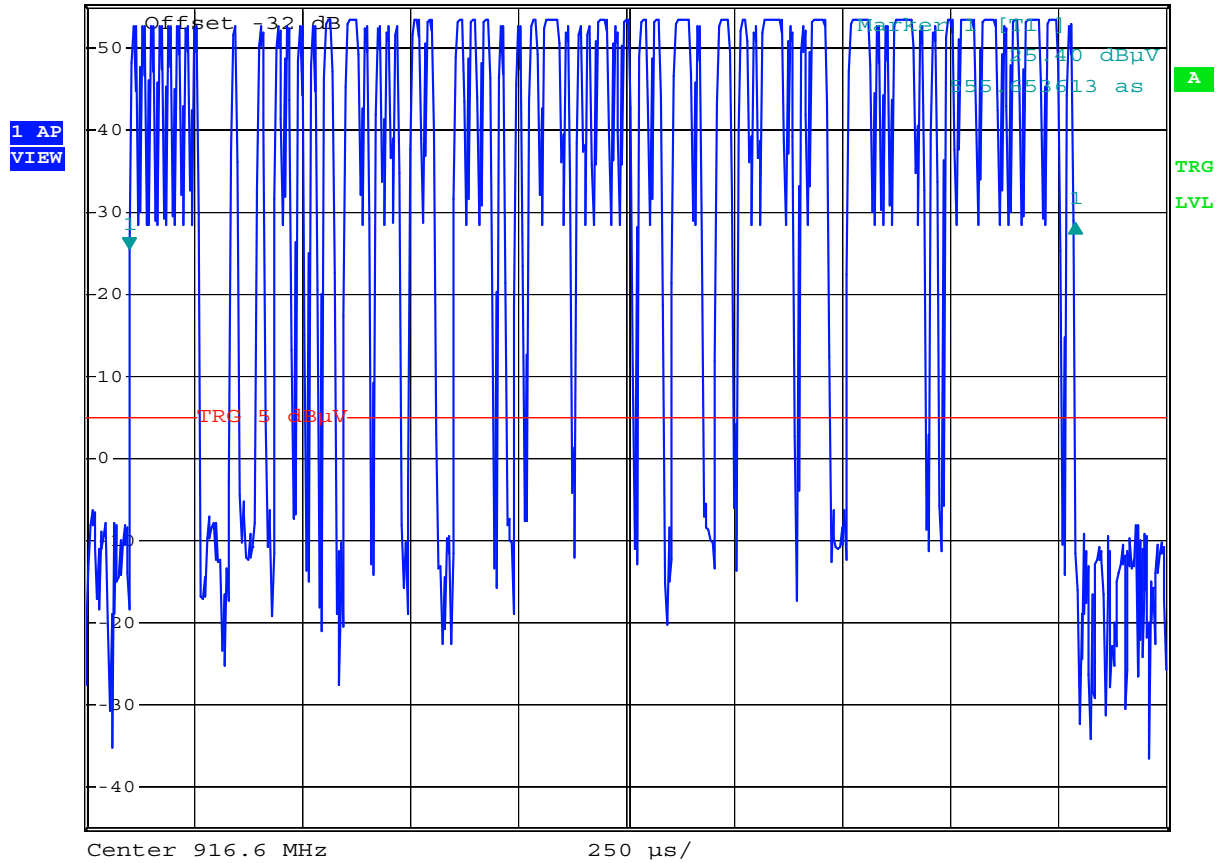

Date: 22.MAY.2007 10:05:41

Worst case 0.1 second interval:




RBW 100 kHz
VBW 300 kHz
SWT 100 ms

Ref 55 dB μ V

*Att 0 dB

1 AP
VIEW

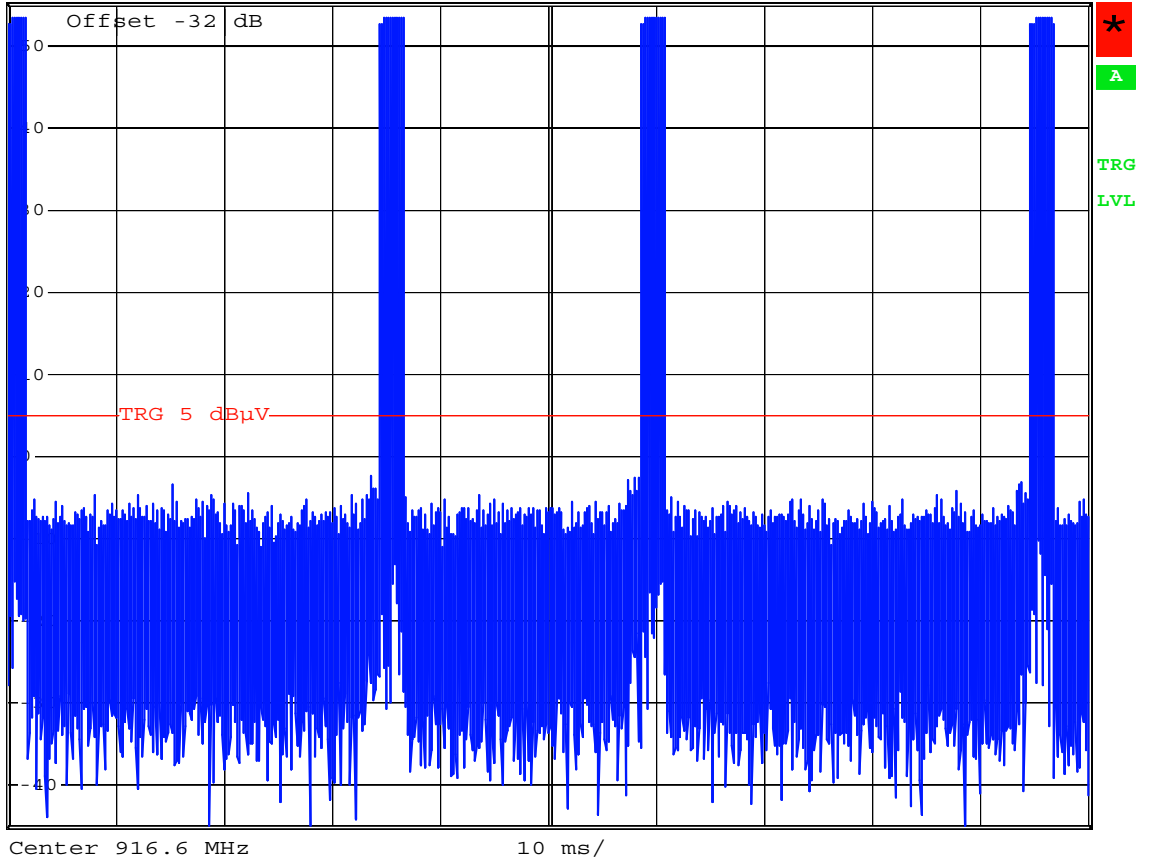


Date: 22.MAY.2007 10:06:27

8.5 Restricted Bands of Operation

Rules and specifications:	CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 6, section 2.2(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 6, section 2.2(a).
Measurement procedure:	Radiated Emission in Fully or Semi Anechoic Room (6.3)

Comment:	
Date of test:	May 22, 2007
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

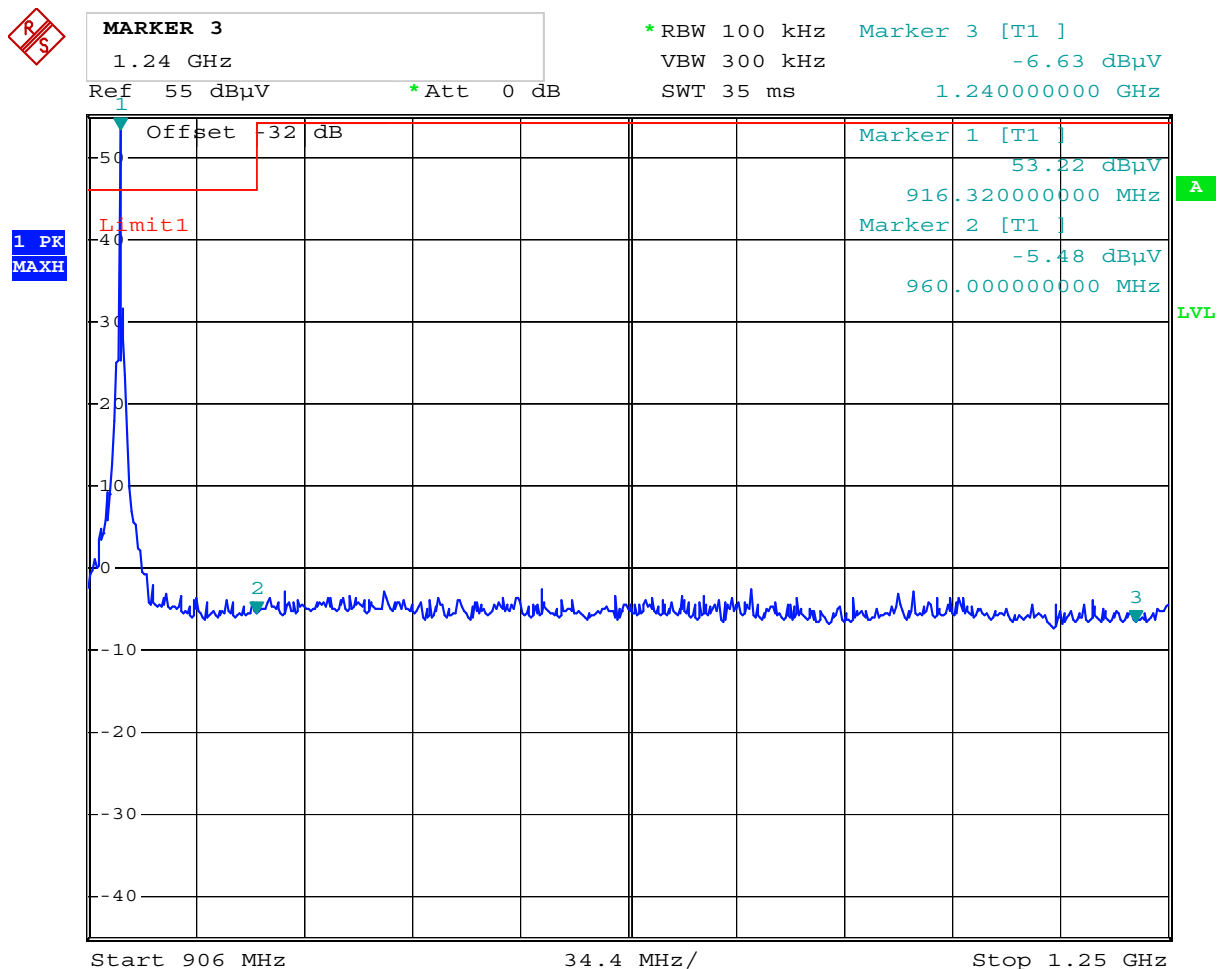

Date: 22.MAY.2007 10:01:48

Test Result:	Test passed
--------------	-------------

8.6 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-210 Issue 6, sections 2.2(b)(c), 2.6 and A2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	0.009 - 0.490	$2400/F(\text{kHz})$	$67.6 - 20 \cdot \log(F(\text{kHz}))$	300
	0.490 - 1.705	$24000/F(\text{kHz})$	$87.6 - 20 \cdot \log(F(\text{kHz}))$	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				

Test Result:	Test passed (no emissions below 30 MHz found)
--------------	-----------------------------------------------

8.7 Radiated Emission Measurement 30 MHz to 10 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249 IC RSS-210 Issue 6, section A2.9		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.3) Radiated Emission at Open Field Test Site (6.4)		

Comment:	
Date of test:	May 21, 2007 / May 24, 2007
Test site:	Frequencies \leq 1 GHz: Open field test site Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	Frequencies \leq 8.2 GHz: 3 meters Frequencies $>$ 8.2 GHz: 1 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading ($\text{dB}\mu\text{V}$)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value ($\text{dB}\mu\text{V}/\text{m}$)	Limit ($\text{dB}\mu\text{V}/\text{m}$)	Margin (dB)
916.600	vertical	Quasi-Peak	59.5	26.2		85.7	94.0	8.3
1835.200	vertical	Peak	24.0	31.2	-20.0	35.2	54.0	18.8
2751.200	horizontal	Peak	19.3	28.8	-20.0	28.1	54.0	25.9

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V}/\text{m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB}/\text{m)} + \text{Pulse Train Correction (dB)}$$

8.8 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 1, section 5.5
Guide:	IC RSS-102 Issue 2, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
The conducted output power (CP in watts) is measured at the antenna connector: $CP = \dots\dots\dots \text{W}$ The effective isotropic radiated power (EIRP in watts) is calculated using <input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{W}$ <input type="checkbox"/> the field strength ⁶ in V/m: $FS = \dots\dots\dots \text{V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{W}$ with: Distance between the antennas in m: $D = \dots\dots\dots \text{m}$		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/> not detachable				
A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by ⁶ : $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 111.46 \mu\text{W}$ with: Field strength in V/m: $FS = 19.275 \text{ mV/m}$ Distance between the two antennas in m: $D = 3 \text{ m}$			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Selection of output power				
The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.): $TP = 111.46 \mu\text{W}$				

⁶ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
<input type="checkbox"/> less than or equal to 20 cm <input checked="" type="checkbox"/> greater than 20 cm		<input checked="" type="checkbox"/>		
Transmitting device is				
<input type="checkbox"/> in the vicinity of the human head <input type="checkbox"/> body-worn		<input checked="" type="checkbox"/>		
SAR evaluation				
SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm.				
<input type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and its source-based time-averaged output power is less than, or equal to 200 mW for General Public Use and 1000 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 1 GHz up to 2.2 GHz inclusively and its source-based time-averaged output power is less than, or equal to 100 mW for General Public Use and 500 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 2.2 GHz up to 3 GHz inclusively and its source-based time-averaged output power is less than, or equal to 20 mW for General Public Use and 100 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 3 GHz up to 6 GHz inclusively and its source-based time-averaged output power is less than, or equal to 10 mW for General Public Use and 50 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> SAR evaluation is documented in test report no.				
RF exposure evaluation				
RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm.				
<input checked="" type="checkbox"/> The device operates below 1.5 GHz and its e.i.r.p. is equal to or less than 2.5 W.				<input checked="" type="checkbox"/>
<input type="checkbox"/> The device operates at or above 1.5 GHz and the e.i.r.p. of the device is equal to or less than 5 W.				<input type="checkbox"/>
<input type="checkbox"/> RF exposure evaluation is documented in test report no.				

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2006
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	August 14, 2006
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 1 containing General Requirements and Information for the Certification of Radiocommunication Equipmment, published by Industry Canada	September 2005
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 6 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	September 2005
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 1 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	September 2005
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 2: Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)	November 2005
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
<input checked="" type="checkbox"/>	TRC-43	Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October 9, 1982

10 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	June 11, 2007	Martin Steindl (cj)	First Edition
2	July 3, 2007	Christa Jäger	Edition 2 Modification required for FCC Certification: Test attached: Radiated measurement 9 kHz - 30 MHz

11 Charts taken during testing


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: i-B2L S/NA	
Serial no.: 0.390.000.001	
Applicant: IDENTEC SOLUTIONS AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 05/22/2007	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - 3 V battery supply - transmitting continuously with modulation

Detector: Peak

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

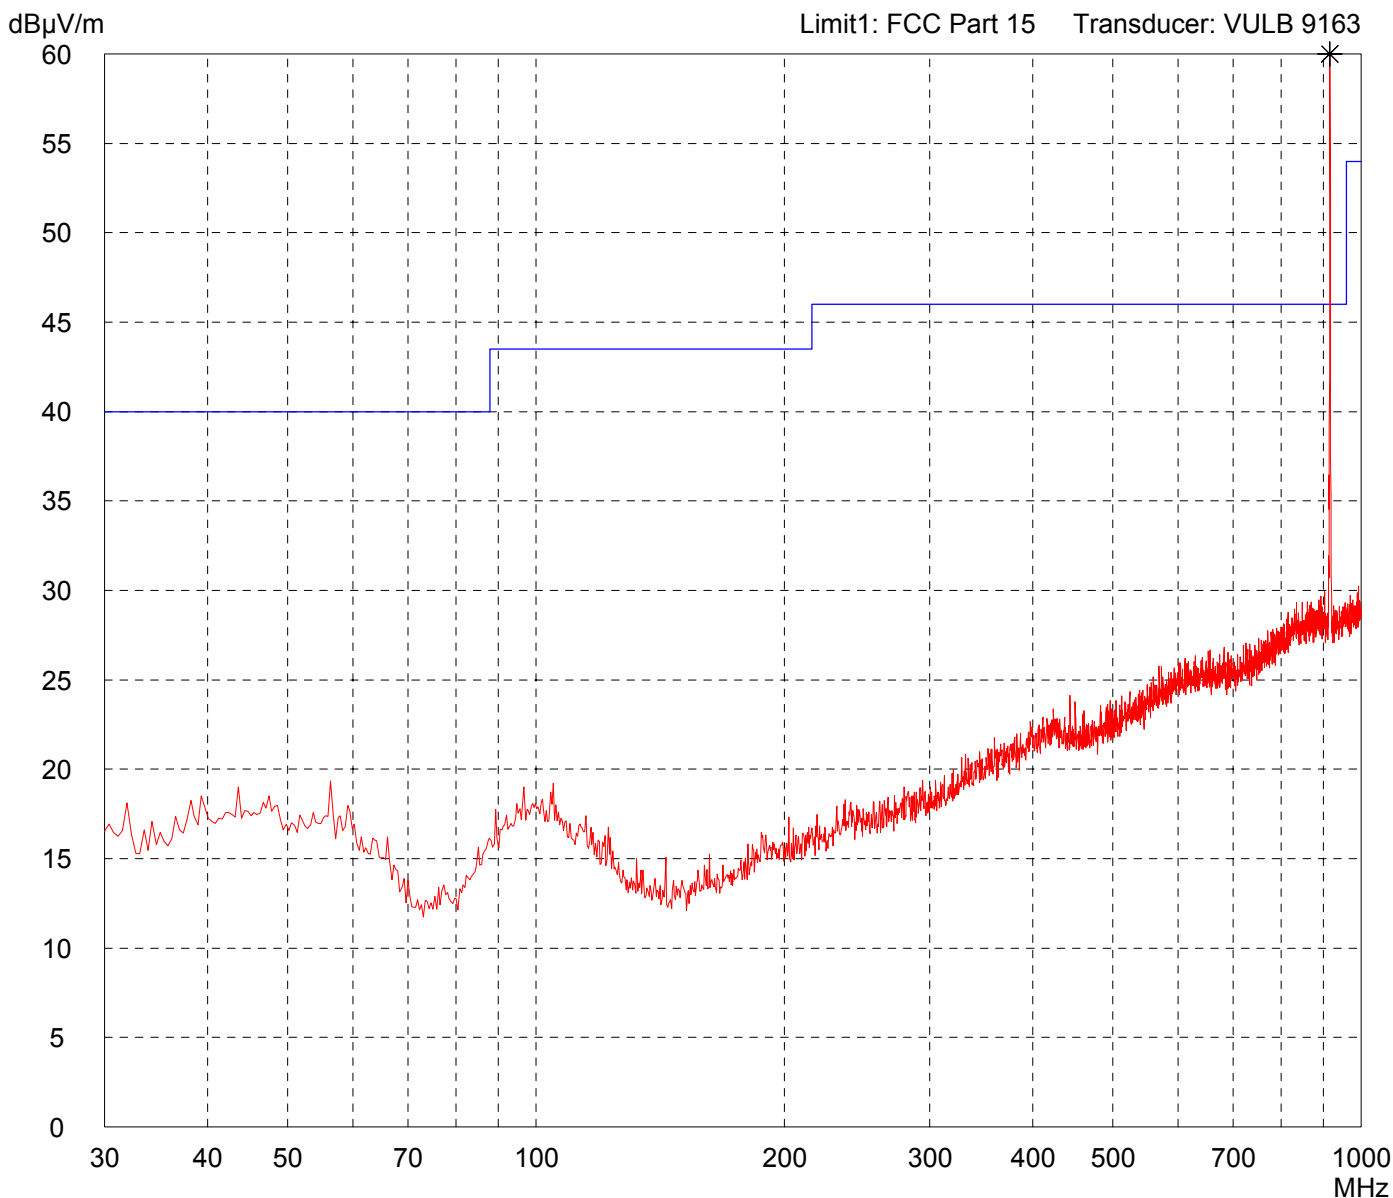


Result: Prescan

Project file: 55456-70375

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: i-B2L S/NA	Comment: - 3 V battery supply - transmitting continuously with modulation	
Serial no.: 0.390.000.001		
Applicant: IDENTEC SOLUTIONS AG		
Test site: Fully anechoic room, cabin no. 2		
Tested on: Test distance 3 metres Vertical Polarization		
Date of test: 05/22/2007		Operator: M. Steindl
Test performed: automatically	File name: default.emi	
Detector: Peak	List of values: 10 dB Margin	50 Subranges

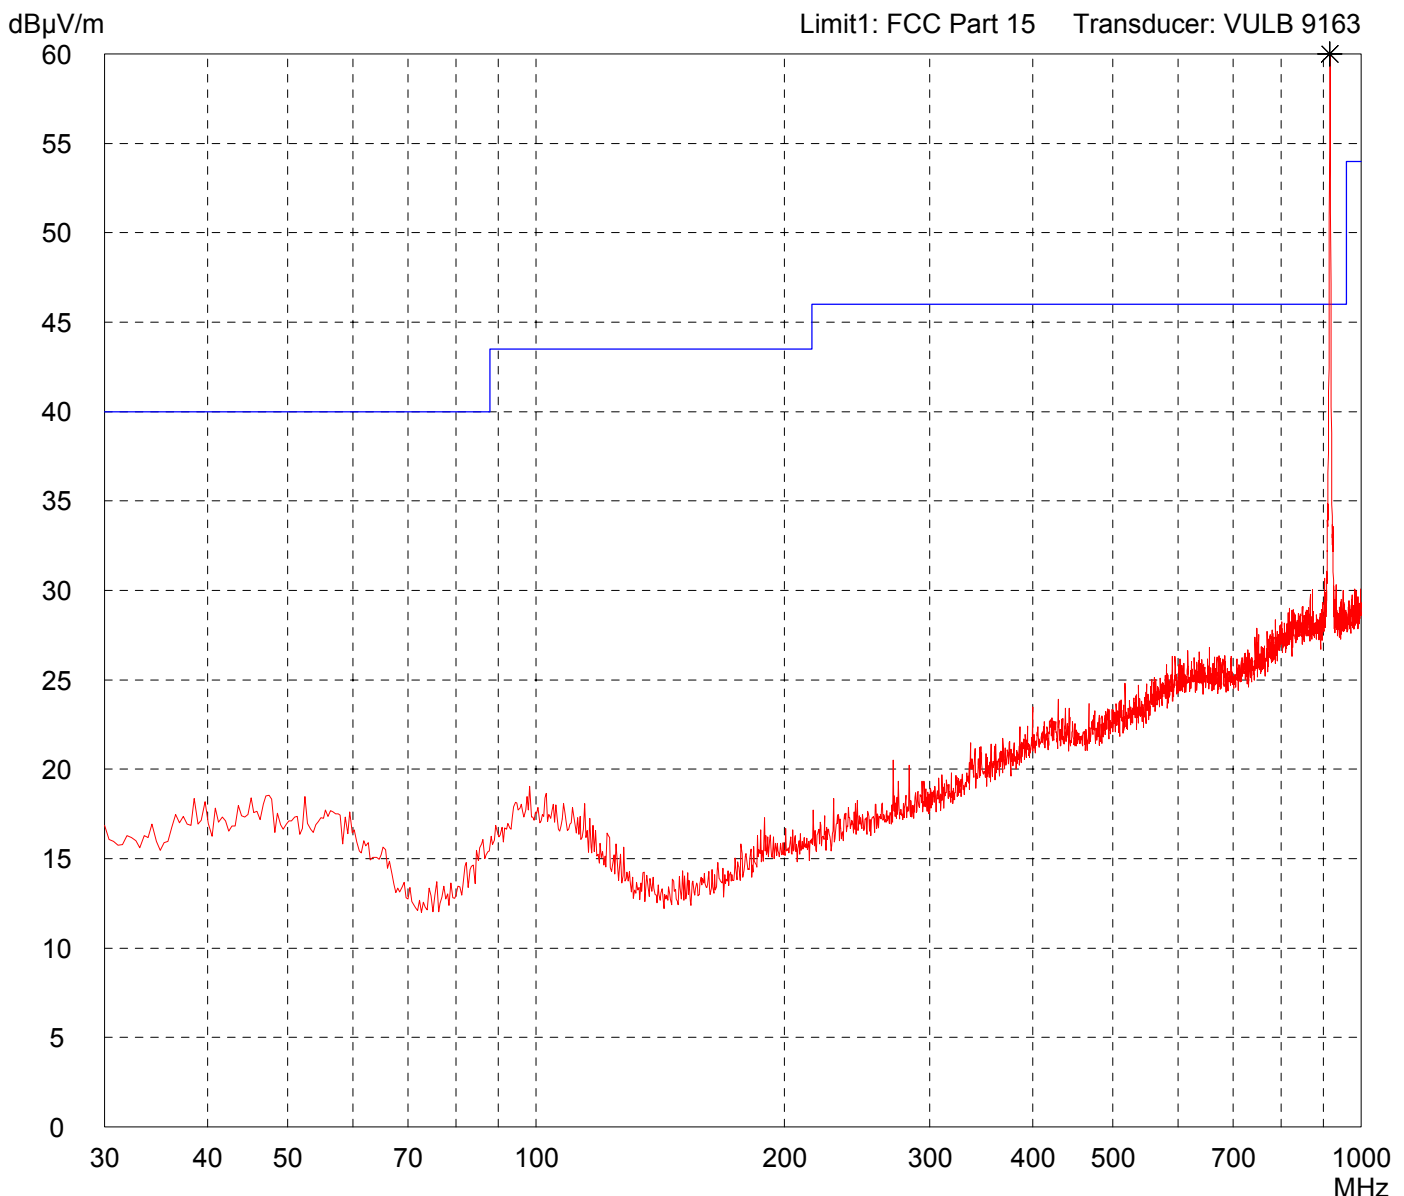

Result: Prescan	Project file: 55456-70375
--------------------	------------------------------


Radiated Emission Test 1 GHz - 2.6 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: i-B2L S/NA	
Serial no.: 0.390.000.001	
Applicant: IDENTEC SOLUTIONS AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 05/22/2007	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - 3 V battery supply - transmitting continuously with modulation

Detector: Peak

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

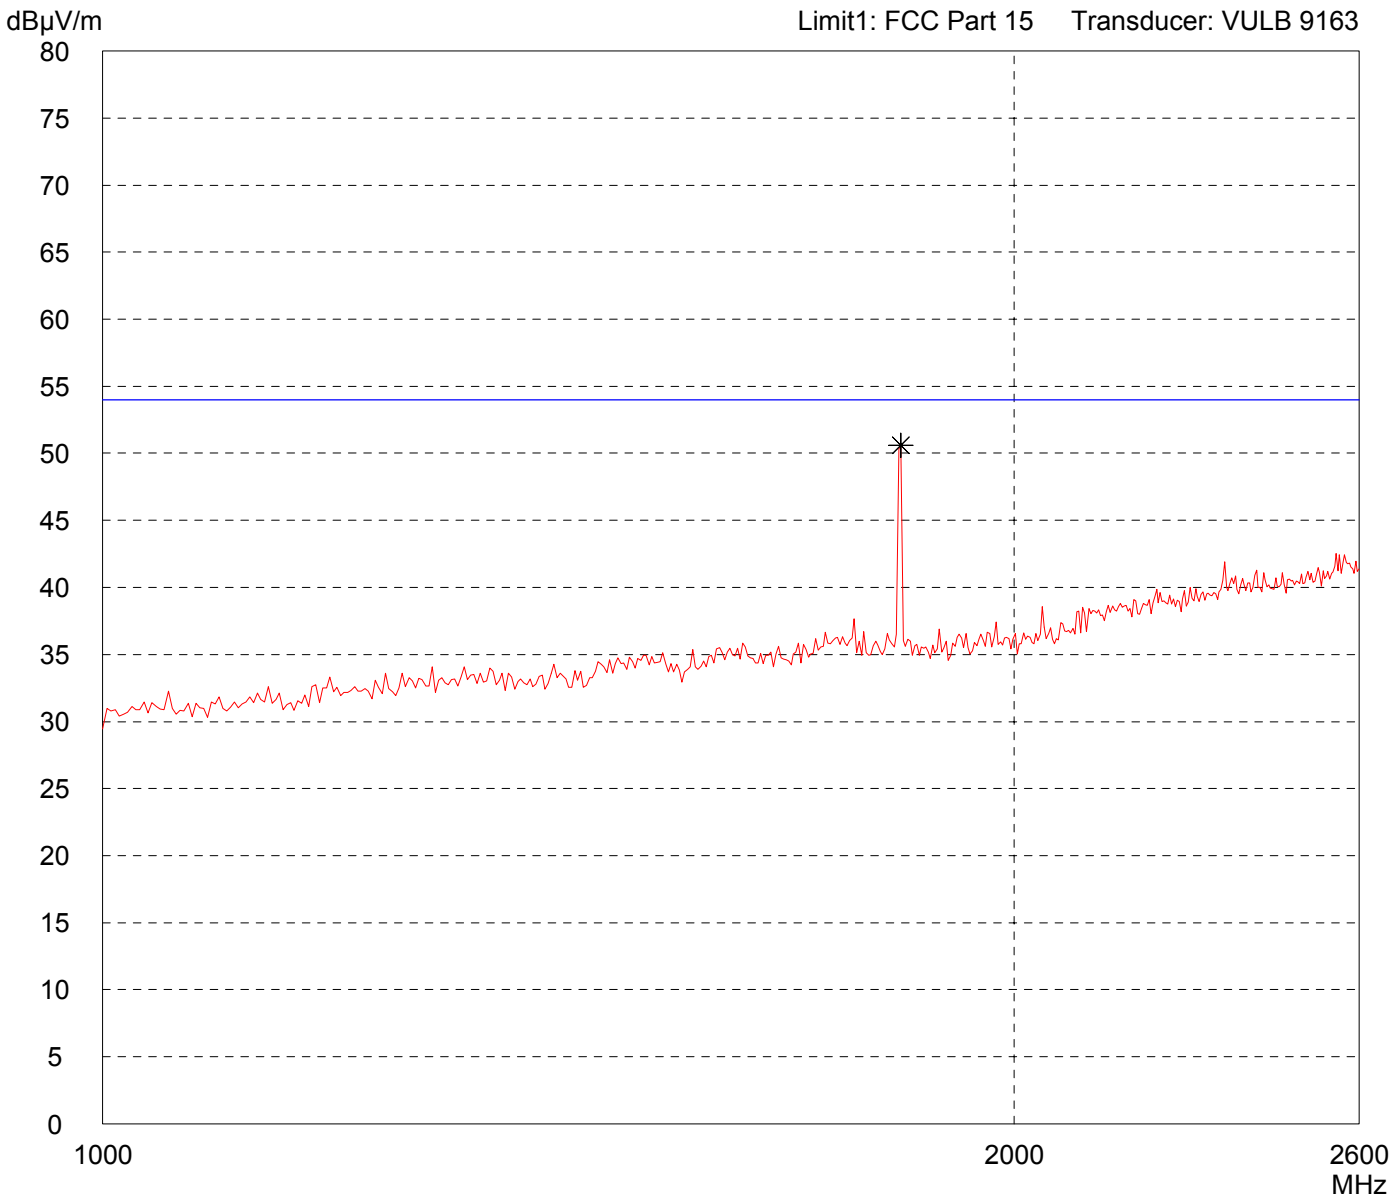

Result: Prescan

Project file: 55456-70375


Radiated Emission Test 1 GHz - 2.6 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: i-B2L S/NA	
Serial no.: 0.390.000.001	
Applicant: IDENTEC SOLUTIONS AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 05/22/2007	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - 3 V battery supply - transmitting continuously with modulation

Detector: Peak

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

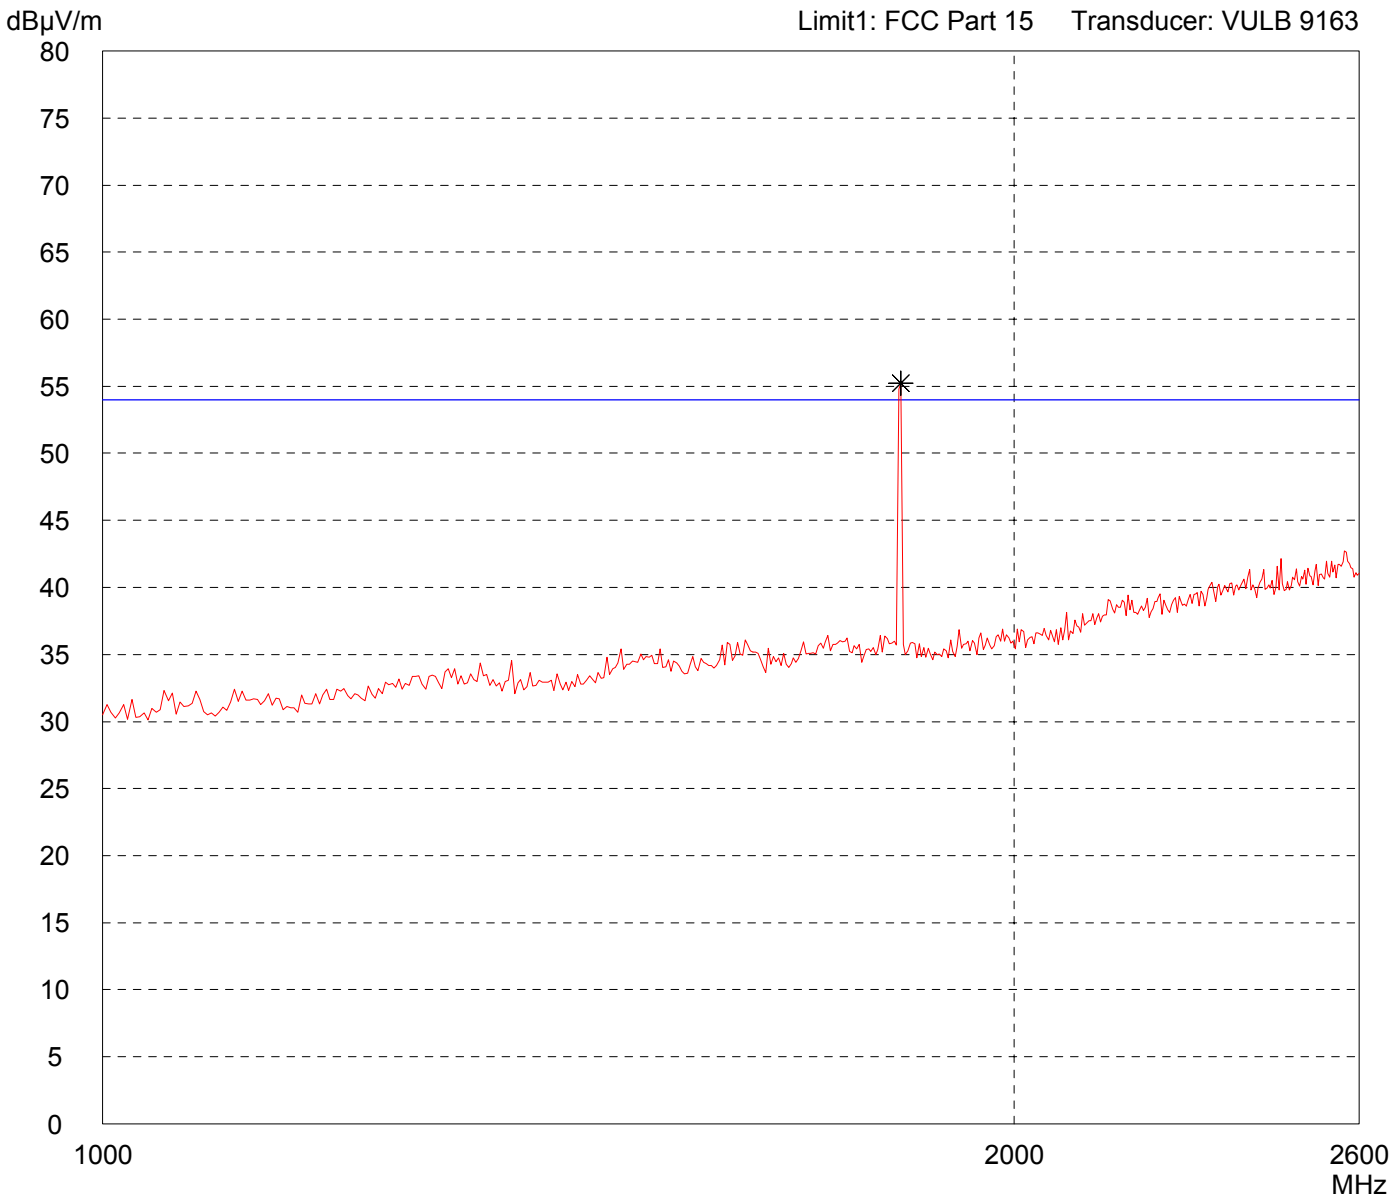


Result: Prescan

Project file: 55456-70375

Radiated Emission Test 2.6 GHz - 3.95 GHz acc. to FCC Part 15 (EMCO 3160)

<p>Model: i-B2L S/NA</p> <p>Serial no.: 0.390.000.001</p> <p>Applicant: Identec Solutions AG</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 meters Horizontal Polarization</p> <p>Date of test: 05/24/2007 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - 3.0 V battery supply - transmitting continuously with modulation
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
---------------------------	---------------------------------------------

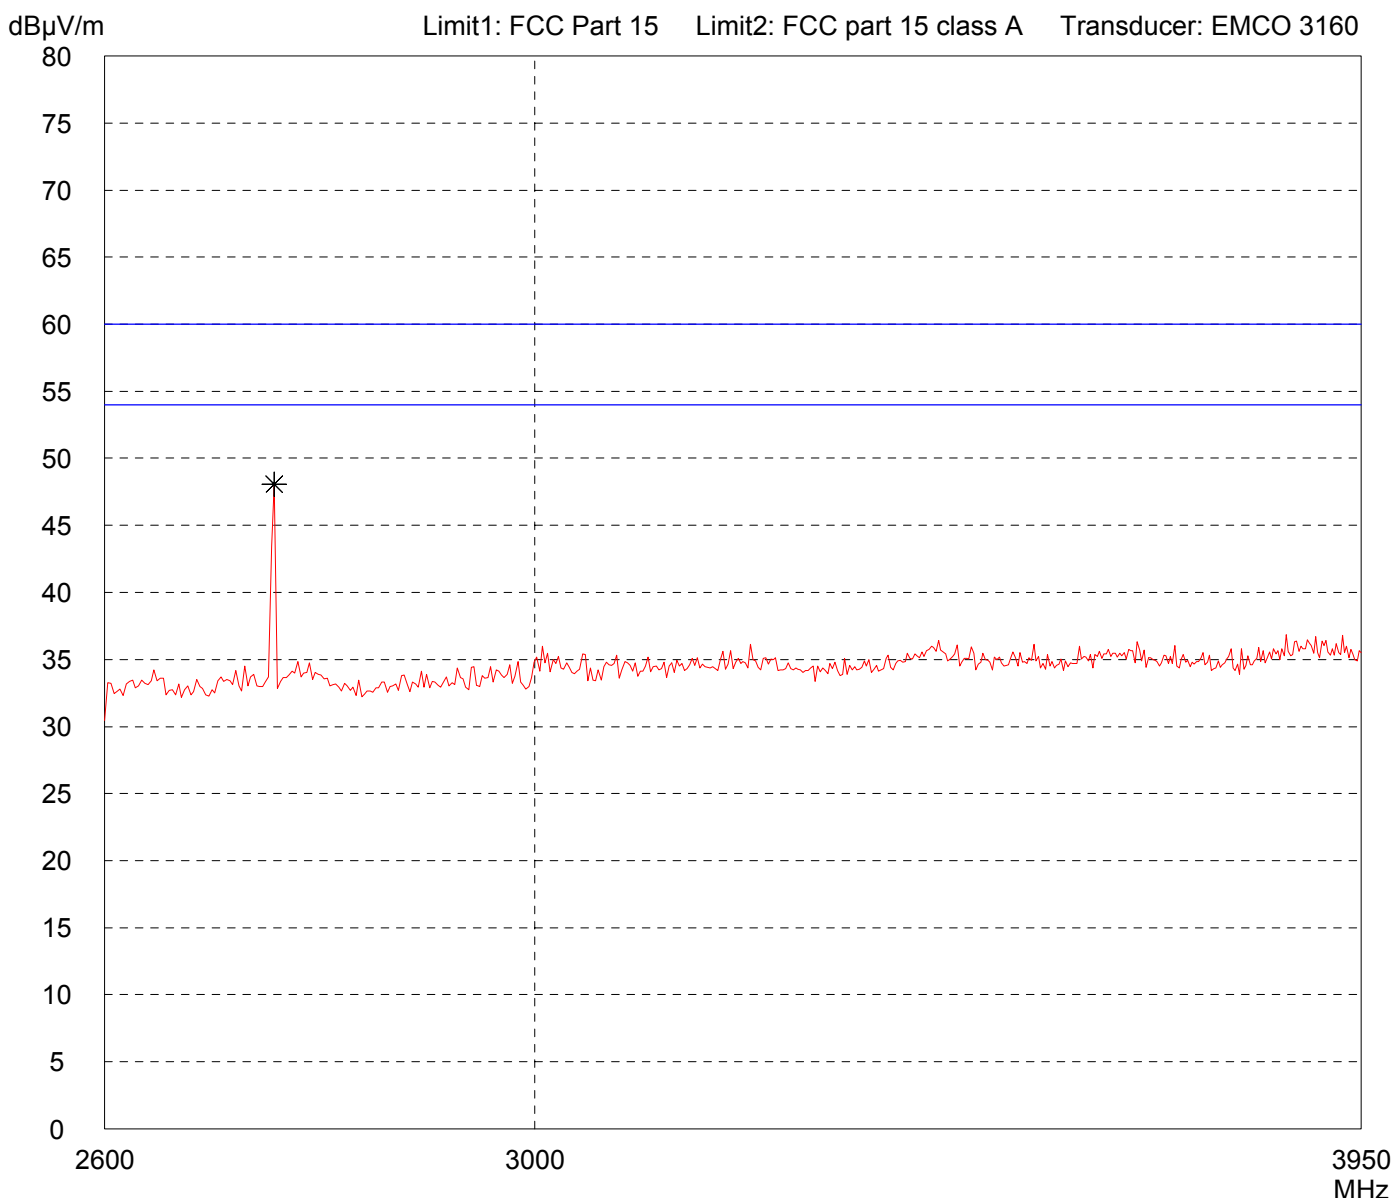


<p>Result: Prescan</p>	<p>Project file: 55456-70375</p>
----------------------------	--------------------------------------

Radiated Emission Test 2.6 GHz - 3.95 GHz acc. to FCC Part 15 (EMCO 3160)

<p>Model: i-B2L S/NA</p> <p>Serial no.: 0.390.000.001</p> <p>Applicant: Identec Solutions AG</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 meters Vertical Polarization</p> <p>Date of test: 05/24/2007 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - 3.0 V battery supply - transmitting continuously with modulation
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
---------------------------	---------------------------------------------

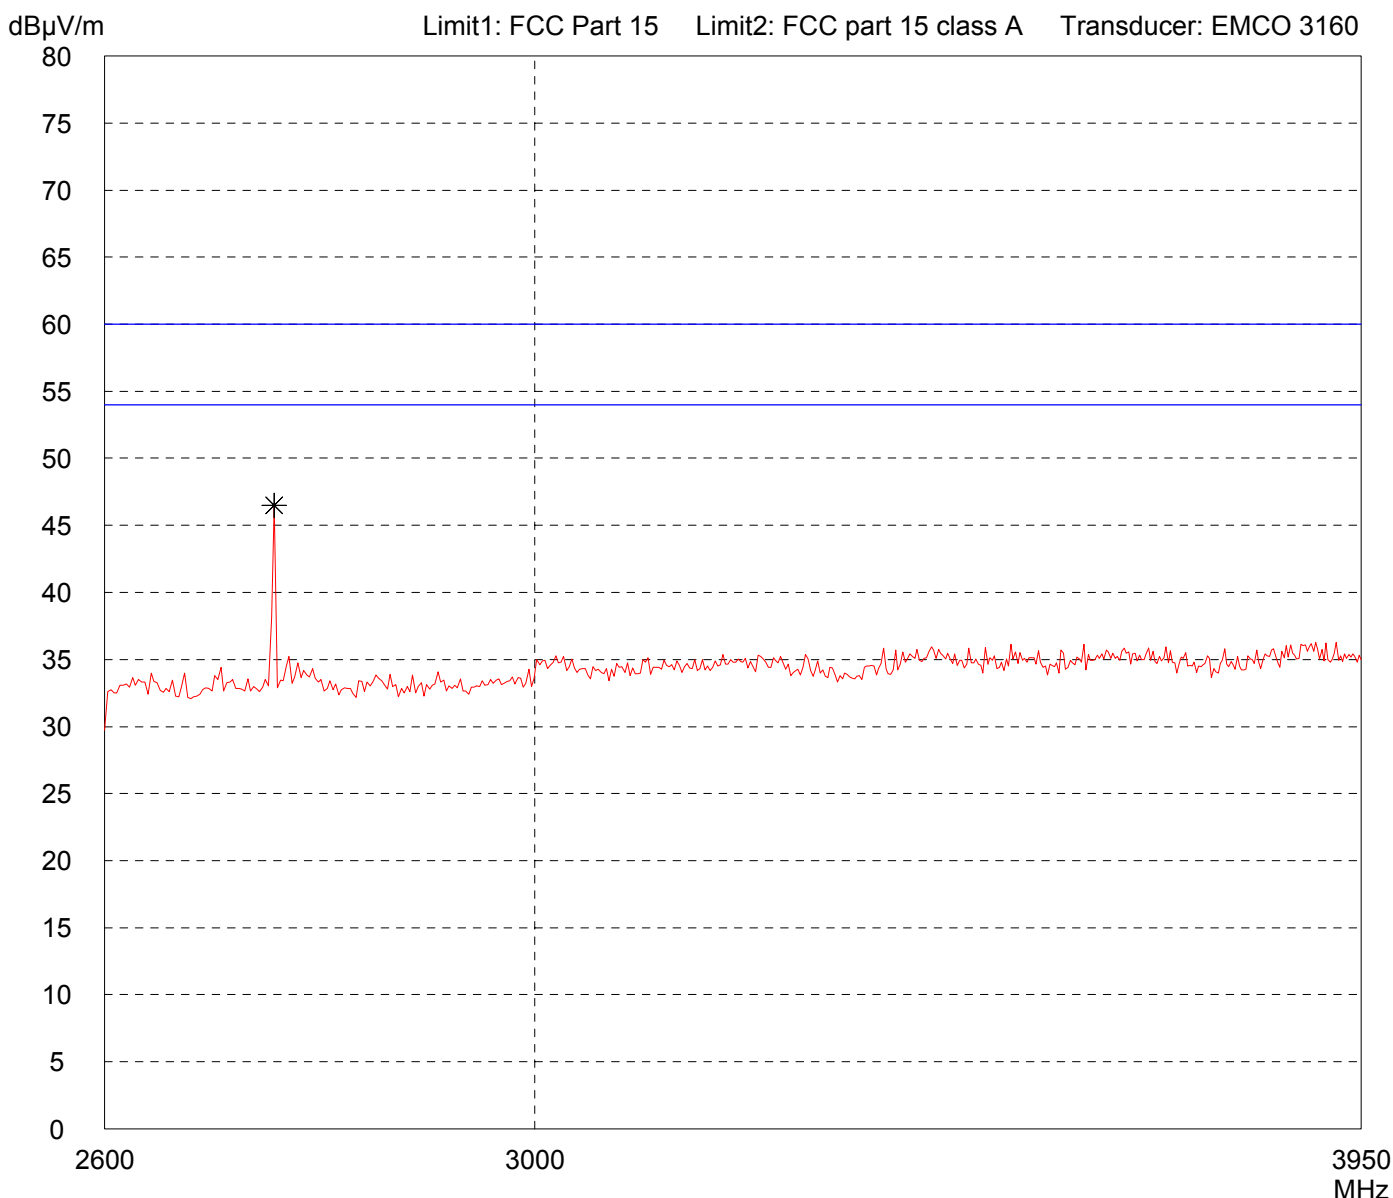


<p>Result: Prescan</p>	<p>Project file: 55456-70375</p>
----------------------------	--------------------------------------

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

<p>Model: i-B2L S/NA</p> <p>Serial no.: 0.390.000.001</p> <p>Applicant: Identec Solutions AG</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Horizontal Polarization</p> <p>Date of test: 05/24/2007 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - 3.0 V battery supply - transmitting continuously with modulation
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------


<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
---------------------------	---------------------------------------------

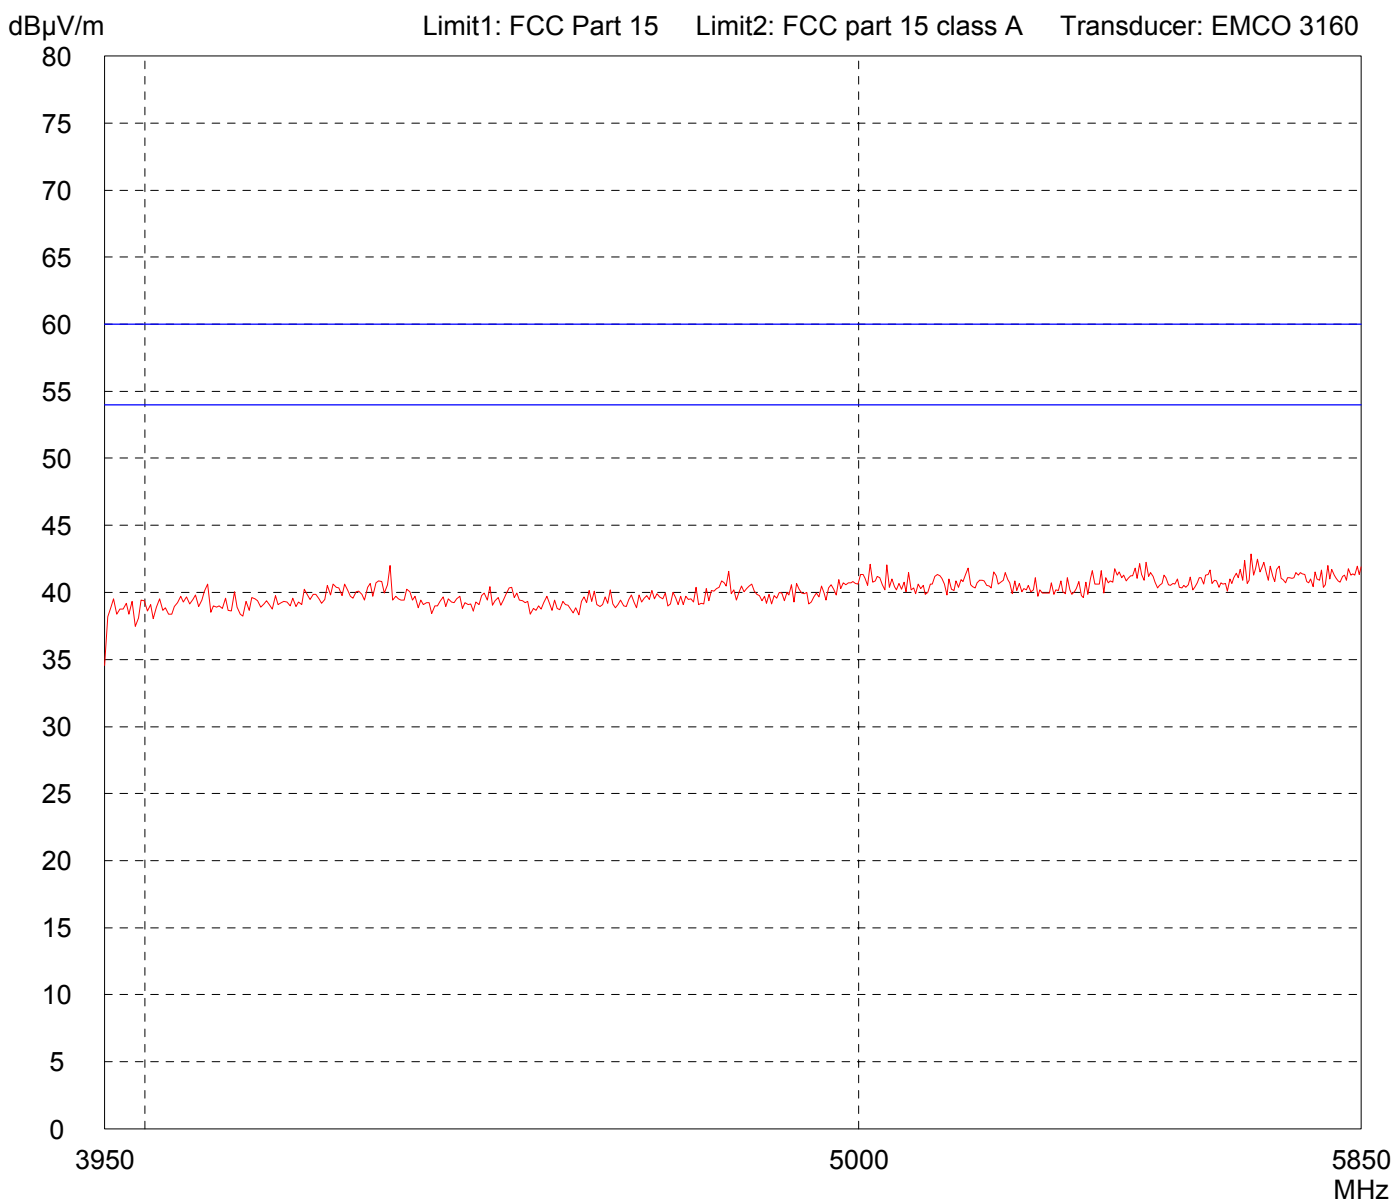

<p>Result: Prescan</p>	<p>Project file: 55456-70375</p>
----------------------------	--------------------------------------

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model: i-B2L S/NA	Comment: - 3.0 V battery supply - transmitting continuously with modulation
Serial no.: 0.390.000.001	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 05/24/2007	
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

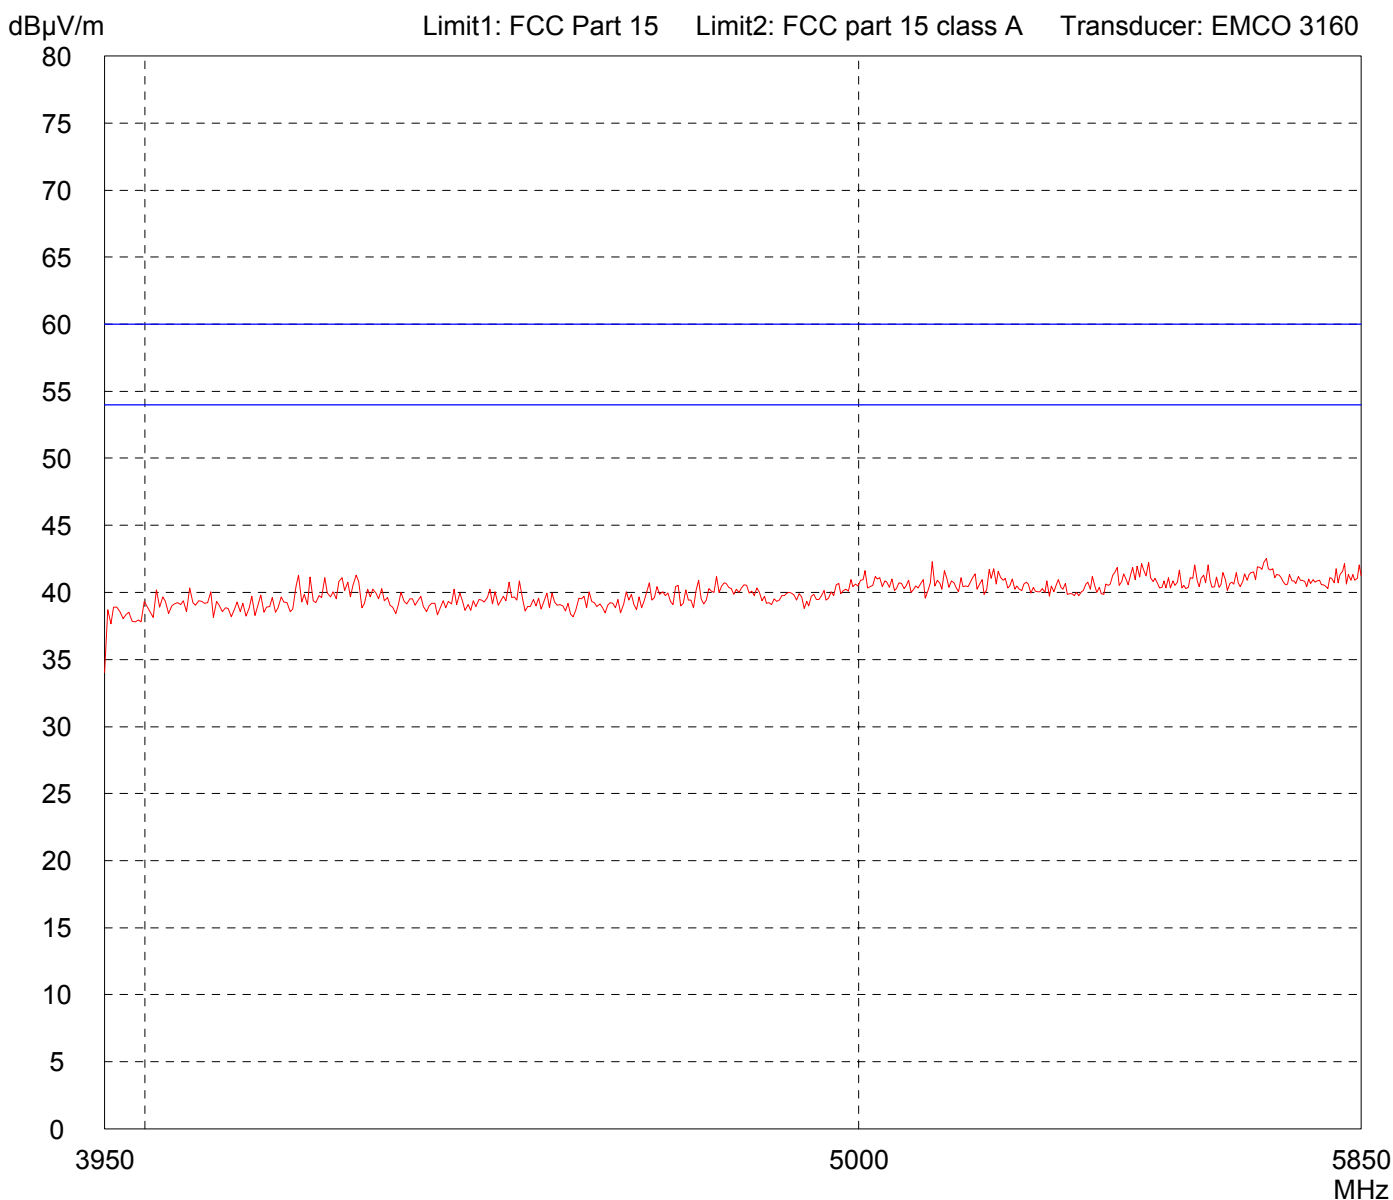

Result: Prescan	Project file: 55456-70375
--------------------	------------------------------


Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model: i-B2L S/NA	
Serial no.: 0.390.000.001	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 05/24/2007	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - 3.0 V battery supply - transmitting continuously with modulation

Detector: Peak

List of values: Selected by hand

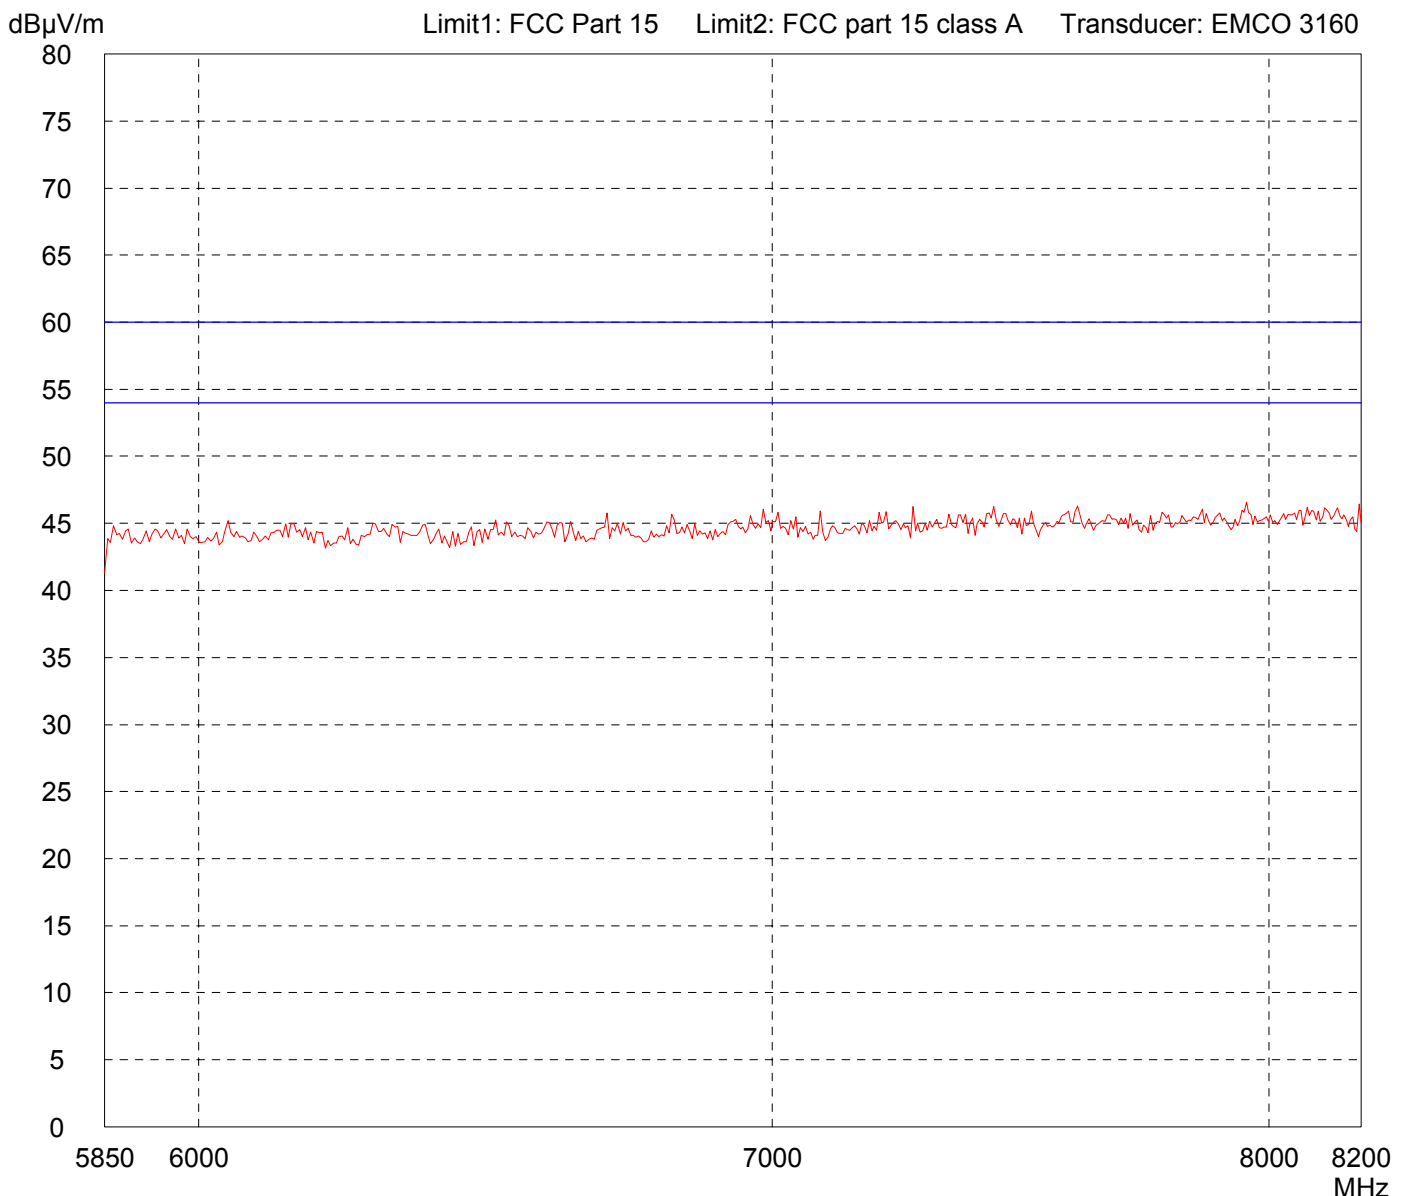


Result: Prescan

Project file: 55456-70375

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model: i-B2L S/NA	Comment: - 3.0 V battery supply - transmitting continuously with modulation
Serial no.: 0.390.000.001	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 05/24/2007 Operator: M. Steindl	
Test performed: automatically File name: default.emi	

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

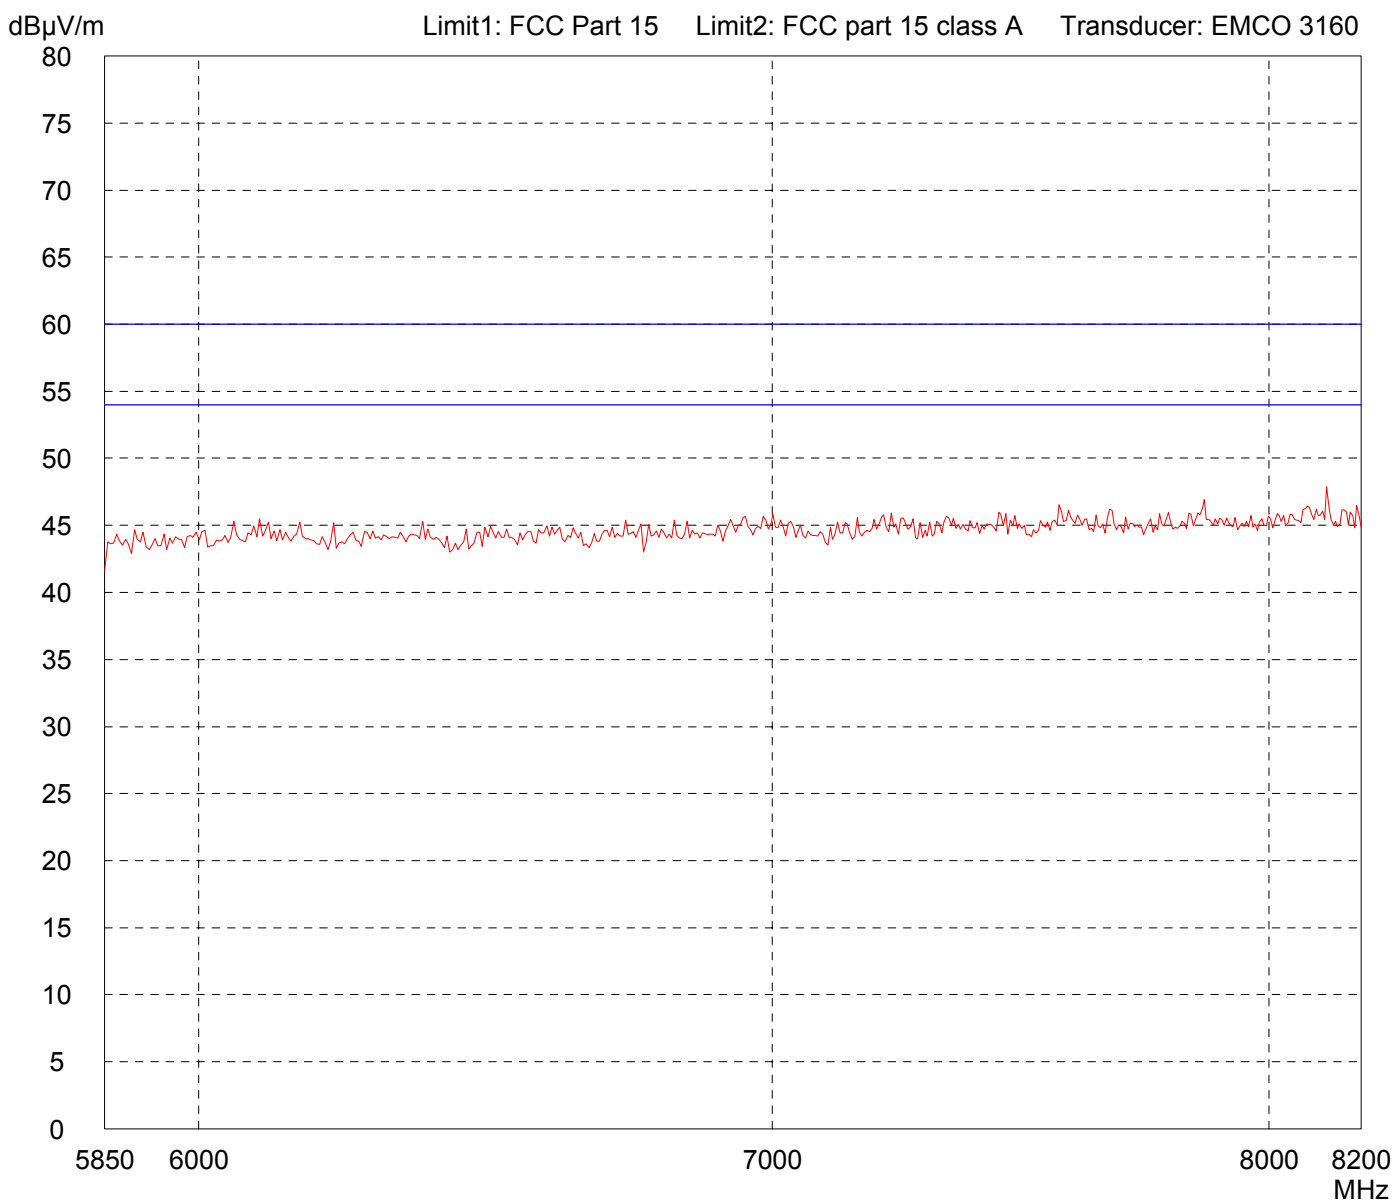

Result: Prescan	Project file: 55456-70375
--------------------	------------------------------


Radiated Emission Test 8.2 GHz - 10 GHz acc. to FCC Part 15 (EMCO 3160)

Model: i-B2L S/NA	
Serial no.: 0.390.000.001	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 05/24/2007	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - 3.0 V battery supply - transmitting continuously with modulation

Detector: Peak

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

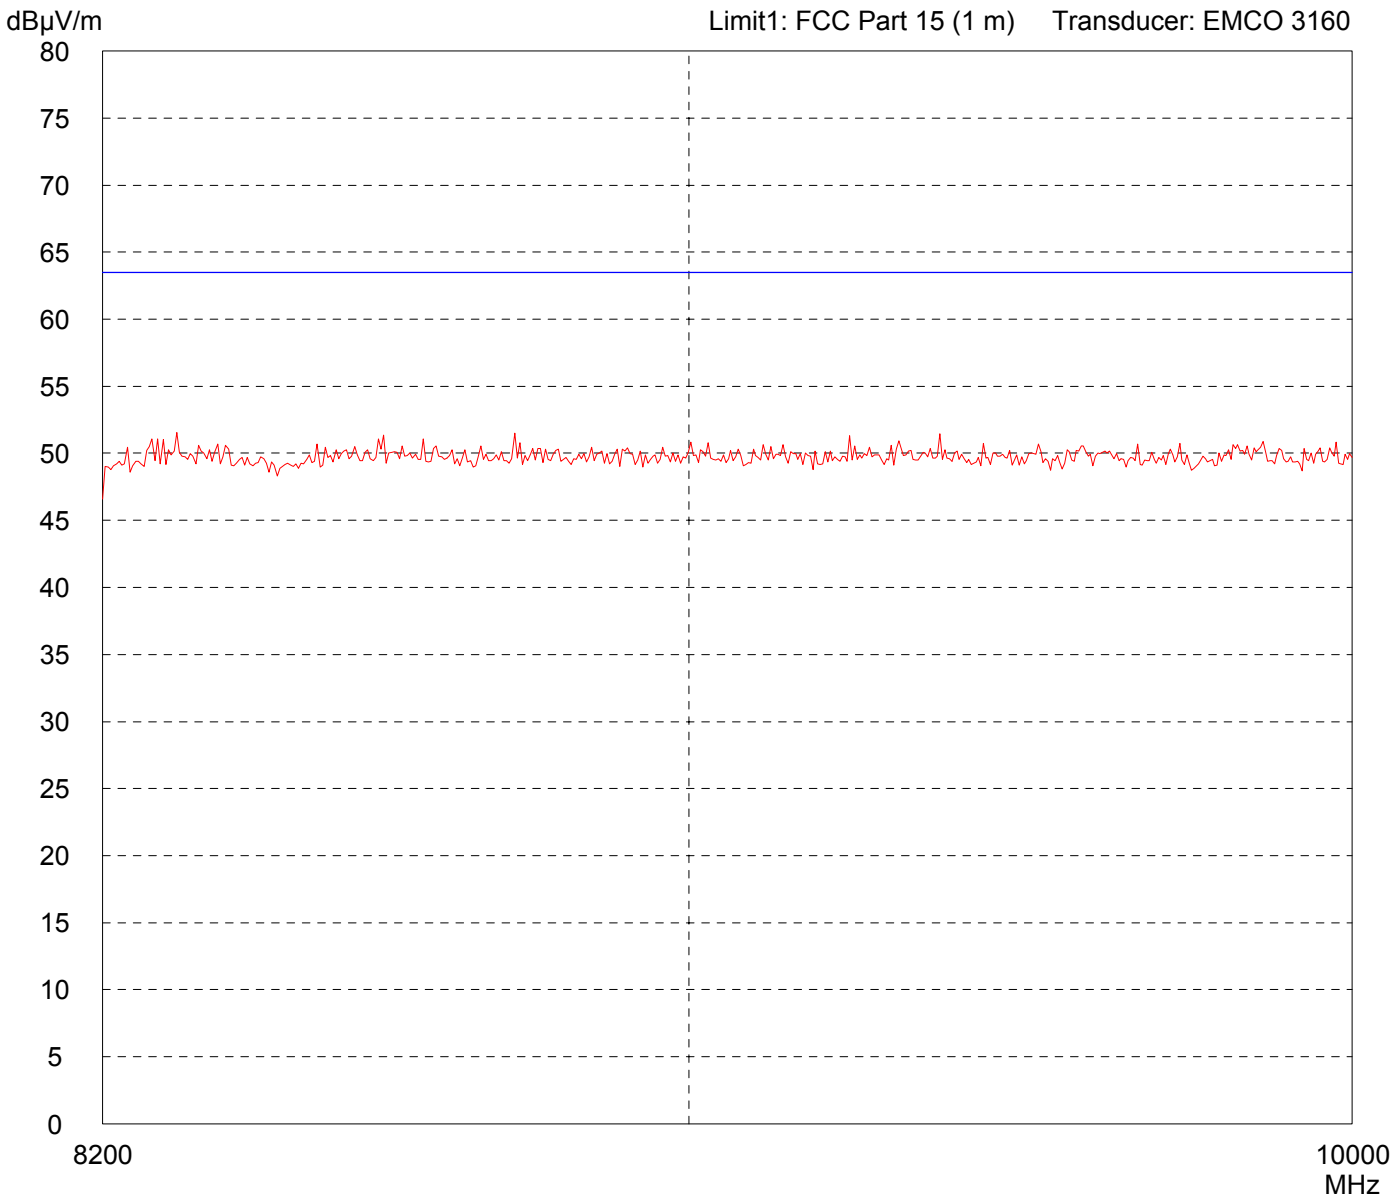

Result: Prescan

Project file: 55456-70375


Radiated Emission Test 8.2 GHz - 10 GHz acc. to FCC Part 15 (EMCO 3160)

Model: i-B2L S/NA	
Serial no.: 0.390.000.001	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 05/24/2007	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - 3.0 V battery supply - transmitting continuously with modulation

Detector: Peak

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

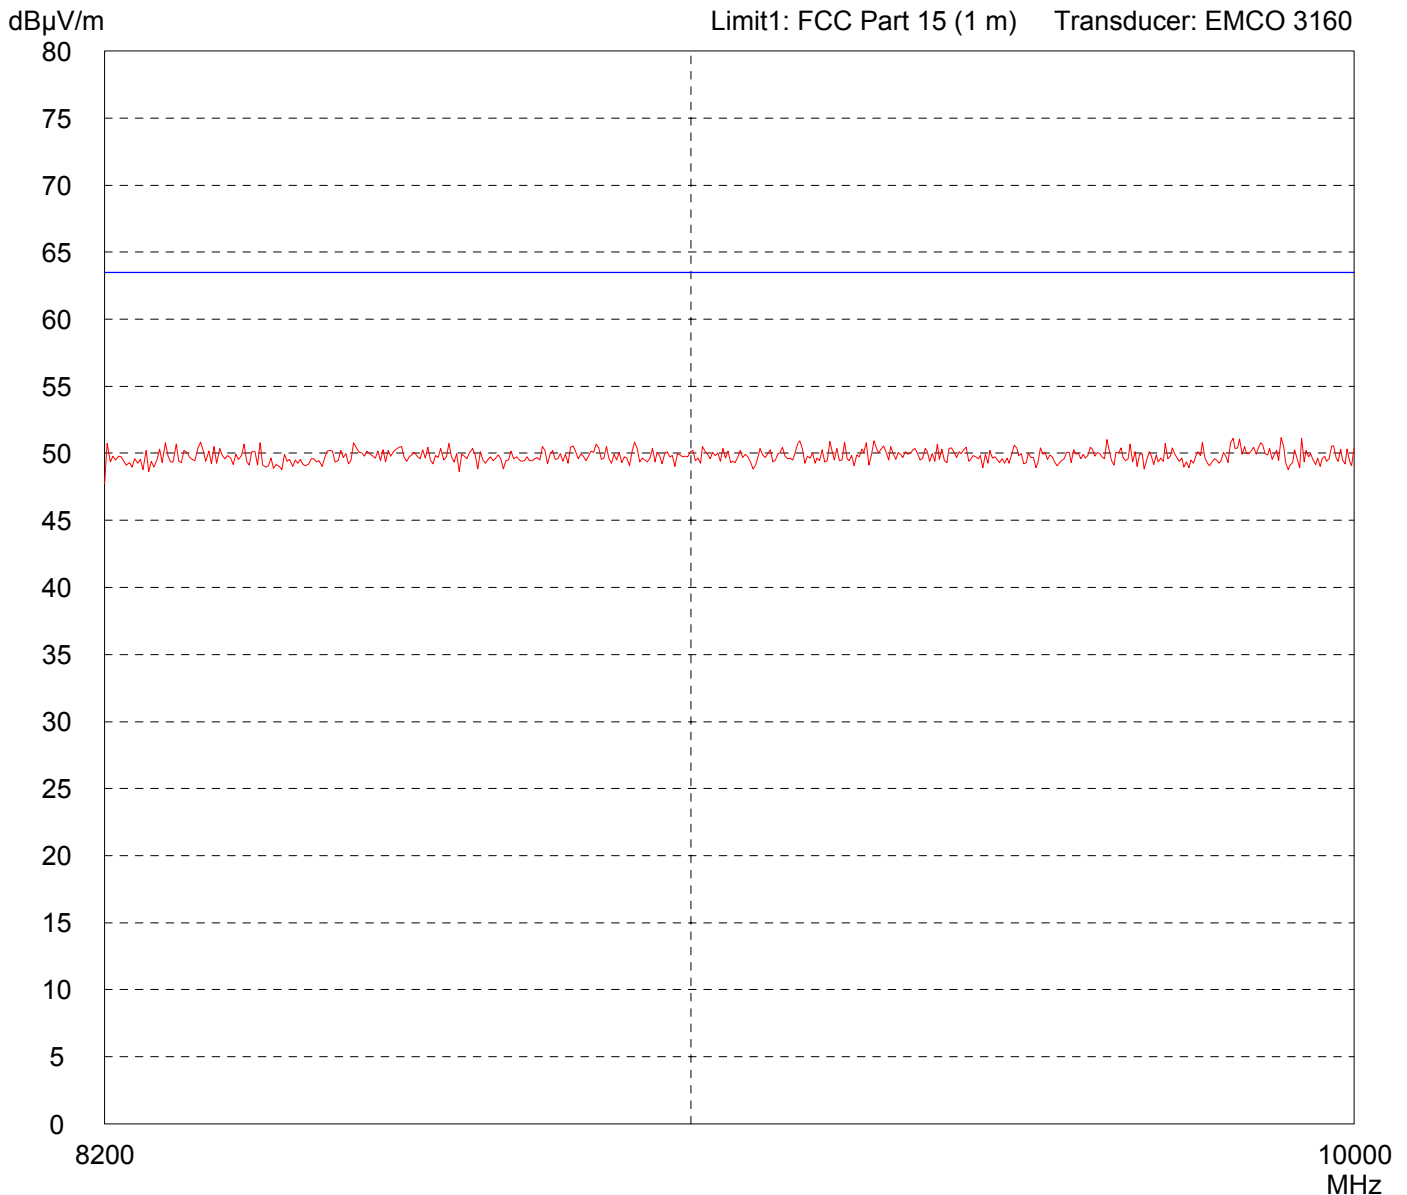

Result: Prescan

Project file: 55456-70375
