



Choose certainty.
Add value.

November 10, 2011

Page 1 of 82

Prüfbericht / Test Report

Nr. / No. 69861-04040-1 (Edition 1)

Applicant: IDENTEC Solutions AG

Type of equipment: Active Transponder Tag

Type designation: i-Q350 HHX Hothead

Order No.: 1130378

Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.107, 15.109, 15.205, 15.207, 15.215 and 15.249

Industry Canada Radio Standards Specifications
RSS-GEN Issue 3, Sections 6.2, 7.2.2, 7.2.4 and
RSS-210 Issue 8, Section A2.9 (Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT).....	3
2	Administrative Data	4
3	Identification of the Test Laboratory.....	5
4	Summary	6
5	Operation Mode and Configuration of EUT.....	7
6	Measurement Procedures	8
6.1	Bandwidth Measurements	8
6.2	Radiated Emission Measurement 9 kHz to 30 MHz.....	9
6.3	Radiated Emission in Fully or Semi Anechoic Room.....	11
6.4	Radiated Emission at Alternative Test Site	13
7	Photographs Taken During Testing.....	15
8	Test Results for Transmitter	20
8.1	Occupied Bandwidth	22
8.2	Bandwidth of the Emission.....	28
8.3	Designation of Emissions.....	32
8.4	Restricted Bands of Operation.....	33
8.5	Radiated Emission Measurement 9 kHz to 30 MHz.....	36
8.6	Radiated Emission Measurement 30 MHz to 10 GHz.....	38
8.7	Exposure of Humans to RF Fields	41
9	Test Results for Receiver	43
9.1	Radiated Emission Measurement 30 MHz to 5 GHz.....	44
10	Referenced Regulations.....	45
11	Test Equipment List with Calibration Data	47
12	Revision History	48
Annex A	Charts taken during testing.....	49

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	i-Q350 HHX Hothead
Parts ² :	
Serial number(s):	111.002
Manufacturer:	IDENTEC Solutions AG
Type of equipment:	Active Transponder Tag
Version:	As received
FCC ID:	
Additional parts/accessories:	
Technical data of EUT	
Application frequency range:	902 - 928 MHz
Frequency range:	919 MHz, 920 MHz
Operating frequency:	919 MHz, 920 MHz
Type of modulation:	FSK
Pulse train:	---
Pulse width:	---
Number of RF-channels:	2
Channel spacing:	1 MHz
Designation of emissions ³ :	72K0F1D
Type of antenna:	Integrated on printed board
Size/length of antenna:	2 x 1 cm
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	Battery supply
Specifications for power supply:	nominal voltage: 3.00 V V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details

Applicant (full address): IDENTEC Solutions AG
Millennium Park 2
A-6890 Lustenau
Österreich
Contact person: Herr Simon Prior
Order number: 1130378
Receipt of EUT:
Date(s) of test:
Note(s):

Report details

Report number: 69861-04040-1
Edition: 1
Issue date: 10.11.2011

3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	TÜV SÜD SENTON GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-PL-171/94-03
FCC test site registration number	90926
Industry Canada test site registration:	3050A-2
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.107, 15.109, 15.205, 15.215 and 15.249
of the Federal Communication Commission (FCC) and the

**Radio Standards Specifications
RSS-GEN Issue 3, Sections 6.2, 7.2.2 and
RSS-210 Issue 8, Section A2.9 (Category I Equipment)**

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Mode(s)

The EUT was operated in continuous transmitting mode on lowest and highest channel and in receiving mode.

Configuration(s) of EUT

The EUT was configured as stand alone device. For testing purposes a temporary DC supply was attached.

List of ports and cables

Port	Description	Classification ⁴	Cable type	Cable length
1	Temporary DC supply	dc power	Unshielded	1.5 m

List of devices connected to EUT

Item	Description	Type Designation	Serial no. or ID	Manufacturer

List of support devices

Item	Description	Type Designation	Serial no. or ID	Manufacturer
1	RFID reader for active UHF tags	i-PORT M350 ETH / USB Mod.	09435M0394	Identec Solutions
2	Laptop PC	DELL dimension		DELL

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 8, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.3)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

6.2 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.215(b) and 15.231(b)(3)
 IC RSS-210 Issue 8, section A1.1.2(b)

Guide: ANSI C63.4

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.


Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

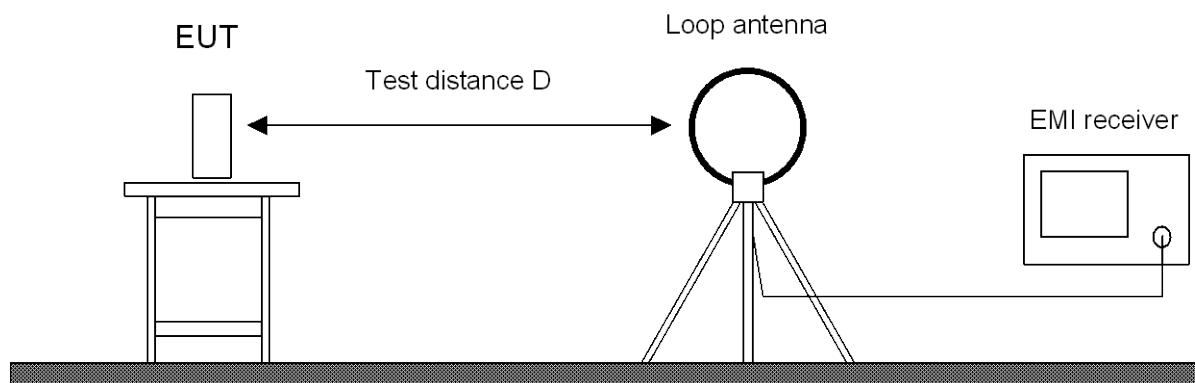


Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input type="checkbox"/> Preamplifier Cabin no. 2	CPA9231A	1651	3393	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input checked="" type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross

6.3 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.109, 15.215(b) and 15.249 IC RSS-GEN Issue 3, section 6.1 IC RSS-210 Issue 8, section A2.9
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 for alternative test sites is used (see 6.4). If prescans are recorded in fully anechoic room they are indicated appropriately.</p>	

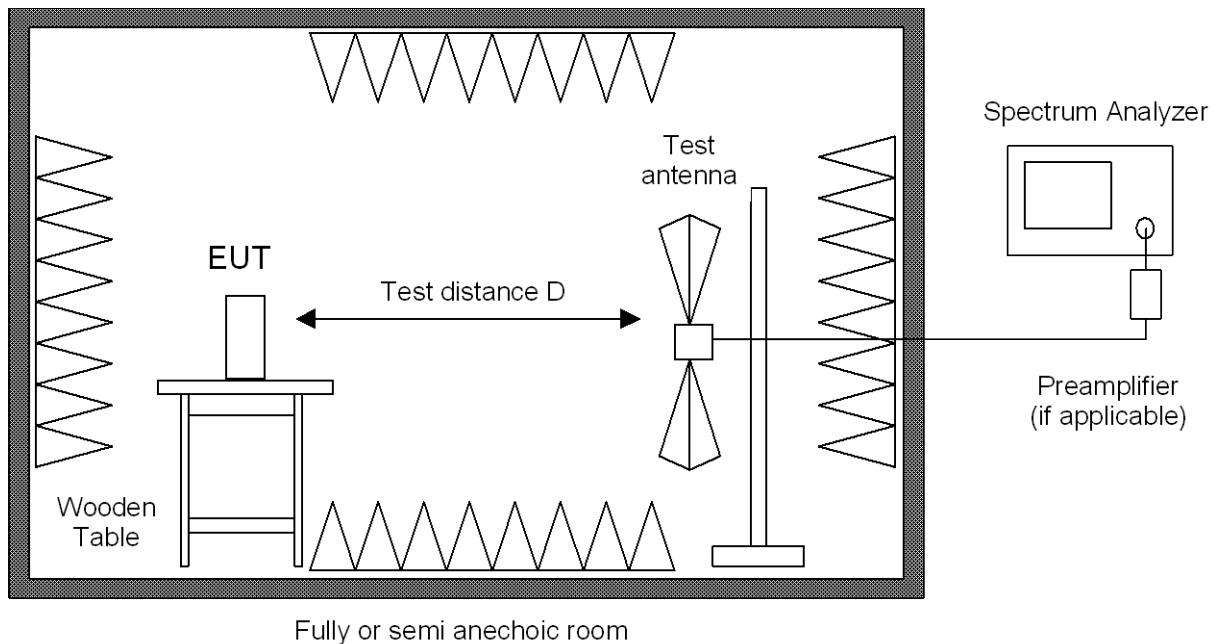


Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	Cabin no. 3	2010	101018	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/> Preamplifier	Cabin no. 2	1651	3393	Schaffner
<input type="checkbox"/> Preamplifier	R14601	1142	13120026	Advantest
<input checked="" type="checkbox"/> Preamplifier (1 - 8 GHz)	AFS3-00100800-32-LN	1684	847743	Miteq
<input type="checkbox"/> Preamplifier (0.5 - 8 GHz)	AMF-4D-005080-25-13P	1685	860149	Miteq
<input checked="" type="checkbox"/> Preamplifier (8 - 18 GHz)	ACO/180-3530	1484	32641	CTT
<input type="checkbox"/> External Mixer	WM782A	1576	845881/005	Tektronix
<input type="checkbox"/> Harmonic Mixer Accessories	FS-Z30	1577	624413/003	Rohde & Schwarz
<input checked="" type="checkbox"/> Trilog antenna	Cabin no. 2	1722	9163-188	Schwarzbeck
<input type="checkbox"/> Trilog antenna	Cabin no. 3	1802	9163-214	Schwarzbeck
<input type="checkbox"/> Trilog antenna	Cabin no. 8	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/> Horn antenna	3115	1516	9508-4553	EMCO
<input type="checkbox"/> Horn antenna	3160-03	1010	9112-1003	EMCO
<input type="checkbox"/> Horn antenna	3160-04	1011	9112-1001	EMCO
<input checked="" type="checkbox"/> Horn antenna	3160-05	1012	9112-1001	EMCO
<input checked="" type="checkbox"/> Horn antenna	3160-06	1013	9112-1001	EMCO
<input checked="" type="checkbox"/> Horn antenna	3160-07	1014	9112-1008	EMCO
<input type="checkbox"/> Horn antenna	3160-08	1015	9112-1002	EMCO
<input type="checkbox"/> Horn antenna	3160-09	1265	9403-1025	EMCO
<input type="checkbox"/> Horn antenna	3160-10	1575	399185	EMCO
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross

6.4 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.109, 15.215(b) and 15.249 IC RSS-GEN Issue 3, section 6.1 IC RSS-210 Issue 8, section A2.9
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.</p> <p>If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels.</p> <p>Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.</p> <p>With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

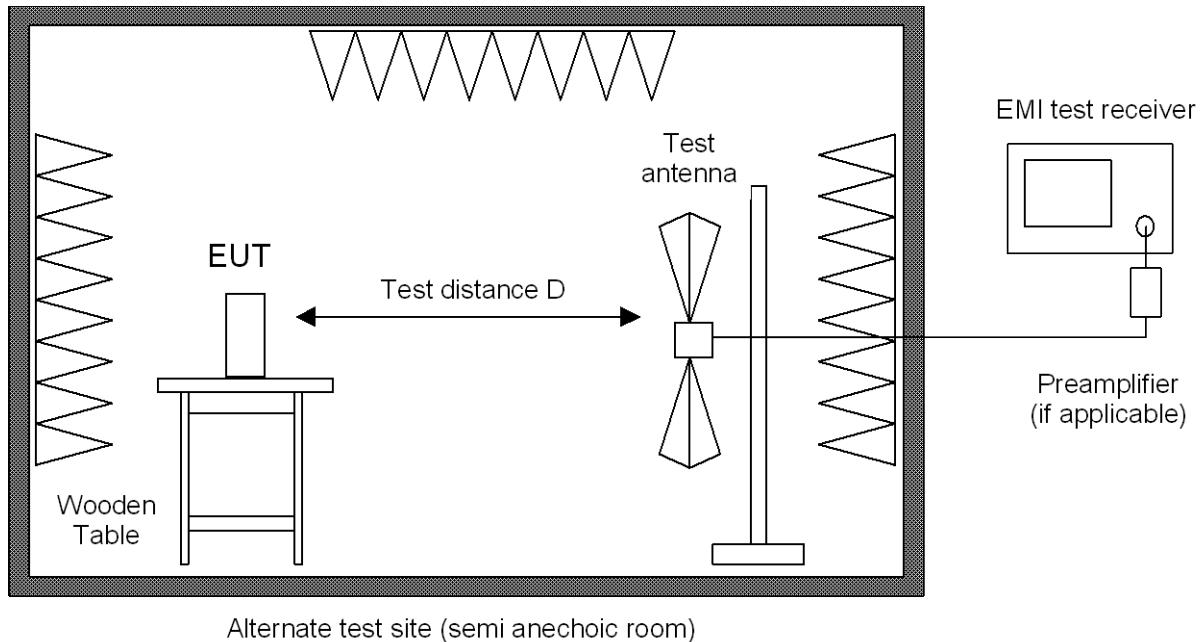

Alternate test site (semi anechoic room)

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input checked="" type="checkbox"/> Trilog antenna Cabin no. 8	VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross

7 Photographs Taken During Testing


Test setup for radiated emission measurement 9 kHz – 30 MHz



**Test setup for radiated emission measurement
(fully anechoic room)**



Test setup for radiated emission measurement (alternate test site)

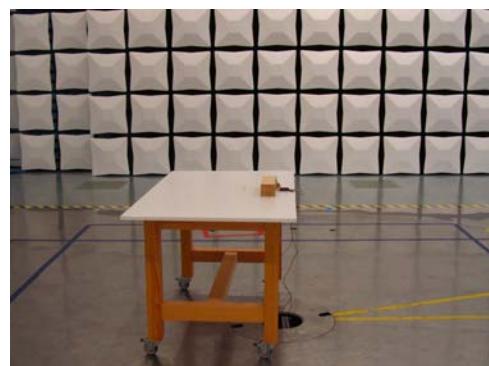

**Test setup for radiated emission measurement
(alternate test site) - continued -**



8 Test Results for Transmitter

FCC CFR 47 Parts 2 and 15			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	22	Recorded
15.215(c)	Bandwidth of the emission	28	Test passed
2.201, 2.202	Class of emission	32	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a)	Restricted bands of operation	33	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
15.205(b) 15.249	Radiated emission 9 kHz to 30 MHz	36	Test passed
15.205(b) 15.215(b) 15.249	Radiated emission 30 MHz to 10 GHz	38	Test passed

IC RSS-Gen Issue 3

<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	---	Not applicable
4.6.1	Occupied Bandwidth	22	Recorded
8	Designation of emissions	32	Calculated
4.5	Pulsed operation	---	Not applicable
7.2.4	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
2.2(a)	Restricted bands and unwanted emission frequencies	33	Test passed
7.2.2(b)(c), 7.2.5	Unwanted emissions 9 kHz to 30 MHz	36	Test passed
7.2.2(b)(c), 7.2.5	Unwanted emissions 30 MHz to 10 GHz	38	Test passed
5.5	Exposure of Humans to RF Fields	41	Exempted from SAR and RF evaluation

IC RSS-210 Issue 8

<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
A2.9	Unwanted emissions 9 kHz to 30 MHz	36	Test passed
A2.9	Unwanted emissions 30 MHz to 10 GHz	38	Test passed

8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6								
Guide:	ANSI C63.4								
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p> <table border="1"><thead><tr><th>Fundamental frequency</th><th>Minimum resolution bandwidth</th></tr></thead><tbody><tr><td>9 kHz to 30 MHz</td><td>1 kHz</td></tr><tr><td>30 MHz to 1000 MHz</td><td>10 kHz</td></tr><tr><td>1000 MHz to 40 GHz</td><td>100 kHz</td></tr></tbody></table> <p>The video bandwidth shall be at least three times greater than the resolution bandwidth.</p>	Fundamental frequency	Minimum resolution bandwidth	9 kHz to 30 MHz	1 kHz	30 MHz to 1000 MHz	10 kHz	1000 MHz to 40 GHz	100 kHz
Fundamental frequency	Minimum resolution bandwidth								
9 kHz to 30 MHz	1 kHz								
30 MHz to 1000 MHz	10 kHz								
1000 MHz to 40 GHz	100 kHz								
Measurement procedure:	Bandwidth Measurements (6.1)								

Comment:


Date of test:

Test site:

October 17, 2011

Fully anechoic room, cabin no. 2


Occupied Bandwidth (99 %):

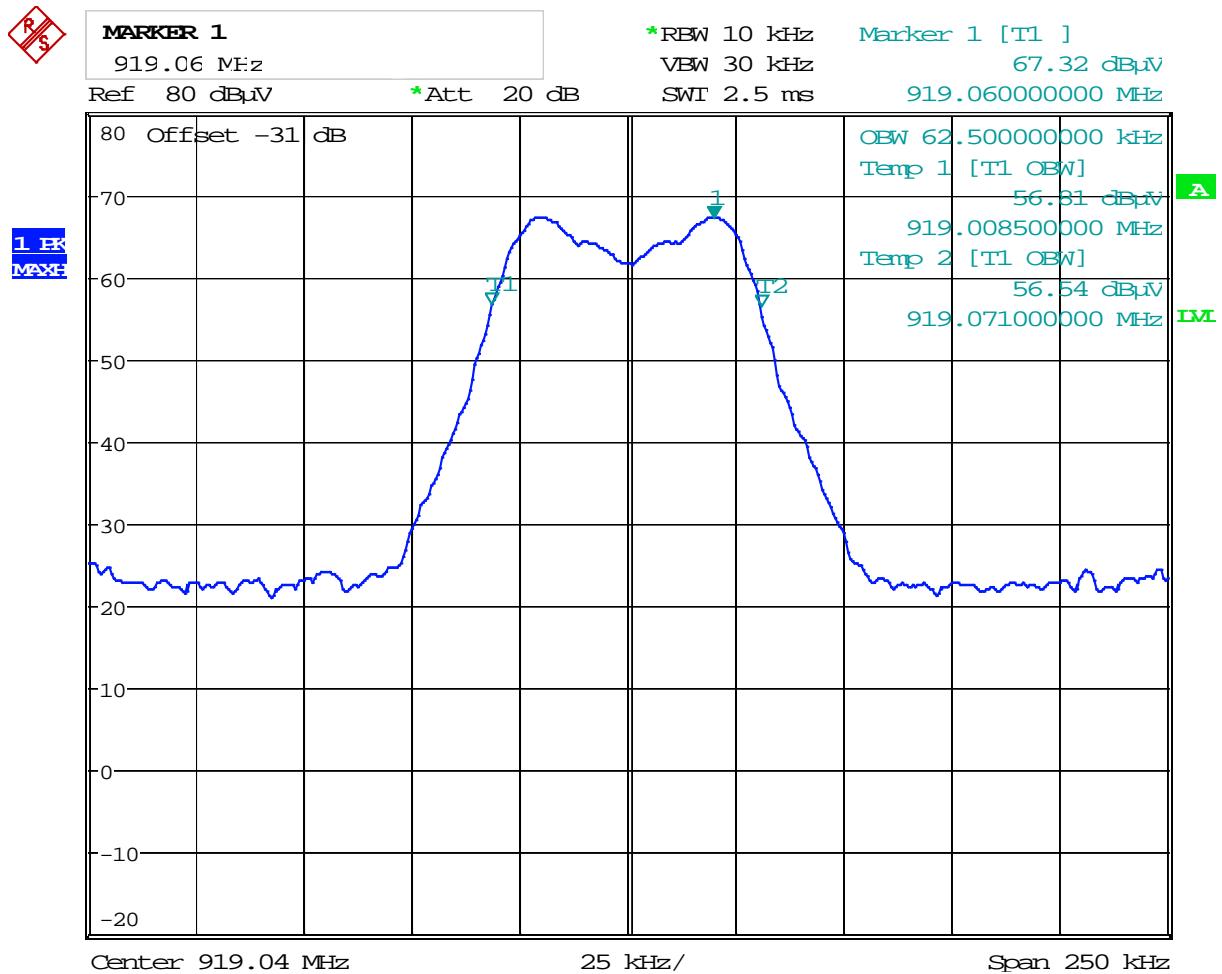

Date: 17.OCT.2011 13:19:50

Occupied Bandwidth (99 %): **62.5 kHz**

Occupied Bandwidth (99 %):

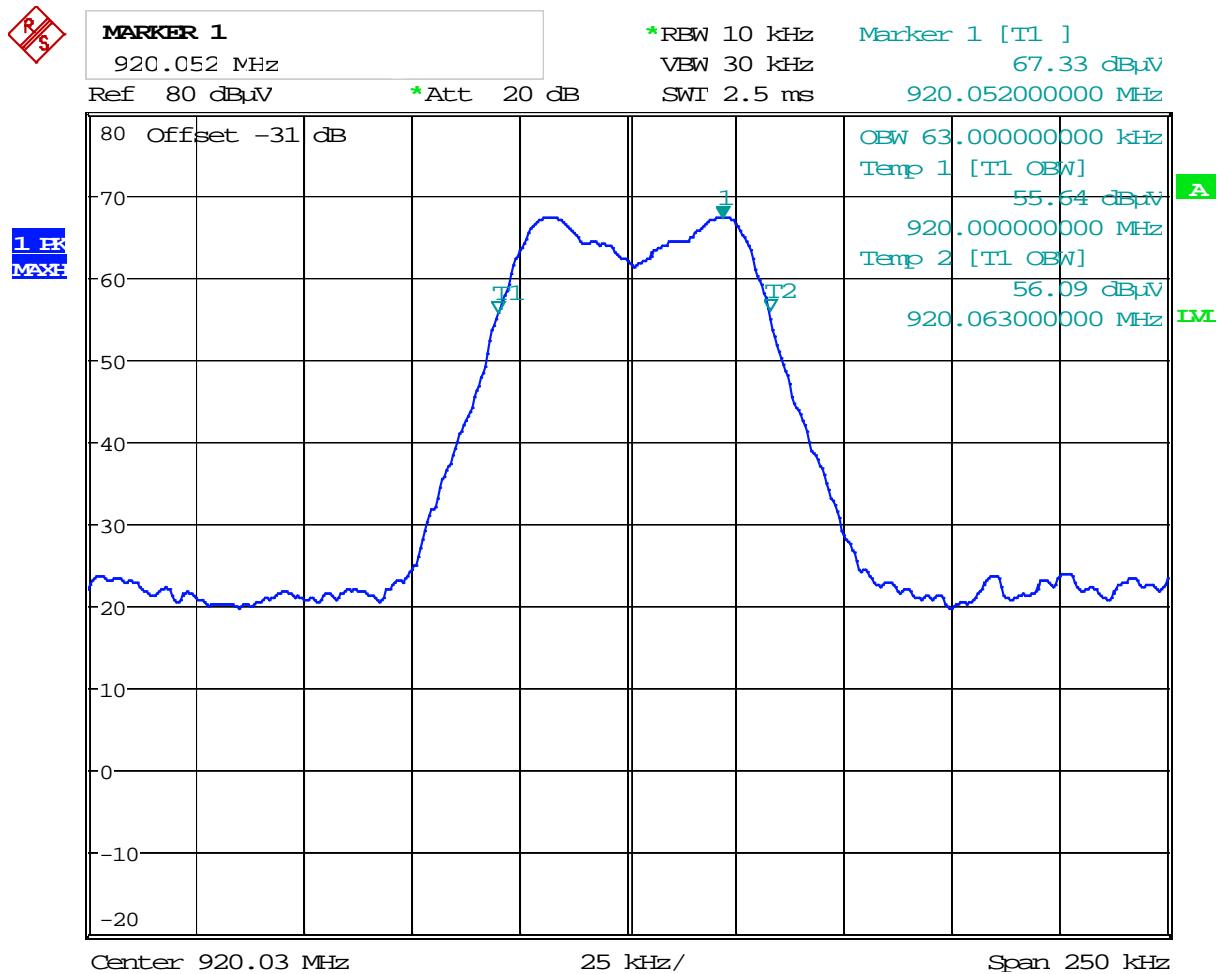

Date: 17.OCT.2011 13:36:49


Occupied Bandwidth (99 %): **63.0 kHz**

Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 3, section 4.6.1
Guide:	IC RSS-Gen Issue 3, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	October 17, 2011
Test site:	Fully anechoic room, cabin no. 2


Occupied Bandwidth (99 %):

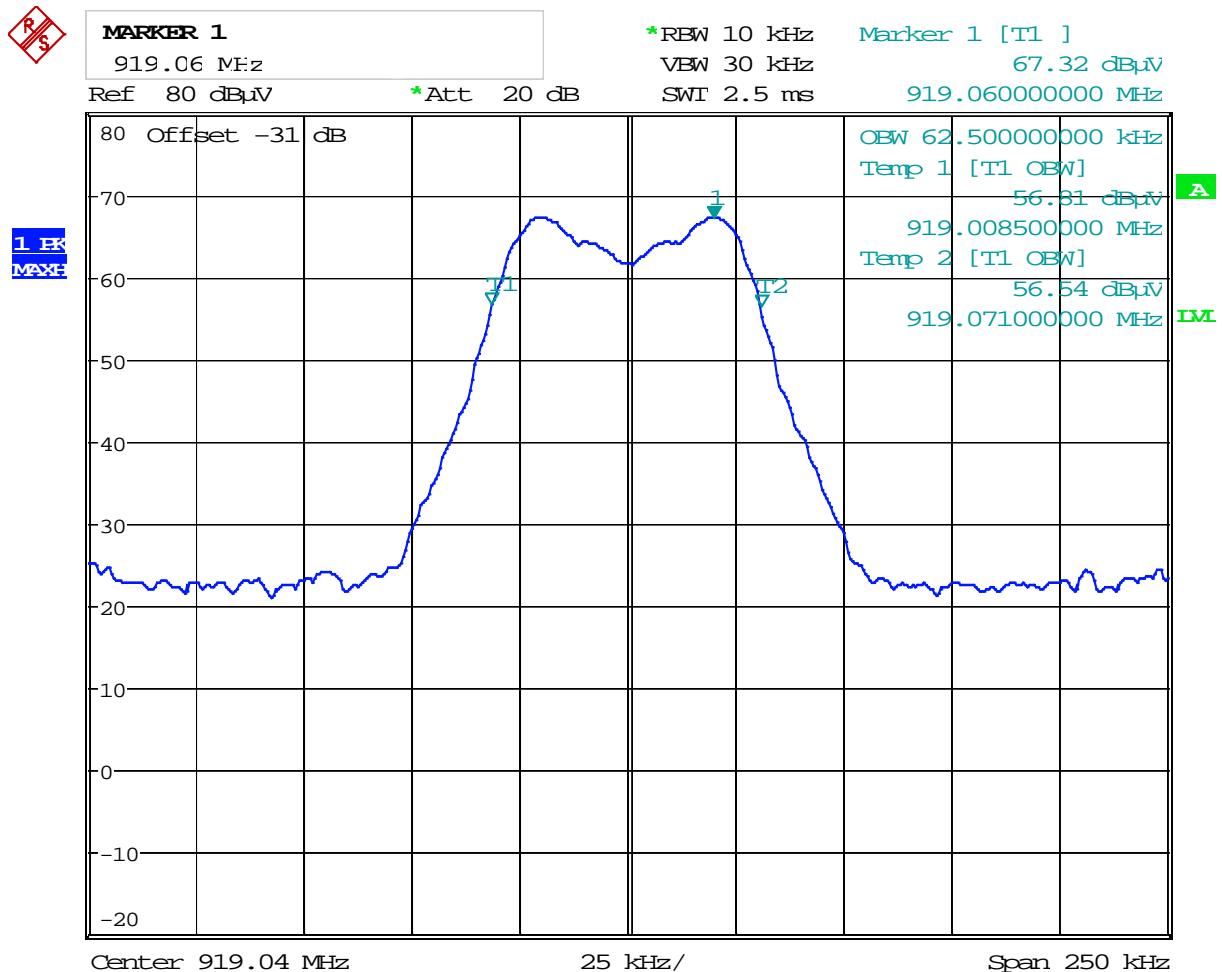

Date: 17.OCT.2011 13:19:50

Occupied Bandwidth (99 %): **62.5 kHz**

Occupied Bandwidth (99 %):

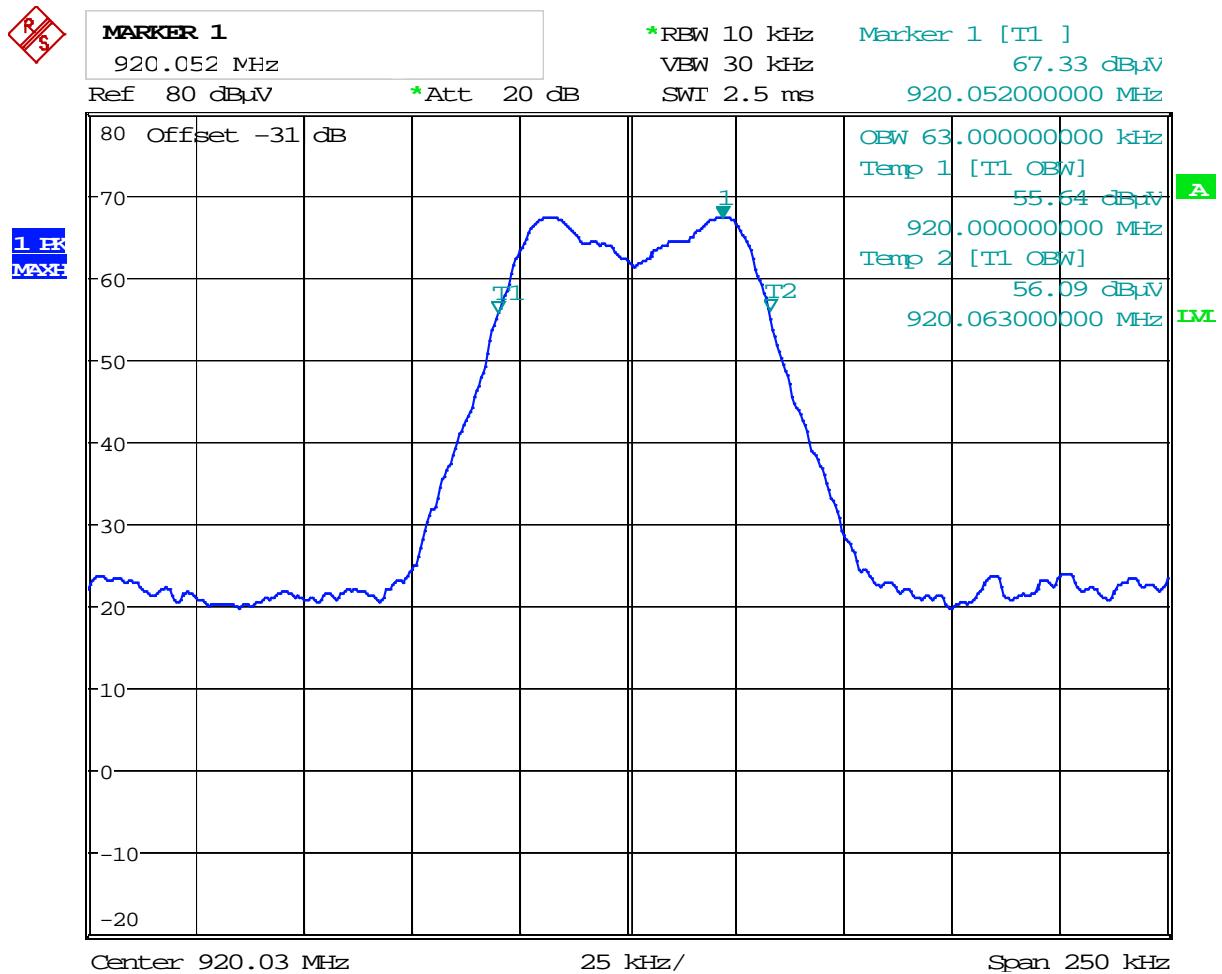


Date: 17.OCT.2011 13:36:49

Occupied Bandwidth (99 %): **63.0 kHz**

8.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)								
Guide:	ANSI C63.4								
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p> <table border="1"><thead><tr><th>Fundamental frequency</th><th>Minimum resolution bandwidth</th></tr></thead><tbody><tr><td>9 kHz to 30 MHz</td><td>1 kHz</td></tr><tr><td>30 MHz to 1000 MHz</td><td>10 kHz</td></tr><tr><td>1000 MHz to 40 GHz</td><td>100 kHz</td></tr></tbody></table> <p>The video bandwidth shall be at least three times greater than the resolution bandwidth.</p>	Fundamental frequency	Minimum resolution bandwidth	9 kHz to 30 MHz	1 kHz	30 MHz to 1000 MHz	10 kHz	1000 MHz to 40 GHz	100 kHz
Fundamental frequency	Minimum resolution bandwidth								
9 kHz to 30 MHz	1 kHz								
30 MHz to 1000 MHz	10 kHz								
1000 MHz to 40 GHz	100 kHz								
Measurement procedure:	Bandwidth Measurements (6.1)								

Comment:	
Date of test:	October 17, 2011, November 10, 2011
Test site:	Fully anechoic room, cabin no. 2

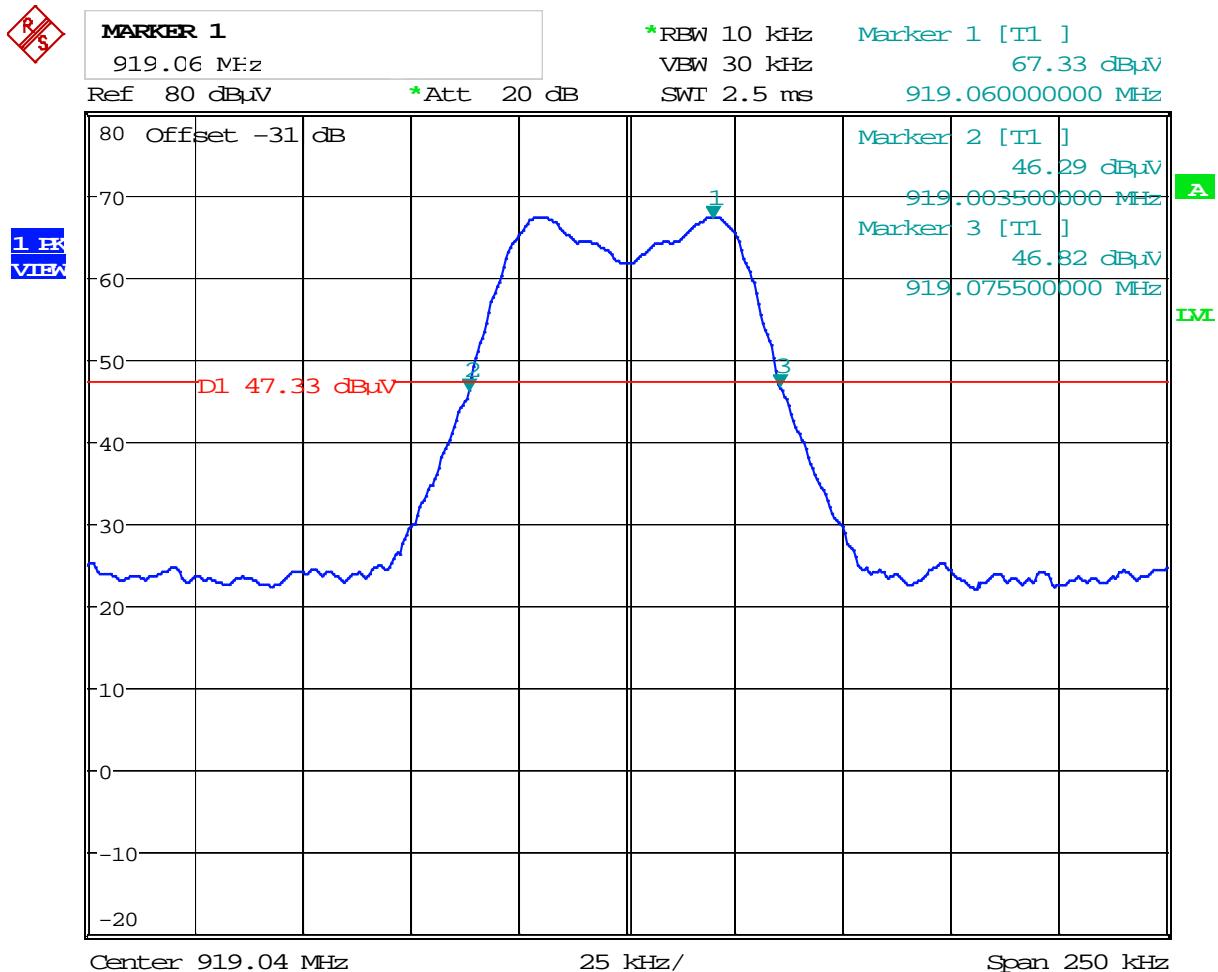

Date: 17.OCT.2011 13:20:57

Permitted frequency band:	902 - 928 MHz	
20 dB bandwidth:	72.0 kHz	
Carrier frequency stability:	<input type="checkbox"/> specified	<input checked="" type="checkbox"/> not specified
Maximum frequency tolerances:		
Bandwidth of the emission:	72.0 kHz	within permitted frequency band ⁵ : <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁵ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.


Comment:

Date of test:

November 10, 2011

Test site:

Fully anechoic room, cabin no. 2

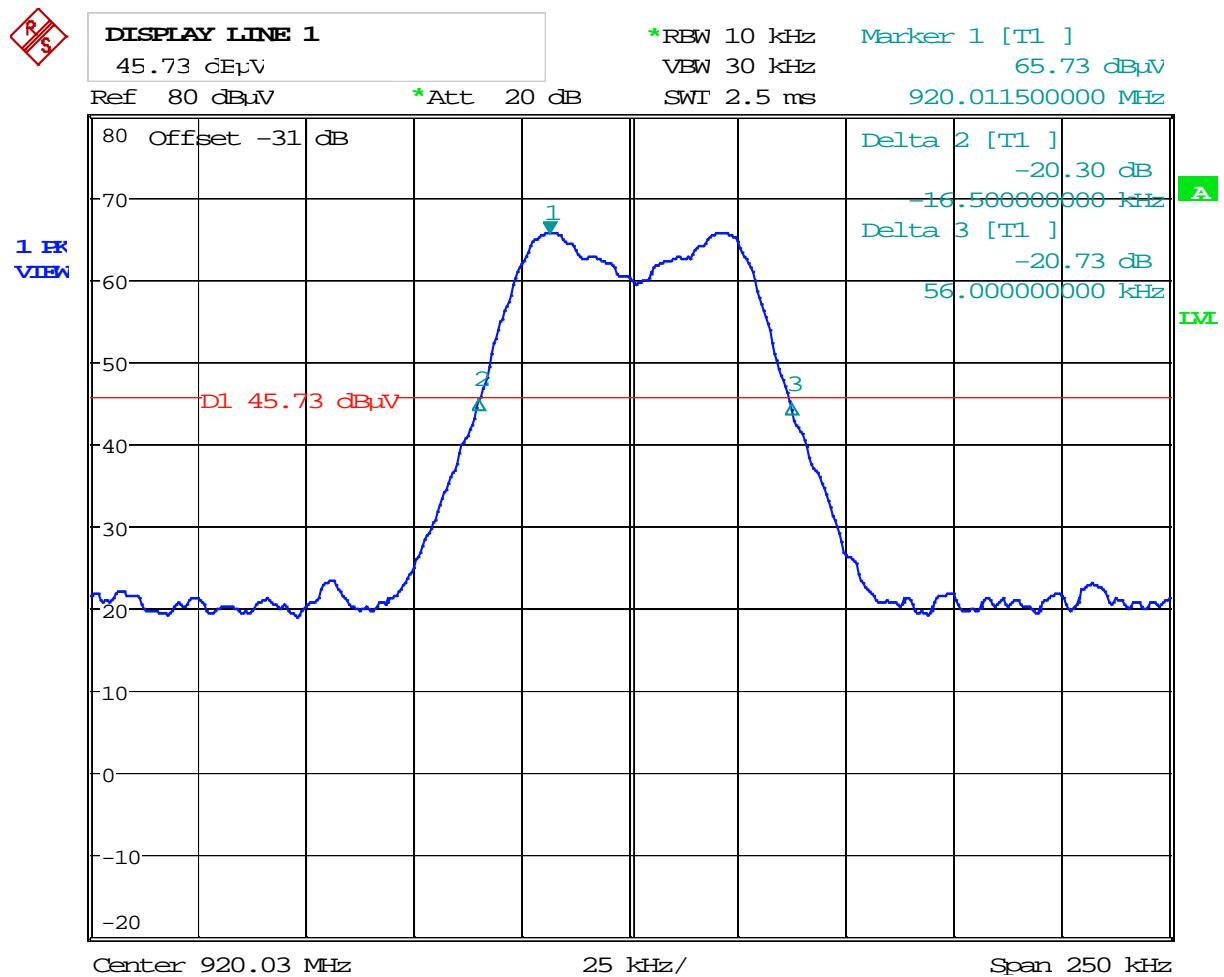

Date: 10.NOV.2011 11:39:31

Permitted frequency band:	902 - 928 MHz		
20 dB bandwidth:	72.5 kHz		
Carrier frequency stability:	<input type="checkbox"/> specified	<input checked="" type="checkbox"/> not specified	
Maximum frequency tolerances:			
Bandwidth of the emission:	72.5 kHz	within permitted frequency band⁶:	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁶ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 3, sections 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Frequency Shift Keying (FSK)
---------------------	------------------------------


$B_n = \text{Necessary Bandwidth}$	$B_n = 2DK + B$
$D = \text{Peak deviation}$	$D = 19 \text{ kHz}$
$K = \text{Overall numerical factor}$	$K = 1$
$B = \text{Modulation rate}$	$B = 34 \text{ kHz}$
Calculation:	$B_n = 2 \cdot (19 \text{ kHz}) \cdot 1 + 34 \text{ kHz} = 72 \text{ kHz}$

Designation of Emissions:	72K0F1D
---------------------------	----------------

8.4 Restricted Bands of Operation

Rules and specifications:	CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 8, section 7.2.2(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 7, section 2.2(a).
Measurement procedure:	Radiated Emission in Fully or Semi Anechoic Room (6.3)


Comment:	
Date of test:	October 17, 2011
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

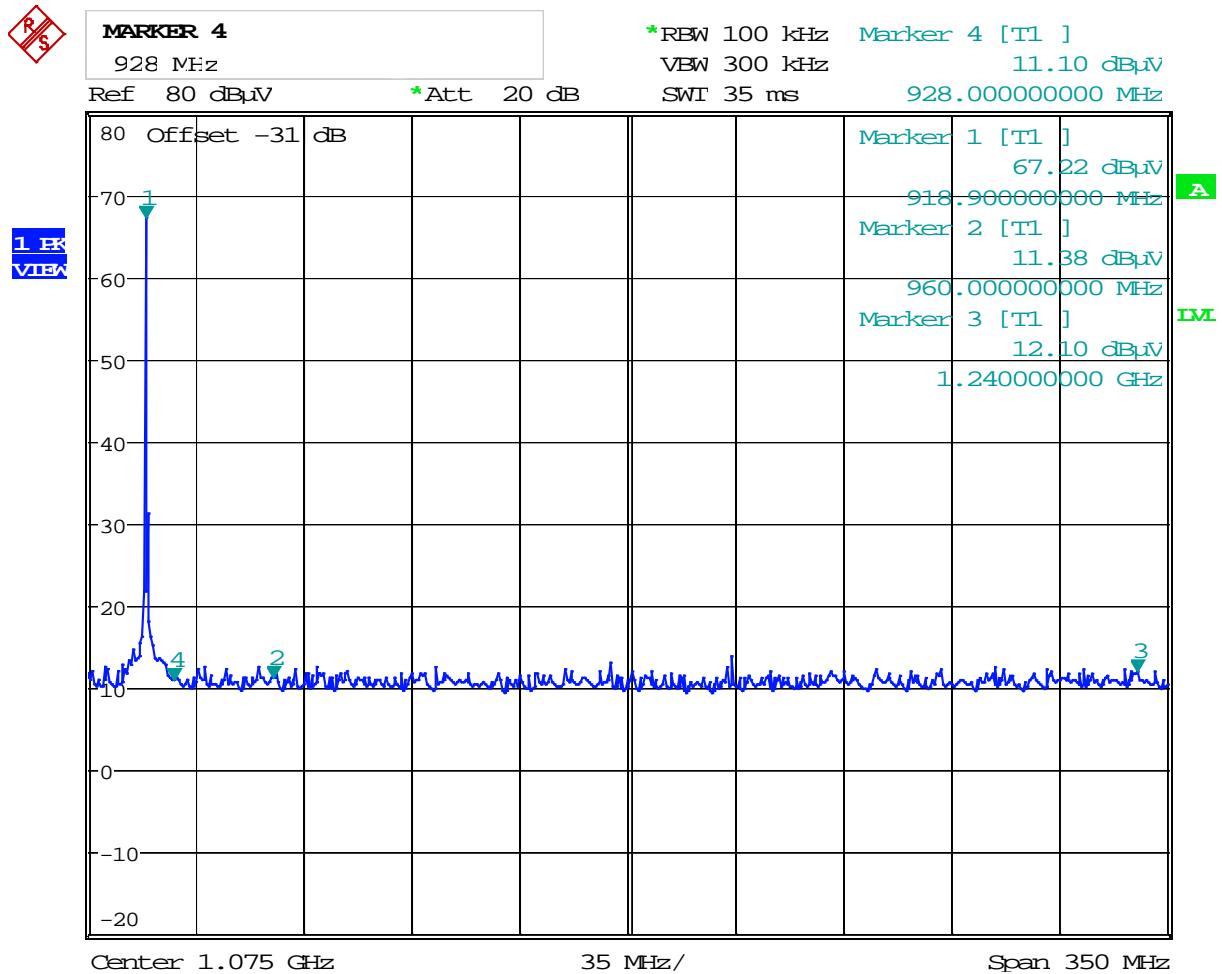

Date: 17.OCT.2011 13:24:46

Test Result:

Test passed

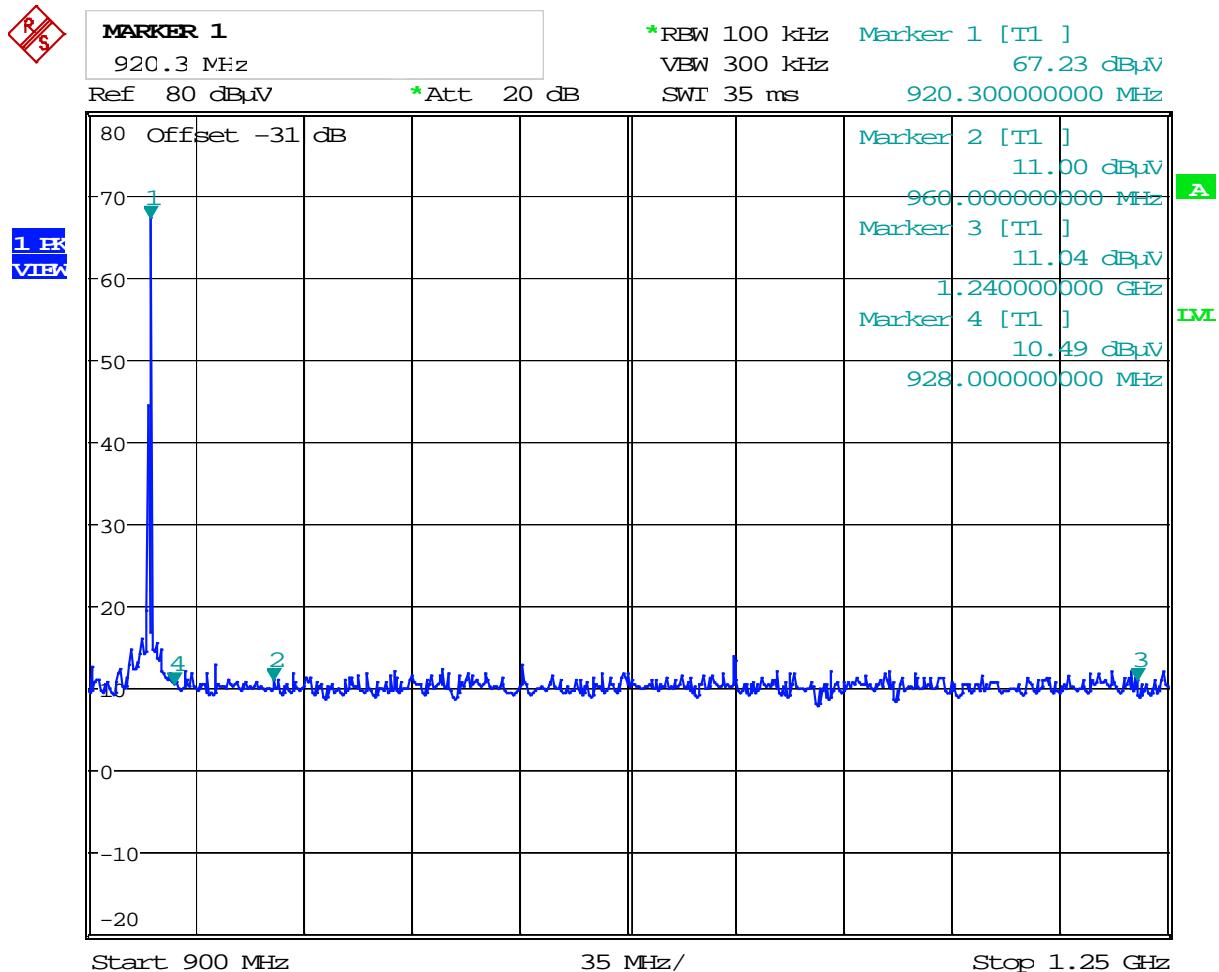

Date: 17.OCT.2011 13:38:29

Test Result:

Test passed

8.5 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.231(b)(3) IC RSS-210 Issue 8, section A1.1.2(b)			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 30.000	30	29.5	30
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.2)			

Comment:	
Date of test:	October 17, 2011
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

No emissions above noise level detected

Sample calculation of final values:

$$\begin{aligned} \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

Comment:	
Date of test:	October 17, 2011
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

No emissions above noise level detected

Sample calculation of final values:

$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\begin{aligned}\text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}\end{aligned}$$

Note: Extrapolation factor (dB) and final value (dB}\mu\text{V/m) are relating to distance d.

8.6 Radiated Emission Measurement 30 MHz to 10 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249 IC RSS-210 Issue 8, section A2.9		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.3) Radiated Emission at Alternative Test Site (6.4)		

Comment:	Transmitting continuously at 919 MHz
Date of test:	October 17, 2011
Test site:	Frequencies \leq 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
52.010	vertical	Quasi-Peak	6.1	15.6		21.7	40.0	18.3
103.990	vertical	Quasi-Peak	13.8	14.1		27.9	43.5	15.6
130.010	vertical	Quasi-Peak	13.5	10.9		24.4	43.5	19.1
155.980	vertical	Quasi-Peak	15.8	10.1		25.9	43.5	17.6
208.010	vertical	Quasi-Peak	8.7	12.2		20.9	43.5	22.6
260.000	vertical	Quasi-Peak	16.7	14.2		30.9	46.0	15.1
763.560	horizontal	Quasi-Peak	-1.3	23.4		22.1	46.0	23.9
919.000	horizontal	Quasi-Peak	67.9	25.0		92.9	94.0	1.1
1840.000	vertical	Peak	11.9	31.5		43.3	54.0	10.7
5515.600	horizontal	Peak	9.3	35.0		44.2	54.0	9.8
7352.436	vertical	Average	11.3	39.1		50.4	54.0	3.7
7354.000	vertical	Peak	13.9	39.1		53.0	74.0	21.0
9190.000	vertical	Peak	17.7	43.8		61.6	63.5	1.9

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ + \text{Pulse Train Correction (dB)}$$

Comment:	Transmitting continuously at 920 MHz
Date of test:	October 17, 2011
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
52.010	vertical	Quasi-Peak	6.1	15.6		21.7	40.0	18.3
103.990	vertical	Quasi-Peak	13.8	14.1		27.9	43.5	15.6
130.010	vertical	Quasi-Peak	13.5	10.9		24.4	43.5	19.1
155.980	vertical	Quasi-Peak	15.8	10.1		25.9	43.5	17.6
208.010	vertical	Quasi-Peak	8.7	12.2		20.9	43.5	22.6
260.000	vertical	Quasi-Peak	16.7	14.2		30.9	46.0	15.1
763.560	horizontal	Quasi-Peak	-1.3	23.4		22.1	46.0	23.9
920.000	horizontal	Quasi-Peak	67.1	25.0		92.1	94.0	1.9
1840.000	vertical	Peak	11.9	31.5		43.4	54.0	10.6
5523.200	horizontal	Peak	9.3	35.0		44.3	54.0	9.7
7360.410	horizontal	Average	13.5	39.1		52.6	54.0	1.5
7363.400	vertical	Peak	13.4	39.1		52.5	54.0	1.5
9200.120	vertical	Average	9.3	43.8		53.1	63.5	10.4

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ + \text{Pulse Train Correction (dB)}$$

8.7 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 3, section 5.6
Guide:	IC RSS-102 Issue 4, section 2.5

Exposure of Humans to RF Fields		Applicable	Declared by applicant	Measured	Exemption
The antenna is					
<input type="checkbox"/> detachable <p>The conducted output power (CP in watts) is measured at the antenna connector:</p> $CP = \dots \text{ W}$ <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: $G = \dots$</p> $EIRP = G \cdot CP \Rightarrow EIRP = \dots \text{ W}$ <p><input type="checkbox"/> the field strength⁷ in V/m: $FS = \dots \text{ V/m}$</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots \text{ W}$ <p>with:</p> <p>Distance between the antennas in m: $D = \dots \text{ m}$</p>					
<input checked="" type="checkbox"/> not detachable <p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by⁷:</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 585 \mu\text{W}$ <p>with:</p> <p>Field strength in V/m: $FS = 44.16 \text{ mV/m}$</p> <p>Distance between the two antennas in m: $D = 3 \text{ m}$</p>					
Selection of output power					
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> $TP = 585 \mu\text{W}$					

⁷ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
<input type="checkbox"/> less than or equal to 20 cm <input checked="" type="checkbox"/> greater than 20 cm		<input checked="" type="checkbox"/>		
Transmitting device is				
<input type="checkbox"/> in the vicinity of the human head <input type="checkbox"/> body-worn		<input checked="" type="checkbox"/>		
SAR evaluation				
SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm.				
<input type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and with output power (i.e. the higher of the conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 200 mW for general public use and 1000 mW for controlled use. <input type="checkbox"/> ; <input type="checkbox"/> The device operates above 1 GHz and up to 2.2 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 100 W for general public use and 500 W for controlled use. <input type="checkbox"/> The device operates above 2.2 GHz and up to 3 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 20 mW for general public use and 100 mW for controlled use. <input type="checkbox"/> The device operates above 3 GHz and up to 6 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 10 mW for general public use and 50 mW for controlled use. <input type="checkbox"/> SAR evaluation is documented in test report no.				<input type="checkbox"/>
RF exposure evaluation				
RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm.				
<input checked="" type="checkbox"/> The device operates below 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 2.5 W. <input type="checkbox"/> The device operates at or above 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 5 W. <input type="checkbox"/> RF exposure evaluation is documented in test report no.		<input checked="" type="checkbox"/>		<input type="checkbox"/>

9 Test Results for Receiver

FCC CFR 47 Part 15			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
15.107	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
15.109	Radiated emission 30 MHz to 5 GHz	44	Test passed
15.111(a)	Antenna power conduction emission of receivers 9 kHz to 5 GHz	---	Not applicable

IC RSS-Gen Issue 3			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
7.2.4	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
6.1	Receiver spurious emissions (radiated) 30 MHz to 5 GHz	44	Test passed
6.2	Receiver spurious emissions (antenna conducted) 9 kHz to 5 GHz	---	Not applicable

9.1 Radiated Emission Measurement 30 MHz to 5 GHz

Rules and specifications:	CFR 47 Part 15, section 15.109 (Class B) IC RSS-Gen Issue 3, sections 6.1		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.3) Radiated Emission at Alternative Test Site (6.4)		

Comment:			
Date of test:	October 31, 2011		
Test site:	Frequencies \leq 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2		
Test distance:	3 meters		

Test Result:	Test passed		
--------------	-------------	--	--

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
51.330	vertical	Quasi-Peak	-4.3	15.7	11.4	40.0	28.6

Sample calculation of field final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)}$$

10 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2010
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2010
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 7, 2009 (published on September 15, 2009)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 3 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 8 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	December 2010
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 4: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2010
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997

- | | | |
|---|--|---------------|
| <input type="checkbox"/> CAN/CSA-CEI/IEC CISPR 22 | Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment | 2002 |
| | CAN/CSA CISPR 22-10
Information technology equipment -
Radio disturbance characteristics -
Limits and methods of measurement
(Adopted IEC CISPR 22:2008, sixth edition, 2008-09) | |
| <input type="checkbox"/> CAN/CSA CISPR 22-10 | Information technology equipment -
Radio disturbance characteristics -
Limits and methods of measurement
(Adopted IEC CISPR 22:2008, sixth edition, 2008-09) | 2010 |
| <input checked="" type="checkbox"/> TRC-43 | Notes Regarding Designation of Emissions (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada | October, 2008 |

11 Test Equipment List with Calibration Data

Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
EMI test receiver	2044	ESU8	100232	Rohde & Schwarz	Rohde & Schwarz	12/2010	06/2012
Spectrum analyser	1666	FSP30	100063	Rohde & Schwarz	Rohde & Schwarz	05/2011	11/2012
Preamplifier	1651	CPA9231A	3393	Schaffner Electrotest	TÜV SÜD SENTON	05/2010	05/2012
TRILOG broadband antenna	1722	VULB 9163	9163-188	Schwarzbeck	Rohde & Schwarz	08/2010	02/2012
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	05/2011	11/2012
	1012	3160-05	9112-1001	EMCO	---	no calibration required	
Horn antenna	1013	3160-06	9112-1001	EMCO	---	no calibration required	
Horn antenna	1014	3160-07	9112-1008	EMCO	---	no calibration required	


12 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	10.11.2011	Martin Steindl (az)	First Edition

Annex A Charts taken during testing

Radiated Emission Test 9 kHz - 30 MHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Transmitting continuously at 919 MHz
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: by hand	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

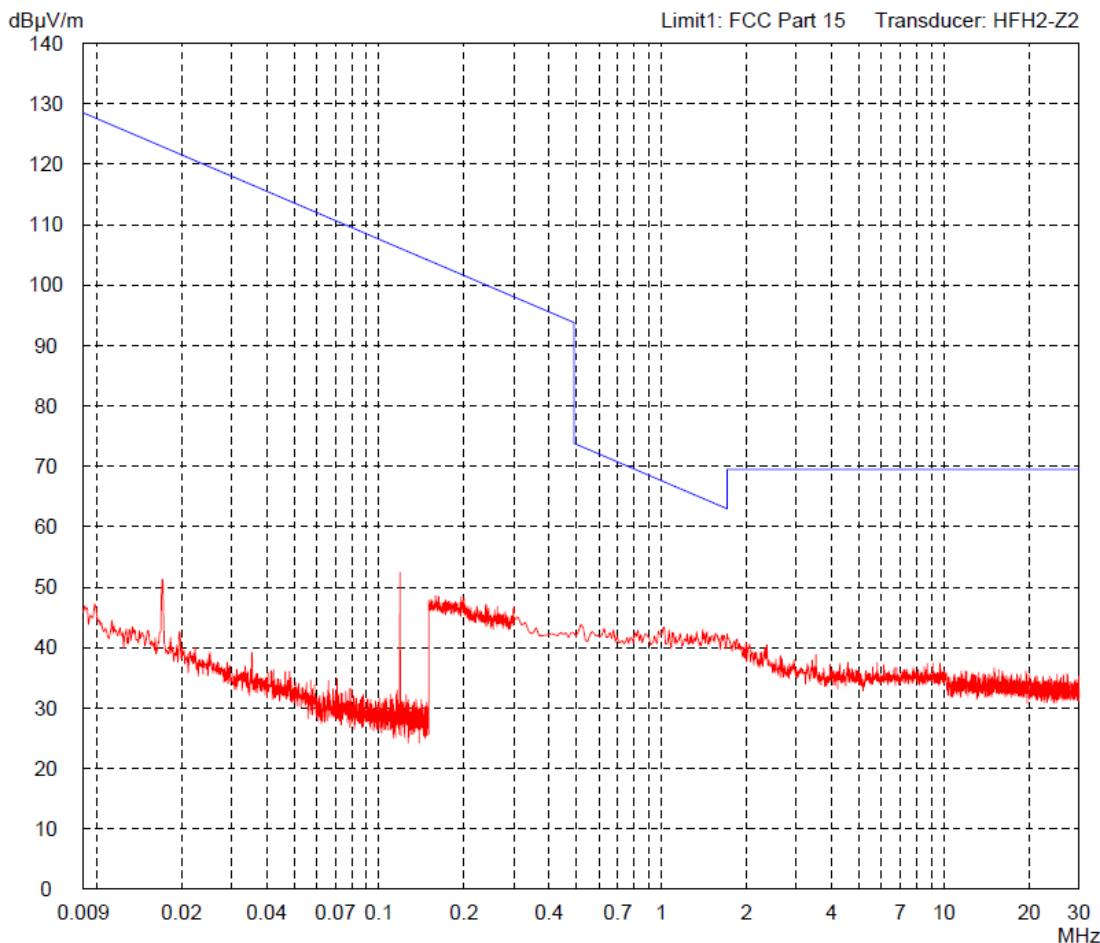

Result:
Prescan

Project file:
69861-04040

Page of Pages


Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Horizontal Polarization
Date of test:	Operator:
10/17/2011	M. Steindl
Test performed:	File name:
automatically	default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 919 MHz

Detector:	
Peak	

List of values:
Selected by hand

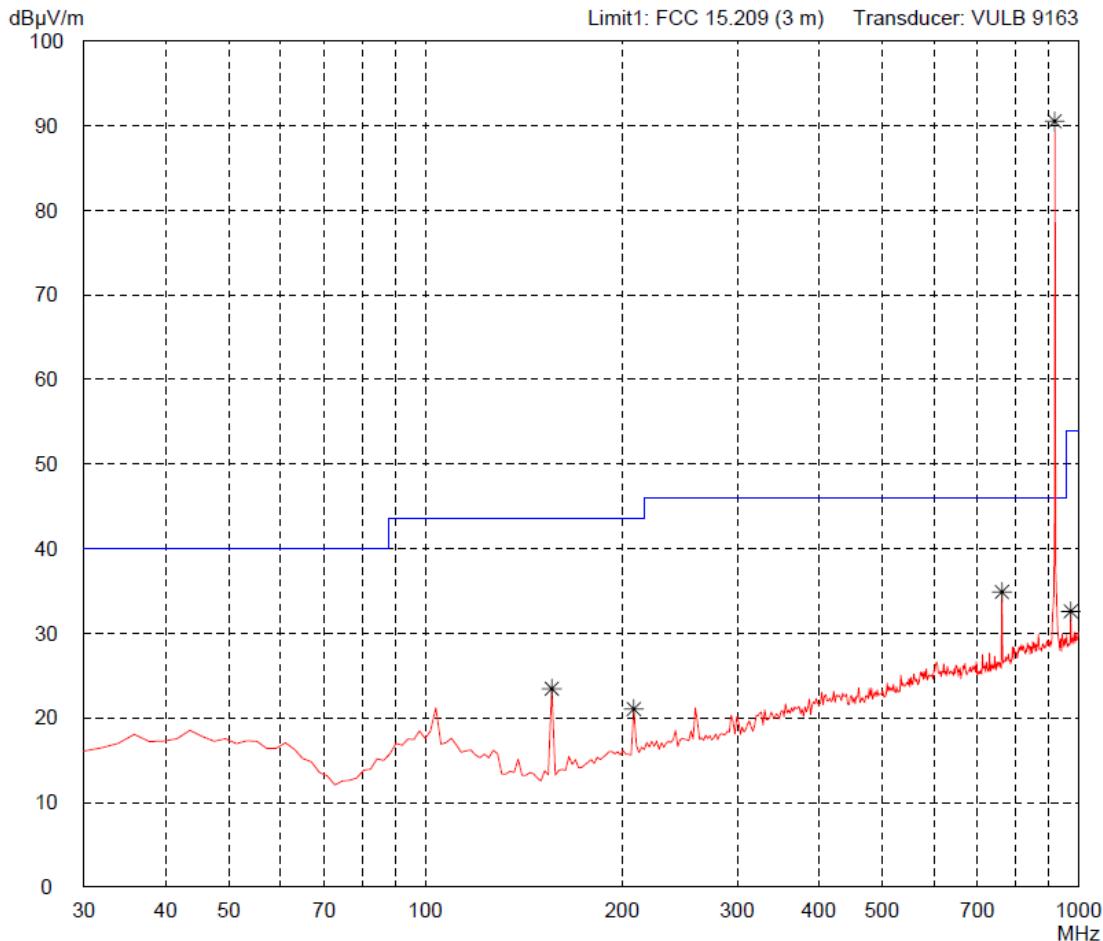

Result:
Prescan

Project file:
69861-04040

Page of Pages


Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Vertical Polarization
Date of test:	Operator: 10/17/2011 M. Steindl
Test performed:	File name: automatically default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 919 MHz

Detector:	Peak
-----------	------


List of values:
Selected by hand

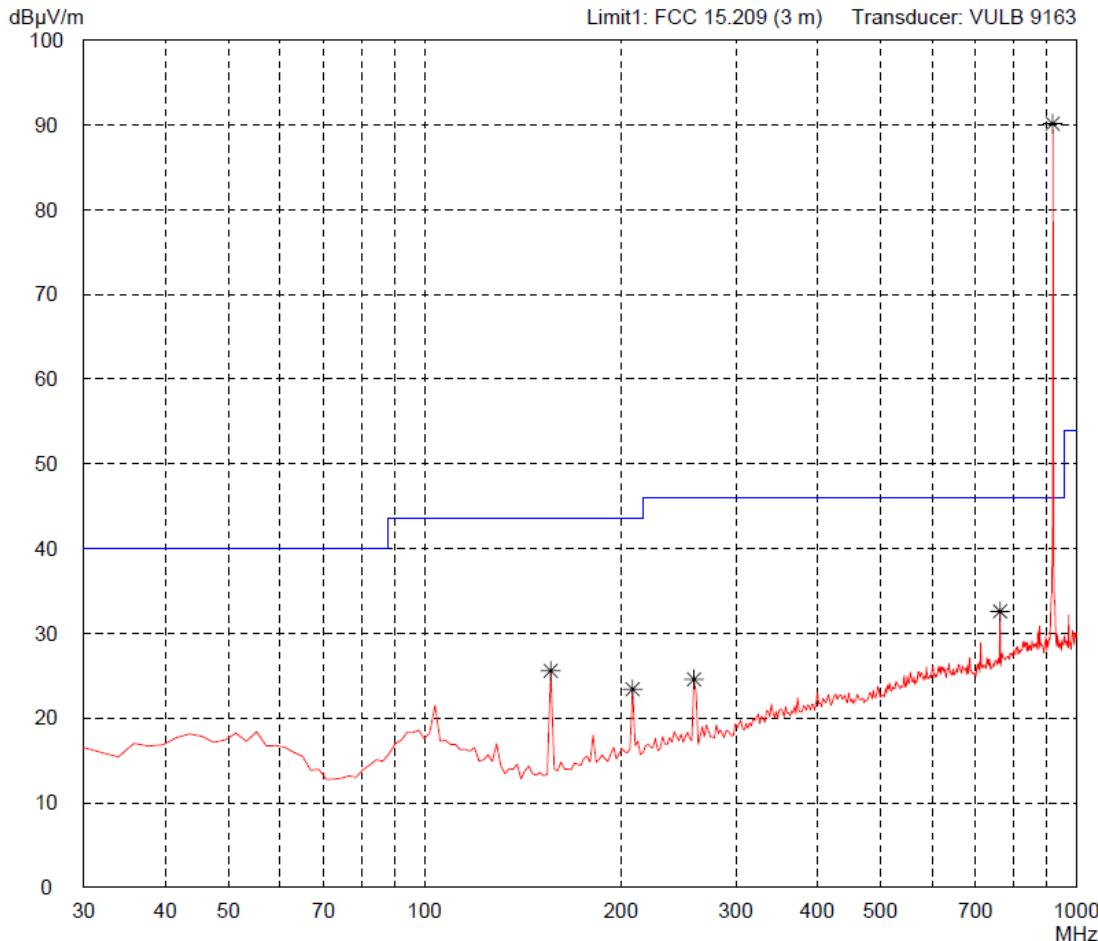

Result:
Prescan

Project file:
69861-04040

Page of Pages

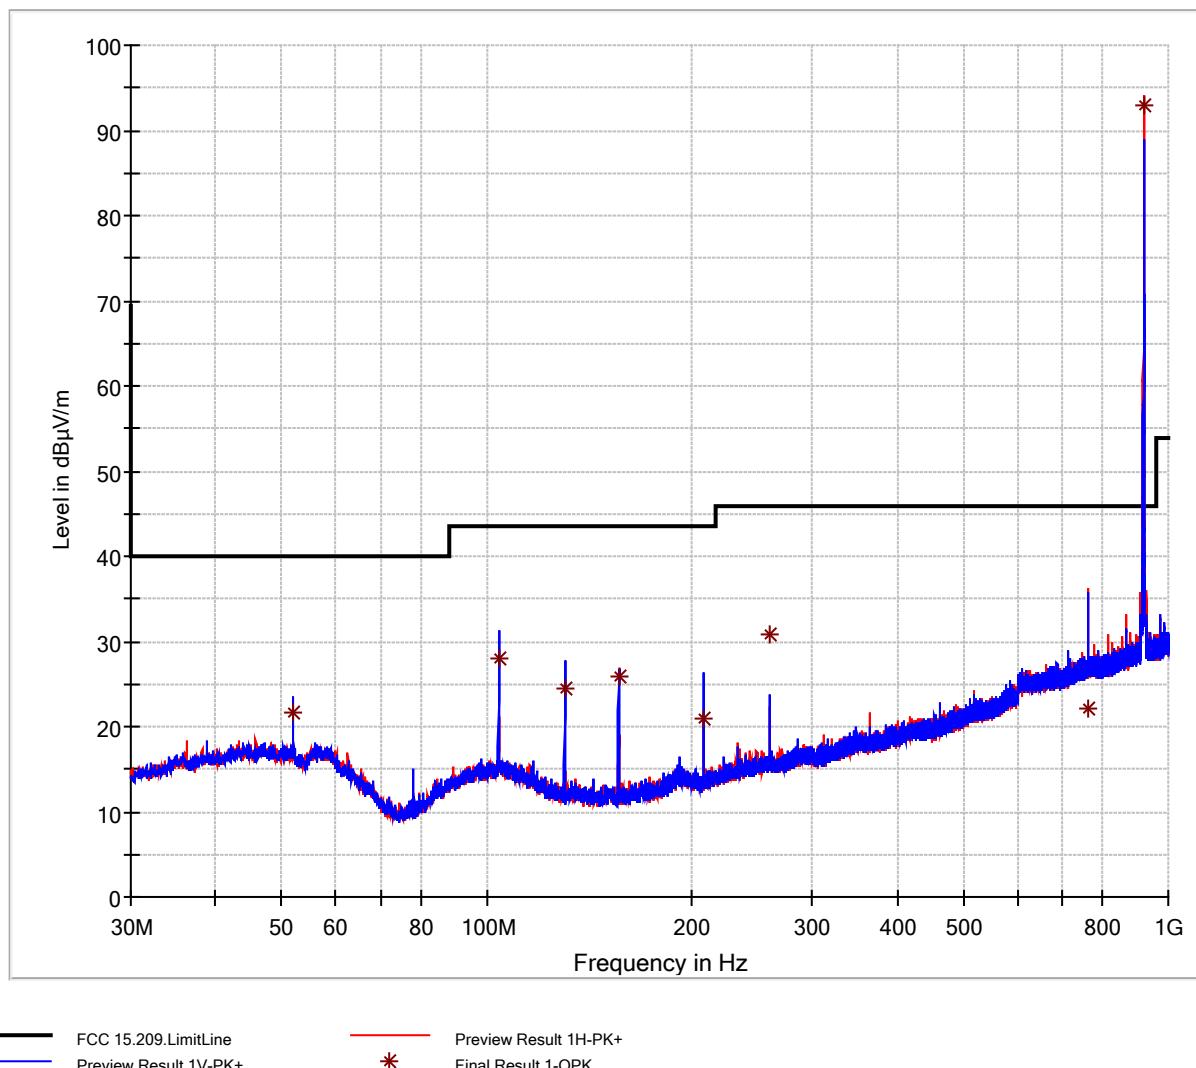


Radiated Emission Test 1 GHz - 4 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead
Serial no.: 111002
Applicant: Identec Solutions AG
Test site: Fully anechoic room, cabin no. 2
Tested on: Test distance 3 metres Horizontal Polarization
Date of test: 10/17/2011 Operator: M. Steindl
Test performed: automatically File name: default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 919 MHz

Detector: Peak

List of values: Selected by hand

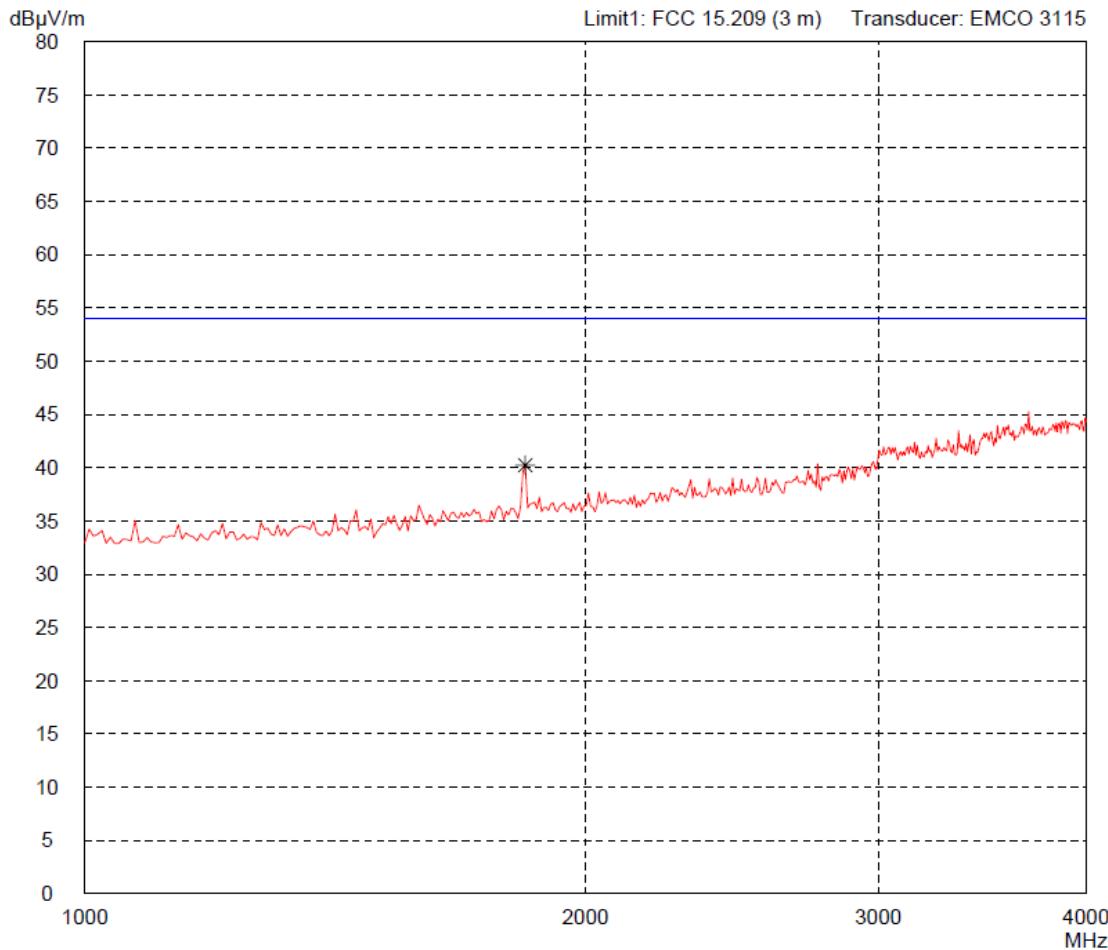


Result: Prescan

Project file: 69861-04040	Page	of	Pages
------------------------------	------	----	-------

Radiated Emission Test 1 GHz - 4 GHz
acc. to FCC Part 15 Subpart C (FAR)


Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Transmitting continuously at 919 MHz
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

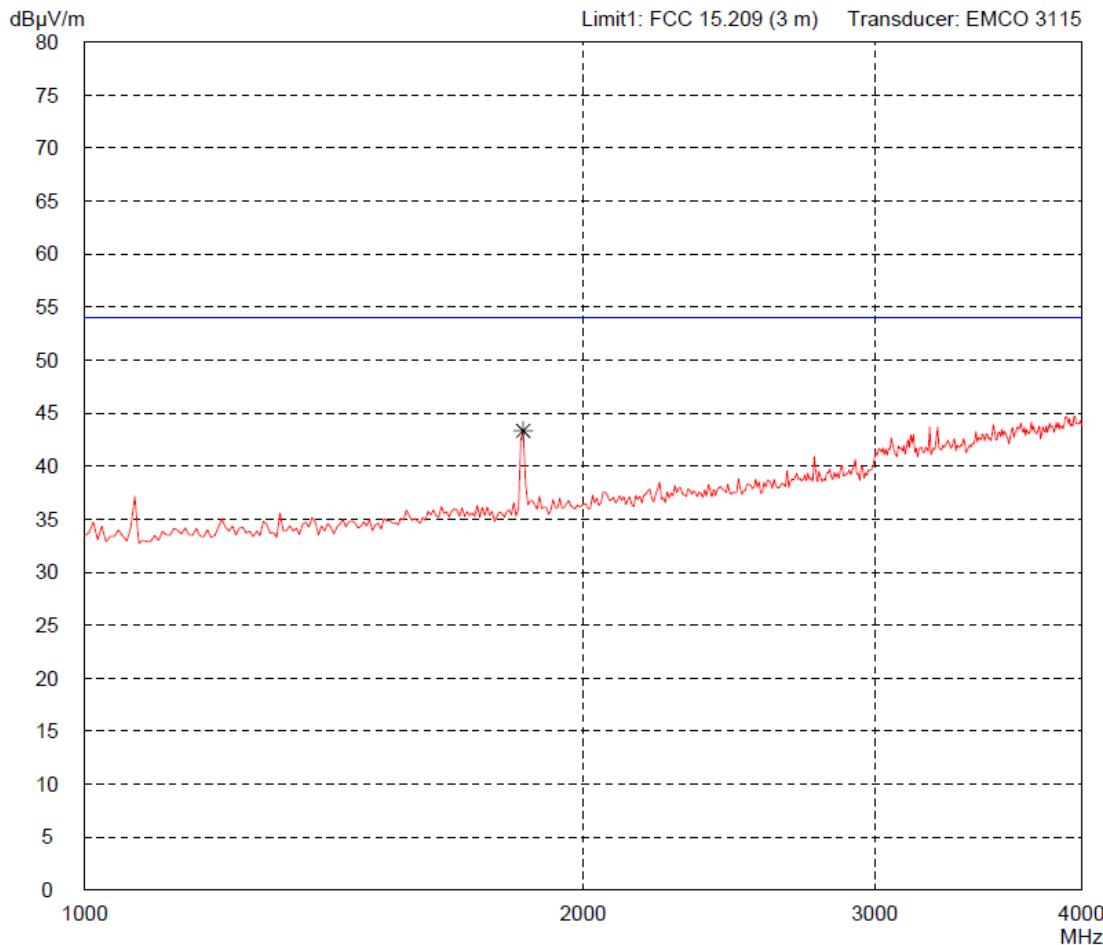

Result: Prescan	Project file: 69861-04040	Page	of	Pages
--------------------	------------------------------	------	----	-------

Radiated Emission Test 3.95 GHz - 5.85 GHz
acc. to FCC Part 15 Subpart C (FAR)


Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Transmitting continuously at 919 MHz
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

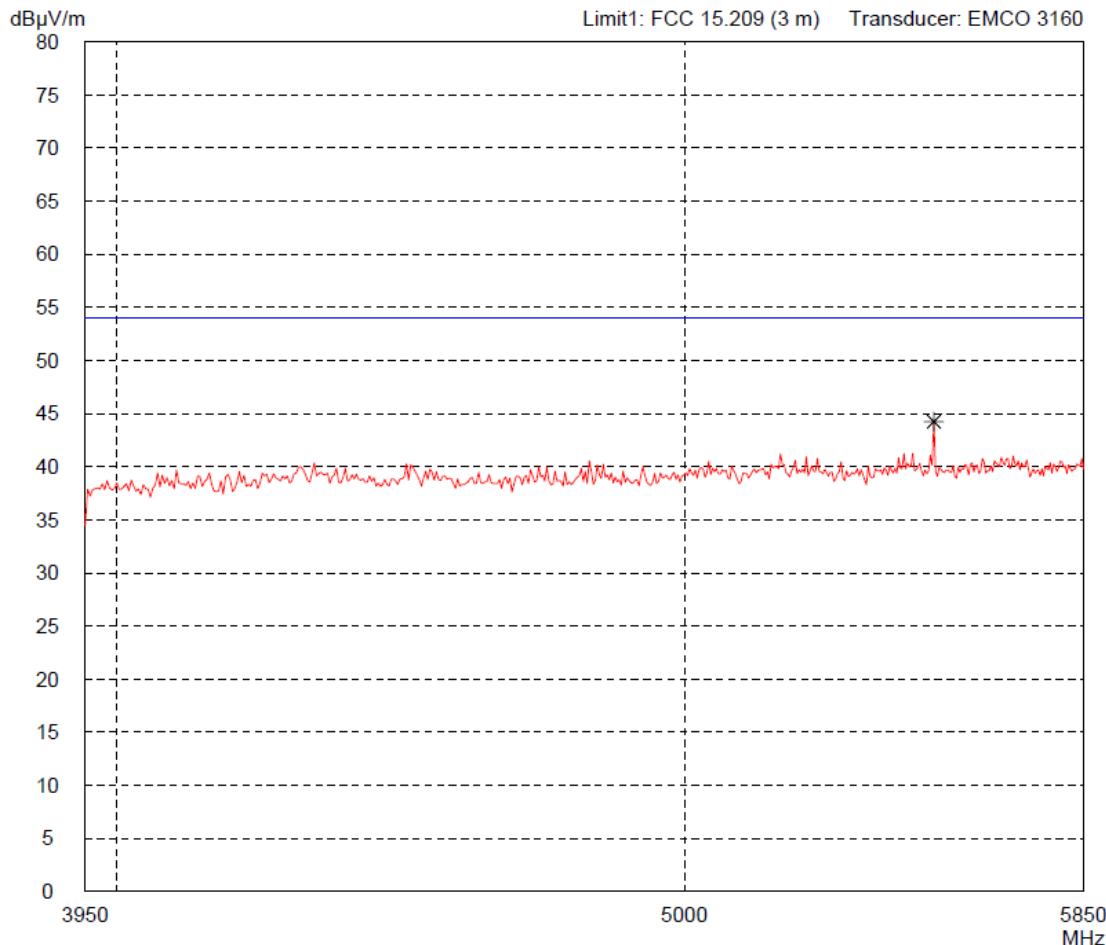

Result: Prescan	Project file: 69861-04040	Page _____ of _____ Pages
--------------------	------------------------------	---------------------------

Radiated Emission Test 3.95 GHz - 5.85 GHz
acc. to FCC Part 15 Subpart C (FAR)


Model: i-Q350 HHX Hothead	Comment:
Serial no.: 111002	- 3 V external power supply
Applicant: Identec Solutions AG	- Transmitting continuously at 919 MHz
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

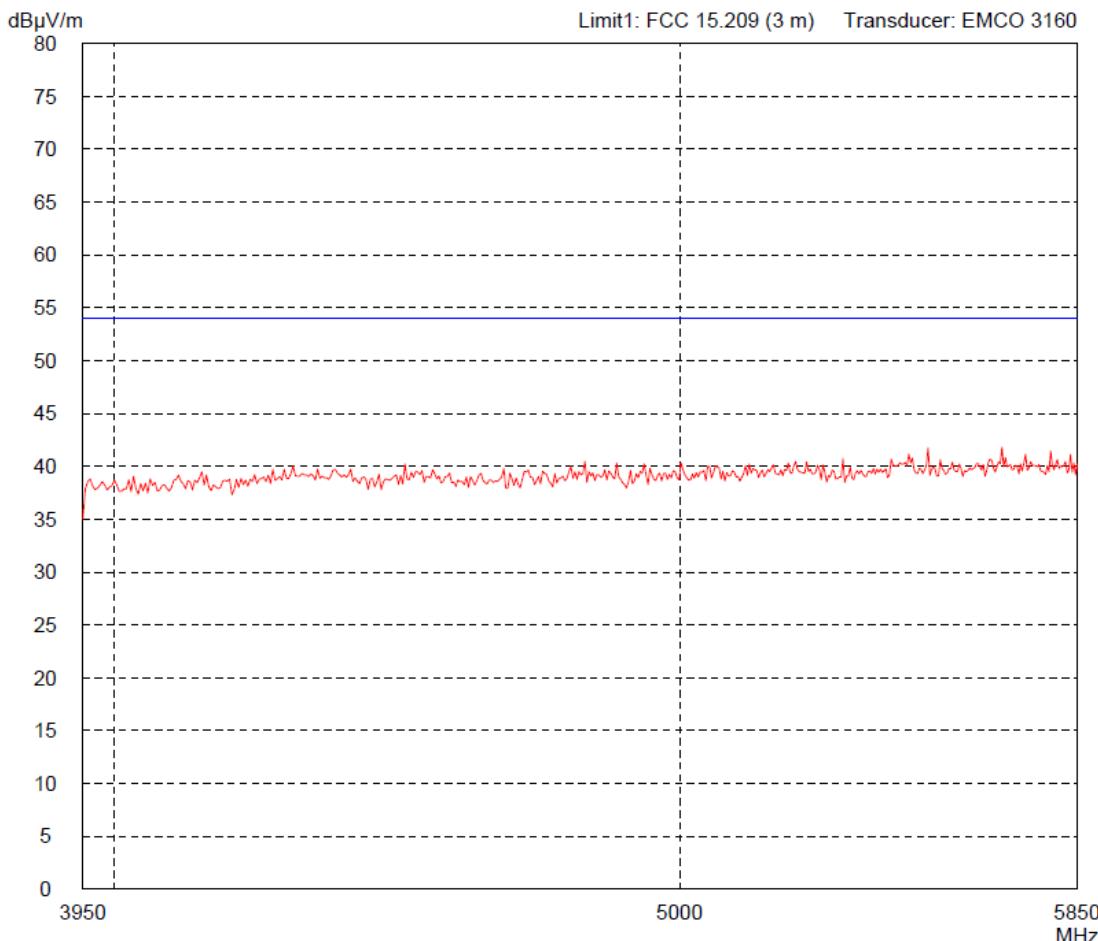

Result: Prescan	Project file: 69861-04040	Page	of	Pages
--------------------	------------------------------	------	----	-------

Radiated Emission Test 5.85 GHz - 8.2 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Transmitting continuously at 919 MHz
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

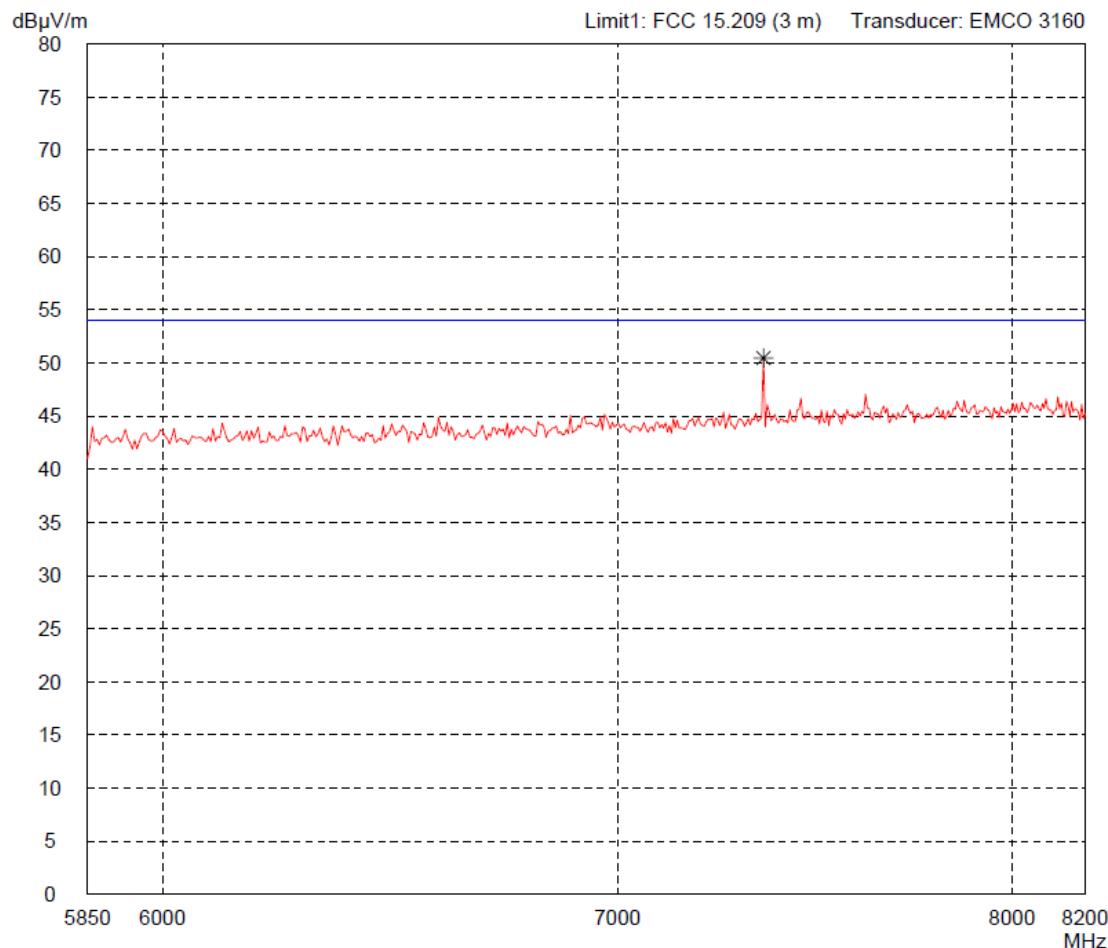

Result: Prescan	Project file: 69861-04040	Page	of	Pages
--------------------	------------------------------	------	----	-------


Radiated Emission Test 5.85 GHz - 8.2 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Vertical Polarization
Date of test:	Operator: 10/17/2011 M. Steindl
Test performed:	File name: automatically default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 919 MHz

Detector:	
Peak	

List of values:
Selected by hand

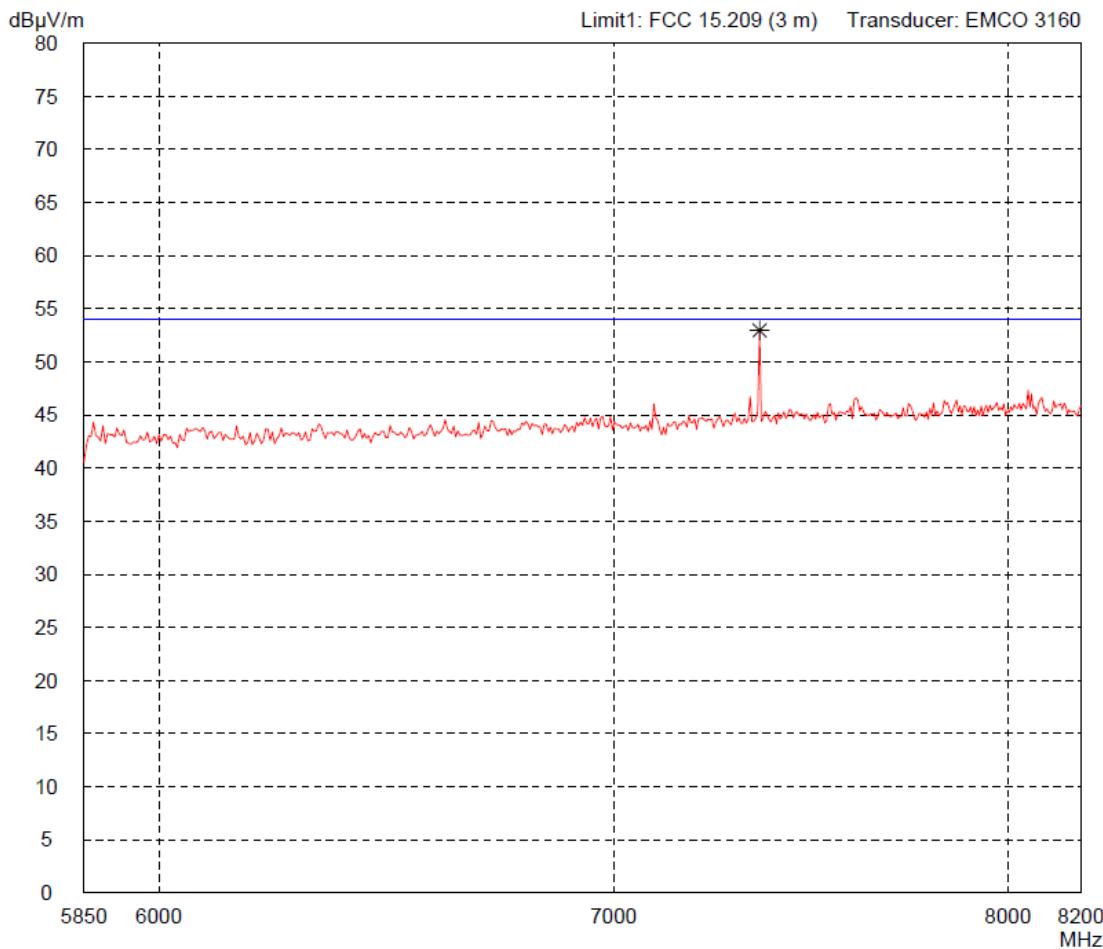


Result:
Prescan

Project file:
69861-04040 Page of Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Transmitting continuously at 919 MHz
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: by hand	File name: default.emi
Detector: Average	List of values: Selected by hand

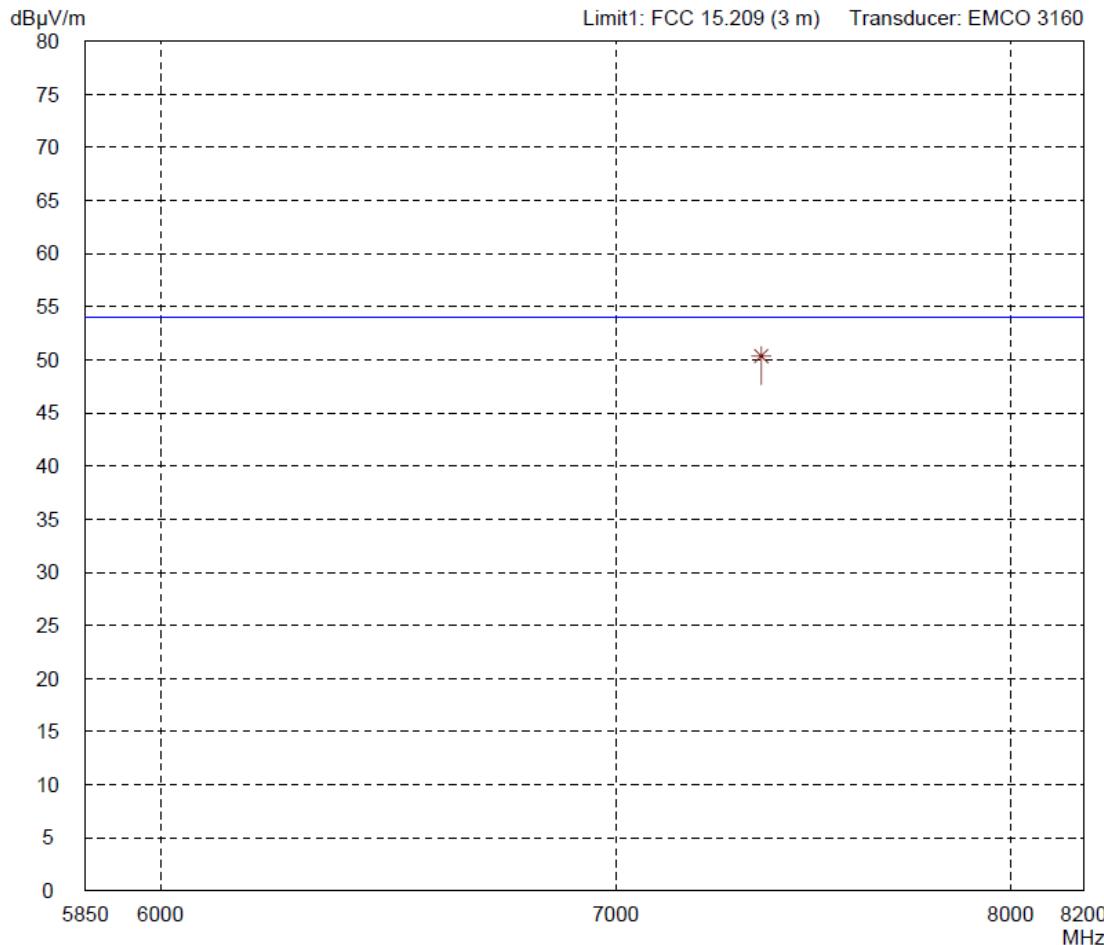

Result:
Limit kept (VBW = 10 kHz)

Project file:
69861-04040


Page of Pages

Radiated Emission Test 8.2 GHz - 10 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	
Serial no.: 111002	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 919 MHz


Detector: Peak	List of values: 10 dB Margin	50 Subranges
-------------------	---------------------------------	--------------

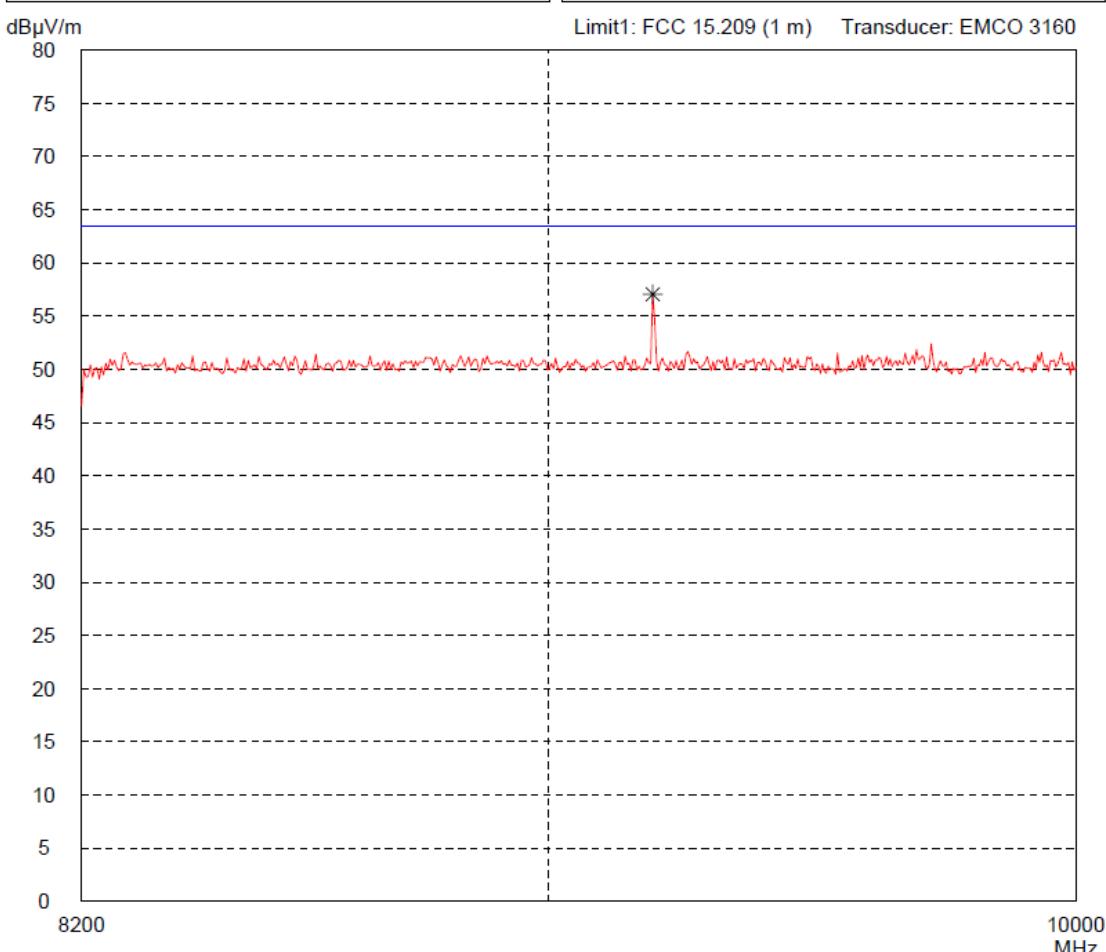

Result: Limit kept	Project file: 69861-04040	Page _____ of _____ Pages
-----------------------	------------------------------	---------------------------

Radiated Emission Test 8.2 GHz - 10 GHz
acc. to FCC Part 15 Subpart C (FAR)


Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Transmitting continuously at 919 MHz
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

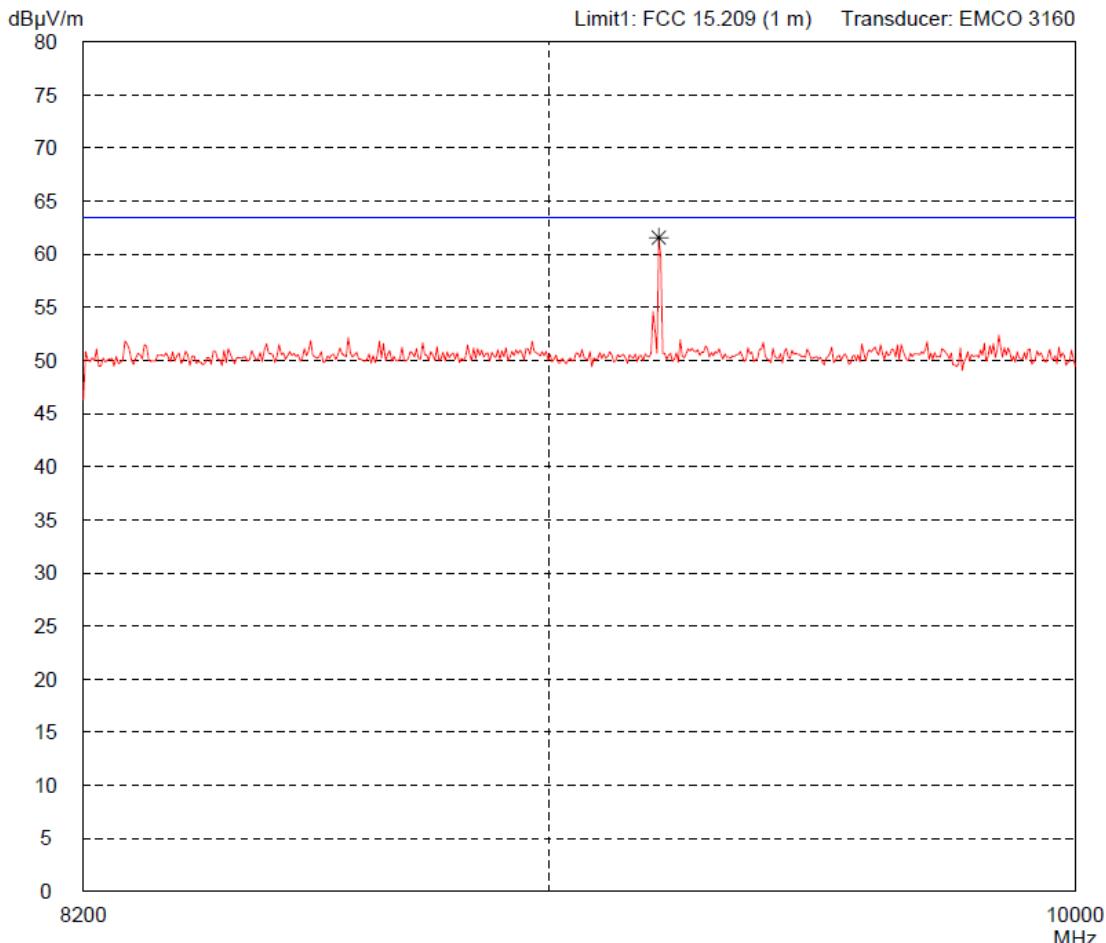

Result: Limit kept	Project file: 69861-04040	Page	of	Pages
-----------------------	------------------------------	------	----	-------

Radiated Emission Test 9 kHz - 30 MHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	Comment:
Serial no.: 111002	- 3 V external power supply
Applicant: Identec Solutions AG	- Transmitting continuously at 920 MHz
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: by hand	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

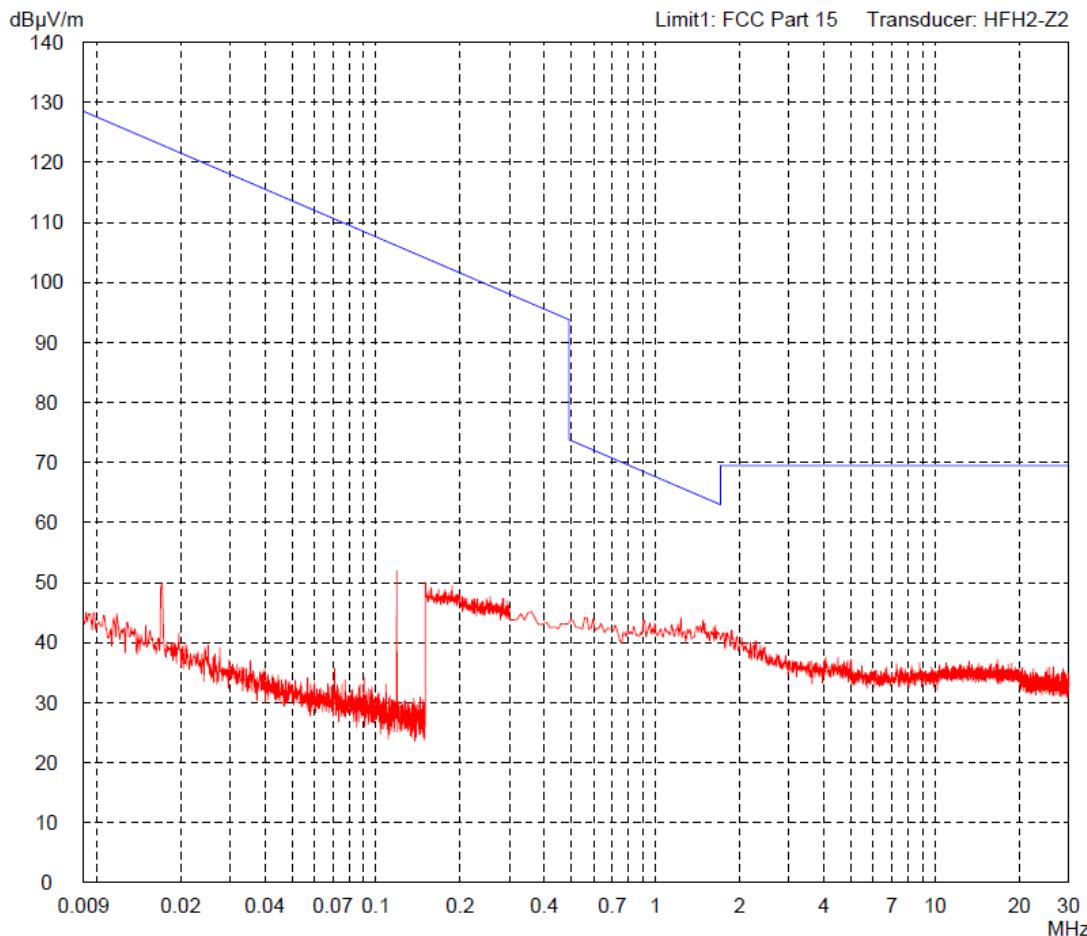

Result: Prescan	Project file: 69861-04040	Page	of	Pages
--------------------	------------------------------	------	----	-------


Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Horizontal Polarization
Date of test:	Operator: 10/17/2011 M. Steindl
Test performed:	File name: automatically default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 920 MHz

Detector:	Peak
-----------	------

List of values:
Selected by hand

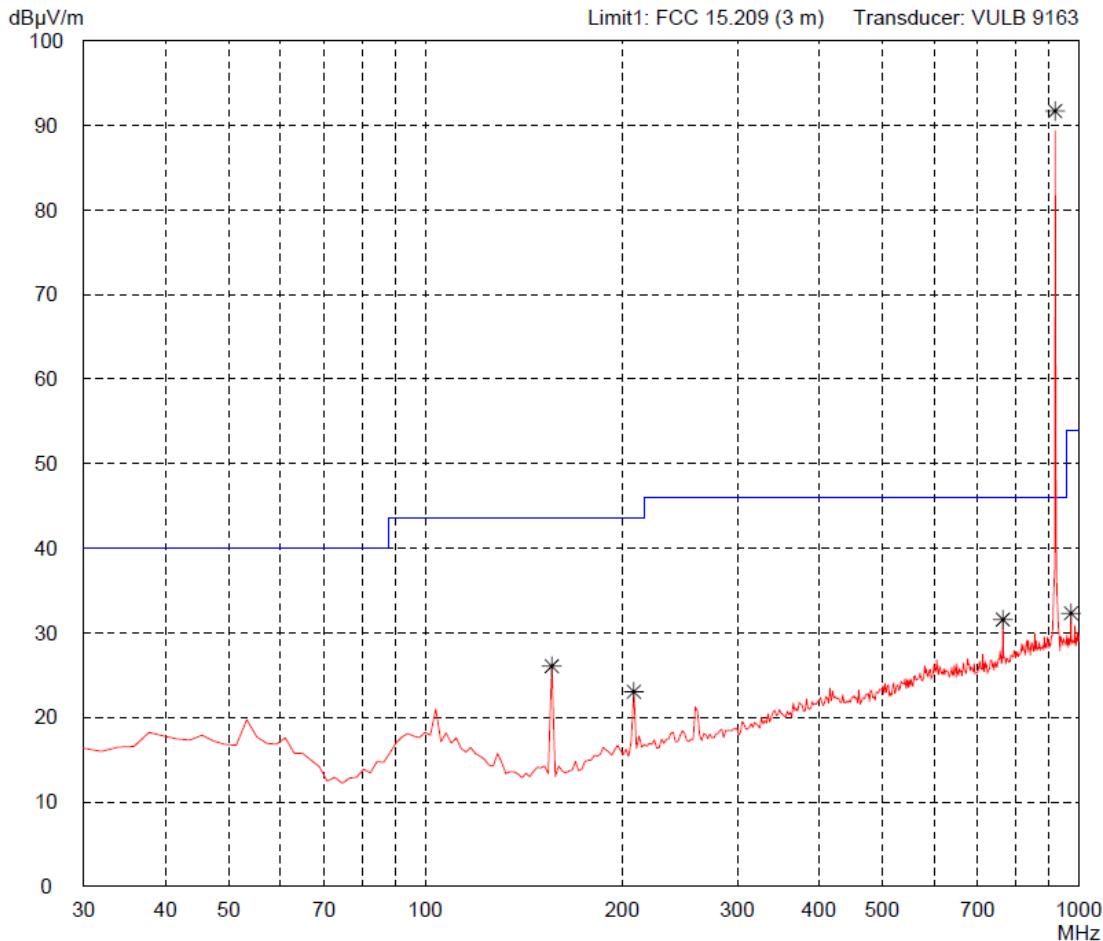


Result:
Prescan

Project file:
69861-04040

Page _____ of _____ Pages

Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Transmitting continuously at 920 MHz
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

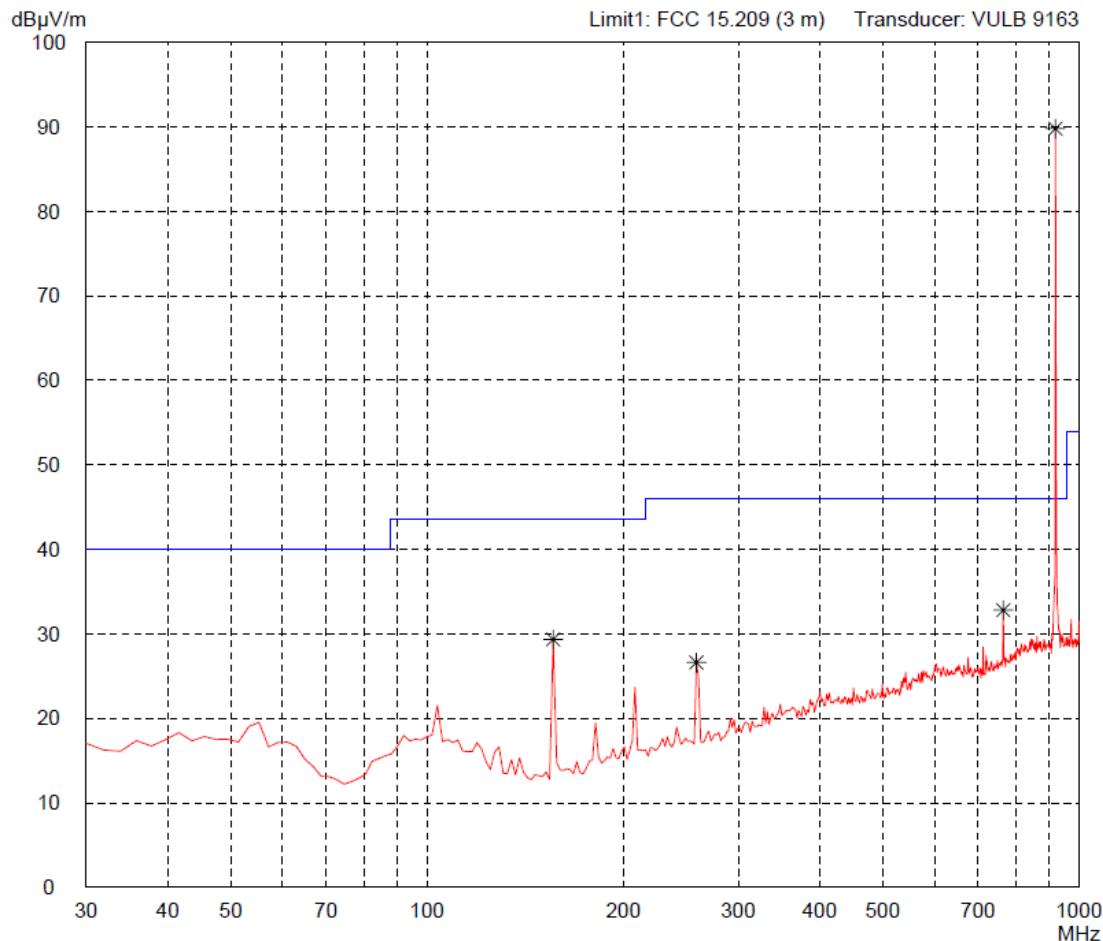


Result:
Prescan

Project file:
69861-04040

Page _____ of _____ Pages

Radiated Emission Test 1 GHz - 4 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Transmitting continuously at 920 MHz
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

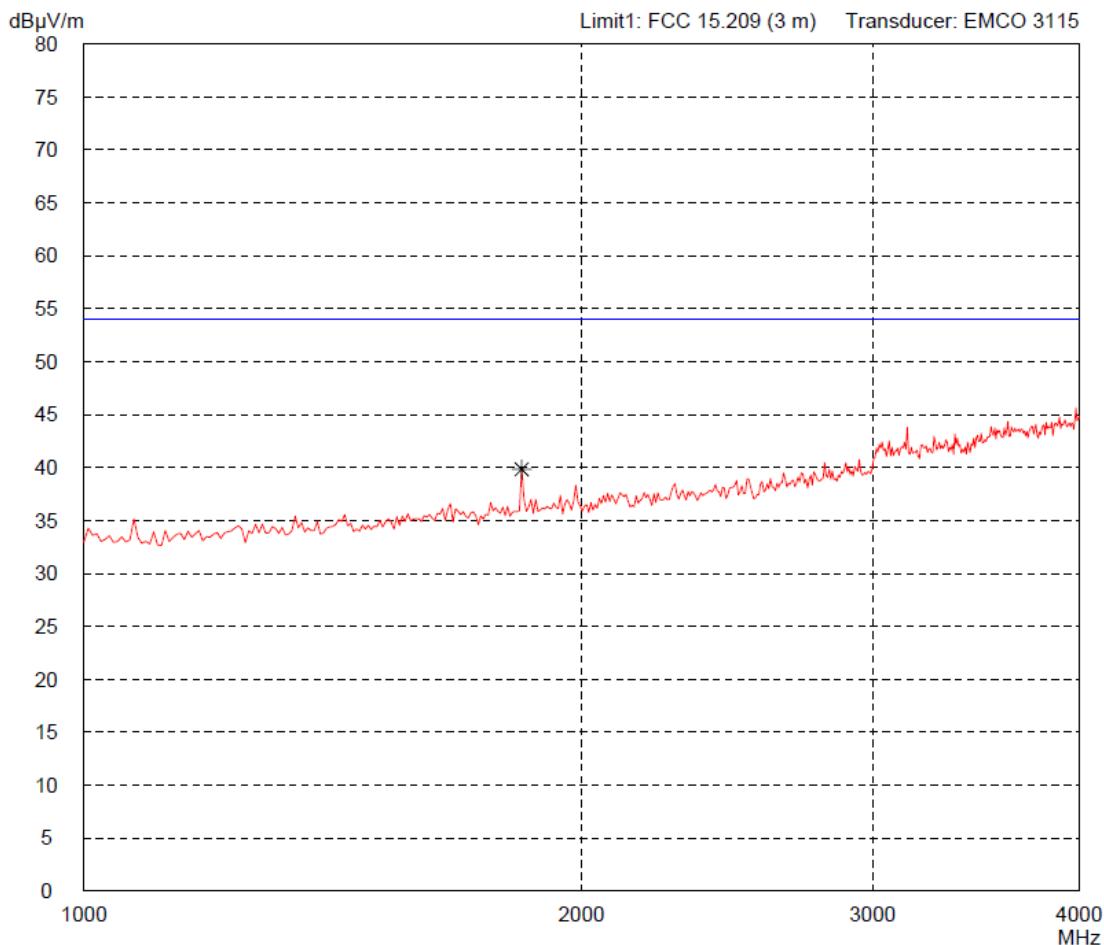

Result: Prescan	Project file: 69861-04040	Page	of	Pages
--------------------	------------------------------	------	----	-------


Radiated Emission Test 1 GHz - 4 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Vertical Polarization
Date of test:	Operator:
10/17/2011	M. Steindl
Test performed:	File name:
automatically	default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 920 MHz

Detector:	
Peak	

List of values:
Selected by hand

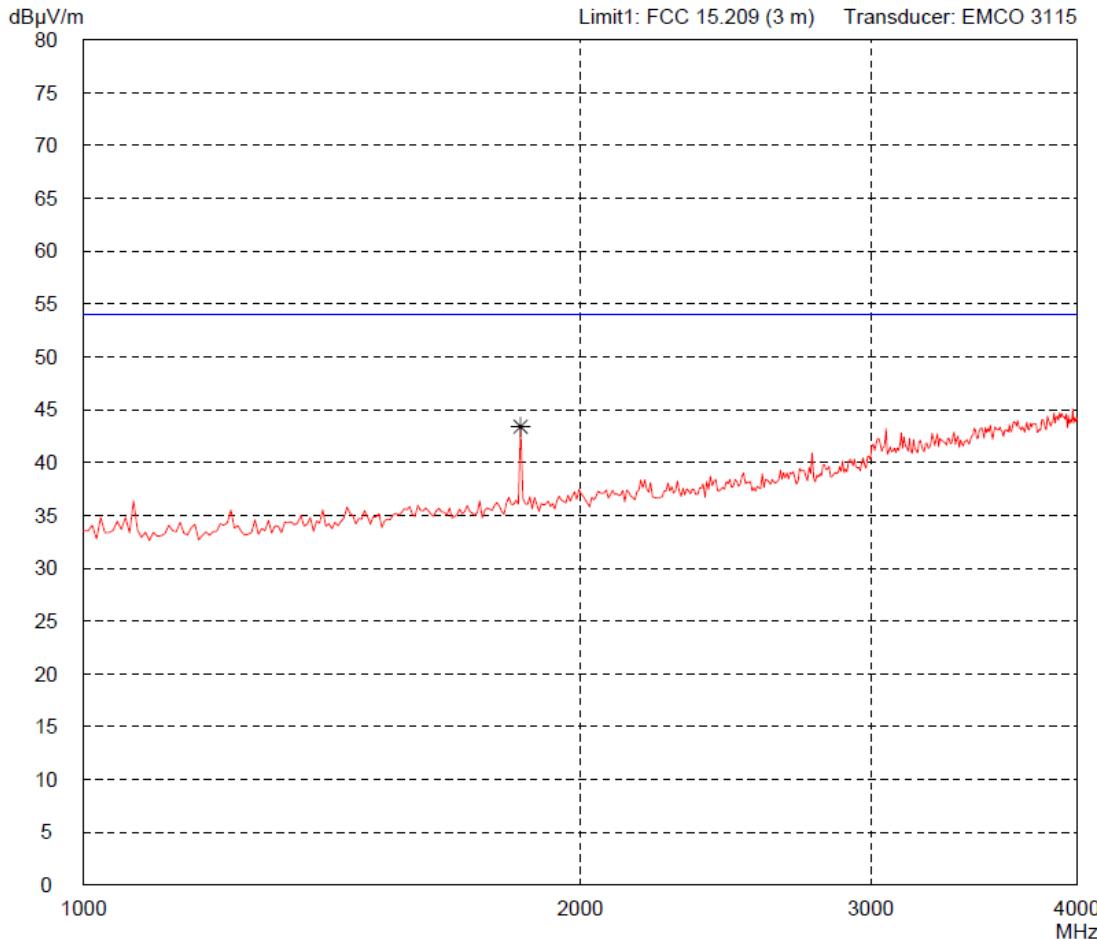

Result:	Prescan
---------	---------

Project file:	69861-04040	Page	of	Pages
---------------	-------------	------	----	-------


Radiated Emission Test 3.95 GHz - 5.85 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Horizontal Polarization
Date of test:	Operator:
10/17/2011	M. Steindl
Test performed:	File name:
automatically	default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 920 MHz

Detector:	List of values:
Peak	10 dB Margin 50 Subranges

Limit1: FCC 15.209 (3 m) Transducer: EMCO 3160

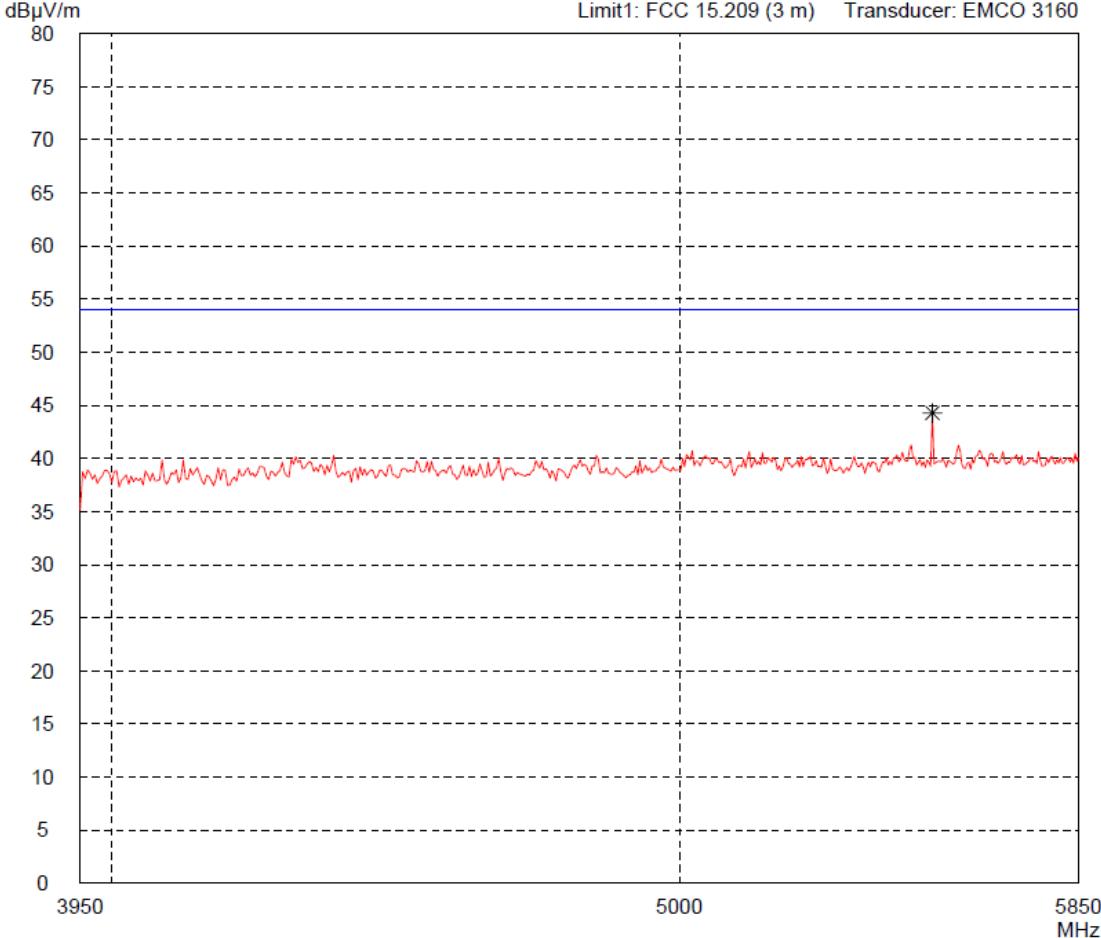

Result:
Prescan

Project file:
69861-04040

Page of Pages


Radiated Emission Test 3.95 GHz - 5.85 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead
Serial no.: 111002
Applicant: Identec Solutions AG
Test site: Fully anechoic room, cabin no. 2
Tested on: Test distance 3 metres Vertical Polarization
Date of test: 10/17/2011 Operator: M. Steindl
Test performed: automatically File name: default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 920 MHz

Detector: Peak

List of values:		
10 dB Margin	50 Subranges	

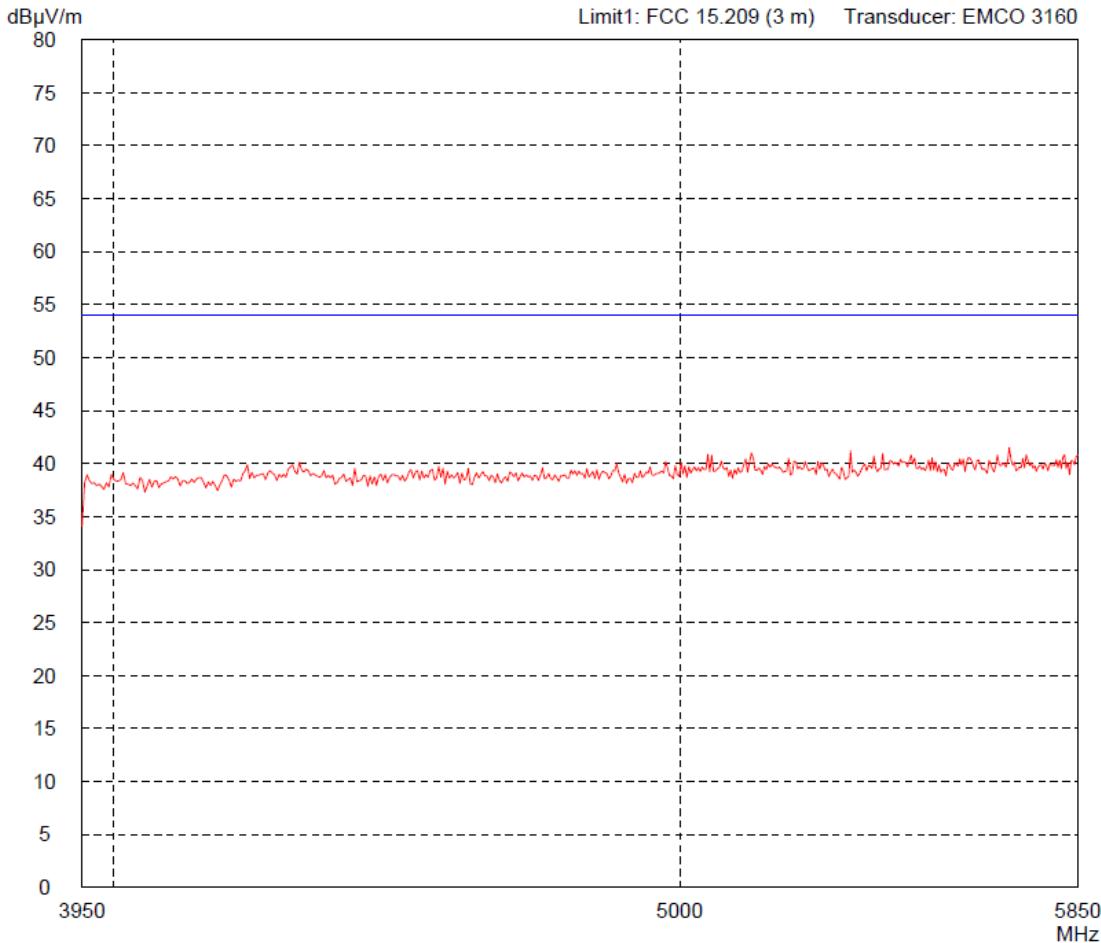


Result: Prescan

Project file: 69861-04040	Page	of	Pages
------------------------------	------	----	-------

Radiated Emission Test 8.2 GHz - 10 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 1 meter Horizontal Polarization
Date of test:	Operator: 10/17/2011 M. Steindl
Test performed:	File name: automatically default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 920 MHz

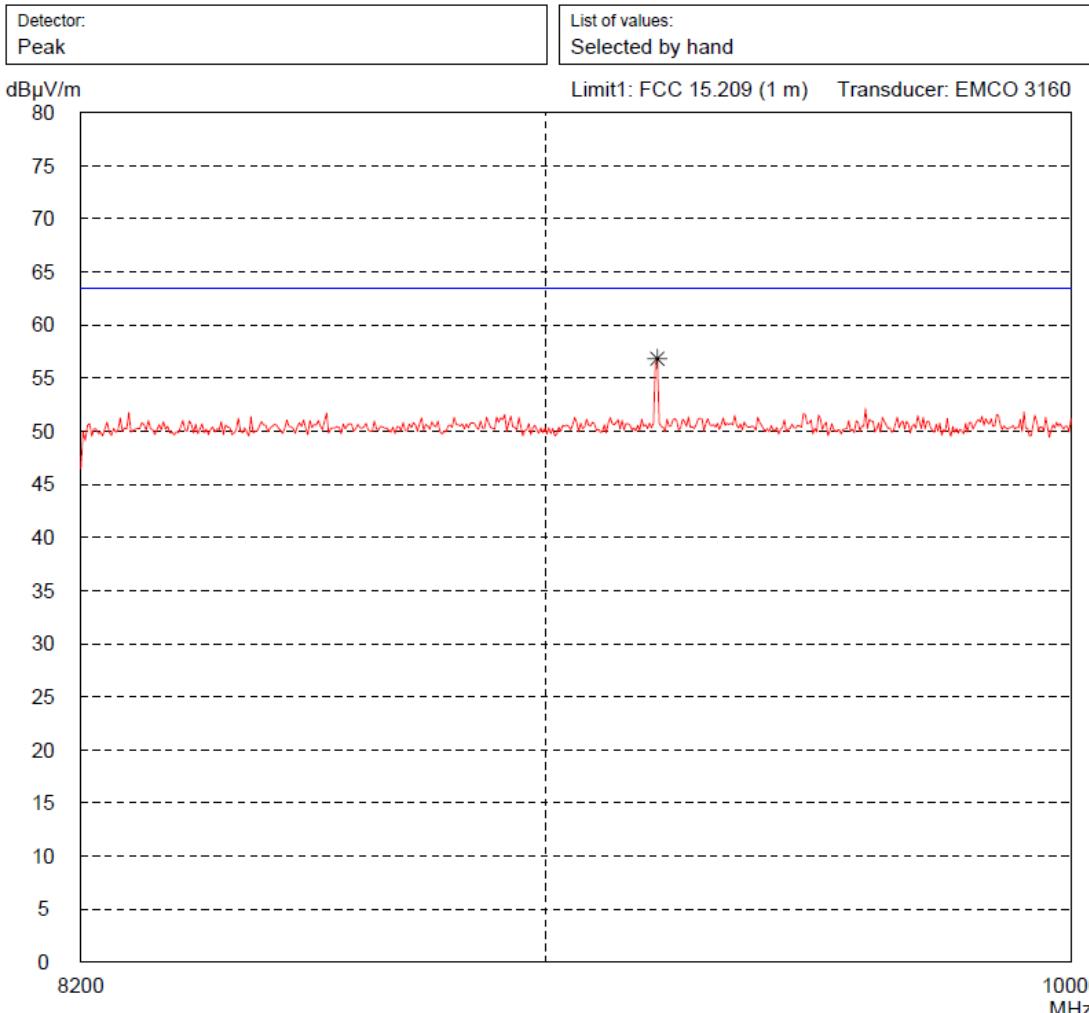


Result:
Prescan

Project file:
69861-04040 Page of Pages

Radiated Emission Test 8.2 GHz - 10 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 1 meter Vertical Polarization
Date of test:	Operator:
10/17/2011	M. Steindl
Test performed:	File name:
automatically	default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 920 MHz

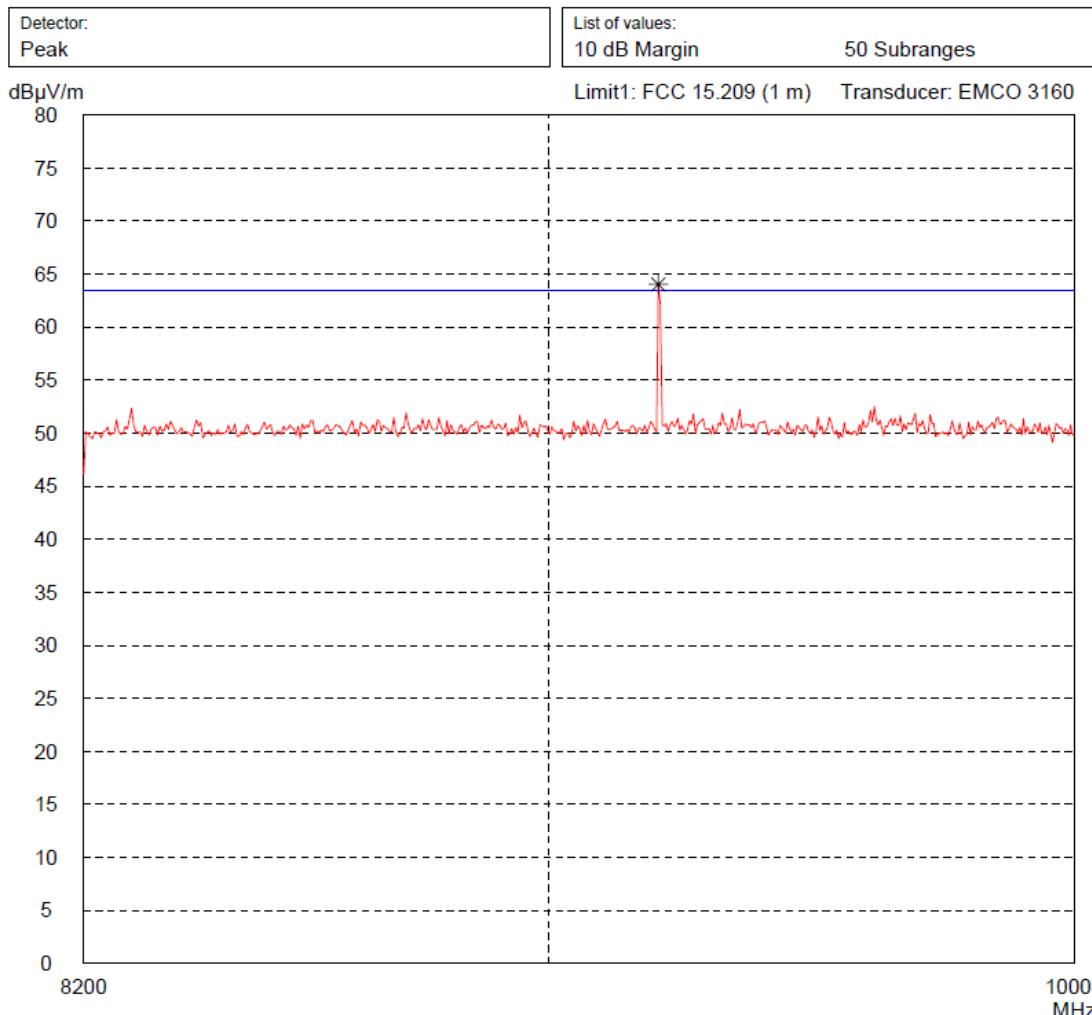


Result:
Prescan

Project file:
69861-04040 Page of Pages

Radiated Emission Test 8.2 GHz - 10 GHz
acc. to FCC Part 15 Subpart C (FAR)


Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Transmitting continuously at 920 MHz
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: by hand	File name: default.emi
Detector: Average	List of values: Selected by hand

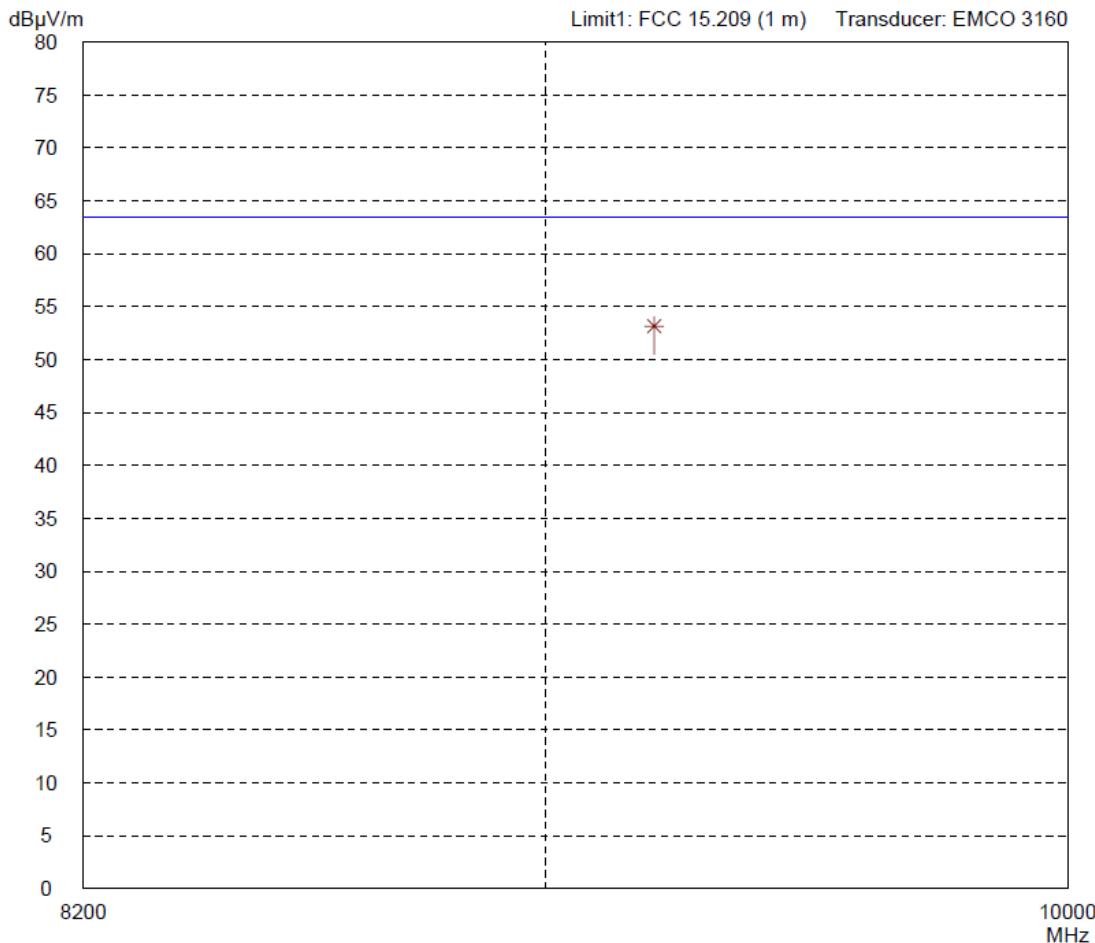

Result: Limit kept (VBW = 10 kHz)	Project file: 69861-04040	Page	of	Pages
--------------------------------------	------------------------------	------	----	-------

Radiated Emission Test 5.85 GHz - 8.2 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	Comment:
Serial no.: 111002	- 3 V external power supply
Applicant: Identec Solutions AG	- Transmitting continuously at 920 MHz
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

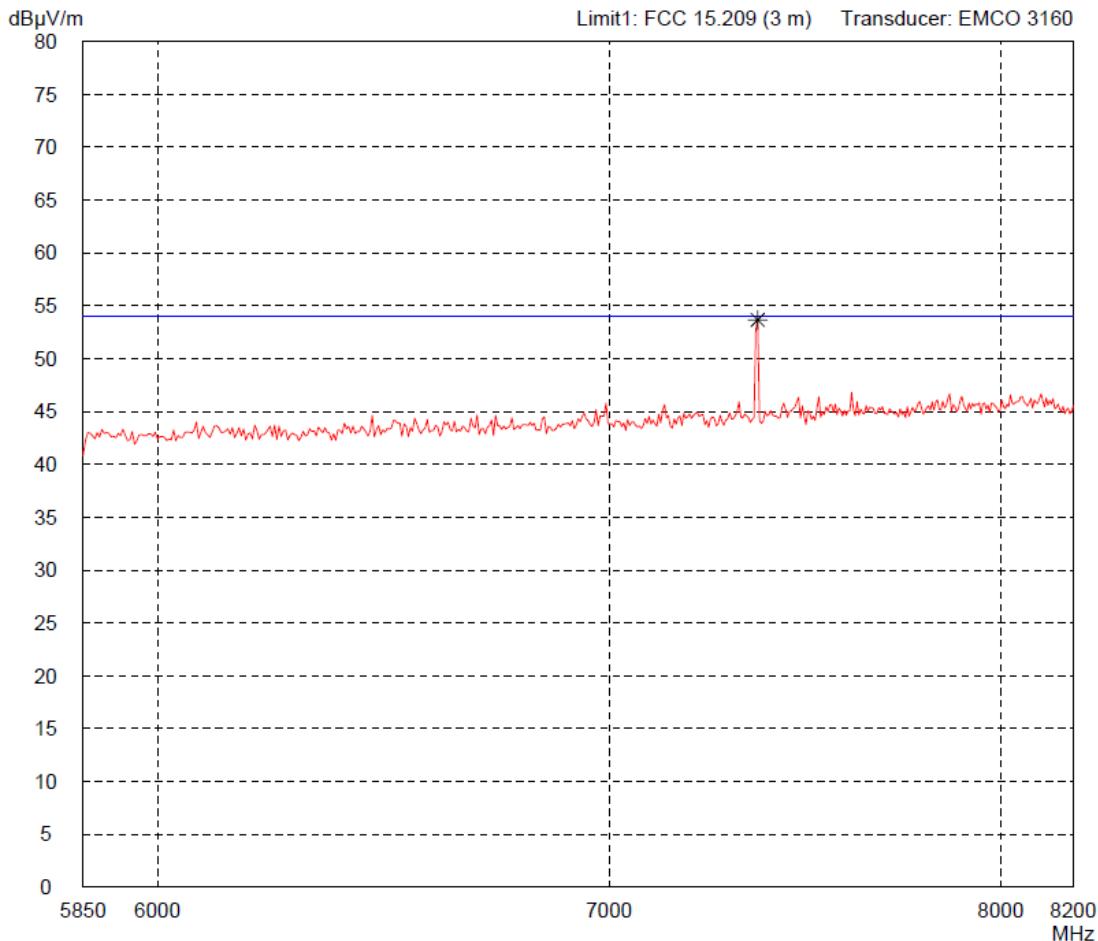

Result: Prescan	Project file: 69861-04040	Page	of	Pages
--------------------	------------------------------	------	----	-------


Radiated Emission Test 5.85 GHz - 8.2 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead
Serial no.: 111002
Applicant: Identec Solutions AG
Test site: Fully anechoic room, cabin no. 2
Tested on: Test distance 3 metres Horizontal Polarization
Date of test: 10/17/2011 Operator: M. Steindl
Test performed: by hand File name: default.emi

Comment: - 3 V external power supply - Transmitting continuously at 920 MHz

Detector: Average

List of values: Selected by hand

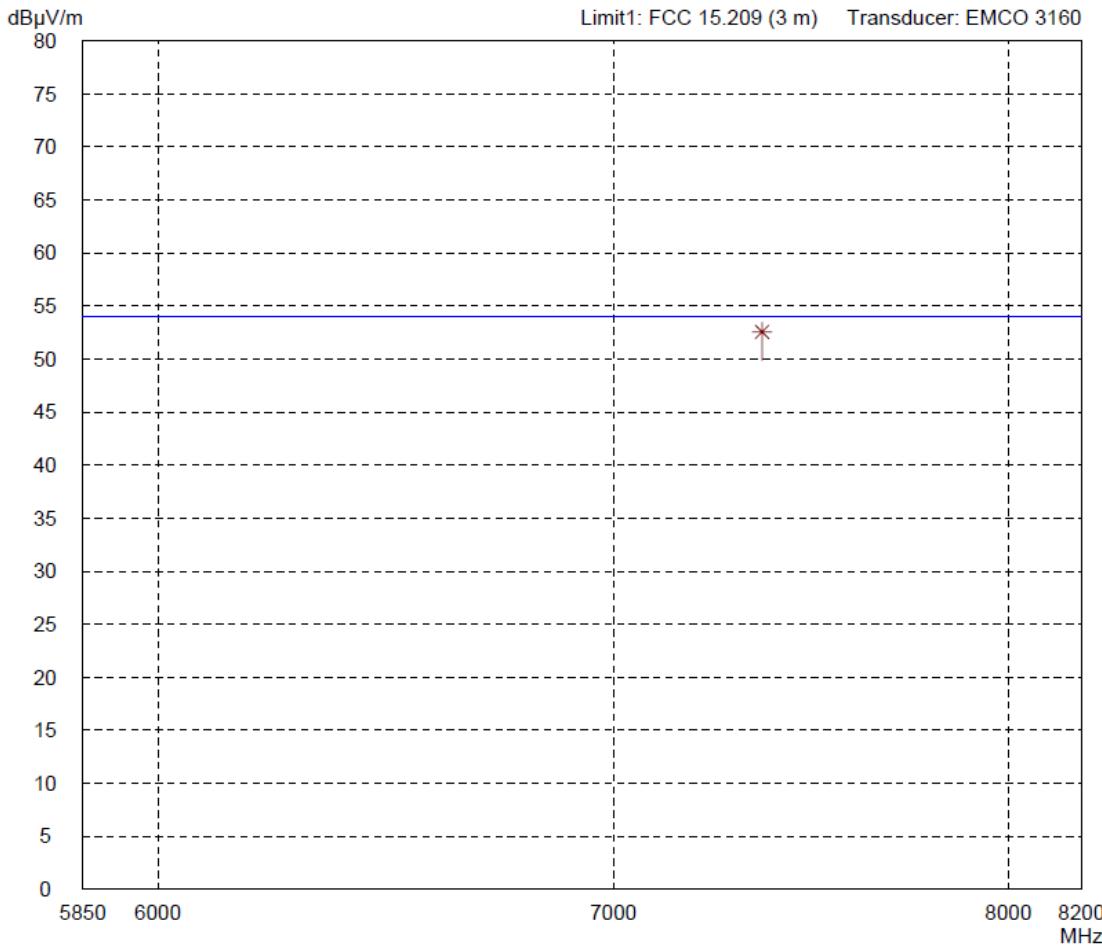

Result:
Limit kept (VBW = 10 kHz)

Project file:
69861-04040 Page of Pages


Radiated Emission Test 5.85 GHz - 8.2 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Vertical Polarization
Date of test:	Operator:
10/17/2011	M. Steindl
Test performed:	File name:
automatically	default.emi

Comment:
- 3 V external power supply
- Transmitting continuously at 920 MHz

Detector:	
Peak	

List of values:
Selected by hand

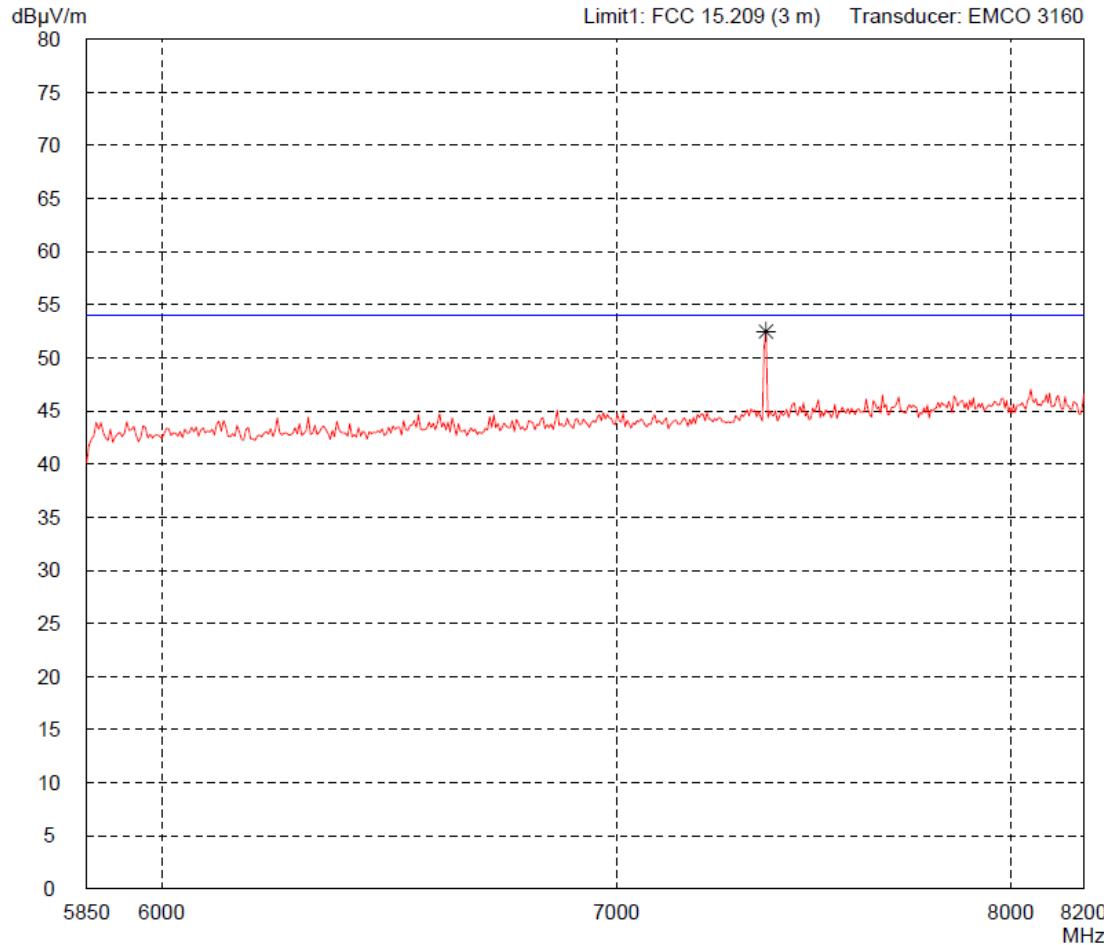


Result:
Prescan

Project file:
69861-04040

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply - Receiving mode
Serial no.: 111002	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

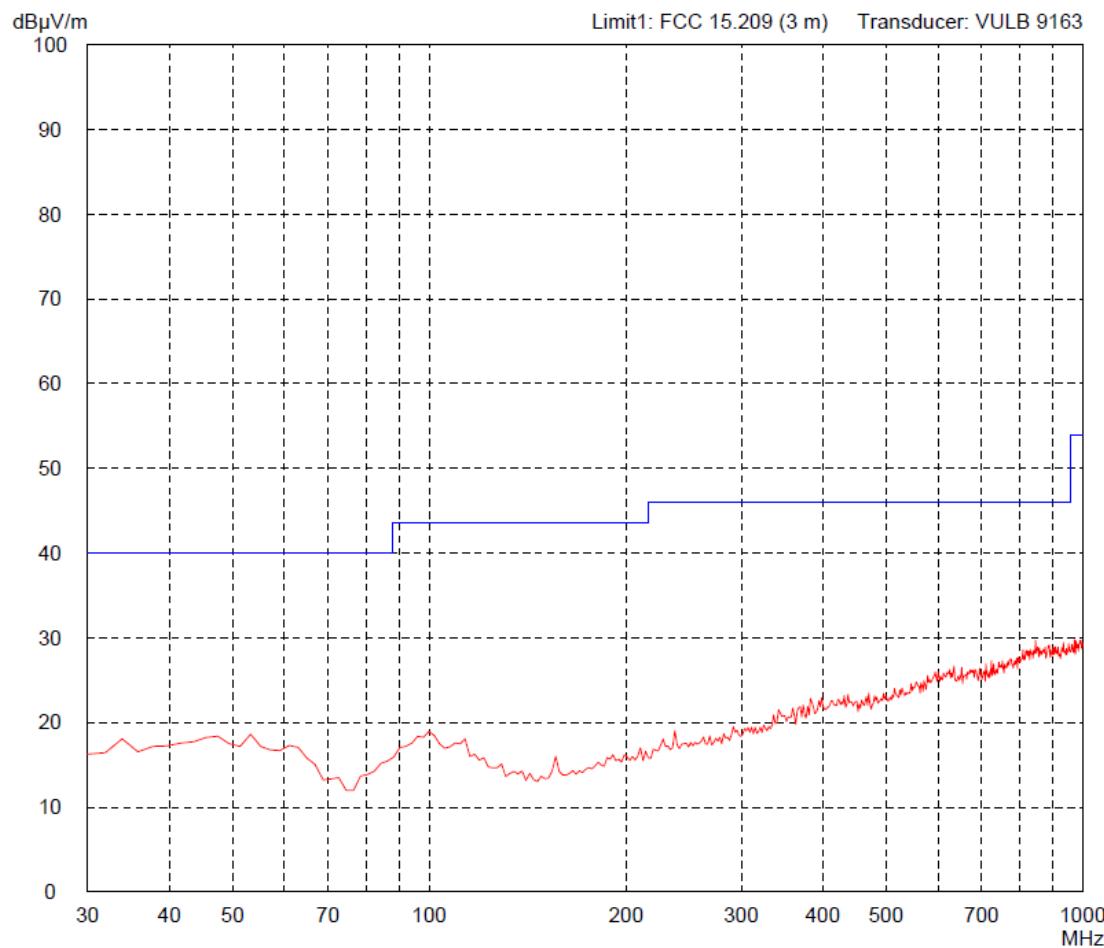

Result:
Prescan

Project file:
69861-04040

Page of Pages


Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Vertical Polarization
Date of test:	Operator: 10/17/2011 M. Steindl
Test performed:	File name: automatically default.emi

Comment:
- 3 V external power supply
- Receiving mode


Detector:	Peak
-----------	------

List of values:	10 dB Margin	50 Subranges
-----------------	--------------	--------------

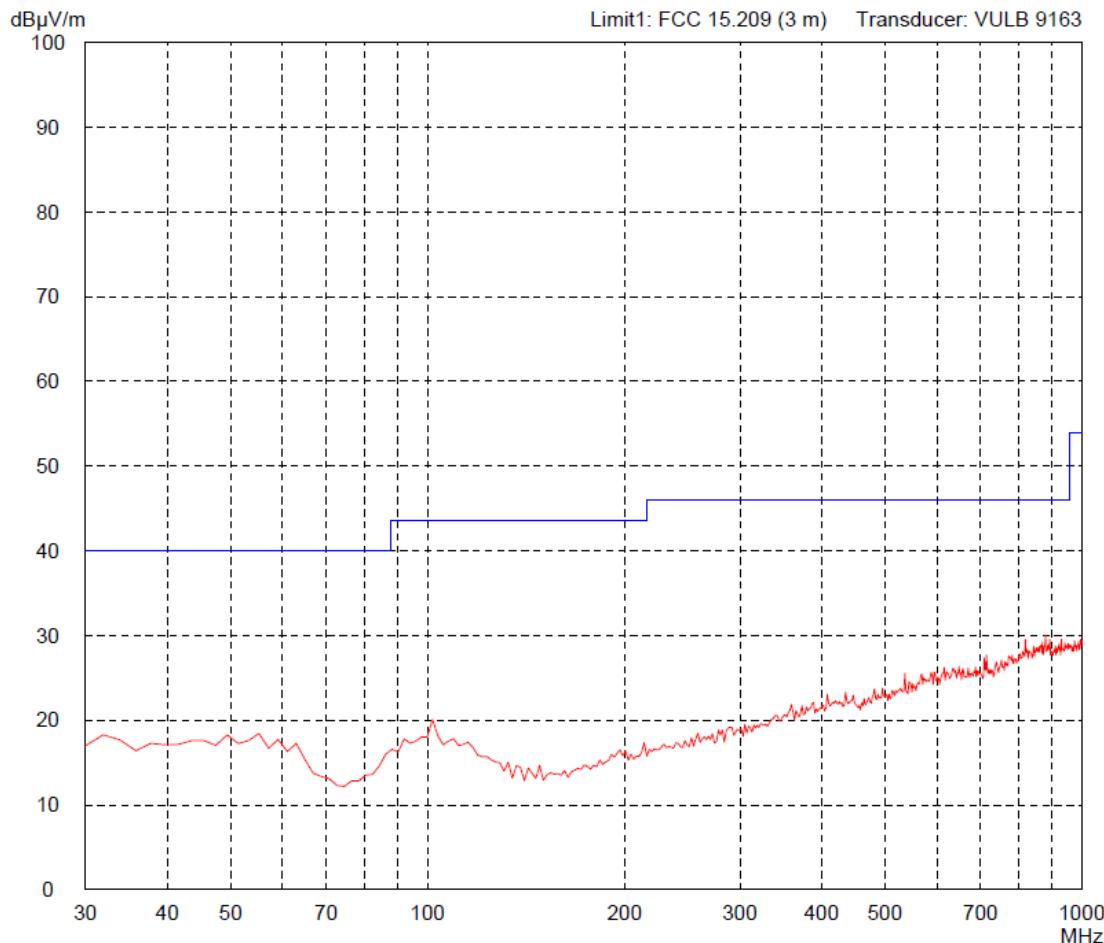

Result:	Prescan
---------	---------

Project file:	69861-04040	Page	of	Pages
---------------	-------------	------	----	-------

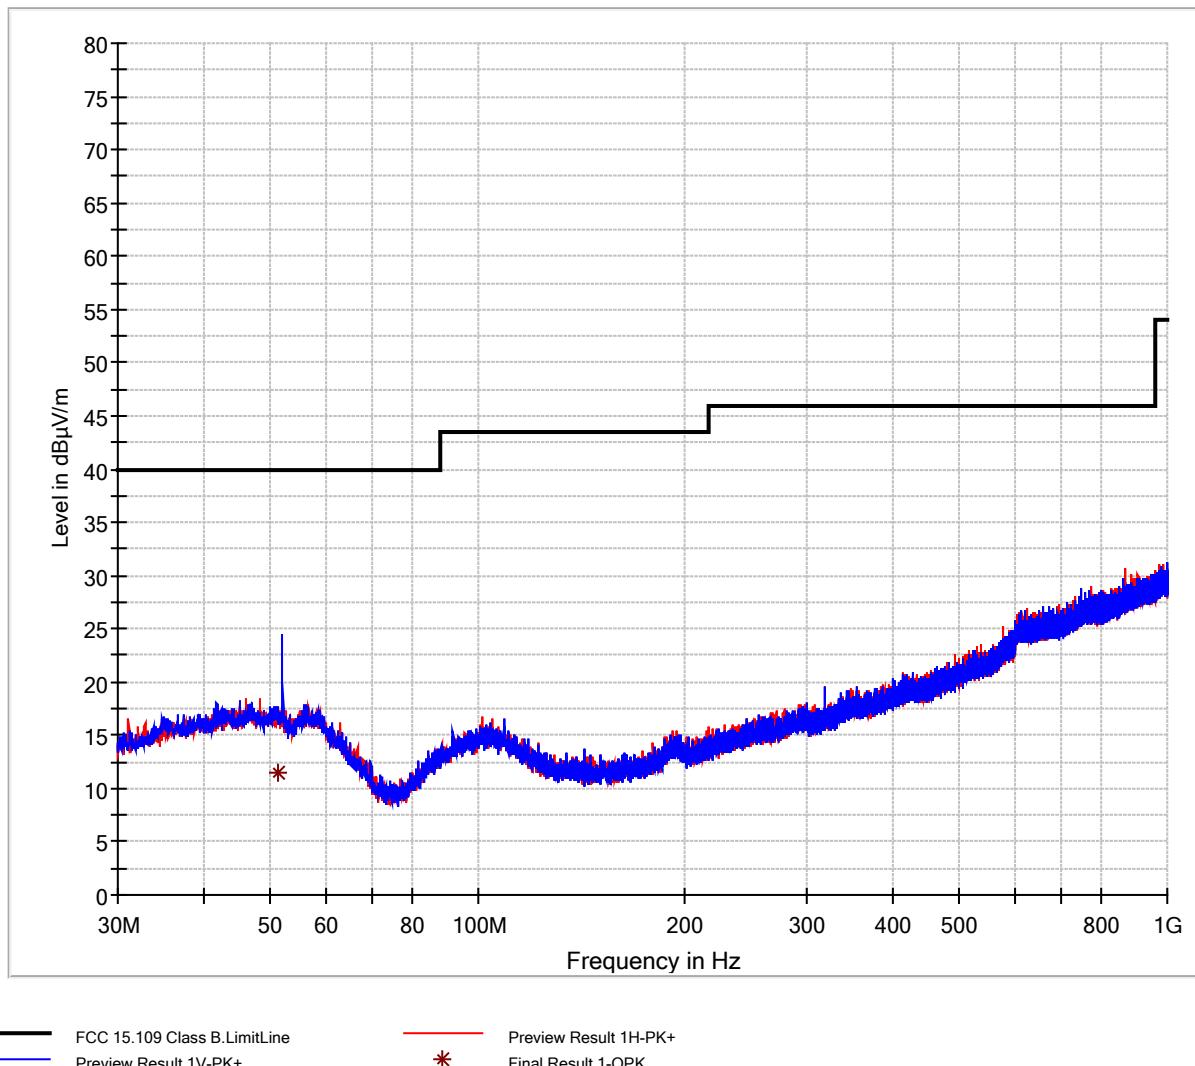


Radiated Emission Test 1 GHz - 4 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead
Serial no.: 111002
Applicant: Identec Solutions AG
Test site: Fully anechoic room, cabin no. 2
Tested on: Test distance 3 metres Horizontal Polarization
Date of test: 10/17/2011 Operator: M. Steindl
Test performed: automatically File name: default.emi

Comment: - 3 V external power supply - Receiving mode

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

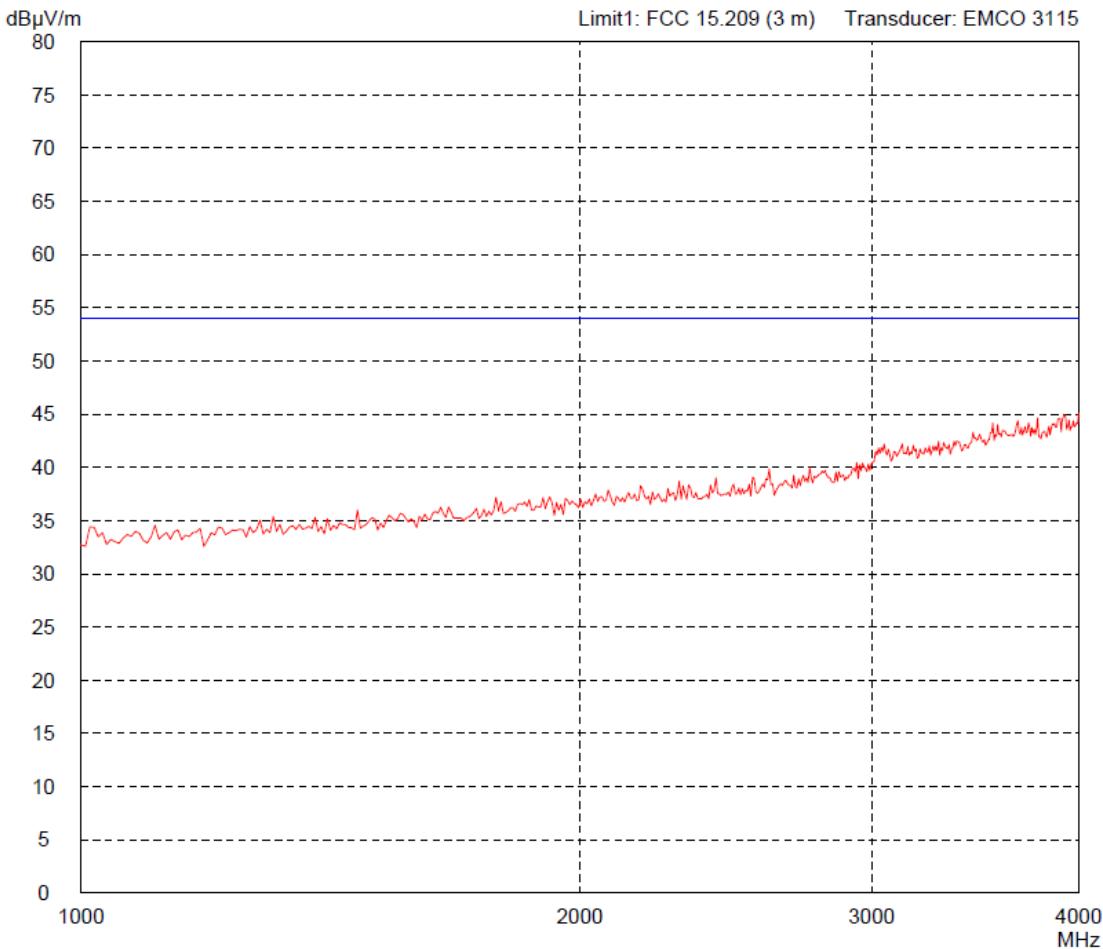

Result: Prescan	Project file: 69861-04040	Page	of	Pages
--------------------	------------------------------	------	----	-------


Radiated Emission Test 1 GHz - 4 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Vertical Polarization
Date of test:	Operator: 10/17/2011 M. Steindl
Test performed:	File name: automatically default.emi

Comment:
- 3 V external power supply
- Receiving mode

Detector:	
Peak	

List of values:
Selected by hand

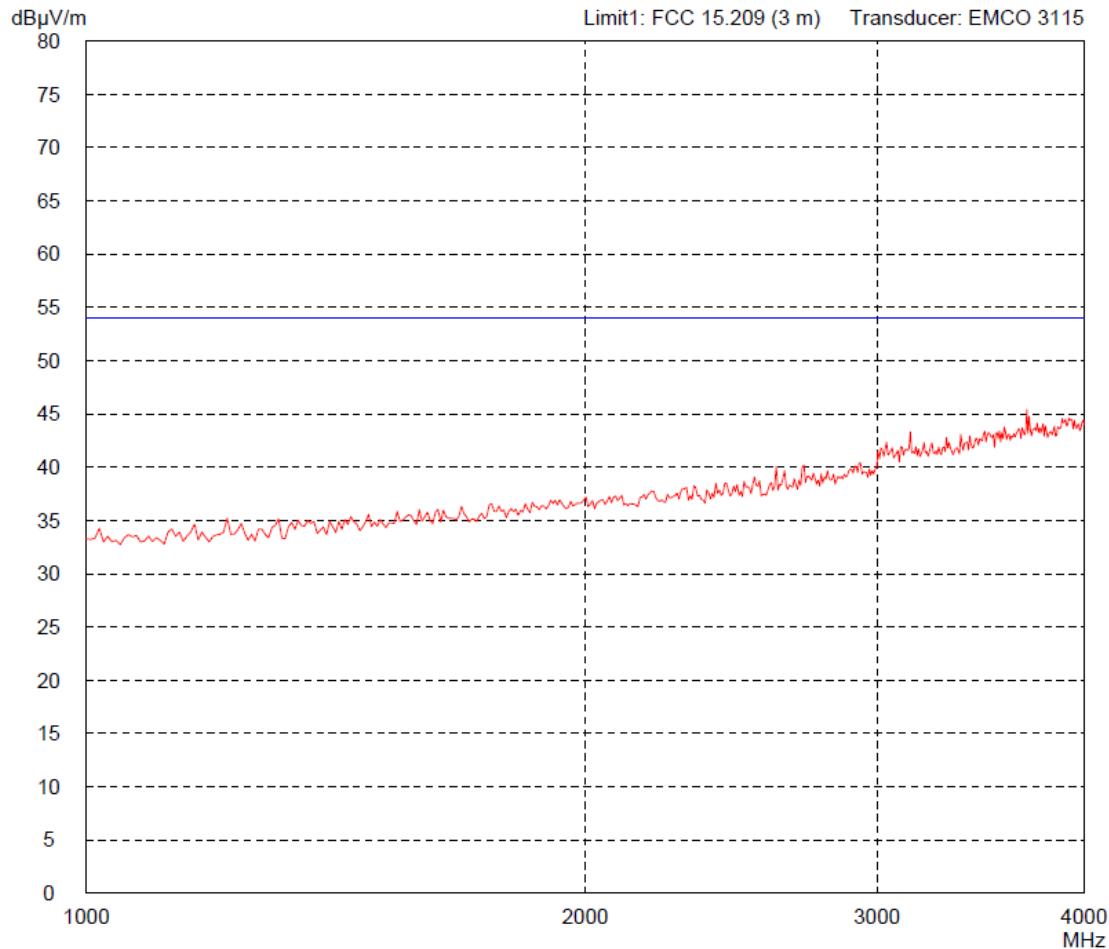


Result:
Prescan

Project file:
69861-04040

Page of Pages

Radiated Emission Test 3.95 GHz - 5.85 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model: i-Q350 HHX Hothead	Comment: - 3 V external power supply
Serial no.: 111002	- Receiving mode
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/17/2011	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

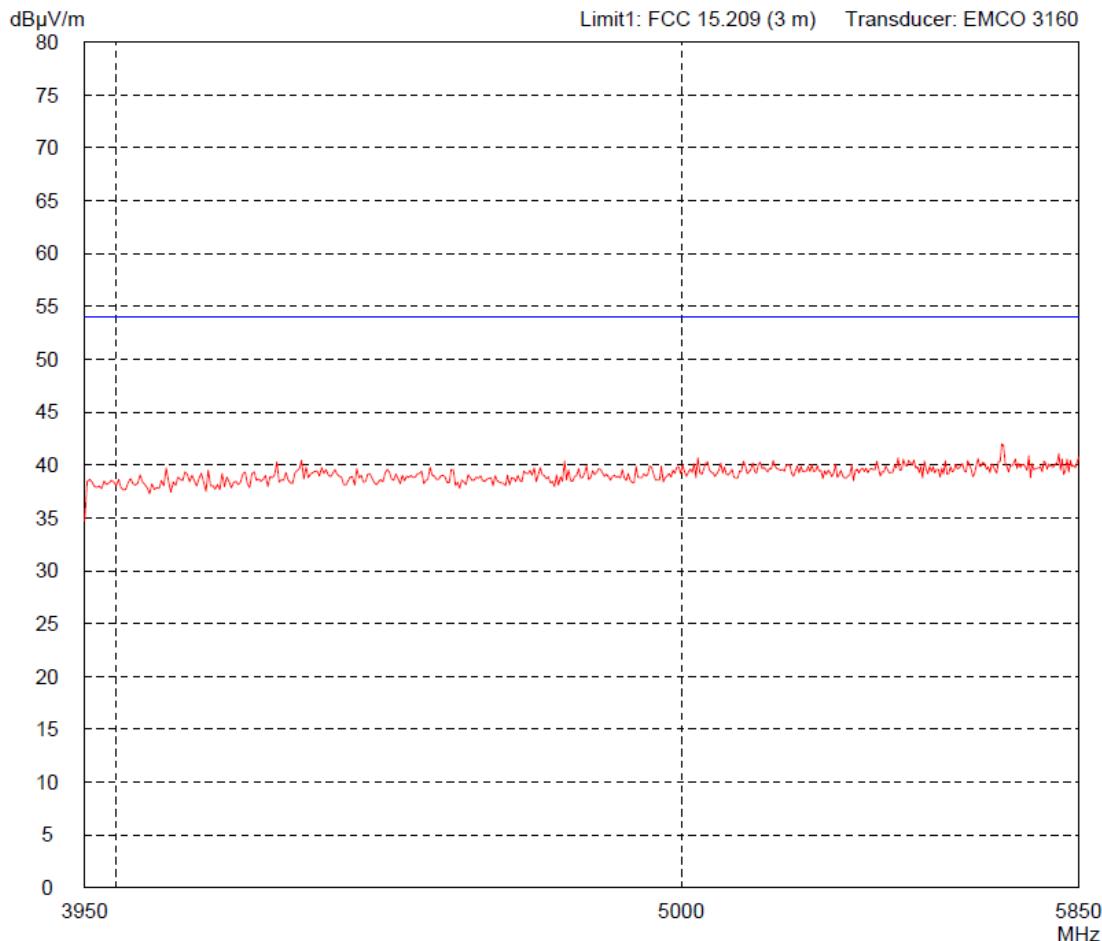

Result: Prescan	Project file: 69861-04040	Page of Pages
--------------------	------------------------------	---------------


Radiated Emission Test 3.95 GHz - 5.85 GHz
acc. to FCC Part 15 Subpart C (FAR)

Model:	i-Q350 HHX Hothead
Serial no.:	111002
Applicant:	Identec Solutions AG
Test site:	Fully anechoic room, cabin no. 2
Tested on:	Test distance 3 metres Vertical Polarization
Date of test:	Operator:
10/17/2011	M. Steindl
Test performed:	File name:
automatically	default.emi

Comment:
- 3 V external power supply
- Receiving mode

Detector:	List of values:
Peak	10 dB Margin 50 Subranges

dB μ V/m Limit1: FCC 15.209 (3 m) Transducer: EMCO 3160

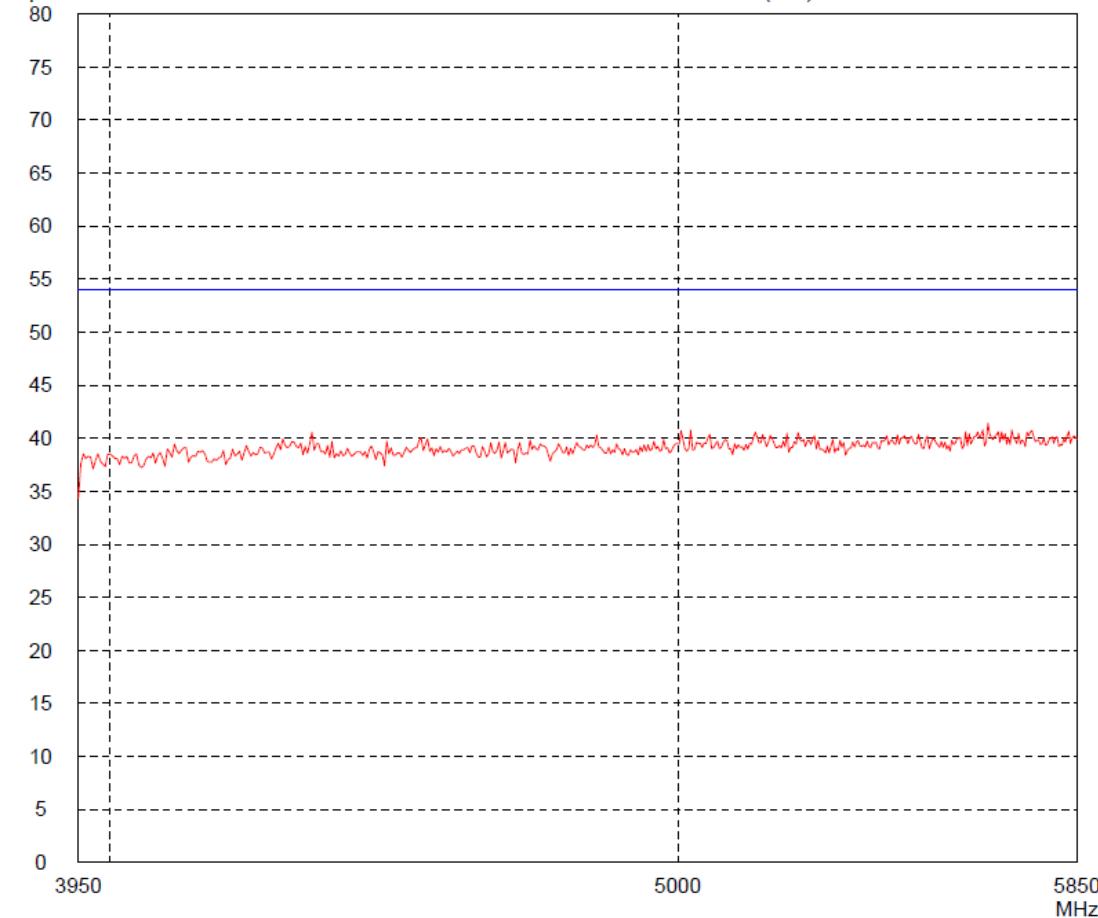

Result:
Limit kept

Project file:
69861-04040

Page of Pages