


PRODUCT LABELING

Label representation:

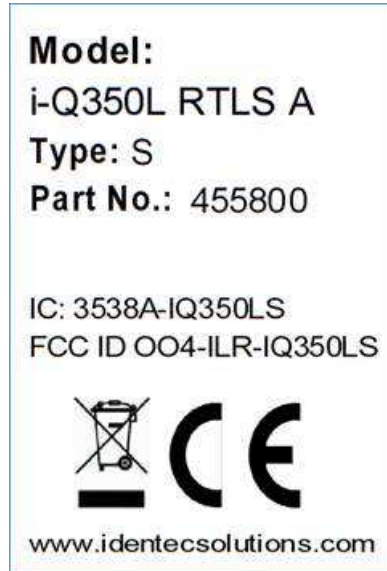


Label description:

MATERIAL	Self-adhesive label Polyester white
DIMENSION	Length 30mm, height 20mm
CORNER RADIUS	1mm
UNIT	On roll 76,2mm
RESISTIVITY	UV resistant, operating temperature range -40 to +85°C
PRINT	Black, min 300dpi
LAMINATION	Clear matt or glossy polyester
CORNER RADIUS	1mm
CONTENT	<p>Fixed content:</p> <ul style="list-style-type: none"> • “Model:”, “Type:” “Part No.:” Tahoma 5pt bold • “www.identecsolutions.com” Tahoma text height 1,3mm • “IC: 3538A-IQ350LS”, “FCC ID 004-ILR-IQ350LS” Tahoma text height 1,5mm • CE graphic height 6mm • Wheeled bin graphic height 6mm <p>Type specific content:</p> <ul style="list-style-type: none"> • 455800 ILR-Tag i-Q350L RTLS A S <ul style="list-style-type: none"> ○ type “S” 5pt Tahoma ○ part no “455800” 4pt Tahoma • 455812 ILR-Tag i-Q350L RTLS A H <ul style="list-style-type: none"> ○ type “H” 5pt Tahoma ○ part no “455812” 4pt Tahoma
AVAILABLE PATTERN	<p>Created in EasyLabel 6</p> <ul style="list-style-type: none"> • Type_455800_iQ350L_RTLS_AS_10.fmt • Type_455812_iQ350L_RTLS_AH_10.fmt

FCC ID: 004-ILR-IQ350LS

IC ID: 3538A-IQ350LS

Label location:

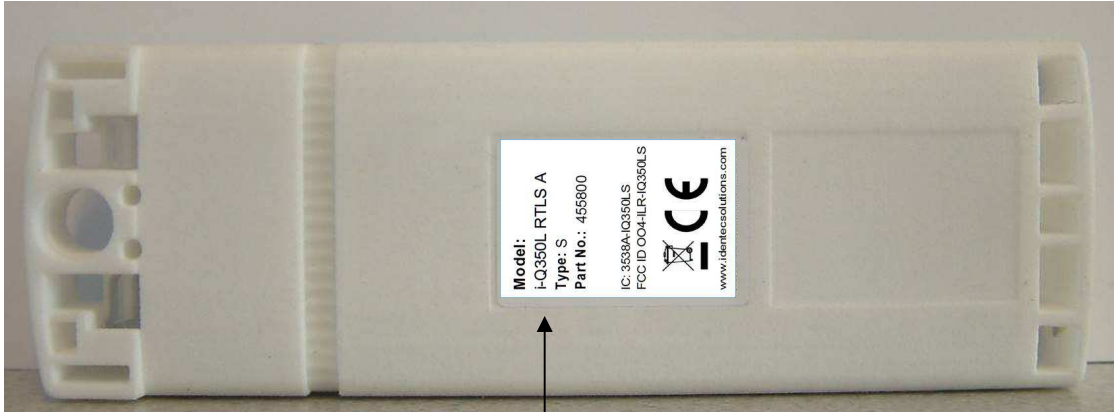

Rear face of equipment